



FCC TEST REPORT

REPORT NO.: RF120511C42E
MODEL NO.: BHT-1261BWB-CE, BHT-1261QWB-CE
FCC ID: PZWBHT1200
RECEIVED: May 11, 2012
TESTED: May 28 ~ Jun. 05, 2012 (For model: BHT-1261BWB-CE)
Sep. 26 ~ Sep. 27, 2012 (For model: BHT-1261QWB-CE)
ISSUED: Oct. 08, 2012

APPLICANT: DENSO WAVE INCORPORATED

ADDRESS: 1 Yoshiike Kusagi Agui-cho, Chita-gun Aichi
470-2297, Japan

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1. CERTIFICATION.....	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION.....	7
3.1 GENERAL DESCRIPTION OF EUT.....	7
3.2 DESCRIPTION OF TEST MODES.....	9
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	10
3.3 DESCRIPTION OF SUPPORT UNITS	12
3.3.1 CONFIGURATION OF SYSTEM UNDER TEST	15
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	17
4. TEST TYPES AND RESULTS	18
4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	18
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	18
4.1.2 TEST INSTRUMENTS.....	19
4.1.3 TEST PROCEDURES	21
4.1.4 DEVIATION FROM TEST STANDARD	21
4.1.5 TEST SETUP	22
4.1.6 EUT OPERATING CONDITIONS	22
4.1.7 TEST RESULTS	23
4.2 CONDUCTED EMISSION MEASUREMENT	36
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	36
4.2.2 TEST INSTRUMENTS.....	37
4.2.3 TEST PROCEDURES	38
4.2.4 DEVIATION FROM TEST STANDARD	38
4.2.5 TEST SETUP	38
4.2.6 EUT OPERATING CONDITIONS	39
4.2.7 TEST RESULTS	40
4.3 6dB BANDWIDTH MEASUREMENT	44
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT.....	44
4.3.2 TEST SETUP.....	44
4.3.3 TEST INSTRUMENTS.....	44
4.3.4 TEST PROCEDURE.....	44
4.3.5 DEVIATION FROM TEST STANDARD	44
4.3.6 EUT OPERATING CONDITIONS	44
4.3.7 TEST RESULTS	45
4.4 CONDUCTED OUTPUT POWER	46
4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	46
4.4.2 TEST SETUP.....	46
4.4.3 TEST INSTRUMENTS.....	46
4.4.4 TEST PROCEDURES	46
4.4.5 DEVIATION FROM TEST STANDARD	46



4.4.6	EUT OPERATING CONDITIONS	46
4.4.7	TEST RESULTS	47
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	48
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	48
4.5.2	TEST SETUP.....	48
4.5.3	TEST INSTRUMENTS.....	48
4.5.4	TEST PROCEDURE.....	48
4.5.5	DEVIATION FROM TEST STANDARD	48
4.5.6	EUT OPERATING CONDITION	48
4.5.7	TEST RESULTS	49
4.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT	50
4.6.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT.....	50
4.6.2	TEST SETUP.....	50
4.6.3	TEST INSTRUMENTS.....	50
4.6.4	TEST PROCEDURE.....	50
4.6.5	DEVIATION FROM TEST STANDARD	51
4.6.6	EUT OPERATING CONDITION	51
4.6.7	TEST RESULTS	51
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	55
6.	INFORMATION ON THE TESTING LABORATORIES.....	56
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	57



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120511C42E	Original release	Oct. 08, 2012



1. CERTIFICATION

PRODUCT: Barcode Handy Terminal
MODEL NO.: BHT-1261BWB-CE, BHT-1261QWB-CE
BRAND: DENSO
APPLICANT: DENSO WAVE INCORPORATED
TESTED: May 28 ~ Jun. 05, 2012 (For model: BHT-1261BWB-CE)
Sep. 26 ~ Sep. 27, 2012 (For model: BHT-1261QWB-CE)
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS: **FCC Part 15, Subpart C (Section 15.247)**
ANSI C63.10-2009

The above equipment (model: BHT-1261BWB-CE, BHT-1261QWB-CE) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Ivy Lin , DATE : Oct. 08, 2012
Ivy Lin / Specialist

APPROVED BY : Ken Liu , DATE : Oct. 08, 2012
Ken Liu / Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -16.56dB at 0.15000MHz.
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -5.8dB at 2483.50MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.34 dB
	200MHz ~1000MHz	3.35 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Barcode Handy Terminal
MODEL NO.	BHT-1261BWB-CE, BHT-1261QWB-CE
POWER SUPPLY	3.7Vdc (Battery)
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b:11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 65.0Mbps (802.11n (20MHz))
OPERATING FREQUENCY	2412 ~ 2462MHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, 802.11n (20MHz)
OUTPUT POWER	107.9mW
ANTENNA TYPE	Printed PCB antenna with 1.93dBi gain
ANTENNA CONNECTOR	N/A
DATA CABLE	N/A
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	Battery

NOTE:

1. This report is prepared for FCC class II permissive change. This report is issued as a supplementary report to the original BVADT report no. RF120511C42. The difference compared with original report is adding model for changing scanner module (2D), camera, flash light and MR sensor of battery case. Therefore, the test items of conducted emission and radiated emissions below 1GHz had been verified for additional model and the other original test results were kept in the report.
2. The following models are provided to the EUT. (New model is marked in boldface.)

Model No.	BHT-1261BWB-CE	BHT-1261QWB-CE
Module	1D Long	2D
Keyboard	Type D	Type D
Camera	5M/AF	5M/AF

3. The EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
802.11b	1TX
802.11g	1TX
802.11n (20MHz)	1TX

4. The EUT consumes power from the following batteries:

2 Cell Battery	
MODEL	BT-110LA(BP06-00028C)
RATING	3.7Vdc Capacity, 2300mAh

3 Cell Battery	
MODEL	BT-110L(BP06-00029C)
RATING	3.7Vdc Capacity, 3450mAh

* After pre-testing, the EUT with 3 cell battery is the worst case of all tests except conducted emission test and the EUT with 2 cell battery is the worst case of conducted emission test.

5. The following devices are support units only.

Device	Brand Name	Model No.	Remark
Communication Unit (USB Cradle)	DENSO	CU-1233	-
Communication Unit (Ethernet Cradle)	DENSO	CU-1211	-
AC adapter	FSP	FSP050-DBAE1	AC I/P: 100-240Vac, 1.5A, 50-60Hz DC O/P: 12Vdc, 4.16A 1.8m non-shielded AC cable without core 1.2m shielded DC cable with 1 core

* After pre-testing, the EUT with Communication Unit (USB Cradle) is the worst case for final test.

6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



A D T

3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		



3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	-	√	Model: BHT-1261BWB-CE with 3 cell battery
B	-	√	-	-	Model: BHT-1261BWB-CE with 3 cell battery and Communication Unit (USB Cradle)
C	-	-	√	-	Model: BHT-1261BWB-CE with 2 cell battery and Communication Unit (USB Cradle)
D	-	√	-	-	Model: BHT-1261QWB-CE with 3 cell battery
E	-	√	√	-	Model: BHT-1261QWB-CE with 2 cell battery and Communication Unit (USB Cradle)

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on X-plane.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B, D, E	802.11g	1 to 11	11	OFDM	BPSK	6.0

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
C, E	802.11g	1 to 11	11	OFDM	BPSK	6.0



BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	6.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TEST MODE	TESTED BY
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz	A	Hura Yang
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	A, B	Hura Yang
	24deg. C, 69%RH	120Vac, 60Hz	D, E	Alan Wu
PLC	25deg. C, 64%RH	120Vac, 60Hz	C	Skys Huang
	24deg. C, 64%RH	120Vac, 60Hz	E	Match Tsui
APCM	25deg. C, 65%RH	120Vac, 60Hz	A	Hura Yang

3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

For radiated emissions test

TEST MODE A & D

The EUT has been tested as an independent unit.

TEST MODE B & E

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Communication Unit (USB Cradle)	DENSO	CU-1233	NA	NA
2	AC ADAPTER	FSP	FSP050-DBAE1	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA

NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. Item 1 & 2 are provided by the client.



A D T

For conducted emission test

TEST MODE C

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	D610	CRMTH1S	E2K5HCKT
2	24" LCD MONITOR	DELL	U2410	CN082WXD-7287 2-0CN-06RL	FCC DoC Approved
3	MOUSE	DELL	MO56U0	516056379	FCC DoC Approved
4	PRINTER	EPSON	LQ-300+	DCGY047271	FCC DoC Approved
5	WIRELESS AP	BUFFALO	WBR2-G54	34059544811631	FDI-04600142-0
6	BLUETOOTH SPEAKER	Ambeon	Ms-01B	AMB 08041000	NA
7	COMMUNICATION UNIT (USB CRADLE)	DENSO	CU-1233	NA	NA
8	AC ADAPTER	FSP	FSP050-DBAE1	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.8m D-Sub cable with 2 cores.
3	1.8m foil shielded wire, USB Connector, w/o core.
4	1.8m braid shielded wire, DB25 connector, w/o core.
5	NA
6	NA
7	1.8m USB cable, 1.8m RS-232 cable
8	NA

NOTE:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item 5 ~ 6 acted as communication partners to transfer data.
3. Item 7 & 8 are provided by the client.



A D T

TEST MODE E

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	PP18L	D1T5W1S 28407620224	QDS-BRCM1019
2	LCD MONITOR	DELL	2408WFPb	CN-0NN792-742 61-823-OKGS	FCC DoC Approved
3	PRINTER	EPSON	B241A	FAPY139300	FCC DoC Approved
4	MOUSE	Microsoft	ITE78CJ	N/A	FCC DoC Approved
5	WIRELESS AP	BUFFALO	WBR2-G54	3405954481163 1	FDI-04600142-0
6	BLUETOOTH SPEAKER	Ambeon	Ms-01B	AMB 08041000	NA
7	COMMUNICATIO N UNIT (USB CRADLE)	DENSO	CU-1233	NA	NA
8	AC ADAPTER	FSP	FSP050-DBAE1	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.8m D-Sub cable with 2 cores.
3	1.8 m shielded cable, terminated with USB connector, w/o core.
4	1.8m foil shielded wire, USB Connector, with core.
5	NA
6	NA
7	1.8m USB cable, 1.8m RS-232 cable
8	NA


NOTE:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item 5 ~ 6 acted as communication partners to transfer data.
3. Item 7 & 8 are provided by the client.


3.3.1 CONFIGURATION OF SYSTEM UNDER TEST

For radiated emissions test

TEST MODE A & D

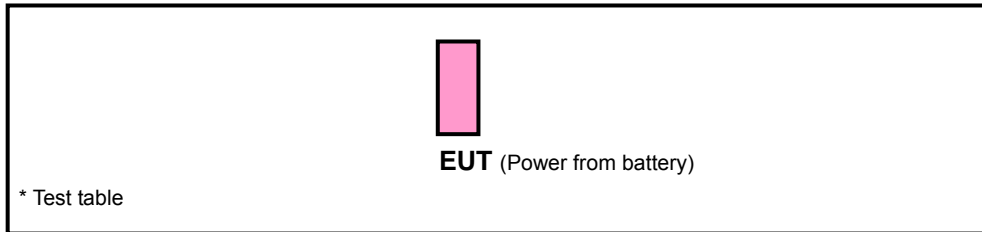


TEST MODE B & E

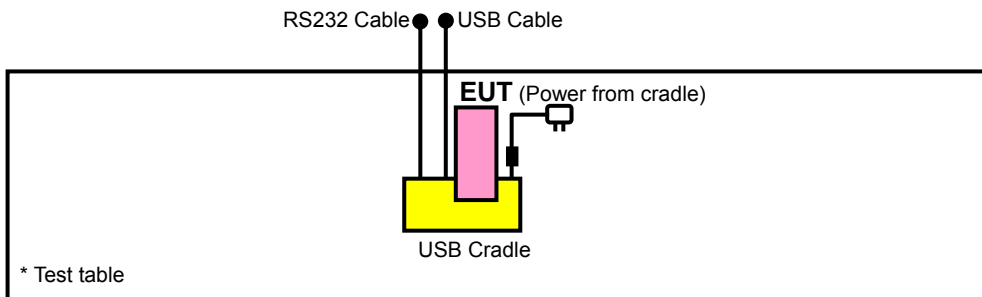

For conducted emission test

TEST MODE C & E

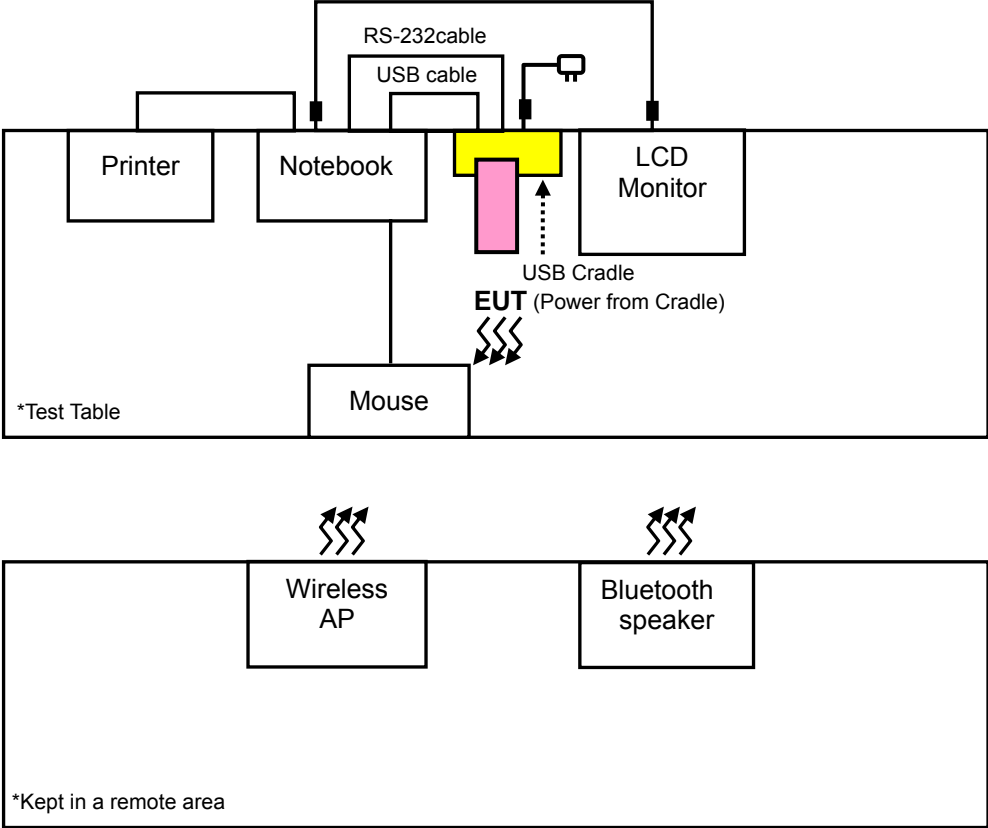

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
558074 D01 DTS Meas Guidance v01
ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 TEST INSTRUMENTS

Test Date: May 28 ~ 29, 2012 (Model: BHT-1261BWB-CE)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	Aug. 02, 2011	Aug. 01, 2012
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Jul. 21, 2011	Jul. 20, 2012
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Apr. 06, 2012	Apr. 05, 2013
HORN Antenna SCHWARZBECK	9120D	209	Aug. 25, 2011	Aug. 24, 2012
HORN Antenna SCHWARZBECK	BBHA 9170	148	Jul. 20, 2011	Jul. 19, 2012
Preamplifier Agilent	8447D	2944A10633	Oct. 29, 2011	Oct. 28, 2012
Preamplifier Agilent	8449B	3008A01964	Oct. 29, 2011	Oct. 28, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250723/4	Aug. 30, 2011	Aug. 29, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 106	12738/6+309224/ 4	Aug. 30, 2011	Aug. 29, 2012
Software ADT.	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table ADT.	TT100	TT93021703	NA	NA
Turn Table Controller ADT.	SC100	SC93021703	NA	NA
High Speed Peak Power Meter	ML2495A	0824011	Aug. 04, 2011	Aug. 03, 2012
Power Sensor	MA2411B	0738171	Aug. 04, 2011	Aug. 03, 2012

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC 7450F-3.



A D T

Test Date: Sep. 27, 2012 (Model: BHT-1261QWB-CE)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	Aug. 06, 2012	Aug. 05, 2013
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Feb. 03, 2012	Feb. 02, 2013
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Apr. 06, 2012	Apr. 05, 2013
HORN Antenna SCHWARZBECK	9120D	209	Sep. 03, 2012	Sep. 02, 2013
HORN Antenna SCHWARZBECK	BBHA 9170	148	Jul. 11, 2012	Jul. 10, 2013
Preamplifier Agilent	8447D	2944A10633	Oct. 29, 2011	Oct. 28, 2012
Preamplifier Agilent	8449B	3008A01964	Oct. 29, 2011	Oct. 28, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250723/4	Aug. 28, 2012	Aug. 27, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 106	12738/6+309224/ 4	Aug. 28, 2012	Aug. 27, 2013
Software ADT.	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table ADT.	TT100	TT93021703	NA	NA
Turn Table Controller ADT.	SC100	SC93021703	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 4. The IC Site Registration No. is IC 7450F-3.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Height of receiving antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

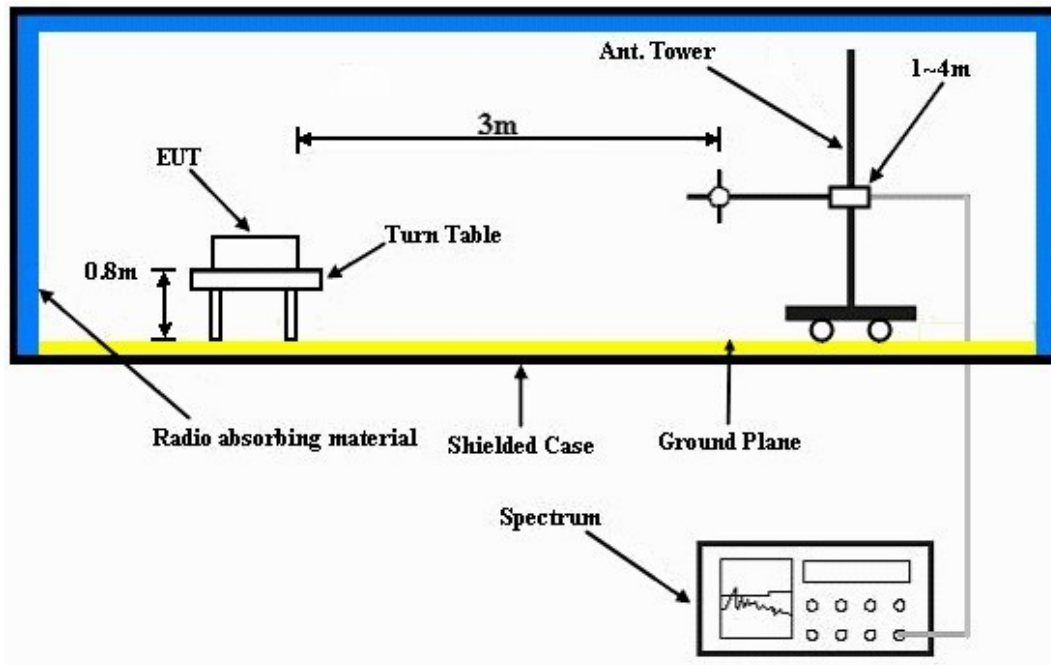

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

TEST MDOE A & D

- Placed the EUT on a testing table.
- Set the EUT under transmission condition continuously at specific channel frequency.

TEST MDOE B & E

- Placed the EUT with USB cradle on the testing table.
- The EUT ran a test program (provided by manufacturer) to enable all functions under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



A D T

4.1.7 TEST RESULTS

802.11b

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.4 PK	74.0	-17.6	1.13 H	347	25.10	31.30
2	2390.00	45.1 AV	54.0	-8.9	1.13 H	347	13.80	31.30
3	*2412.00	107.5 PK			1.10 H	346	76.10	31.40
4	*2412.00	103.6 AV			1.10 H	346	72.20	31.40
5	2814.00	56.5 PK	74.0	-17.5	1.14 H	340	23.90	32.60
6	2814.00	46.5 AV	54.0	-7.5	1.14 H	340	13.90	32.60
7	4824.00	50.5 PK	74.0	-23.5	1.00 H	224	13.30	37.20
8	4824.00	44.6 AV	54.0	-9.4	1.00 H	224	7.40	37.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.9 PK	74.0	-19.1	1.66 V	14	23.60	31.30
2	2390.00	42.1 AV	54.0	-11.9	1.66 V	14	10.80	31.30
3	*2412.00	100.3 PK			1.66 V	14	68.90	31.40
4	*2412.00	96.5 AV			1.66 V	14	65.10	31.40
5	2814.00	55.7 PK	74.0	-18.3	1.00 V	312	23.10	32.60
6	2814.00	43.0 AV	54.0	-11.0	1.00 V	312	10.40	32.60
7	4824.00	51.4 PK	74.0	-22.6	1.44 V	257	14.20	37.20
8	4824.00	44.0 AV	54.0	-10.0	1.44 V	257	6.80	37.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.1 PK			1.08 H	163	75.60	31.50
2	*2437.00	104.4 AV			1.08 H	163	72.90	31.50
3	2843.00	56.5 PK	74.0	-17.5	1.14 H	348	23.80	32.70
4	2843.00	44.7 AV	54.0	-9.3	1.14 H	348	12.00	32.70
5	4874.00	51.2 PK	74.0	-22.8	1.00 H	340	13.90	37.30
6	4874.00	45.9 AV	54.0	-8.1	1.00 H	340	8.60	37.30
7	7311.00	51.7 PK	74.0	-22.3	1.00 H	192	8.20	43.50
8	7311.00	38.4 AV	54.0	-15.6	1.00 H	192	-5.10	43.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	100.0 PK			1.68 V	208	68.50	31.50
2	*2437.00	96.9 AV			1.68 V	208	65.40	31.50
3	2843.00	56.2 PK	74.0	-17.8	1.66 V	311	23.50	32.70
4	2843.00	43.5 AV	54.0	-10.5	1.66 V	311	10.80	32.70
5	4874.00	49.3 PK	74.0	-24.7	1.00 V	96	12.00	37.30
6	4874.00	44.5 AV	54.0	-9.5	1.00 V	96	7.20	37.30
7	7311.00	51.6 PK	74.0	-22.4	1.00 V	127	8.10	43.50
8	7311.00	38.1 AV	54.0	-15.9	1.00 V	127	-5.40	43.50

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.8 PK			1.07 H	346	77.20	31.60
2	*2462.00	105.0 AV			1.07 H	346	73.40	31.60
3	2483.50	57.6 PK	74.0	-16.4	1.08 H	346	26.00	31.60
4	2483.50	45.9 AV	54.0	-8.1	1.08 H	346	14.30	31.60
5	2872.00	56.9 PK	74.0	-17.1	1.11 H	349	24.10	32.80
6	2872.00	44.9 AV	54.0	-9.1	1.11 H	349	12.10	32.80
7	4924.00	51.7 PK	74.0	-22.3	1.00 H	171	14.30	37.40
8	4924.00	47.0 AV	54.0	-7.0	1.00 H	171	9.60	37.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.8 PK			1.64 V	16	69.20	31.60
2	*2462.00	97.2 AV			1.64 V	16	65.60	31.60
3	2483.50	55.9 PK	74.0	-18.1	1.64 V	16	24.30	31.60
4	2483.50	42.8 AV	54.0	-11.2	1.64 V	16	11.20	31.60
5	2872.00	56.2 PK	74.0	-17.8	1.00 V	259	23.40	32.80
6	2872.00	43.3 AV	54.0	-10.7	1.00 V	259	10.50	32.80
7	4924.00	50.6 PK	74.0	-23.4	1.42 V	259	13.20	37.40
8	4924.00	45.5 AV	54.0	-8.5	1.42 V	259	8.10	37.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.1 PK	74.0	-14.9	1.11 H	347	27.80	31.30
2	2390.00	45.8 AV	54.0	-8.2	1.11 H	347	14.50	31.30
3	*2412.00	107.1 PK			1.11 H	347	75.70	31.40
4	*2412.00	95.7 AV			1.11 H	347	64.30	31.40
5	2814.00	57.3 PK	74.0	-16.7	1.15 H	348	24.70	32.60
6	2814.00	46.2 AV	54.0	-7.8	1.15 H	348	13.60	32.60
7	4824.00	46.6 PK	74.0	-27.4	1.00 H	227	9.40	37.20
8	4824.00	33.5 AV	54.0	-20.5	1.00 H	227	-3.70	37.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.5 PK	74.0	-19.5	1.67 V	16	23.20	31.30
2	2390.00	42.1 AV	54.0	-11.9	1.67 V	16	10.80	31.30
3	*2412.00	99.7 PK			1.67 V	16	68.30	31.40
4	*2412.00	87.9 AV			1.67 V	16	56.50	31.40
5	2814.00	55.0 PK	74.0	-19.0	1.67 V	144	22.40	32.60
6	2814.00	43.4 AV	54.0	-10.6	1.67 V	144	10.80	32.60
7	4824.00	47.3 PK	74.0	-26.7	1.43 V	271	10.10	37.20
8	4824.00	33.7 AV	54.0	-20.3	1.43 V	271	-3.50	37.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.1 PK			1.06 H	350	76.60	31.50
2	*2437.00	96.5 AV			1.06 H	350	65.00	31.50
3	4874.00	46.9 PK	74.0	-27.1	1.00 H	239	9.60	37.30
4	4874.00	32.8 AV	54.0	-21.2	1.00 H	239	-4.50	37.30
5	7311.00	51.5 PK	74.0	-22.5	1.00 H	187	8.00	43.50
6	7311.00	38.4 AV	54.0	-15.6	1.00 H	187	-5.10	43.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.6 PK			1.71 V	16	70.10	31.50
2	*2437.00	89.7 AV			1.71 V	16	58.20	31.50
3	4874.00	47.1 PK	74.0	-26.9	1.48 V	264	9.80	37.30
4	4874.00	33.6 AV	54.0	-20.4	1.48 V	264	-3.70	37.30
5	7311.00	51.2 PK	74.0	-22.8	1.00 V	217	7.70	43.50
6	7311.00	38.1 AV	54.0	-15.9	1.00 V	217	-5.40	43.50

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.5 PK			1.07 H	348	76.90	31.60
2	*2462.00	97.2 AV			1.07 H	348	65.60	31.60
3	2483.50	63.1 PK	74.0	-10.9	1.07 H	348	31.50	31.60
4	2483.50	47.4 AV	54.0	-6.6	1.07 H	348	15.80	31.60
5	4924.00	48.4 PK	74.0	-25.6	1.00 H	198	11.00	37.40
6	4924.00	34.1 AV	54.0	-19.9	1.00 H	198	-3.30	37.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.3 PK			1.64 V	17	68.70	31.60
2	*2462.00	88.9 AV			1.64 V	17	57.30	31.60
3	2483.50	56.9 PK	74.0	-17.1	1.67 V	17	25.30	31.60
4	2483.50	43.2 AV	54.0	-10.8	1.67 V	17	11.60	31.60
5	4924.00	46.9 PK	74.0	-27.1	1.47 V	290	9.50	37.40
6	4924.00	32.9 AV	54.0	-21.1	1.47 V	290	-4.50	37.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.3 PK	74.0	-14.7	1.10 H	341	28.00	31.30
2	2390.00	46.4 AV	54.0	-7.6	1.10 H	341	15.10	31.30
3	*2412.00	107.5 PK			1.10 H	341	76.10	31.40
4	*2412.00	95.0 AV			1.10 H	341	63.60	31.40
5	4824.00	46.4 PK	74.0	-27.6	1.00 H	223	9.20	37.20
6	4824.00	33.7 AV	54.0	-20.3	1.00 H	223	-3.50	37.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.0 PK	74.0	-20.0	1.71 V	15	22.70	31.30
2	2390.00	42.5 AV	54.0	-11.5	1.71 V	15	11.20	31.30
3	*2412.00	99.4 PK			1.71 V	15	68.00	31.40
4	*2412.00	87.4 AV			1.71 V	15	56.00	31.40
5	4824.00	46.6 PK	74.0	-27.4	1.47 V	275	9.40	37.20
6	4824.00	33.6 AV	54.0	-20.4	1.47 V	275	-3.60	37.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1000 hPa	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.4 PK			1.07 H	347	76.90	31.50
2	*2437.00	95.8 AV			1.07 H	347	64.30	31.50
3	4874.00	46.6 PK	74.0	-27.4	1.00 H	228	9.30	37.30
4	4874.00	33.4 AV	54.0	-20.6	1.00 H	228	-3.90	37.30
5	7311.00	51.7 PK	74.0	-22.3	1.00 H	196	8.20	43.50
6	7311.00	38.4 AV	54.0	-15.6	1.00 H	196	-5.10	43.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.8 PK			1.69 V	15	71.30	31.50
2	*2437.00	89.6 AV			1.69 V	15	58.10	31.50
3	4874.00	47.5 PK	74.0	-26.5	1.48 V	292	10.20	37.30
4	4874.00	33.5 AV	54.0	-20.5	1.48 V	292	-3.80	37.30
5	7311.00	51.6 PK	74.0	-22.4	1.06 V	339	8.10	43.50
6	7311.00	38.3 AV	54.0	-15.7	1.06 V	339	-5.20	43.50

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.6 PK			1.08 H	343	78.00	31.60
2	*2462.00	96.5 AV			1.08 H	343	64.90	31.60
3	2483.50	64.5 PK	74.0	-9.5	1.08 H	343	32.90	31.60
4	2483.50	48.2 AV	54.0	-5.8	1.08 H	343	16.60	31.60
5	4924.00	47.1 PK	74.0	-26.9	1.00 H	205	9.70	37.40
6	4924.00	33.4 AV	54.0	-20.6	1.00 H	205	-4.00	37.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.5 PK			1.66 V	14	69.90	31.60
2	*2462.00	88.5 AV			1.66 V	14	56.90	31.60
3	2483.50	58.4 PK	74.0	-15.6	1.66 V	14	26.80	31.60
4	2483.50	43.9 AV	54.0	-10.1	1.66 V	14	12.30	31.60
5	4924.00	47.3 PK	74.0	-26.7	1.38 V	274	9.90	37.40
6	4924.00	33.7 AV	54.0	-20.3	1.38 V	274	-3.70	37.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

BELOW 1GHz WORST-CASE DATA : 802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TEST MODE	A
TESTED BY	Haru Yang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.73	14.8 QP	40.0	-25.2	1.75 H	37	1.80	13.00
2	70.73	14.5 QP	40.0	-25.5	1.25 H	152	2.40	12.10
3	228.22	14.5 QP	46.0	-31.5	1.00 H	292	2.40	12.10
4	286.55	16.4 QP	46.0	-29.6	1.00 H	186	2.00	14.40
5	329.32	17.7 QP	46.0	-28.3	1.00 H	19	2.00	15.70
6	545.14	21.8 QP	46.0	-24.2	1.00 H	261	0.90	20.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.68	24.3 QP	40.0	-15.7	1.50 V	216	11.00	13.30
2	70.73	22.0 QP	40.0	-18.0	1.25 V	229	9.90	12.10
3	99.89	15.2 QP	43.5	-28.3	1.25 V	15	5.80	9.40
4	418.76	18.6 QP	46.0	-27.4	1.50 V	208	0.60	18.00
5	741.51	23.3 QP	46.0	-22.7	1.00 V	322	-0.80	24.10
6	865.94	27.6 QP	46.0	-18.4	1.25 V	229	1.20	26.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TEST MODE	B
TESTED BY	Haru Yang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	66.84	23.4 QP	40.0	-16.6	1.75 H	207	10.70	12.70
2	142.67	22.1 QP	43.5	-21.4	2.00 H	72	8.40	13.70
3	216.55	20.7 QP	46.0	-25.3	1.50 H	114	9.00	11.70
4	286.55	24.9 QP	46.0	-21.1	1.00 H	126	10.50	14.40
5	311.82	24.2 QP	46.0	-21.8	1.00 H	90	8.90	15.30
6	337.10	22.2 QP	46.0	-23.8	1.00 H	136	6.30	15.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	61.01	28.9 QP	40.0	-11.1	1.99 V	306	15.50	13.40
2	142.67	21.7 QP	43.5	-21.8	1.00 V	132	8.00	13.70
3	286.55	24.6 QP	46.0	-21.4	1.50 V	156	10.20	14.40
4	364.32	22.9 QP	46.0	-23.1	1.24 V	150	6.30	16.60
5	467.36	22.9 QP	46.0	-23.1	1.00 V	115	3.70	19.20
6	519.86	24.2 QP	46.0	-21.8	1.00 V	75	3.80	20.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH	TEST MODE	D
TESTED BY	Alan Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	97.81	17.8 QP	43.5	-25.7	1.74 H	309	-9.20	27.00
2	150.20	21.6 QP	43.5	-21.9	1.74 H	14	-5.40	27.00
3	445.15	19.4 QP	46.0	-26.6	1.00 H	5	-7.60	27.00
4	645.01	22.2 QP	46.0	-23.8	1.00 H	271	-4.80	27.00
5	767.25	24.7 QP	46.0	-21.3	1.49 H	240	-2.30	27.00
6	879.80	26.2 QP	46.0	-19.8	1.24 H	5	-0.80	27.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	97.81	18.1 QP	43.5	-25.4	2.00 V	336	-8.90	27.00
2	189.01	14.6 QP	43.5	-28.9	1.00 V	222	-12.40	27.00
3	474.25	19.6 QP	46.0	-26.4	1.00 V	157	-7.40	27.00
4	540.23	20.9 QP	46.0	-25.1	1.49 V	16	-6.10	27.00
5	720.68	23.4 QP	46.0	-22.6	1.74 V	226	-3.60	27.00
6	887.56	26.7 QP	46.0	-19.3	1.24 V	172	-0.30	27.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH	TEST MODE	E
TESTED BY	Alan Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	51.24	21.2 QP	40.0	-18.8	1.99 H	182	-5.86	27.04
2	97.81	23.7 QP	43.5	-19.8	1.74 H	101	-3.32	27.04
3	222.00	23.1 QP	46.0	-22.9	1.49 H	116	-3.95	27.04
4	590.68	22.2 QP	46.0	-23.9	1.49 H	216	-4.89	27.04
5	738.15	24.0 QP	46.0	-22.0	1.00 H	343	-3.07	27.04
6	875.91	26.1 QP	46.0	-19.9	1.74 H	63	-0.92	27.04
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.66	29.1 QP	40.0	-10.9	1.24 V	141	2.04	27.04
2	74.53	24.9 QP	40.0	-15.1	1.24 V	66	-2.12	27.04
3	97.81	21.4 QP	43.5	-22.2	1.74 V	236	-5.69	27.04
4	359.77	19.4 QP	46.0	-26.7	1.49 V	235	-7.69	27.04
5	656.65	22.9 QP	46.0	-23.1	1.00 V	250	-4.13	27.04
6	930.25	26.8 QP	46.0	-19.2	1.99 V	206	-0.20	27.04

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



A D T

4.2.2 TEST INSTRUMENTS

Test Date: May 29, 2012 (Model: BHT-1261BWB-CE)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 23, 2011	Nov. 22, 2012
RF signal cable Woken	5D-FB	Cable-HYC01-01	Dec. 29, 2011	Dec. 28, 2012
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Jul. 07, 2011	Jul. 06, 2012
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Feb. 07, 2012	Feb. 06, 2013
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1.
3. The VCCI Site Registration No. is C-2040.

Test Date: Sep. 26, 2012 (Model: BHT-1261QWB-CE)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 23, 2011	Nov. 22, 2012
RF signal cable Woken	5D-FB	Cable-HYC01-01	Dec. 29, 2011	Dec. 28, 2012
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Jul. 02, 2012	Jul. 01, 2013
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Feb. 07, 2012	Feb. 06, 2013
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1.
3. The VCCI Site Registration No. is C-2040.

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

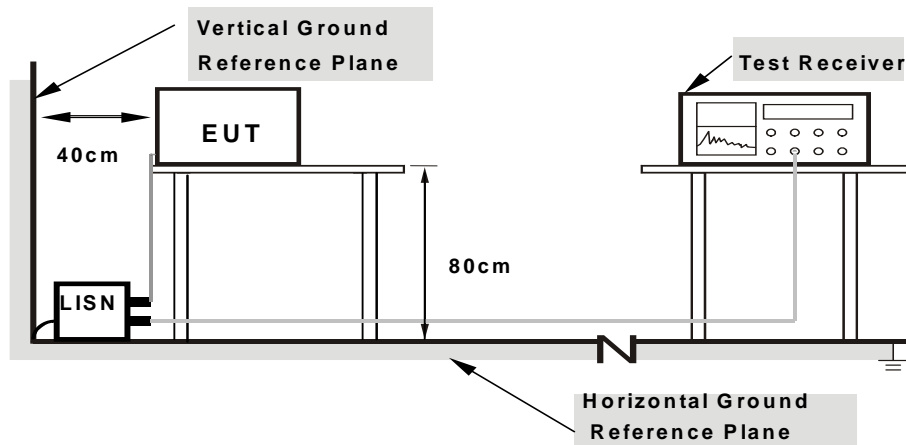

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. The EUT run "VCCITest" program (provided by manufacturer) to enable EUT under operating condition.
- c. Prepared the Wireless AP and Bluetooth speaker placed them outside of testing area to act as communication partner for EUT.
- d. The EUT run barcode scan function.
- e. Step d ~ d were repeated


4.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA : 802.11g

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.11	47.79	32.37	47.90	32.48	66.00	56.00	-18.10	-23.52
2	0.18906	0.13	41.13	25.38	41.26	25.51	64.08	54.08	-22.82	-28.57
3	0.45469	0.14	29.45	20.57	29.59	20.71	56.79	46.79	-27.20	-26.08
4	0.96641	0.19	24.19	15.71	24.38	15.90	56.00	46.00	-31.62	-30.10
5	13.94531	0.85	29.85	22.76	30.70	23.61	60.00	50.00	-29.30	-26.39
6	15.89844	0.95	33.38	26.61	34.33	27.56	60.00	50.00	-25.67	-22.44


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

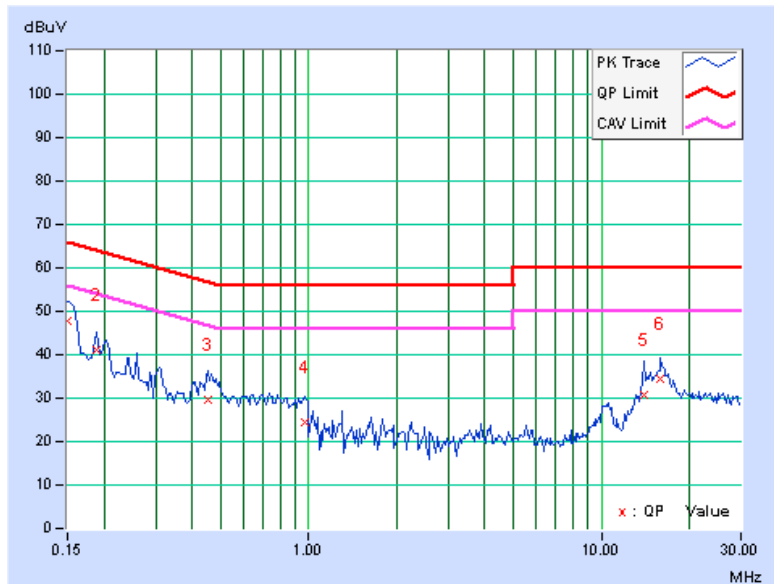

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	0.13	36.49	26.84	36.62	26.97	65.79	55.79	-29.17	-28.82
2	0.18906	0.14	40.83	29.83	40.97	29.97	64.08	54.08	-23.11	-24.11
3	0.45469	0.16	30.32	20.54	30.48	20.70	56.79	46.79	-26.31	-26.09
4	0.94297	0.20	23.59	14.44	23.79	14.64	56.00	46.00	-32.21	-31.36
5	14.16016	0.75	30.83	24.31	31.58	25.06	60.00	50.00	-28.42	-24.94
6	16.44531	0.83	30.33	24.69	31.16	25.52	60.00	50.00	-28.84	-24.48

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

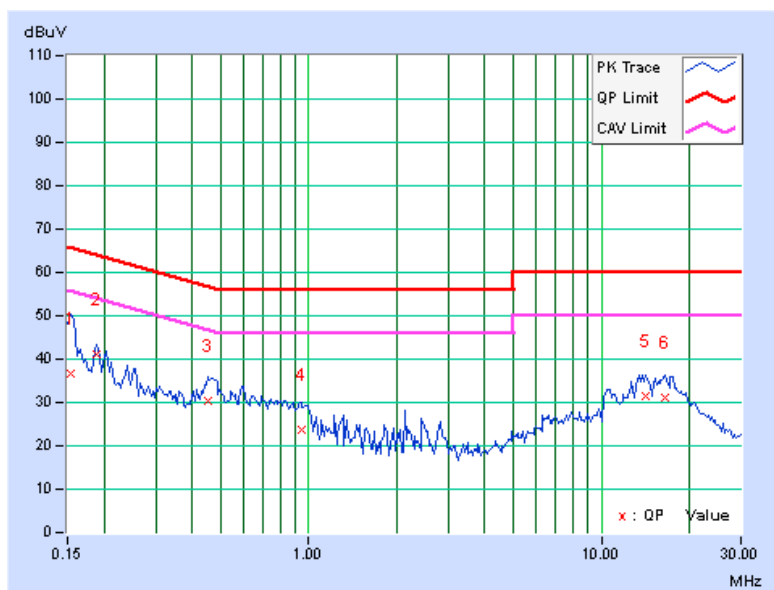




A D T

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	E		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.11	49.33	36.18	49.44	36.29	66.00	56.00	-16.56	-19.71
2	0.19297	0.13	42.71	27.88	42.84	28.01	63.91	53.91	-21.07	-25.90
3	0.23984	0.13	36.22	21.10	36.35	21.23	62.10	52.10	-25.75	-30.87
4	0.45469	0.14	29.62	21.30	29.76	21.44	56.79	46.79	-27.03	-25.35
5	4.18359	0.35	27.35	15.15	27.70	15.50	56.00	46.00	-28.30	-30.50
6	13.21094	0.81	27.71	21.40	28.52	22.21	60.00	50.00	-31.48	-27.79


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

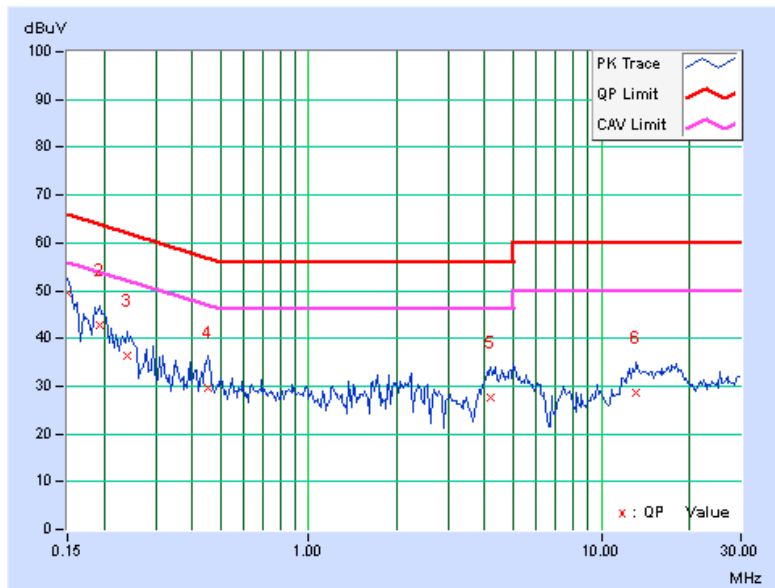

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	E		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.12	49.32	36.54	49.44	36.66	66.00	56.00	-16.56	-19.34
2	0.18516	0.14	42.99	24.29	43.13	24.43	64.25	54.25	-21.13	-29.83
3	0.23594	0.14	35.81	19.10	35.95	19.24	62.24	52.24	-26.29	-33.00
4	0.34922	0.15	27.71	17.69	27.86	17.84	58.98	48.98	-31.12	-31.14
5	0.45078	0.16	31.21	24.07	31.37	24.23	56.86	46.86	-25.50	-22.64
6	5.05469	0.39	29.29	18.23	29.68	18.62	60.00	50.00	-30.32	-31.38

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

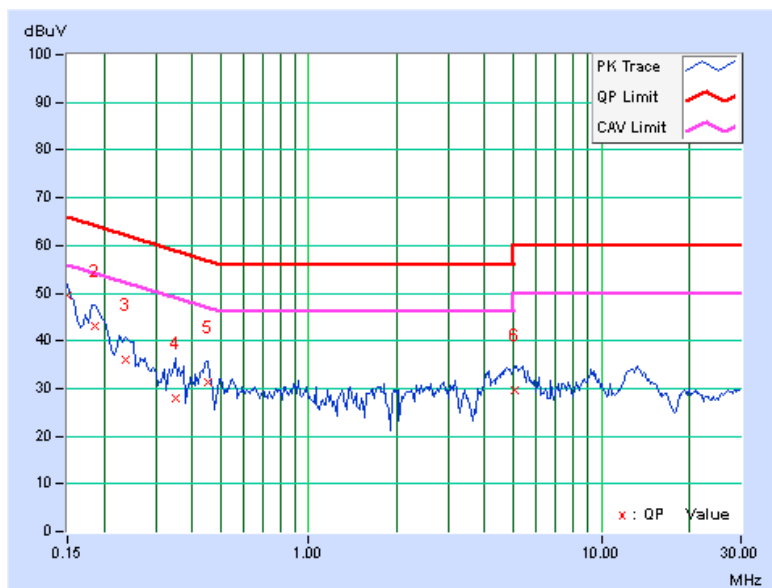


4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST SETUP

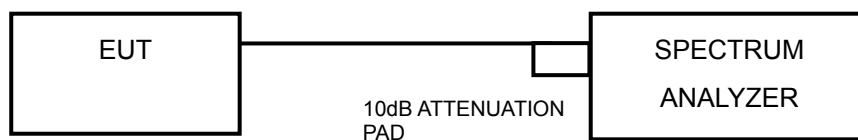

4.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.3.4 TEST PROCEDURE

- a. Set resolution bandwidth (RBW) = approximately 1% of the emission bandwidth
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	9.08	0.5	PASS
6	2437	9.02	0.5	PASS
11	2462	9.11	0.5	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.30	0.5	PASS
6	2437	16.32	0.5	PASS
11	2462	16.09	0.5	PASS

802.11n (20MHz)


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.36	0.5	PASS
6	2437	17.30	0.5	PASS
11	2462	17.39	0.5	PASS

4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.4.2 TEST SETUP

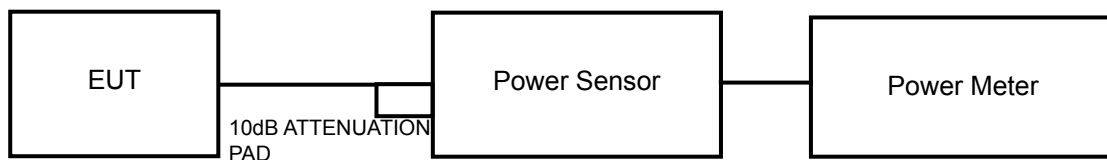

4.4.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.

4.4.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	38.0	15.80	30	PASS
6	2437	38.7	15.88	30	PASS
11	2462	40.0	16.02	30	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	104.0	20.17	30	PASS
6	2437	105.0	20.21	30	PASS
11	2462	107.9	20.33	30	PASS

802.11n (20MHz)


CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	102.1	20.09	30	PASS
6	2437	100.9	20.04	30	PASS
11	2462	105.4	20.23	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST SETUP

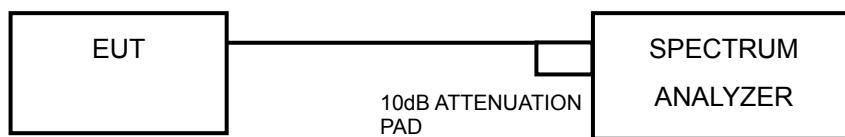

4.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

- Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3 \text{ kHz}/100\text{kHz})$

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T

4.5.7 TEST RESULTS

802.11b

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	5.46	-9.77	8	PASS
6	2437	5.27	-9.96	8	PASS
11	2462	5.45	-9.78	8	PASS

802.11g

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	1.18	-14.05	8	PASS
6	2437	1.13	-14.10	8	PASS
11	2462	1.30	-13.93	8	PASS

802.11n (20MHz)


Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	1.33	-13.90	8	PASS
6	2437	1.33	-13.90	8	PASS
11	2462	1.60	-13.63	8	PASS

4.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP

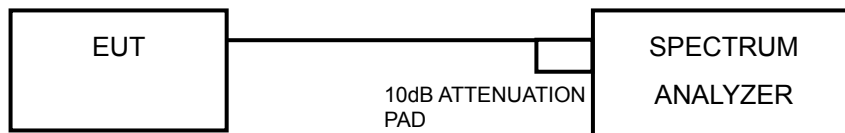

4.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION


Same as Item 4.3.6

4.6.7 TEST RESULTS


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

802.11b


CH 1

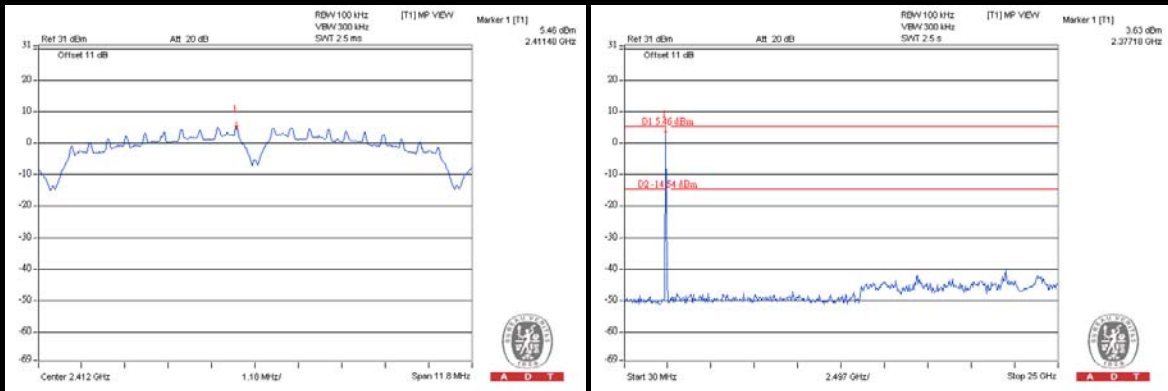

CH 6

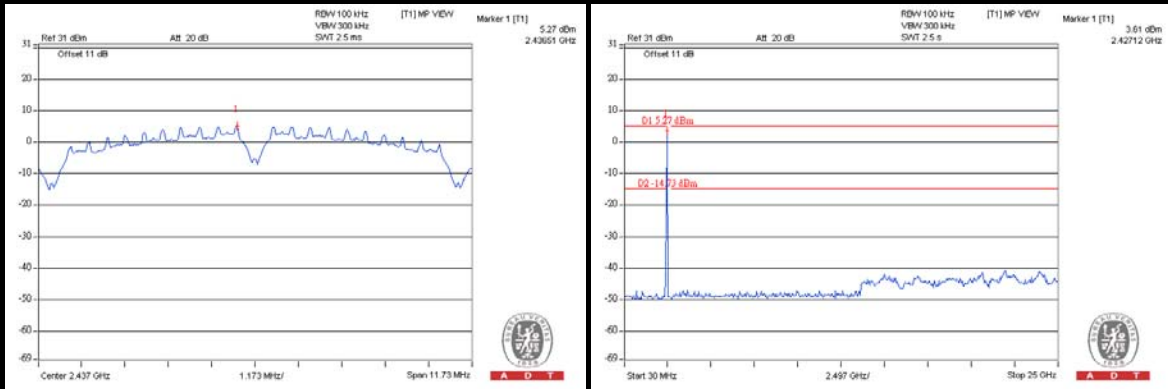


CH 11

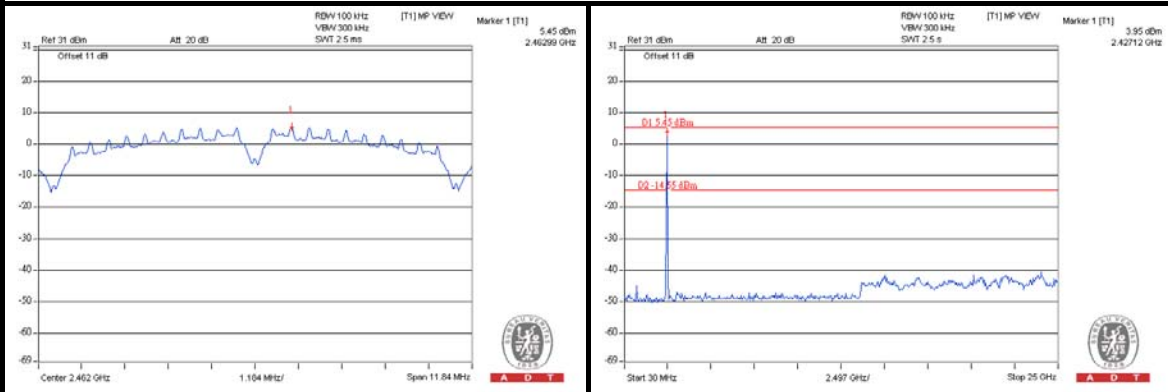


802.11g


CH 1

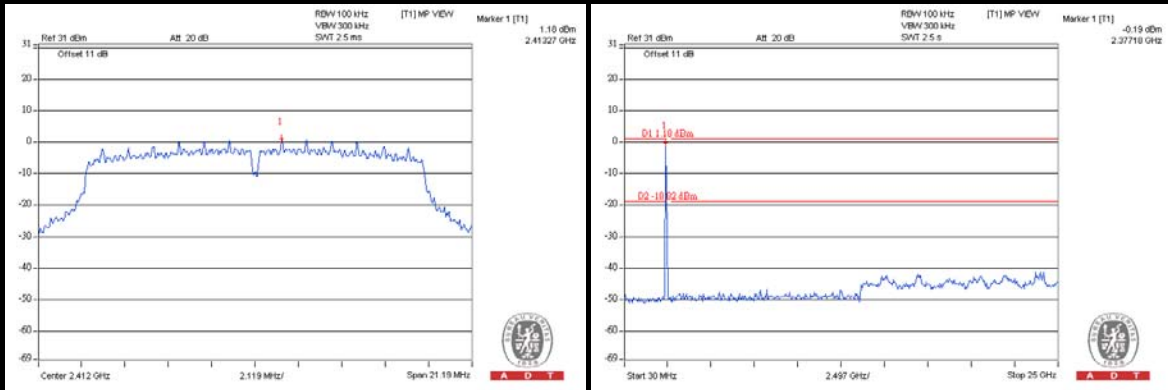

CH 6

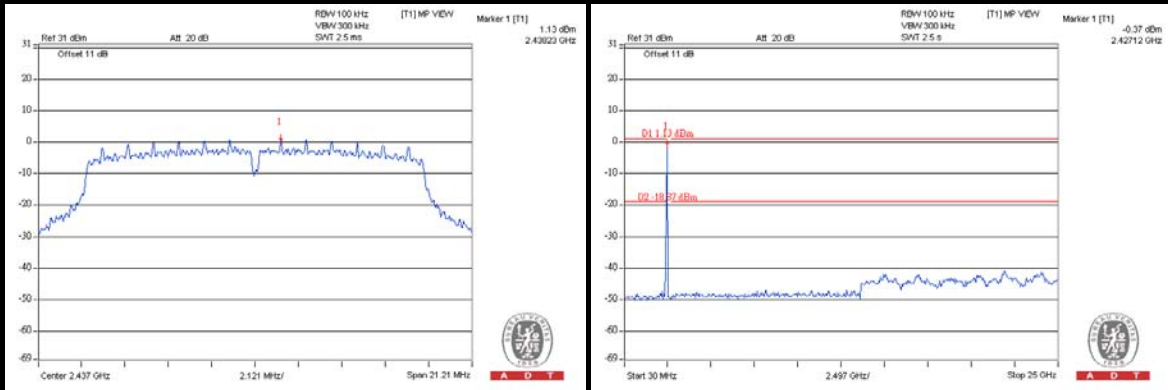


CH 11

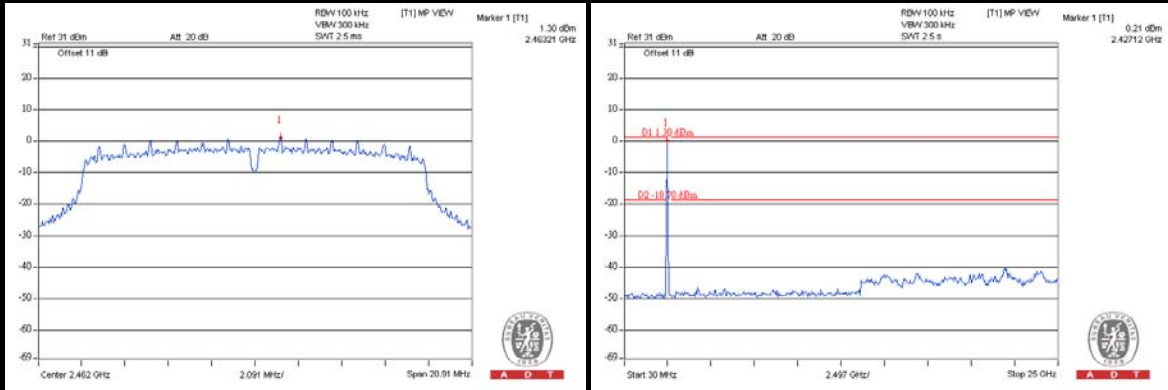


802.11n (20MHz)


CH 1

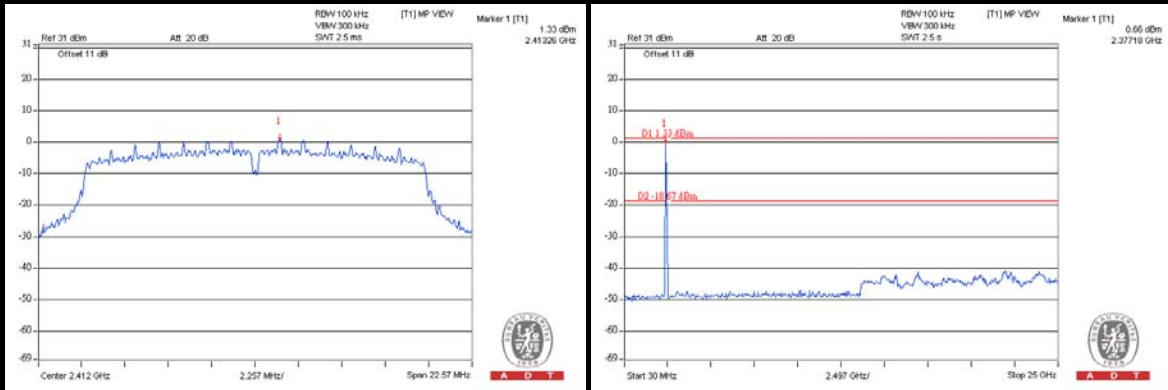

CH 6

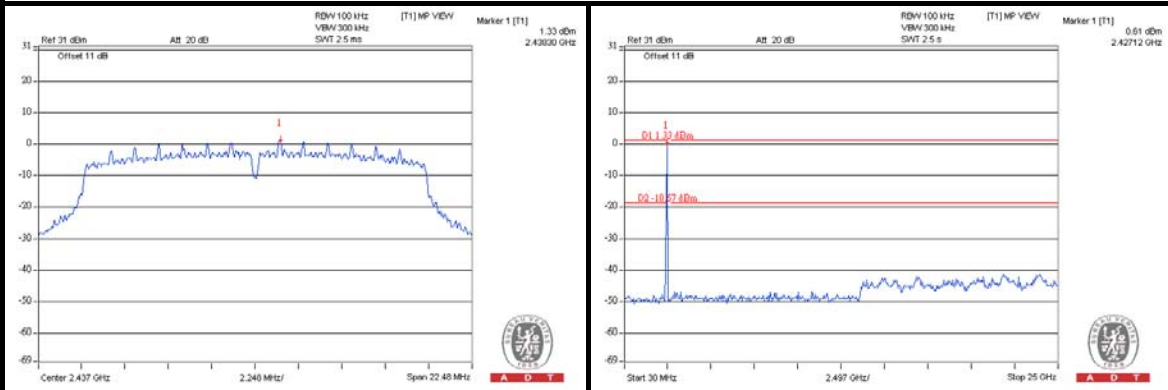

CH 11

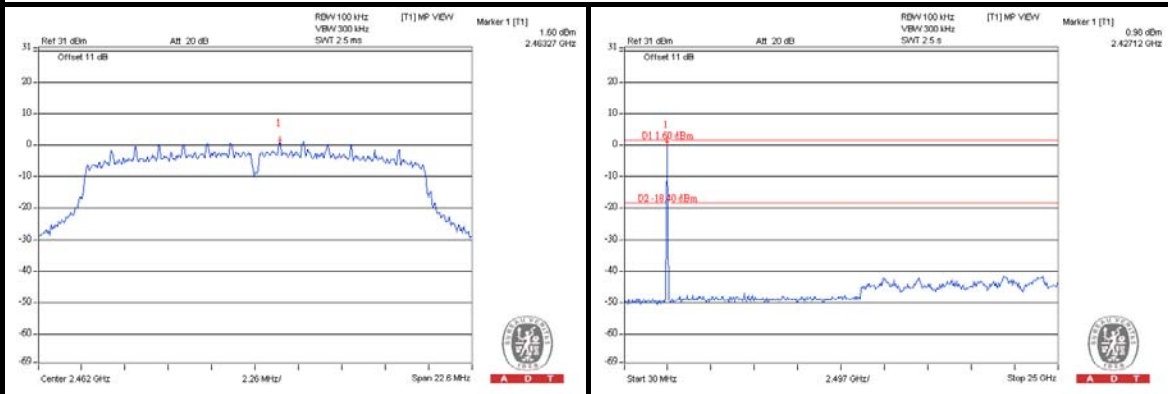

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---