



FCC PART 15.247

INDUSTRY CANADA RSS-210, ISSUE 7, JUNE 2007

MEASUREMENT AND TEST REPORT

For

Fidelity Comtech, Inc.

2400 Trade Centre Ave, Longmont, CO 80503, USA

**FCC ID: Q2AFCI3100X
IC ID: 4569A-FCI3100X
Model: FCI-3100X**

| | |
|---|--|
| Report Type: | Product Type: |
| <input checked="" type="checkbox"/> Original Report | Phased Array WLAN Terminal |
| Test Engineer(s): | Choon-Sian Ooi <i>Choon-Sian Ooi</i> |
| Report Number: | R0709271 |
| Report Date: | 2008-01-16 |
| Reviewed By: | James Ma, Test Engineer <i>James Ma</i> |
| Prepared By: | Bay Area Compliance Laboratories Corp. (BACL) 1274 Anvilwood Ave. Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732-9164 |

Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government

TABLE OF CONTENTS

| | | |
|----------|---|-----------|
| 1 | GENERAL INFORMATION | 5 |
| 1.1 | PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 5 |
| 1.2 | MECHANICAL DESCRIPTION OF EUT | 5 |
| 1.3 | EUT PHOTOGRAPH | 5 |
| 1.4 | OBJECTIVE | 5 |
| 1.5 | RELATED SUBMITTAL(S)/GRANT(S)..... | 6 |
| 1.6 | TEST METHODOLOGY | 6 |
| 1.7 | MEASUREMENT UNCERTAINTY..... | 6 |
| 1.8 | TEST FACILITY..... | 6 |
| 2 | SYSTEM TEST CONFIGURATION | 7 |
| 2.1 | JUSTIFICATION | 7 |
| 2.2 | EUT EXERCISE SOFTWARE | 7 |
| 2.3 | SPECIAL ACCESSORIES..... | 7 |
| 2.4 | EQUIPMENT MODIFICATIONS | 7 |
| 2.5 | LOCAL SUPPORT EQUIPMENT LIST AND DETAILS | 7 |
| 2.6 | INTERFACE PORTS AND CABLING..... | 7 |
| 2.7 | TEST SETUP BLOCK DIAGRAMS | 8 |
| 3 | SUMMARY OF TEST RESULTS | 9 |
| 4 | FCC §15.247 (i) and §2.1091, IC RSS-Gen 5.5 & RSS-102 - RF EXPOSURE | 10 |
| 4.1 | APPLICABLE STANDARD | 10 |
| 4.2 | MPE PREDICTION | 10 |
| 4.3 | TEST RESULT | 10 |
| 4.4 | RESULT | 11 |
| 5 | FCC §15.203, IC RSS-Gen §7.1.4 – ANTENNA REQUIREMENT | 12 |
| 5.1 | APPLICABLE STANDARD | 12 |
| 5.2 | RESULT | 12 |
| 6 | FCC §15.207, IC RSS-Gen §7.2.2 - CONDUCTED EMISSIONS | 13 |
| 6.1 | SECTION 15.207 & RSS-GEN 7.2.2 CONDUCTED LIMITS:..... | 13 |
| 6.2 | TEST SETUP | 13 |
| 6.3 | TEST EQUIPMENT LIST AND DETAILS..... | 13 |
| 6.4 | TEST PROCEDURE | 14 |
| 6.5 | ENVIRONMENTAL CONDITIONS..... | 14 |
| 6.6 | SUMMARY OF TEST RESULTS | 14 |
| 7 | FCC §15.247(d), RSS-210 § A8.5 & RSS-Gen 7.2 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS | 17 |
| 7.1 | APPLICABLE STANDARD | 17 |
| 7.2 | MEASUREMENT PROCEDURE..... | 17 |
| 7.3 | EQUIPMENT LIST..... | 17 |
| 7.4 | ENVIRONMENTAL CONDITIONS..... | 17 |
| 7.5 | MEASUREMENT RESULT: | 17 |
| 8 | FCC §15.109, §15.205, §15.209, IC RSS-Gen §4.9 - SPURIOUS RADIATED EMISSIONS | 36 |
| 8.1 | APPLICABLE STANDARD | 36 |
| 8.2 | TEST SETUP | 37 |
| 8.3 | EUT SETUP..... | 37 |
| 8.4 | TEST EQUIPMENT LIST AND DETAILS..... | 37 |
| 8.5 | TEST PROCEDURE | 38 |
| 8.6 | CORRECTED AMPLITUDE & MARGIN CALCULATION | 38 |
| 8.7 | ENVIRONMENTAL CONDITIONS..... | 38 |
| 8.8 | SUMMARY OF TEST RESULTS | 38 |

| | | |
|-----------|---|------------|
| 8.9 | RADIATED EMISSIONS TEST PLOT & DATA..... | 40 |
| 8.10 | RADIATED SPURIOUS EMISSIONS TEST DATA..... | 41 |
| 9 | FCC §15.247(a) (2), RSS-210 § A8.2 (a) – 6 dB BANDWIDTH & OCCUPIED BANDWIDTH | 65 |
| 9.1 | APPLICABLE STANDARD | 65 |
| 9.2 | MEASUREMENT PROCEDURE..... | 65 |
| 9.3 | EQUIPMENT LIST..... | 65 |
| 9.4 | ENVIRONMENTAL CONDITIONS..... | 65 |
| 9.5 | SUMMARY OF TEST RESULTS | 66 |
| 10 | FCC §15.247(b), RSS210 § A8.4 - PEAK OUTPUT POWER MEASUREMENT | 74 |
| 10.1 | APPLICABLE STANDARD | 74 |
| 10.2 | MEASUREMENT PROCEDURE..... | 74 |
| 10.3 | EQUIPMENT LIST..... | 74 |
| 10.4 | ENVIRONMENTAL CONDITIONS..... | 74 |
| 10.5 | SUMMARY OF TEST RESULTS | 75 |
| 11 | FCC §15.247(d), RSS-210 § A8.5 - 100 kHz BANDWIDTH OF BAND EDGES..... | 82 |
| 11.1 | APPLICABLE STANDARD | 82 |
| 11.2 | MEASUREMENT PROCEDURE..... | 82 |
| 11.3 | EQUIPMENT LIST..... | 82 |
| 11.4 | ENVIRONMENTAL CONDITIONS..... | 82 |
| 12 | FCC §15.247(e), RSS-210 § A8.2 (b) - POWER SPECTRAL DENSITY | 87 |
| 12.1 | APPLICABLE STANDARD | 87 |
| 12.2 | MEASUREMENT PROCEDURE..... | 87 |
| 12.3 | EQUIPMENT LIST..... | 87 |
| 12.4 | ENVIRONMENTAL CONDITIONS..... | 87 |
| 12.5 | SUMMARY OF TEST RESULTS | 88 |
| 13 | EXHIBIT A – FCC & IC EQUIPMENT LABELING REQUIREMENTS | 95 |
| 13.1 | FCC § 2.925 IDENTIFICATION OF EQUIPMENT..... | 95 |
| 13.2 | FCC ID LABELING REQUIREMENTS AS PER FCC § 15.19..... | 95 |
| 13.3 | <u>SPECIFICATIONS:</u> AS PER RSS GEN 5.2 EQUIPMENT LABELING: | 96 |
| 13.4 | SUGGESTED FCC ID & IC LABEL | 96 |
| 13.5 | SUGGESTED LABEL LOCATION..... | 97 |
| 14 | EXHIBIT B - TEST SETUP PHOTOGRAPHS | 98 |
| 14.1 | CONDUCTED EMISSIONS –FRONT VIEW | 98 |
| 14.2 | CONDUCTED EMISSIONS – SIDE VIEW..... | 98 |
| 14.3 | RECEIVER RADIATED EMISSIONS – FRONT VIEW..... | 99 |
| 14.4 | RECEIVER RADIATED EMISSIONS – REAR VIEW..... | 99 |
| 14.5 | TRANSMITTER RADIATED SPURIOUS EMISSIONS – FRONT VIEW..... | 100 |
| 14.6 | TRANSMITTER RADIATED SPURIOUS EMISSIONS – REAR VIEW | 100 |
| 15 | EXHIBIT C - EUT PHOTOGRAPHS..... | 101 |
| 15.1 | EUT - FRONT VIEW | 101 |
| 15.2 | EUT - TOP VIEW..... | 101 |
| 15.3 | EUT - BOTTOM VIEW 1 | 102 |
| 15.4 | EUT - BOTTOM VIEW 2 | 102 |
| 15.5 | EUT COVER OFF - FRONT VIEW..... | 103 |
| 15.6 | EUT COVER OFF - TOP VIEW | 103 |
| 15.7 | EUT SIDE VIEW 1 WITH FILTER BOARD..... | 104 |
| 15.8 | EUT SIDE VIEW 1 WITHOUT FILTER BOARD | 104 |
| 15.9 | EUT SIDE VIEW 2 | 105 |
| 15.10 | ANTENNA OFF – TOP VIEW 1 | 105 |
| 15.11 | RF CONTROL BOARD – FRONT VIEW | 106 |
| 15.12 | RF CONTROL BOARD – SIDE VIEW | 106 |
| 15.13 | RF CONTROL BOARD – BACK VIEW | 107 |
| 15.14 | ANTENNA OFF – TOP VIEW 2 | 107 |
| 15.15 | MAIN PCB BOARD WITH RADIO COMPONENTS VIEW | 108 |
| 15.16 | MAIN PCB BOARD SOLDER VIEW | 108 |
| 15.17 | MAIN RADIO WITH SHIELD ON - FRONT VIEW | 109 |
| 15.18 | MAIN RADIO WITH SHIELD OFF - FRONT VIEW | 109 |

| | | |
|-------|---|-----|
| 15.19 | MAIN RADIO - BACK VIEW..... | 110 |
| 15.20 | SUB RADIO - FRONT VIEW..... | 110 |
| 15.21 | SUB RADIO - BACK VIEW | 111 |
| 15.22 | FILTER WITH COVER ON - FRONT VIEW..... | 111 |
| 15.23 | FILTER WITH COVER OFF - FRONT VIEW..... | 112 |
| 15.24 | FILTER - BACK VIEW | 112 |
| 15.25 | POWER SUPPLY - FRONT VIEW | 113 |
| 15.26 | POWER SUPPLY - BACK VIEW..... | 113 |
| 15.27 | POWER INJECTOR - FRONT VIEW | 114 |
| 15.28 | POWER INJECTOR - SIDE VIEW 1..... | 114 |
| 15.29 | POWER INJECTOR - SIDE VIEW 2..... | 115 |
| 15.30 | POWER INJECTOR - BACK VIEW..... | 115 |
| 15.31 | ANTENNA VIEW 1..... | 116 |
| 15.32 | ANTENNA VIEW 2..... | 116 |
| 15.33 | ANTENNA VIEW 3..... | 117 |

1 GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

The *Fidelity Comtech, Inc.* product, *FCC ID: Q2AFCI3100X, IC: 4569A-FCI3100X, model: FCI-3100X*, or the “EUT” as referred to in this report, is an 802.11 b/g radio and phased array antenna system designed for outdoor use.

1.2 Mechanical Description of EUT

The *Fidelity Comtech* product, *model: FCI-3100X*, measures approximately 241mmL x 241 mmW x 280 mmH, and weighs approximately 4.5 kg.

**The test data gathered are from production sample, serial number: P051035, provided by the manufacturer.*

1.3 EUT Photograph



Please refer to Exhibit C for more EUT photographs.

1.4 Objective

This type approval report is prepared on behalf of *Fidelity Comtech*. in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules for Output Power, Antenna Requirements, 6 dB Bandwidth, and power spectral density, 100 kHz Bandwidth of Band Edges Measurement, Spurious Emissions, Conducted and Radiated Spurious Emissions.

1.5 Related Submittal(s)/Grant(s)

N/A

1.6 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.7 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the values range from ± 2.0 for Conducted Emissions tests and ± 4.0 dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL.

Detailed instrumentation measurement uncertainties can be found in BACL report QAP-018.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.8 Test Facility

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test site at BACL Corp. has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11, 1997 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the test methods and procedures set forth in ANSI C63.4-2003 & TIA/EIA-603.

The Federal Communications Commission and Voluntary Control Council for Interference have the reports on file and they are listed under FCC registration number: 90464 and VCCI Registration No.: R-2463 and C-2698. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL Corp. is a National Institute of Standards and Technology (NIST) accredited laboratory under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2001670.htm>.

2 SYSTEM TEST CONFIGURATION

2.1 Justification

The host system was configured for testing according to ANSI C63.4-2003.

The EUT was tested in the testing mode to represent *worst*-case results during the final qualification test.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power, peak power and PPSD across all data rates bandwidths, and modulations.

2.2 EUT Exercise Software

The EUT is programmed with the worse-case settings that were used during testing.

2.3 Special Accessories

There were no special accessories were required, included, or intended for use with EUT during these tests.

2.4 Equipment Modifications

No modifications were made to the EUT.

2.5 Local Support Equipment List and Details

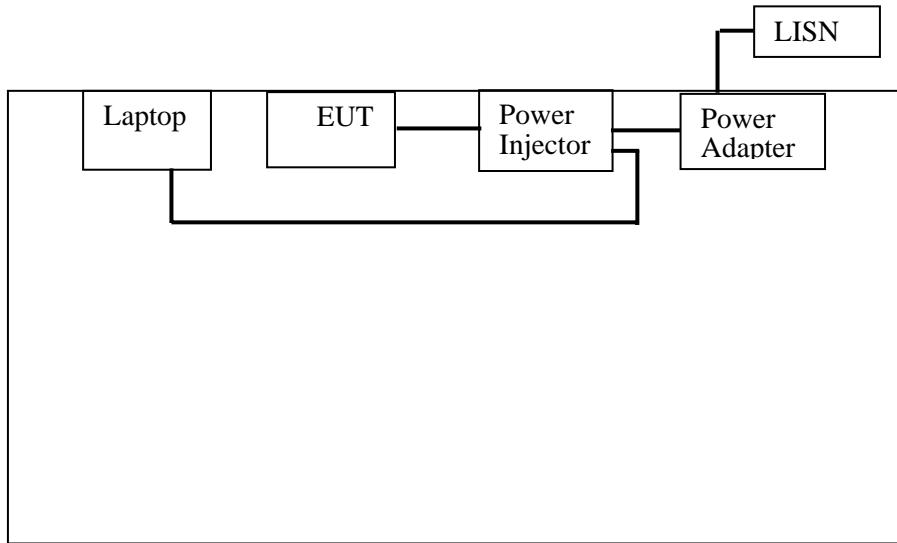
| Manufacturer | Description | Model | Serial Number |
|--------------|-------------|--------------------|---------------|
| Toshiba | Laptop | Satellite R15-S829 | Y5040228H |

2.6 Interface Ports and Cabling


| Cable Description | Length (M) | From | To |
|-------------------|------------|----------------|--------|
| RJ45 Cable | 1.5 | Power Injector | EUT |
| RJ45 Cable | 1.5 | Power Injector | Laptop |

2.7 Test Setup Block Diagrams

Conducted Emissions



Radiated Emissions

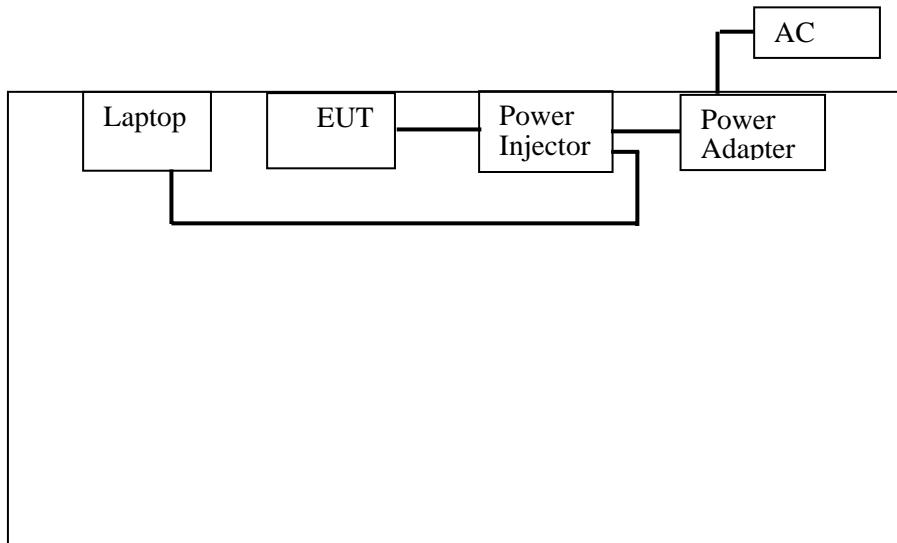

3 SUMMARY OF TEST RESULTS

Results reported relate only to the product tested.

| FCC & RSS-210 /Gen Rules | Description of Test | Result | Note |
|---|--|-----------|------|
| FCC §15.247 (i) and §2.1091, IC RSS-Gen 5.5 & RSS-102 | RF Exposure | Compliant | - |
| FCC §15.203, IC RSS-Gen §7.1.4 | Antenna Requirement | Compliant | - |
| FCC §15.207, IC RSS-Gen §7.2.2 | Conducted Emissions | Compliant | - |
| FCC §15.109, RSS-Gen §6(a) | Receiver Spurious Emissions | Compliant | - |
| FCC §15.247(d), RSS210 § A8.5 § RSS-Gen §7.2 | Spurious Emissions at Antenna Port | Compliant | - |
| FCC §15.205, §15.209, IC RSS-Gen §4.9 | Radiated Spurious Emissions | Compliant | - |
| FCC §15.205 | Restricted Band | Compliant | - |
| §15.247 (a)(2), RSS-210 §A8.2 (a) | 6 dB Bandwidth & 99% Bandwidth | Compliant | - |
| §15.247 (b)(3), RSS210 § A8.4 | Maximum Peak Output Power | Compliant | - |
| § 15.247 (d), RSS210 § A8.5 | 100 kHz Bandwidth of Frequency Band Edge | Compliant | - |
| §15.247 (e), RSS-210 §A8.2 (b) | Power Spectral Density | Compliant | - |

4 FCC §15.247 (i) and §2.1091, IC RSS-Gen 5.5 & RSS-102 - RF EXPOSURE

4.1 Applicable Standard

According to §15.247 (i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated.

Limits for General Population/Uncontrolled Exposure

| Limits for General Population/Uncontrolled Exposure | | | | |
|---|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| Frequency Range (MHz) | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm ²) | Averaging Time (minutes) |
| 0.3-1.34 | 614 | 1.63 | *(100) | 30 |
| 1.34-30 | 824/f | 2.19/f | *(180/f ²) | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | / | / | f/1500 | 30 |
| 1500-100,000 | / | / | 1.0 | 30 |

f = frequency in MHz

* = Plane-wave equivalent power density

4.2 MPE Prediction

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

| | |
|--|--------|
| Maximum peak output power at antenna input terminal (dBm): | 26.77 |
| Maximum peak output power at antenna input terminal (mW): | 475.34 |
| Prediction distance (cm): | 35 |
| Prediction frequency (MHz): | 2437 |
| Maximum Antenna Gain, typical (dBi): | 15 |
| Maximum Antenna Gain (numeric): | 31.62 |
| Power density of prediction frequency at 20.0 cm (mW/cm ²): | 0.977 |
| MPE limit for uncontrolled exposure at prediction frequency (mW/cm ²): | 1.0 |

4.3 Test Result

The power density level at 35 cm distance is 0.977 mW/cm², which is below the uncontrolled exposure limit of 1.0mW/cm² at 2437 MHz.

According to RSS-102 Issue 2, November 2005 §2.5.2 exception from Routine Evaluation Limits- RF Exposure Evaluation:

RF exposure evaluation is required if the separation distance between the user and the device is greater than 20 cm, except when the device operates:

- 1) below 1.5 GHz and its e.i.r.p. is equal to or less than 2.5 W;
- 2) at or above 1.5 GHz and the e.i.r.p. of the device is equal to or less than 5 W.

RF limits for device used by the general public is provided hereinafter table:

| Frequency Range (MHZ) | Electric Field (V/M rms) | Magnetic Field (A/m rms) | Power Density (W/m2) | Time Averaging (min) |
|-----------------------|--------------------------|-------------------------------|-------------------------|----------------------|
| 0.003 – 1 | 280 | 2.19 | - | 6 |
| 1 – 10 | 280 / f | 2.19 / f | - | 6 |
| 10 – 30 | 28 | 2.19 / f | - | 6 |
| 30 – 300 | 28 | 0.073 | 2* | 6 |
| 300 - 1500 | $1.585 f^{0.5}$ | $0.0042 f^{0.5}$ | $f / 150$ | 6 |
| 1500 – 15 000 | 61.4 | 0.163 | 10 | 6 |
| 15 000 – 150 000 | 61.4 | 0.163 | 10 | $616000 / f^{1.2}$ |
| 150 000 – 300 000 | $f^{0.5}$ | $4.21 \times 10^{-4} f^{0.5}$ | $6.67 \times 10^{-5} f$ | $616000 / f^{1.2}$ |

Note: f is the frequency in MHz

* Power density limit applicable at frequency greater than 100 MHz.

4.4 Test Result

The power density level at 35 cm distance is 9.77 W/m^2 , which is below the uncontrolled exposure limit of 10 W/m^2 at 2437 MHz.

5 FCC §15.203, IC RSS-Gen §7.1.4 – ANTENNA REQUIREMENT

5.1 Applicable Standard

According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC §15.247 (b) (4), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

As per IC RSS-Gen §7.1.4: Transmitter Antenna, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the highest-gain antenna of each combination of transmitter and antenna type for which certification is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type and having equal or lesser gain as an antenna that had been successfully tested for certification with the transmitter, will also be considered certified with the transmitter, and may be used and marketed with the transmitter. The manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter.

5.2 Result

The antenna for this device is an internal antenna array produces an aggregate antenna gain of 9 dBi (6 dBi from the elements and 3 dBi from the array)

Compliant

N/A

Please refer to the following antenna photo for details.



Antenna photo

6 FCC §15.207, IC RSS-Gen §7.2.2 - CONDUCTED EMISSIONS

6.1 Section 15.207 & RSS-Gen 7.2.2 Conducted limits:

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

| Frequency of Emission (MHz) | Conducted Limit (dBuV) | |
|--------------------------------|------------------------|------------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56 * | 56 to 46 * |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

6.2 Test Setup

The measurement was performed at shield room, using the setup per ANSI C63.4 – 2003 measurement procedure. The specification used was FCC Class B limits.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The EUT was powered via connection to AC/DC adapter which was plugged into the LISN.

6.3 Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date |
|-------------------|-------------------|-----------------------|---------------|------------------|
| Solar Electronics | LISN | 9252-R-24-BNC | 511205 | 2007-07-07 |
| Rohde & Schwarz | EMI Test Receiver | ESCI 1166.595 0K03 | 100338 | 2007-04-05 |

*** Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

6.4 Test Procedure

During the conducted emissions test, the power cord of the system was connected to the main outlet of the LISN-1.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the peak detection mode, quasi-peak and average. Quasi-Peak readings are distinguished with a “QP”. Average readings are distinguished with an “Ave”.

6.5 Environmental Conditions


| | |
|--------------------|-----------|
| Temperature: | 27 °C |
| Relative Humidity: | 40 % |
| ATM Pressure: | 102.0 kPa |

**The testing was performed by Choon-Sian Ooi on 2007-10-22.*

6.6 Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC & IC standard's conducted emissions limits for Class B devices, with the *worst* margin reading of:


| Connection: AC/DC Adapter | | | |
|---------------------------|-----------------|------------------------------|----------------|
| Margin (dB) | Frequency (MHz) | Conductor Mode (Hot/Neutral) | Range (MHz) |
| -11.1 | 0.465000 | Line | 0.15 to 30 MHz |

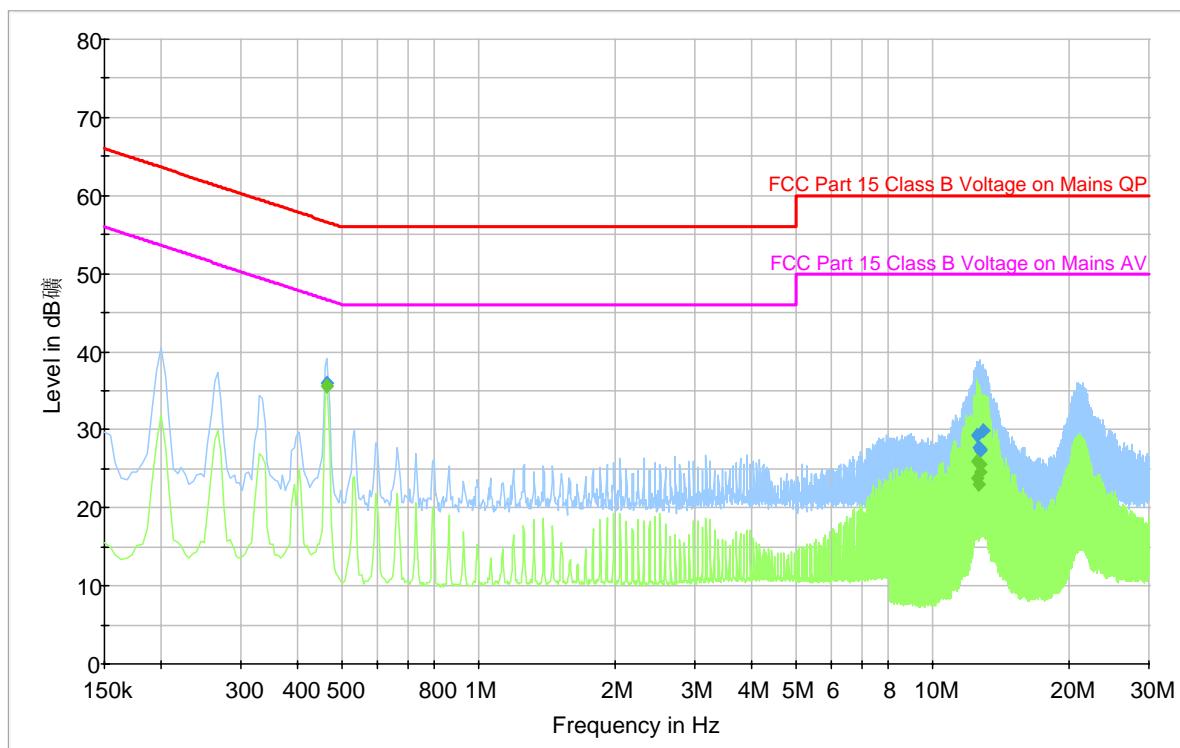120V/60 Hz Line:**Final Measurement Quasi-Peak Detector**

| Frequency (MHz) | Quasi-Peak (dB μ V) | Line (H/L1) | Corr. (dB) | Margin (dB) | Limit (dB μ V) |
|-----------------|-------------------------|-------------|------------|-------------|--------------------|
| 0.465000 | 36.0 | L1 | 12.3 | -20.6 | 56.6 |
| 12.907500 | 29.9 | L1 | 12.4 | -30.1 | 60.0 |
| 12.579000 | 29.4 | L1 | 12.4 | -30.6 | 60.0 |
| 12.646500 | 27.7 | L1 | 12.4 | -32.3 | 60.0 |
| 12.714000 | 27.6 | L1 | 12.4 | -32.4 | 60.0 |
| 12.781500 | 27.4 | L1 | 12.4 | -32.6 | 60.0 |

Final Measurement Average Detector

| Frequency (MHz) | Average (dB μ V) | Line (H/L1) | Corr. (dB) | Margin (dB) | Limit (dB μ V) |
|-----------------|----------------------|-------------|------------|-------------|--------------------|
| 0.465000 | 35.5 | L1 | 12.3 | -11.1 | 46.6 |
| 12.511500 | 26.0 | L1 | 12.4 | -24.0 | 50.0 |
| 12.709500 | 25.5 | L1 | 12.4 | -24.5 | 50.0 |
| 12.777000 | 24.6 | L1 | 12.4 | -25.4 | 50.0 |
| 12.579000 | 23.9 | L1 | 12.4 | -26.1 | 50.0 |
| 12.646500 | 23.0 | L1 | 12.4 | -27.0 | 50.0 |

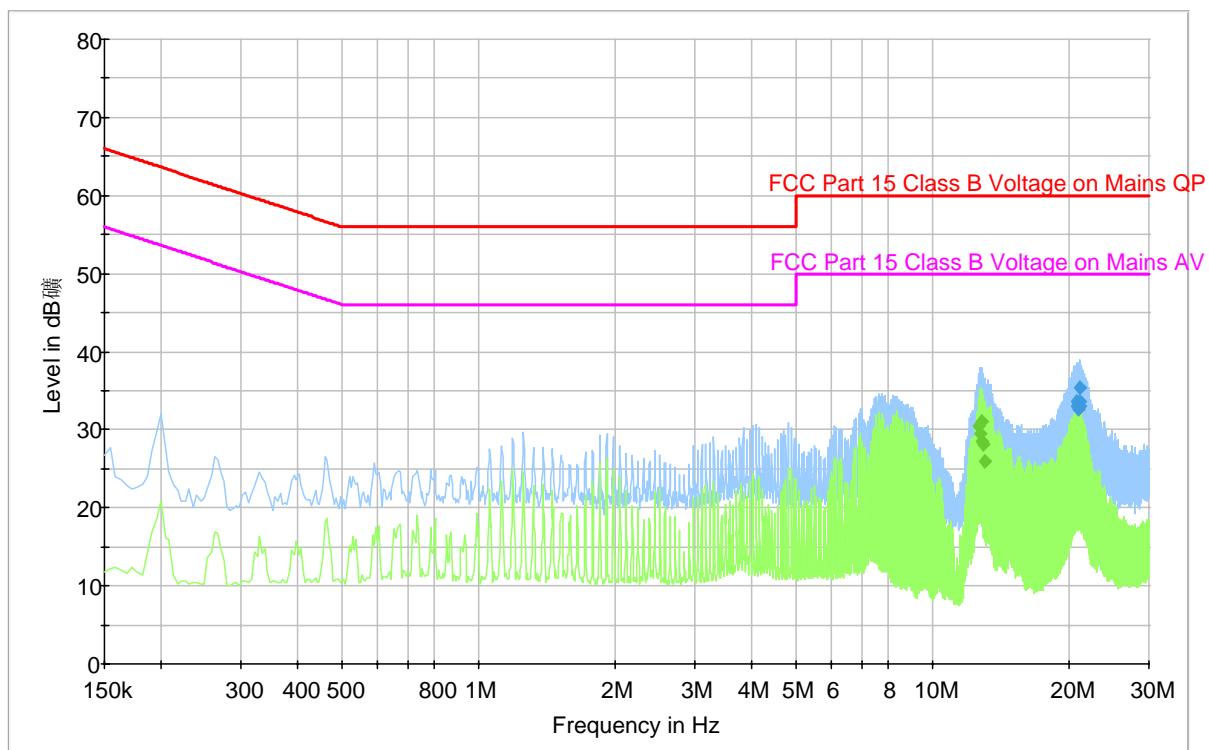120V/60 Hz Neutral:**Final Measurement Quasi-Peak Detector**

| Frequency (MHz) | Quasi-Peak (dB μ V) | Line (H/L1) | Corr. (dB) | Margin (dB) | Limit (dB μ V) |
|-----------------|-------------------------|-------------|------------|-------------|--------------------|
| 21.147000 | 33.0 | N | 12.5 | 27.0 | 60.0 |
| 21.075000 | 35.4 | N | 12.5 | -24.6 | 60.0 |
| 21.210000 | 33.6 | N | 12.5 | -26.4 | 60.0 |
| 20.814000 | 33.5 | N | 12.5 | -26.5 | 60.0 |
| 20.881500 | 33.0 | N | 12.5 | -27.0 | 60.0 |
| 21.016500 | 32.6 | N | 12.5 | -27.4 | 60.0 |

Final Measurement Average Detector

| Frequency (MHz) | Average (dB μ V) | Line (H/L1) | Corr. (dB) | Margin (dB) | Limit (dB μ V) |
|-----------------|----------------------|-------------|------------|-------------|--------------------|
| 12.885000 | 31.0 | N | 12.4 | -19.0 | 50.0 |
| 12.687000 | 30.4 | N | 12.4 | -19.6 | 50.0 |
| 12.754500 | 29.4 | N | 12.4 | -20.6 | 50.0 |
| 12.822000 | 28.4 | N | 12.4 | -21.6 | 50.0 |
| 12.952500 | 28.1 | N | 12.4 | -21.9 | 50.0 |
| 13.020000 | 26.0 | N | 12.4 | -24.0 | 50.0 |

7 FCC §15.247(d), RSS-210 § A8.5 & RSS-Gen 7.2 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

7.1 Applicable Standard

For §15.247(d) and RSS-210 § A8.5 in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Requirements: CFR 47, §2.1051.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in §2.1057.

7.2 Measurement Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

7.3 Equipment List

| Manufacturer | Description | Model | Serial Number | Calibration Date |
|--------------|-------------------|--------|---------------|------------------|
| Agilent | Spectrum Analyzer | E4446A | US44300386 | 2007-04-26 |

* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.



7.4 Environmental Conditions



| | |
|--------------------|-----------|
| Temperature: | 27 °C |
| Relative Humidity: | 40 % |
| ATM Pressure: | 102.0 kPa |



*The testing was performed by Choon-Sian Ooi on 2007-10-22.



7.5 Measurement Result:

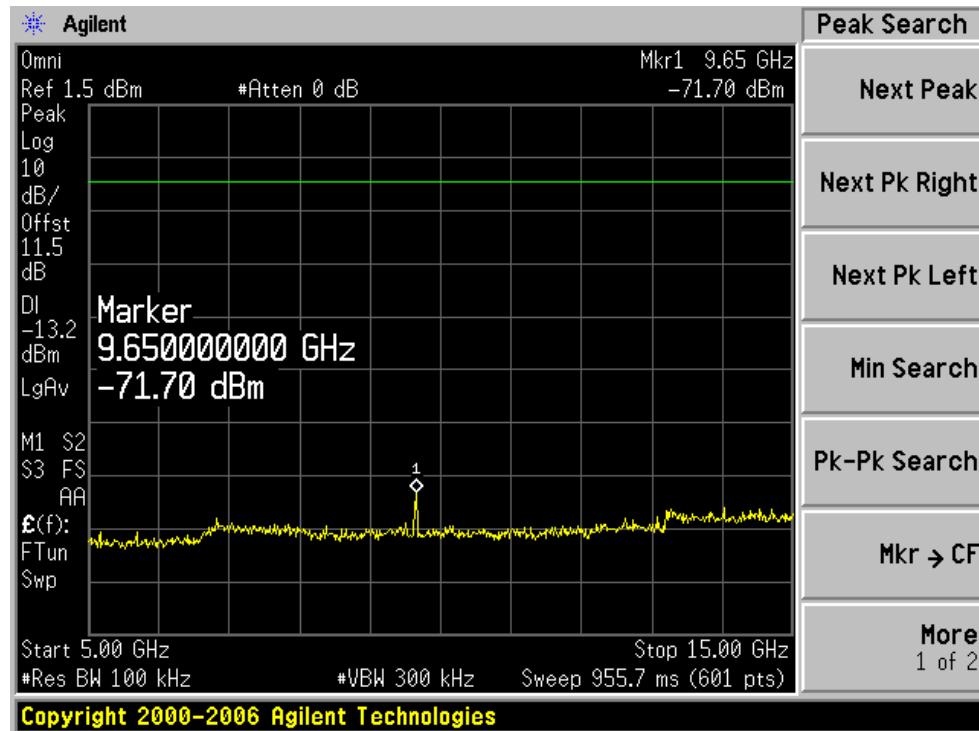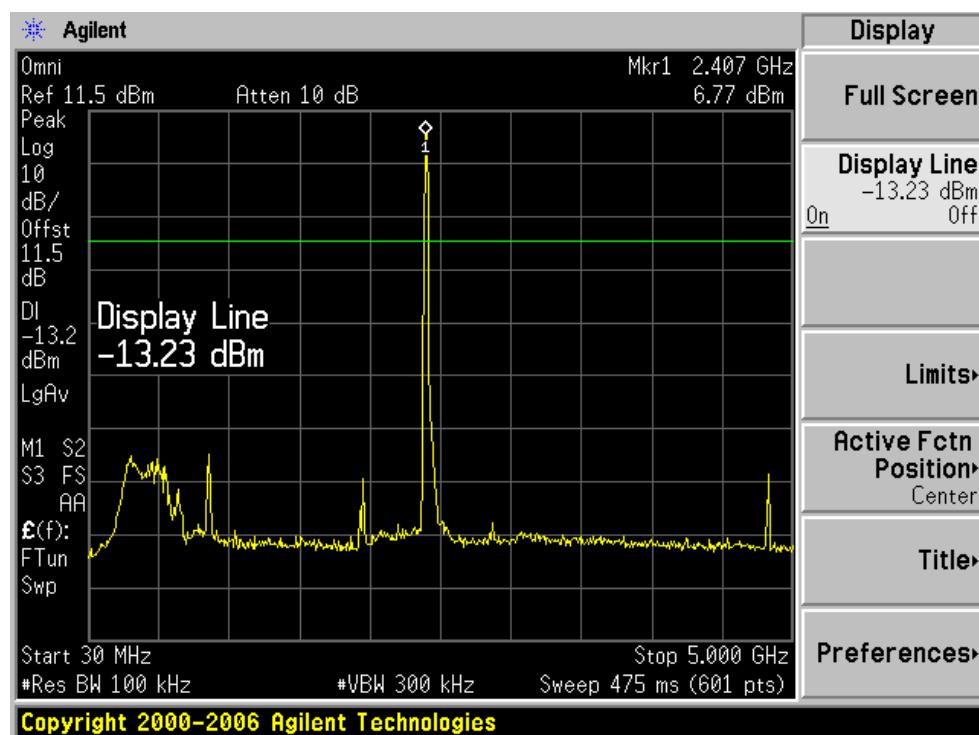
Please refer to following pages for plots of spurious emissions.

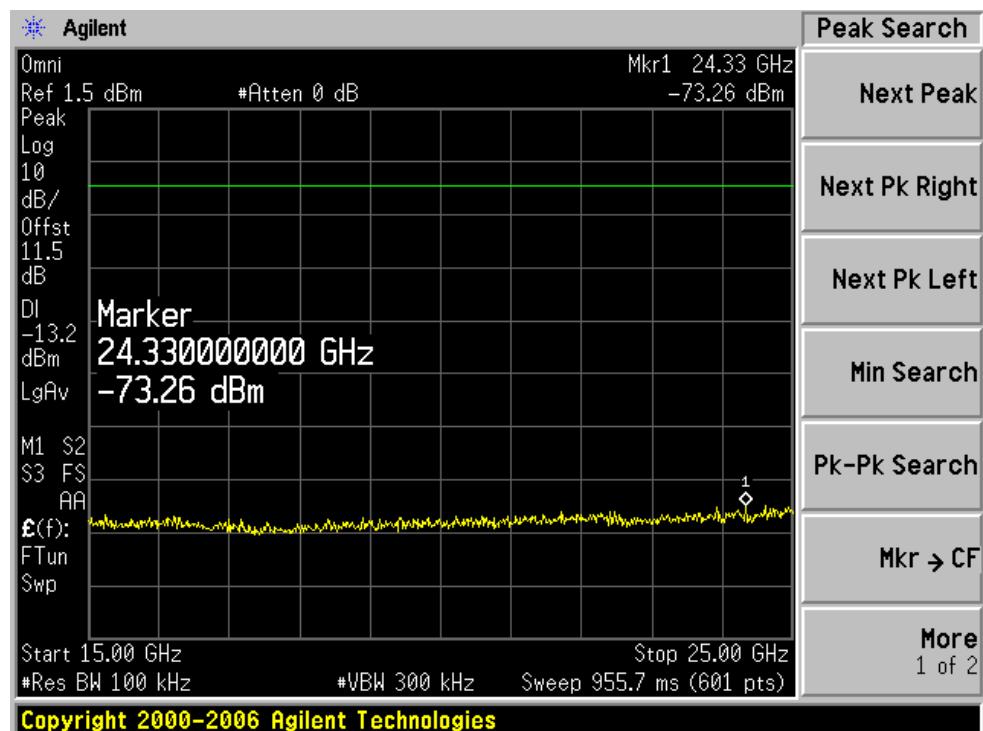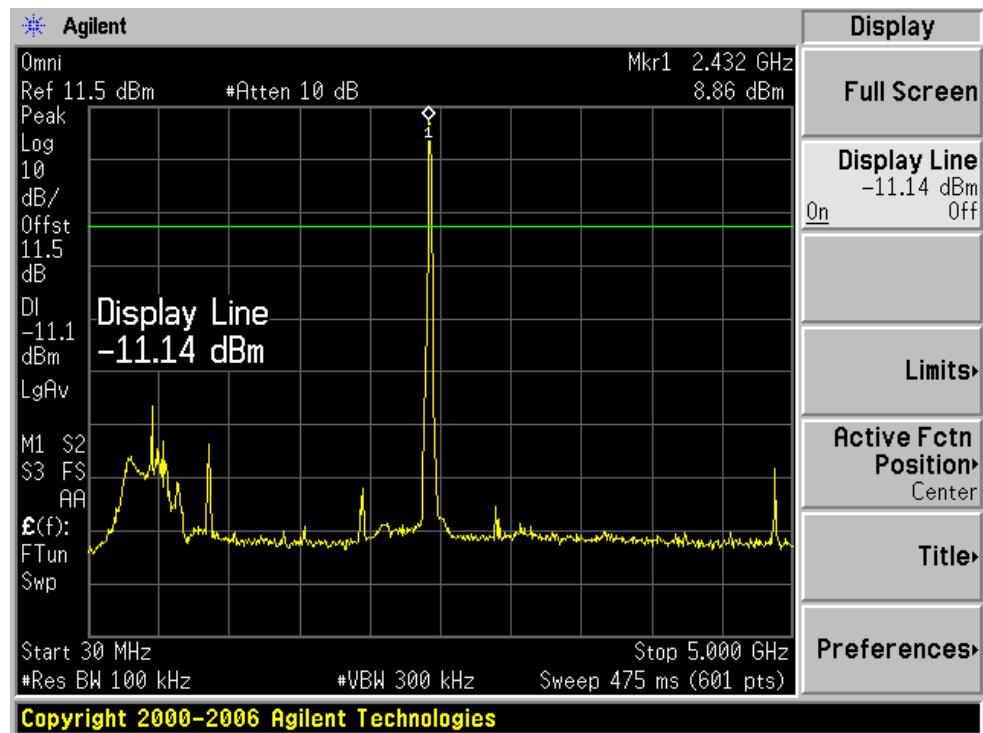802.11b mode**Omni****Low Channel**

**Middle Channel**

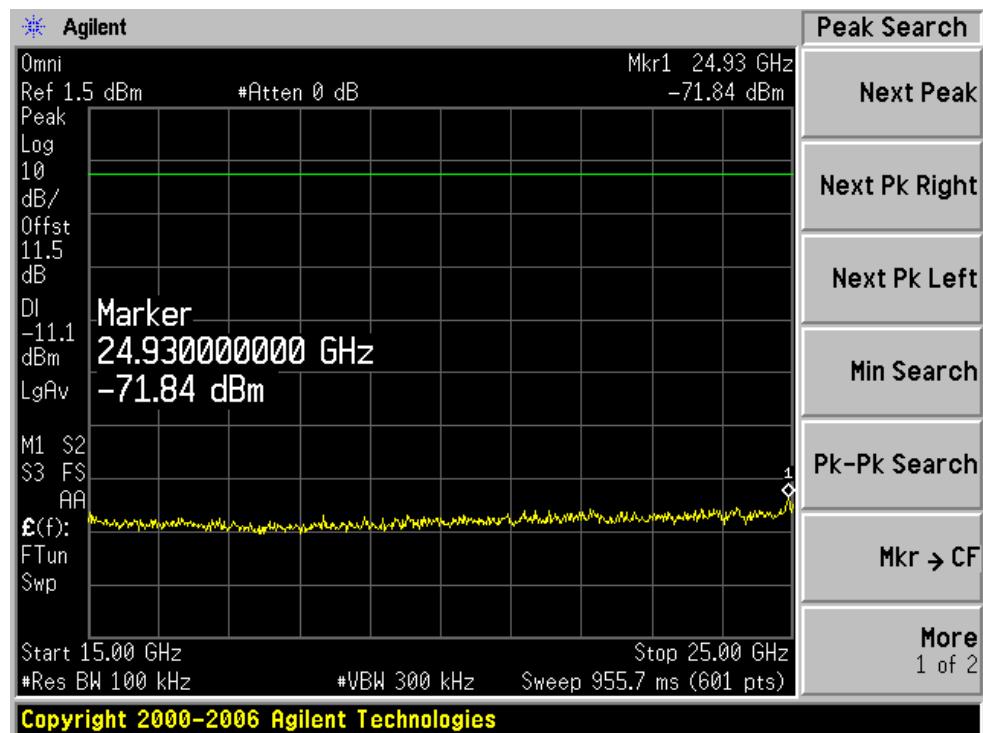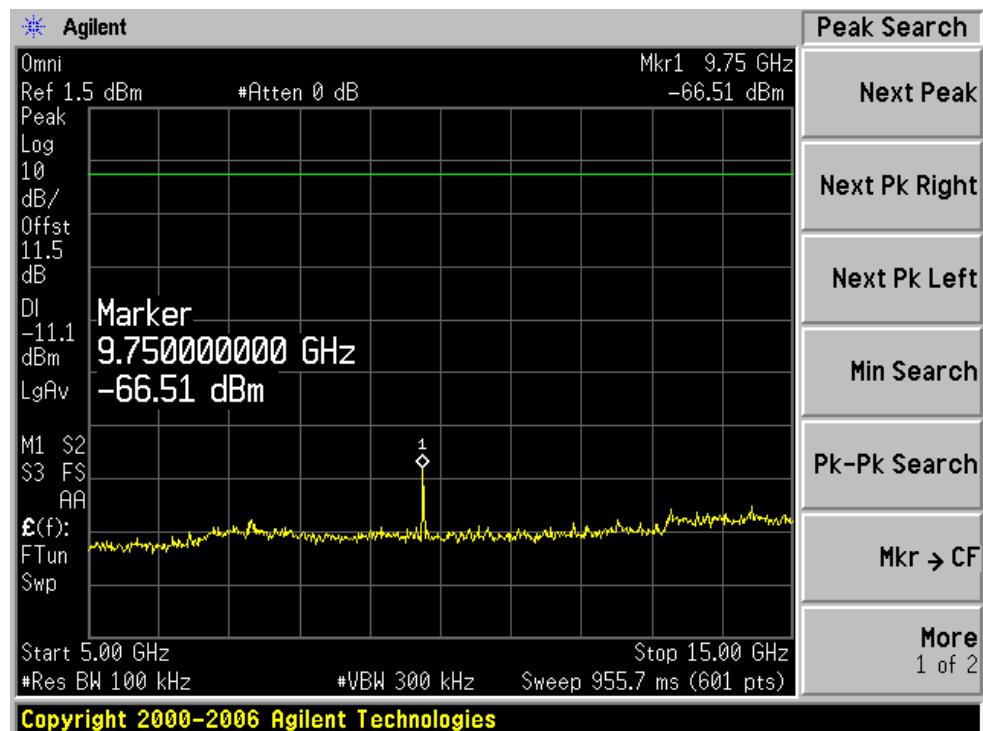

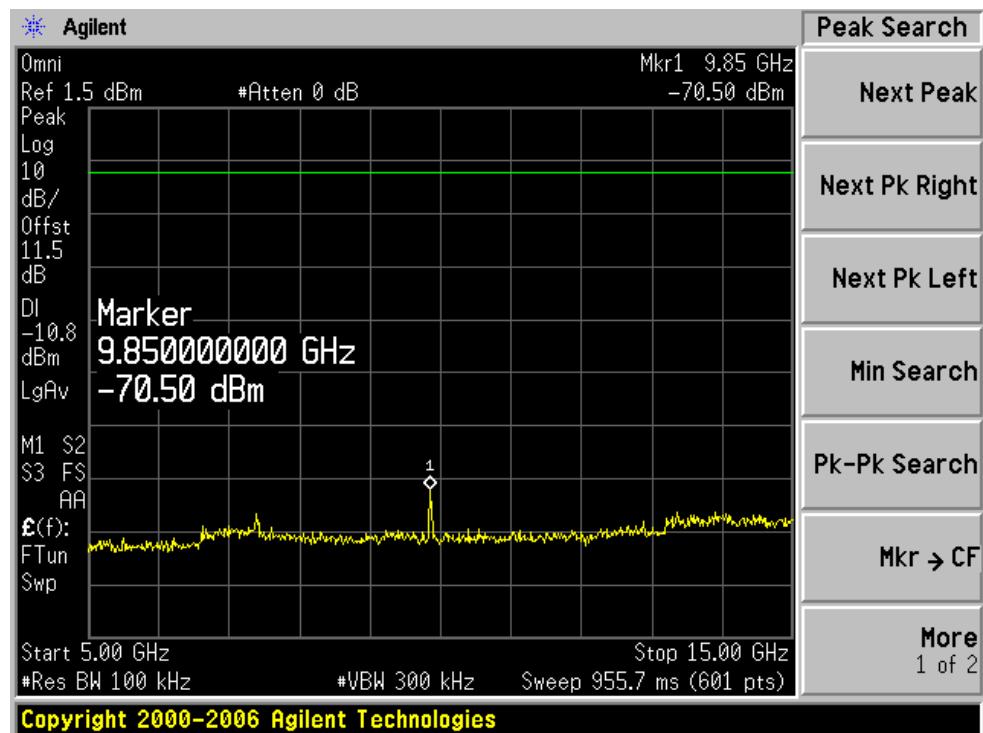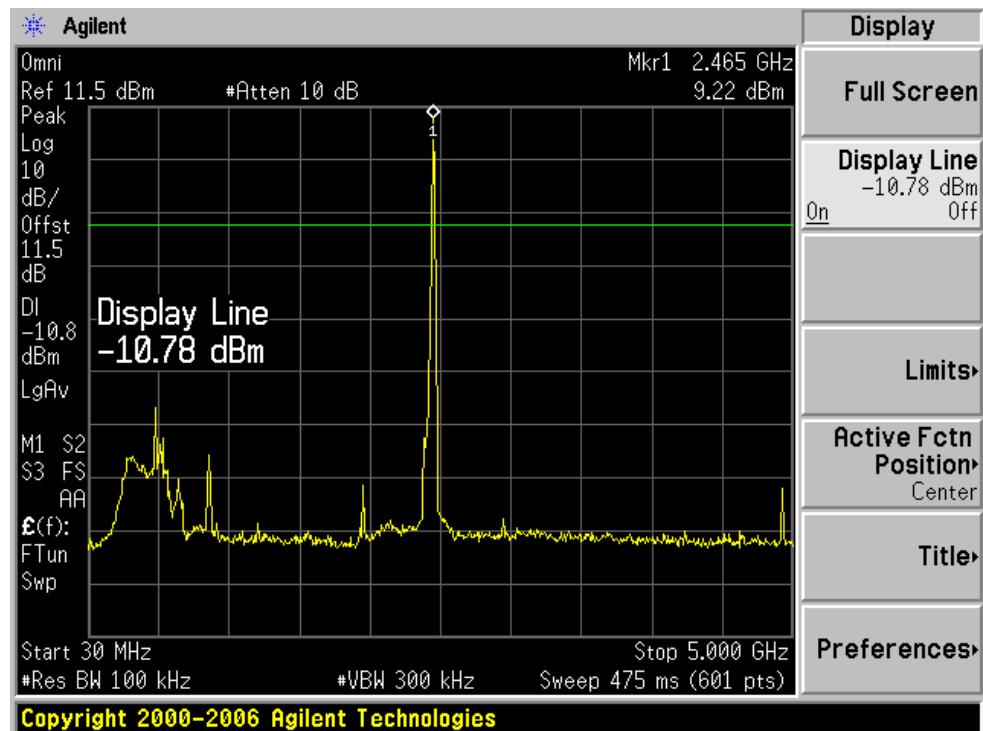
High Channel


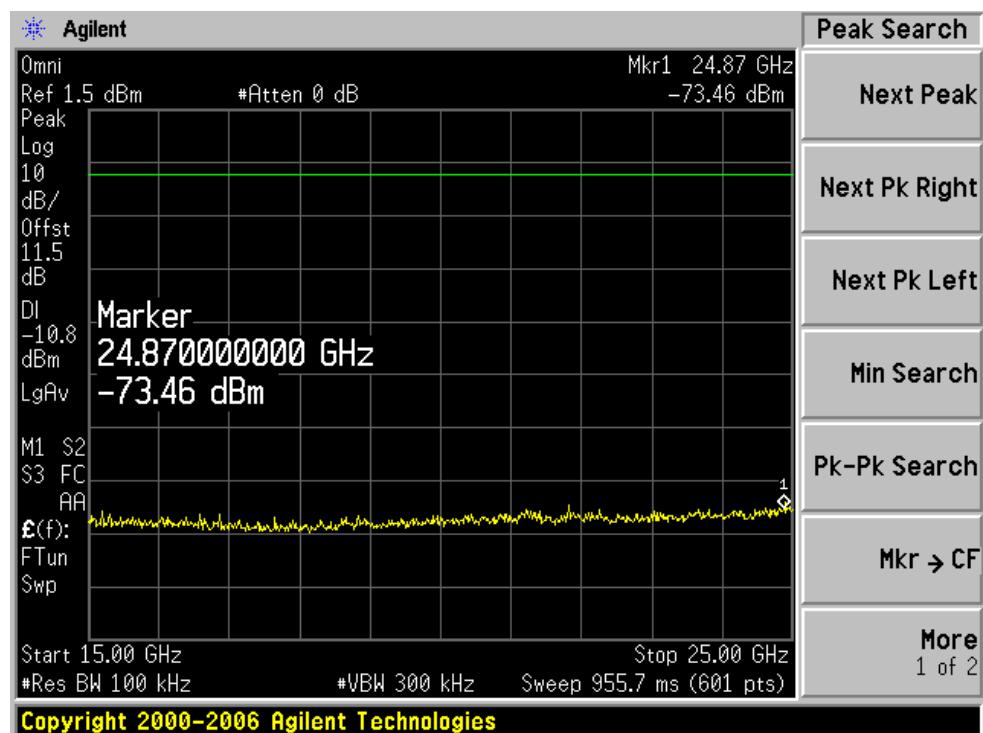




802.11b mode



Direct

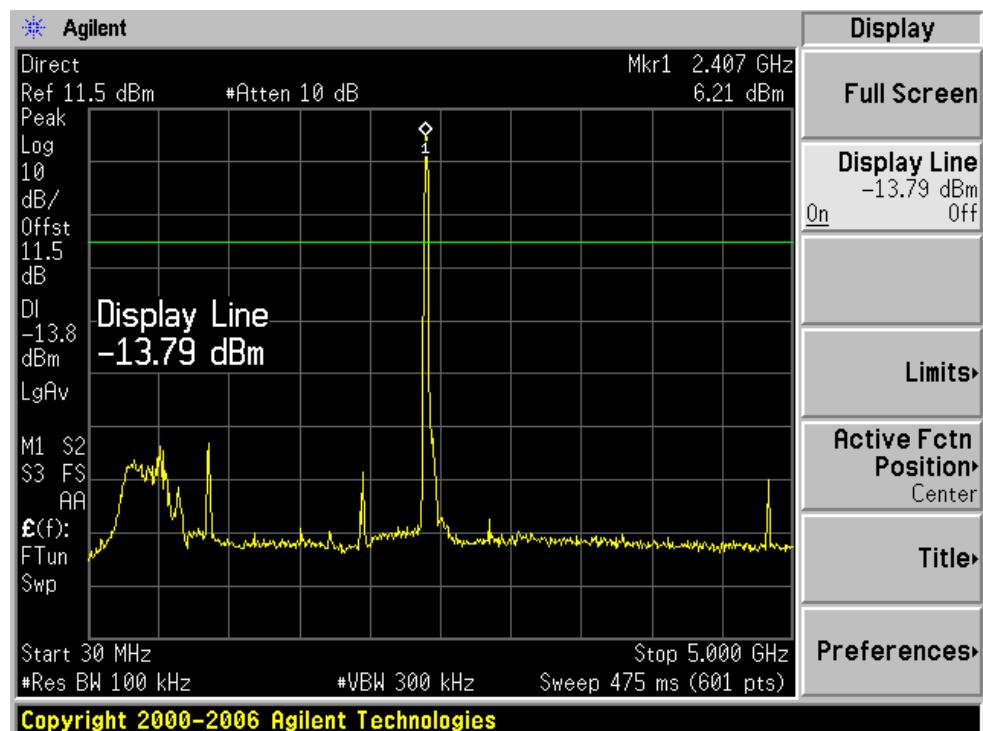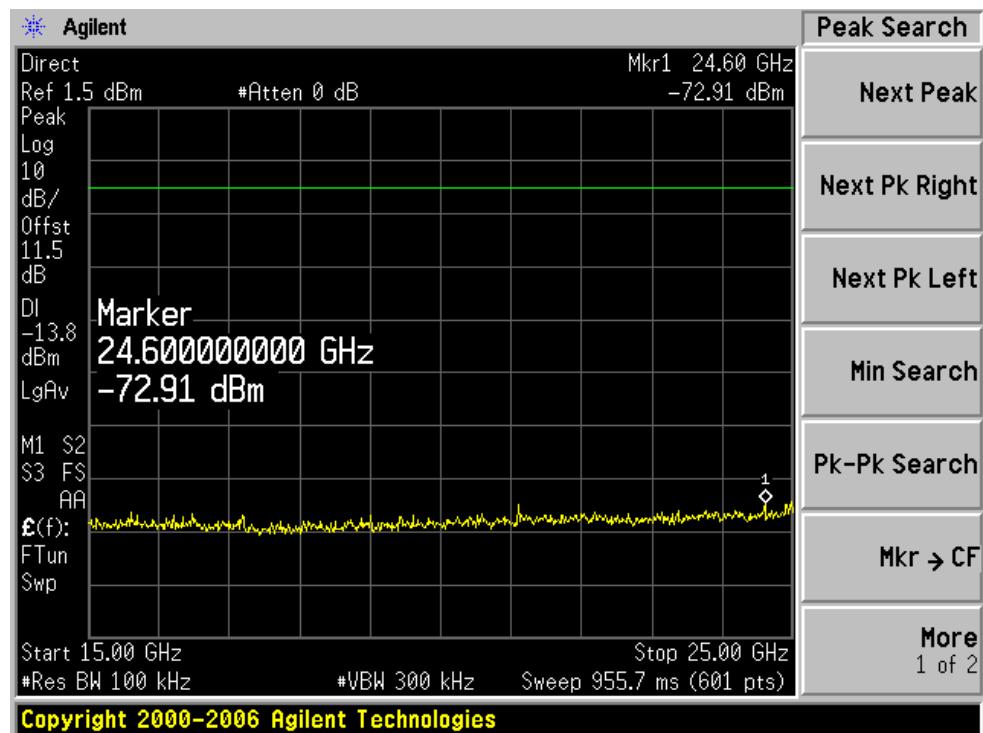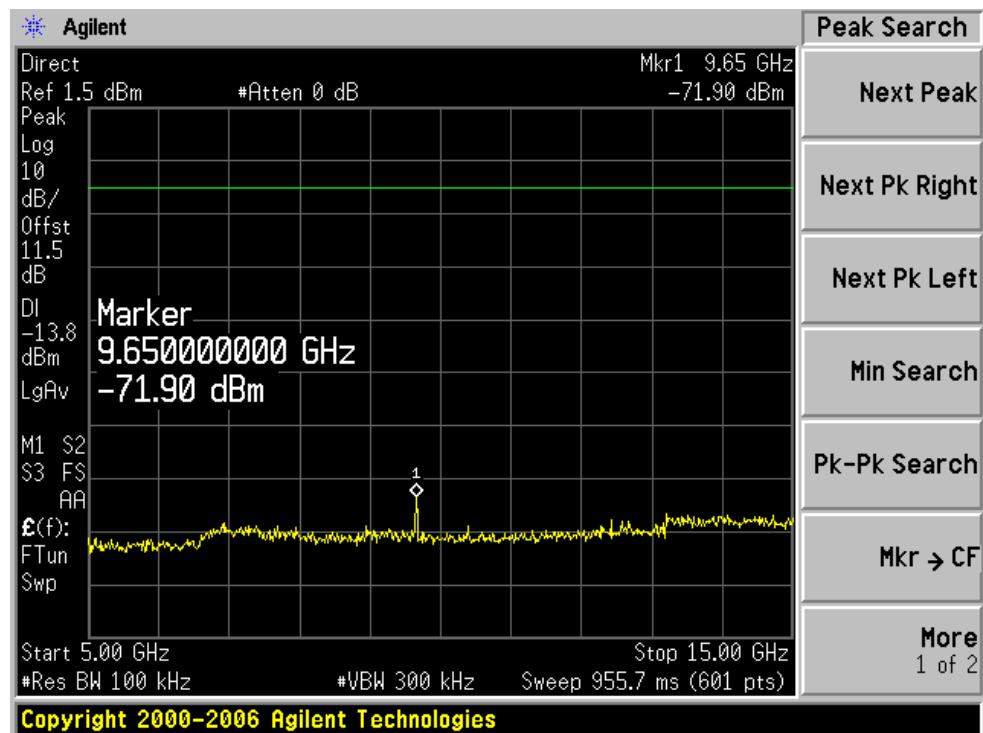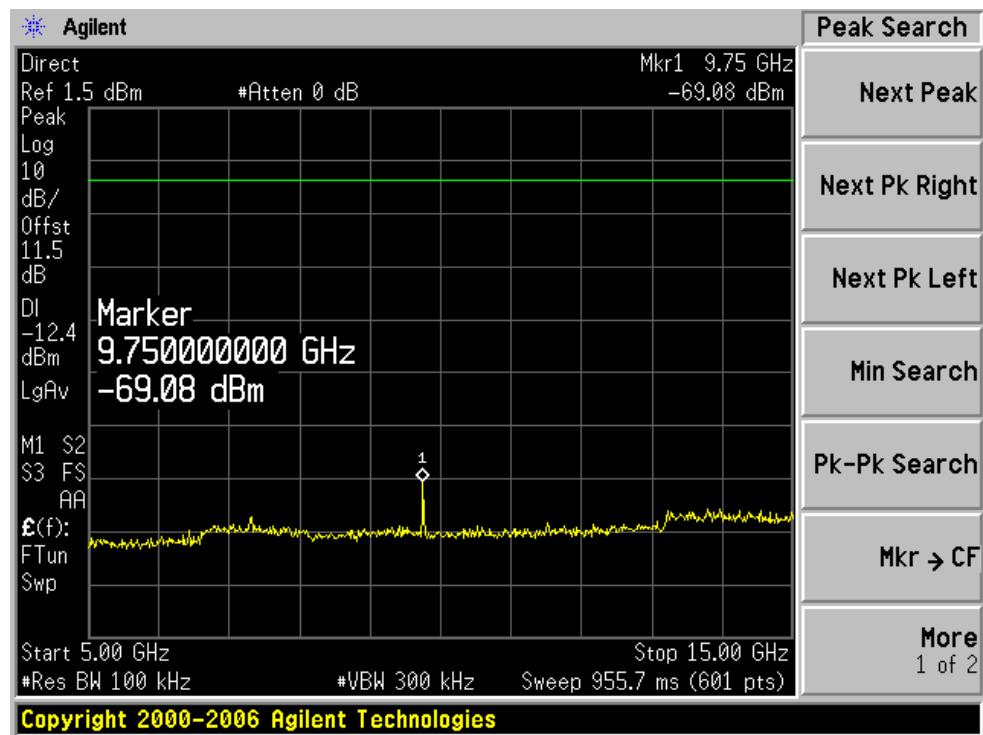
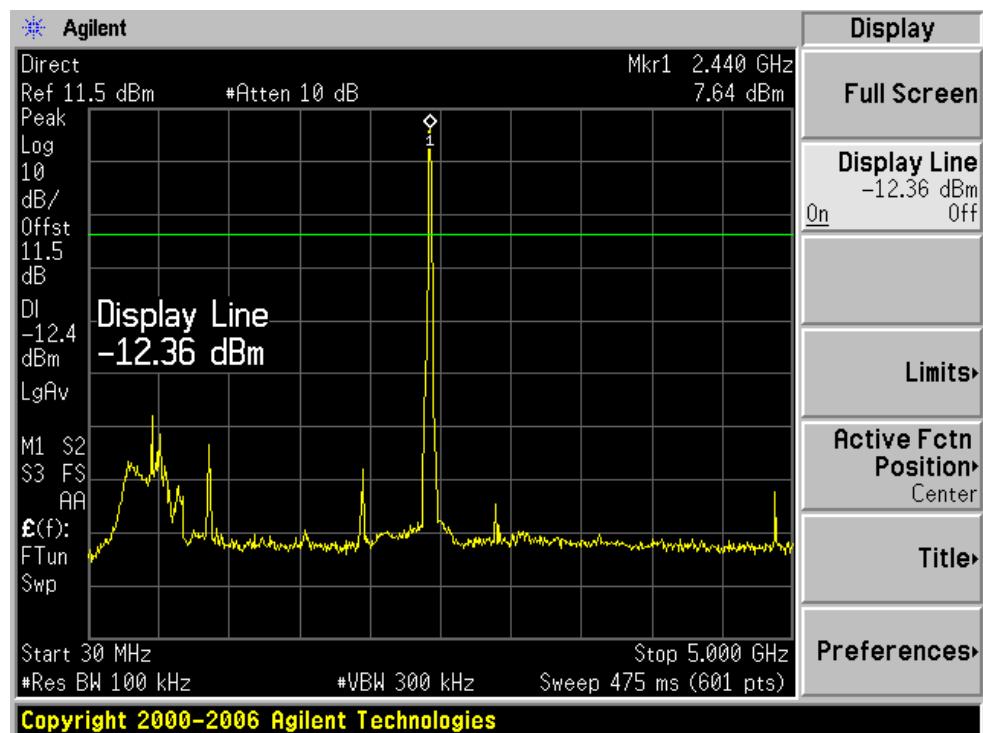
Low Channel











Middle Channel

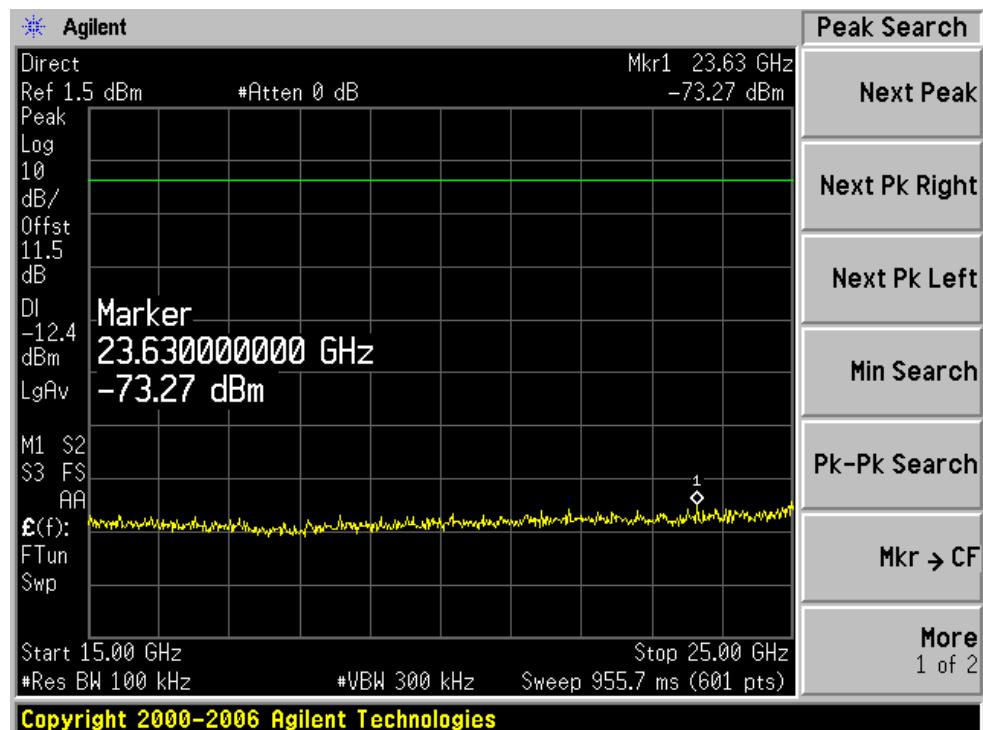
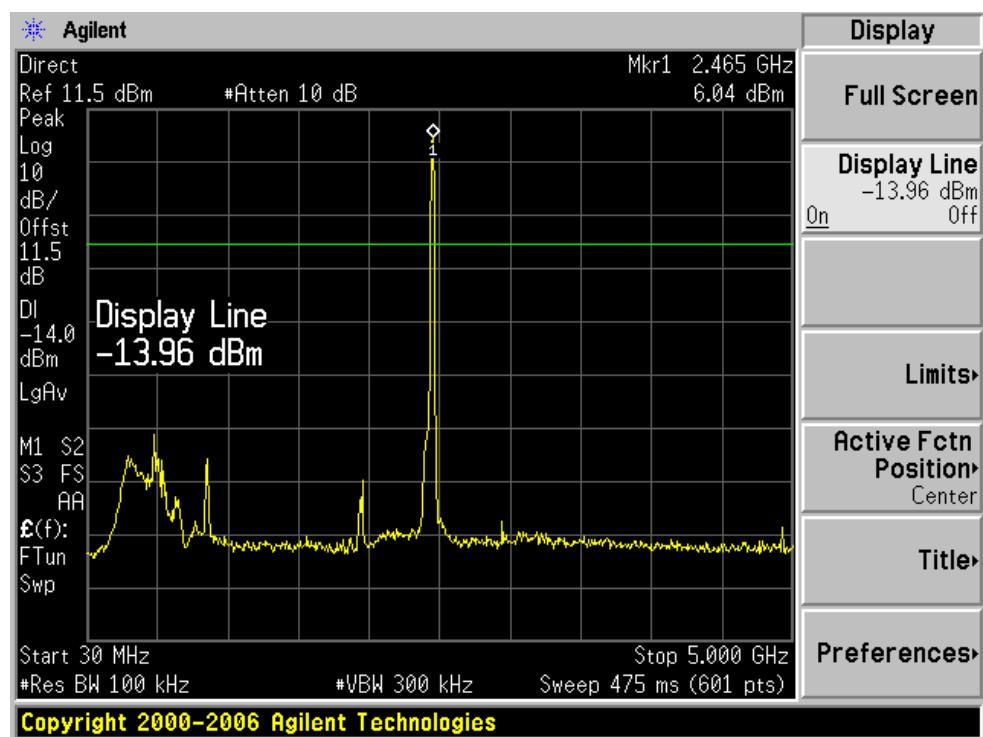
**High Channel**

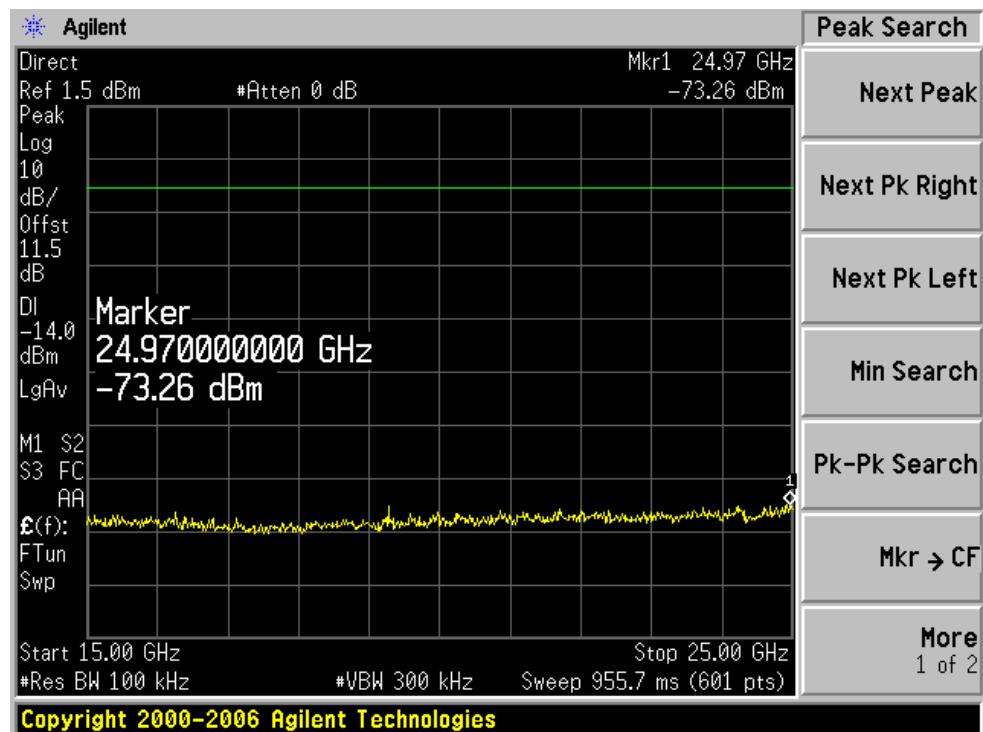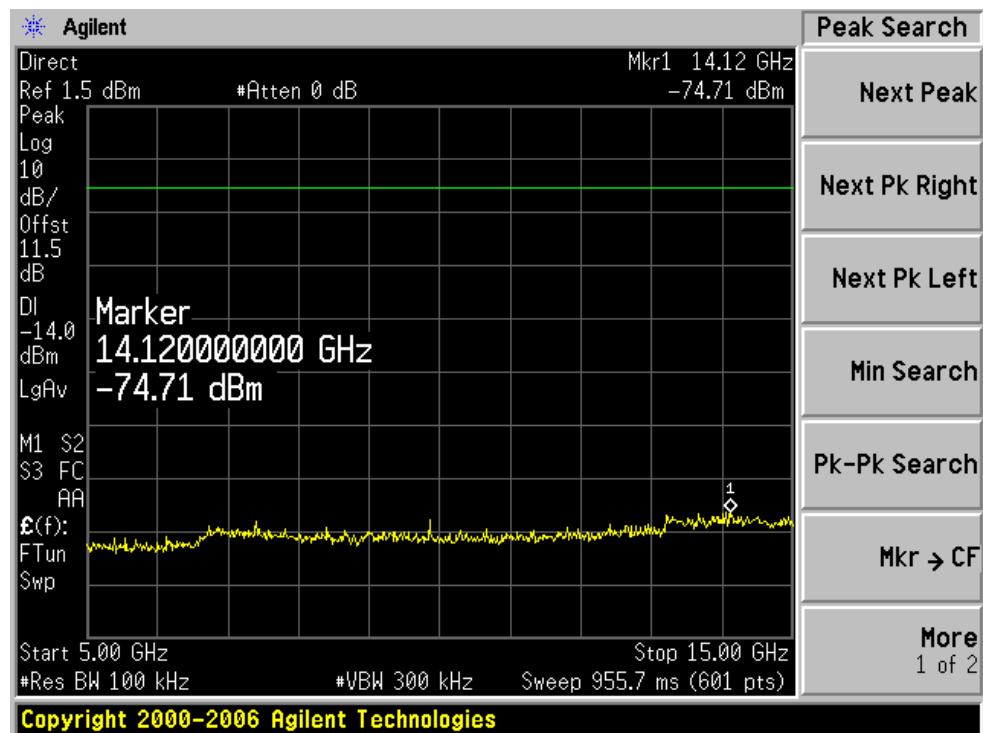


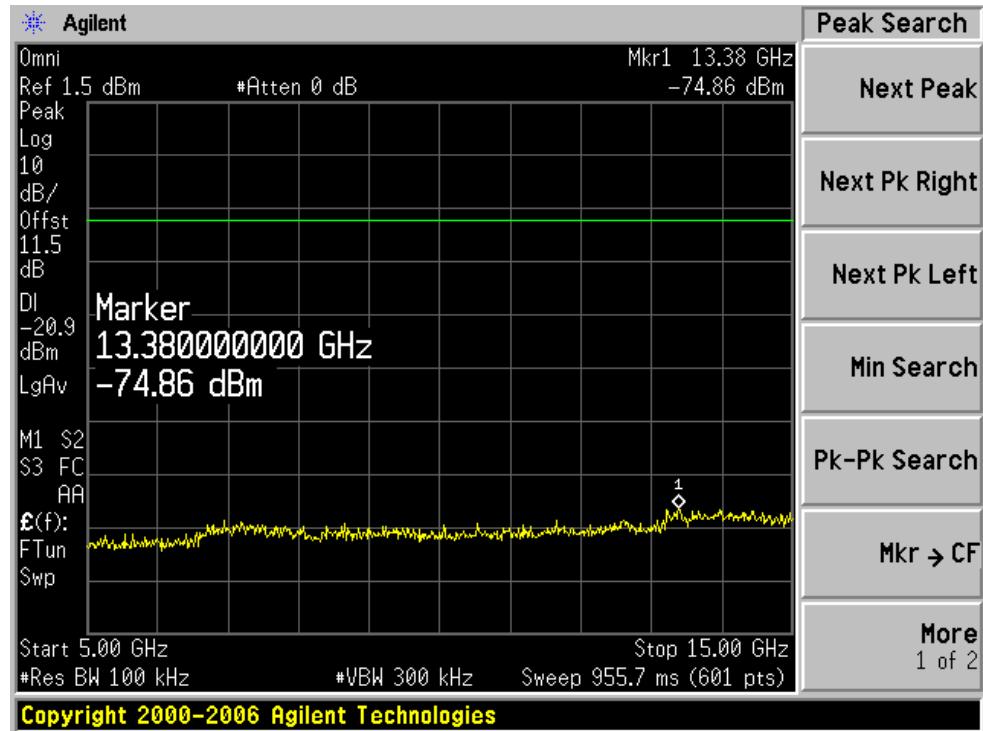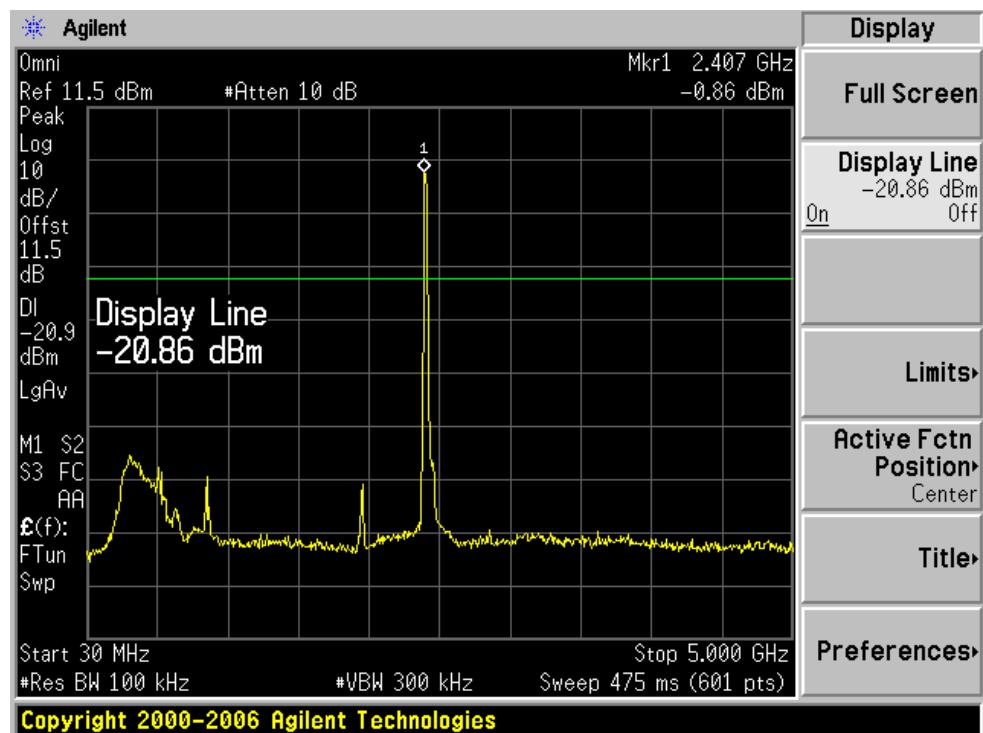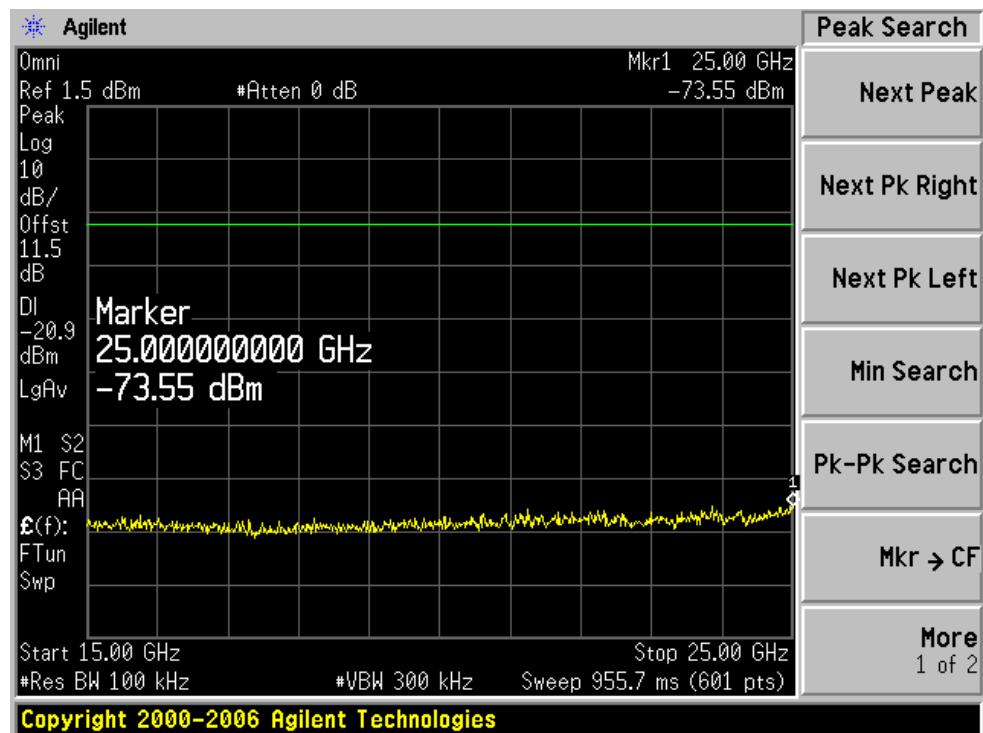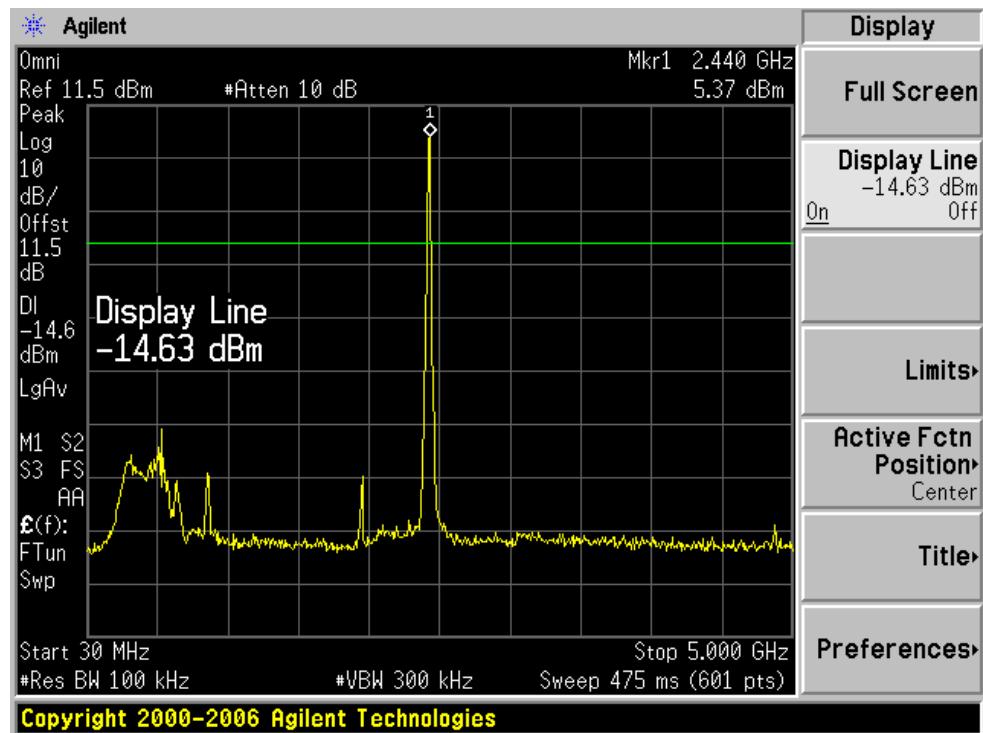802.11g mode**Omni****Low Channel**

**Mid Channel**

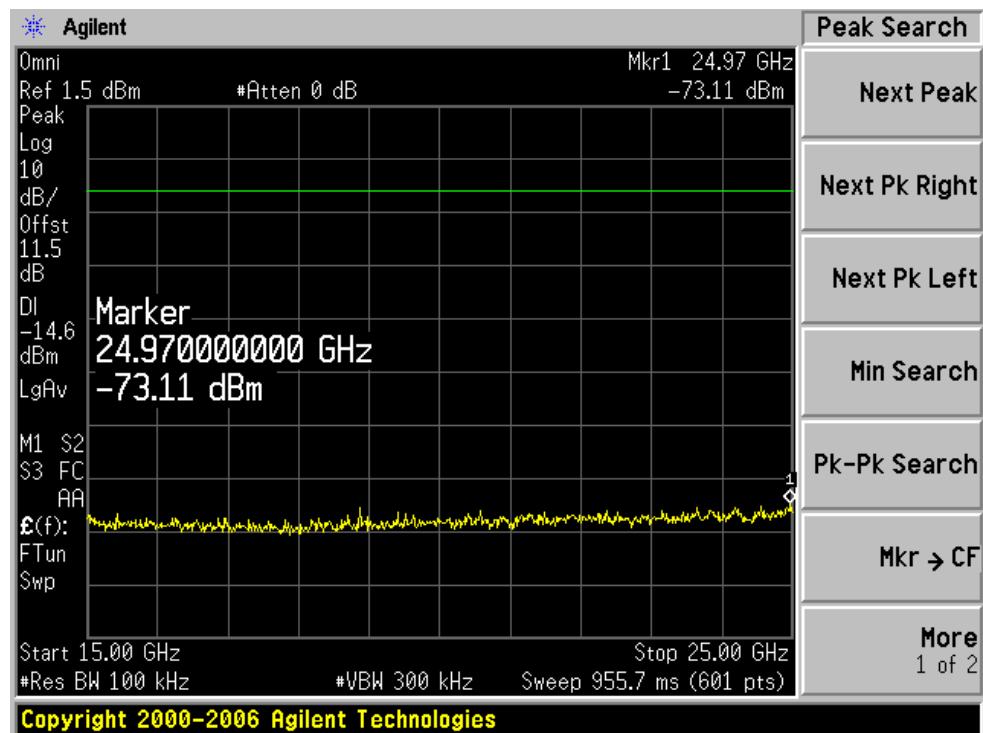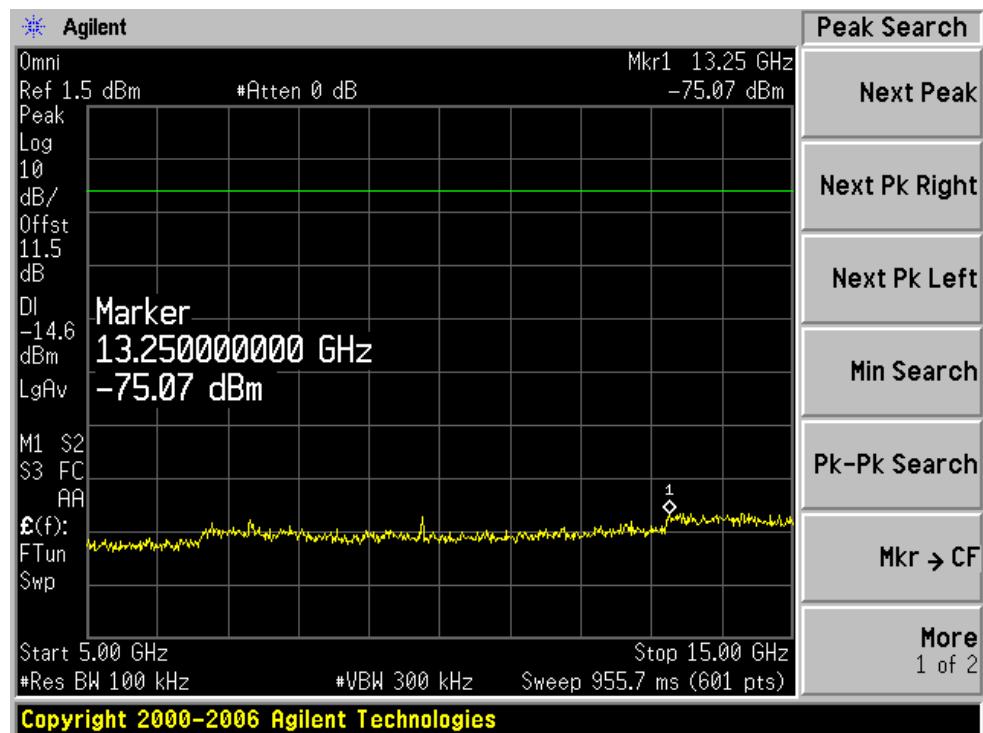

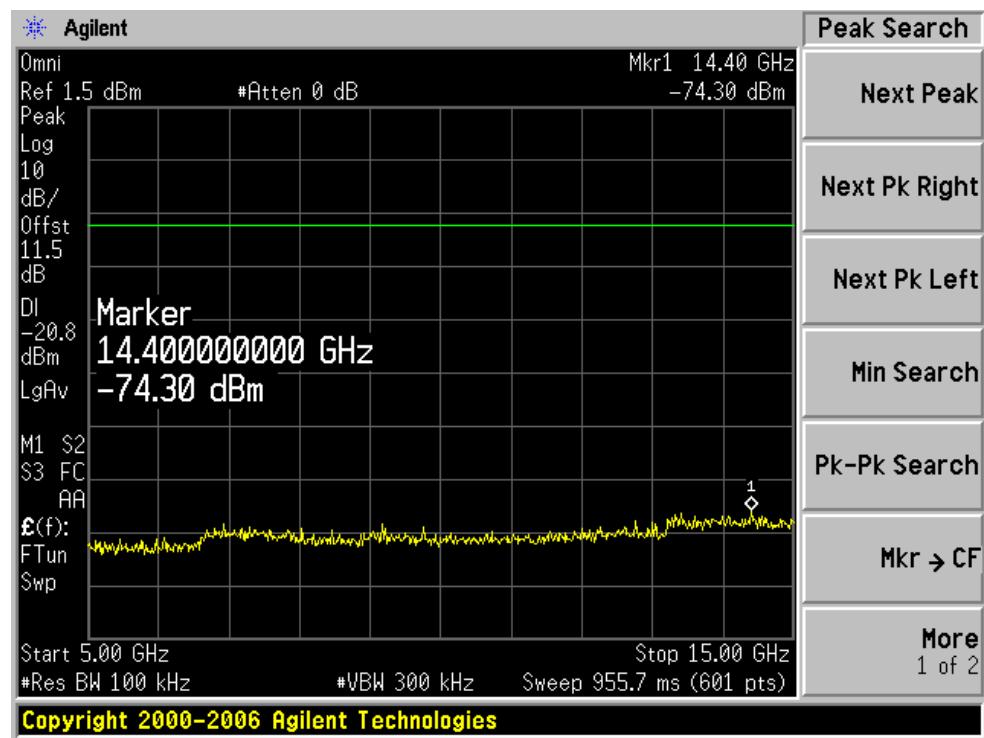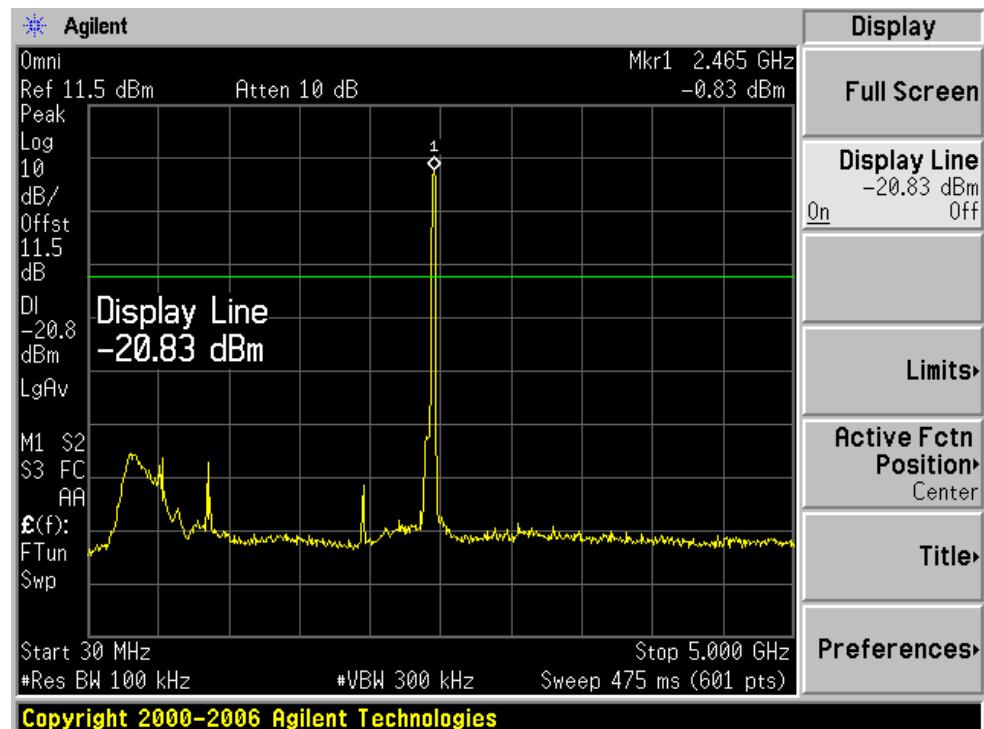
High Channel


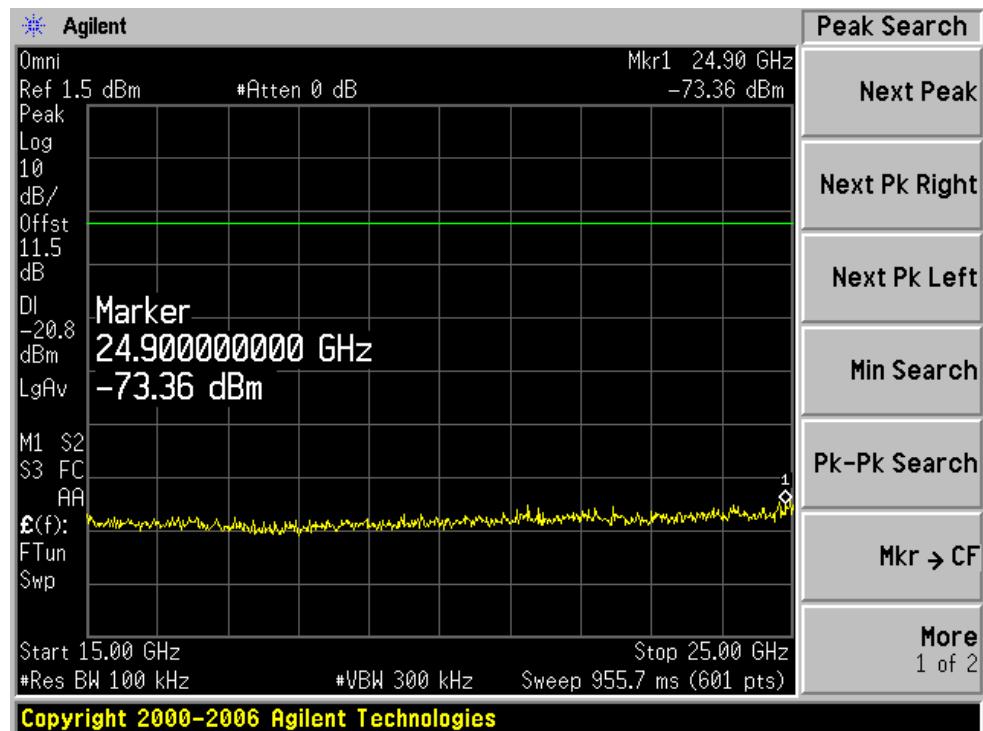


802.11g mode



Direct

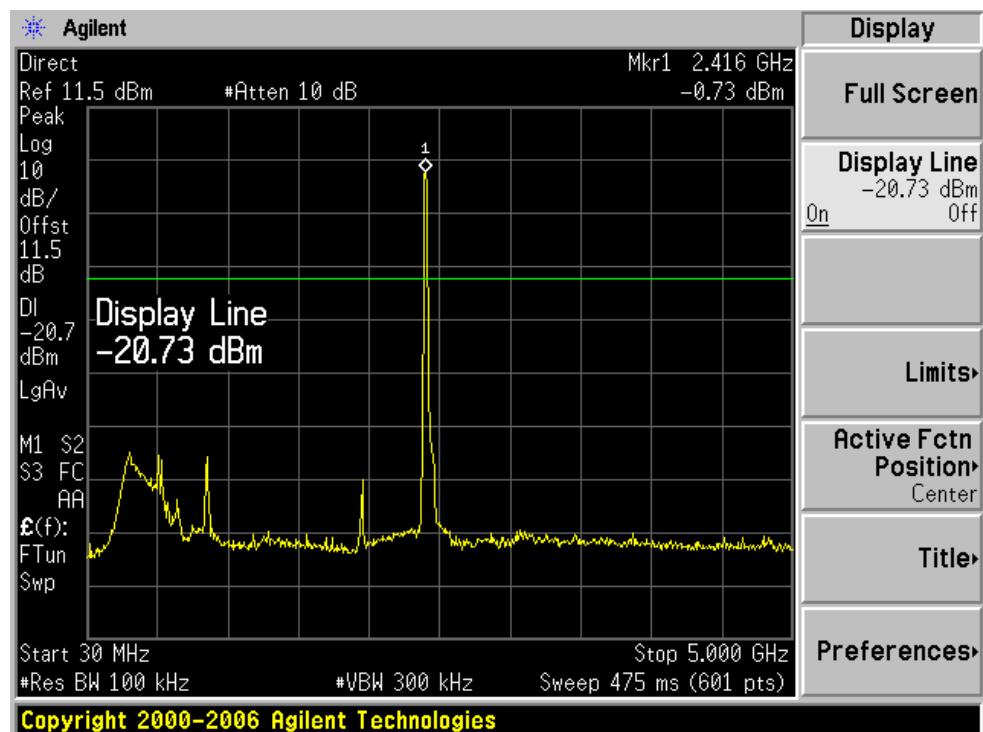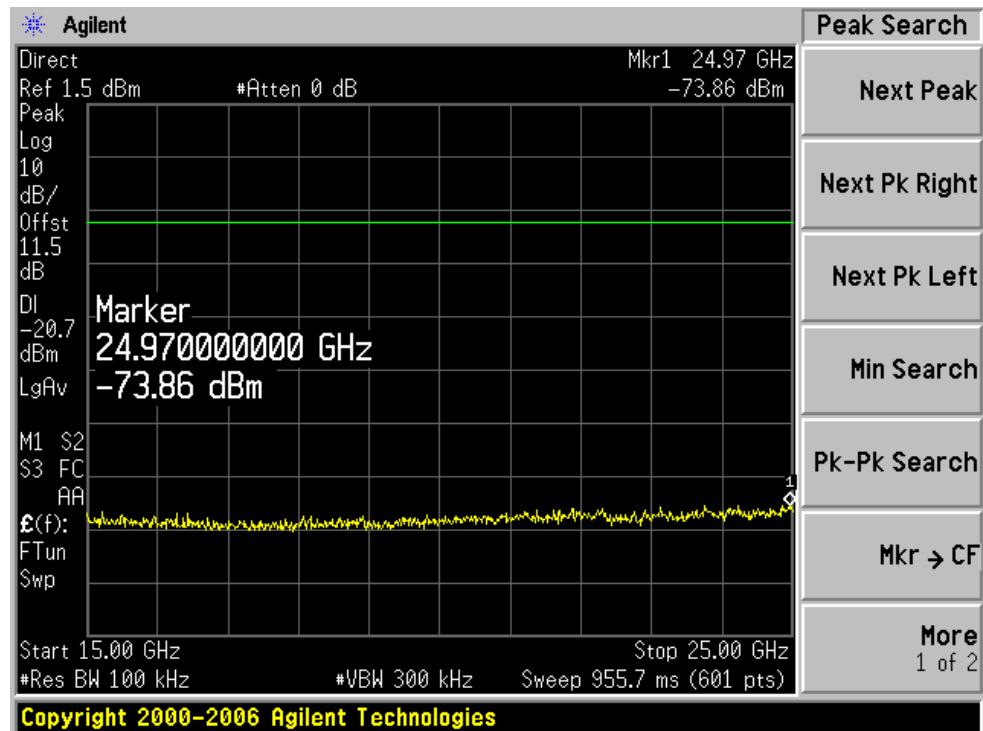
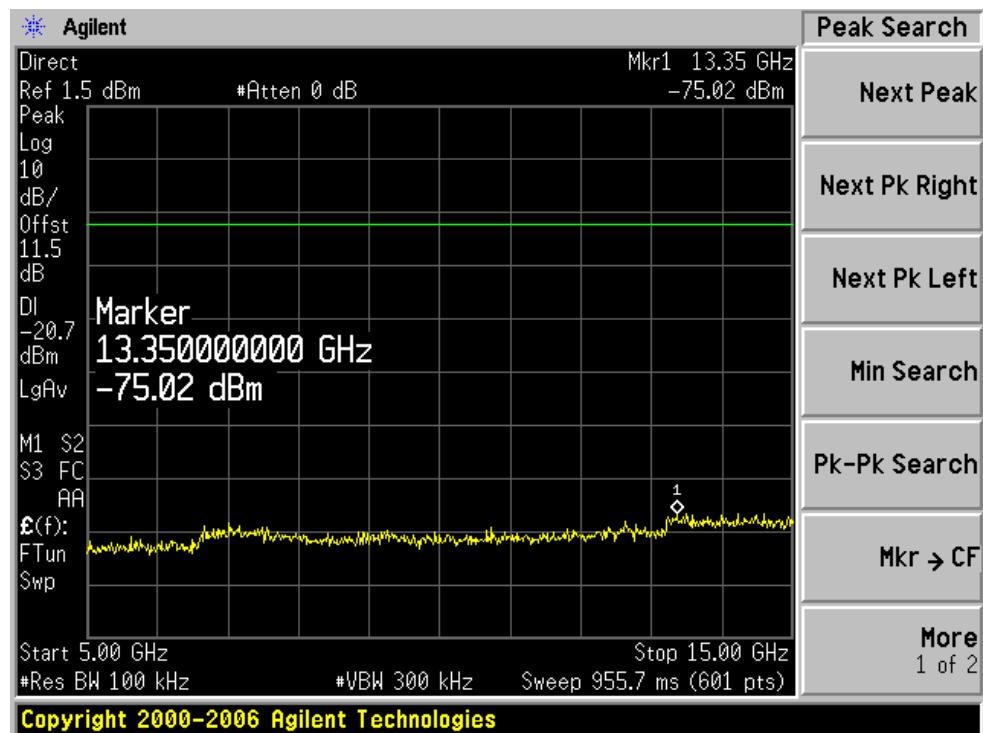
Low Channel







Mid Channel

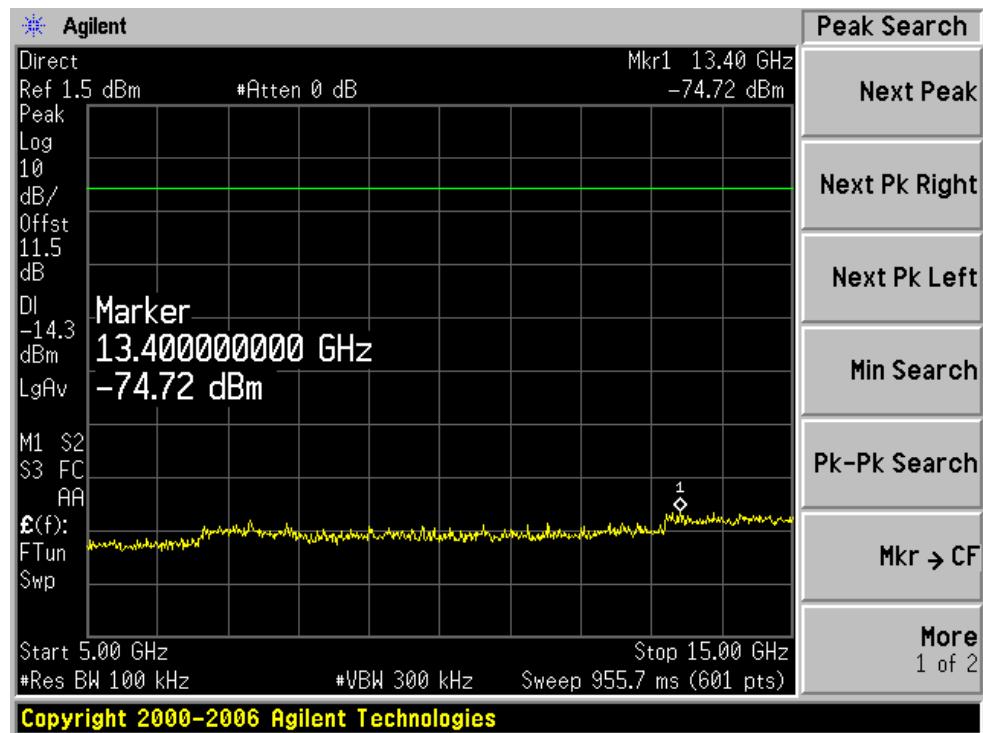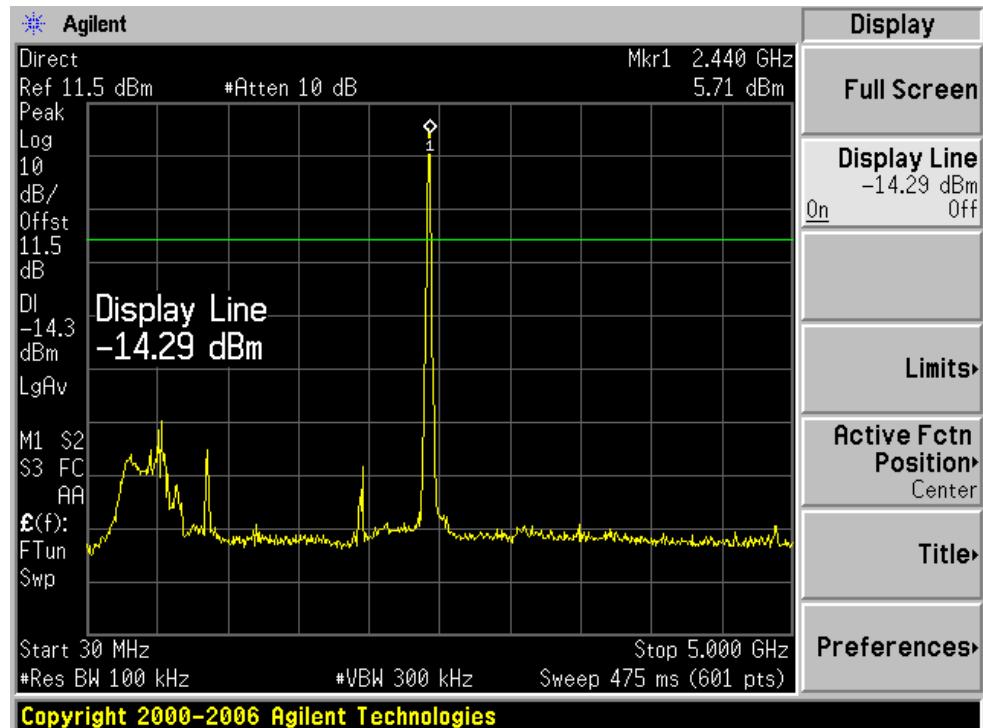

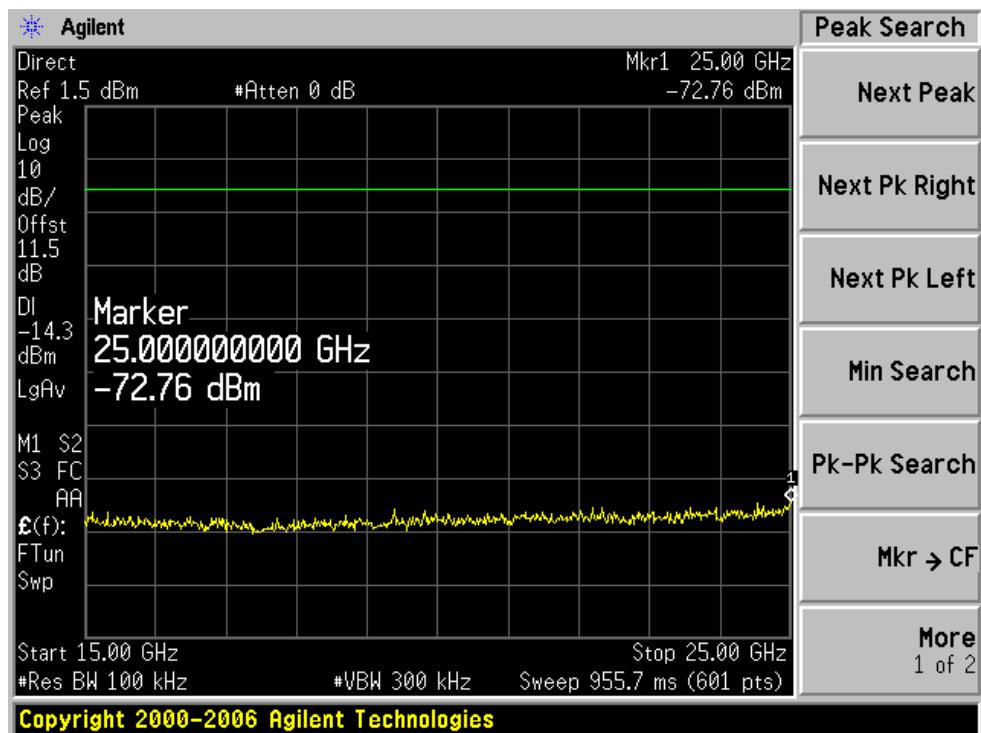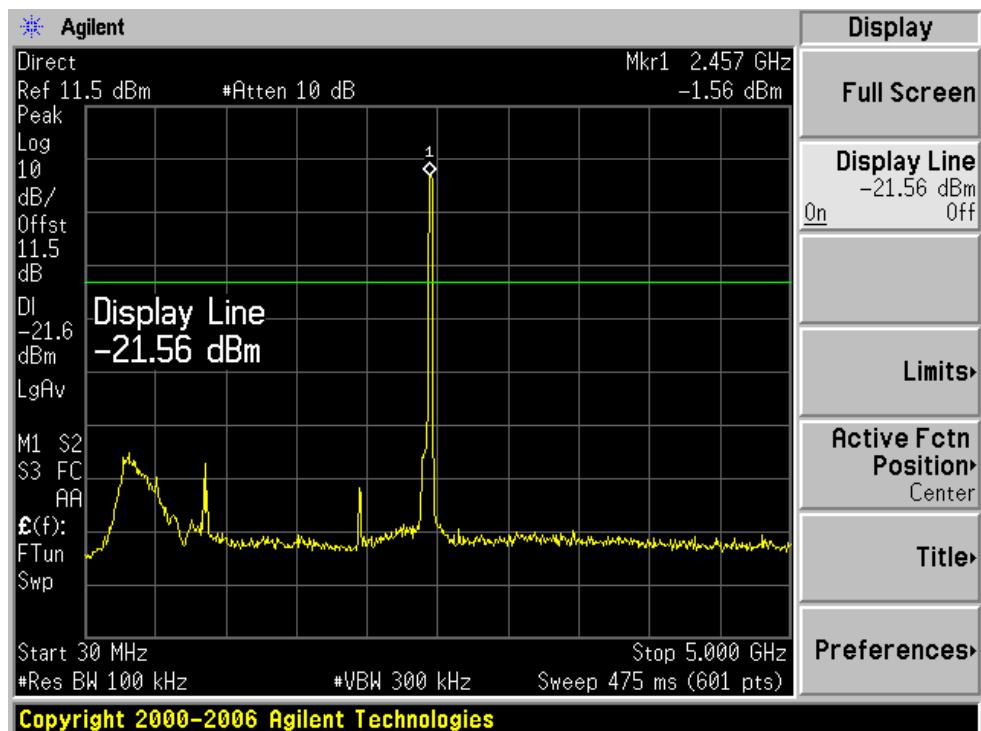**High Channel**

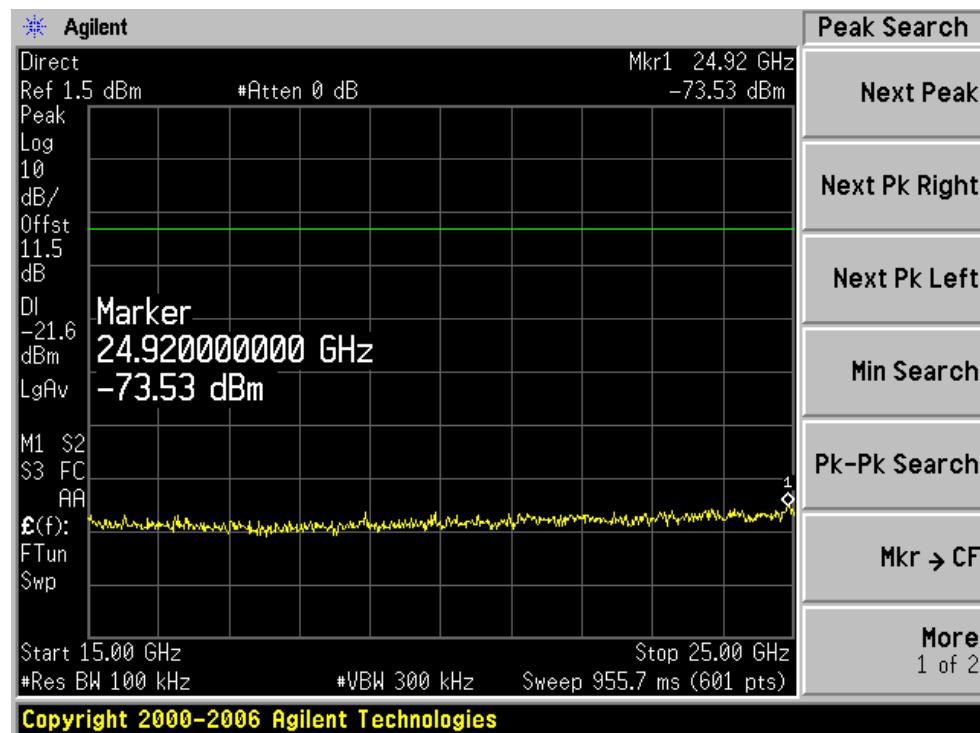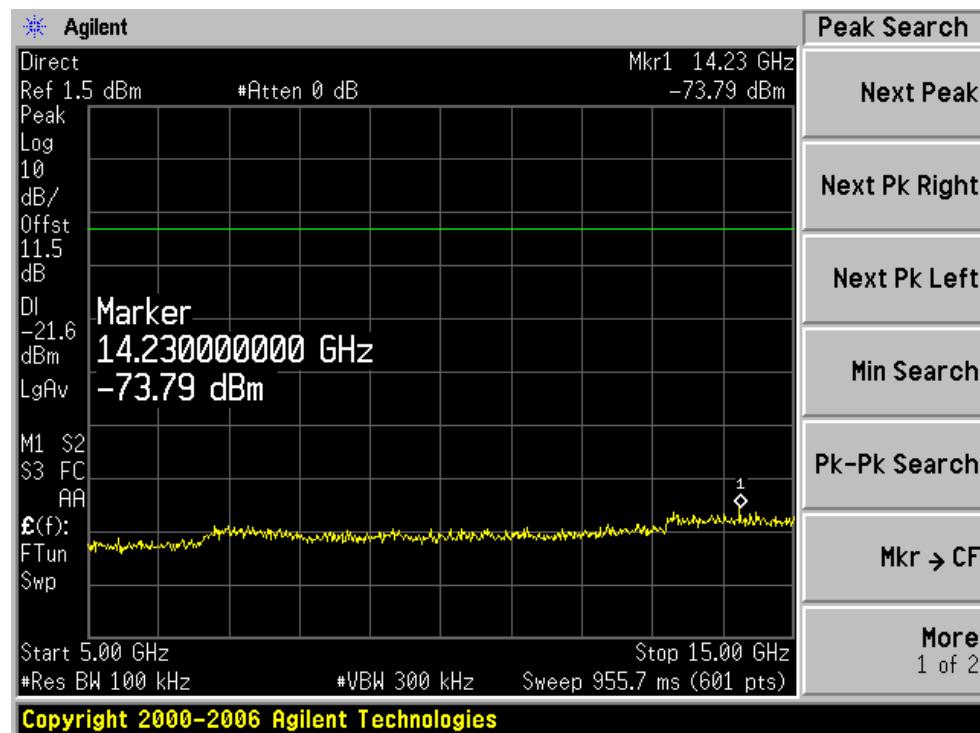

8 FCC §15.109, §15.205, §15.209, IC RSS-Gen §4.9 - SPURIOUS RADIATED EMISSIONS

8.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

| Frequency (MHz) | Field Strength (micro volts/meter) | Measurement Distance (meters) |
|-----------------|------------------------------------|-------------------------------|
| 0.009 - 0.490 | 2400/F(kHz) | 300 |
| 0.490 - 1.705 | 24000/F(kHz) | 30 |
| 1.705 - 30.0 | 30 | 30 |
| 30 - 88 | 100** | 3 |
| 88 - 216 | 150** | 3 |
| 216 - 960 | 200** | 3 |
| Above 960 | 500 | 3 |

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247(c)(1)(i): Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|---------------------|-----------------------|-----------------|---------------|
| 0.090 – 0.110 | 16.42 – 16.423 | 960 – 1240 | 4. 5 – 5. 15 |
| 0.495 – 0.505 | 16.69475 – 16.69525 | 1300 – 1427 | 5. 35 – 5. 46 |
| 2.1735 – 2.1905 | 25.5 – 25.67 | 1435 – 1626.5 | 7.25 – 7.75 |
| 4.125 – 4.128 | 37.5 – 38.25 | 1645.5 – 1646.5 | 8.025 – 8.5 |
| 4.17725 – 4.17775 | 73 – 74.6 | 1660 – 1710 | 9.0 – 9.2 |
| 4.20725 – 4.20775 | 74.8 – 75.2 | 1718.8 – 1722.2 | 9.3 – 9.5 |
| 6.215 – 6.218 | 108 – 121.94 | 2200 – 2300 | 10.6 – 12.7 |
| 6.26775 – 6.26825 | 123 – 138 | 2310 – 2390 | 13.25 – 13.4 |
| 6.31175 – 6.31225 | 149.9 – 150.05 | 2483.5 – 2500 | 14.47 – 14.5 |
| 8.291 – 8.294 | 156.52475 – 156.52525 | 2690 – 2900 | 15.35 – 16.2 |
| 8.362 – 8.366 | 156.7 – 156.9 | 3260 – 3267 | 17.7 – 21.4 |
| 8.37625 – 8.38675 | 162.0125 – 167.17 | 3.332 – 3.339 | 22.01 – 23.12 |
| 8.41425 – 8.41475 | 167.72 – 173.2 | 3.3458 – 3.358 | 23.6 – 24.0 |
| 12.29 – 12.293 | 240 – 285 | 3.600 – 4.400 | 31.2 – 31.8 |
| 12.51975 – 12.52025 | 322 – 335.4 | | 36.43 – 36.5 |
| 12.57675 – 12.57725 | 399.9 – 410 | | Above 38.6 |
| 13.36 – 13.41 | 608 – 614 | | |

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

IC RSS-GEN §4.9 the measurement method shall be described in the test report. The same parameter, peak power or average power, used for the transmitter output power measurement shall be used for unwanted emission measurements. The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate or carrier frequency), or from 30 MHz, whichever is the lower, to the 5th harmonic of the highest frequency generated without exceeding 40 GHz.

8.2 Test Setup

The radiated emissions tests were performed in the 3-meter open area test site, using the setup in accordance with ANSI C63.4-2003. The specification used was the FCC 15 Subpart C limits.

8.3 EUT Setup

The radiated emissions tests were performed using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15C limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundled when necessary.

8.4 Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date |
|--------------------|---------------------|-------------|---------------|------------------|
| Sonoma Instruments | Pre amplifier | 317 | 260407 | 2007-04-26 |
| HP | Pre amplifier | 8449B | 3147A00400 | 2007-06-27 |
| Sunol Science Corp | Combination Antenna | JB3 Antenna | A020106-3 | 2007-03-05 |
| A.R.A | Antenna Horn | DRG-118/A | 1132 | 2007-06-18 |
| Rohde & Schwarz | Receiver | ESCI | 100337 | 2007-03-08 |
| Agilent | Spectrum Analyzer | E4446A | US44300386 | 2007-04-26 |

* **Statement of Traceability:** BACL attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

8.5 Test Procedure

For the radiated emissions test, the EUT, and all support equipment power cords was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meters away from the testing antenna, which is varied from 1-4 meters, and the EUT is placed on a turntable, which is 0.8 meter above ground plane, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

The spectrum analyzer or receiver is set as:

Below 1000MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 1000MHz:

- (1) Peak: $\text{RBW} = 1\text{MHz} / \text{VBW} = 1\text{MHz} / \text{Sweep} = \text{Auto}$
- (2) Average: $\text{RBW} = 1\text{MHz} / \text{VBW} = 10\text{Hz} / \text{Sweep} = \text{Auto}$

8.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

8.7 Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 27 °C |
| Relative Humidity: | 40 % |
| ATM Pressure: | 102.0 kPa |

*The testing was performed by Choon-Sian Ooi on 2007-10-22.

8.8 Summary of Test Results

According to the data hereinafter, the EUT complied with the FCC and IC requirements, and had the worst margin readings of:

Unintentional Emissions, (30-1000 MHz):

| Mode: Receiver | | | |
|-----------------------|------------------------|---|--------------------|
| Margin (dB) | Frequency (MHz) | Polarization (Horizontal/Vertical) | Range (MHz) |
| -0.4 | 77.206250 | Horizontal | 30 MHz to 1000 MHz |

Out of Band Emissions:

| Mode: Regular Antenna 802.11b (2412-2462 MHz), Omni | | | |
|--|------------------------|---|-----------------------------|
| Margin (dB) | Frequency (MHz) | Polarization (Horizontal/Vertical) | Channel, Range (GHz) |
| -9.9 | 7236.0000 | Vertical | Low, 1 GHz – 25GHz |
| -11.3 | 7311.0000 | Vertical | Middle, 1 GHz – 25GHz |
| -10.7 | 7386.0000 | Vertical | High, 1 GHz – 25GHz |


| Mode: Regular Antenna 802.11b (2412-2462 MHz), Direct | | | |
|--|------------------------|---|-----------------------------|
| Margin (dB) | Frequency (MHz) | Polarization (Horizontal/Vertical) | Channel, Range (GHz) |
| -10.6 | 7236.0000 | Vertical | Low, 1 GHz – 25GHz |
| -11.0 | 7311.0000 | Vertical | Middle, 1 GHz – 25GHz |
| -10.8 | 7386.0000 | Vertical | High, 1 GHz – 25GHz |

| Mode: Regular Antenna 802.11g (2412-2462 MHz), Omni | | | |
|--|------------------------|---|-----------------------------|
| Margin (dB) | Frequency (MHz) | Polarization (Horizontal/Vertical) | Channel, Range (GHz) |
| -12.3 | 7236.0000 | Vertical | Low, 1 GHz – 25GHz |
| -10.6 | 7311.0000 | Vertical | Middle, 1 GHz – 25GHz |
| -12.5 | 7386.0000 | Vertical | High, 1 GHz – 25GHz |

| Mode: Regular Antenna 802.11g (2412-2462 MHz), Direct | | | |
|--|------------------------|---|-----------------------------|
| Margin (dB) | Frequency (MHz) | Polarization (Horizontal/Vertical) | Channel, Range (GHz) |
| -12.5 | 7236.0000 | Vertical | Low, 1 GHz – 25GHz |
| -10.4 | 7311.0000 | Vertical | Middle, 1 GHz – 25GHz |
| -12.2 | 7386.0000 | Vertical | High, 1 GHz – 25GHz |

8.9 Radiated Emissions Test plot & data:

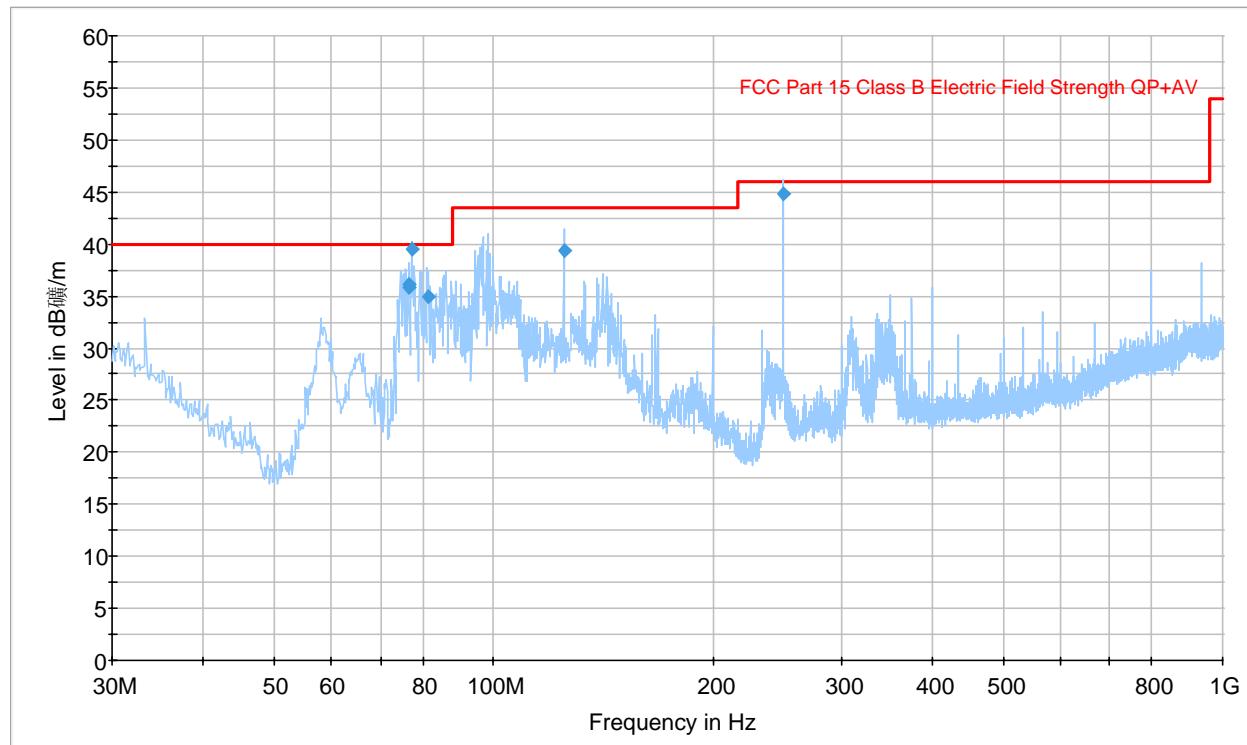30MHz -1GHz



| Frequency (MHz) | Quasi-Peak (dB μ V/m) | Antenna Height (cm) | Polarity (H/V) | Turntable Position (deg) | Corr. (dB) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|---------------------------|---------------------|----------------|--------------------------|------------|-------------|----------------------|
| 77.206250 | 39.6 | 388.0 | H | 63.0 | -6.5 | -0.4 | 40.0 |
| 249.947500 | 44.9 | 124.0 | H | 270.0 | -2.3 | -1.1 | 46.0 |
| 76.553750 | 36.1 | 398.0 | H | 239.0 | -6.5 | -3.9 | 40.0 |
| 76.560000 | 35.9 | 398.0 | H | 236.0 | -6.5 | -4.1 | 40.0 |
| 125.020000 | 39.4 | 98.0 | V | 104.0 | -0.9 | -4.1 | 43.5 |
| 81.207500 | 35.0 | 398.0 | H | 239.0 | -6.4 | -5.0 | 40.0 |

8.10 Radiated Spurious Emissions Test Data

Aggregate Antenna (9.0 dBi)

802.11b, 2412 - 2462 MHz, Measured at 3 meters, 1 GHz – 25 GHz

Omni

Low channel 2412 MHz

| Frequency (MHz) | Reading (dB μ V) | Azimuth Degrees | ANT. Height (m) | ANT. Polar. (H/V) | ANT. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. (dB) | Corrected Reading (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Comments |
|-----------------|----------------------|-----------------|-----------------|-------------------|--------------------|-----------------|---------------|----------------------------------|----------------------|-------------|-----------|
| 2412.00 | 121.0 | 150 | 1.5 | V | 28.2 | 4.4 | 36.2 | 117.4 | | | Fund/Peak |
| 2412.00 | 108.4 | 320 | 1.5 | H | 28.2 | 4.4 | 36.2 | 104.8 | | | Fund/Peak |
| 2412.00 | 111.2 | 150 | 1.8 | V | 28.2 | 4.4 | 36.2 | 107.6 | | | Ave |
| 2412.00 | 96.3 | 320 | 1.5 | H | 28.2 | 4.4 | 36.2 | 92.7 | | | Ave |
| 7236.00 | 31.1 | 90 | 2.0 | V | 37.6 | 12.3 | 36.9 | 44.1 | 54 | -9.9 | Ave |
| 7236.00 | 28.5 | 200 | 1.0 | H | 37.6 | 12.3 | 36.9 | 41.5 | 54 | -12.5 | Ave |
| 4824.00 | 34.7 | 260 | 1.2 | V | 32.1 | 6.0 | 34.4 | 38.4 | 54 | -15.6 | Ave |
| 7236.00 | 42.4 | 90 | 2.0 | V | 37.6 | 12.3 | 36.9 | 55.4 | 74 | -18.6 | Peak |
| 4824.00 | 30.0 | 180 | 2.3 | H | 32.1 | 6.0 | 34.4 | 33.7 | 54 | -20.3 | Ave |
| 4824.00 | 44.2 | 260 | 1.2 | V | 32.1 | 6.0 | 34.4 | 47.9 | 74 | -26.1 | Peak |
| 7236.00 | 30.3 | 200 | 1.0 | H | 37.6 | 12.3 | 36.9 | 43.3 | 74 | -30.7 | Peak |
| 4824.00 | 37.1 | 70 | 1.7 | H | 32.1 | 6.0 | 34.4 | 40.8 | 74 | -33.2 | Peak |

Middle channel 2437 MHz

| Frequency (MHz) | Reading (dB μ V) | Azimuth Degrees | ANT. Height (m) | ANT. Polar. (H/V) | ANT. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. (dB) | Corrected Reading (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Comments |
|-----------------|----------------------|-----------------|-----------------|-------------------|--------------------|-----------------|---------------|----------------------------------|----------------------|-------------|-----------|
| 2437.00 | 121.2 | 45 | 1.0 | V | 28.2 | 4.4 | 36.2 | 117.6 | | | Fund/Peak |
| 2437.00 | 106.8 | 45 | 1.2 | H | 28.2 | 4.4 | 36.2 | 103.2 | | | Fund/Peak |
| 2437.00 | 110.1 | 45 | 1.0 | V | 28.2 | 4.4 | 36.2 | 106.5 | | | Ave |
| 2437.00 | 94.7 | 45 | 1.2 | H | 28.2 | 4.4 | 36.2 | 91.1 | | | Ave |
| 7311.00 | 29.7 | 30 | 1.3 | V | 37.6 | 12.3 | 36.9 | 42.7 | 54 | -11.3 | Ave |
| 7311.00 | 27.3 | 180 | 1.0 | H | 37.6 | 12.3 | 36.9 | 40.3 | 54 | -13.7 | Ave |
| 4874.00 | 33.8 | 300 | 1.3 | V | 32.1 | 6.0 | 34.4 | 37.5 | 54 | -16.5 | Ave |
| 7311.00 | 40.3 | 30 | 1.3 | V | 37.6 | 12.3 | 36.9 | 53.3 | 74 | -20.7 | Peak |
| 4874.00 | 28.4 | 160 | 2.2 | H | 32.1 | 6.0 | 34.4 | 32.1 | 54 | -21.9 | Ave |
| 4874.00 | 43.7 | 300 | 1.3 | V | 32.1 | 6.0 | 34.4 | 47.4 | 74 | -26.6 | Peak |
| 7311.00 | 31.1 | 180 | 1.0 | H | 37.6 | 12.3 | 36.9 | 44.1 | 74 | -29.9 | Peak |
| 4874.00 | 35.1 | 160 | 2.2 | H | 32.1 | 6.0 | 34.4 | 38.8 | 74 | -35.2 | Peak |


High channel 2462 MHz



| Frequency (MHz) | Reading (dB μ V) | Azimuth Degrees | ANT. Height (m) | ANT. Polar. (H/V) | ANT. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. (dB) | Corrected Reading (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Comments |
|-----------------|----------------------|-----------------|-----------------|-------------------|--------------------|-----------------|---------------|----------------------------------|----------------------|-------------|-----------|
| 2462.00 | 120.6 | 40 | 1.3 | V | 28.2 | 4.4 | 36.2 | 117.0 | | | Fund/Peak |
| 2462.00 | 107.8 | 180 | 1.2 | H | 28.2 | 4.4 | 36.2 | 104.2 | | | Fund/Peak |
| 2462.00 | 111.4 | 40 | 1.3 | V | 28.2 | 4.4 | 36.2 | 107.8 | | | Ave |
| 2462.00 | 95.8 | 180 | 1.2 | H | 28.2 | 4.4 | 36.2 | 92.2 | | | Ave |
| 7386.00 | 30.3 | 270 | 2.4 | V | 37.6 | 12.3 | 36.9 | 43.3 | 54 | -10.7 | Ave |
| 7386.00 | 27.5 | 180 | 1.2 | H | 37.6 | 12.3 | 36.9 | 40.5 | 54 | -13.5 | Ave |
| 4924.00 | 35.9 | 60 | 2.0 | V | 32.1 | 6.0 | 34.4 | 39.6 | 54 | -14.4 | Ave |
| 7386.00 | 40.8 | 270 | 2.4 | V | 37.6 | 12.3 | 36.9 | 53.8 | 74 | -20.2 | Peak |
| 4924.00 | 29.1 | 90 | 2.1 | H | 32.1 | 6.0 | 34.4 | 32.8 | 54 | -21.2 | Ave |
| 4924.00 | 45.5 | 60 | 2.0 | V | 32.1 | 6.0 | 34.4 | 49.2 | 74 | -24.8 | Peak |
| 7386.00 | 33.2 | 180 | 1.2 | H | 37.6 | 12.3 | 36.9 | 46.2 | 74 | -27.8 | Peak |
| 4924.00 | 35.6 | 90 | 2.1 | H | 32.1 | 6.0 | 34.4 | 39.3 | 74 | -34.7 | Peak |



Restricted Band Edge



Low Channel

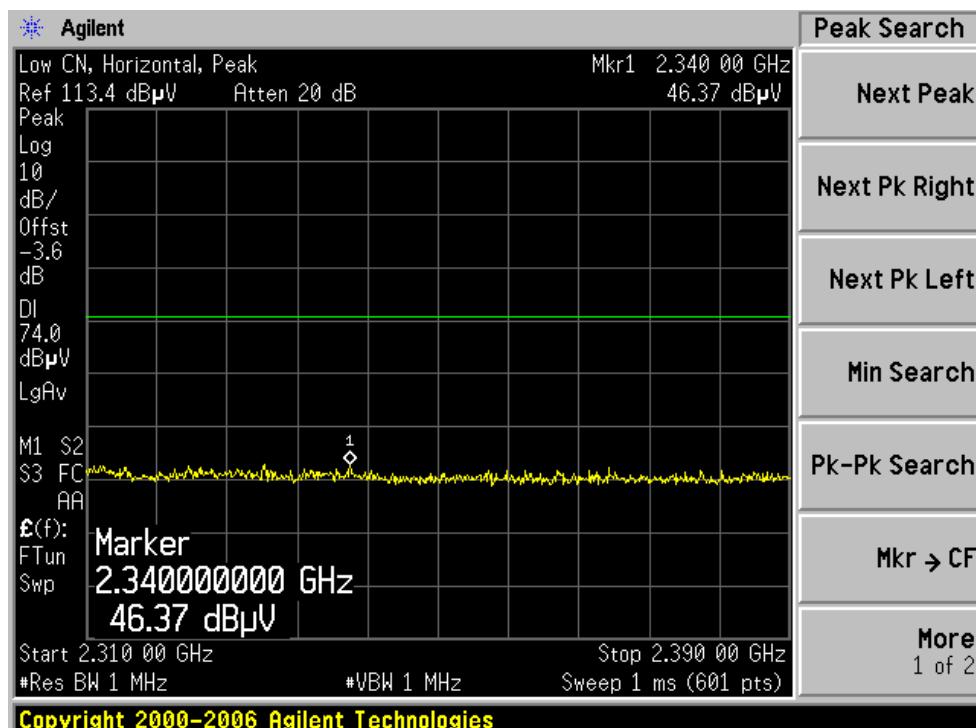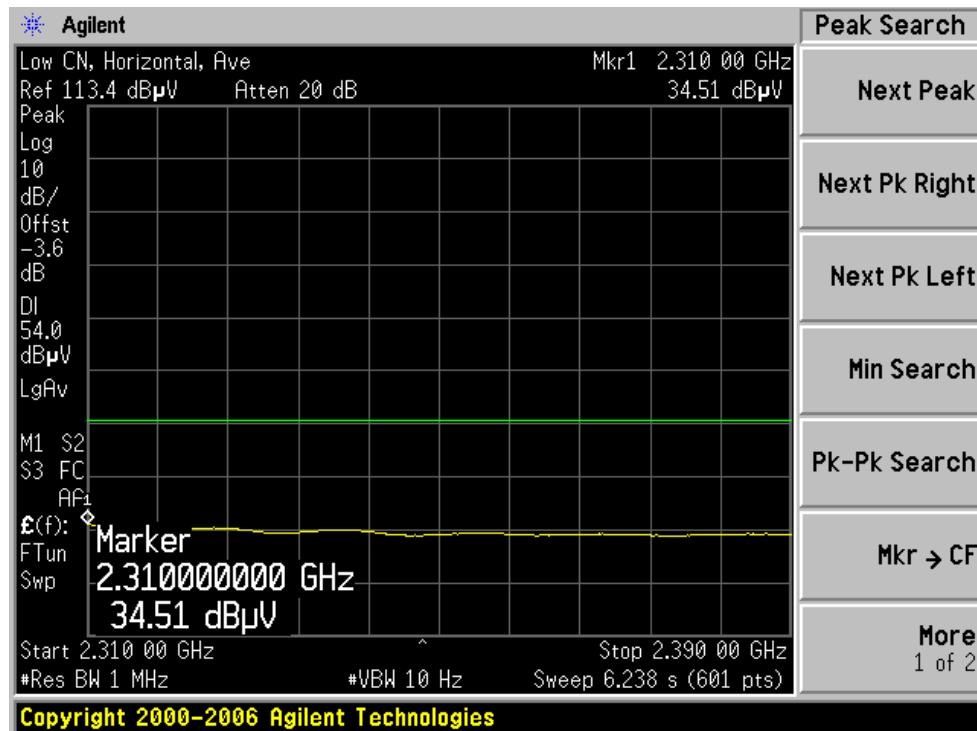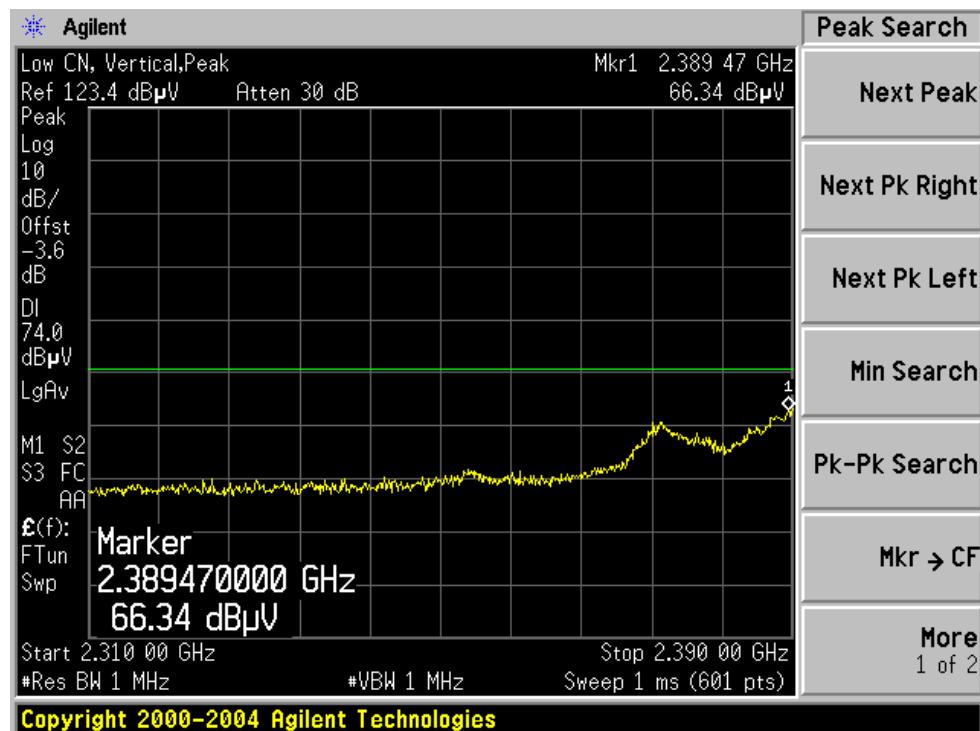
Peak, Horizontal



Average, Horizontal**Peak, Vertical**

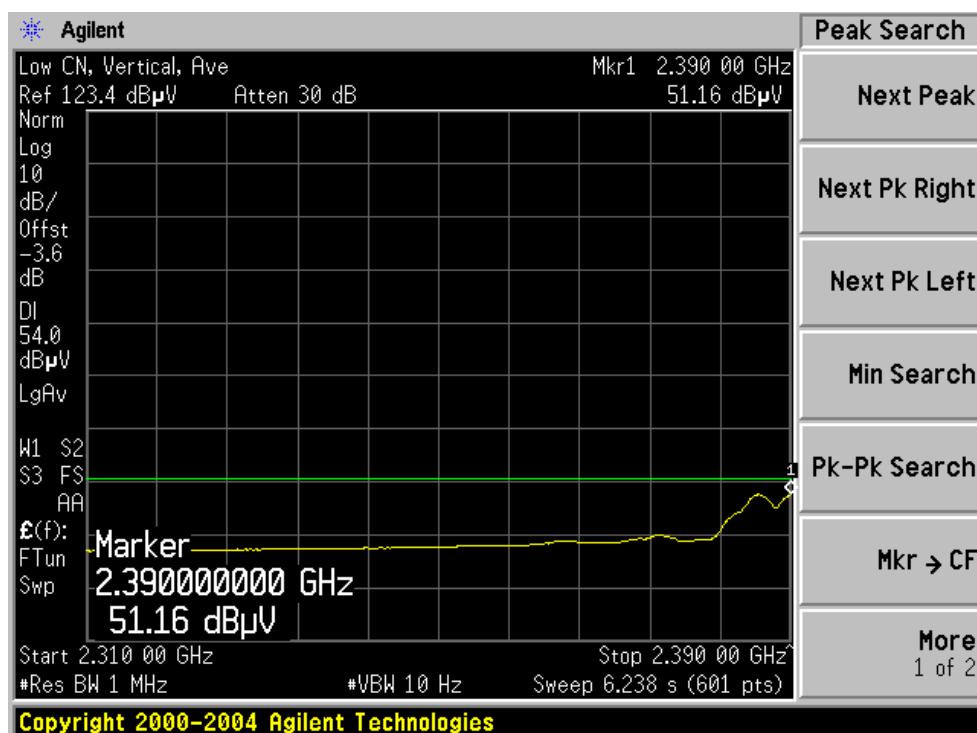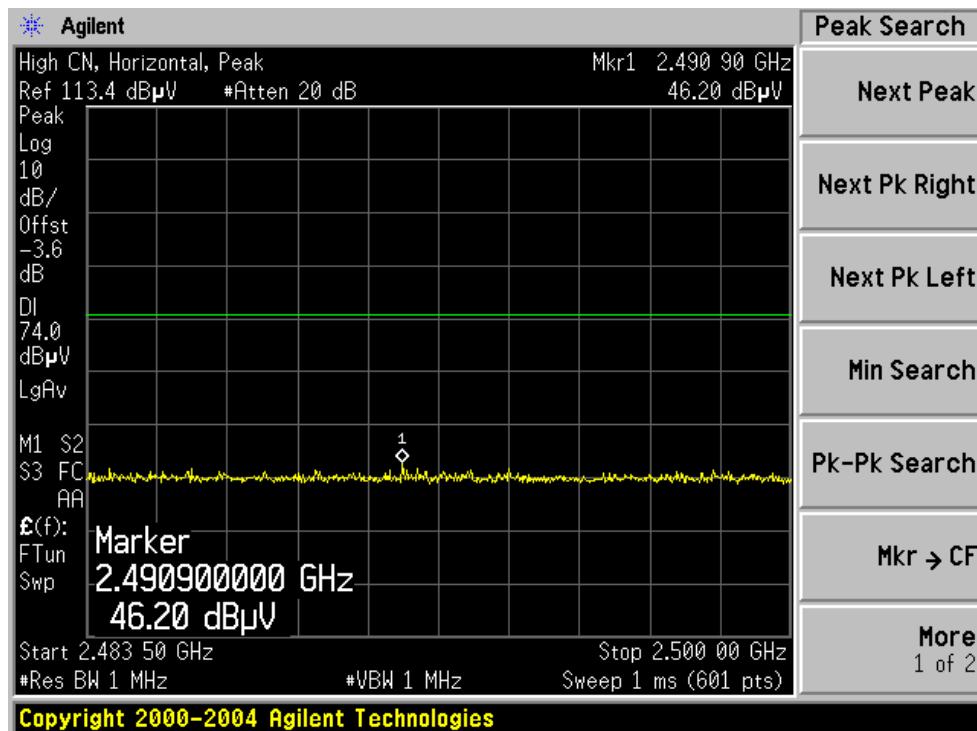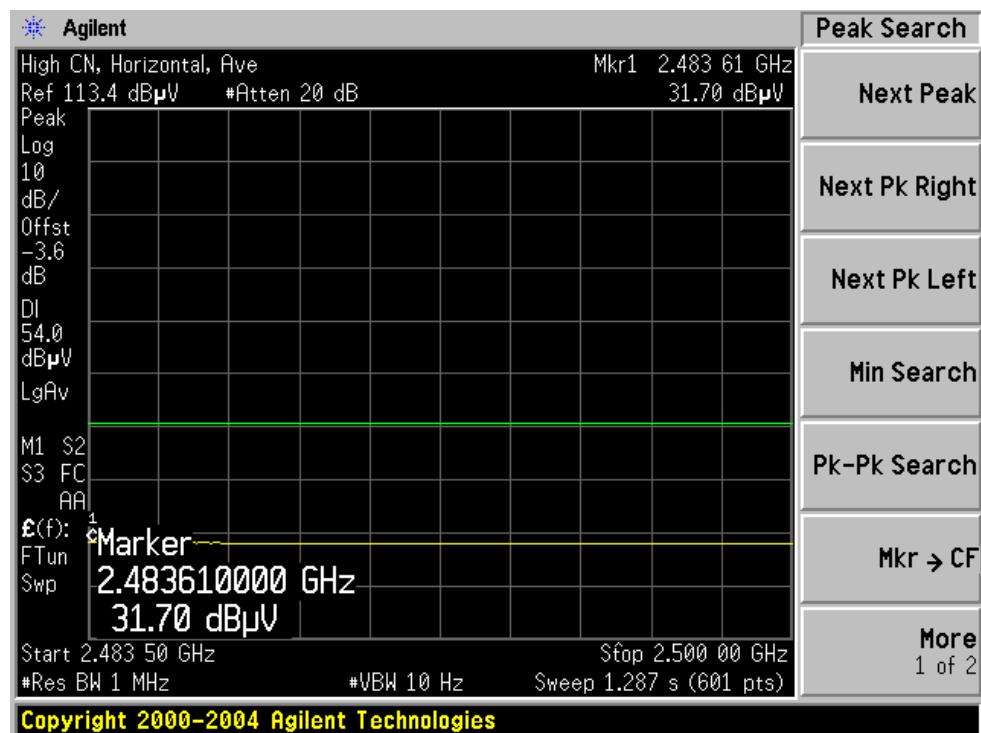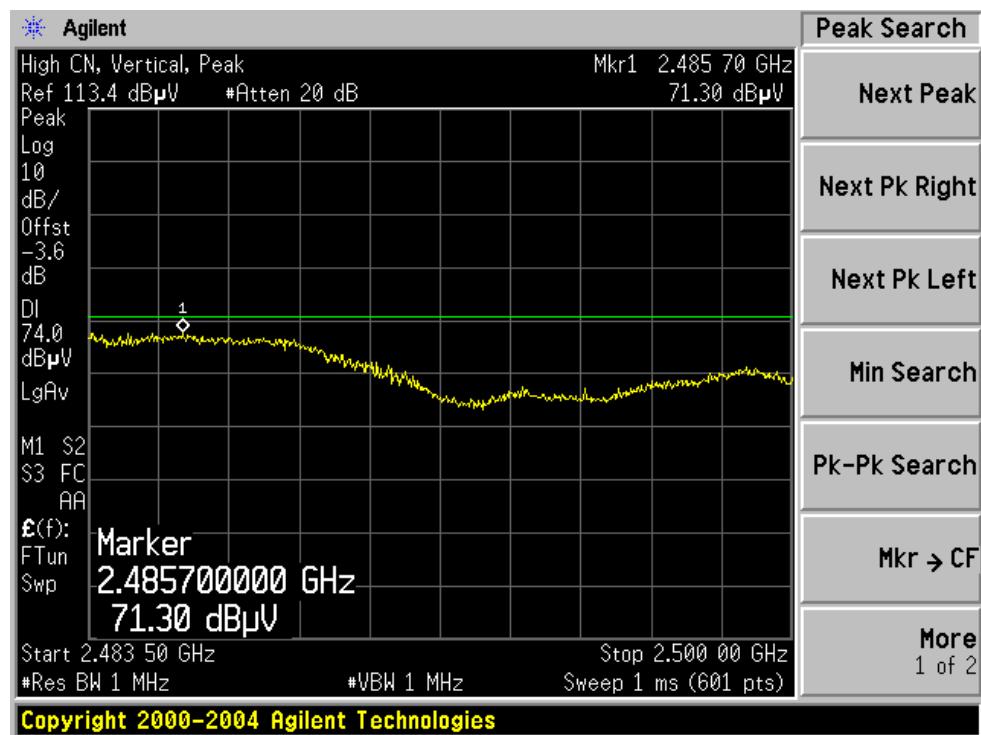Average, Vertical**High Channel****Peak, Horizontal**

Average, Horizontal**Peak, Vertical**

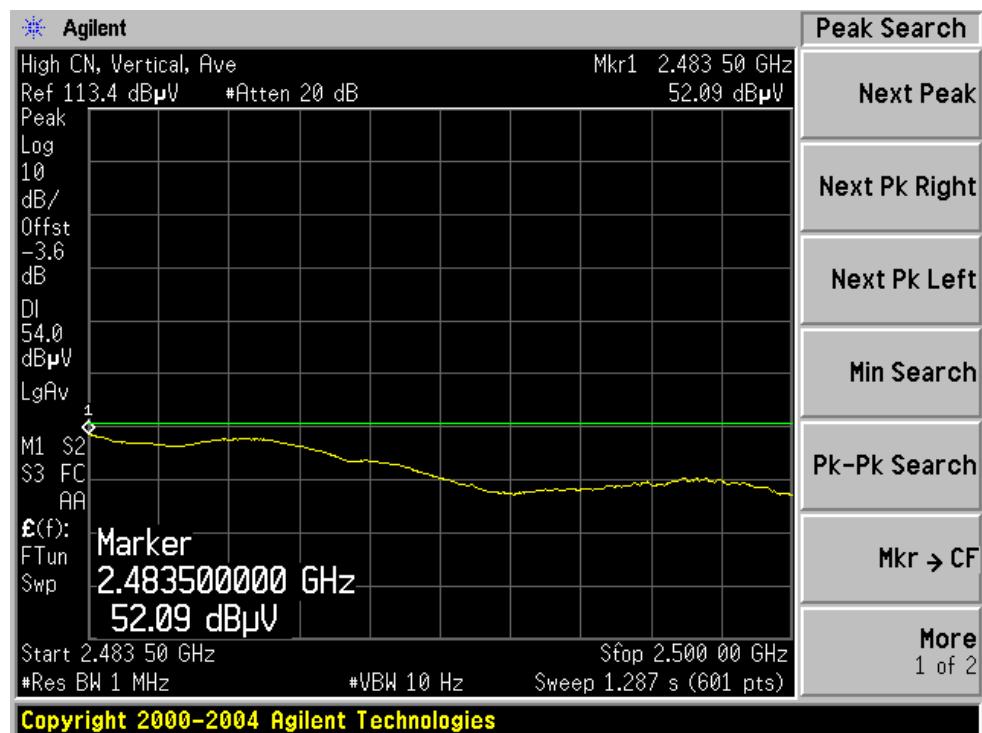Average, Vertical

Aggregate Antenna (9.0 dBi)

802.11b, 2412 - 2462 MHz, Measured at 3 meters, 1 GHz – 25 GHz

Direct

Low channel 2412 MHz

| Frequency (MHz) | Reading (dB μ V) | Azimuth Degrees | ANT. Height (m) | ANT. Polar. (H/V) | ANT. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. (dB) | Corrected Reading (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Comments |
|-----------------|----------------------|-----------------|-----------------|-------------------|--------------------|-----------------|---------------|----------------------------------|----------------------|-------------|-----------|
| 2412.00 | 121.3 | 220 | 1.5 | V | 28.2 | 4.4 | 36.2 | 117.7 | | | Fund/Peak |
| 2412.00 | 110.4 | 320 | 1.5 | H | 28.2 | 4.4 | 36.2 | 106.8 | | | Fund/Peak |
| 2412.00 | 109.7 | 220 | 1.8 | V | 28.2 | 4.4 | 36.2 | 106.1 | | | Ave |
| 2412.00 | 98.6 | 320 | 1.5 | H | 28.2 | 4.4 | 36.2 | 95.0 | | | Ave |
| 7236.00 | 30.4 | 90 | 2.0 | V | 37.6 | 12.3 | 36.9 | 43.4 | 54 | -10.6 | Ave |
| 7236.00 | 28.6 | 200 | 1.0 | H | 37.6 | 12.3 | 36.9 | 41.6 | 54 | -12.4 | Ave |
| 4824.00 | 34.9 | 260 | 1.2 | V | 32.1 | 6.0 | 34.4 | 38.6 | 54 | -15.4 | Ave |
| 7236.00 | 42.8 | 90 | 2.0 | V | 37.6 | 12.3 | 36.9 | 55.8 | 74 | -18.2 | Peak |
| 4824.00 | 30.7 | 180 | 2.3 | H | 32.1 | 6.0 | 34.4 | 34.4 | 54 | -19.6 | Ave |
| 4824.00 | 44.5 | 260 | 1.2 | V | 32.1 | 6.0 | 34.4 | 48.2 | 74 | -25.8 | Peak |
| 7236.00 | 30.5 | 200 | 1.0 | H | 37.6 | 12.3 | 36.9 | 43.5 | 74 | -30.5 | Peak |
| 4824.00 | 36.8 | 70 | 1.7 | H | 32.1 | 6.0 | 34.4 | 40.5 | 74 | -33.5 | Peak |

Middle channel 2437 MHz

| Frequency (MHz) | Reading (dB μ V) | Azimuth Degrees | ANT. Height (m) | ANT. Polar. (H/V) | ANT. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. (dB) | Corrected Reading (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Comments |
|-----------------|----------------------|-----------------|-----------------|-------------------|--------------------|-----------------|---------------|----------------------------------|----------------------|-------------|-----------|
| 2437.00 | 121.4 | 45 | 1.0 | V | 28.2 | 4.4 | 36.2 | 117.8 | | | Fund/Peak |
| 2437.00 | 106.9 | 45 | 1.2 | H | 28.2 | 4.4 | 36.2 | 103.3 | | | Fund/Peak |
| 2437.00 | 110.6 | 45 | 1.0 | V | 28.2 | 4.4 | 36.2 | 107.0 | | | Ave |
| 2437.00 | 95.3 | 45 | 1.2 | H | 28.2 | 4.4 | 36.2 | 91.7 | | | Ave |
| 7311.00 | 30.0 | 30 | 1.3 | V | 37.6 | 12.3 | 36.9 | 43.0 | 54 | -11.0 | Ave |
| 7311.00 | 27.7 | 180 | 1.0 | H | 37.6 | 12.3 | 36.9 | 40.7 | 54 | -13.3 | Ave |
| 4874.00 | 32.6 | 300 | 1.3 | V | 32.1 | 6.0 | 34.4 | 36.3 | 54 | -17.7 | Ave |
| 7311.00 | 40.5 | 30 | 1.3 | V | 37.6 | 12.3 | 36.9 | 53.5 | 74 | -20.5 | Peak |
| 4874.00 | 28.7 | 160 | 2.2 | H | 32.1 | 6.0 | 34.4 | 32.4 | 54 | -21.6 | Ave |
| 4874.00 | 43.1 | 300 | 1.3 | V | 32.1 | 6.0 | 34.4 | 46.8 | 74 | -27.2 | Peak |
| 7311.00 | 30.9 | 180 | 1.0 | H | 37.6 | 12.3 | 36.9 | 43.9 | 74 | -30.1 | Peak |
| 4874.00 | 34.4 | 160 | 2.2 | H | 32.1 | 6.0 | 34.4 | 38.1 | 74 | -35.9 | Peak |


High channel 2462 MHz



| Frequency (MHz) | Reading (dB μ V) | Azimuth Degrees | ANT. Height (m) | ANT. Polar. (H/V) | ANT. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. (dB) | Corrected Reading (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Comments |
|-----------------|----------------------|-----------------|-----------------|-------------------|--------------------|-----------------|---------------|----------------------------------|----------------------|-------------|-----------|
| 2462.00 | 120.4 | 40 | 1.3 | V | 28.2 | 4.4 | 36.2 | 116.8 | | | Fund/Peak |
| 2462.00 | 108.1 | 180 | 1.2 | H | 28.2 | 4.4 | 36.2 | 104.5 | | | Fund/Peak |
| 2462.00 | 110.2 | 40 | 1.3 | V | 28.2 | 4.4 | 36.2 | 106.6 | | | Ave |
| 2462.00 | 96.6 | 180 | 1.2 | H | 28.2 | 4.4 | 36.2 | 93.0 | | | Ave |
| 7386.00 | 30.2 | 270 | 2.4 | V | 37.6 | 12.3 | 36.9 | 43.2 | 54 | -10.8 | Ave |
| 7386.00 | 28.0 | 180 | 1.2 | H | 37.6 | 12.3 | 36.9 | 41.0 | 54 | -13.0 | Ave |
| 4924.00 | 36.1 | 60 | 2.0 | V | 32.1 | 6.0 | 34.4 | 39.8 | 54 | -14.2 | Ave |
| 7386.00 | 41.5 | 270 | 2.4 | V | 37.6 | 12.3 | 36.9 | 54.5 | 74 | -19.5 | Peak |
| 4924.00 | 29.3 | 90 | 2.1 | H | 32.1 | 6.0 | 34.4 | 33.0 | 54 | -21.0 | Ave |
| 4924.00 | 45.2 | 60 | 2.0 | V | 32.1 | 6.0 | 34.4 | 48.9 | 74 | -25.1 | Peak |
| 7386.00 | 33.6 | 180 | 1.2 | H | 37.6 | 12.3 | 36.9 | 46.6 | 74 | -27.4 | Peak |
| 4924.00 | 35.4 | 90 | 2.1 | H | 32.1 | 6.0 | 34.4 | 39.1 | 74 | -34.9 | Peak |



Restricted Band Edge

Low Channel

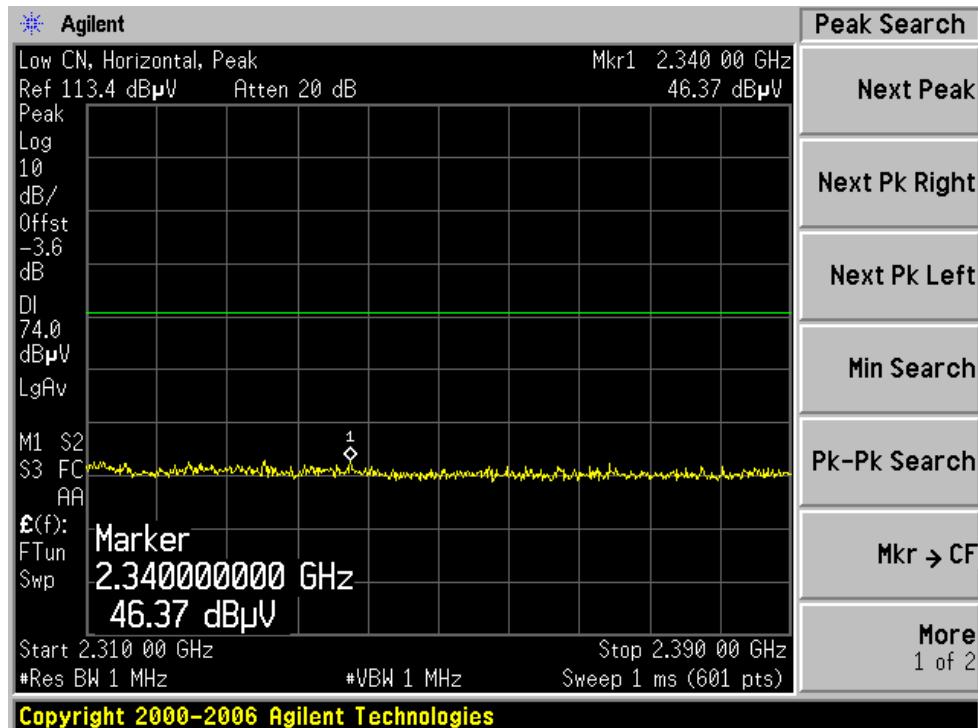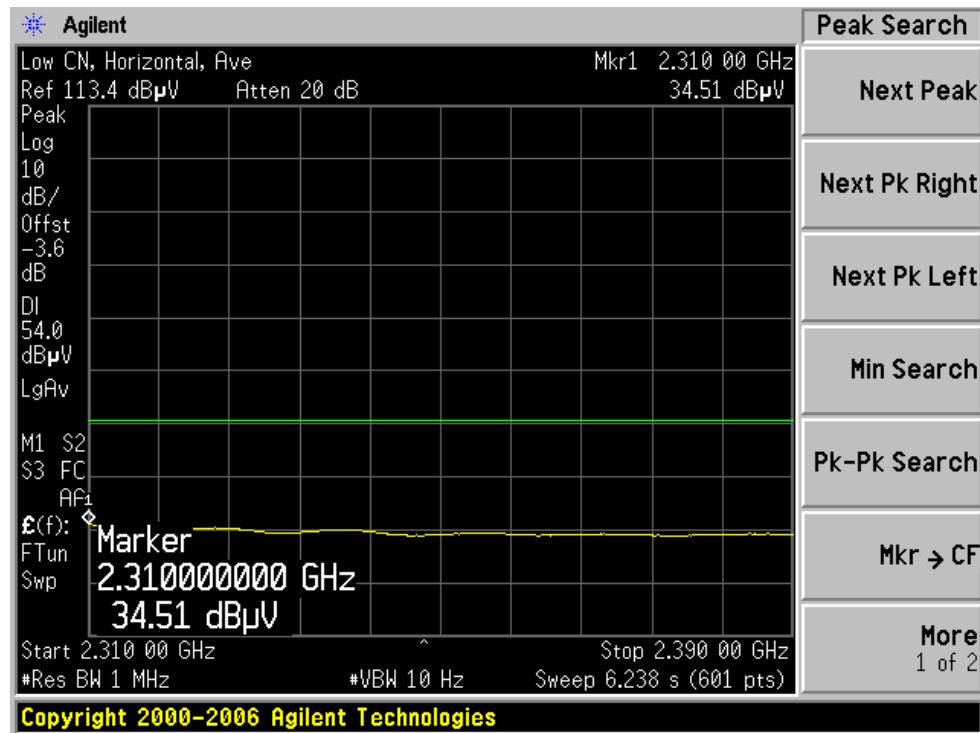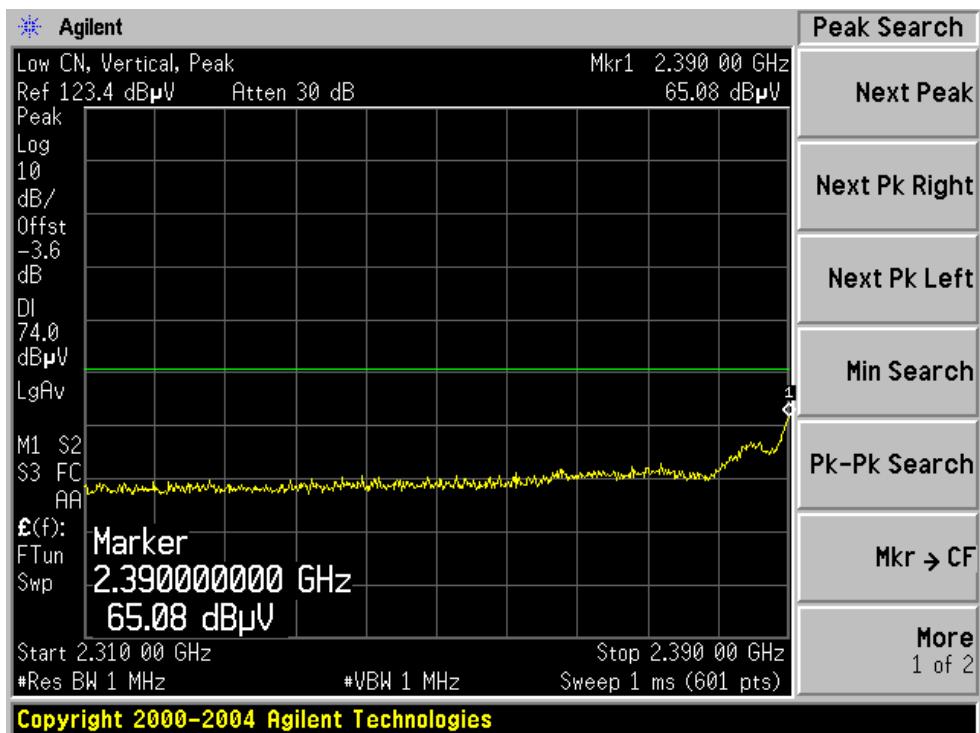
Peak, Horizontal




Average, Horizontal**Peak, Vertical**

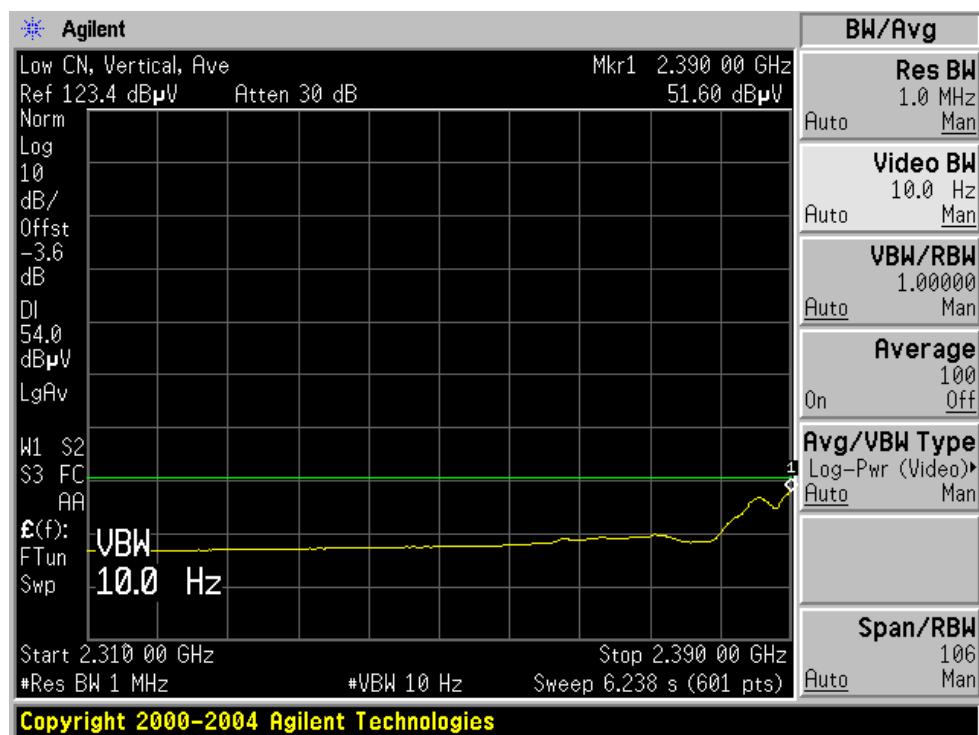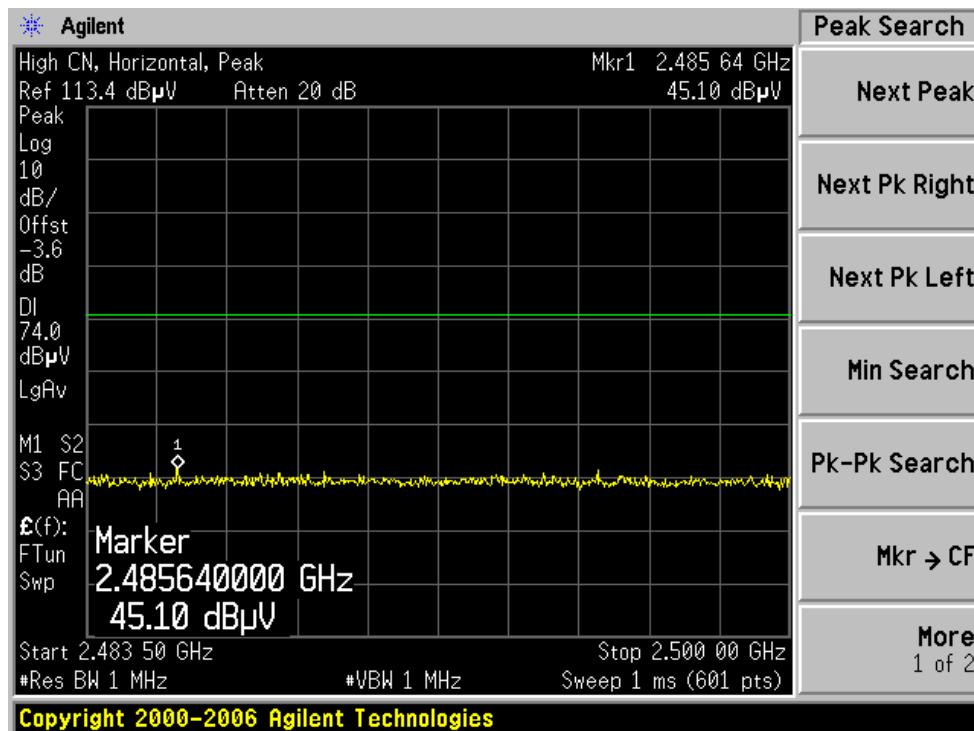
Average, Vertical**High Channel****Peak, Horizontal**

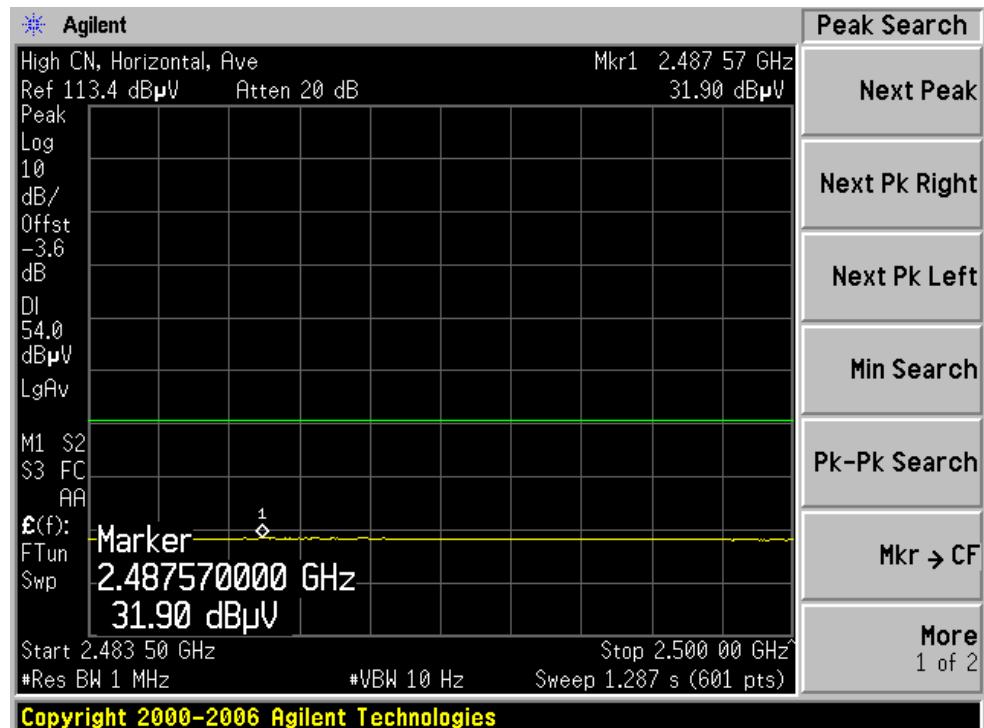Average, Horizontal



Peak, Vertical

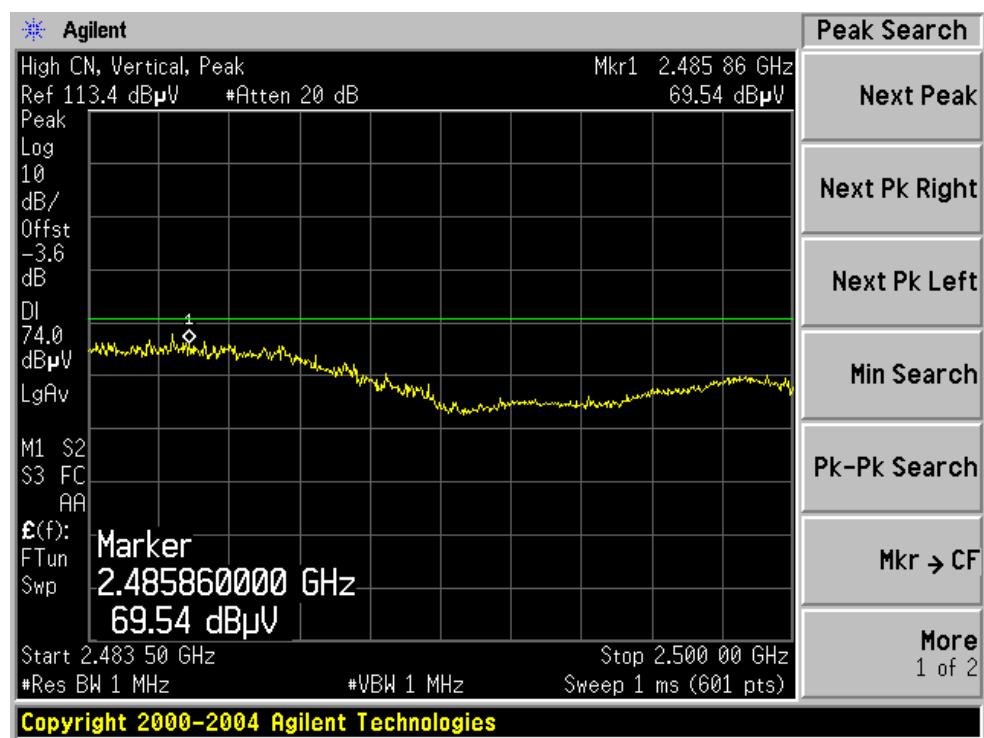

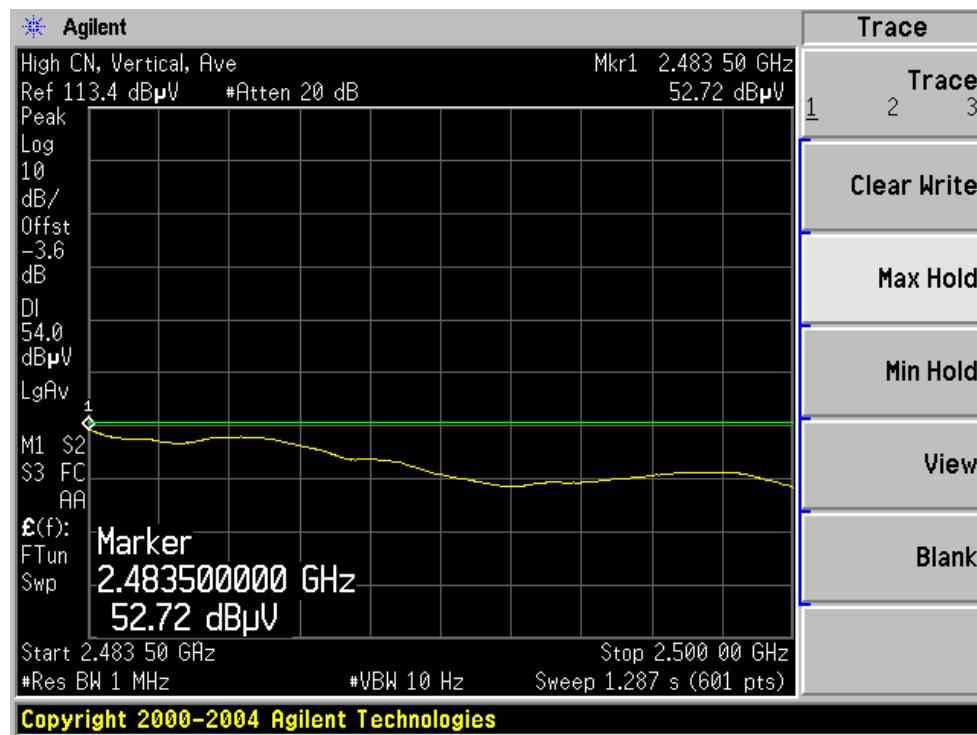Average, Vertical

Aggregate Antenna (9.0 dBi)

802.11g, 2412 - 2462 MHz, Measured at 3 meters, 1 GHz – 25 GHz

Omni

Low channel 2412 MHz

| Frequency (MHz) | Reading (dB μ V) | Azimuth Degrees | ANT. Height (m) | ANT. Polar. (H/V) | ANT. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. (dB) | Corrected Reading (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Comments |
|-----------------|----------------------|-----------------|-----------------|-------------------|--------------------|-----------------|---------------|----------------------------------|----------------------|-------------|-----------|
| 2412.00 | 116.5 | 220 | 1.5 | V | 28.2 | 4.4 | 36.2 | 112.9 | | | Fund/Peak |
| 2412.00 | 101.5 | 320 | 1.5 | H | 28.2 | 4.4 | 36.2 | 97.9 | | | Fund/Peak |
| 2412.00 | 102.5 | 220 | 1.8 | V | 28.2 | 4.4 | 36.2 | 98.9 | | | Ave |
| 2412.00 | 87.5 | 320 | 1.5 | H | 28.2 | 4.4 | 36.2 | 83.9 | | | Ave |
| 7236.00 | 28.7 | 90 | 2.0 | V | 37.6 | 12.3 | 36.9 | 41.7 | 54 | -12.3 | Ave |
| 7236.00 | 28.5 | 200 | 1.0 | H | 37.6 | 12.3 | 36.9 | 41.5 | 54 | -12.5 | Ave |
| 4824.00 | 30.5 | 260 | 1.2 | V | 32.1 | 6.0 | 34.4 | 34.2 | 54 | -19.8 | Ave |
| 7236.00 | 39.6 | 90 | 2.0 | V | 37.6 | 12.3 | 36.9 | 52.6 | 74 | -21.4 | Peak |
| 4824.00 | 28.4 | 180 | 2.3 | H | 32.1 | 6.0 | 34.4 | 32.1 | 54 | -21.9 | Ave |
| 4824.00 | 39.8 | 260 | 1.2 | V | 32.1 | 6.0 | 34.4 | 43.5 | 74 | -30.5 | Peak |
| 7236.00 | 30.3 | 200 | 1.0 | H | 37.6 | 12.3 | 36.9 | 43.3 | 74 | -30.7 | Peak |
| 4824.00 | 30.2 | 70 | 1.7 | H | 32.1 | 6.0 | 34.4 | 33.9 | 74 | -40.1 | Peak |

Middle channel 2437 MHz

| Frequency (MHz) | Reading (dB μ V) | Azimuth Degrees | ANT. Height (m) | ANT. Polar. (H/V) | ANT. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. (dB) | Corrected Reading (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Comments |
|-----------------|----------------------|-----------------|-----------------|-------------------|--------------------|-----------------|---------------|----------------------------------|----------------------|-------------|-----------|
| 2437.00 | 120.3 | 45 | 1.0 | V | 28.2 | 4.4 | 36.2 | 116.7 | | | Fund/Peak |
| 2437.00 | 103.8 | 45 | 1.2 | H | 28.2 | 4.4 | 36.2 | 100.2 | | | Fund/Peak |
| 2437.00 | 104.6 | 45 | 1.0 | V | 28.2 | 4.4 | 36.2 | 101.0 | | | Ave |
| 2437.00 | 91.2 | 45 | 1.2 | H | 28.2 | 4.4 | 36.2 | 87.6 | | | Ave |
| 7311.00 | 30.4 | 30 | 1.3 | V | 37.6 | 12.3 | 36.9 | 43.4 | 54 | -10.6 | Ave |
| 7311.00 | 27.3 | 180 | 1.0 | H | 37.6 | 12.3 | 36.9 | 40.3 | 54 | -13.7 | Ave |
| 4874.00 | 34.8 | 300 | 1.3 | V | 32.1 | 6.0 | 34.4 | 38.5 | 54 | -15.5 | Ave |
| 7311.00 | 42.7 | 30 | 1.3 | V | 37.6 | 12.3 | 36.9 | 55.7 | 74 | -18.3 | Peak |
| 4874.00 | 30.8 | 160 | 2.2 | H | 32.1 | 6.0 | 34.4 | 34.5 | 54 | -19.5 | Ave |
| 4874.00 | 46.7 | 300 | 1.3 | V | 32.1 | 6.0 | 34.4 | 50.4 | 74 | -23.6 | Peak |
| 7311.00 | 31.1 | 180 | 1.0 | H | 37.6 | 12.3 | 36.9 | 44.1 | 74 | -29.9 | Peak |
| 4874.00 | 39.2 | 160 | 2.2 | H | 32.1 | 6.0 | 34.4 | 42.9 | 74 | -31.1 | Peak |


High channel 2462 MHz



| Frequency (MHz) | Reading (dB μ V) | Azimuth Degrees | ANT. Height (m) | ANT. Polar. (H/V) | ANT. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. (dB) | Corrected Reading (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Comments |
|-----------------|----------------------|-----------------|-----------------|-------------------|--------------------|-----------------|---------------|----------------------------------|----------------------|-------------|-----------|
| 2462.00 | 116.9 | 40 | 1.3 | V | 28.2 | 4.4 | 36.2 | 113.3 | | | Fund/Peak |
| 2462.00 | 99.1 | 180 | 1.2 | H | 28.2 | 4.4 | 36.2 | 95.5 | | | Fund/Peak |
| 2462.00 | 103.2 | 40 | 1.3 | V | 28.2 | 4.4 | 36.2 | 99.6 | | | Ave |
| 2462.00 | 86.5 | 180 | 1.2 | H | 28.2 | 4.4 | 36.2 | 82.9 | | | Ave |
| 7386.00 | 28.5 | 270 | 2.4 | V | 37.6 | 12.3 | 36.9 | 41.5 | 54 | -12.5 | Ave |
| 7386.00 | 28.2 | 180 | 1.2 | H | 37.6 | 12.3 | 36.9 | 41.2 | 54 | -12.8 | Ave |
| 4924.00 | 30.5 | 60 | 2.0 | V | 32.1 | 6.0 | 34.4 | 34.2 | 54 | -19.8 | Ave |
| 7386.00 | 39.1 | 270 | 2.4 | V | 37.6 | 12.3 | 36.9 | 52.1 | 74 | -21.9 | Peak |
| 4924.00 | 28.2 | 90 | 2.1 | H | 32.1 | 6.0 | 34.4 | 31.9 | 54 | -22.1 | Ave |
| 4924.00 | 39.5 | 60 | 2.0 | V | 32.1 | 6.0 | 34.4 | 43.2 | 74 | -30.8 | Peak |
| 7386.00 | 30.1 | 180 | 1.2 | H | 37.6 | 12.3 | 36.9 | 43.1 | 74 | -30.9 | Peak |
| 4924.00 | 30.0 | 90 | 2.1 | H | 32.1 | 6.0 | 34.4 | 33.7 | 74 | -40.3 | Peak |



Restricted Band Edge



Low Channel

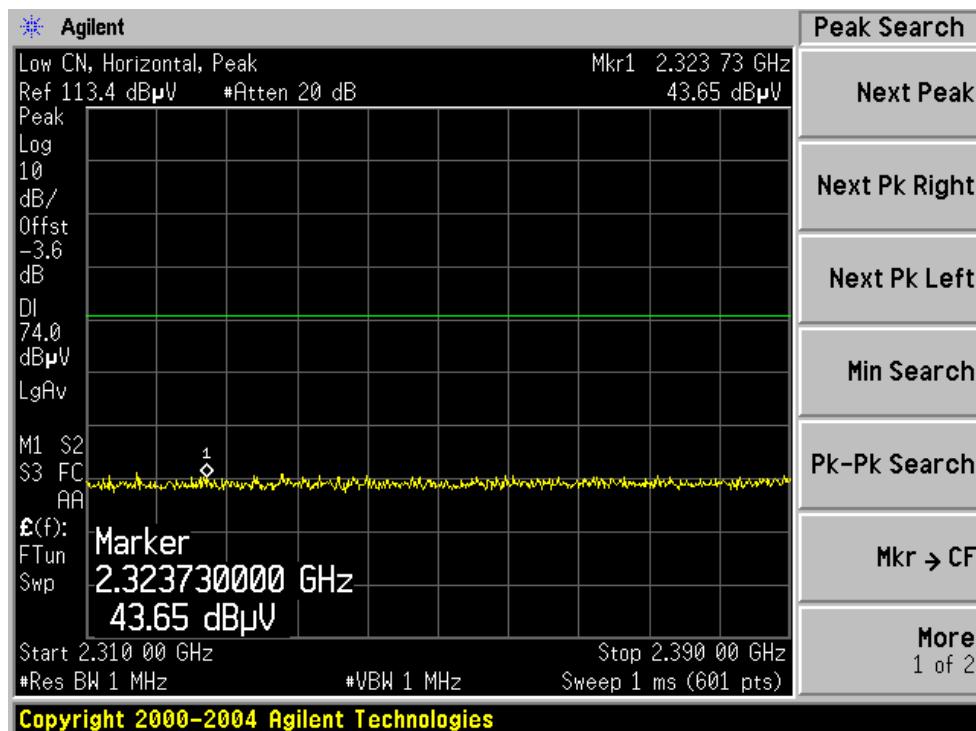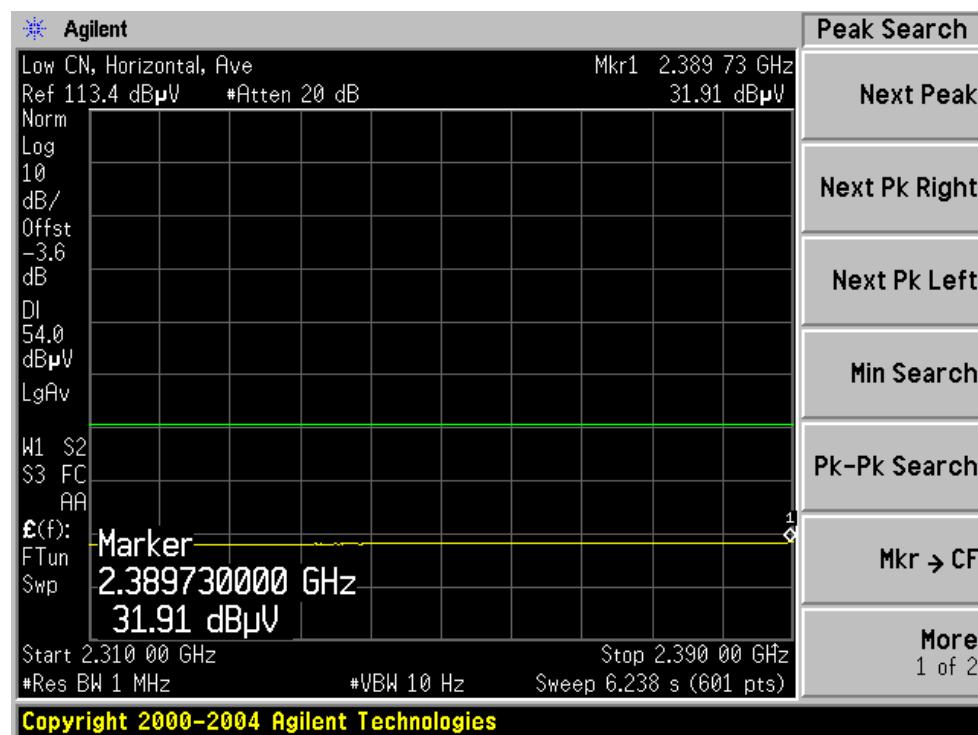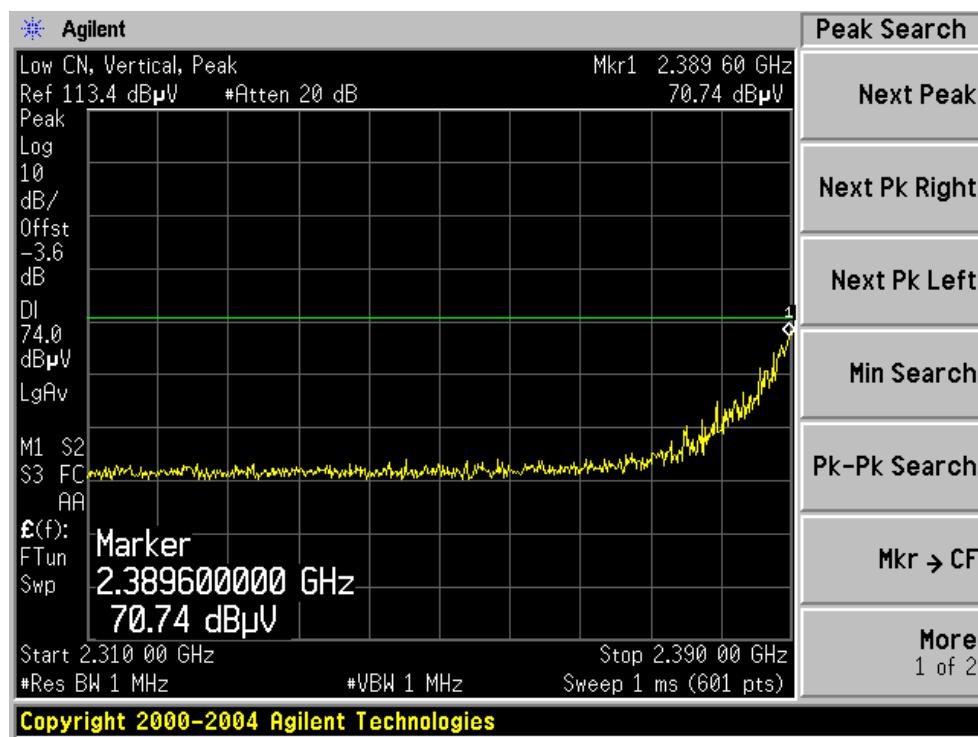
Peak, Horizontal



Average, Horizontal**Peak, Vertical**

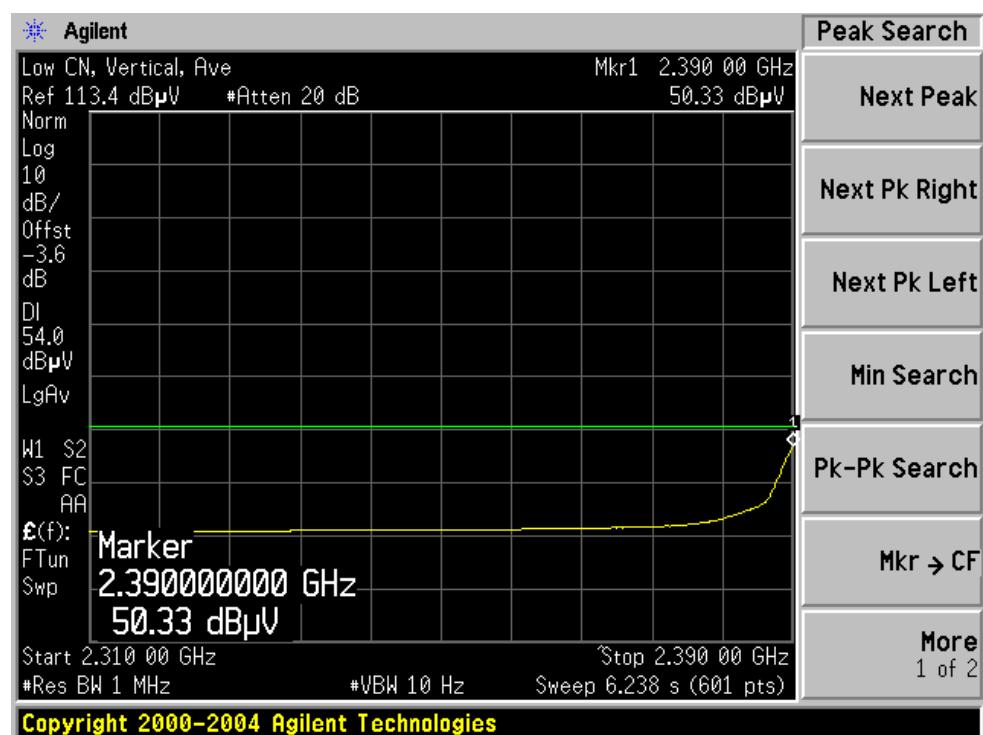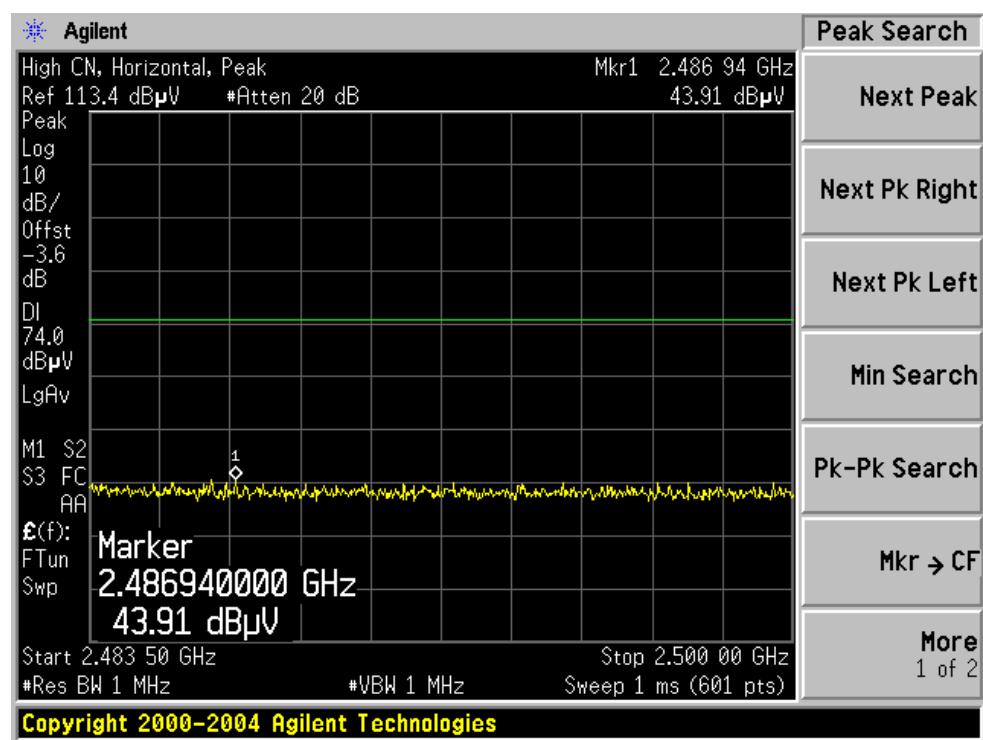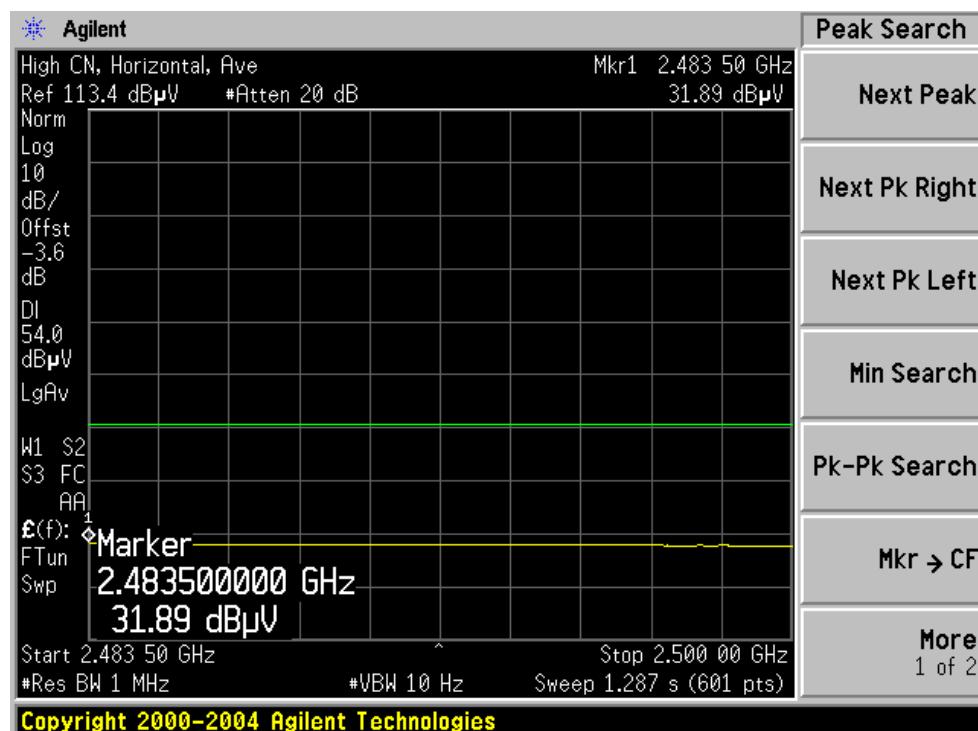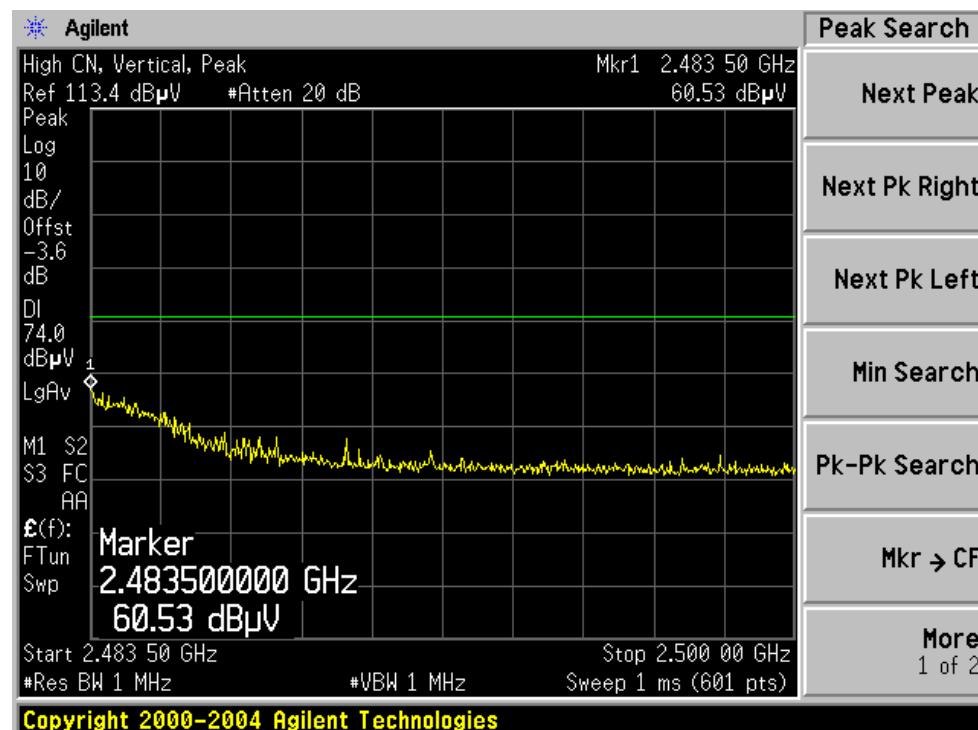Average, Vertical**High Channel****Peak, Horizontal**

Average, Horizontal**Peak, Vertical**

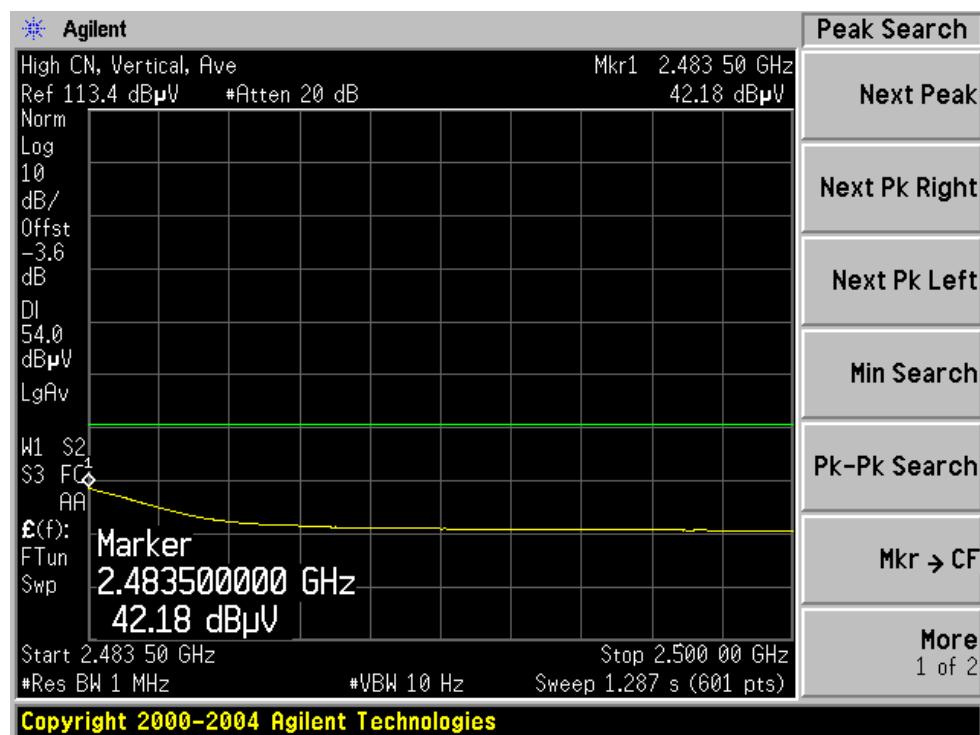Average, Vertical

Aggregate Antenna (9.0 dBi)

802.11g, 2412 - 2462 MHz, Measured at 3 meters, 1 GHz – 25 GHz

Direct

Low channel 2412 MHz

| Frequency (MHz) | Reading (dB μ V) | Azimuth Degrees | ANT. Height (m) | ANT. Polar. (H/V) | ANT. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. (dB) | Corrected Reading (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Comments |
|-----------------|----------------------|-----------------|-----------------|-------------------|--------------------|-----------------|---------------|----------------------------------|----------------------|-------------|-----------|
| 2412.00 | 116.1 | 220 | 1.5 | V | 28.2 | 4.4 | 36.2 | 112.5 | | | Fund/Peak |
| 2412.00 | 100.3 | 320 | 1.5 | H | 28.2 | 4.4 | 36.2 | 96.7 | | | Fund/Peak |
| 2412.00 | 101.2 | 220 | 1.8 | V | 28.2 | 4.4 | 36.2 | 97.6 | | | Ave |
| 2412.00 | 87.0 | 320 | 1.5 | H | 28.2 | 4.4 | 36.2 | 83.4 | | | Ave |
| 7236.00 | 28.5 | 90 | 2.0 | V | 37.6 | 12.3 | 36.9 | 41.5 | 54 | -12.5 | Ave |
| 7236.00 | 28.3 | 200 | 1.0 | H | 37.6 | 12.3 | 36.9 | 41.3 | 54 | -12.7 | Ave |
| 4824.00 | 31.0 | 260 | 1.2 | V | 32.1 | 6.0 | 34.4 | 34.7 | 54 | -19.3 | Ave |
| 7236.00 | 40.1 | 90 | 2.0 | V | 37.6 | 12.3 | 36.9 | 53.1 | 74 | -20.9 | Peak |
| 4824.00 | 28.6 | 180 | 2.3 | H | 32.1 | 6.0 | 34.4 | 32.3 | 54 | -21.7 | Ave |
| 4824.00 | 40.1 | 260 | 1.2 | V | 32.1 | 6.0 | 34.4 | 43.8 | 74 | -30.2 | Peak |
| 7236.00 | 30.5 | 200 | 1.0 | H | 37.6 | 12.3 | 36.9 | 43.5 | 74 | -30.5 | Peak |
| 4824.00 | 30.5 | 70 | 1.7 | H | 32.1 | 6.0 | 34.4 | 34.2 | 74 | -39.8 | Peak |

Middle channel 2437 MHz

| Frequency (MHz) | Reading (dB μ V) | Azimuth Degrees | ANT. Height (m) | ANT. Polar. (H/V) | ANT. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. (dB) | Corrected Reading (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Comments |
|-----------------|----------------------|-----------------|-----------------|-------------------|--------------------|-----------------|---------------|----------------------------------|----------------------|-------------|-----------|
| 2437.00 | 120.1 | 45 | 1.0 | V | 28.2 | 4.4 | 36.2 | 116.5 | | | Fund/Peak |
| 2437.00 | 103.4 | 45 | 1.2 | H | 28.2 | 4.4 | 36.2 | 99.8 | | | Fund/Peak |
| 2437.00 | 104.8 | 45 | 1.0 | V | 28.2 | 4.4 | 36.2 | 101.2 | | | Ave |
| 2437.00 | 91.5 | 45 | 1.2 | H | 28.2 | 4.4 | 36.2 | 87.9 | | | Ave |
| 7311.00 | 30.6 | 30 | 1.3 | V | 37.6 | 12.3 | 36.9 | 43.6 | 54 | -10.4 | Ave |
| 7311.00 | 28.0 | 180 | 1.0 | H | 37.6 | 12.3 | 36.9 | 41.0 | 54 | -13.0 | Ave |
| 4874.00 | 35.1 | 300 | 1.3 | V | 32.1 | 6.0 | 34.4 | 38.8 | 54 | -15.2 | Ave |
| 7311.00 | 43.1 | 30 | 1.3 | V | 37.6 | 12.3 | 36.9 | 56.1 | 74 | -17.9 | Peak |
| 4874.00 | 30.6 | 160 | 2.2 | H | 32.1 | 6.0 | 34.4 | 34.3 | 54 | -19.7 | Ave |
| 4874.00 | 46.3 | 300 | 1.3 | V | 32.1 | 6.0 | 34.4 | 50.0 | 74 | -24.0 | Peak |
| 7311.00 | 31.3 | 180 | 1.0 | H | 37.6 | 12.3 | 36.9 | 44.3 | 74 | -29.7 | Peak |
| 4874.00 | 39.7 | 160 | 2.2 | H | 32.1 | 6.0 | 34.4 | 43.4 | 74 | -30.6 | Peak |


High channel 2462 MHz



| Frequency (MHz) | Reading (dB μ V) | Azimuth Degrees | ANT. Height (m) | ANT. Polar. (H/V) | ANT. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. (dB) | Corrected Reading (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Comments |
|-----------------|----------------------|-----------------|-----------------|-------------------|--------------------|-----------------|---------------|----------------------------------|----------------------|-------------|-----------|
| 2462.00 | 115.8 | 40 | 1.3 | V | 28.2 | 4.4 | 36.2 | 112.2 | | | Fund/Peak |
| 2462.00 | 98.6 | 180 | 1.2 | H | 28.2 | 4.4 | 36.2 | 95.0 | | | Fund/Peak |
| 2462.00 | 102.1 | 40 | 1.3 | V | 28.2 | 4.4 | 36.2 | 98.5 | | | Ave |
| 2462.00 | 86.1 | 180 | 1.2 | H | 28.2 | 4.4 | 36.2 | 82.5 | | | Ave |
| 7386.00 | 28.8 | 270 | 2.4 | V | 37.6 | 12.3 | 36.9 | 41.8 | 54 | -12.2 | Ave |
| 7386.00 | 28.4 | 180 | 1.2 | H | 37.6 | 12.3 | 36.9 | 41.4 | 54 | -12.6 | Ave |
| 4924.00 | 30.8 | 60 | 2.0 | V | 32.1 | 6.0 | 34.4 | 34.5 | 54 | -19.5 | Ave |
| 4924.00 | 29.1 | 90 | 2.1 | H | 32.1 | 6.0 | 34.4 | 32.8 | 54 | -21.2 | Ave |
| 7386.00 | 39.4 | 270 | 2.4 | V | 37.6 | 12.3 | 36.9 | 52.4 | 74 | -21.6 | Peak |
| 4924.00 | 40.0 | 60 | 2.0 | V | 32.1 | 6.0 | 34.4 | 43.7 | 74 | -30.3 | Peak |
| 7386.00 | 30.5 | 180 | 1.2 | H | 37.6 | 12.3 | 36.9 | 43.5 | 74 | -30.5 | Peak |
| 4924.00 | 30.3 | 90 | 2.1 | H | 32.1 | 6.0 | 34.4 | 34.0 | 74 | -40.0 | Peak |



Restricted Band Edge



Low Channel

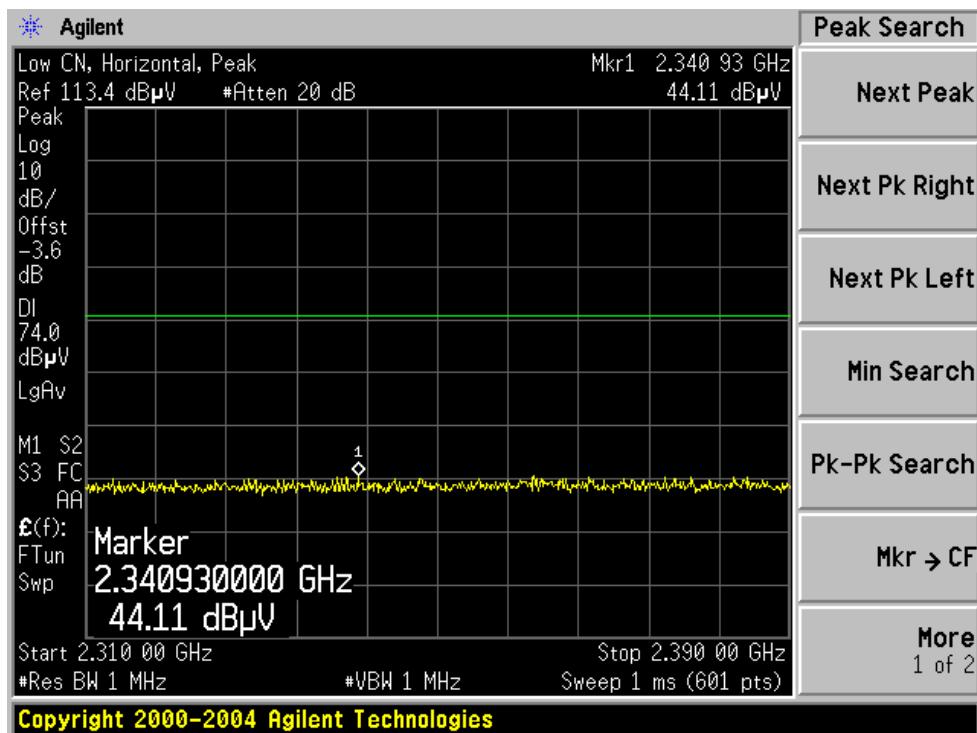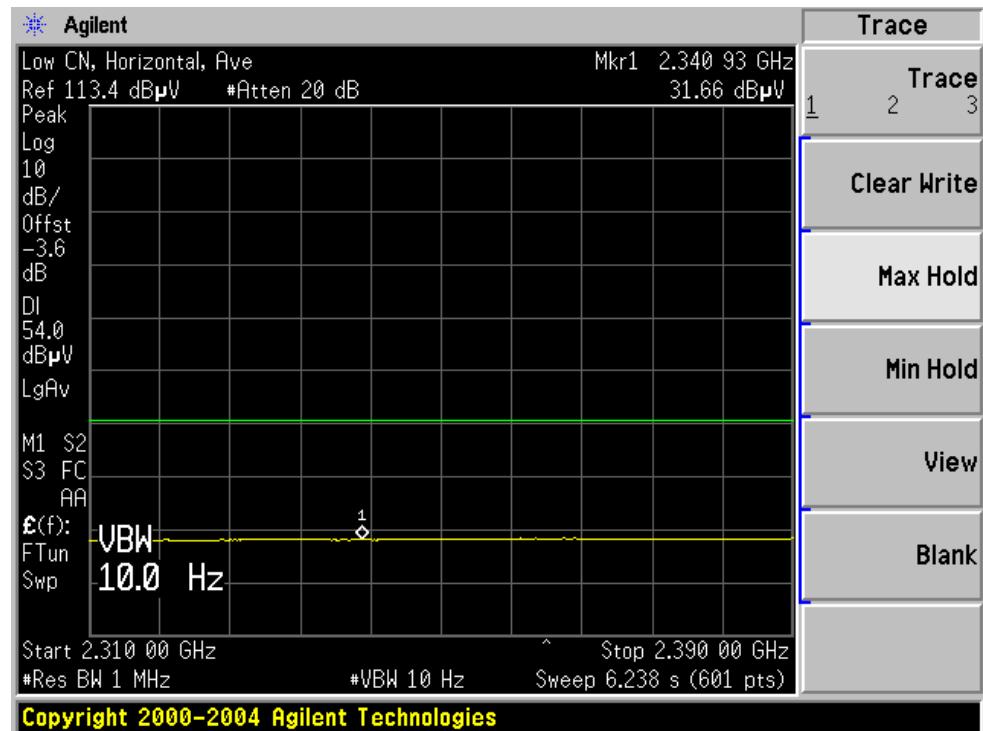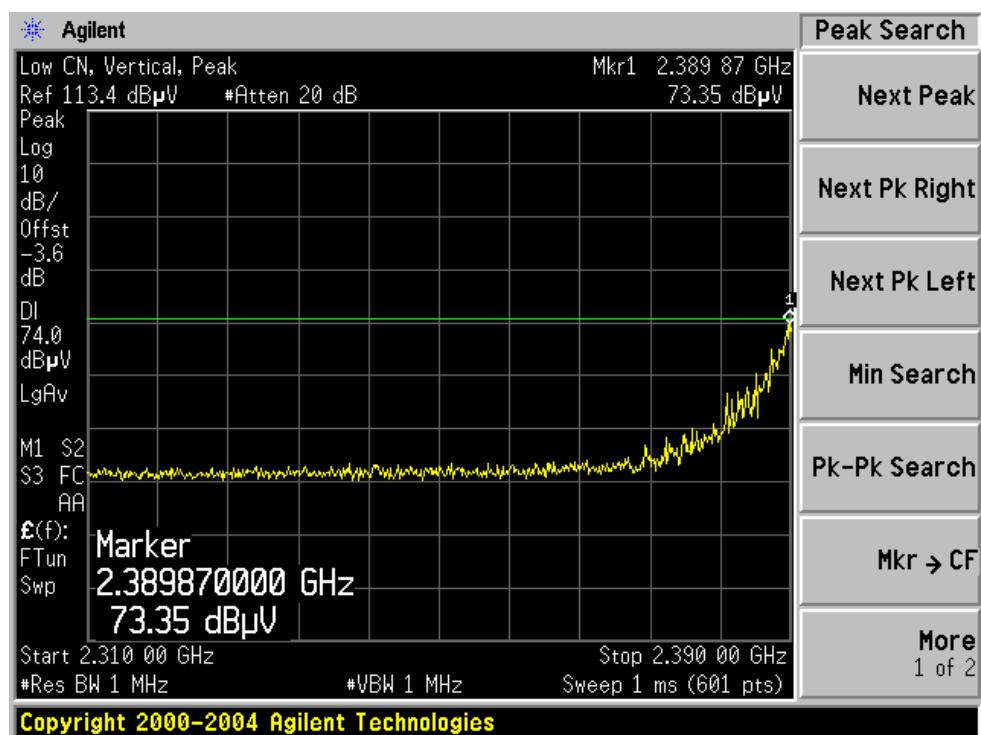
Peak, Horizontal



Average, Horizontal**Peak, Vertical**

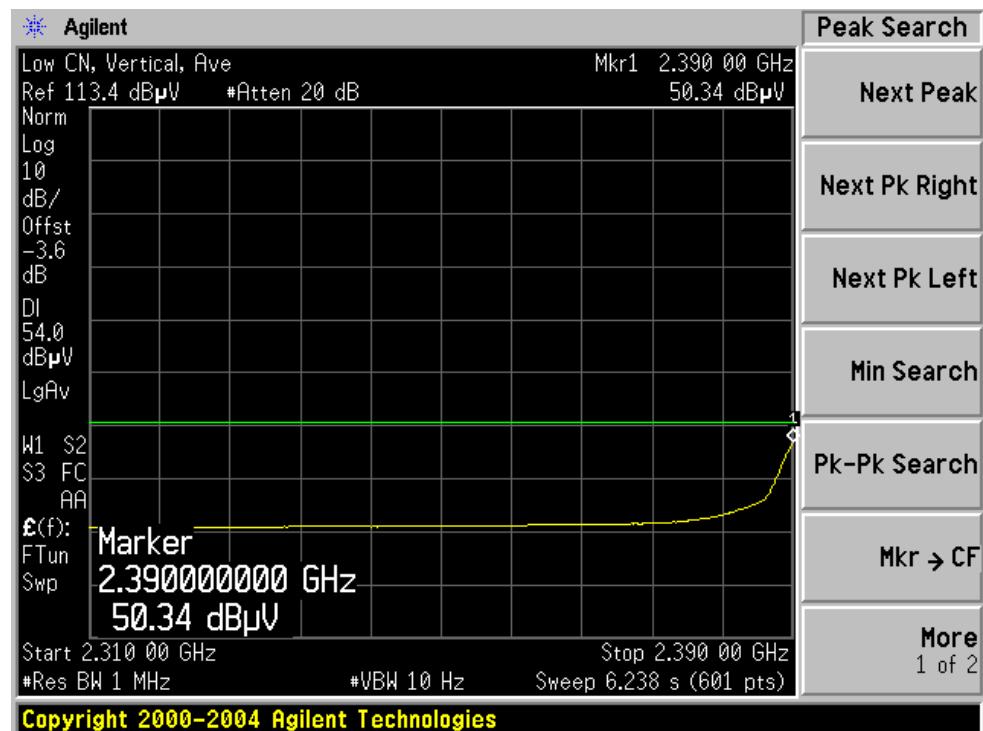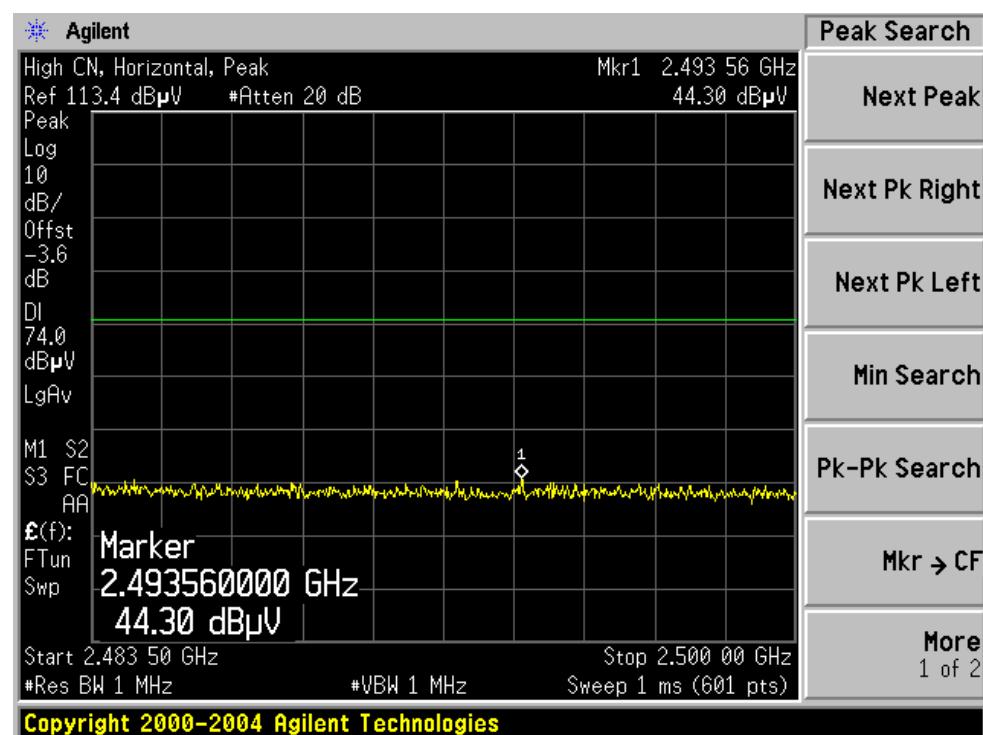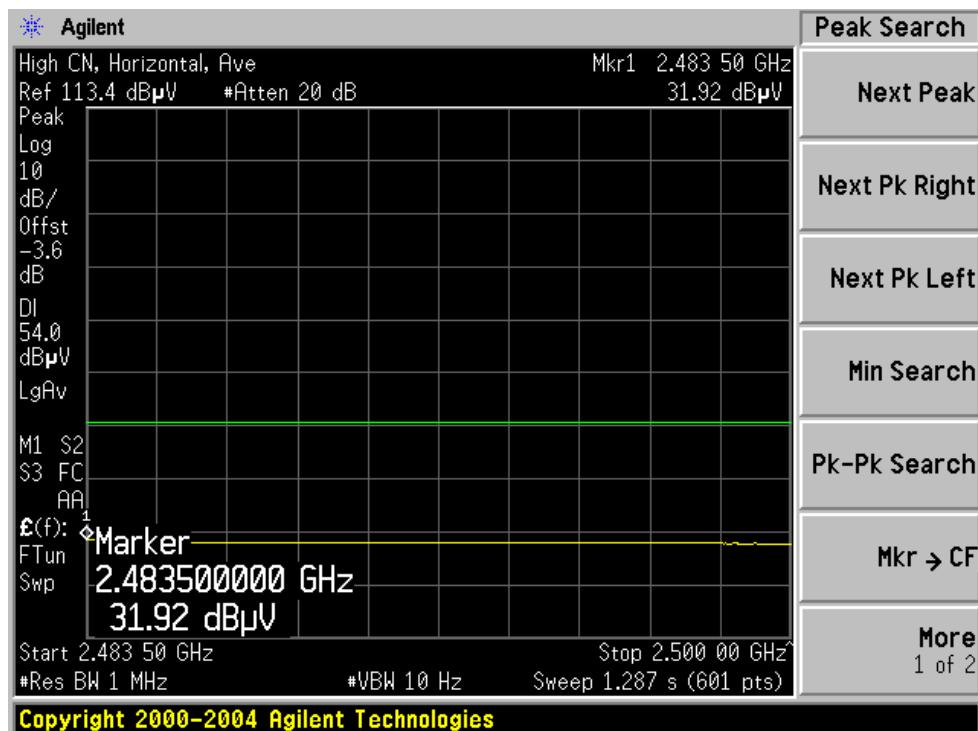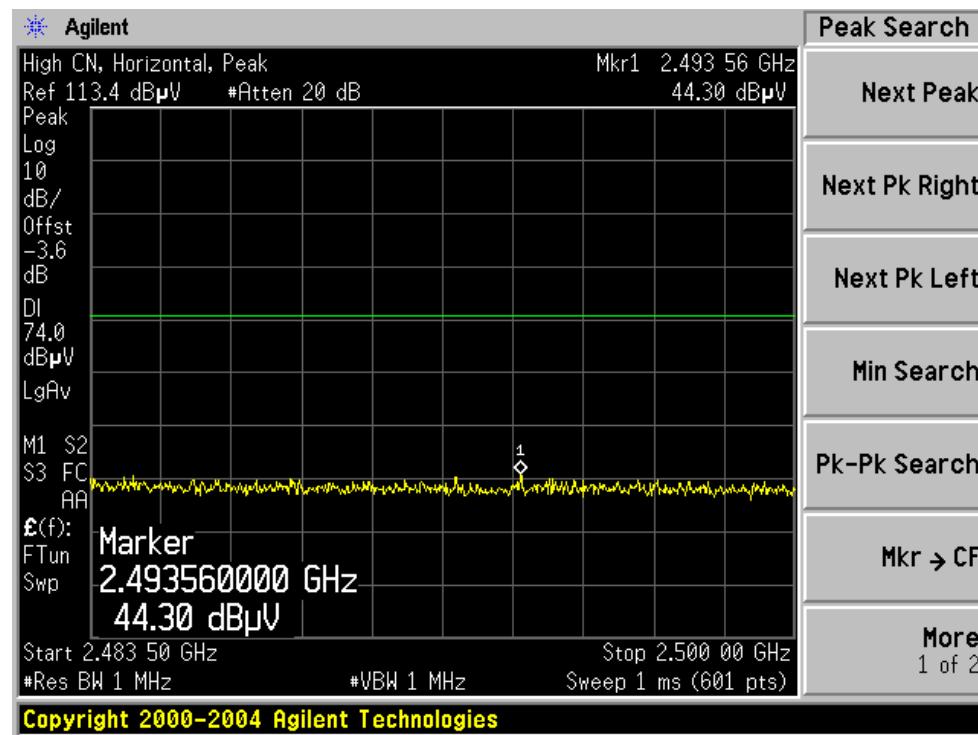Average, Vertical**High Channel****Peak, Horizontal**

Average, Horizontal**Peak, Vertical**

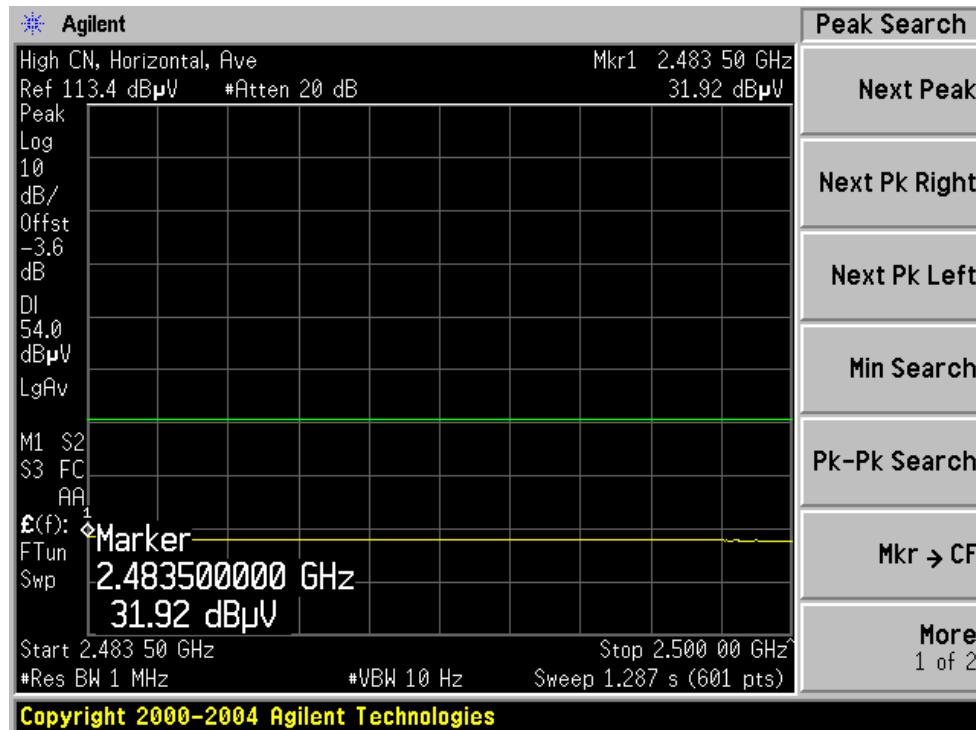Average, Vertical

9 FCC §15.247(a) (2), RSS-210 § A8.2 (a) – 6 dB BANDWIDTH & OCCUPIED BANDWIDTH

9.1 Applicable Standard

According to §15.247(a) (2), RSS-210 §A8.2 systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emissions bandwidth. (6 dB bandwidth for DTS)
4. Repeat above procedures until all frequencies measured were complete.

9.3 Equipment List

| Manufacturer | Description | Model | Serial Number | Calibration Date |
|--------------|-------------------|--------|---------------|------------------|
| Agilent | Spectrum Analyzer | E4446A | US44300386 | 2007-04-26 |

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

9.4 Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 27 °C |
| Relative Humidity: | 40 % |
| ATM Pressure: | 102.0 kPa |

*The testing was performed by Choon-Sian Ooi from 2007-10-23.

9.5 Summary of Test Results

802.11b

Omni

| Channel | Frequency (MHz) | 6 dB BW (MHz) | Limit (kHz) | Result |
|---------|-----------------|---------------|-------------|-----------|
| Low | 2412 | 11.615 | >500 | Compliant |
| Middle | 2437 | 12.118 | >500 | Compliant |
| High | 2462 | 11.123 | >500 | Compliant |

| Channel | Frequency (MHz) | 99% Occupied BW (MHz) |
|---------|-----------------|-----------------------|
| Low | 2412 | 15.195 |
| Middle | 2437 | 15.453 |
| High | 2462 | 15.273 |

802.11b

Direct

| Channel | Frequency (MHz) | 6 dB BW (MHz) | Limit (kHz) | Result |
|---------|-----------------|---------------|-------------|-----------|
| Low | 2412 | 12.558 | >500 | Compliant |
| Middle | 2437 | 11.873 | >500 | Compliant |
| High | 2462 | 11.675 | >500 | Compliant |

| Channel | Frequency (MHz) | 99% Occupied BW (MHz) |
|---------|-----------------|-----------------------|
| Low | 2412 | 15.324 |
| Middle | 2437 | 15.450 |
| High | 2462 | 15.245 |

802.11g

Omni

| Channel | Frequency (MHz) | 6 dB BW (MHz) | Limit (kHz) | Result |
|---------|-----------------|---------------|-------------|-----------|
| Low | 2412 | 16.552 | >500 | Compliant |
| Middle | 2437 | 16.550 | >500 | Compliant |
| High | 2462 | 16.483 | >500 | Compliant |

| Channel | Frequency (MHz) | 99% Occupied BW (MHz) |
|---------|-----------------|-----------------------|
| Low | 2412 | 16.470 |
| Middle | 2437 | 16.495 |
| High | 2462 | 16.454 |

802.11g

Direct

| Channel | Frequency (MHz) | 6 dB BW (MHz) | Limit (kHz) | Result |
|---------|-----------------|---------------|-------------|-----------|
| Low | 2412 | 16.552 | >500 | Compliant |
| Middle | 2437 | 16.565 | >500 | Compliant |
| High | 2462 | 16.525 | >500 | Compliant |


| Channel | Frequency (MHz) | 99% Occupied BW (MHz) |
|---------|-----------------|-----------------------|
| Low | 2412 | 16.466 |
| Middle | 2437 | 16.507 |
| High | 2462 | 16.462 |

Please refer to the following plots for detailed test results


802.11b



Omni

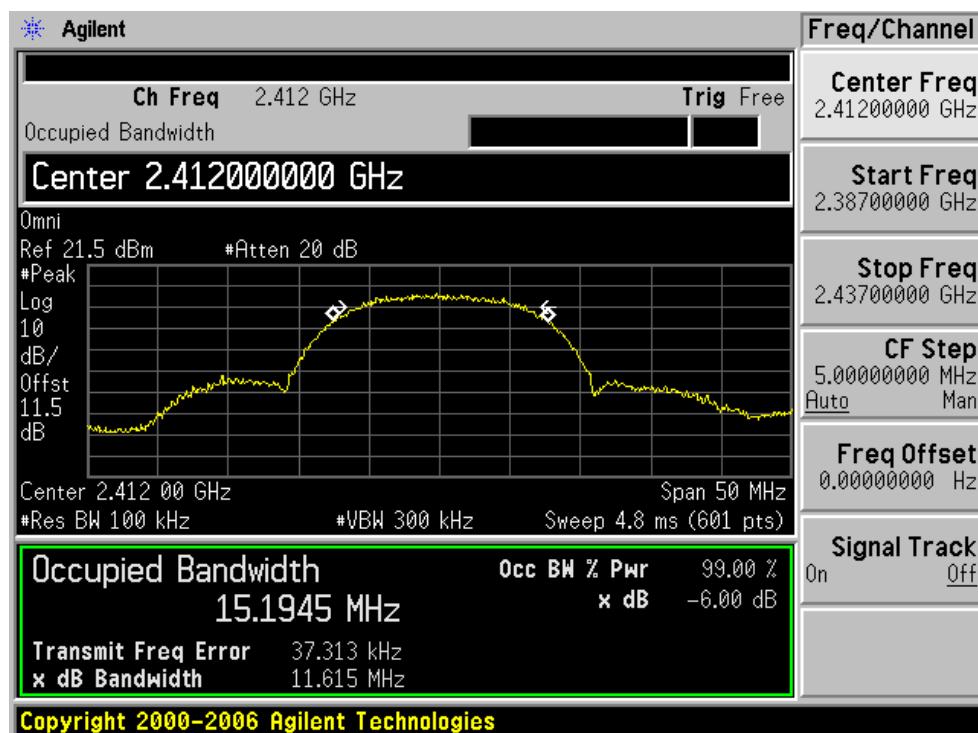Low Channel




Mid Channel

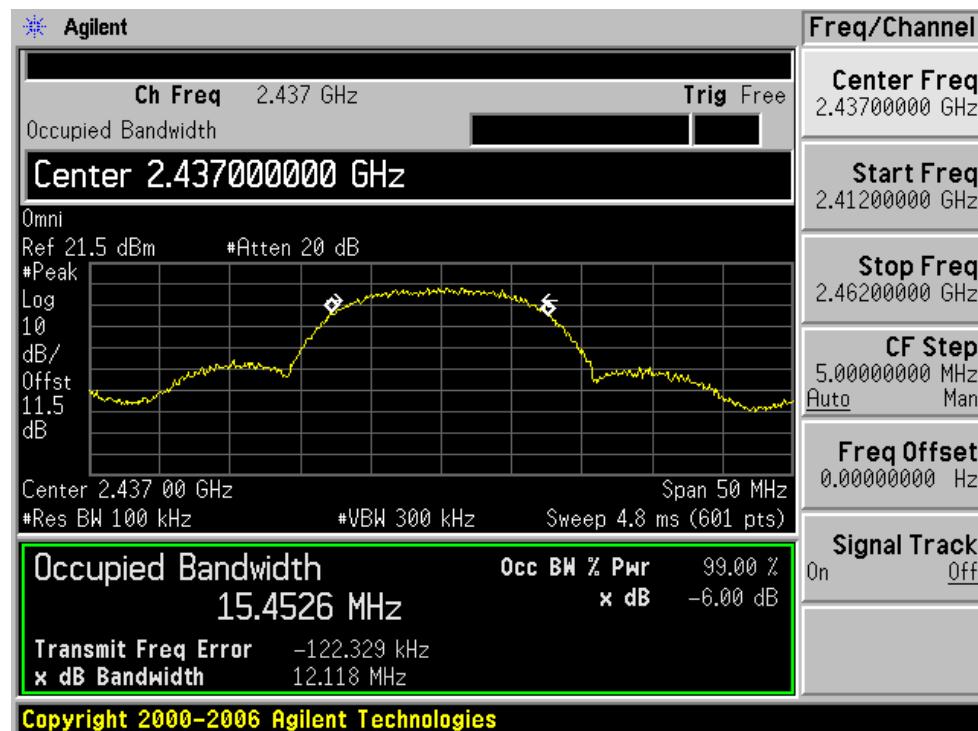


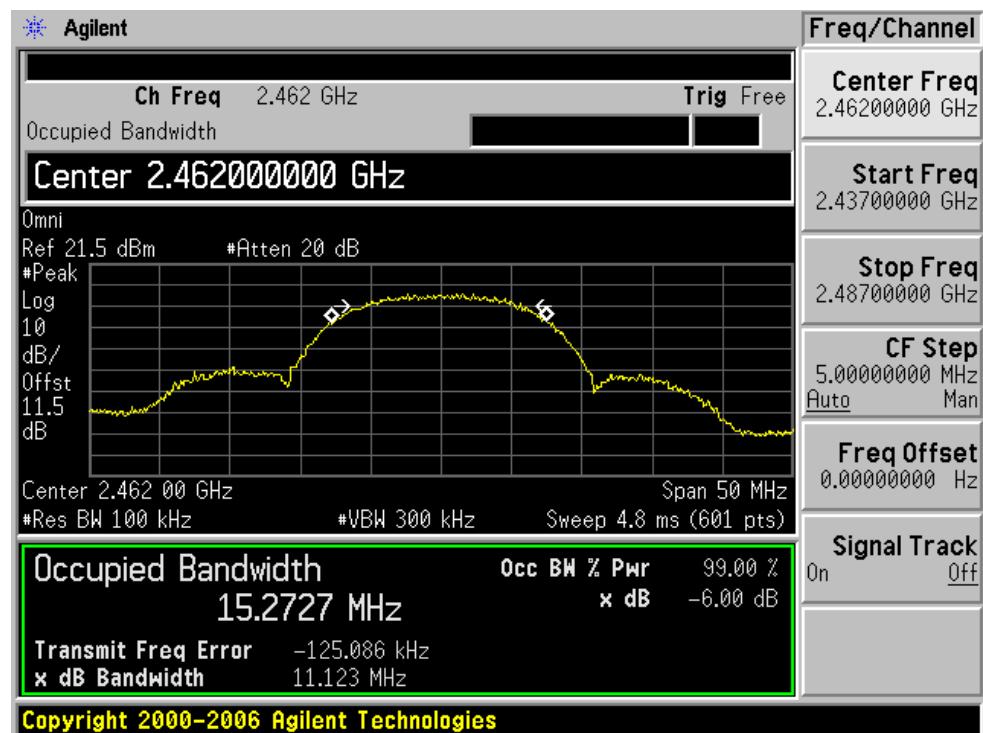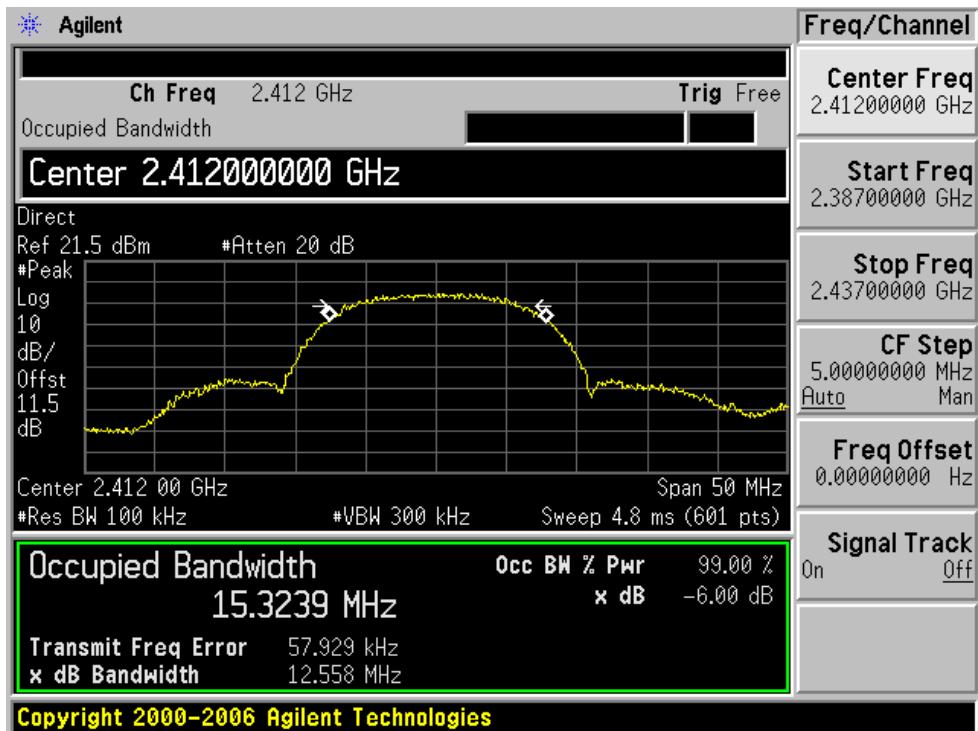High Channel**802.11b****Direct****Low Channel**

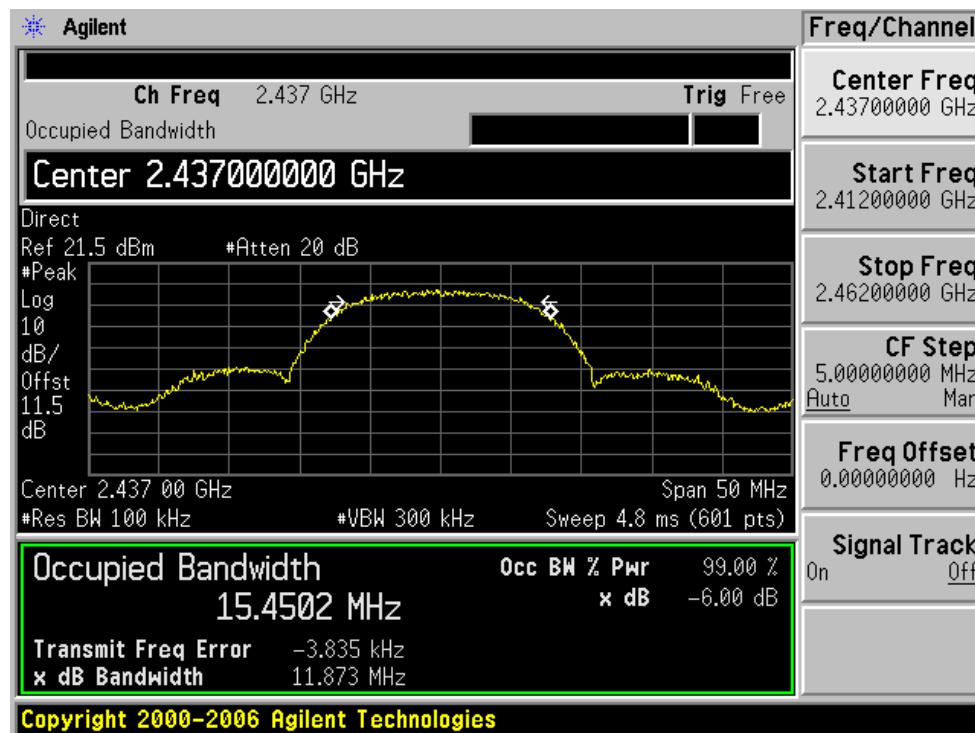Mid Channel




High Channel

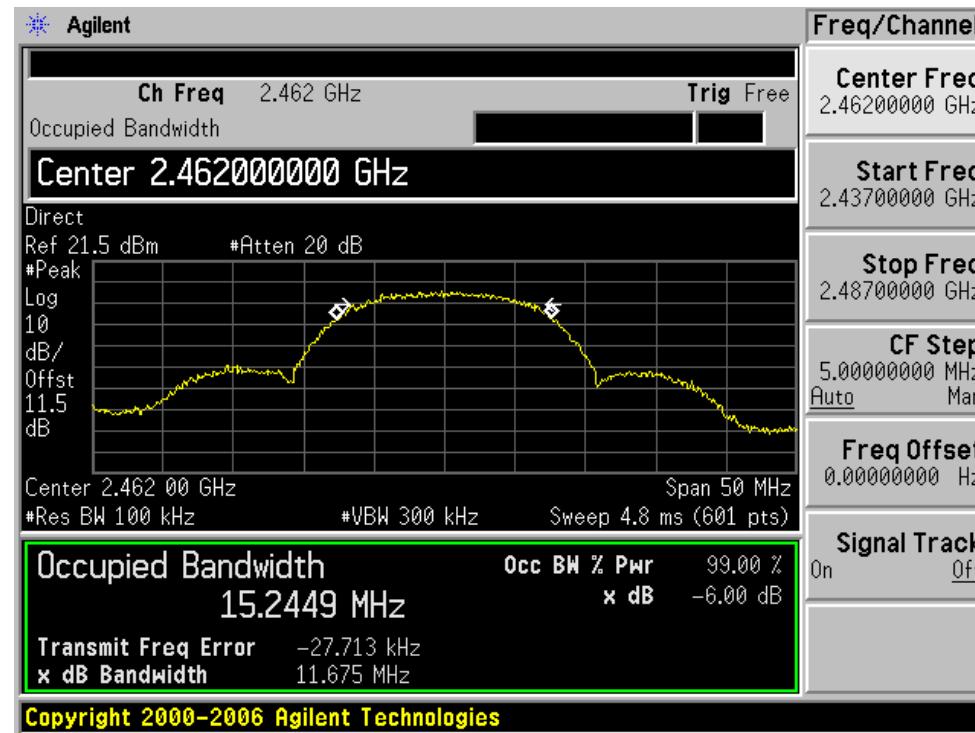


802.11g



Omni

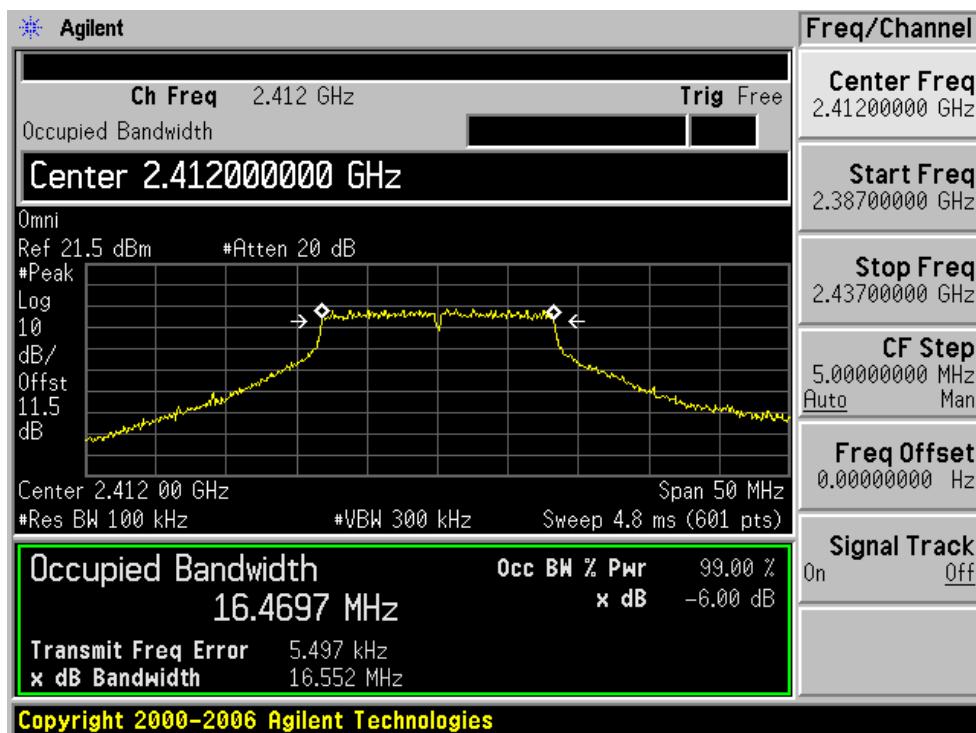Low Channel




Mid Channel

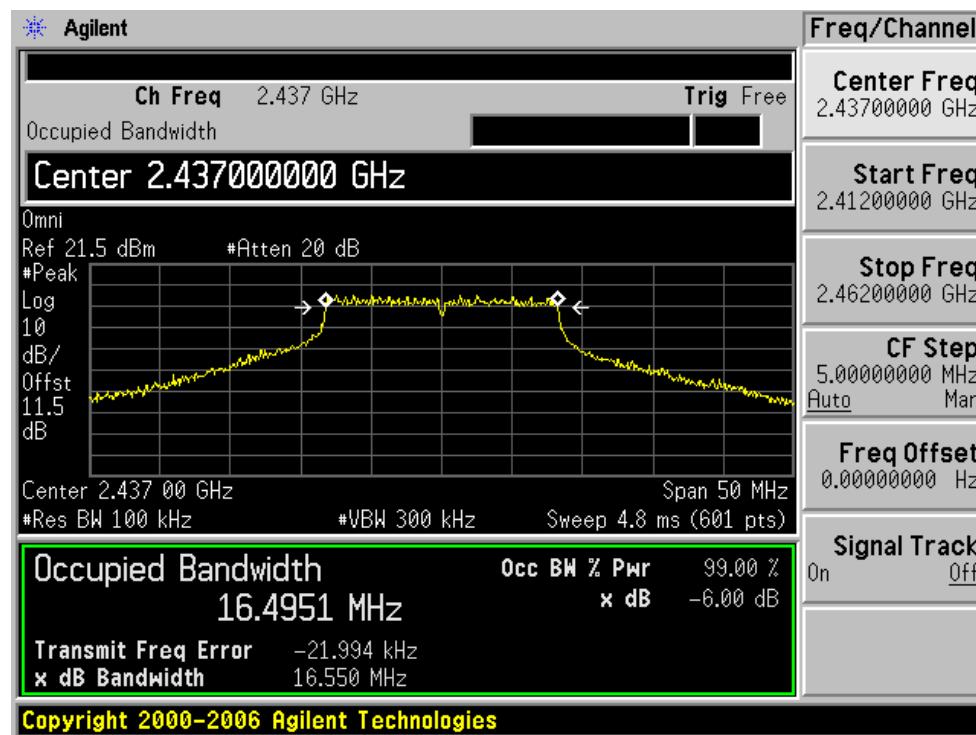


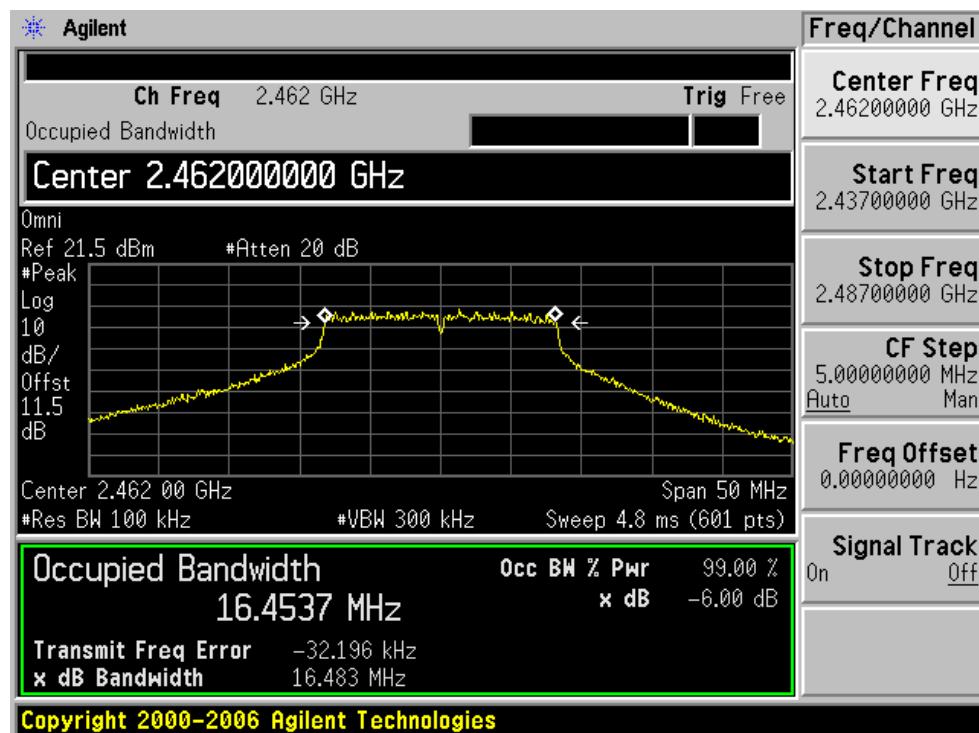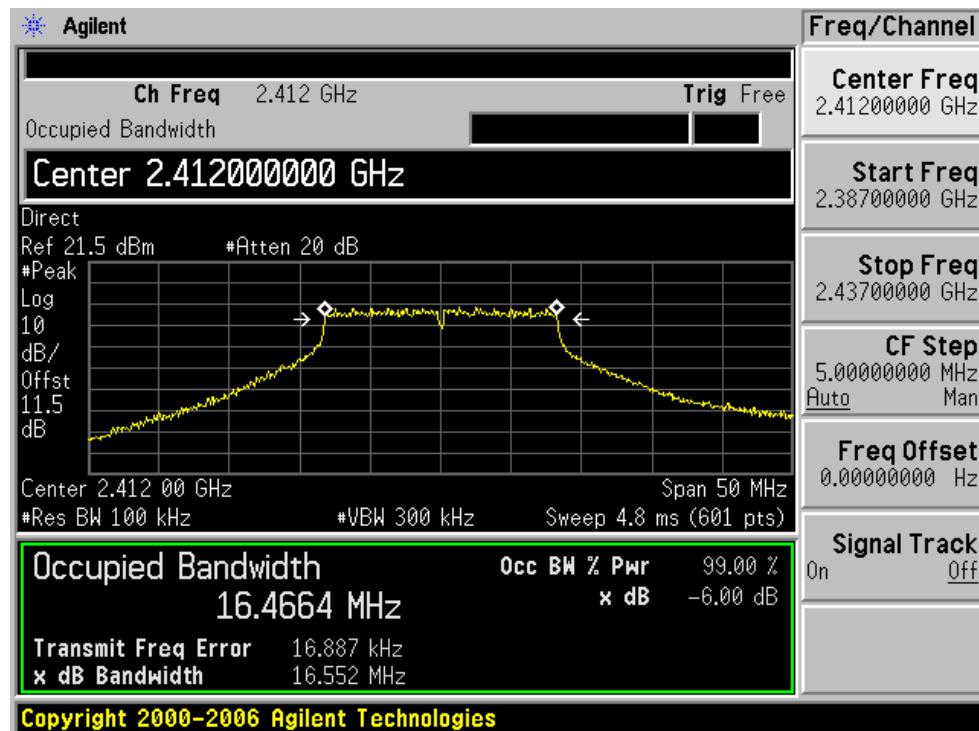High Channel**802.11g****Direct****Low Channel**

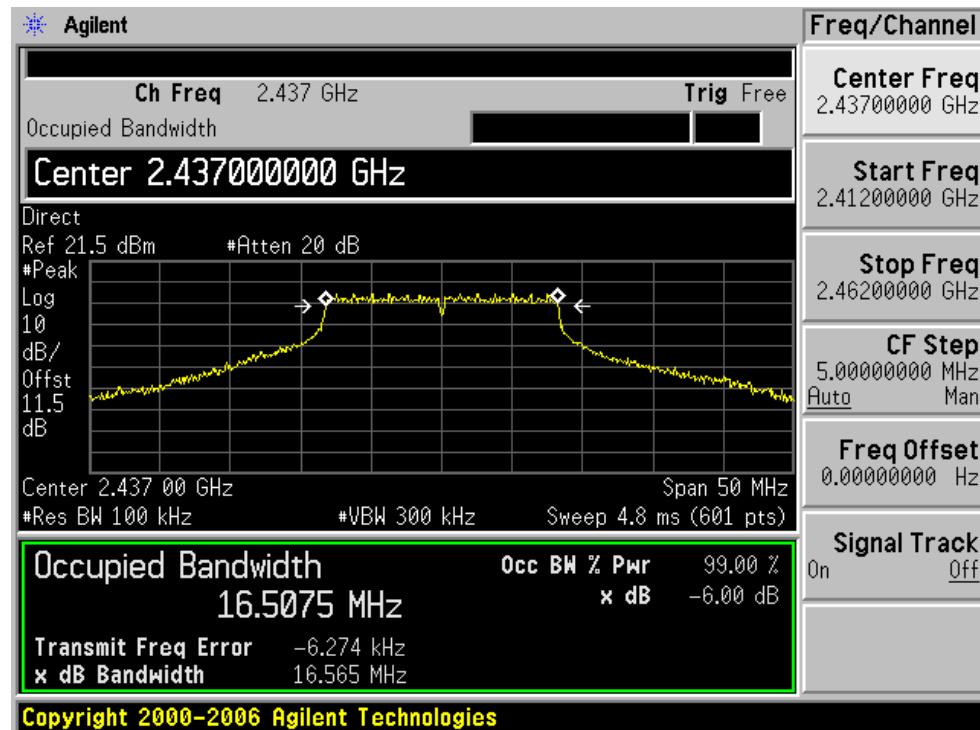Mid Channel



High Channel

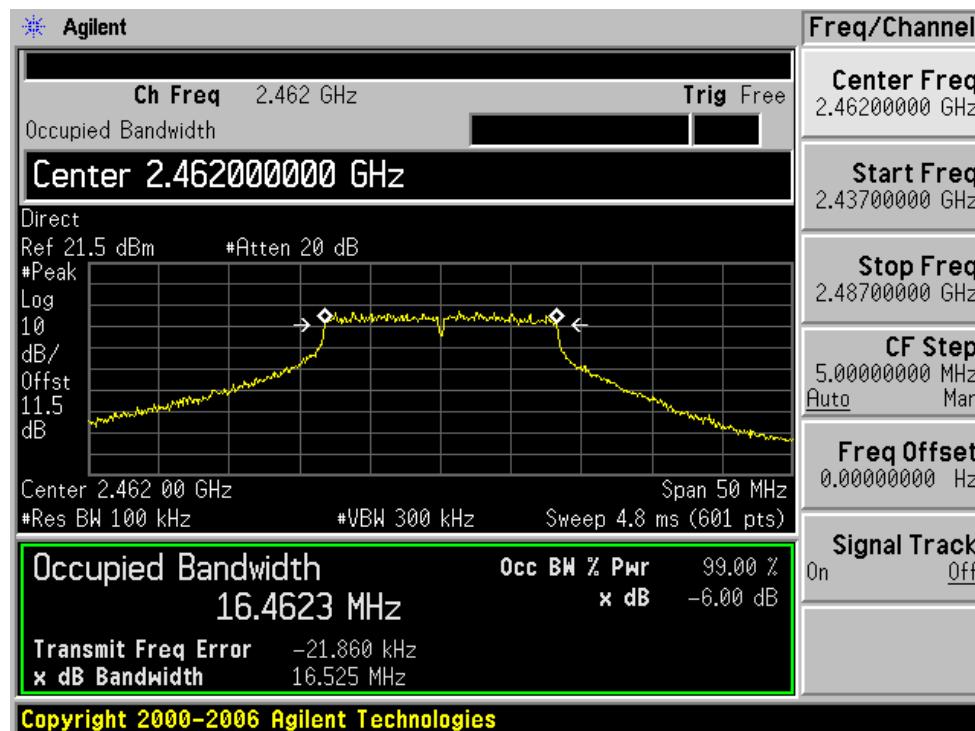

10 FCC §15.247(b), RSS210 § A8.4 - PEAK OUTPUT POWER MEASUREMENT

10.1 Applicable Standard

§15.247(b) the maximum peak output power of the intentional radiator shall not exceed the following:

§15.247(b) (3) and RSS210 § A8.4 (4) for systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

§15.247(b) (4) (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

10.2 Measurement Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to a spectrum analyzer.
3. Add a correction factor to the display.

10.3 Equipment List

| Manufacturer | Description | Model | Serial Number | Calibration Date |
|--------------|-------------------|--------|---------------|------------------|
| Agilent | Spectrum Analyzer | E4446A | US44300386 | 2007-04-26 |

10.4 Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 27 °C |
| Relative Humidity: | 40 % |
| ATM Pressure: | 102.0 kPa |

*The testing was performed by Choon-Sian Ooi and James on 2008-01-15.

10.5 Summary of Test Results

802.11b Omni

| Channel | Frequency (MHz) | Output Power of Highest Element (dBm) | Max Peak Output Power | | Limit (dBm) | Result |
|---------|-----------------|---------------------------------------|-----------------------|--------|-------------|--------|
| | | | (dBm) | (mw) | | |
| Low | 2412 | 17.13 | 26.13 | 410.20 | 27 | pass |
| Mid | 2437 | 17.77 | 26.77 | 475.34 | 27 | pass |
| High | 2462 | 16.73 | 25.73 | 374.11 | 27 | pass |

802.11b Direct

| Channel | Frequency (MHz) | Output Power of Highest Element (dBm) | Max Peak Output Power | | Limit (dBm) | Result |
|---------|-----------------|---------------------------------------|-----------------------|--------|-------------|--------|
| | | | (dBm) | (mw) | | |
| Low | 2412 | 16.60 | 25.60 | 363.08 | 27 | pass |
| Mid | 2437 | 17.74 | 26.74 | 472.06 | 27 | pass |
| High | 2462 | 16.60 | 25.60 | 363.08 | 27 | pass |

802.11g Omni

| Channel | Frequency (MHz) | Output Power of Highest Element (dBm) | Max Peak Output Power | | Limit (dBm) | Result |
|---------|-----------------|---------------------------------------|-----------------------|--------|-------------|--------|
| | | | (dBm) | (mw) | | |
| Low | 2412 | 11.47 | 20.47 | 111.43 | 27 | pass |
| Mid | 2437 | 17.21 | 26.21 | 417.83 | 27 | pass |
| High | 2462 | 10.18 | 19.18 | 82.79 | 27 | pass |

802.11g Direct

| Channel | Frequency (MHz) | Output Power of Highest Element (dBm) | Max Peak Output Power | | Limit (dBm) | Result |
|---------|-----------------|---------------------------------------|-----------------------|--------|-------------|--------|
| | | | (dBm) | (mw) | | |
| Low | 2412 | 11.02 | 20.02 | 100.46 | 27 | pass |
| Mid | 2437 | 17.12 | 26.12 | 409.26 | 27 | pass |
| High | 2462 | 9.36 | 18.36 | 68.55 | 27 | pass |

Note: Calculated Power Limit per each Antenna connector:

Gain of each antenna: 6 dBi.

Gain of Antenna Array (8 antennas) $G_m = 6 + 10 \log 8 = 15$ dBi.

Total Output Power $P_t = 30 - ((15-6)/3)) = 27$ dBm.

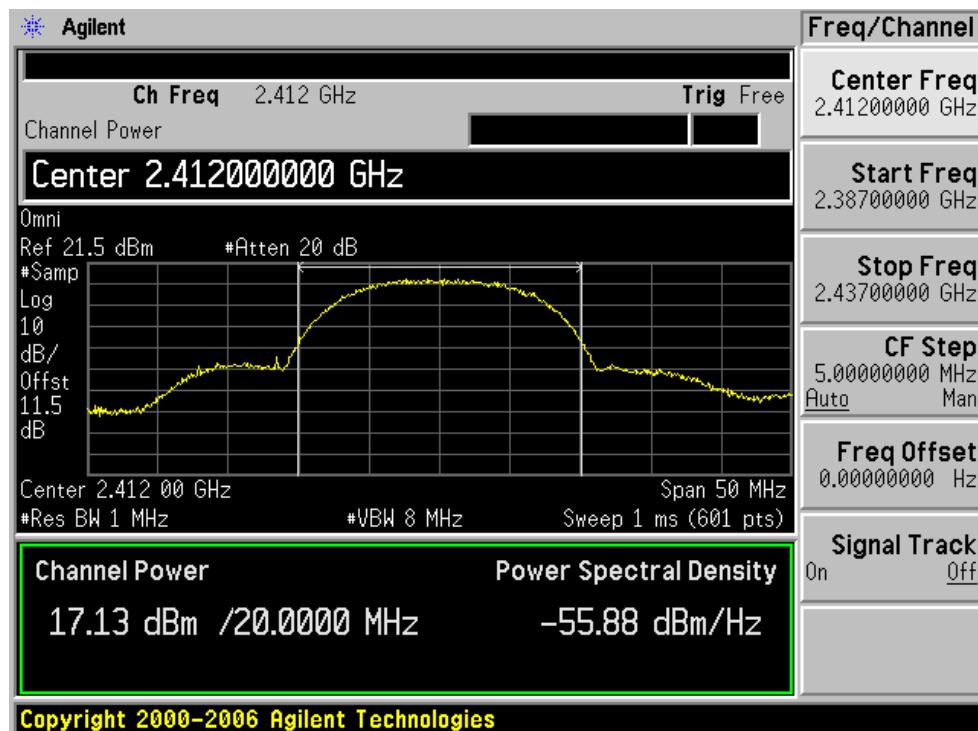
Peak Power Limit per each Antenna connector: $P_t - 10 \log 8 = 18$ dBm.

Please See the Following Plots


802.11b



Omni

Low Channel




Mid Channel

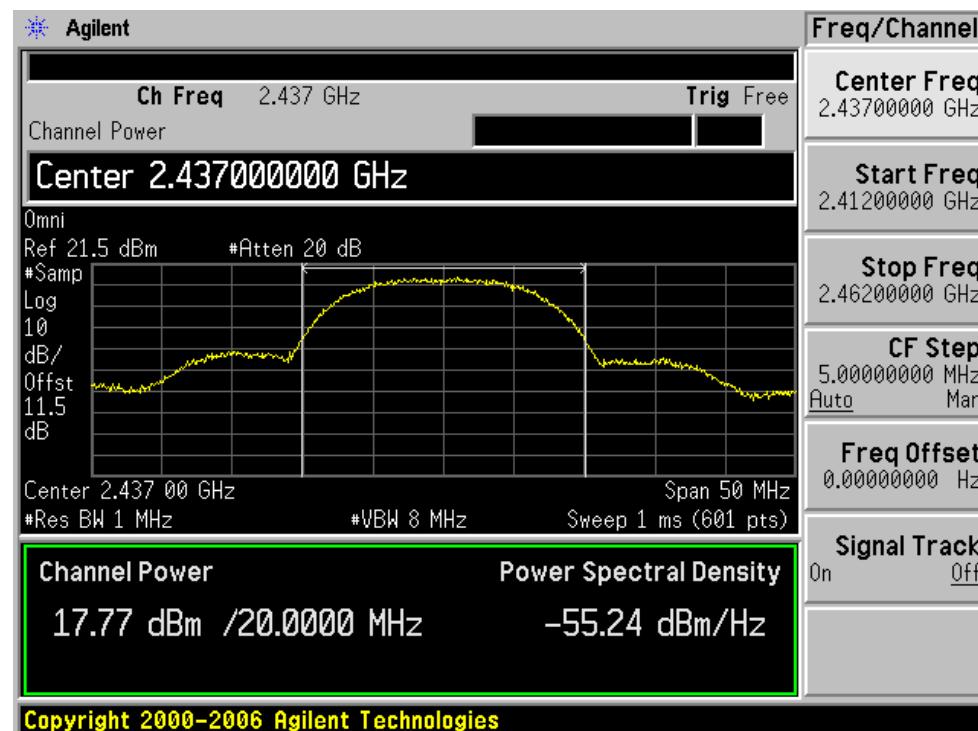


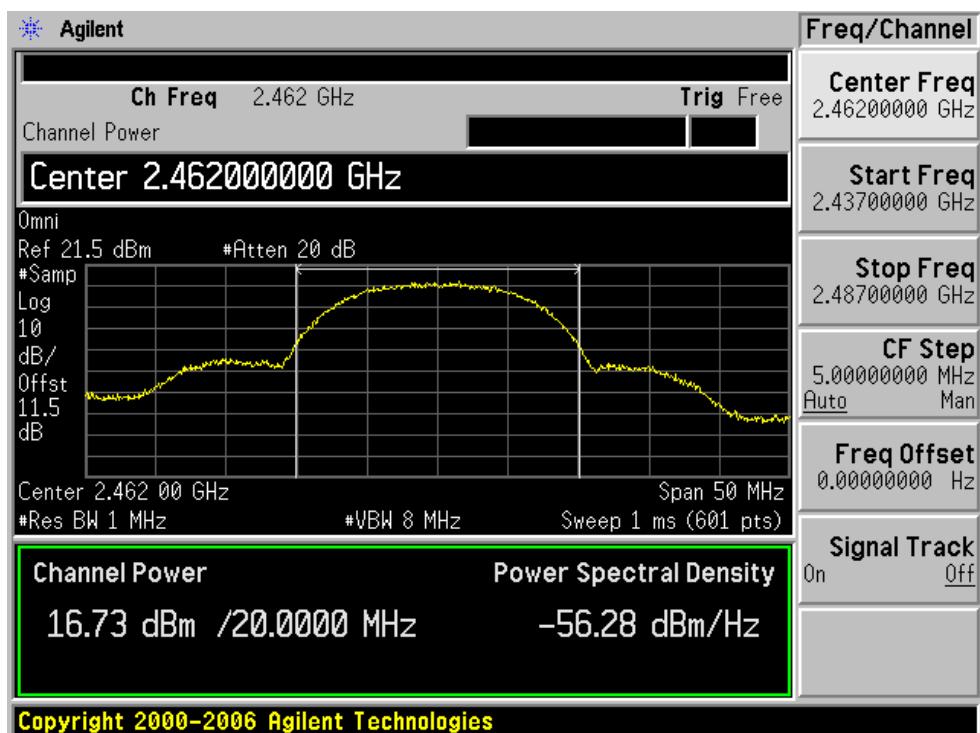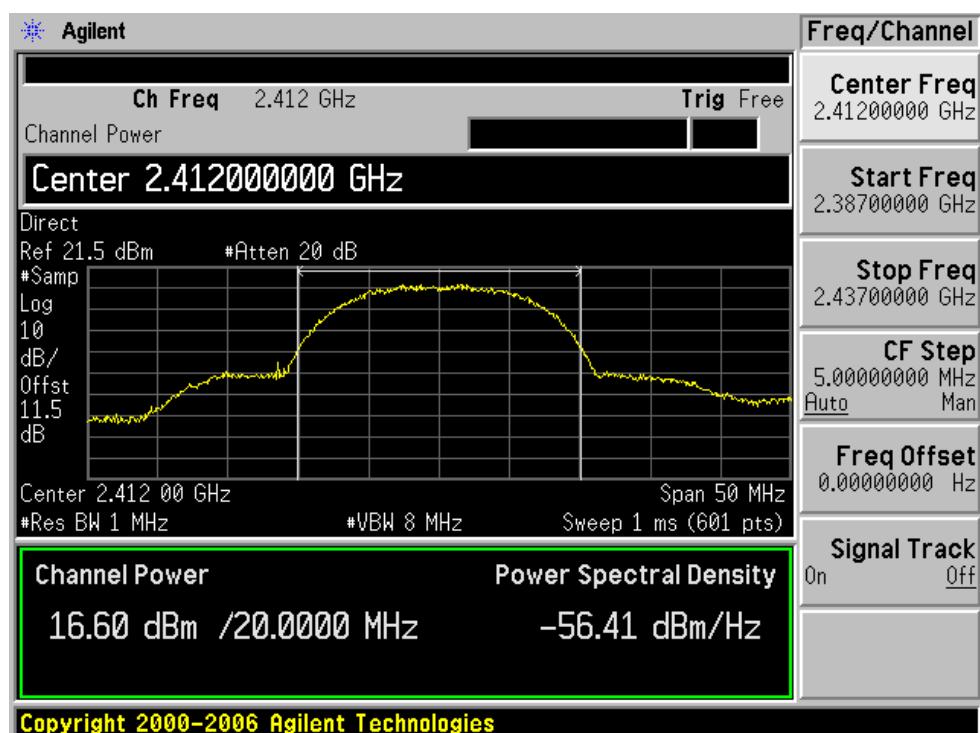High Channel**802.11b****Direct****Low Channel**

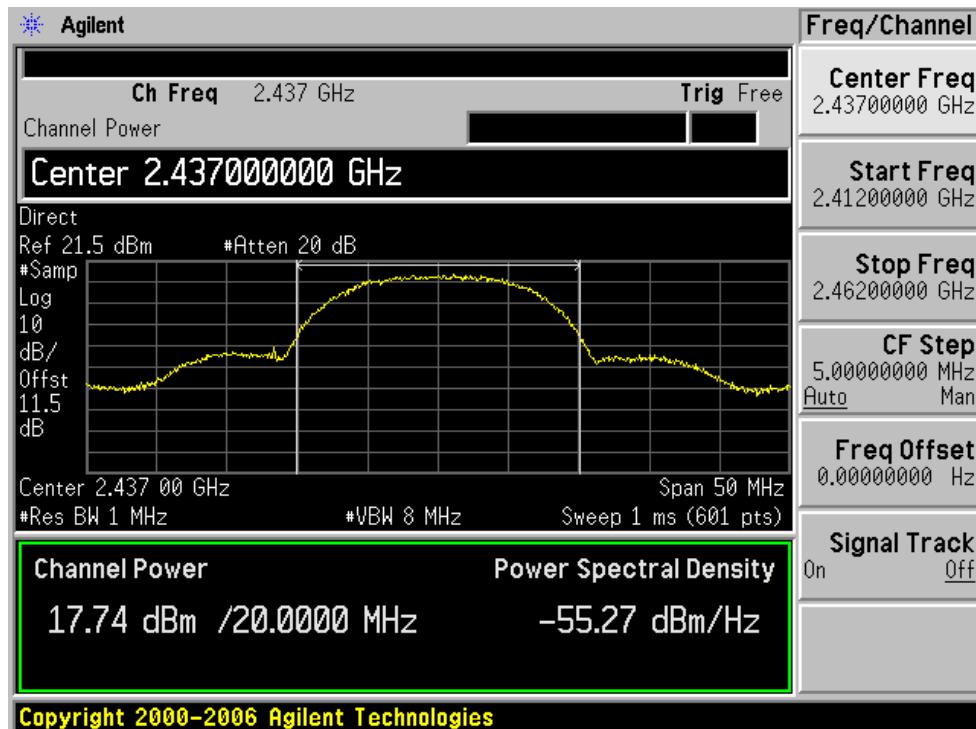Mid Channel




High Channel


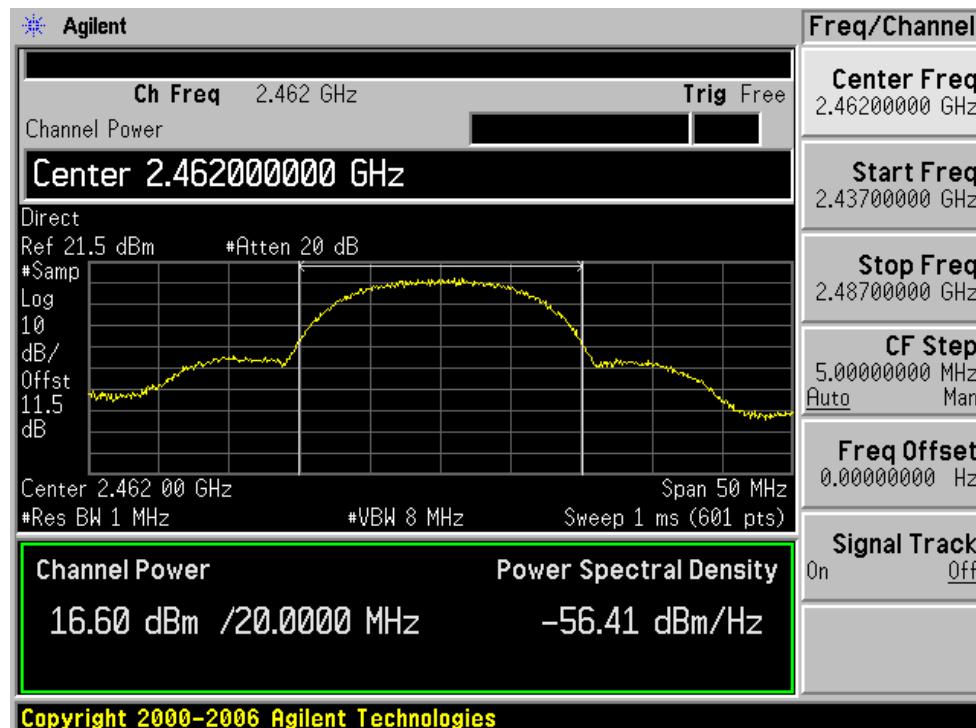


802.11g


Omni

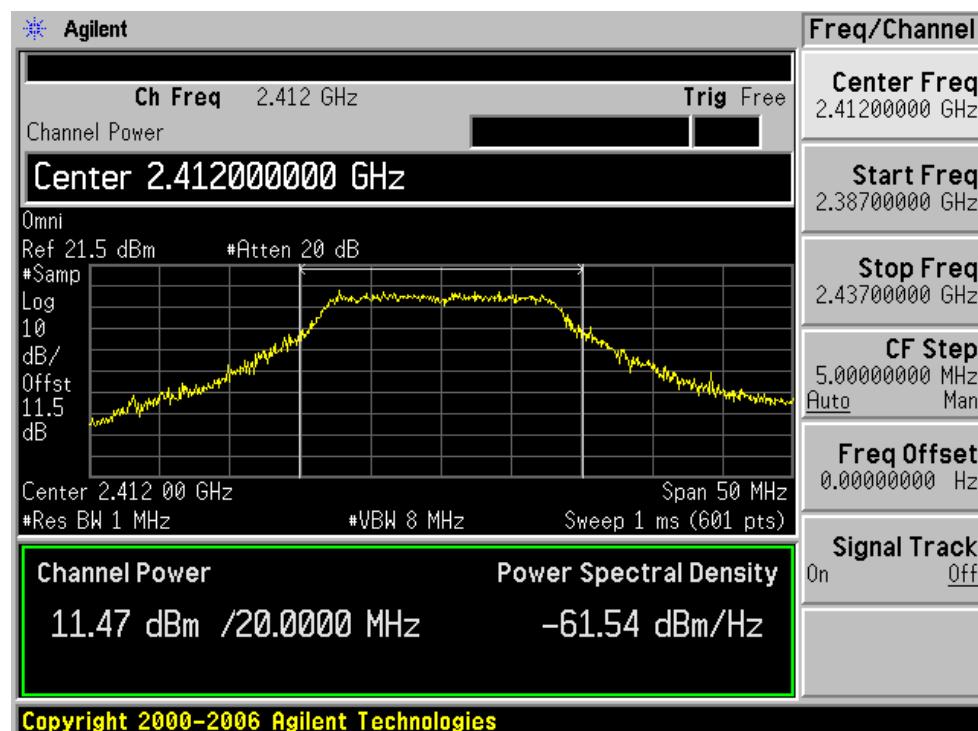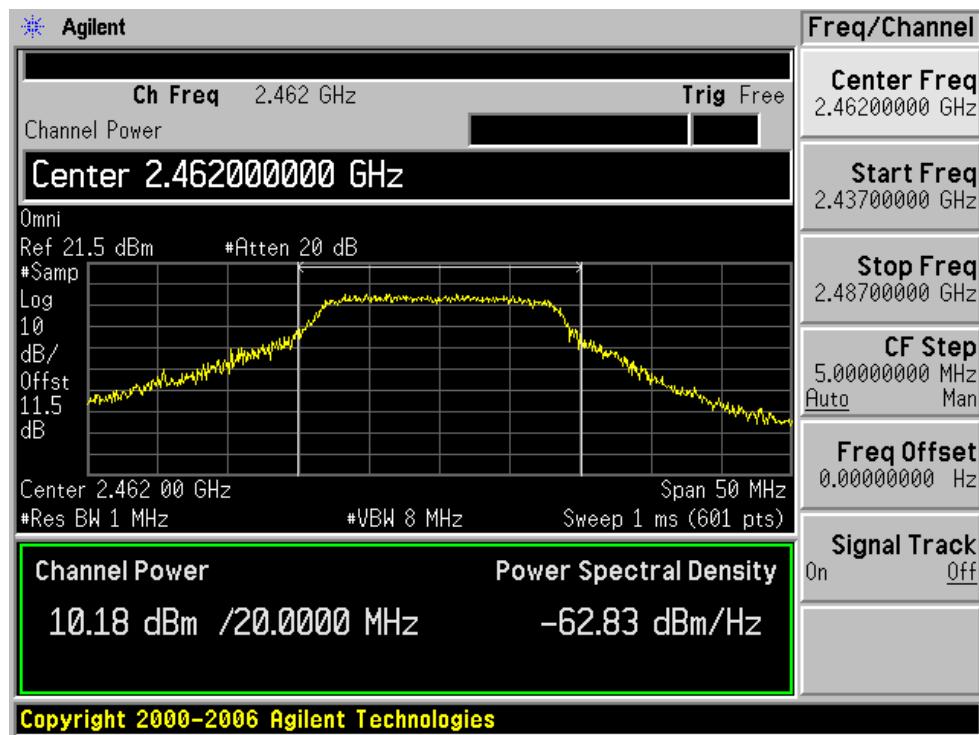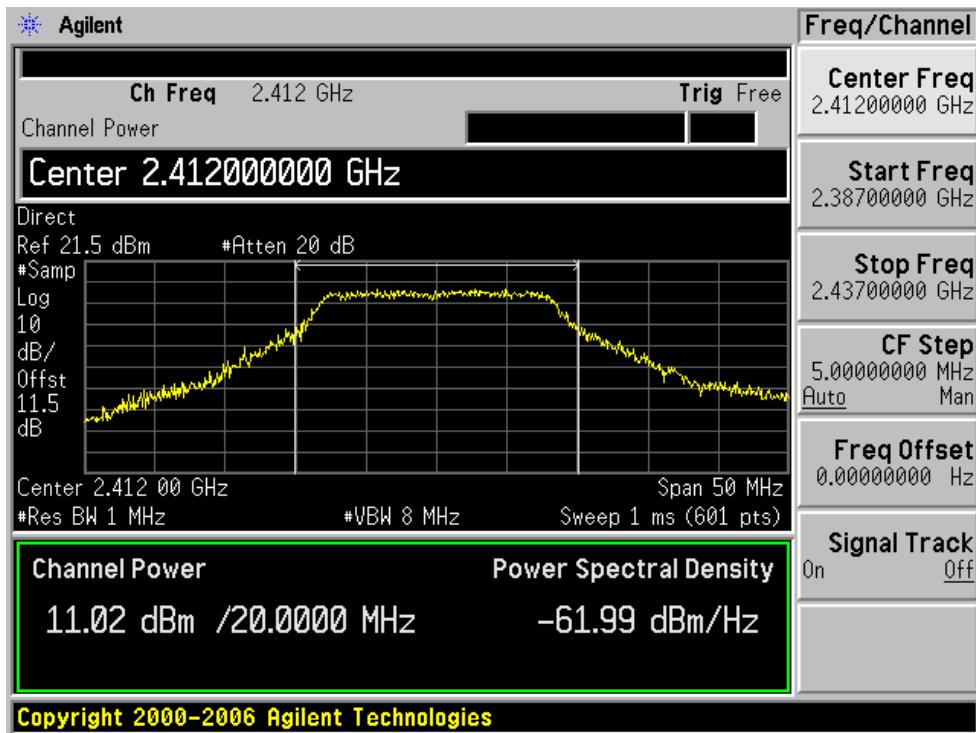Low Channel




High Channel**802.11g****Direct****Low Channel**

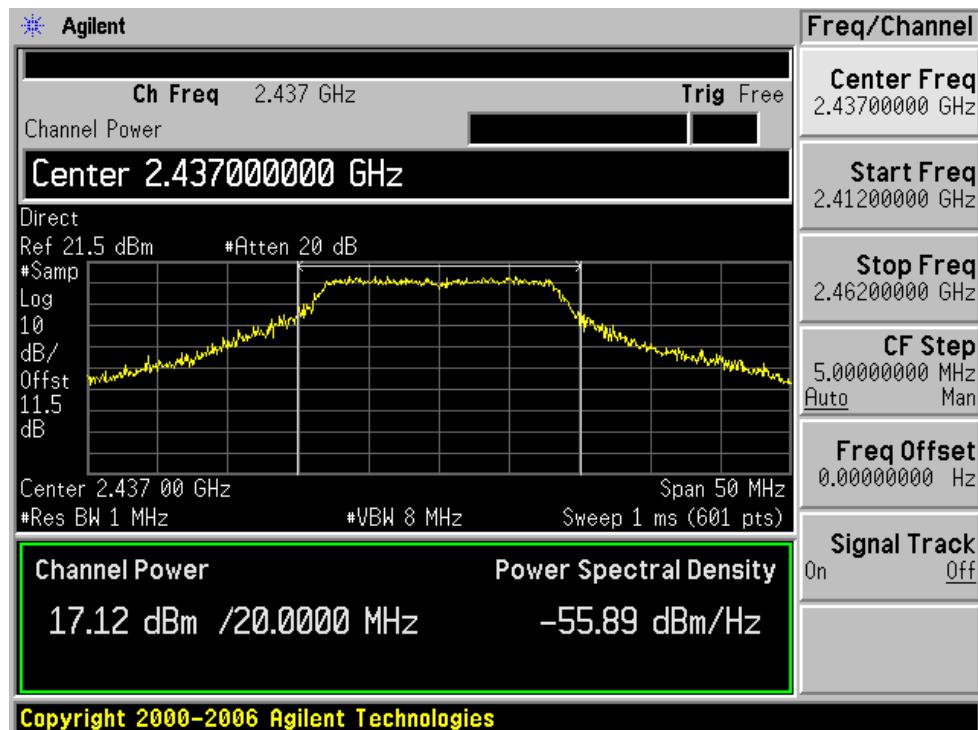Mid Channel



High Channel

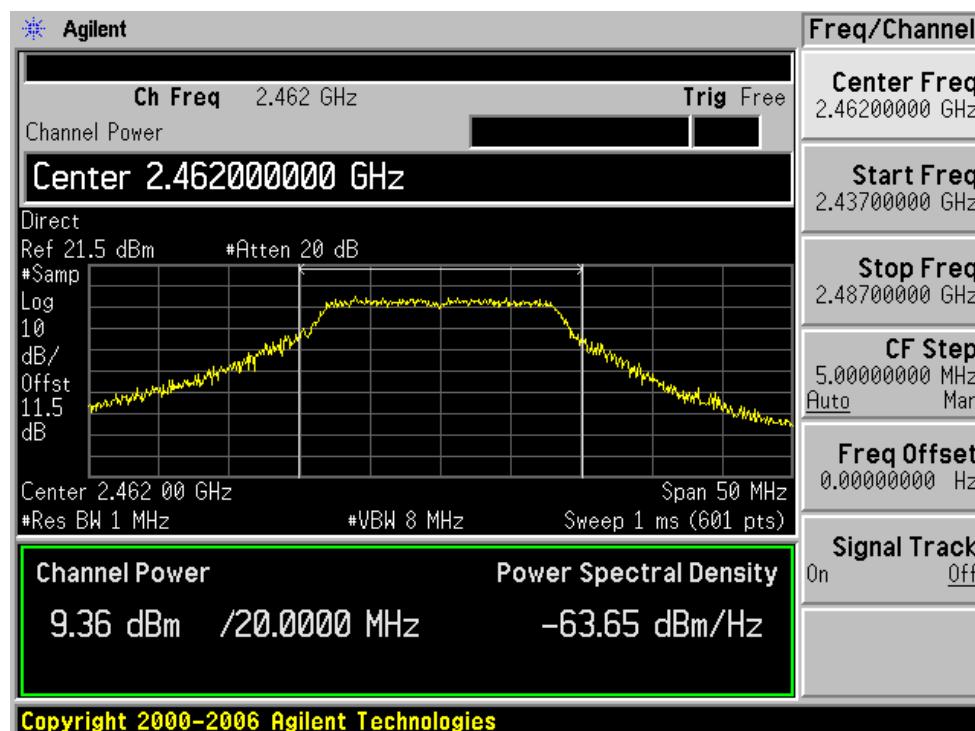

11 FCC §15.247(d), RSS-210 § A8.5 - 100 kHz BANDWIDTH OF BAND EDGES

11.1 Applicable Standard

According to §15.247(d), in *any* 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c)).

RSS210§ A8.5: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emissions limits specified in Tables 2 and 3.

11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.3 Equipment List

| Manufacturer | Description | Model | Serial Number | Calibration Date |
|--------------|-------------------|--------|---------------|------------------|
| Agilent | Spectrum Analyzer | E4446A | US44300386 | 2007-04-26 |

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

11.4 Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 27 °C |
| Relative Humidity: | 40 % |
| ATM Pressure: | 102.0 kPa |

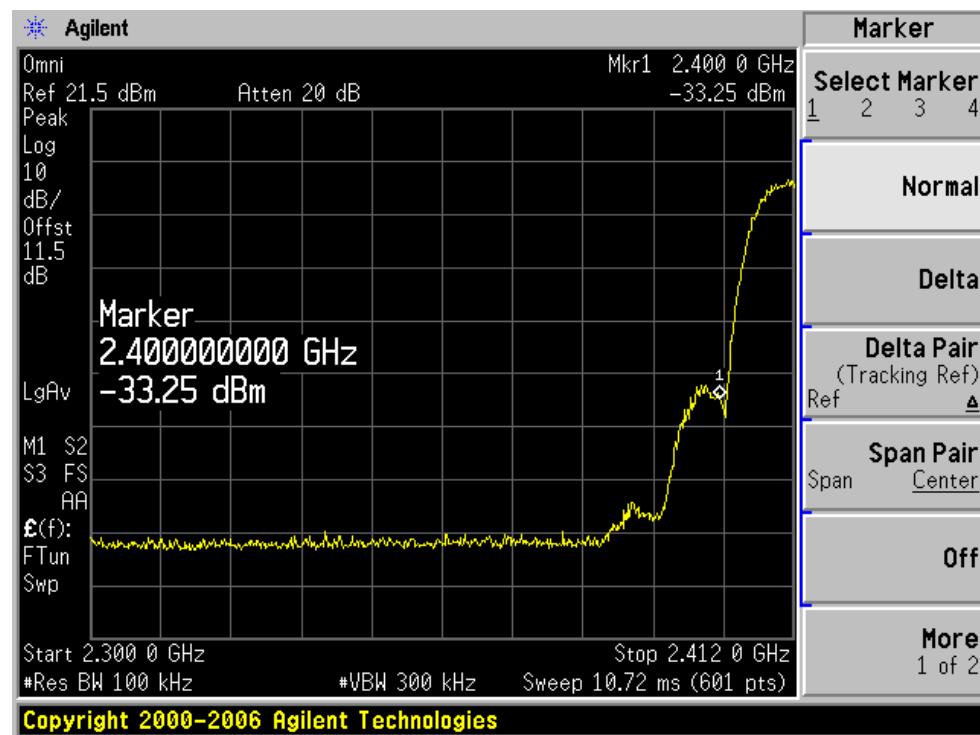
*The testing was performed by Choon-Sian Ooi on 2007-10-23.

Please Refer to the Following Plots


802.11b

Omni

Low Channel




High Channel

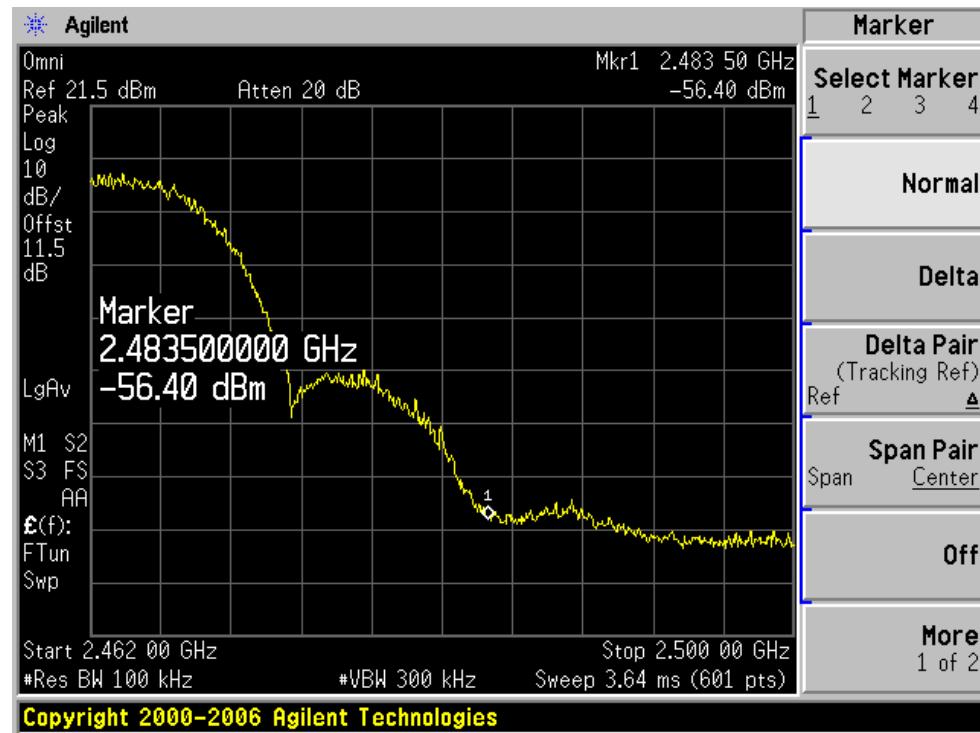


802.11b

Direct

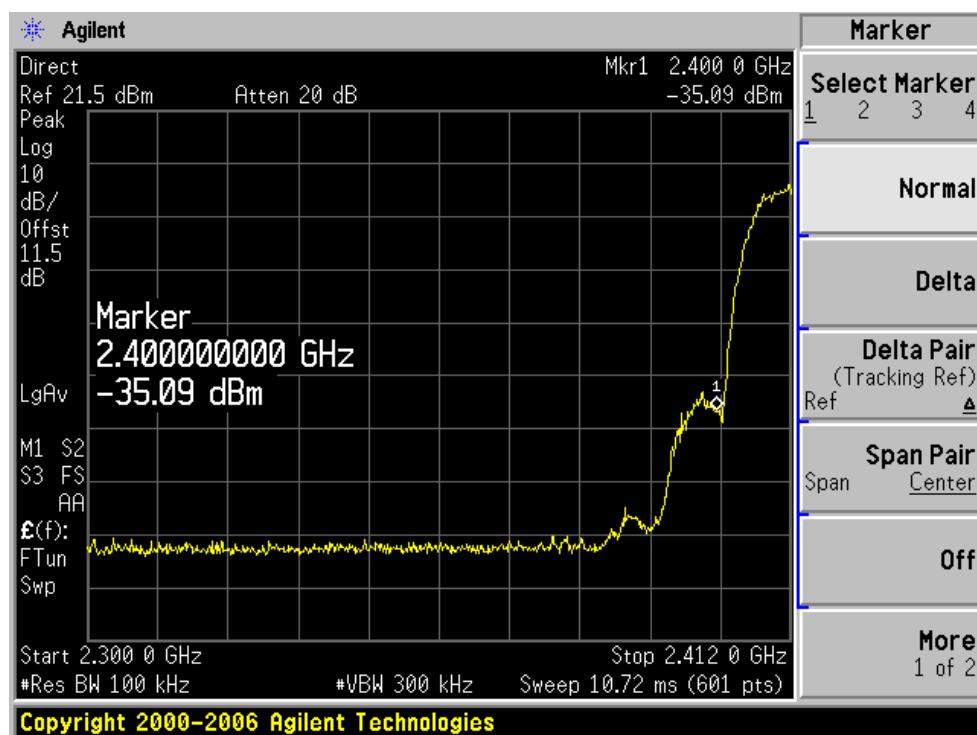Low Channel




High Channel

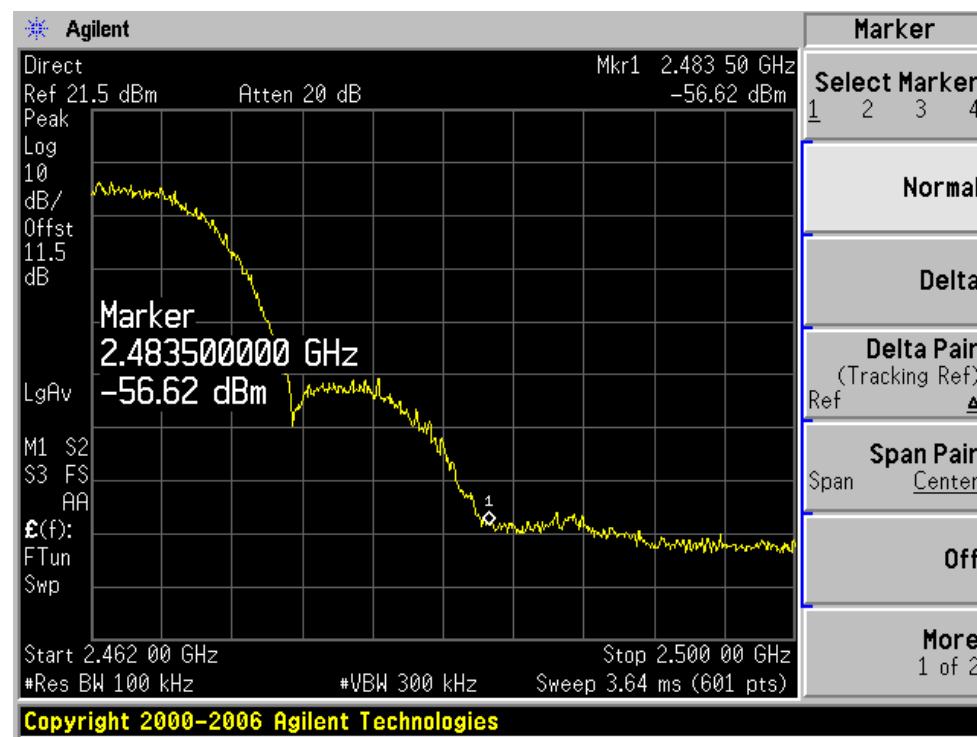


802.11g



Omni

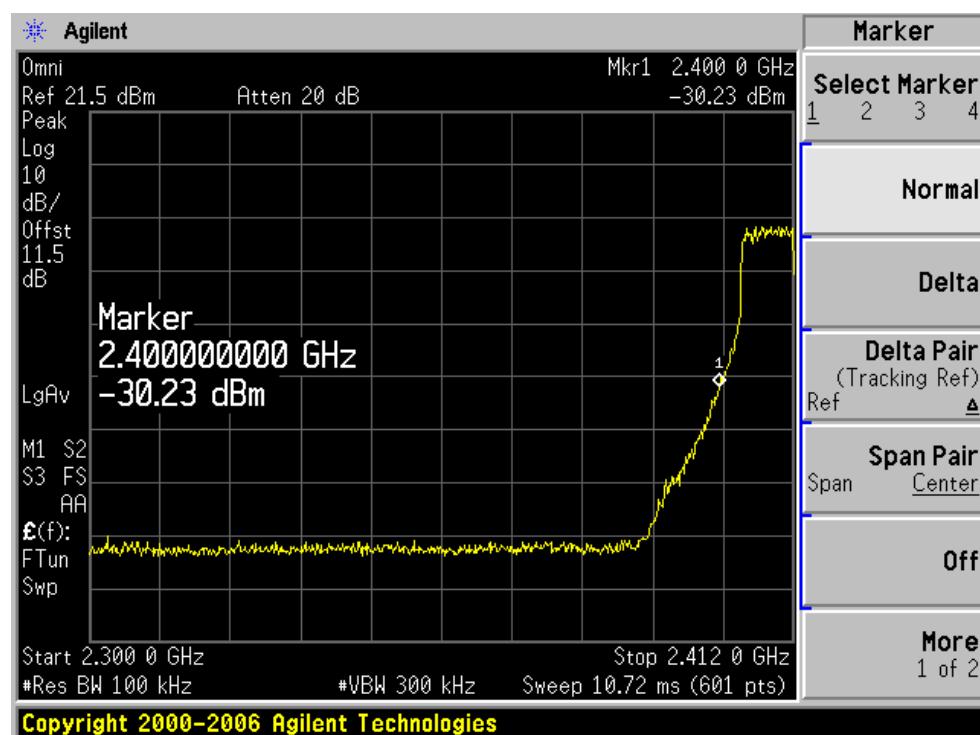Low Channel



High Channel

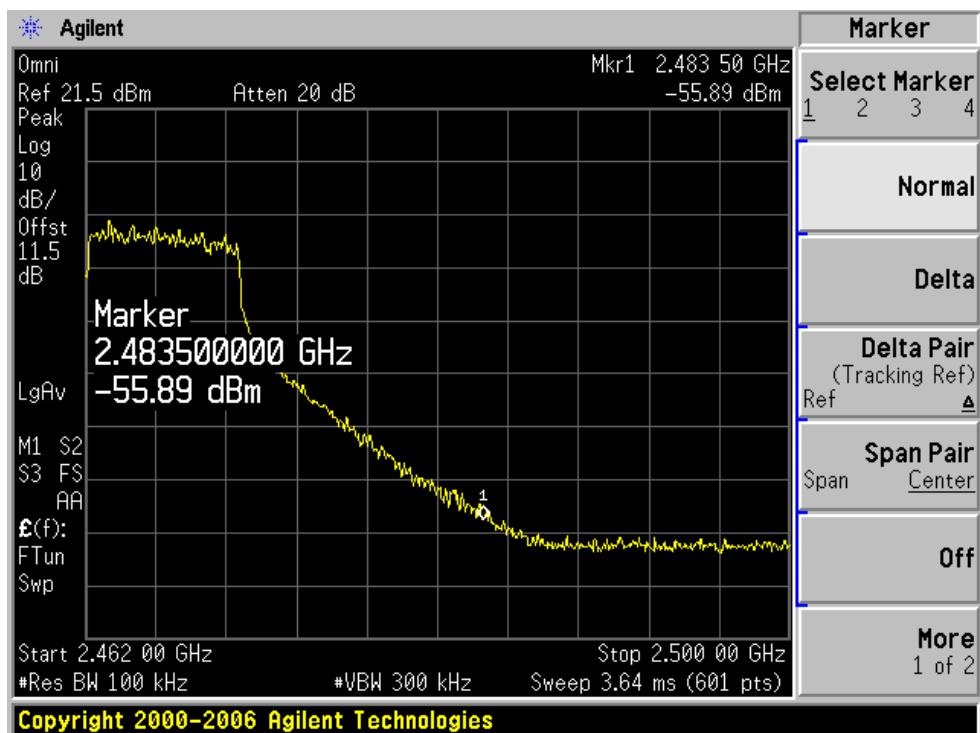

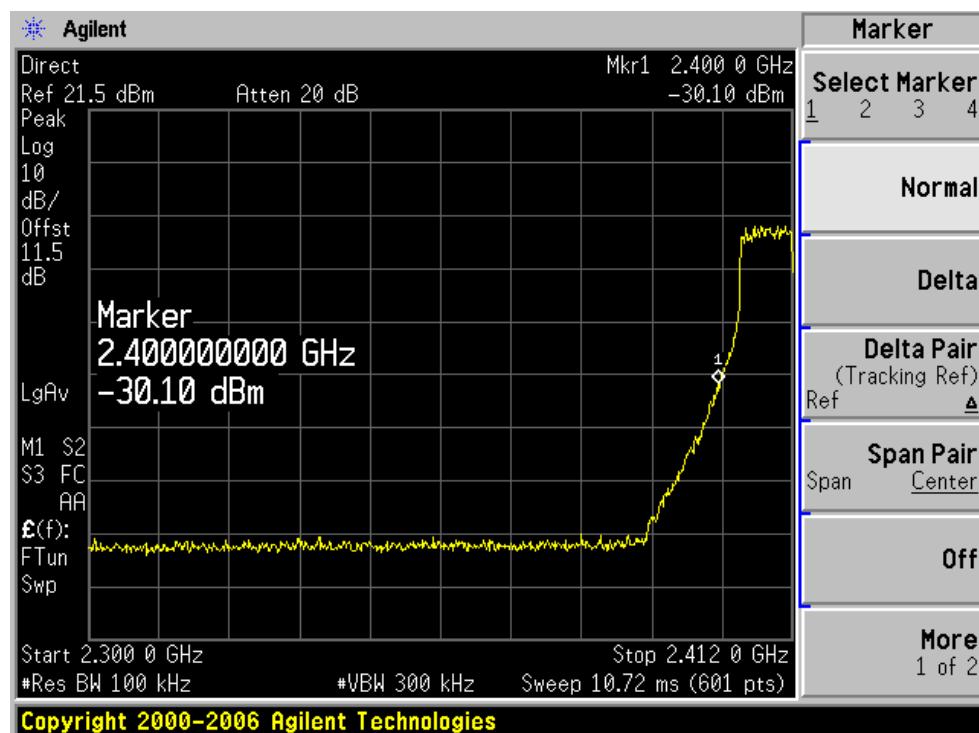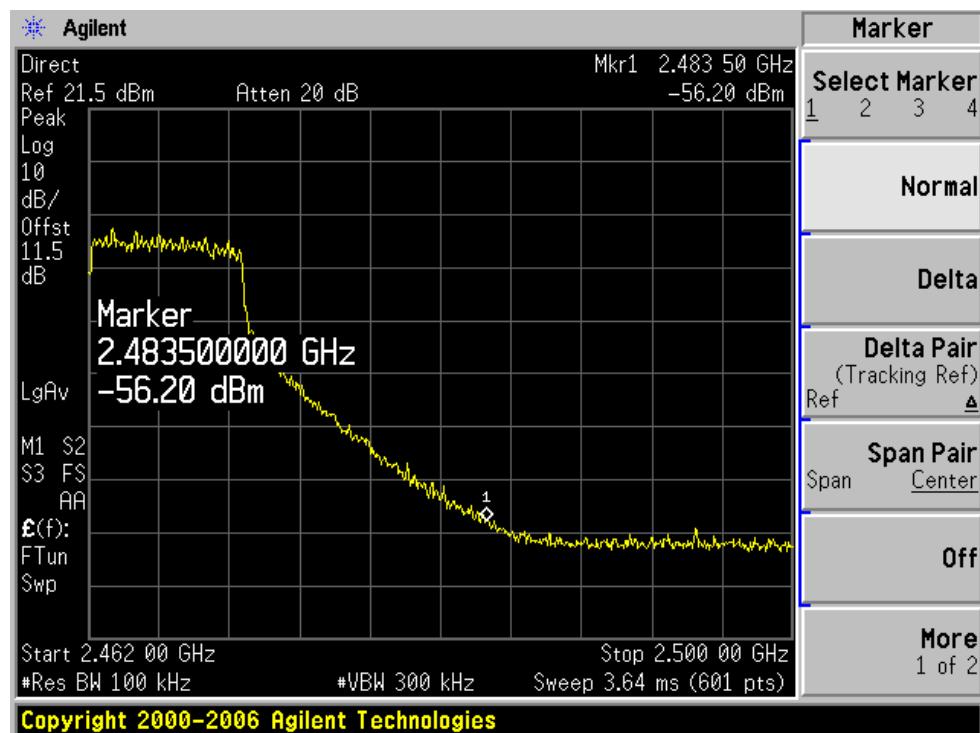802.11g**Direct****Low Channel****High Channel**

12 FCC §15.247(e), RSS-210 § A8.2 (b) - POWER SPECTRAL DENSITY

12.1 Applicable Standard

According to §15.247 (e) and RSS-210 § A8.2 (b), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

12.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to 1.5MHz span mode. And then, set RBW and VBW of spectrum analyzer to proper value. (DTS)
4. Repeat above procedures until all frequencies measured were complete.

12.3 Equipment List

| Manufacturer | Description | Model | Serial Number | Calibration Date |
|--------------|-------------------|--------|---------------|------------------|
| Agilent | Spectrum Analyzer | E4446A | US44300386 | 2007-04-26 |

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

12.4 Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 27 °C |
| Relative Humidity: | 40 % |
| ATM Pressure: | 102.0 kPa |

*The testing was performed by Choon-Sian Ooi on 2007-10-23.

12.5 Summary of Test Results

802.11b

Omni

| Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Result |
|-----------------|------------|-------------|-----------|
| 2412 | -1.11 | -1.0 | Compliant |
| 2437 | -1.15 | -1.0 | Compliant |
| 2462 | -2.17 | -1.0 | Compliant |

802.11b

Direct

| Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Result |
|-----------------|------------|-------------|-----------|
| 2412 | -1.34 | -1.0 | Compliant |
| 2437 | -1.17 | -1.0 | Compliant |
| 2462 | -1.70 | -1.0 | Compliant |

802.11g

Omni

| Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Result |
|-----------------|------------|-------------|-----------|
| 2412 | -14.05 | -1.0 | Compliant |
| 2437 | -8.74 | -1.0 | Compliant |
| 2462 | -14.07 | -1.0 | Compliant |

802.11g

Direct

| Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Result |
|-----------------|------------|-------------|-----------|
| 2412 | -12.65 | -1.0 | Compliant |
| 2437 | -7.89 | -1.0 | Compliant |
| 2462 | -15.63 | -1.0 | Compliant |

Note: The peak power spectral density on each antenna connector is:

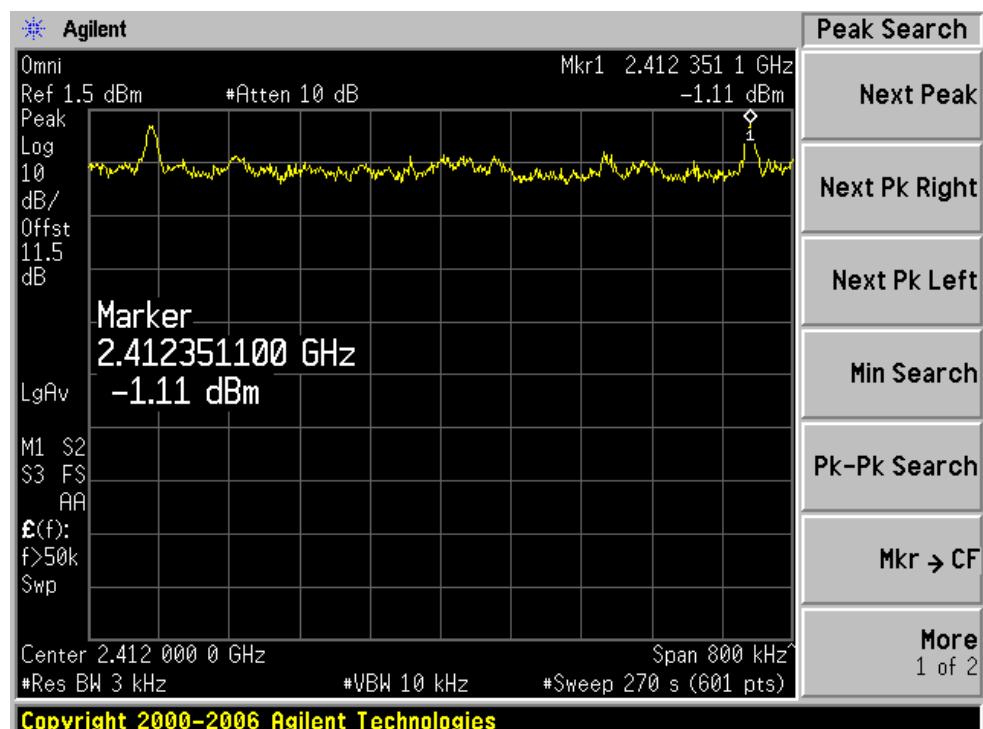
$$PD_1 = PD_{\text{total}} - 10\log 8 = 8 - 9 = -1 \text{ dBm/3kHz.}$$

Please refer to the following plots for detailed test results.


802.11b



Omni

Low Channel




Mid Channel

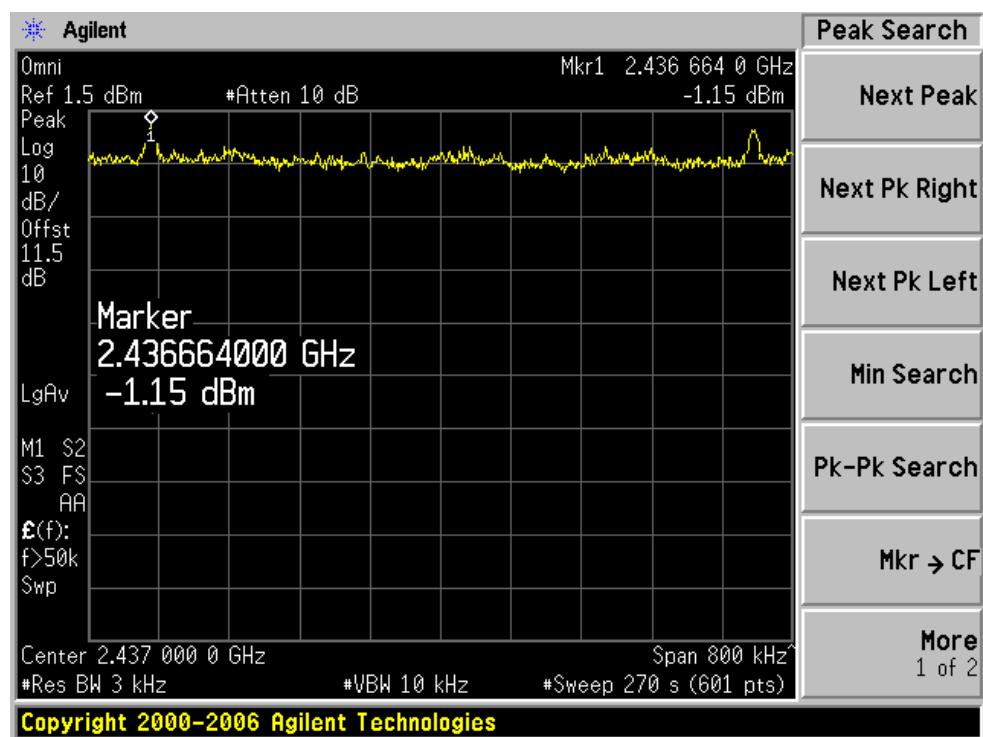


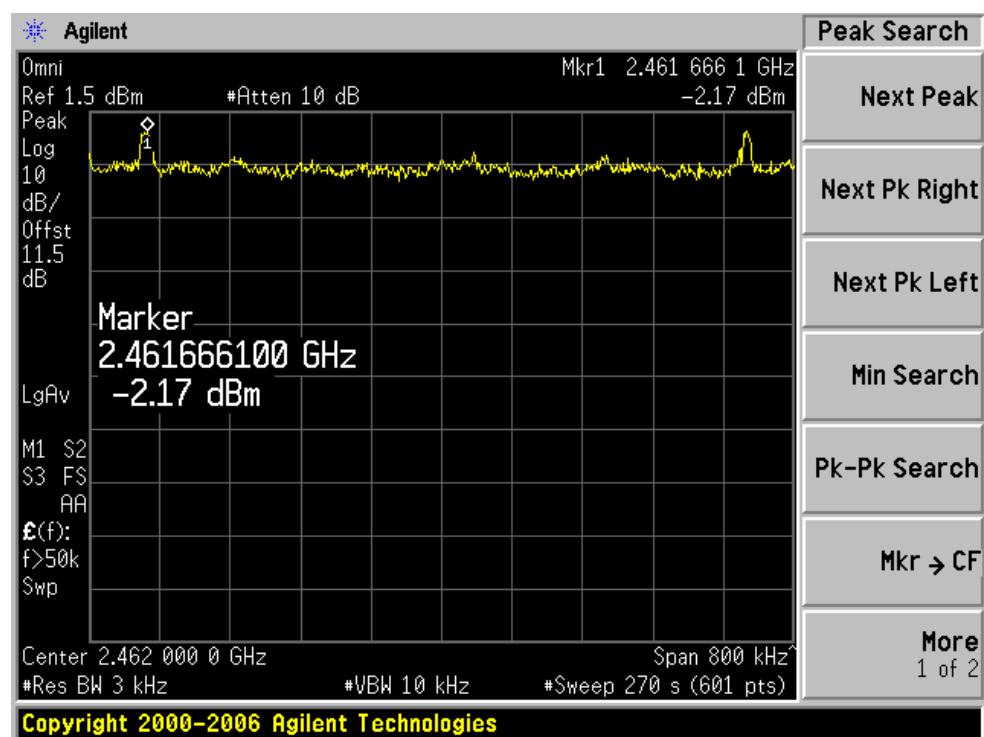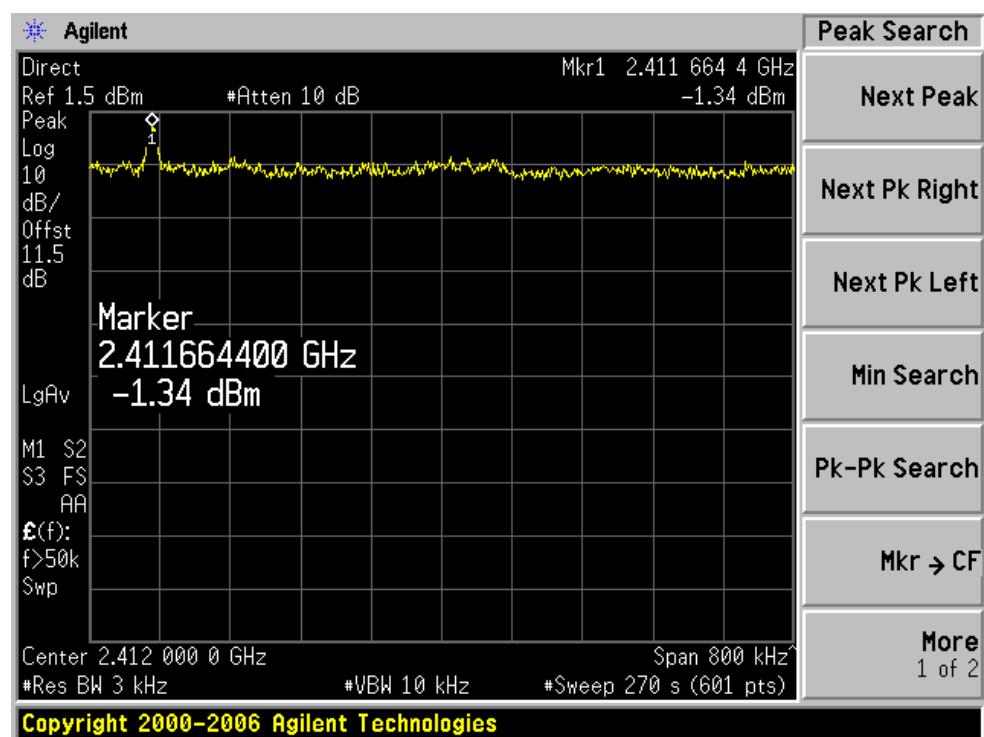High Channel**802.11b****Direct****Low Channel**

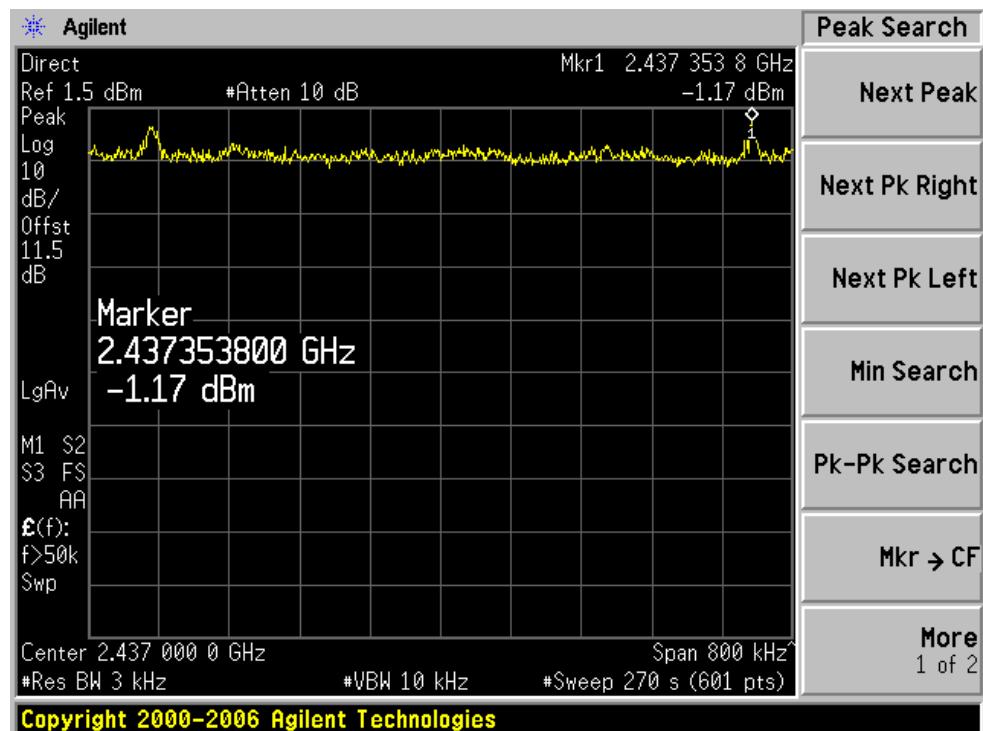Mid Channel




High Channel

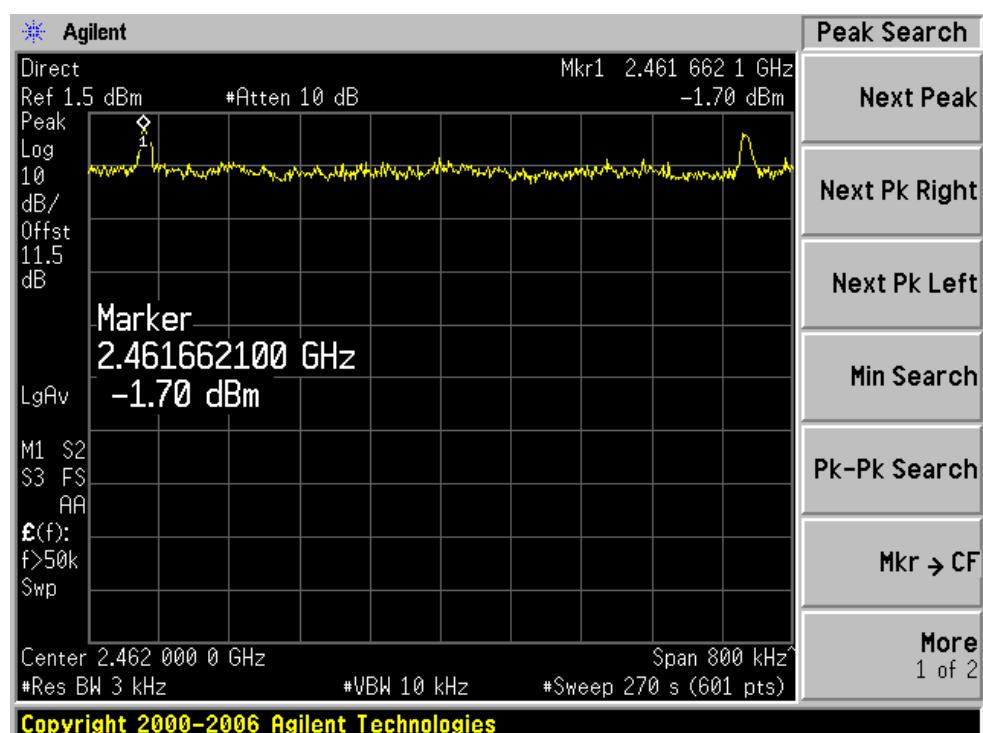


802.11g



Omni

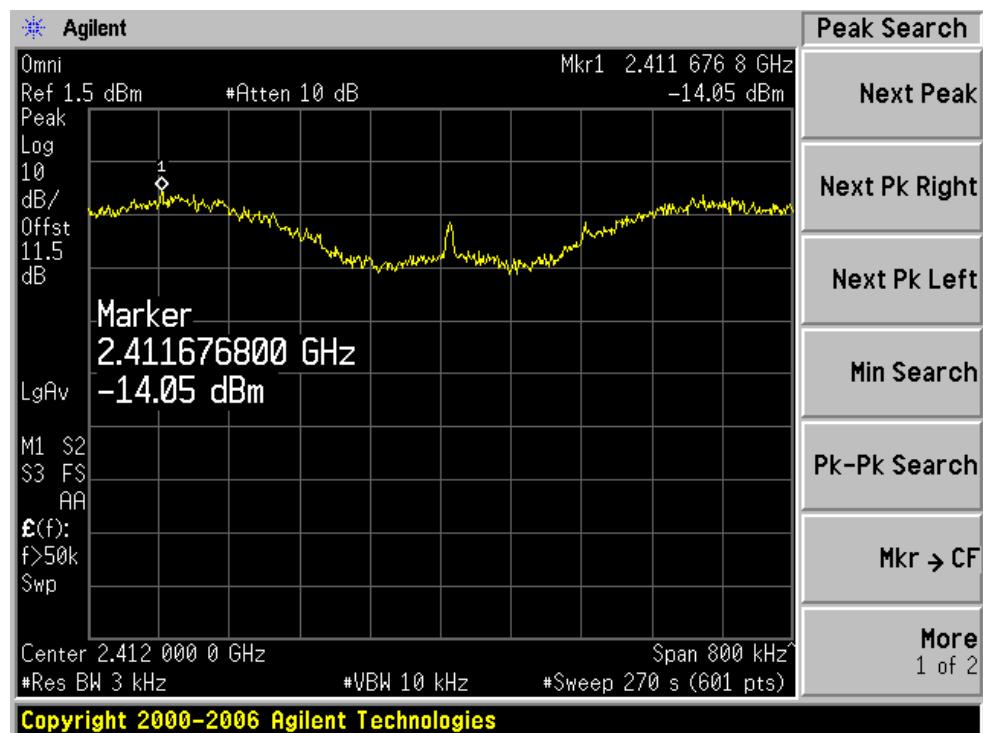Low Channel




Mid Channel

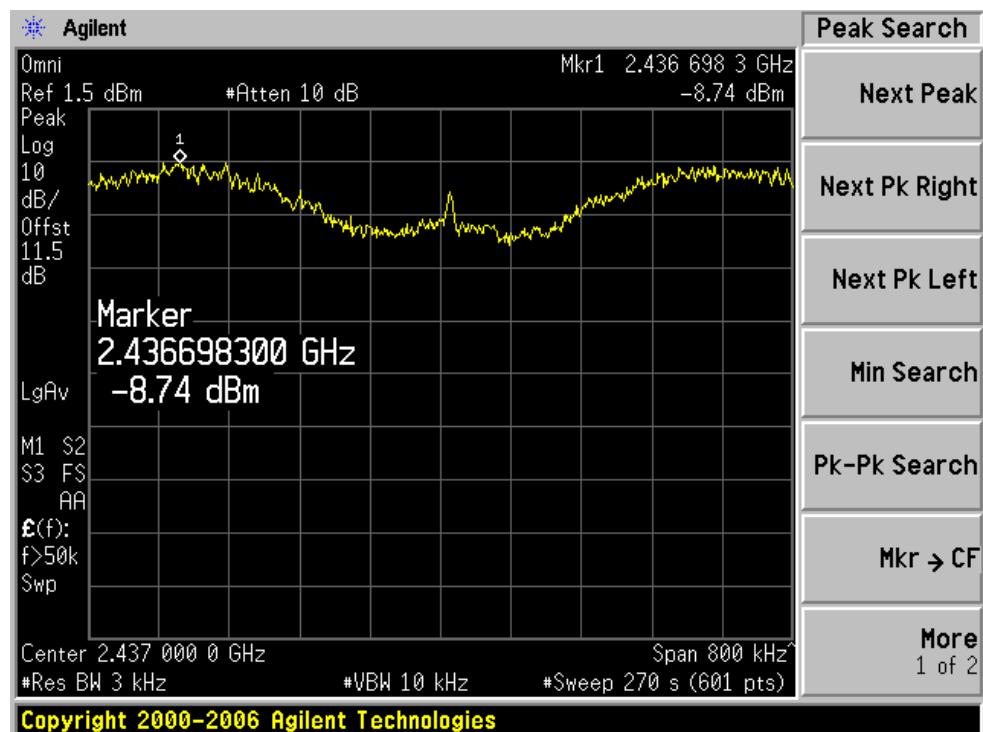

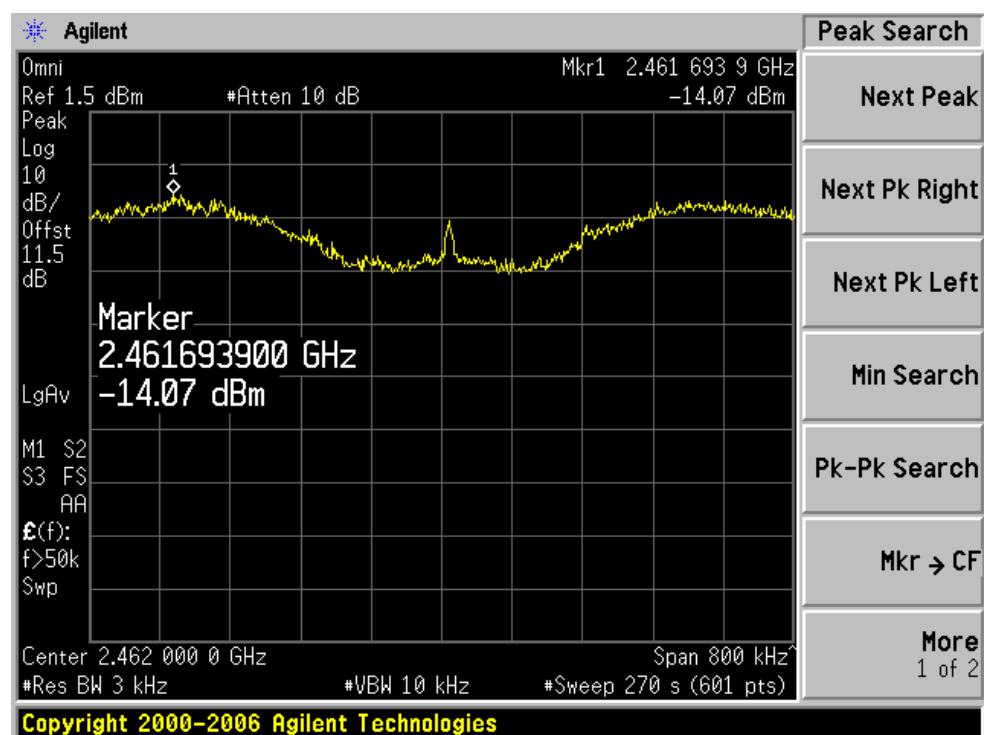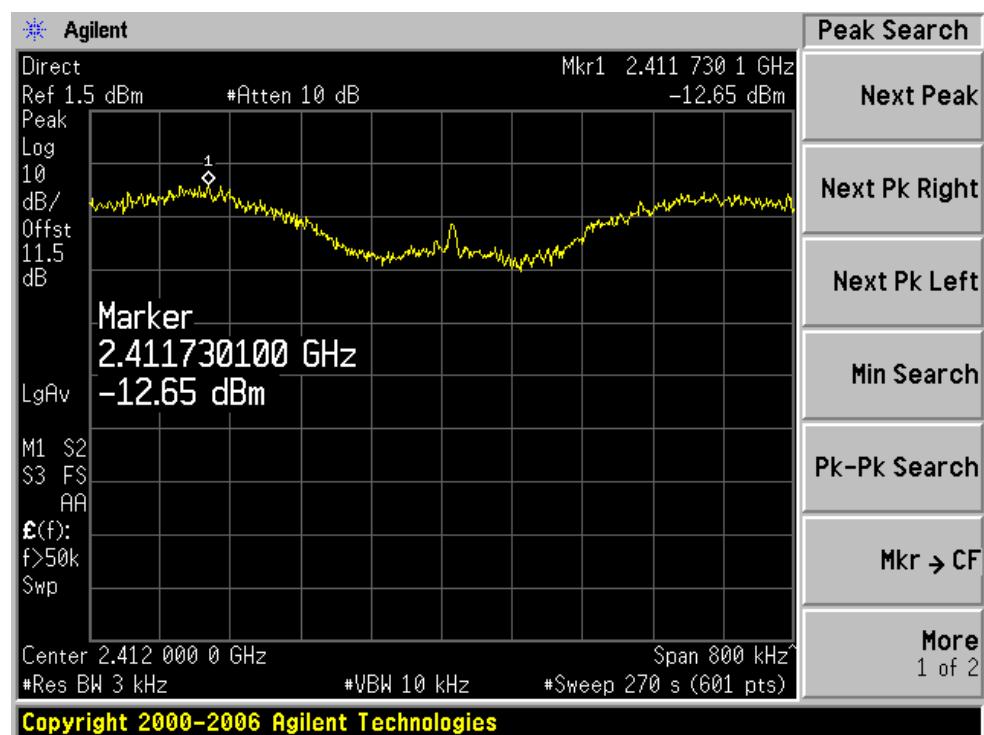High Channel**802.11g****Direct****Low Channel**

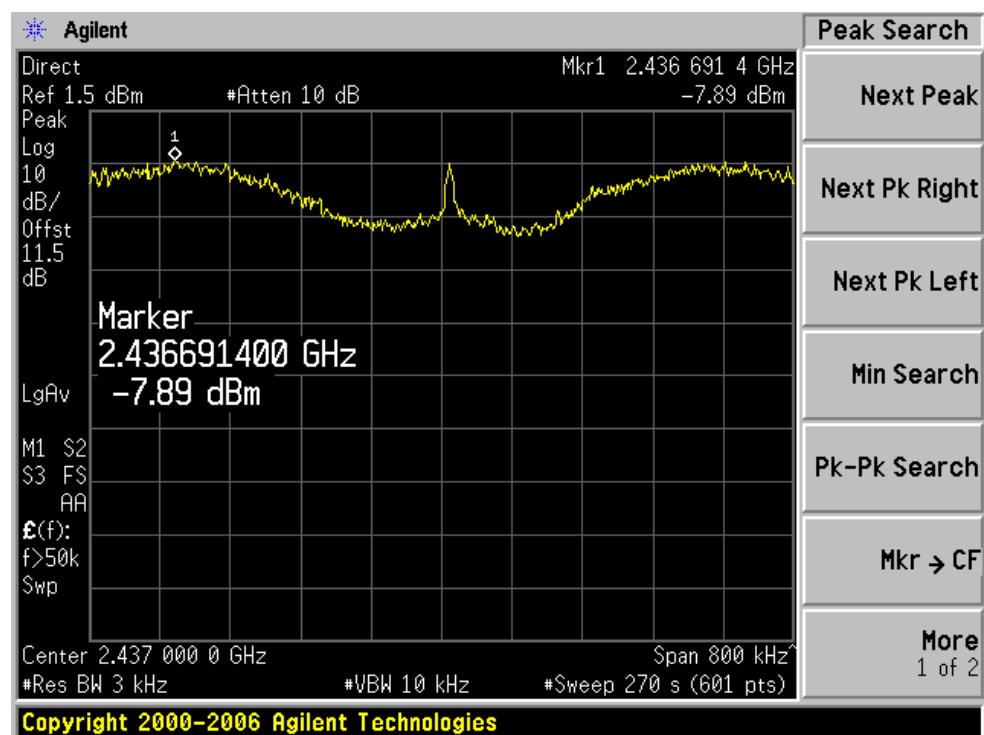Mid Channel



High Channel

