



# FCC Test Report

Test report no.: EMC\_848FCC22-24\_2005\_GSM\_134

FCC Part 22, 24 / RSS 132, 133

EUT Tablet PC      Model: iX104C2

With GSM module    Model: AC775

With WLAN          Model: 2200BG

With BT module     Model: TM60M665

FCC ID: Q2GIX104-133

IC: 4596A-IX104WBG



TTI-P-G 081/94-A0

Accredited according to ISO/IEC 17025



Bluetooth Qualification  
Test Facility  
(BQTF)



FCC listed # 101450

IC recognized # 3925

## CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: [info@cetecomusa.com](mailto:info@cetecomusa.com) • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

---

**Table of Contents**

<b>1</b>	<b>General information</b>
<b>1.1</b>	<b>Notes</b>
<b>1.2</b>	<b>Testing laboratory</b>
<b>1.3</b>	<b>Details of applicant</b>
<b>1.4</b>	<b>Application details</b>
<b>1.5</b>	<b>Test item</b>
<b>1.6</b>	<b>Test standards</b>
<b>2</b>	<b>Technical test</b>
<b>2.1</b>	<b>Summary of test results</b>
<b>2.2</b>	<b>Test report</b>
<b>1</b>	<b>General information</b>
<b>1.1</b>	<b>Notes</b>

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc.

**TEST REPORT PREPARED BY:****EMC Engineer: Harpreet Sidhu****1.2 Testing laboratory**

CETECOM Inc.

411 Dixon Landing Road, Milpitas, CA-95035, USA

Phone: +1 408 586 6200

Fax: +1 408 586 6299

E-mail: [lothar.schmidt@cetecomusa.com](mailto:lothar.schmidt@cetecomusa.com)Internet: [www.cetecom.com](http://www.cetecom.com)

### 1.3 Details of applicant

Name : Xplore Technologies  
Street : 14000 Summit Road, Suite 900  
City / Zip Code : Austin, TX 78728  
Country : USA  
Contact : Douglas L. Fowler  
Telephone : +1 512 336 7797  
Tele-fax : +1 512 336 7791  
e-mail : [dfowler@xploretech.com](mailto:dfowler@xploretech.com)

### 1.4 Application details

Date of receipt test item : 2005-02-15  
Date of test : 2005-02-15 to 2005-02-22

### 1.5 Test item

Manufacturer : Applicant  
Marketing Name : iX104C2  
Model No. : iX104C2  
Description : [Tablet PC with GSM, BT & WLAN modules](#)  
FCC-ID : Q2GIX104-134  
IC ID : 4596A-IX104WBG

### Additional information

Test Sample ID : 03CW00a Troy  
Frequency : 824.2MHz – 848.8MHz for GSM 850,  
1850.2MHz – 1909.8MHz for PCS 1900  
Type of modulation : GMSK  
Number of channels : 124 for GSM-850, 299 for PCS-1900  
Antenna : Embedded  
Power supply : via host Tablet PC  
Output power : 22.07dBm (161.06mW) max. ERP measured in GSM-850  
28.66dBm (734.51mW) max. EIRP measured in PCS-1900  
Extreme temp. Tolerance : Lower: -30°C Upper: +50°C

### 1.6 Test standards

FCC Part 22, 24 / RSS 132,133 r1

Note: All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.

[The Tablet PC \(model# iX104C2\) carries pre-certified GSM module model# AC775 with FCC ID: N7NAC775](#)

[This test report covers full radiated testing as per FCC 22/24 on Tablet PC with GSM module. All conducted measurements are covered under test report# cond\\_testreport\\_GSM\\_AC775](#)

**2 Technical test****2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests Performed	
Final Verdict: (only "passed" if all single measurements are "passed")	<b>Passed</b>

**Technical responsibility for area of testing:**

2005-02-25    EMC & Radio    Lothar Schmidt (Manager)

**Date****Section****Name****Signature****Responsible for test report and project leader:**

2005-02-25    EMC & Radio    Harpreet Sidhu (EMC Engineer)

**Date****Section****Name****Signature**

## 2.2 Test report

**TEST REPORT**

**Test report no.: EMC\_848FCC22-24\_2005\_GSM\_134**

**TEST REPORT REFERENCE**

<b>PARAMETER TO BE MEASURED</b>	<b>PARAGRAPH</b>	<b>PAGE</b>
<b>POWER OUTPUT</b>	<b>§ 22.913(a) / § 24.232 (b)</b>	<b>7</b>
<b>EMISSION LIMITS TRANSMITTER</b>	<b>§2.1051 / §24.238</b>	<b>16</b>
<b>RECEIVER RADIATED EMISSIONS</b>	<b>§ 2.1053 / RSS-133</b>	<b>43</b>
<b>CONDUCTED EMISSIONS</b>	<b>§ 15.107/207</b>	<b>49</b>
<b>TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS</b>		<b>50</b>
<b>BLOCK DIAGRAMS</b>		<b>51</b>

**POWER OUTPUT****§ 22.913(a) / § 24.232 (b)****Summary:**

During the process of testing, the EUT was controlled via Rhode & Schwarz Universal Radio Communication tester (CMU 200) to ensure max. Power transmission and proper modulation.

This paragraph contains average output power, peak output power, EIRP & ERP measurements for the EUT. In all cases, the peak output power is within the specified limits.

**Method of Measurements:**

The EUT was set up for the max. Output power with pseudo random data modulation.

The power was measured with R&S Spectrum Analyzer ESIB 40 (peak)

These measurements were done at 3 frequencies,

824.2 MHz, 836.6 MHz and 848.8 MHz (bottom, middle and top of operational frequency range) for GSM-850

1850.2 MHz, 1880.0 MHz and 1909.8 MHz (bottom, middle and top of operational frequency range) for PCS-1900

ERP (GSM-850)

§22.913(a)

**Limits:**

Power Control Level	Burst Peak ERP
5	≤38.45dBm (7W)

**EIRP**


Frequency (MHz)	Power Control Level	Burst Peak (dBm)	
		EIRP	ERP
824.2	5	21.20	19.06
836.6	5	23.57	21.43
848.8	5	24.21	22.07
Measurement uncertainty		±0.5 dB	

ANALYZER SETTINGS: RBW = VBW = 3MHz




**EIRP (GSM-850)**  
**CHANNEL 128**


**§22.913(a)**

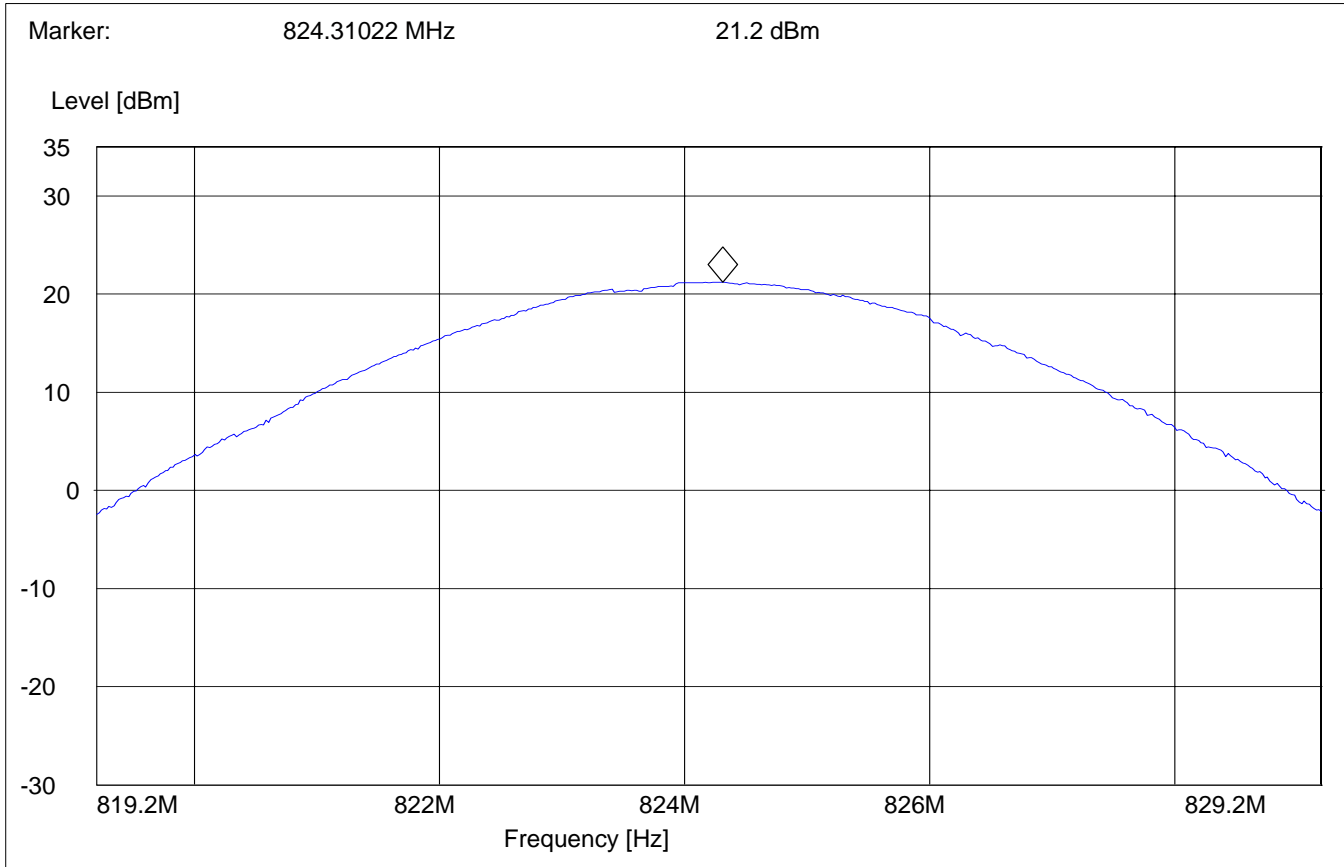

**EIRP (GSM-850) §22.913(a)**  
**CHANNEL 190**

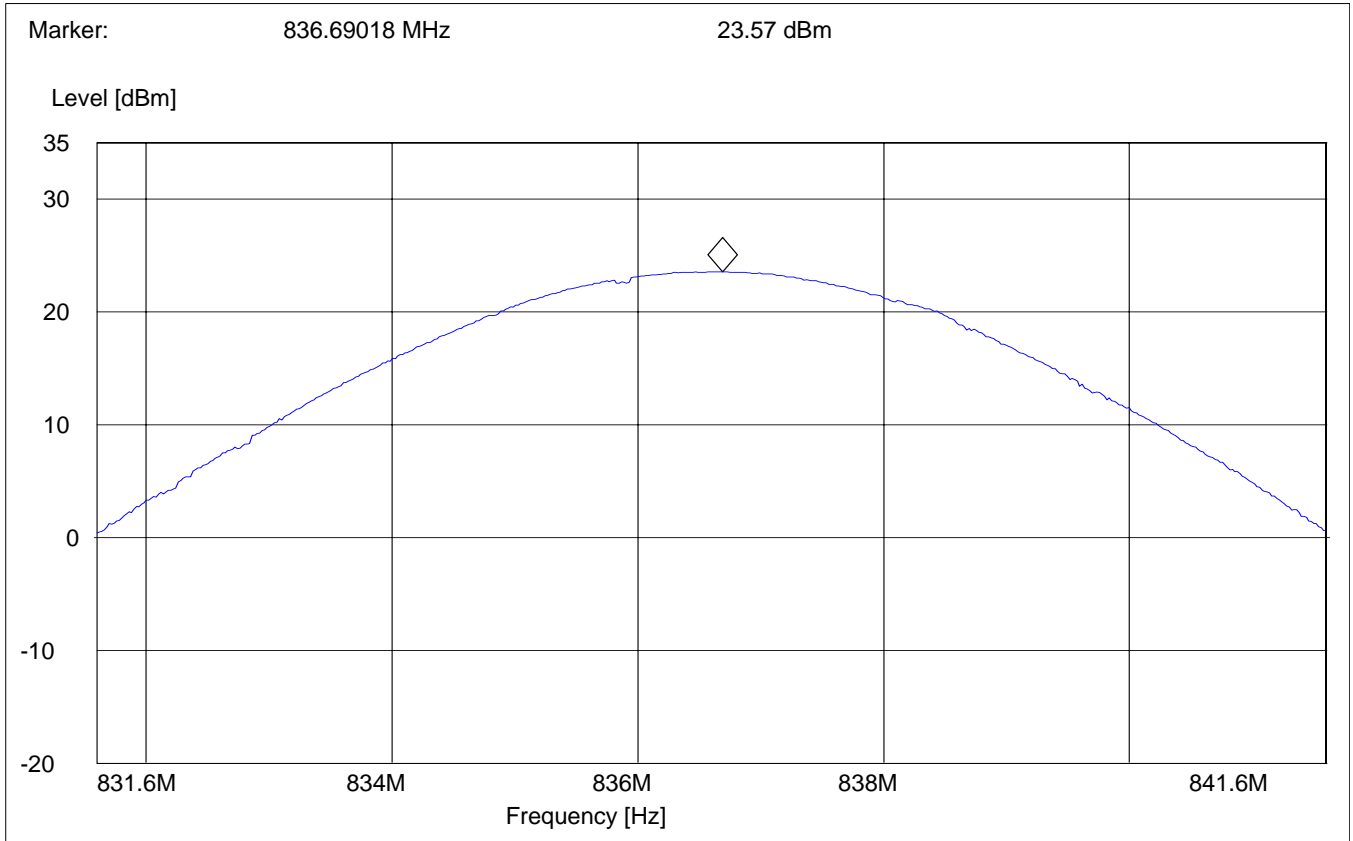

**EIRP (GSM-850) §22.913(a)**  
**CHANNEL 251**

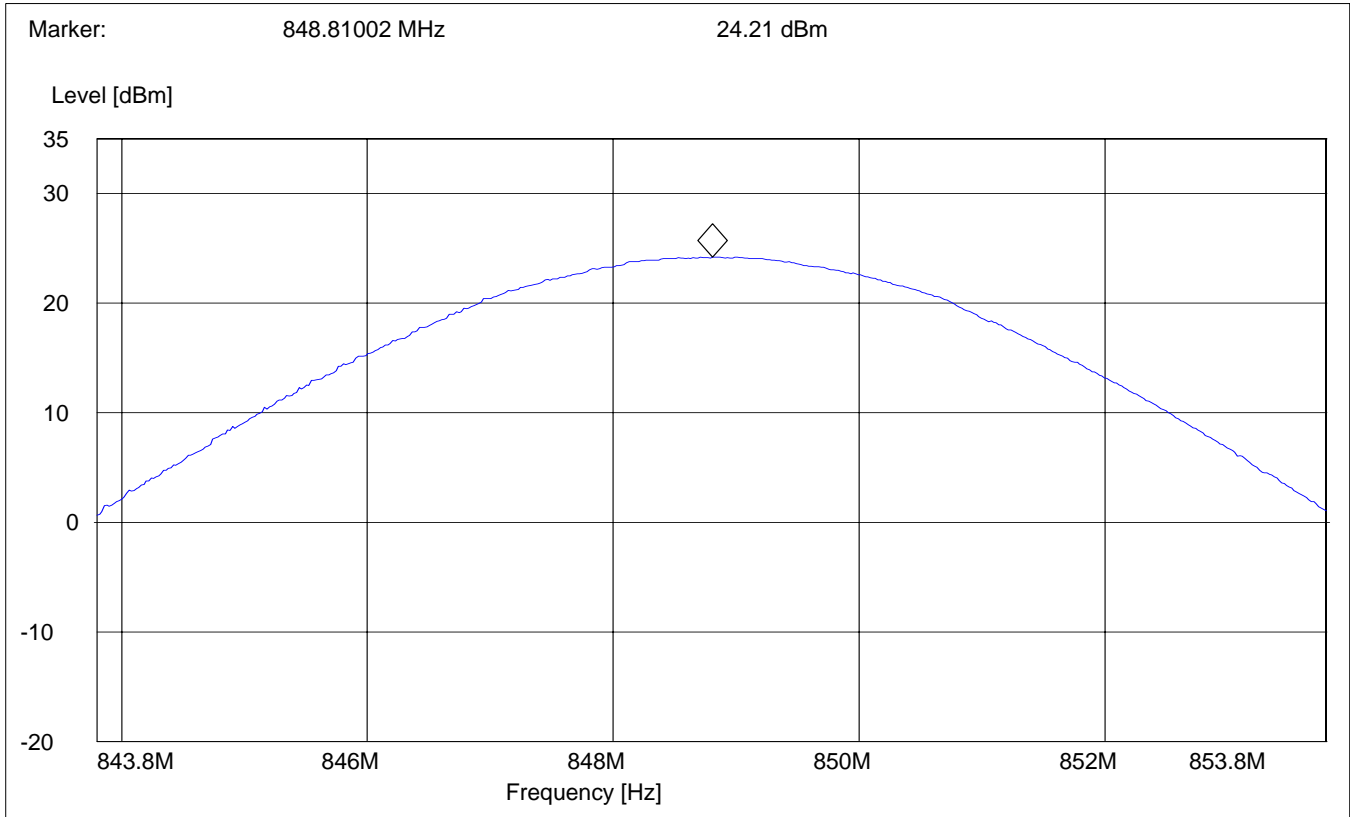

**EIRP (PCS-1900) §24.232(b)****Limits:**

<b>Power Control Level</b>	<b>Burst Peak EIRP</b>
<b>0</b>	<b>≤33dBm (1W)</b>


**EIRP**

<b>Frequency (MHz)</b>	<b>Power Control Level</b>	<b>Burst Peak (dBm)</b>
		<b>EIRP</b>
<b>1850.2</b>	<b>0</b>	<b>27.56</b>
<b>1880.0</b>	<b>0</b>	<b>28.66</b>
<b>1909.8</b>	<b>0</b>	<b>26.76</b>
<b>Measurement uncertainty</b>		<b>±0.5 dB</b>


ANALYZER SETTINGS: RBW = VBW = 3MHz

**EIRP (PCS-1900)  
CHANNEL 512**


**§24.232(b)**

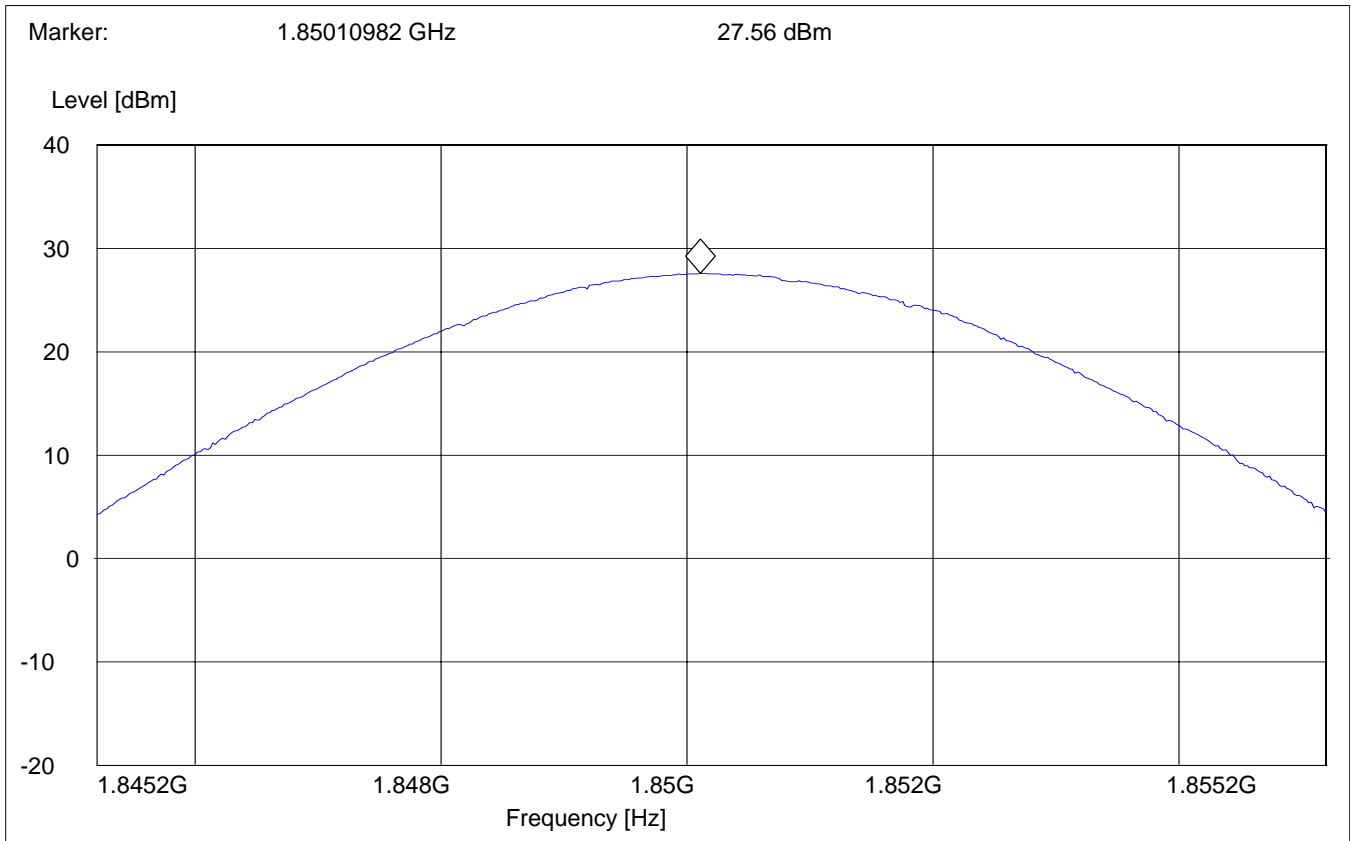

**EIRP (PCS-1900) §24.232(b)**  
**CHANNEL 661**

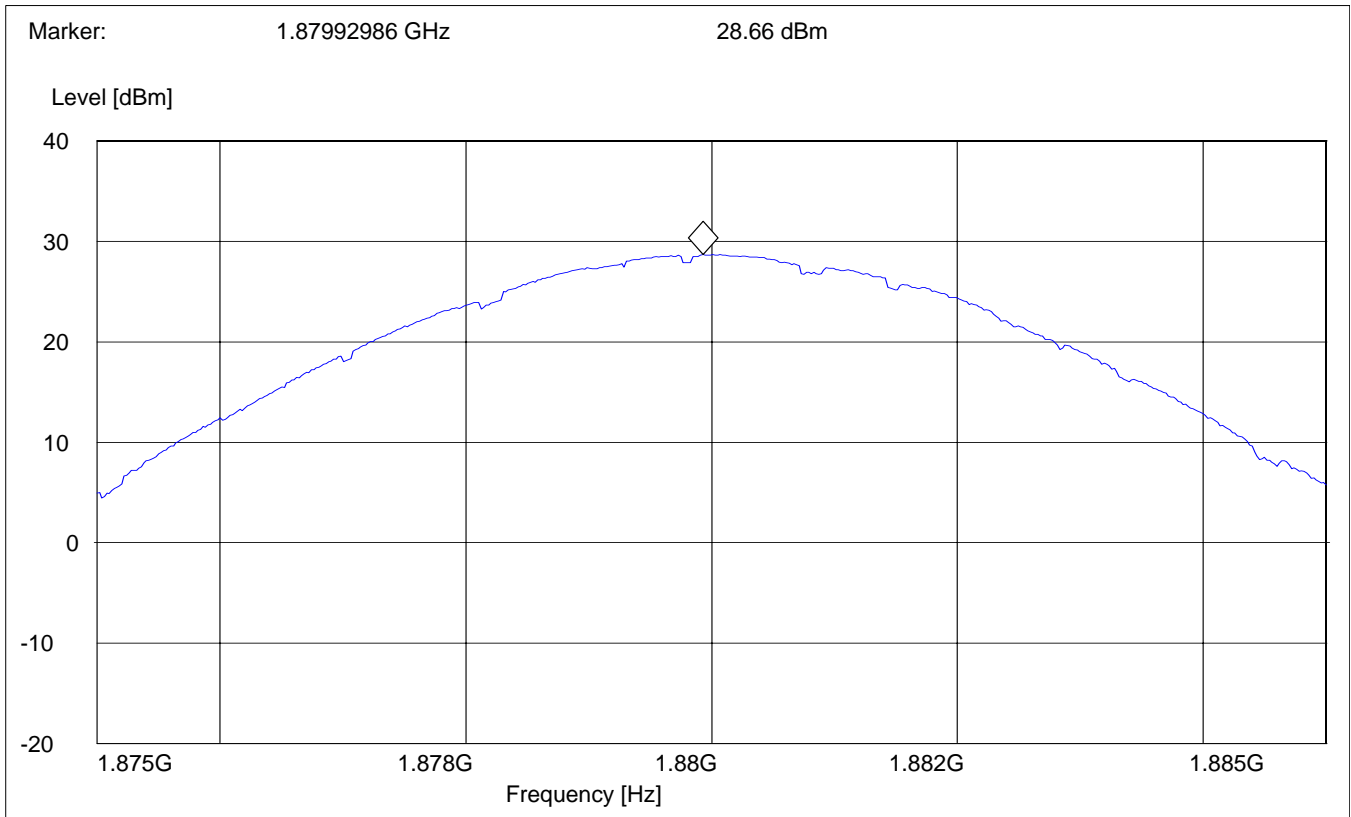

**EIRP (PCS-1900) §24.232(b)**  
**CHANNEL 810**

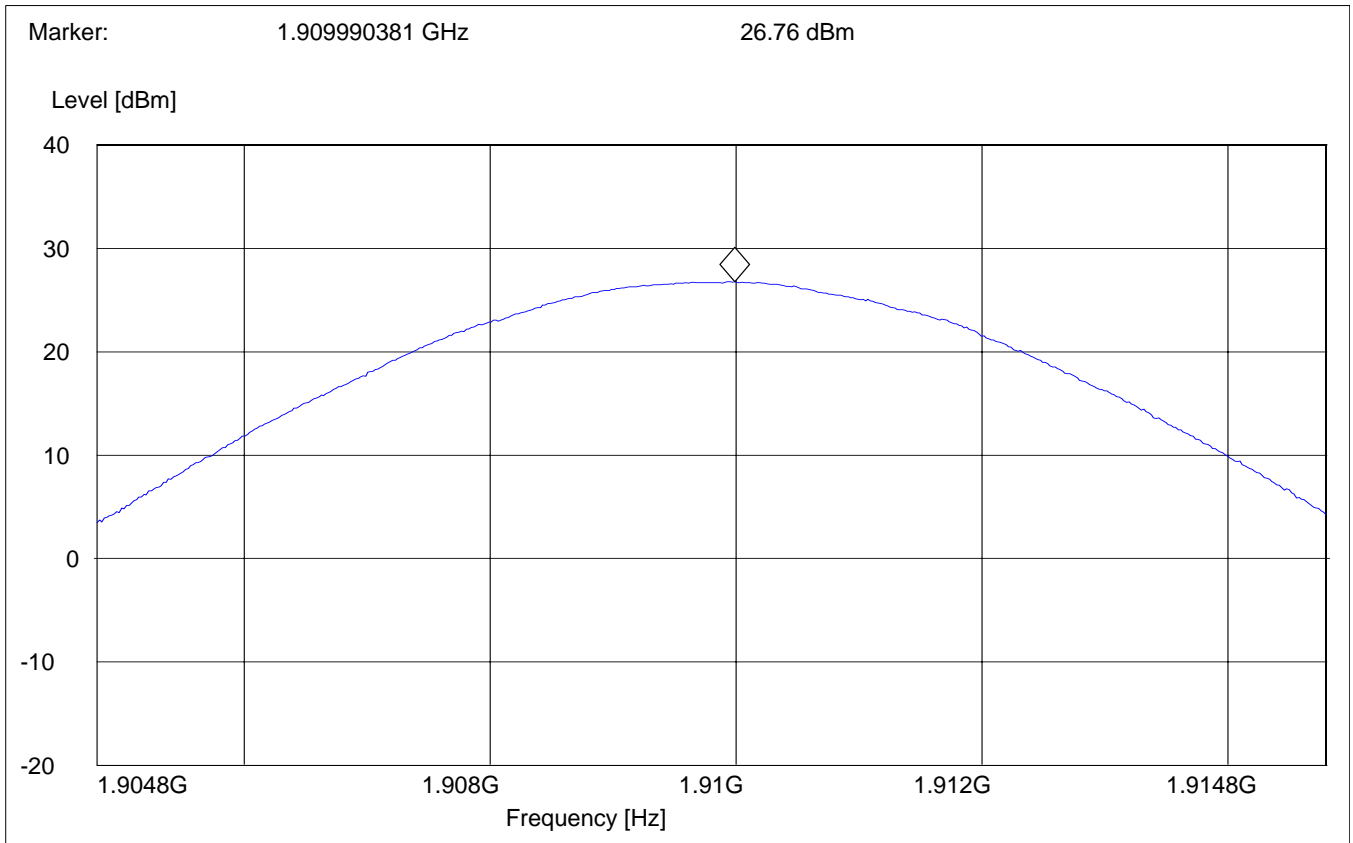

**EMISSION LIMITS TRANSMITTER****§2.1051 / §24.238****Measurement Procedure:**

The following steps outline the procedure used to measure the radiated emissions from the EUT. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognised by the FCC. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 848.8MHz for GSM-850 & 1910 MHz for PCS-1900. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the GSM-850 & PCS-1900 bands.

**The final Radiated emission test procedure is as follows:**

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50-ohm load.
- c) A double-ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was determined by the substitution method described for ERP measurements.

**Measurement Limit:**

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43 + 10 \log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**Measurement Results:**

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the GSM-850 & PCS-1900 bands. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the GSM-850 & PCS-1900 band into any of the other blocks respectively. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.



**RESULTS OF RADIATED TESTS GSM-850:**

<b>Harmonics</b>	<b>Tx ch-128 Freq. (MHz)</b>	<b>Level (dBm)</b>	<b>Tx ch-190 Freq. (MHz)</b>	<b>Level (dBm)</b>	<b>Tx ch-251 Freq. (MHz)</b>	<b>Level (dBm)</b>
<b>2</b>	<b>1648.4</b>	<b>-37.78</b>	<b>1673.2</b>	<b>-40.36</b>	<b>1697.6</b>	<b>-45.67</b>
<b>3</b>	<b>2472.6</b>	<b>-35.87</b>	<b>2509.8</b>	<b>-36.20</b>	<b>2546.4</b>	<b>-36.27</b>
<b>4</b>	<b>3296.8</b>	<b>-46.39</b>	<b>3346.4</b>	<b>-46.13</b>	<b>3395.2</b>	<b>-48.09</b>
<b>5</b>	<b>4121</b>	<b>-58.79</b>	<b>4183</b>	<b>-56.96</b>	<b>4244</b>	<b>nf</b>
<b>6</b>	<b>4945.2</b>	<b>-53.57</b>	<b>5019.6</b>	<b>-49.30</b>	<b>5092.8</b>	<b>nf</b>
<b>7</b>	<b>5769.4</b>	<b>-45.36</b>	<b>5856.2</b>	<b>-45.82</b>	<b>5941.6</b>	<b>nf</b>
<b>8</b>	<b>6593.6</b>	<b>nf</b>	<b>6692.8</b>	<b>nf</b>	<b>6790.4</b>	<b>nf</b>
<b>9</b>	<b>7417.8</b>	<b>nf</b>	<b>7529.4</b>	<b>nf</b>	<b>7639.2</b>	<b>nf</b>
<b>10</b>	<b>8242</b>	<b>nf</b>	<b>8366</b>	<b>nf</b>	<b>8488</b>	<b>nf</b>

**nf: noise floor**

**RADIATED SPURIOUS EMISSIONS (GSM-850)**

**Tx @ 824.2MHz: 30MHz - 1GHz**

Spurious emission limit -13dBm


**Antenna: vertical**

**SWEEP TABLE: "FCC 22 Spur 30M-1G"**

Start	Stop	Detector	Meas. Time	RBW/VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz

**Note:**

- 1.The peak above the limit line is the carrier freq.
- 2.This plot is valid for low, mid & high channels (worst-case plot)

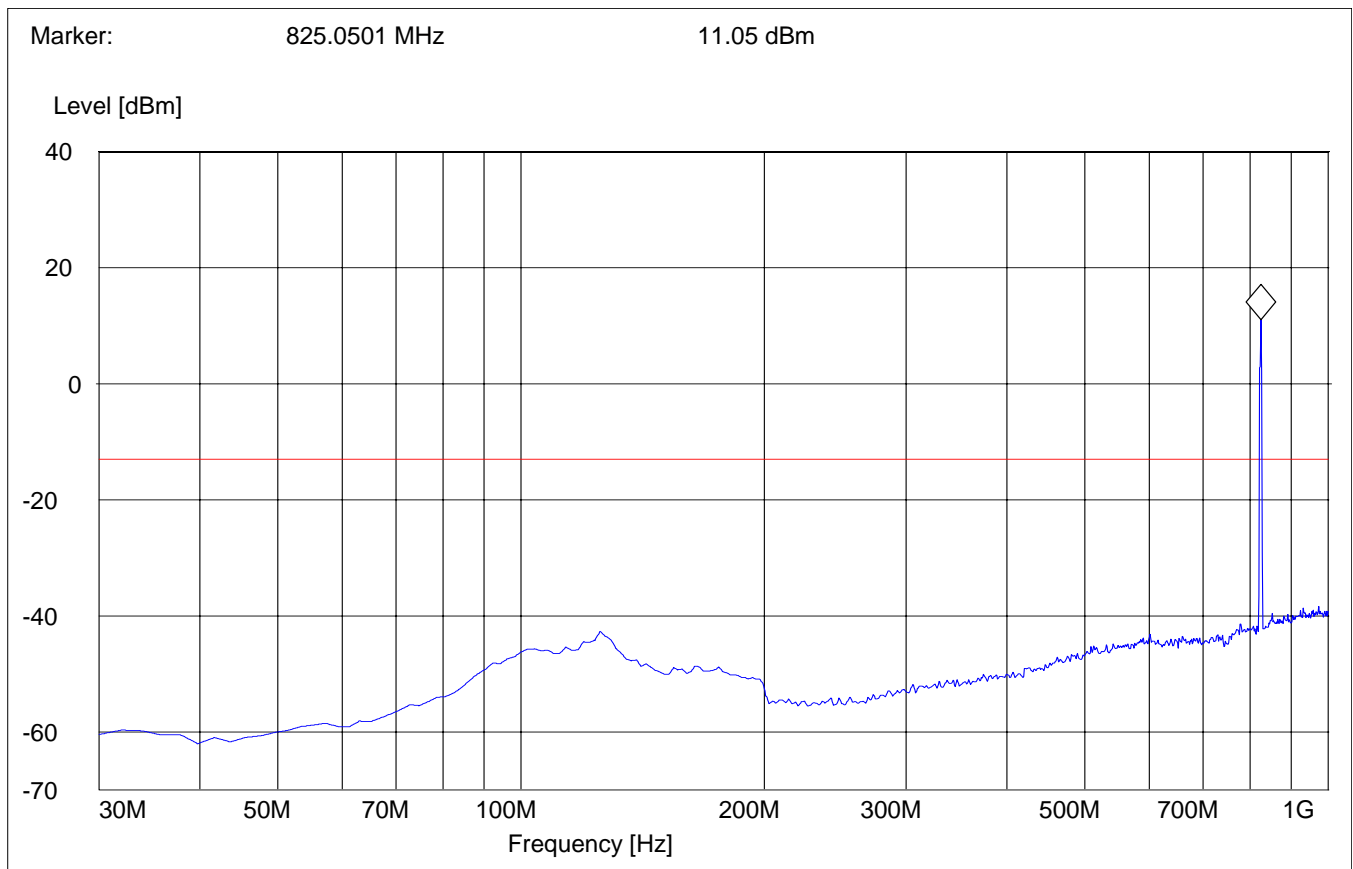

**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 824.2MHz: 30MHz - 1GHz**


Spurious emission limit -13dBm

**Antenna: horizontal****SWEEP TABLE: "FCC 22 Spur 30M-1G"**

Start	Stop	Detector	Meas. Time	RBW/VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz

**Note:**

- 1.The peak above the limit line is the carrier freq.
- 2.This plot is valid for low, mid & high channels (worst-case plot)

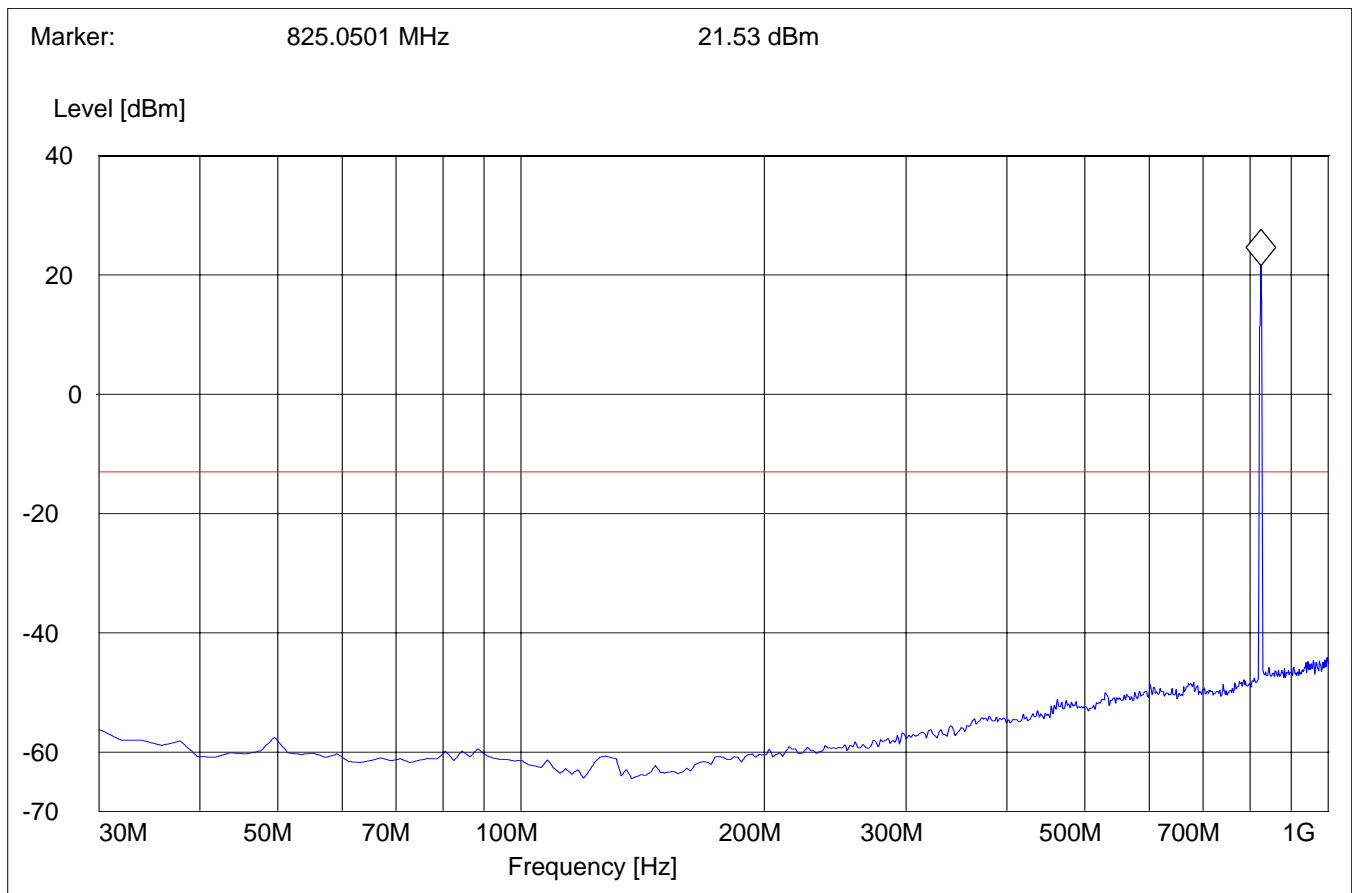


**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 824.2MHz: 1GHz – 1.58GHz**

Spurious emission limit -13dBm

**SWEEP TABLE: "FCC 22 Spur 1-1.58G"**

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency	Time		
1GHz	1.58GHz	Max Peak	Coupled	1 MHz

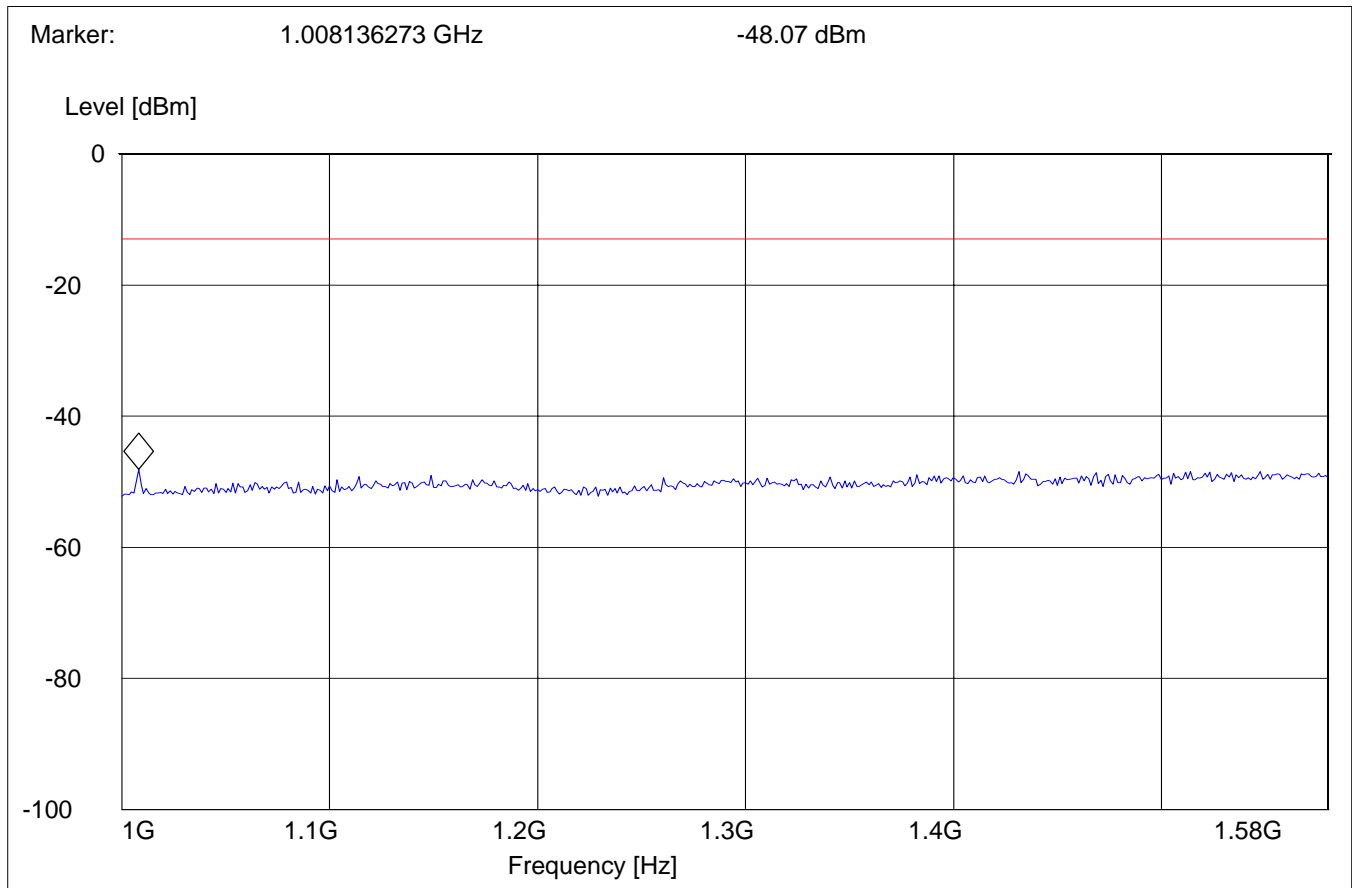


**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 824.2MHz: 1.58GHz – 3GHz**

Spurious emission limit -13dBm

**SWEEP TABLE: "FCC 22 Spur 1.58-3G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
1.58GHz	3GHz	Max Peak	Coupled	1 MHz

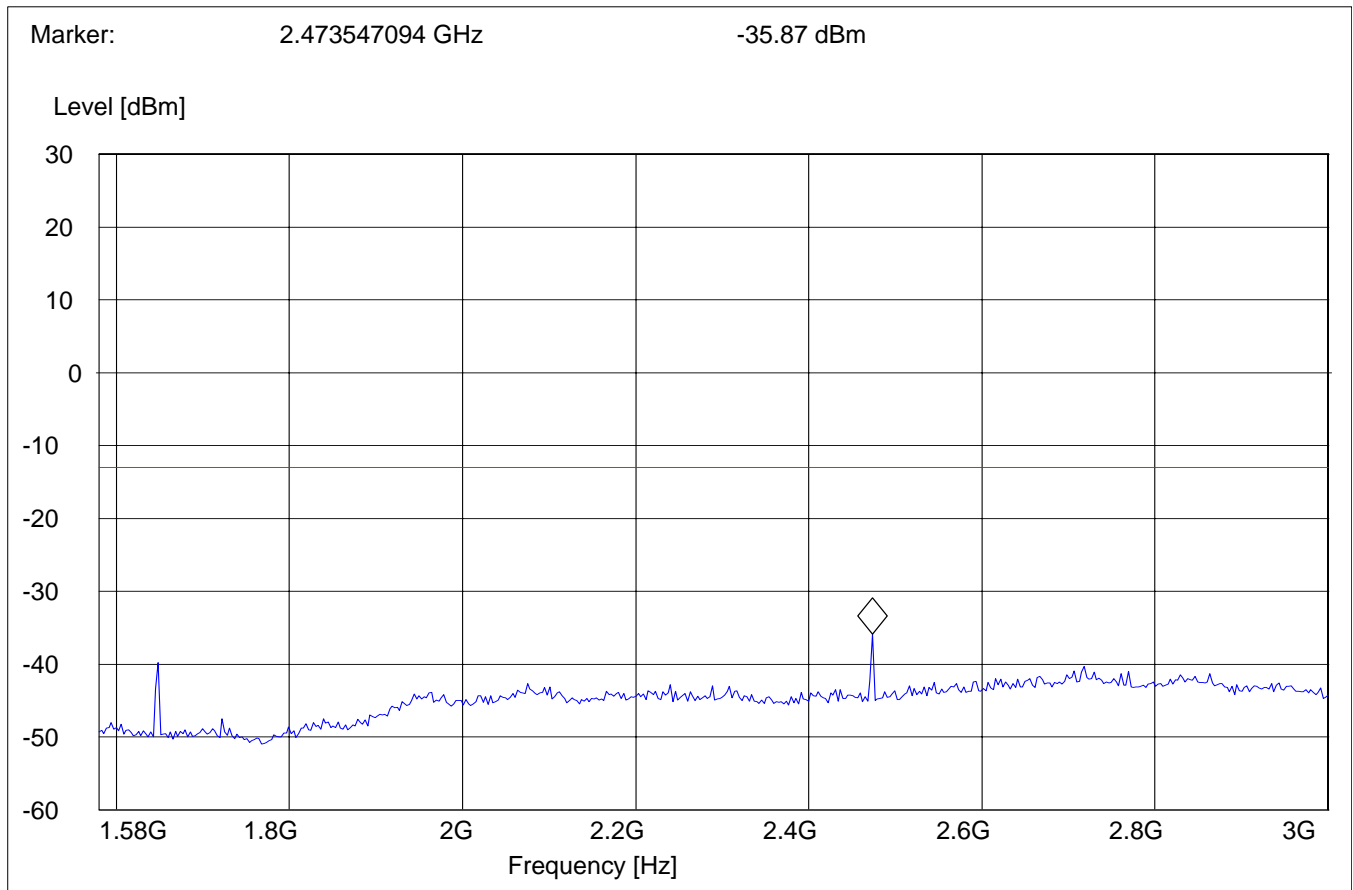


**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 824.2MHz: 3GHz – 9GHz**

Spurious emission limit -13dBm

**SWEEP TABLE: "FCC 22 Spur 3-9G"**

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency		Time	
3GHz	9GHz	Max Peak	Coupled	1 MHz

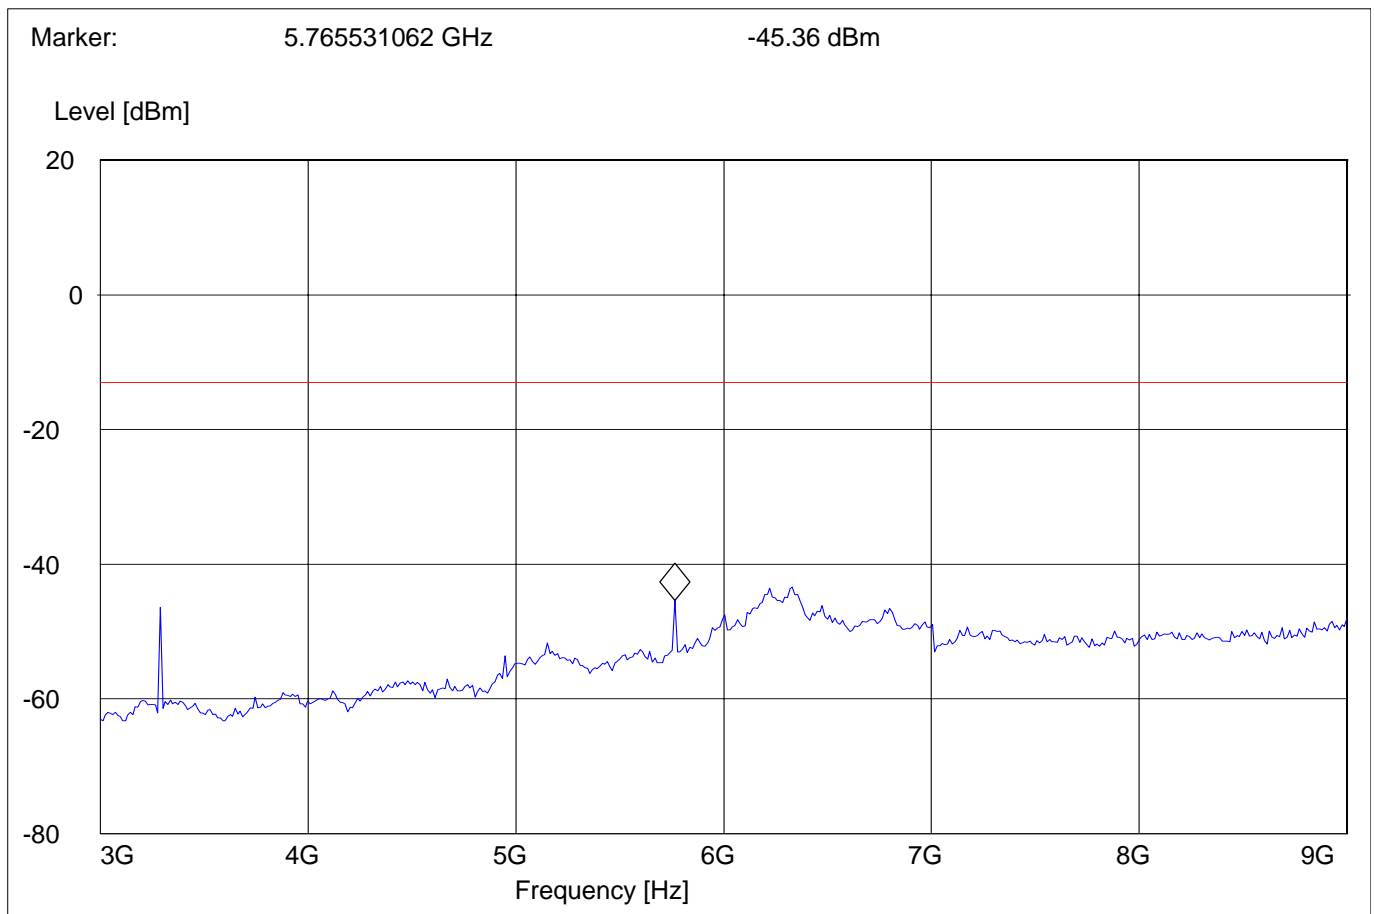


**RADIATED SPURIOUS EMISSIONS (GSM-850)**

**Tx @ 836.6MHz: 1GHz – 1.58GHz**

Spurious emission limit -13dBm

**SWEEP TABLE: "FCC 22 Spur 1-1.58G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
1GHz	1.58GHz	Max Peak	Coupled	1 MHz

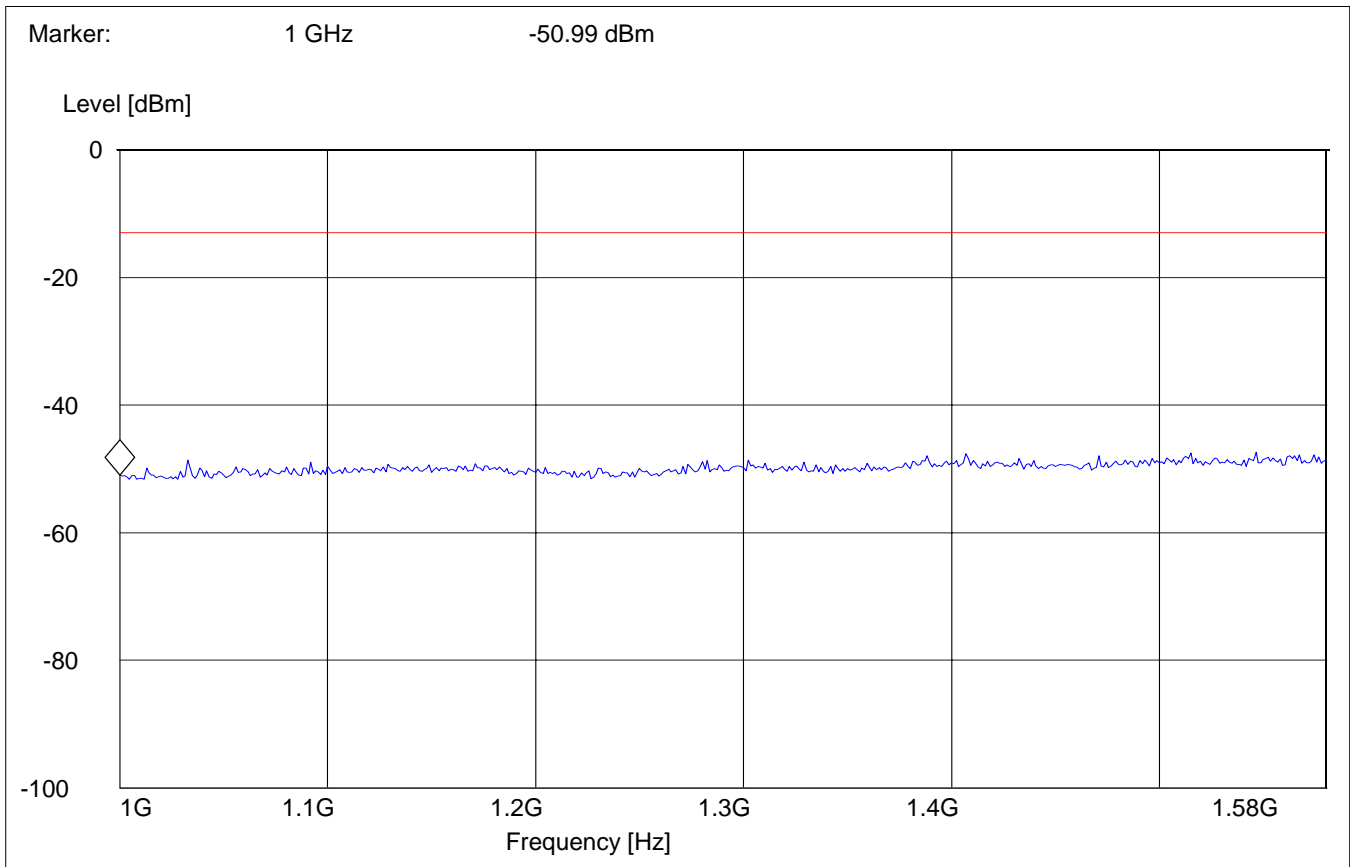


**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 836.6MHz: 1.58GHz – 3GHz**

Spurious emission limit -13dBm

**SWEEP TABLE: "FCC 22 Spur 1.58-3G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
1.58GHz	3GHz	Max Peak	Coupled	1 MHz

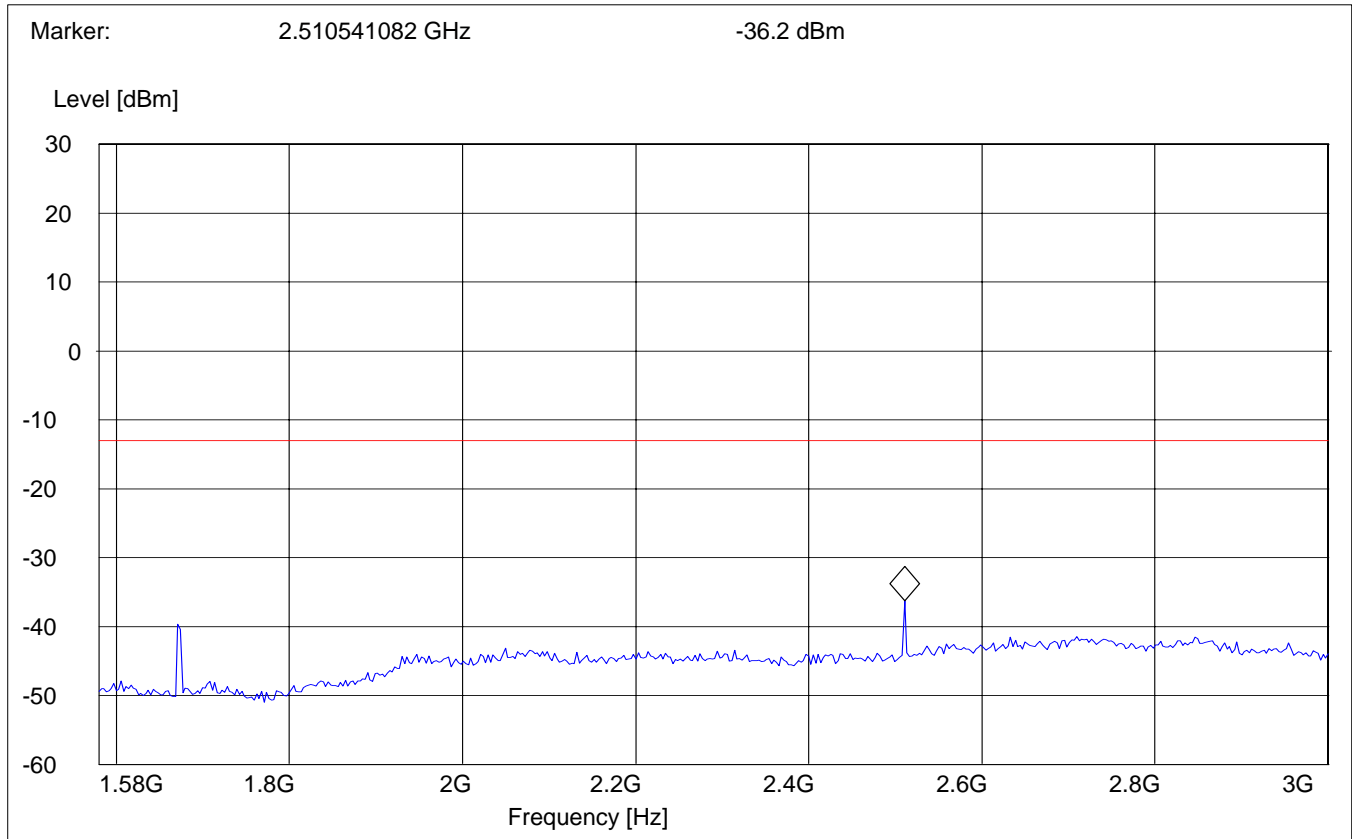




**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 836.6MHz: 3GHz – 9GHz**

Spurious emission limit -13dBm

**SWEEP TABLE: "FCC 22 Spur 3-9G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
3GHz	9GHz	Max Peak	Coupled	1 MHz

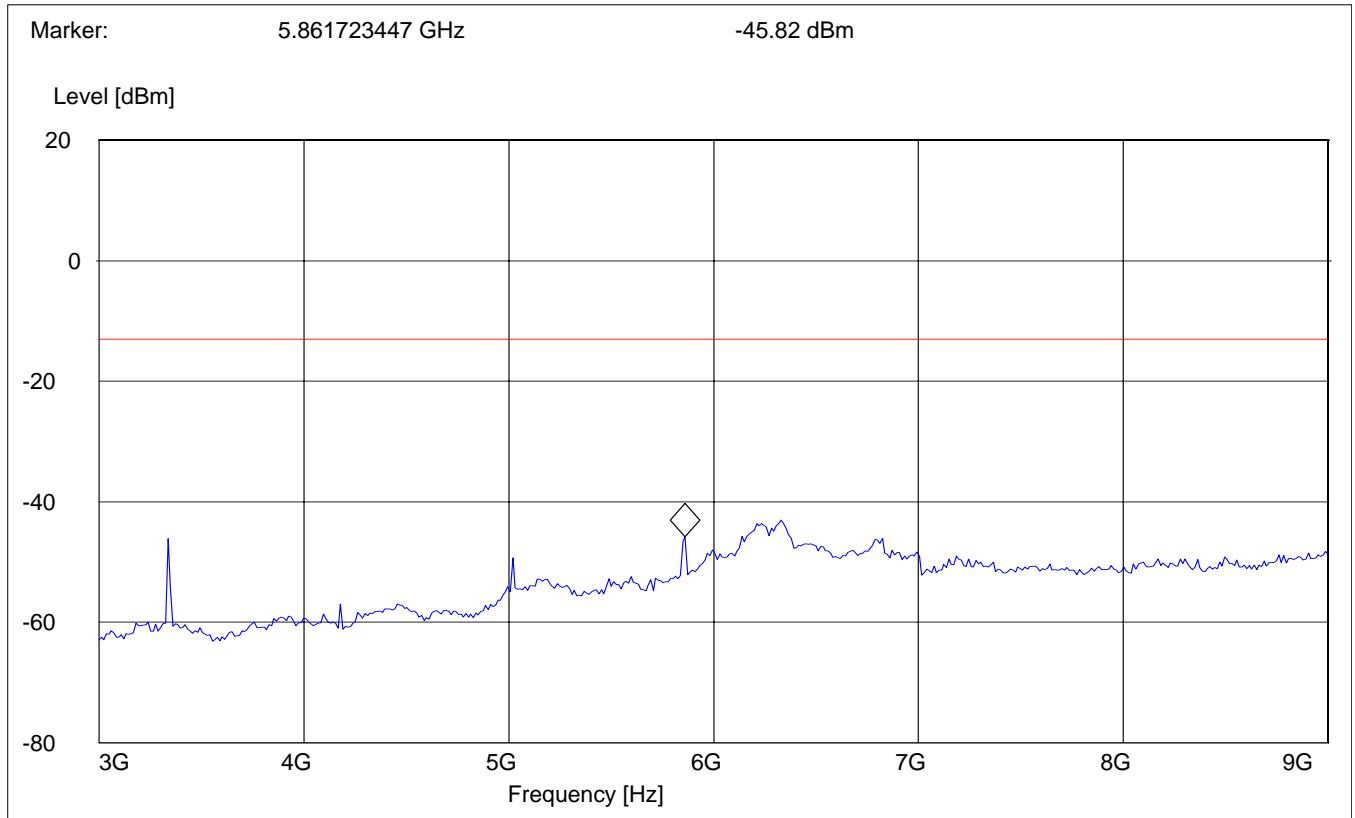


**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 848.8MHz: 1GHz – 1.58GHz**

Spurious emission limit -13dBm

**SWEEP TABLE: "FCC 22 Spur 1-1.58G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
1GHz	1.58GHz	Max Peak	Coupled	1 MHz

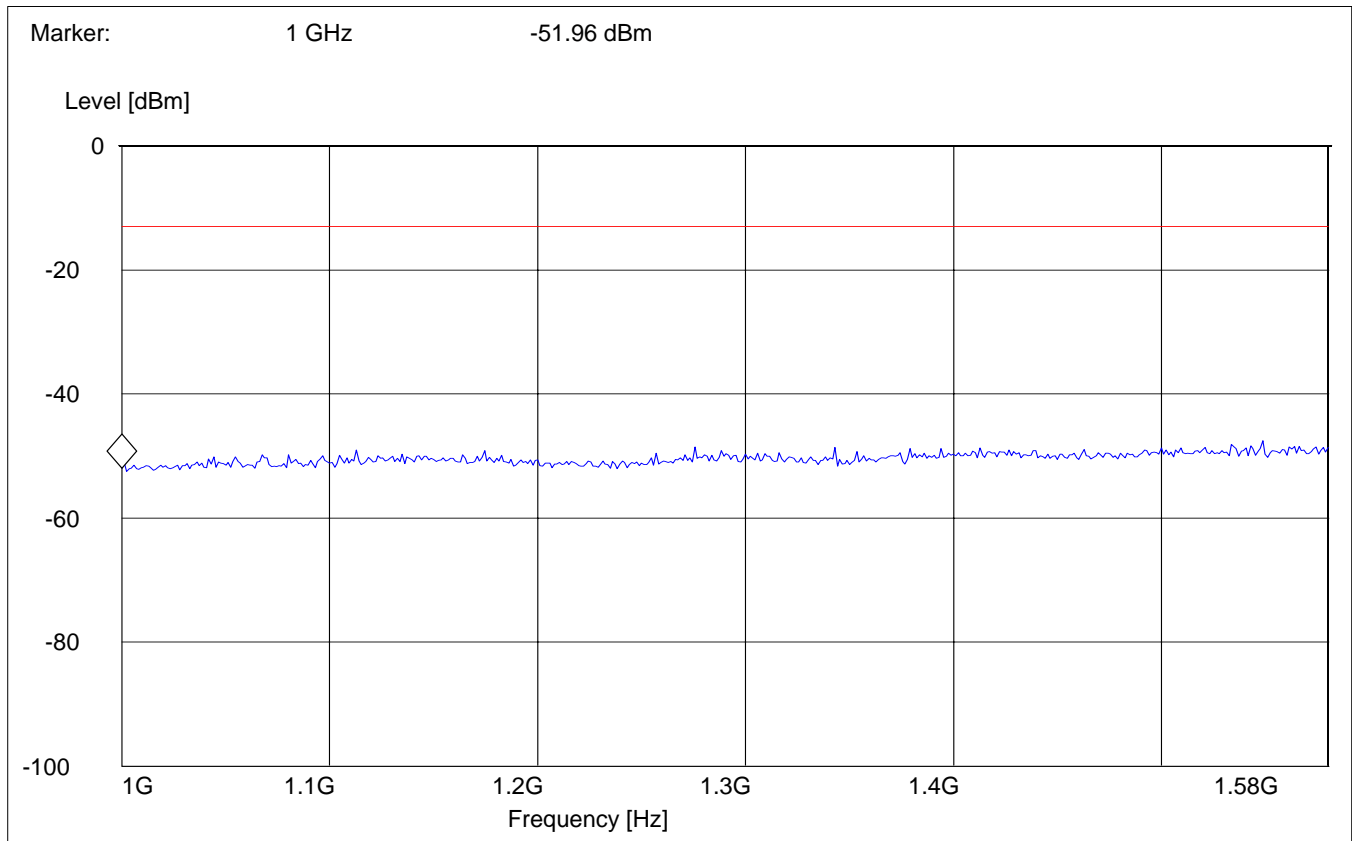


**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 848.8MHz: 1.58GHz – 3GHz**

Spurious emission limit -13dBm

**SWEEP TABLE: "FCC 22 Spur 1.58-3G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
1.58GHz	3GHz	Max Peak	Coupled	1 MHz

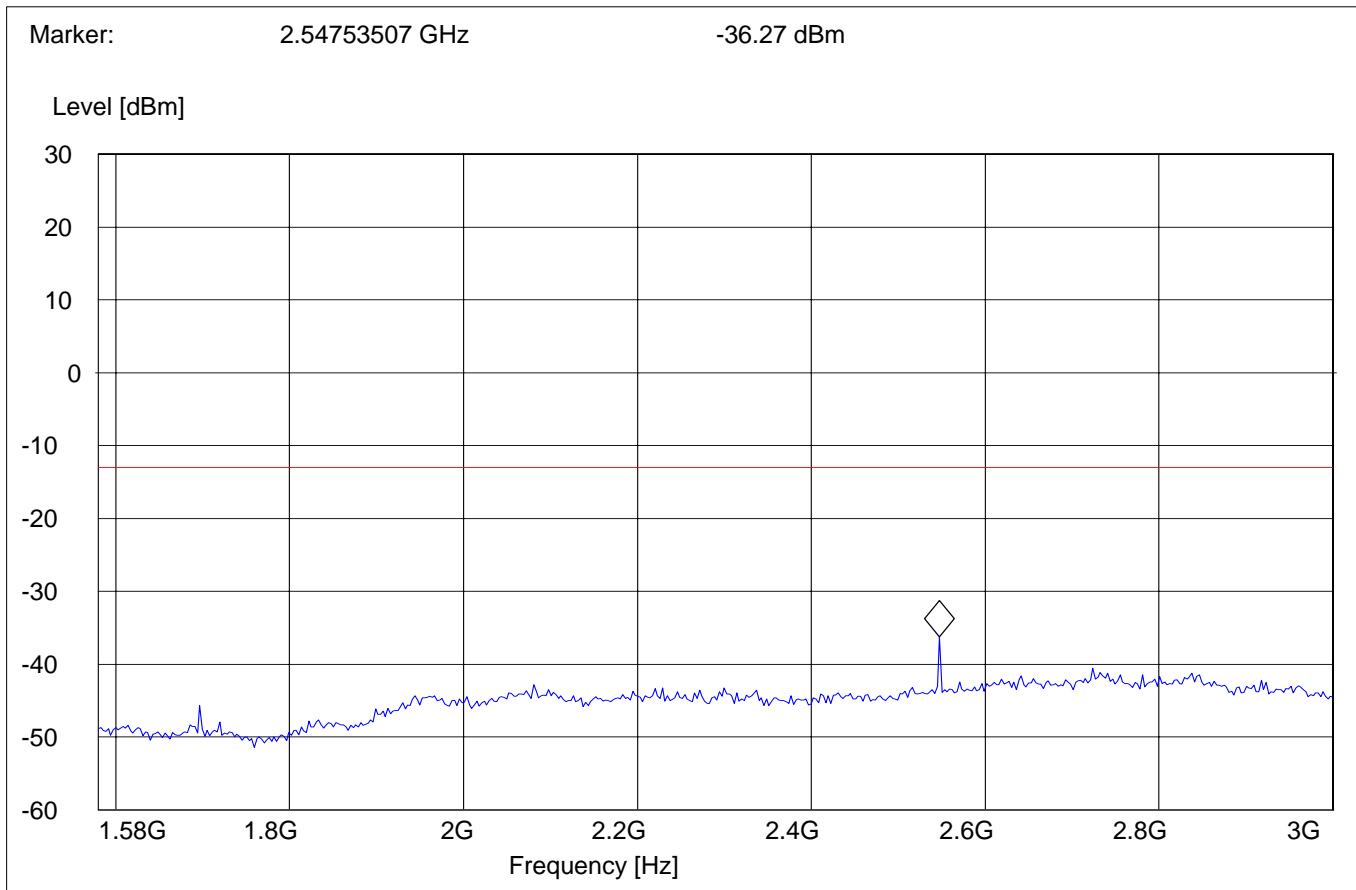


**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 848.8MHz: 3GHz – 9GHz**

Spurious emission limit -13dBm

**SWEEP TABLE: "FCC 22 Spur 3-9G"**

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency		Time	
3GHz	9GHz	Max Peak	Coupled	1 MHz

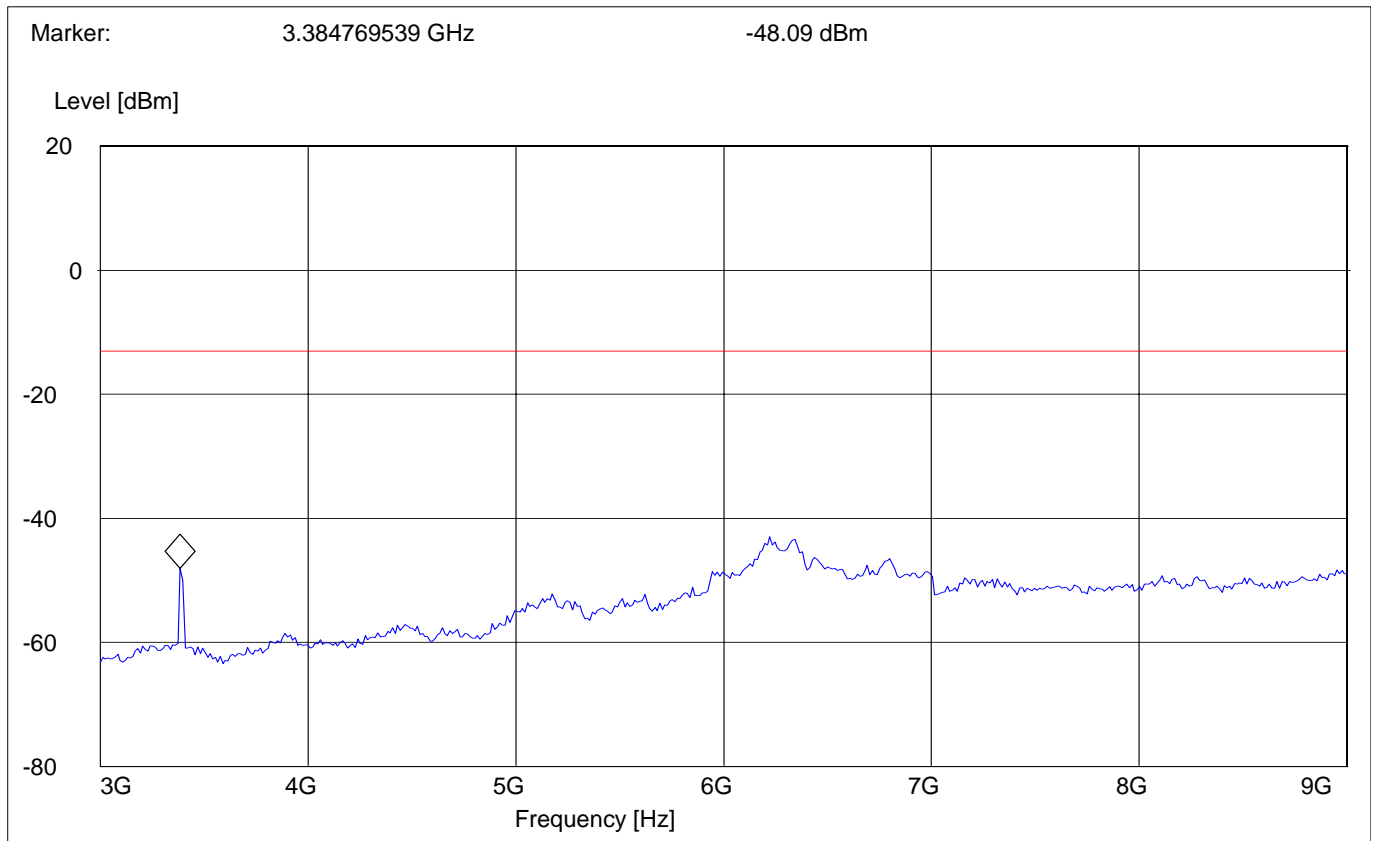

**RESULTS OF RADIATED TESTS PCS-1900:**

<b>Harmonic</b>	<b>Tx ch-512 Freq.(MHz)</b>	<b>Level (dBm)</b>	<b>Tx ch-661 Freq. (MHz)</b>	<b>Level (dBm)</b>	<b>Tx ch-810 Freq. (MHz)</b>	<b>Level (dBm)</b>
<b>2</b>	<b>3700.4</b>	-38.52	<b>3760</b>	-46.02	<b>3819.6</b>	-38.19
<b>3</b>	<b>5550.6</b>	-50.03	<b>5640</b>	-41.08	<b>5729.4</b>	-38.09
<b>4</b>	<b>7400.8</b>	-51.3	<b>7520</b>	-51.65	<b>7639.2</b>	-51.85
<b>5</b>	<b>9251</b>	-45.75	<b>9400</b>	-45.15	<b>9549</b>	-46.28
<b>6</b>	<b>11101.2</b>	-45.72	<b>11280</b>	-45.10	<b>11458.8</b>	-45.77
<b>7</b>	<b>12951.4</b>	-45.73	<b>13160</b>	-47.0	<b>13368.6</b>	-46.10
<b>8</b>	<b>14801.6</b>	-46.80	<b>15040</b>	-47.36	<b>15278.4</b>	-46.48
<b>9</b>	<b>16651.8</b>	-42.57	<b>16920</b>	-43.23	<b>17188.2</b>	-38.87
<b>10</b>	<b>18502</b>	-34.42	<b>18800</b>	-34.55	<b>19098</b>	-34.06

**RADIATED SPURIOUS EMISSIONS**

**Tx @ 1850.2MHz: 30MHz - 1GHz**


Spurious emission limit -13dBm

**Antenna: vertical**

**SWEEP TABLE: "FCC 24 Spur 30M-1G"**

Start	Stop	Detector	Meas. Time	RBW/VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz

**Note: This plot is valid for low, mid & high channels (worst-case plot)**

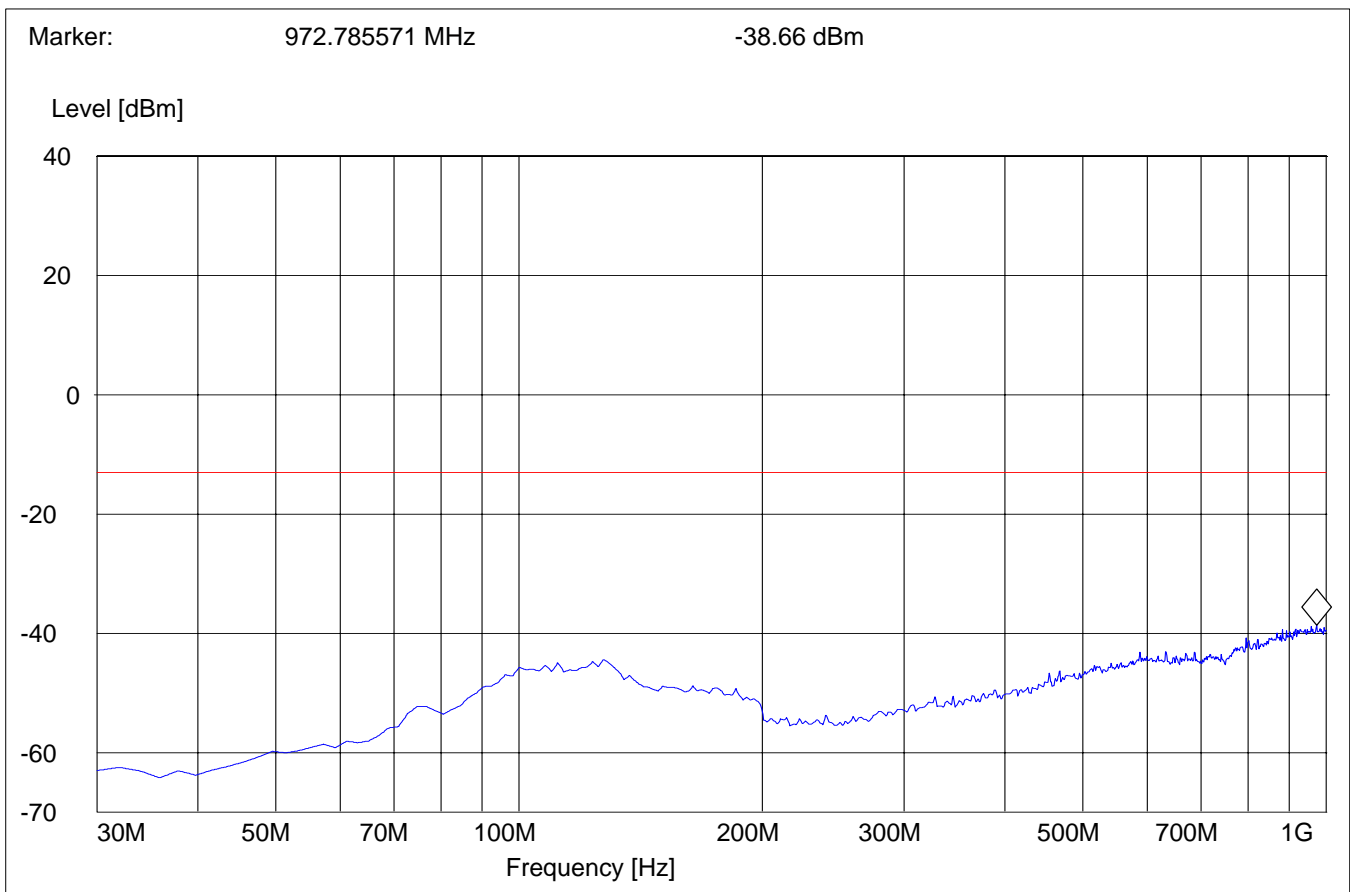

**RADIATED SPURIOUS EMISSIONS**

**Tx @ 1850.2MHz: 30MHz - 1GHz**


Spurious emission limit -13dBm

**Antenna: horizontal**

**SWEEP TABLE: "FCC 24 Spur 30M-1G"**

Start	Stop	Detector	Meas. Time	RBW/VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz

**Note: This plot is valid for low, mid & high channels (worst-case plot)**

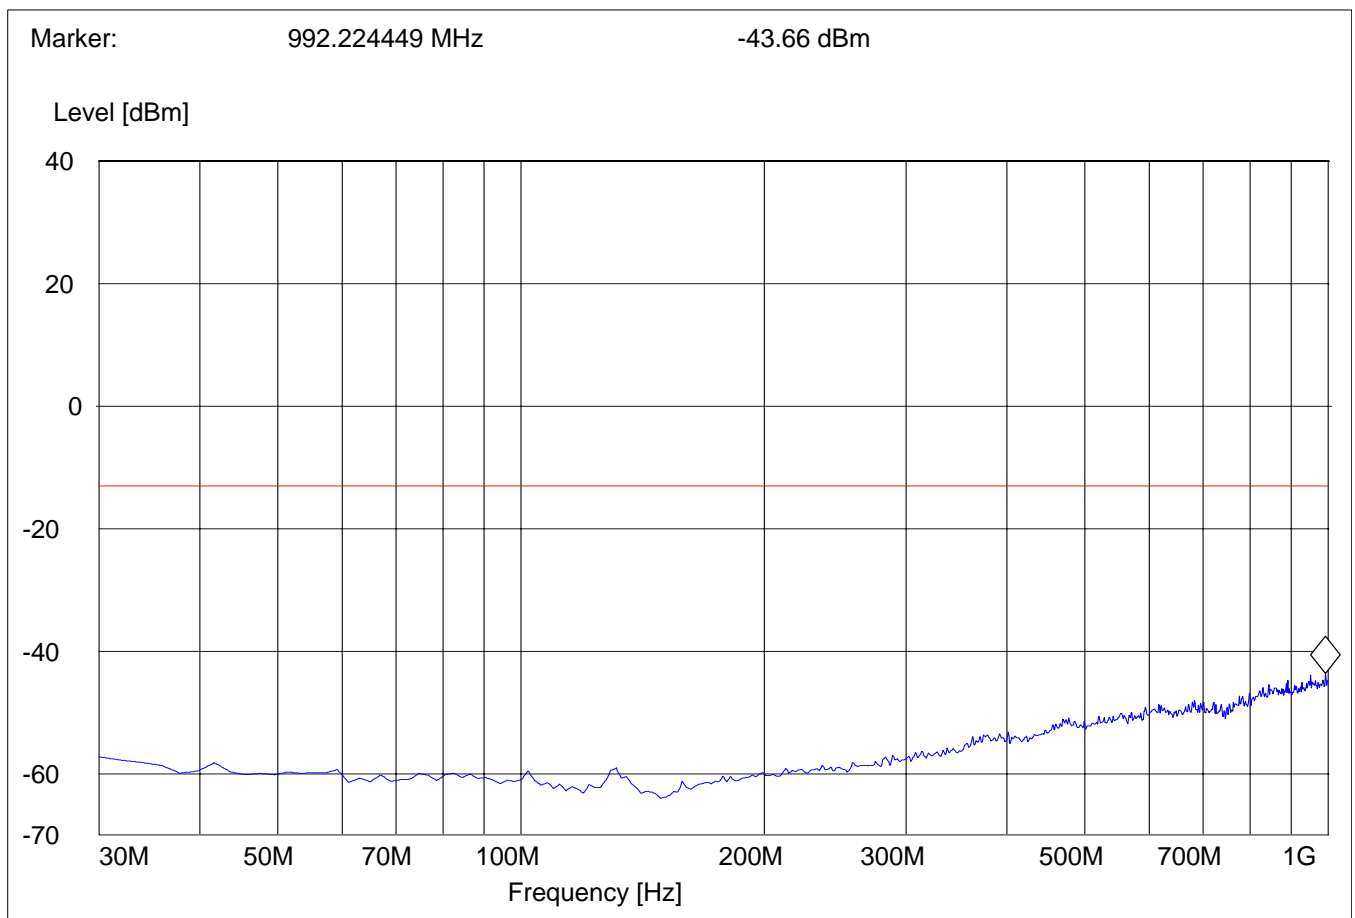

**RADIATED SPURIOUS EMISSIONS**


**Tx @ 1850.2MHz: 1GHz – 3GHz**

Spurious emission limit -13dBm

**SWEEP TABLE: "FCC Spuri 1-3G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz

Note: The peak above the limit line is the carrier freq. at ch-512.

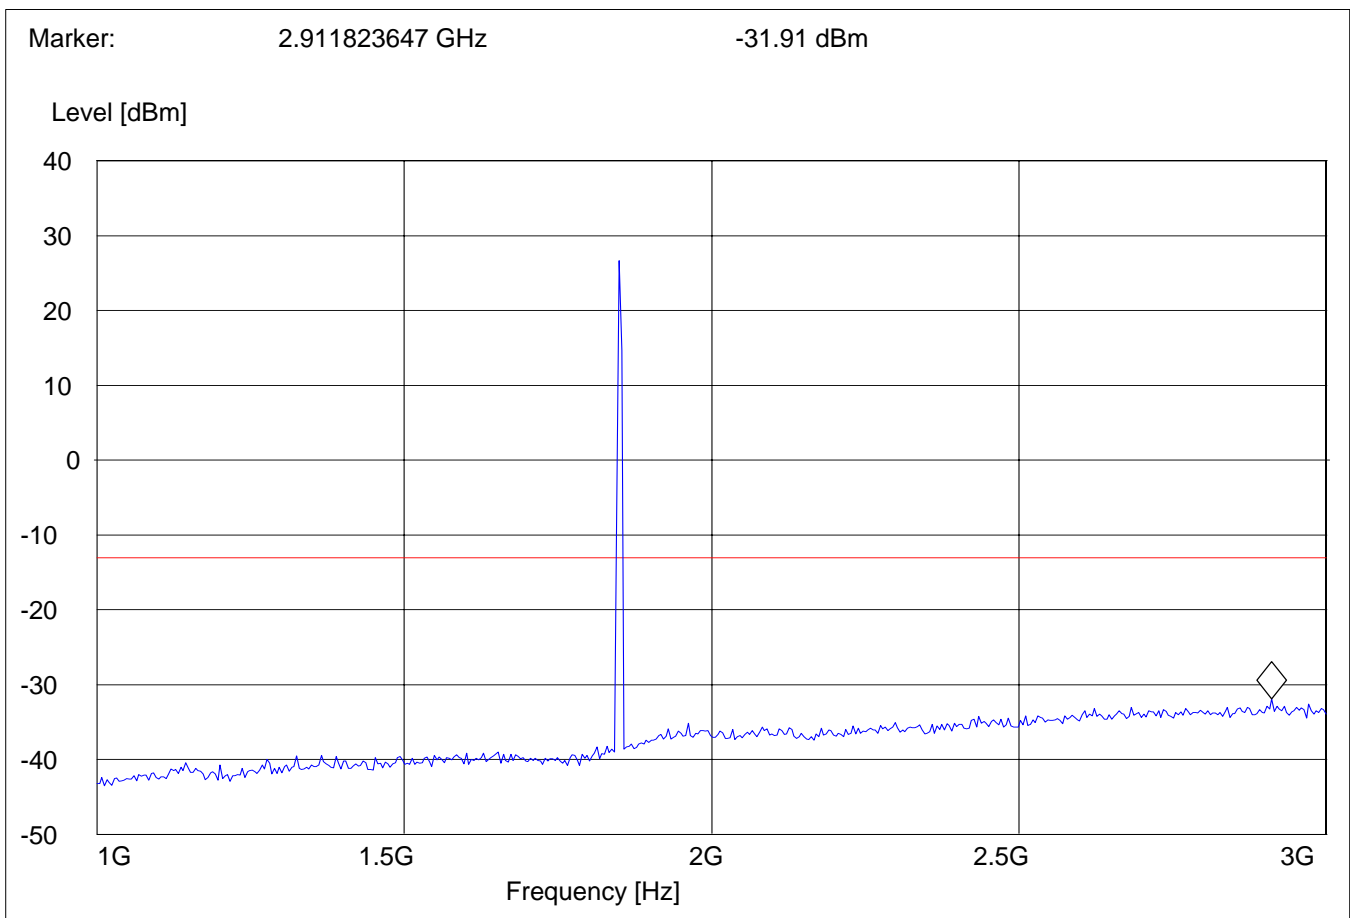




**RADIATED SPURIOUS EMISSIONS****Tx @ 1850.2MHz: 3GHz – 18GHz**

Spurious emission limit -13dBm

**SWEEP TABLE: "FCC Spuri 3-18G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz

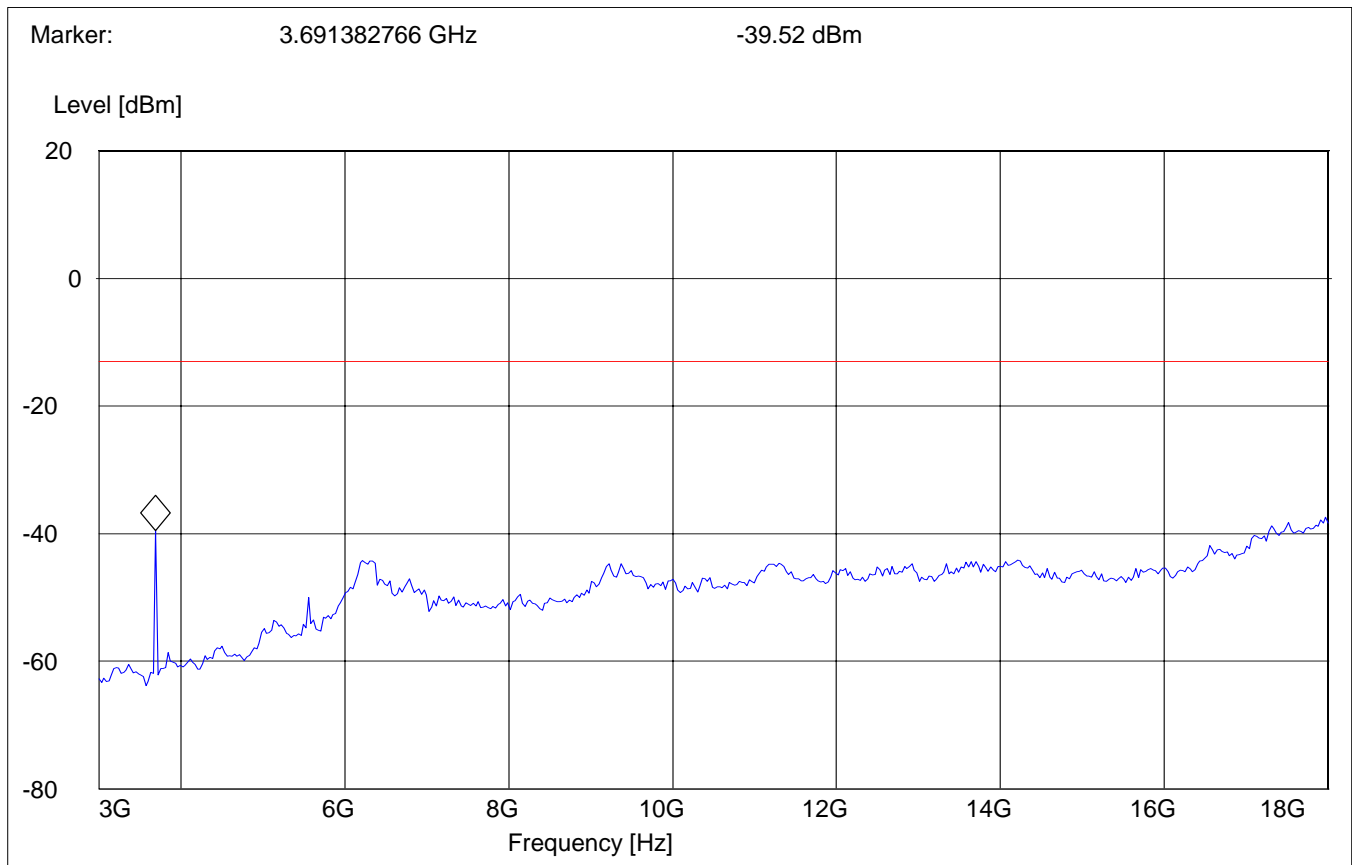


**RADIATED SPURIOUS EMISSIONS****Tx @ 1880MHz: 1GHz – 3GHz**

Spurious emission limit -13dBm

**SWEEP TABLE: "FCC Spuri 1-3G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz

Note: The peak above the limit line is the carrier freq. at ch-661.

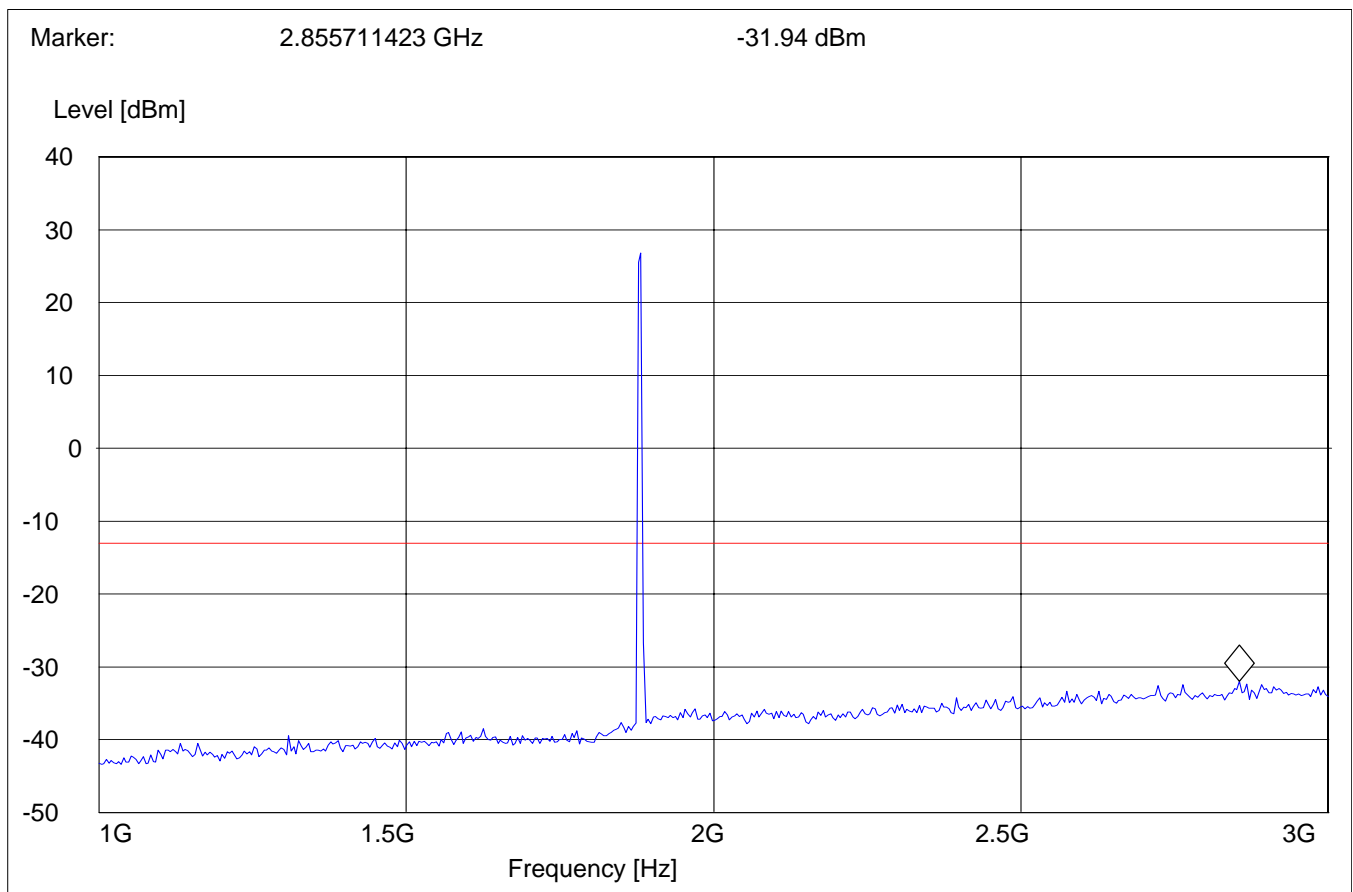


**RADIATED SPURIOUS EMISSIONS**

**Tx @ 1880MHz: 3GHz – 18GHz**

Spurious emission limit -13dBm

**SWEEP TABLE: "FCC Spuri 3-18G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz

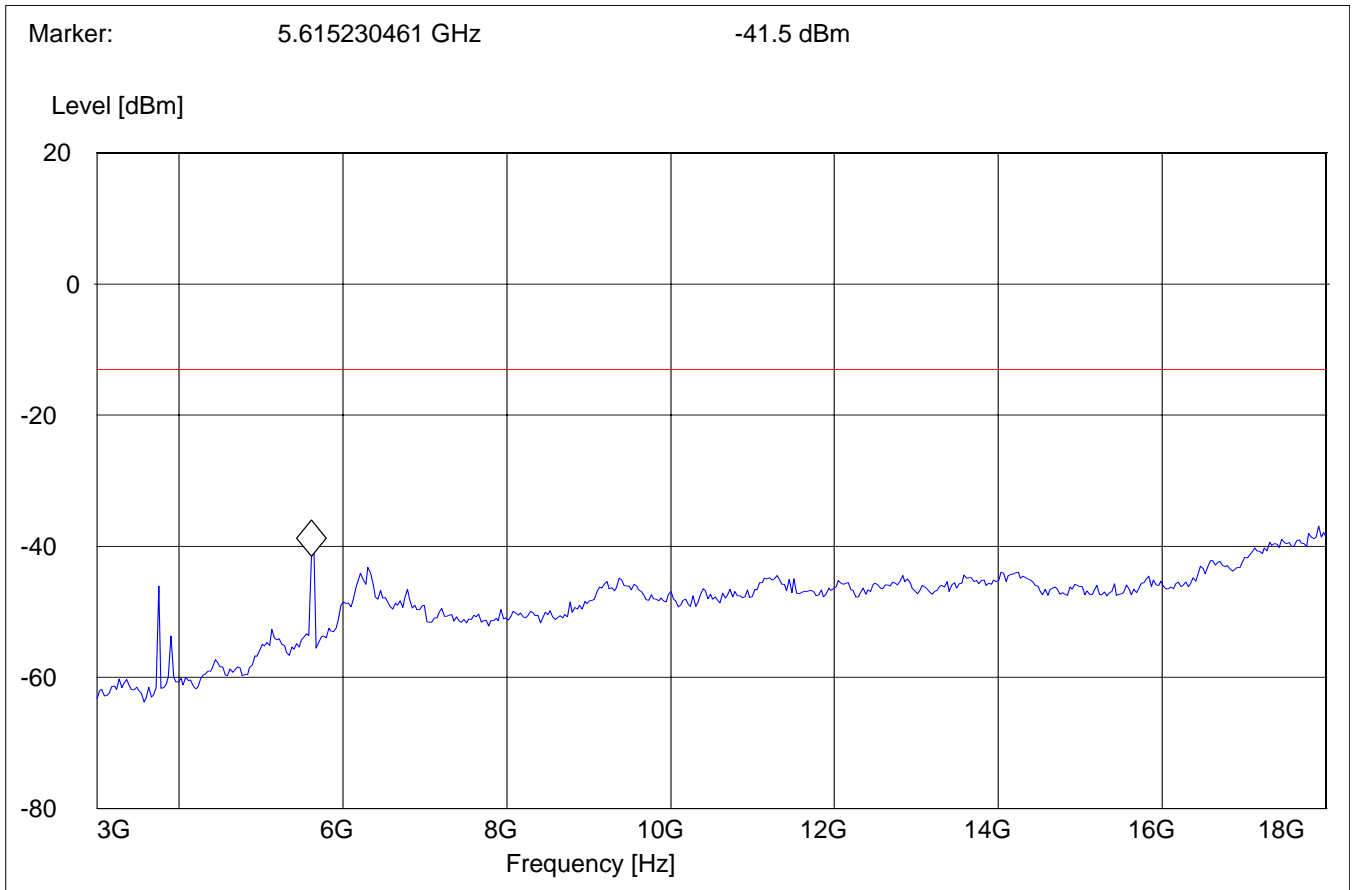


**RADIATED SPURIOUS EMISSIONS****Tx @ 1909.8MHz: 1GHz – 3GHz**

Spurious emission limit -13dBm

**SWEEP TABLE: "FCC Spuri 1-3G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz

Note: The peak above the limit line is the carrier freq. at ch-810.

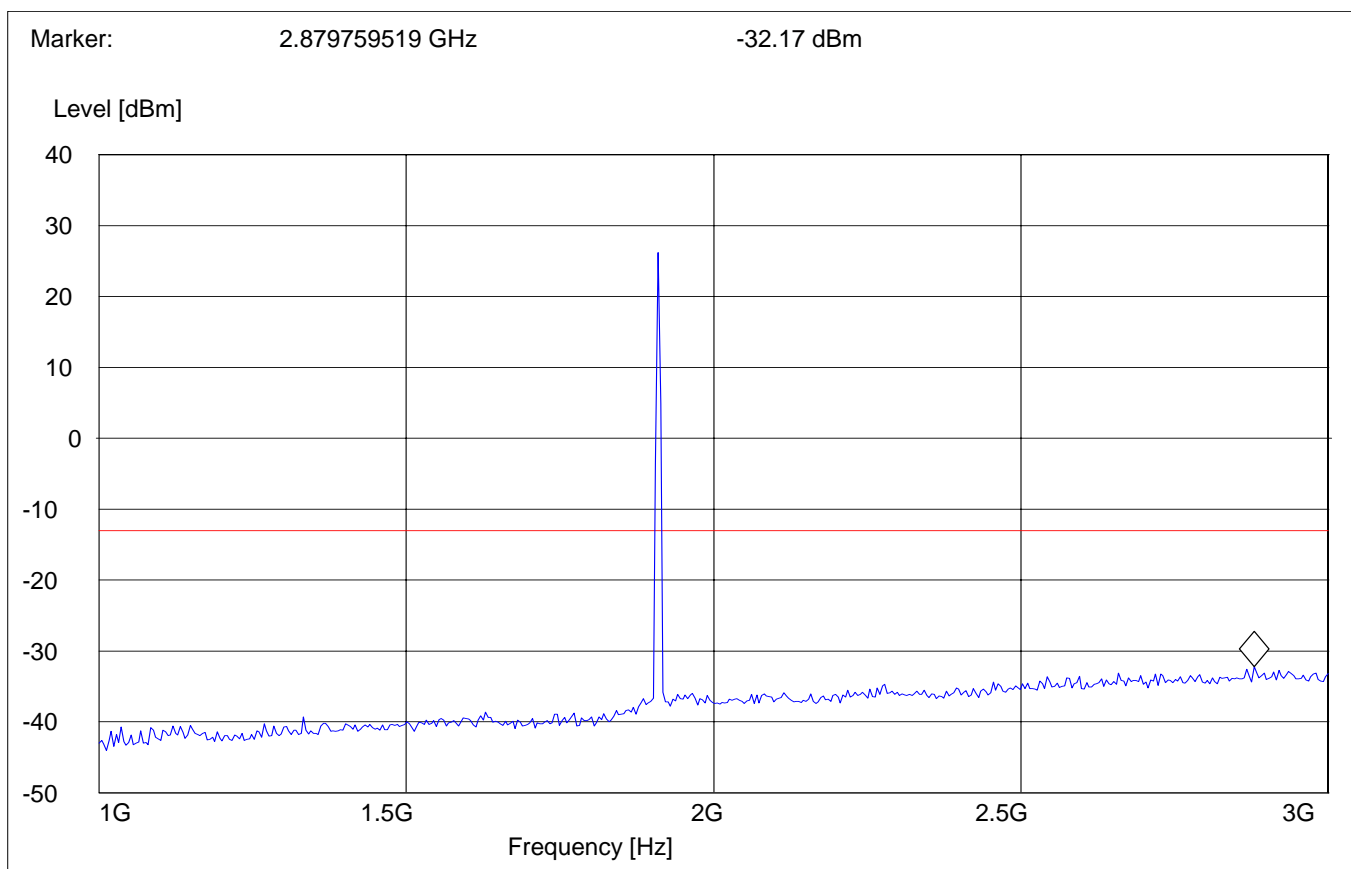


**RADIATED SPURIOUS EMISSIONS****Tx @ 1909.8MHz: 3GHz – 18GHz**

Spurious emission limit -13dBm

**SWEEP TABLE: "FCC Spuri 3-18G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz

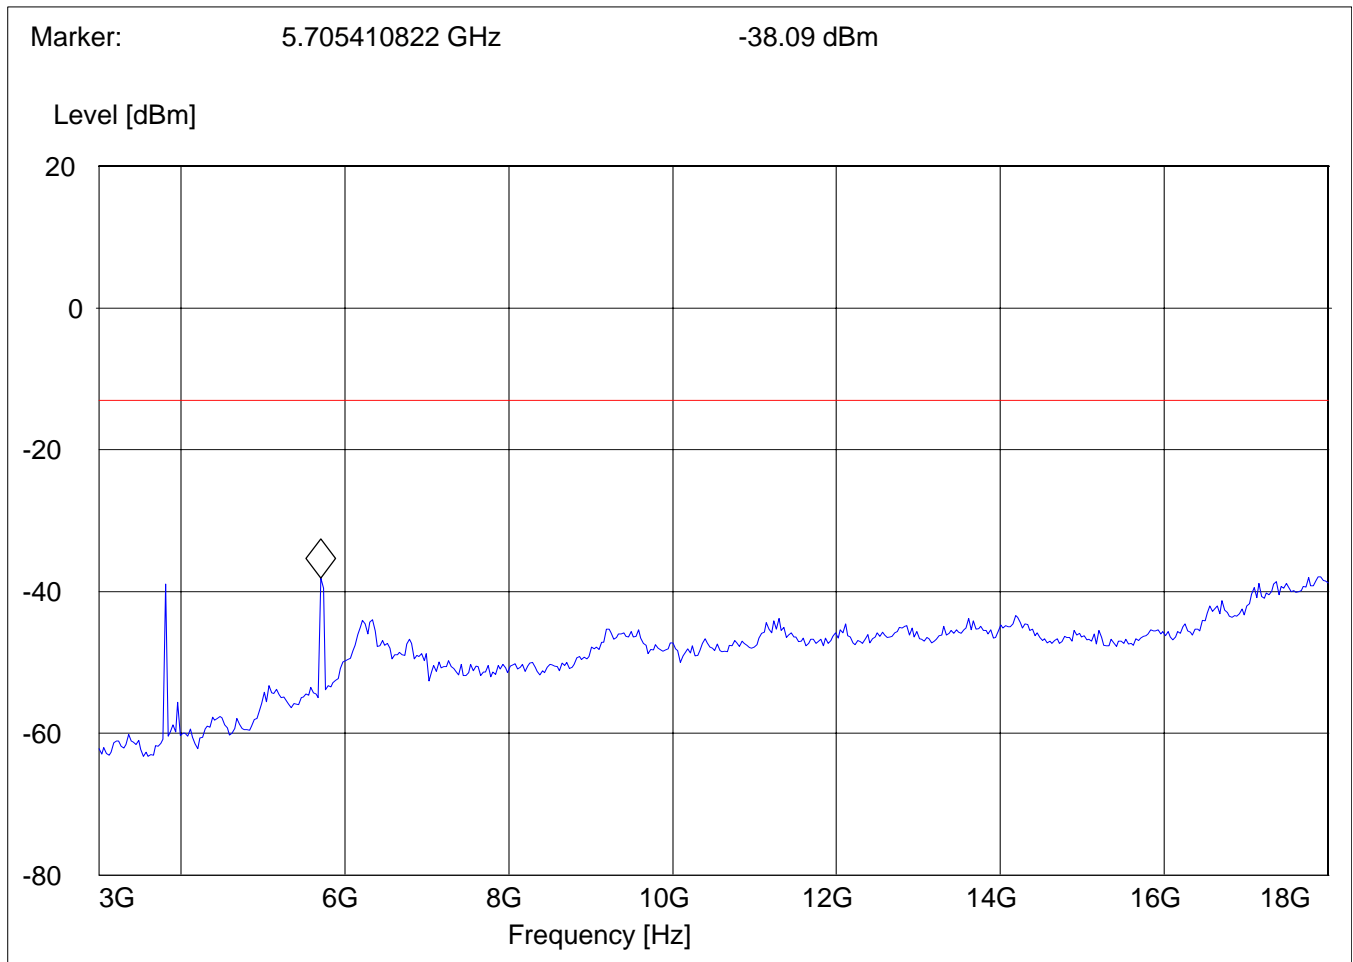

**RADIATED SPURIOUS EMISSIONS**


**18GHz – 19.1GHz**

Spurious emission limit -13dBm

**SWEEP TABLE: "FCC 24 spuri 18-19.1G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
18GHz	19.1GHz	Max Peak	Coupled	1 MHz

**Note: This plot is valid for low, mid & high channels (worst-case plot)**

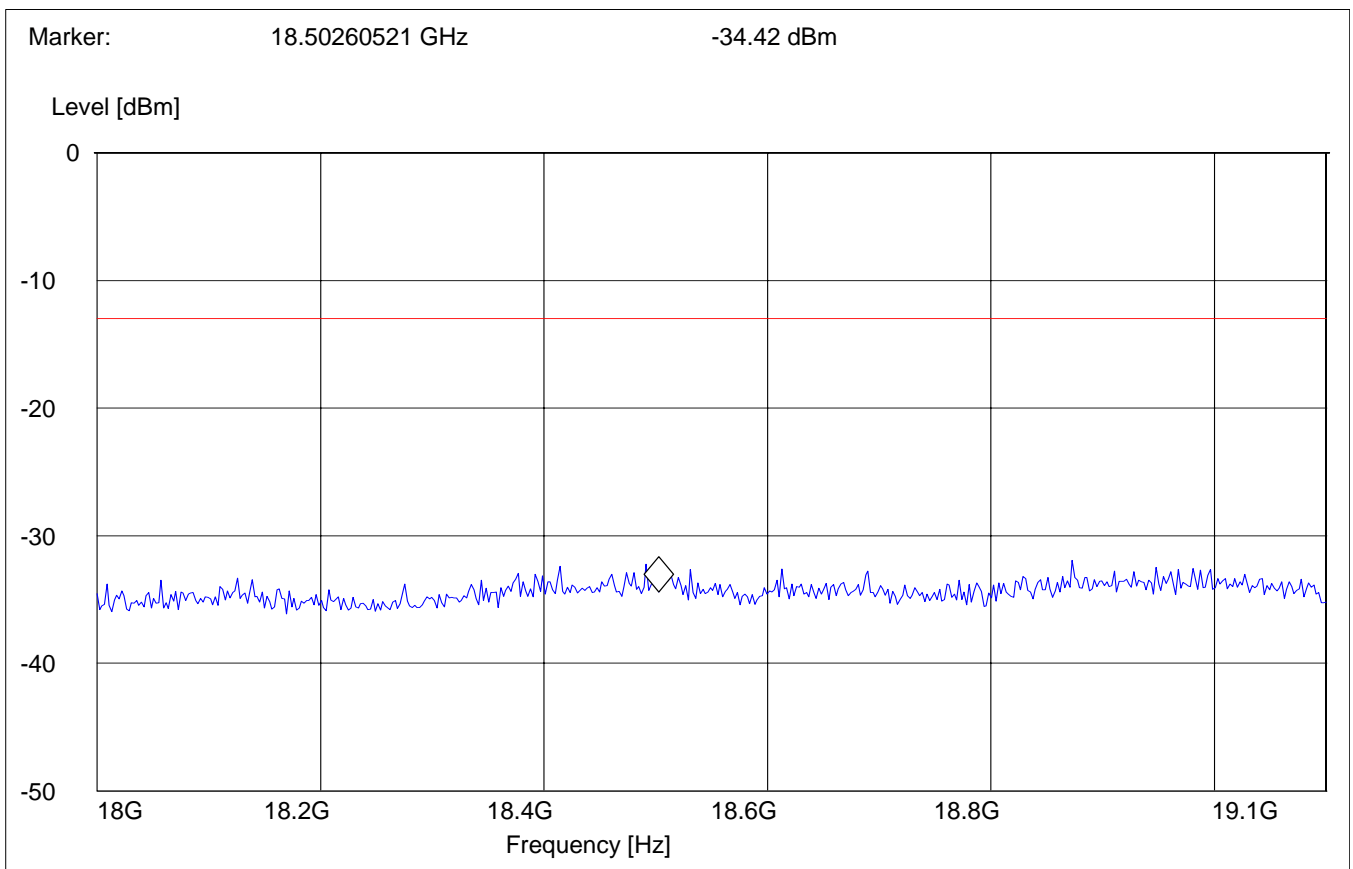

**RADIATED SPURIOUS EMISSIONS (IDLE MODE – GSM 850/1900)**

Idle mode spurious was conducted for both GSM 850 & 1900 bands, only worst case plots are submitted in the test report.

**Antenna: vertical**


**EUT in Idle Mode: 30MHz – 1GHz**

Spurious emission limit –13dBm

**Note: This plot is valid for both polarities (worst-case plot)**

**SWEEP TABLE: "FCC 24 Spur 30M-1G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz

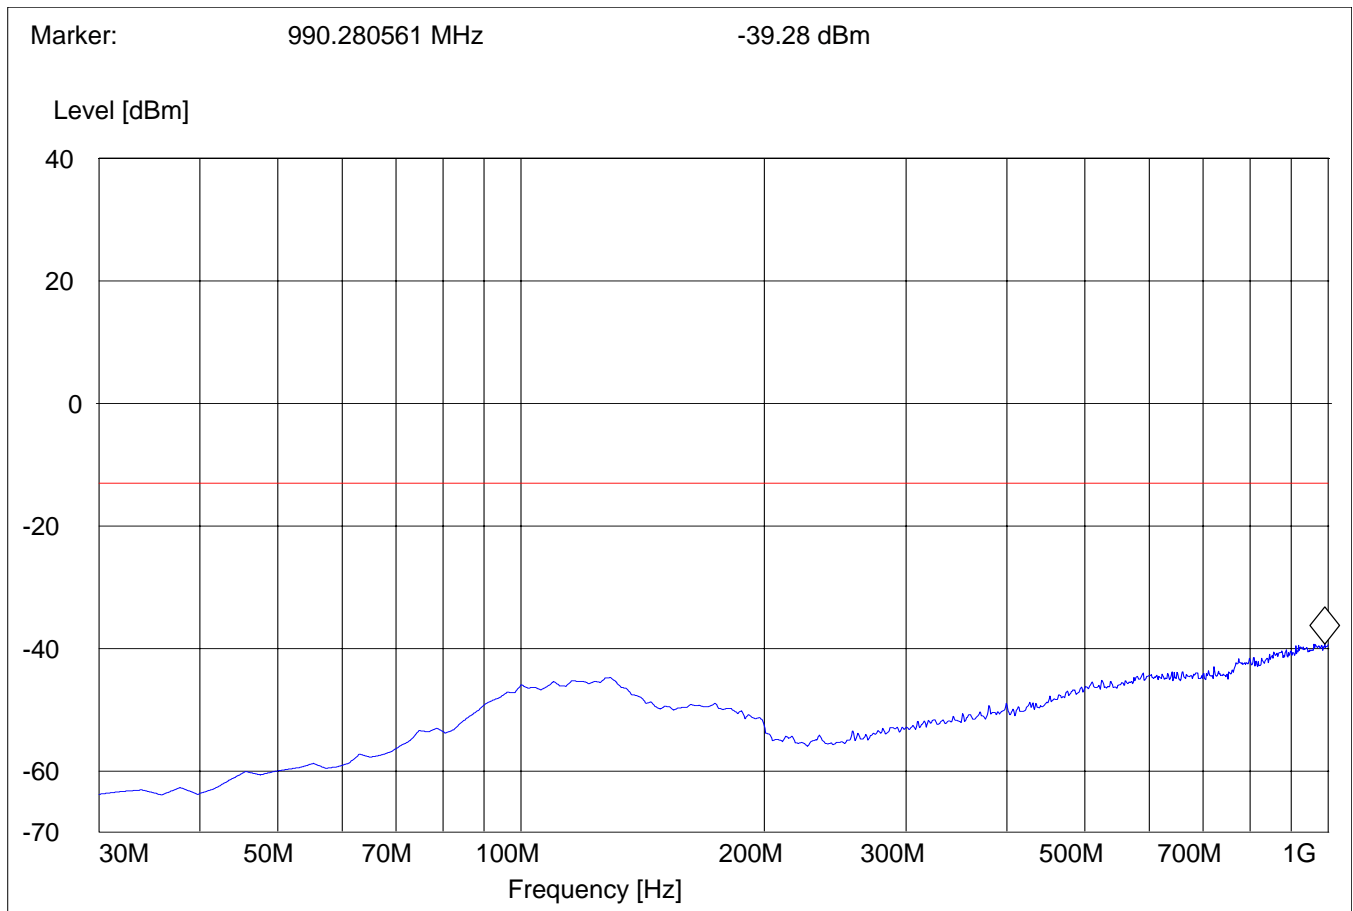


**RADIATED SPURIOUS EMISSIONS (IDLE MODE – GSM 850/1900)**

**EUT in Idle Mode: 1GHz – 3GHz**

Spurious emission limit –13dBm

**SWEEP TABLE: "FCC Spuri 1-3G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz

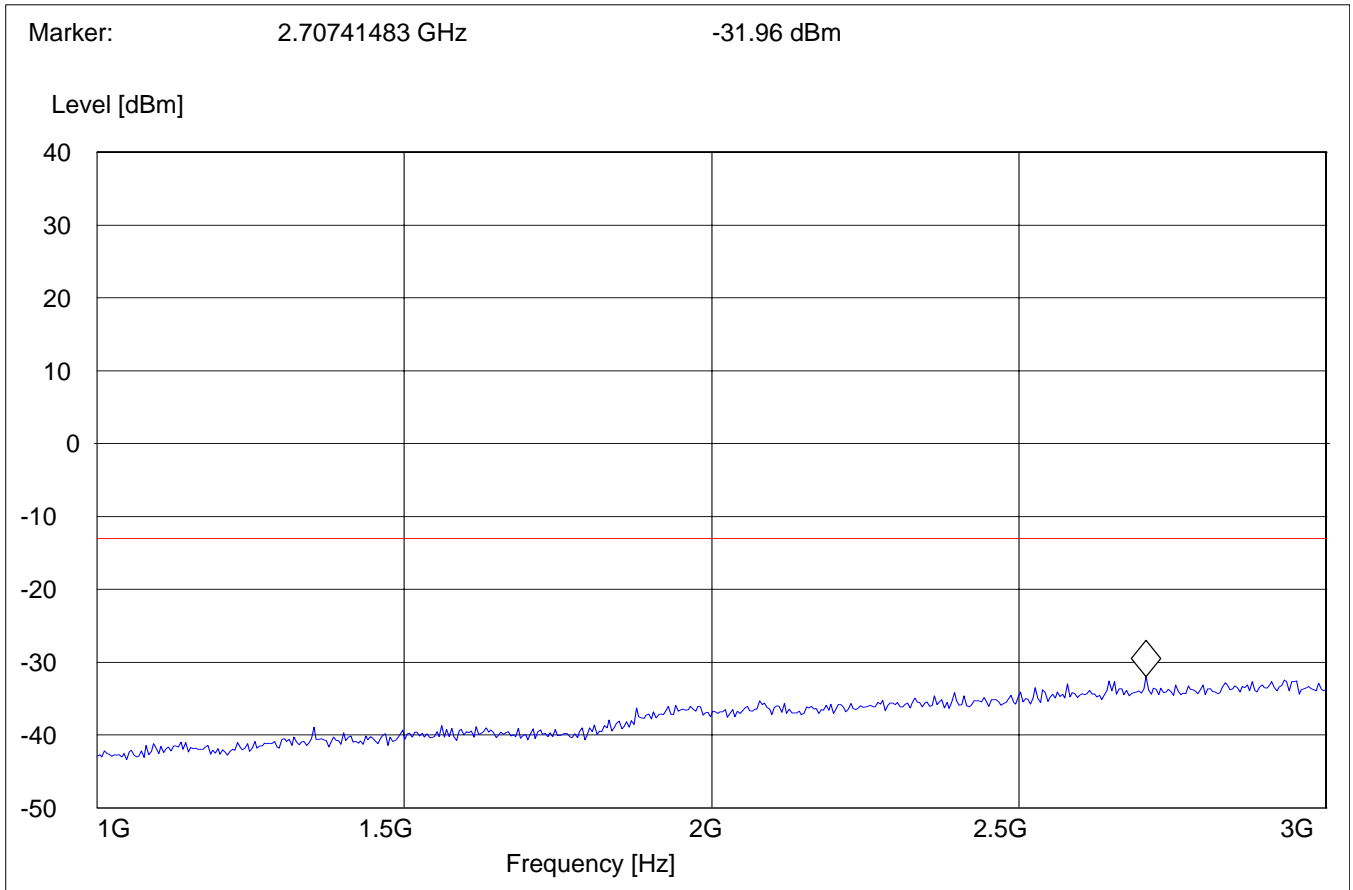




**RADIATED SPURIOUS EMISSIONS (IDLE MODE – GSM 850/1900)****EUT in Idle Mode: 3GHz – 18GHz**

Spurious emission limit –13dBm

**SWEEP TABLE: "FCC 24 spuri 3-18G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz

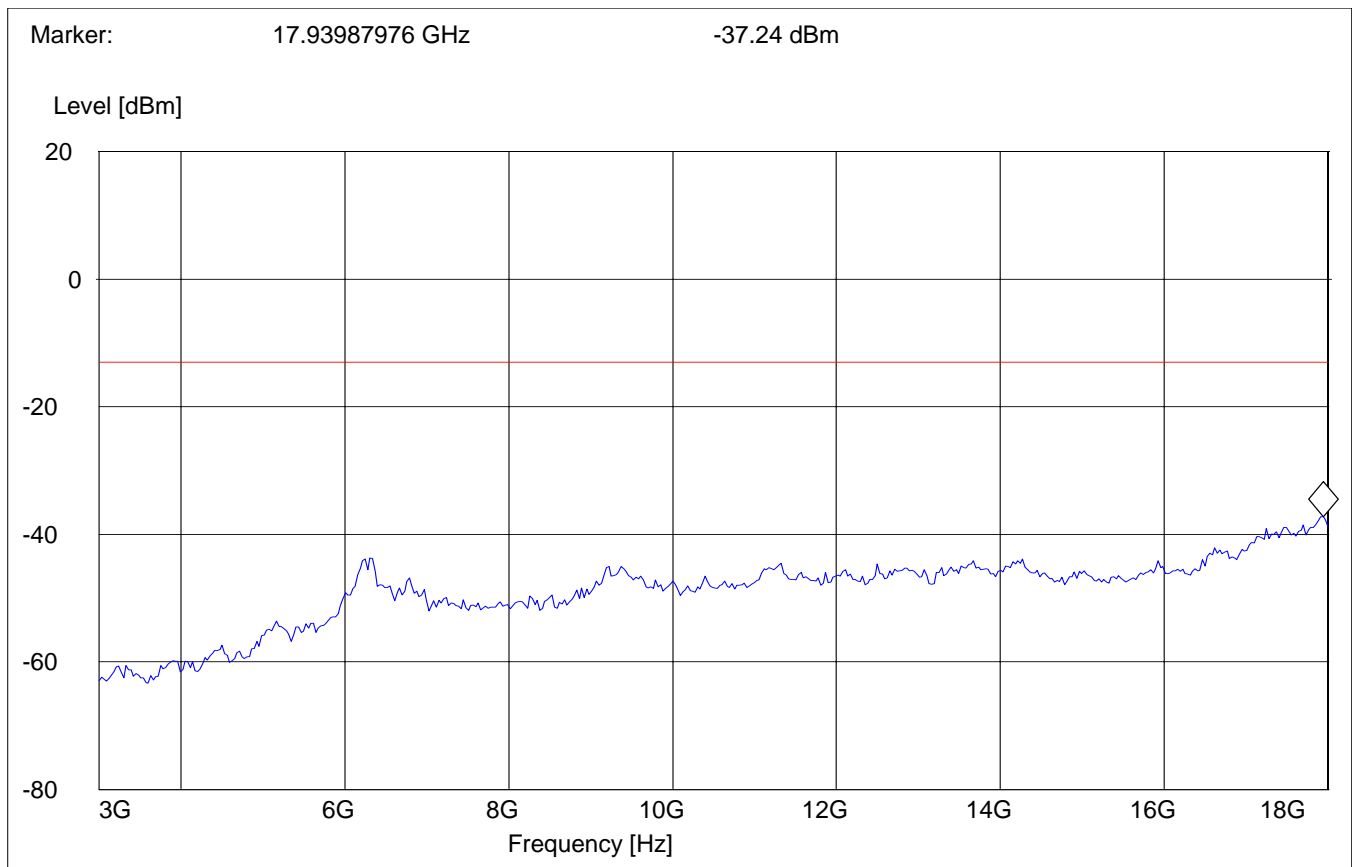


**RADIATED SPURIOUS EMISSIONS (IDLE MODE – GSM 850/1900)****EUT in Idle Mode: 18GHz – 19.1GHz**

Spurious emission limit –13dBm

**SWEEP TABLE: "FCC 24 spuri 18-19.1G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
18GHz	19.1GHz	Max Peak	Coupled	1 MHz

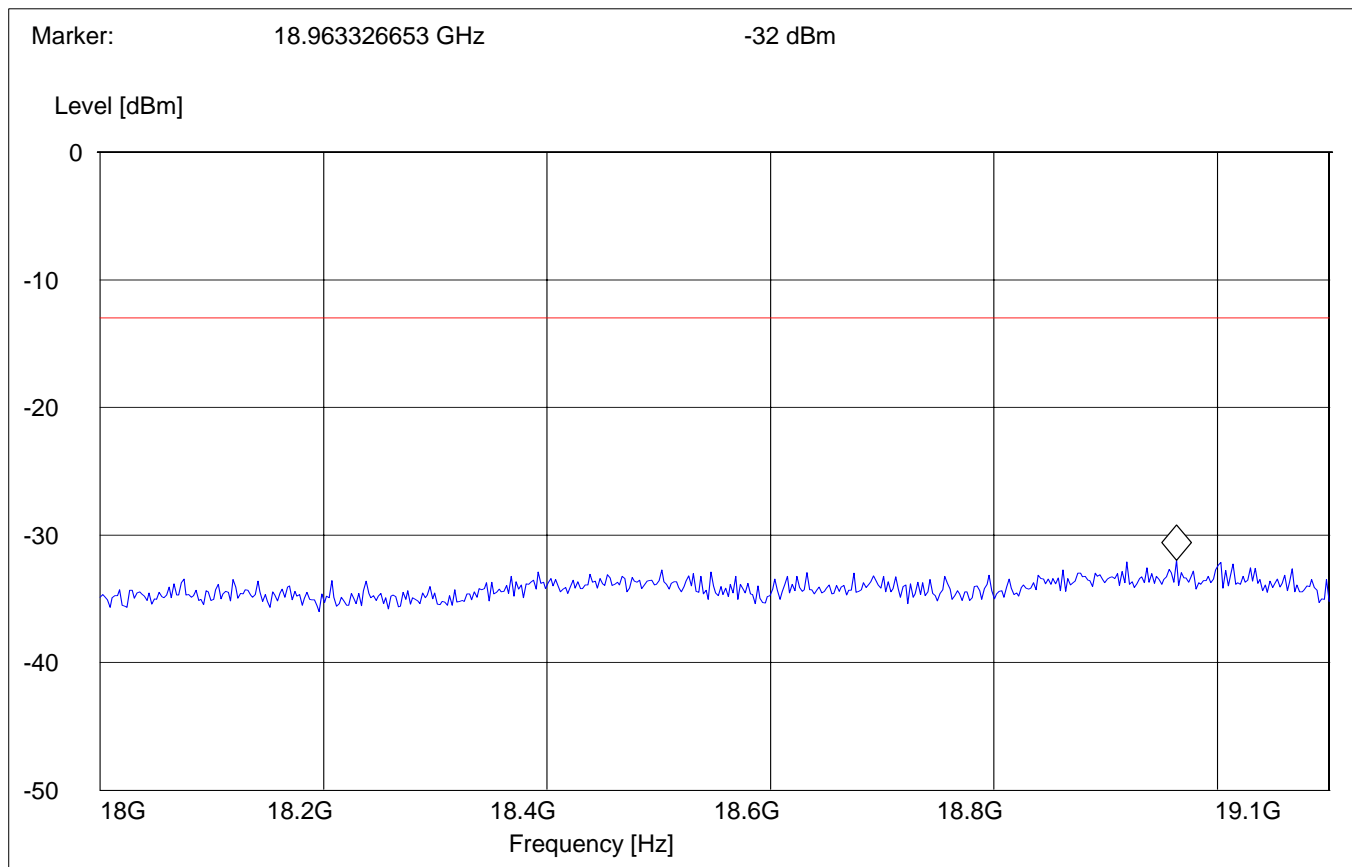

**RECEIVER RADIATED EMISSIONS****§ 2.1053 / RSS-133****NOTE:**


1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3GHz and 26.5GHz very short cable connections to the antenna was used to minimize the noise level.
2. Receiver radiated emissions were done on both 850/1900 bands, but only worst-case plots are submitted in the test reports.

**Limits****SUBCLAUSE § 15.209**

Frequency (MHz)	Field strength ( $\mu\text{V}/\text{m}$ )	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

**RECEIVER RADIATED EMISSIONS****EUT in Idle Mode: 30MHz – 1GHz****Antenna: vertical****SWEEP TABLE: "FCC 15 Spur 30M-1G"**

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
30MHz	1GHz	Max Peak	Coupled	100KHz

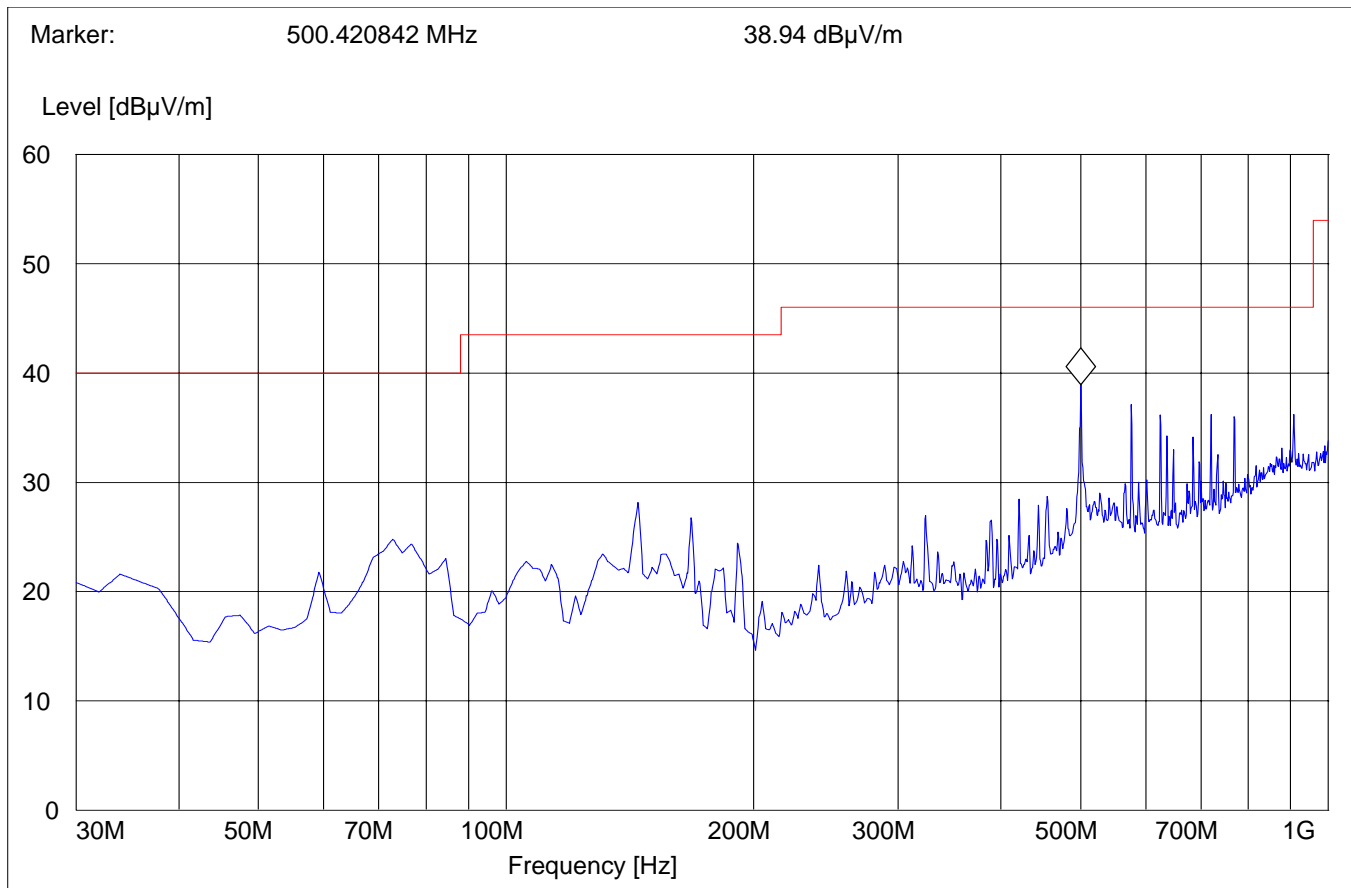


**RECEIVER RADIATED EMISSIONS**

**EUT in Idle Mode: 30MHz – 1GHz**

**Antenna: horizontal**

**SWEEP TABLE: "FCC 15 Spur 30M-1G"**

Start	Stop	Detector	Meas. Time	RBW/VBW
30MHz	1GHz	Max Peak	Coupled	100KHz

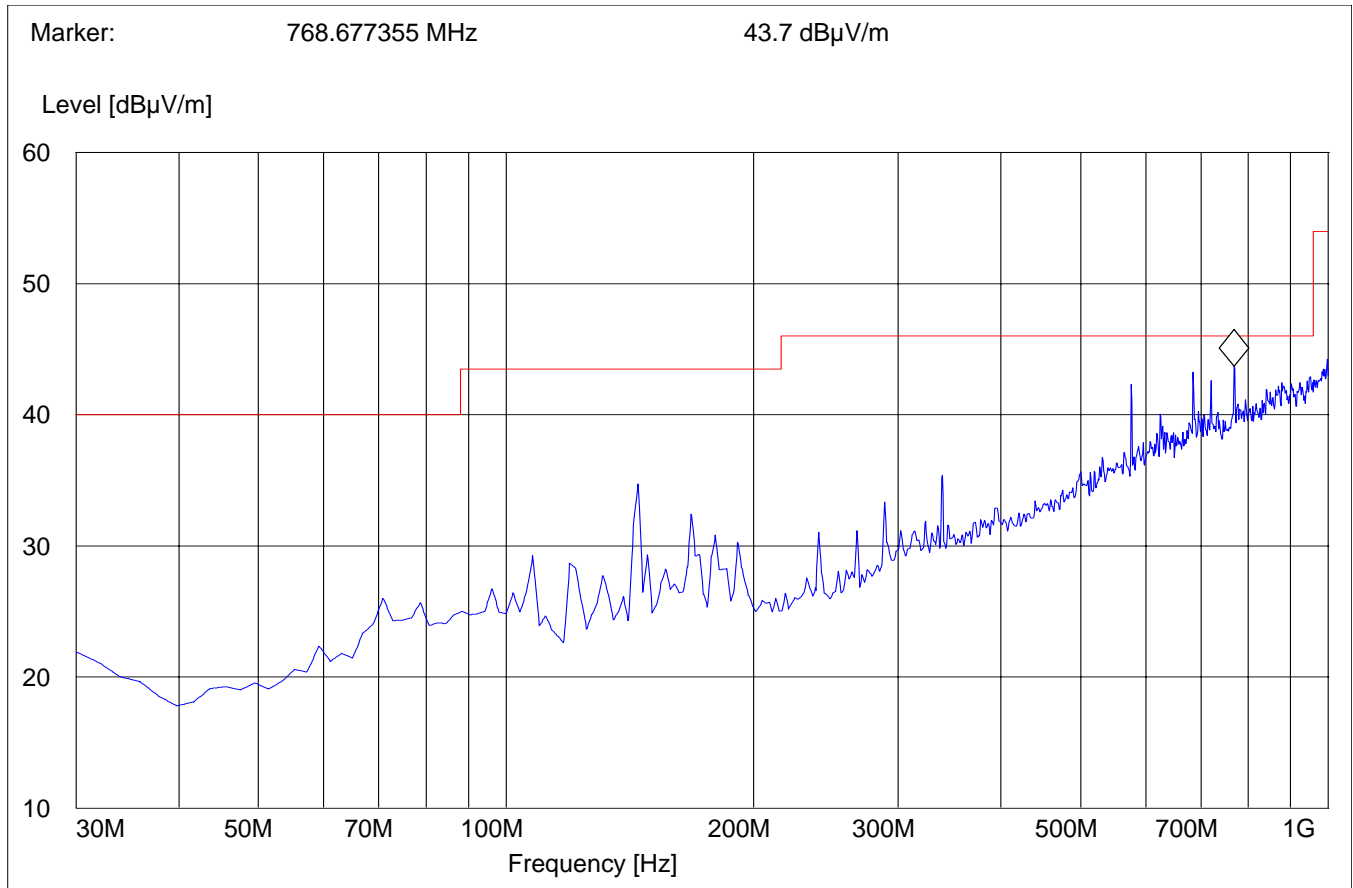


**RECEIVER RADIATED EMISSIONS**  
**EUT in Idle Mode: 1GHz – 3GHz**

**Note: marked peak is downlink from the base station**


**SWEEP TABLE: "FCC 15 Spuri 1-3G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz

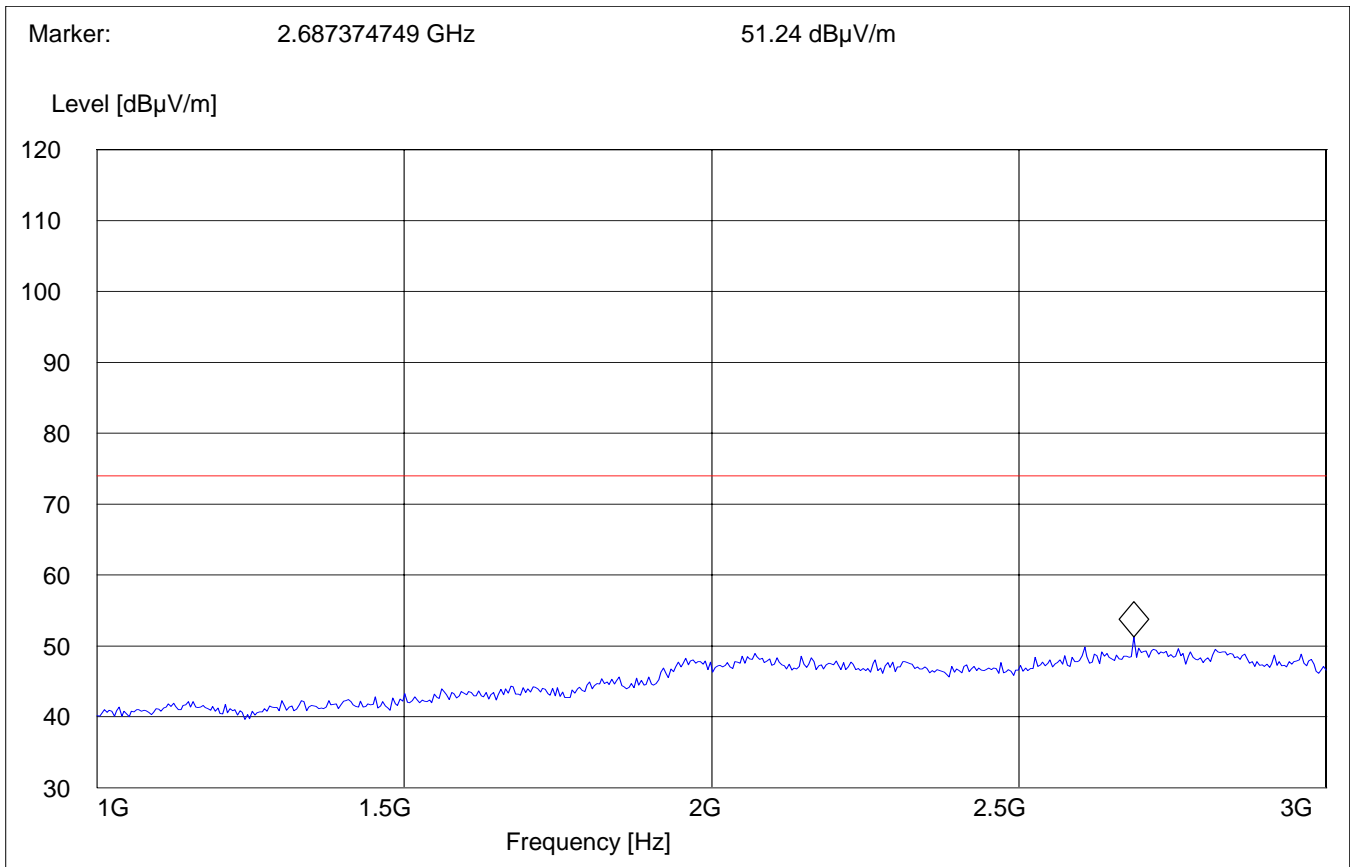


**RECEIVER RADIATED EMISSIONS**  
**EUT in Idle Mode: 3GHz – 18GHz****SWEEP TABLE: "FCC 15 spuri 3-18G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz

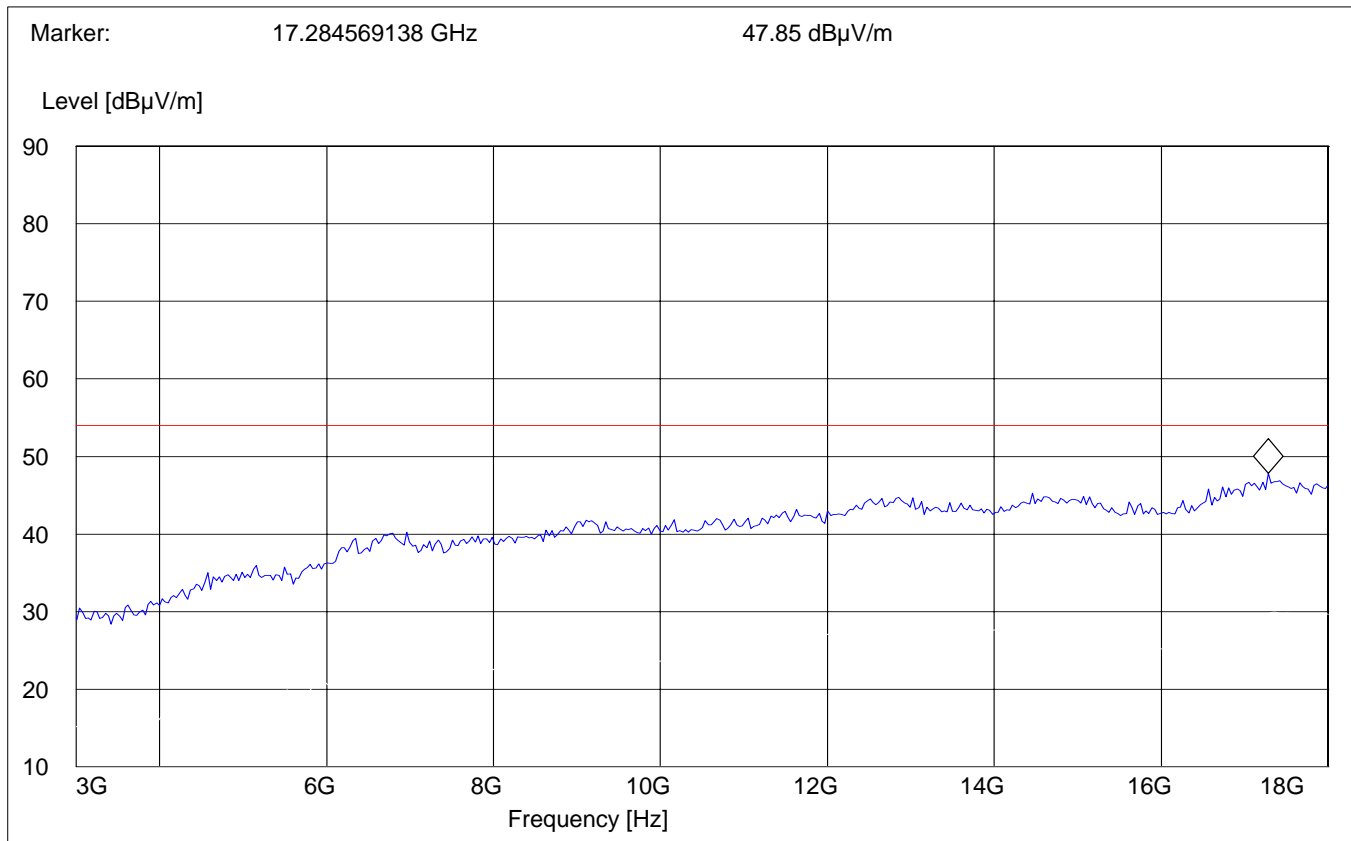

**RECEIVER RADIATED EMISSIONS**  
**EUT in Idle Mode: 18GHz – 26.5GHz****SWEEP TABLE: "FCC 15 spuri 18-26.5G"**

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency		Time	
18GHz	26.5GHz	Max Peak	Coupled	1 MHz

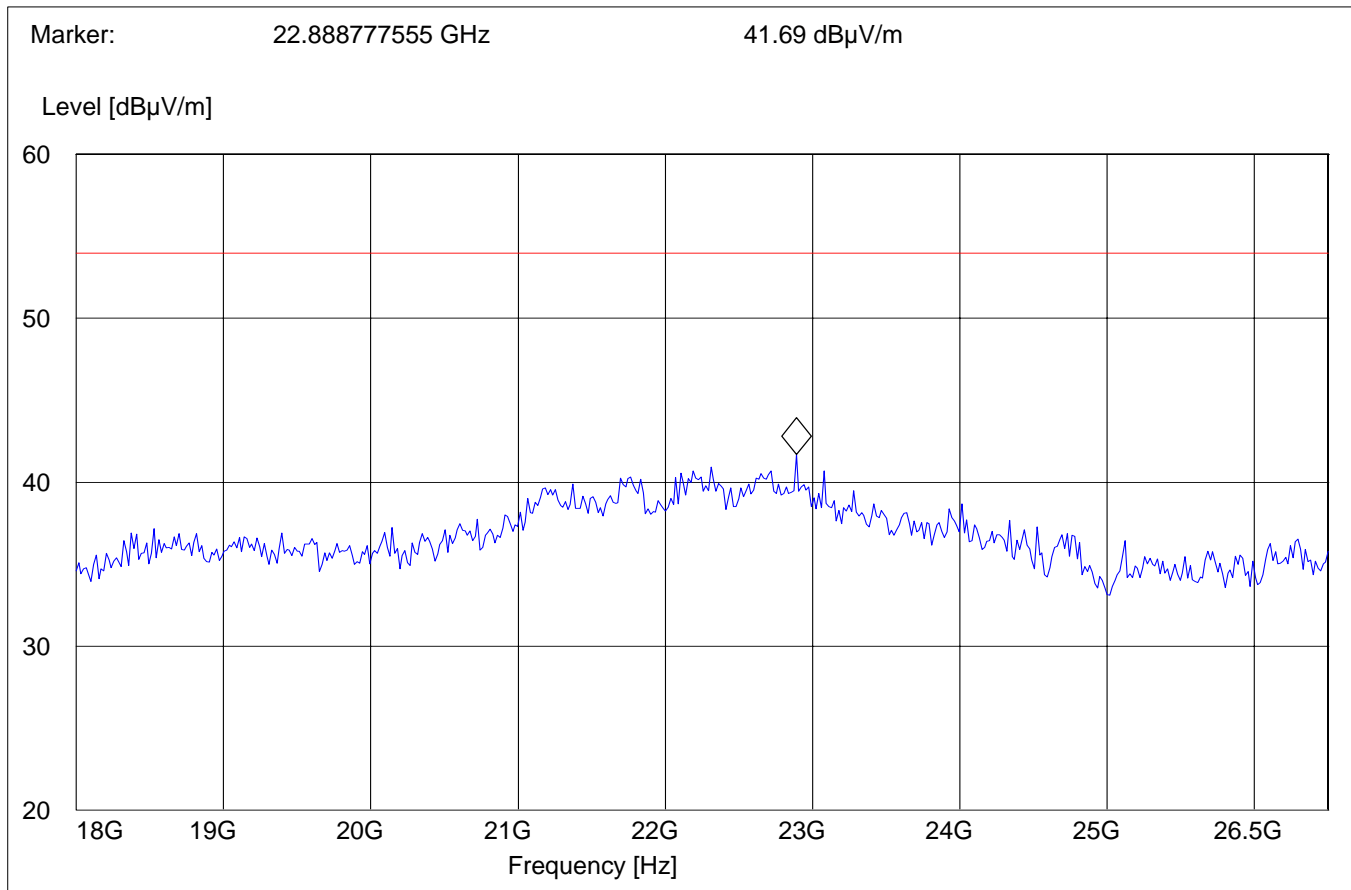



**CONDUCTED EMISSIONS**

§ 15.107/207

Measured with AC/DC power adapter plugged in LISN

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)


**Limit**

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

\* Decreases with logarithm of the frequency

ANALYZER SETTINGS: RBW = 10KHz

VBW = 10KHz

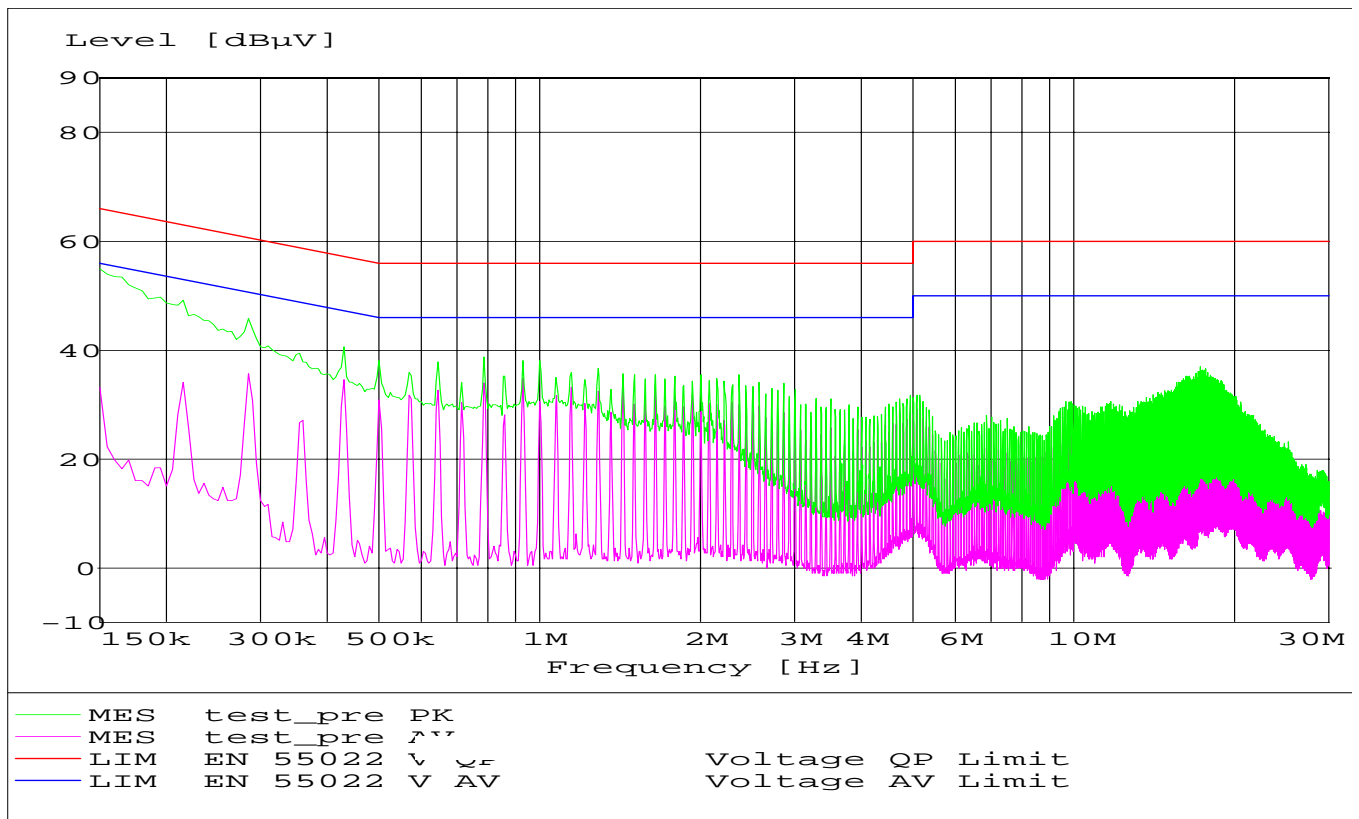

**TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS**

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	826880/010
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02
05	Biconilog Antenna	3141	EMCO	0005-1186
06	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325
07	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240
08	Power Splitter	11667B	Hewlett Packard	645348
09	Climatic Chamber	VT4004	Voltsch	G1115
10	High Pass Filter	5HC2700	Trilithic Inc.	9926013
11	High Pass Filter	4HC1600	Trilithic Inc.	9922307
12	Pre-Amplifier	JS4-00102600	Miteq	00616
13	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807
14	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008
15	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06

**BLOCK DIAGRAMS**  
**Radiated Testing**

**ANECHOIC CHAMBER**

