




<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/21/2004 11:49:15 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	0106
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	52.29
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.966
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-50.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-174.80 mm
<b>Antenna Configuration:</b>	AUX	<b>Max E Field:</b>	5.26 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.044 W/kg
<b>Air Factors:</b>	415 / 805 / 371	<b>SAR 10g:</b>	0.027 W/kg
<b>Conversion Factors:</b>	0.585 / 0.585 / 0.585	<b>SAR Start:</b>	0.019 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.019 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.04 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	06/03/2004
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

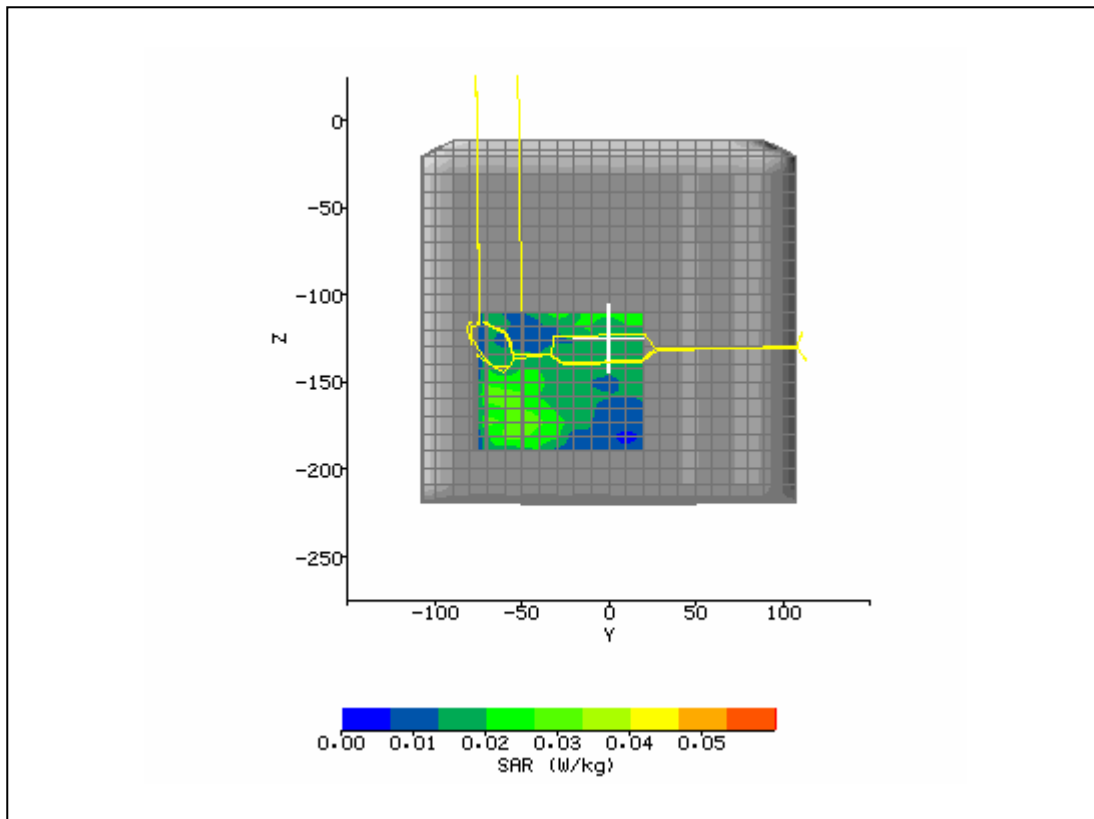

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/21/2004 12:28:23 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	0106
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	52.29
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.966
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	76.00 mm
<b>DUT Position:</b>	bystander 1cm	<b>Max SAR Z-axis Location:</b>	-150.00 mm
<b>Antenna Configuration:</b>	AUX	<b>Max E Field:</b>	5.35 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.047 W/kg
<b>Air Factors:</b>	415 / 805 / 371	<b>SAR 10g:</b>	0.028 W/kg
<b>Conversion Factors:</b>	0.585 / 0.585 / 0.585	<b>SAR Start:</b>	0.011 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.011 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.03 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	06/03/2004
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

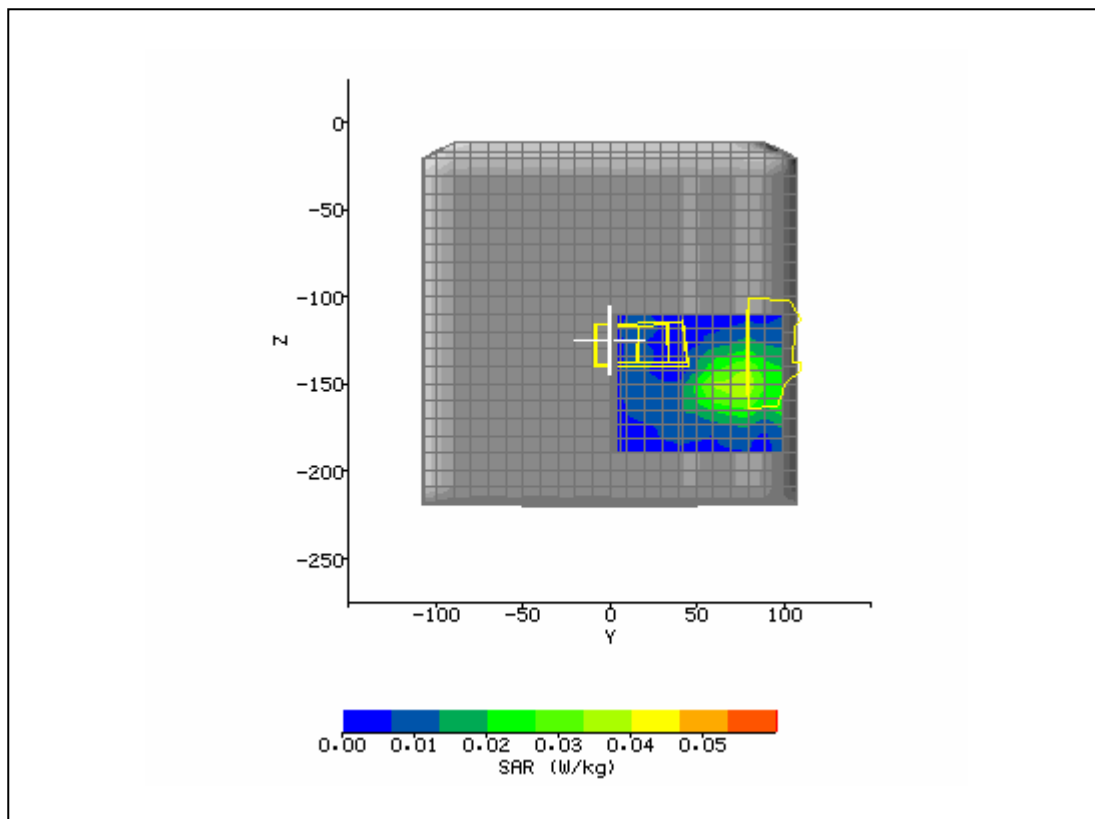

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/21/2004 1:00:01 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	bystander1cm2437_3d.txt	<b>Probe Serial Number:</b>	0106
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	52.35
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.962
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	77.00 mm
<b>DUT Position:</b>	bystander 1cm	<b>Max SAR Z-axis Location:</b>	-150.00 mm
<b>Antenna Configuration:</b>	AUX	<b>Max E Field:</b>	5.62 V/m
<b>Test Frequency:</b>	2412MHz	<b>SAR 1g:</b>	0.052 W/kg
<b>Air Factors:</b>	415 / 805 / 371	<b>SAR 10g:</b>	0.031 W/kg
<b>Conversion Factors:</b>	0.585 / 0.585 / 0.585	<b>SAR Start:</b>	0.013 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.013 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.01 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	06/03/2004
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

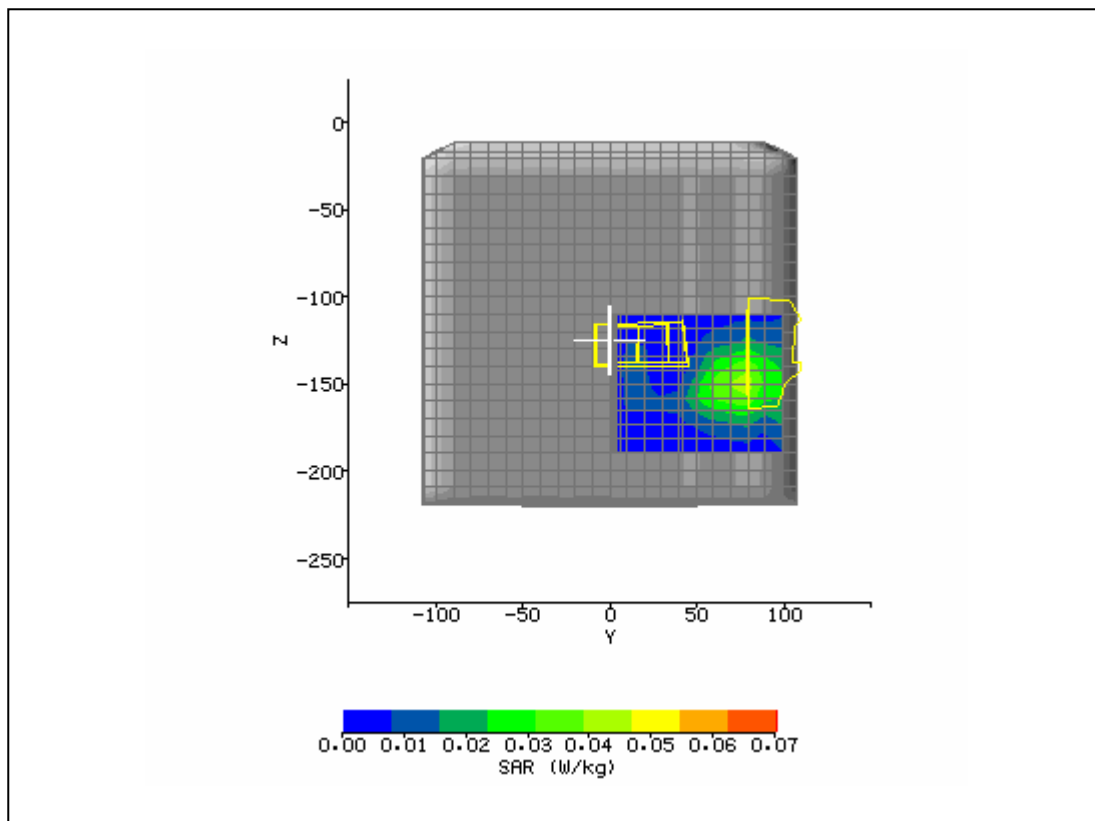

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/21/2004 1:30:57 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	bystand2412_3d.txt	<b>Probe Serial Number:</b>	0106
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	52.09
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.997
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	76.00 mm
<b>DUT Position:</b>	bystander 1cm	<b>Max SAR Z-axis Location:</b>	-150.00 mm
<b>Antenna Configuration:</b>	AUX	<b>Max E Field:</b>	4.78 V/m
<b>Test Frequency:</b>	2462MHz	<b>SAR 1g:</b>	0.036 W/kg
<b>Air Factors:</b>	415 / 805 / 371	<b>SAR 10g:</b>	0.021 W/kg
<b>Conversion Factors:</b>	0.585 / 0.585 / 0.585	<b>SAR Start:</b>	0.008 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.008 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.03 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	06/03/2004
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

