




<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	2/17/2005 5:21:38 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	128_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	Xplore iX104	<b>Relative Permittivity:</b>	55.42
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	0.987
<b>Phantom S/No:</b>	HeadBox_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-49.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-178.00 mm
<b>Antenna Configuration:</b>	integral	<b>Max E Field:</b>	13.41 V/m
<b>Test Frequency:</b>	836.6MHz	<b>SAR 1g:</b>	0.147 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.077 W/kg
<b>Conversion Factors:</b>	.522 / .522 / .522	<b>SAR Start:</b>	0.081 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.083 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.10 dB
<b>Diode Compression Factors (V*200):</b>	11.9 / 12.3 / 10	<b>Probe battery last changed:</b>	2/3/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

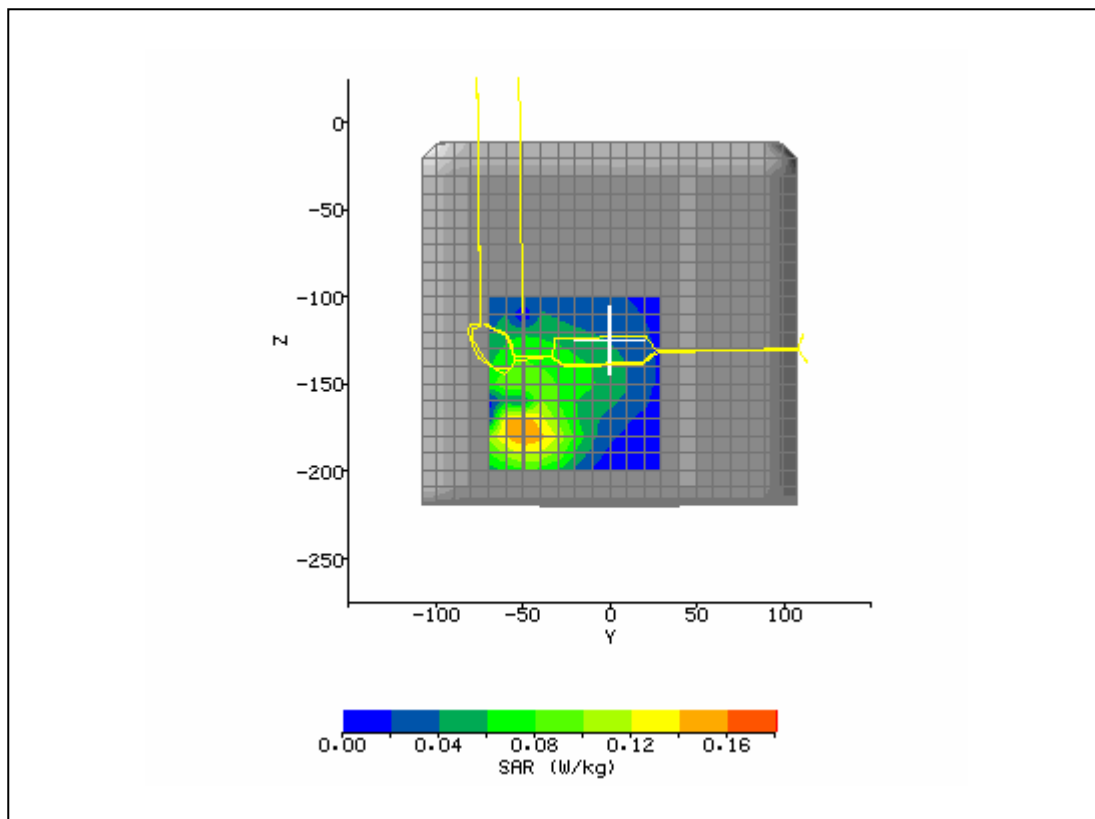


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	2/17/2005 4:51:00 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	Xplore iX104	<b>Relative Permittivity:</b>	55.97
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	0.981
<b>Phantom S/No:</b>	HeadBox_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-50.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-177.00 mm
<b>Antenna Configuration:</b>	integral	<b>Max E Field:</b>	11.98 V/m
<b>Test Frequency:</b>	824.2MHz	<b>SAR 1g:</b>	0.127 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.086 W/kg
<b>Conversion Factors:</b>	.522 / .522 / .522	<b>SAR Start:</b>	0.058 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.058 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.00 dB
<b>Diode Compression Factors (V*200):</b>	11.9 / 12.3 / 10	<b>Probe battery last changed:</b>	2/3/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

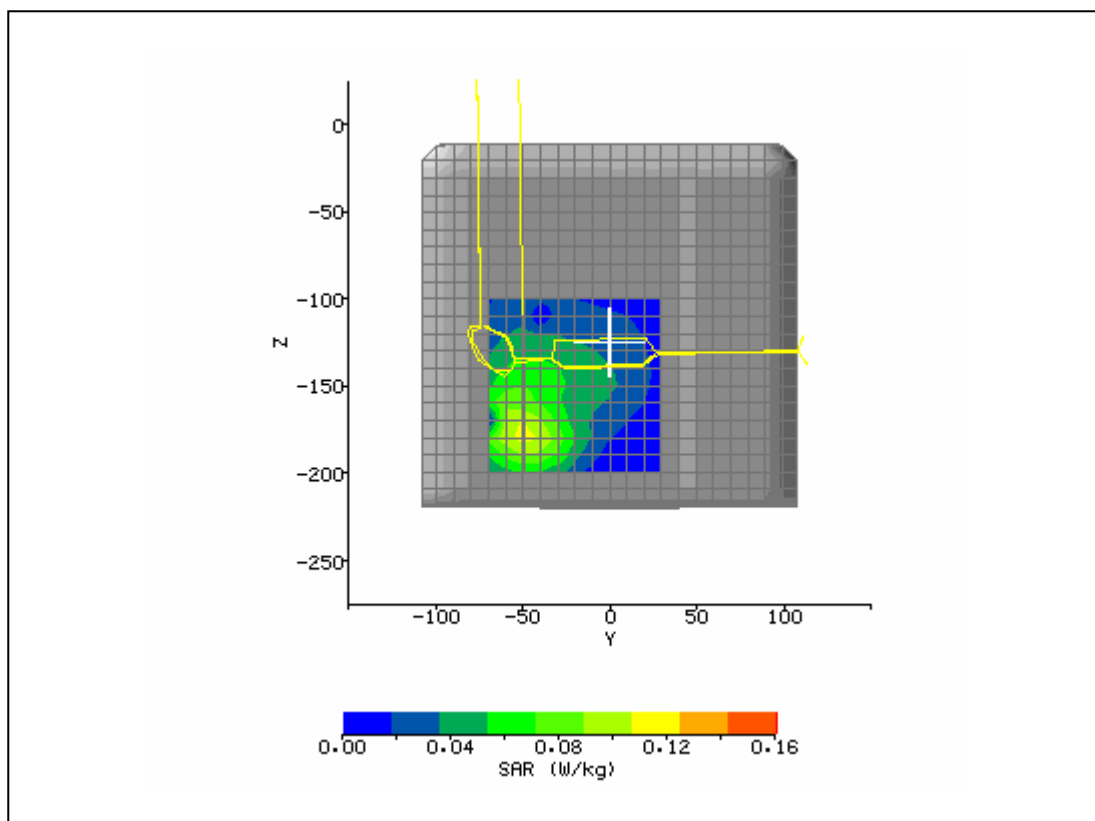


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	2/17/2005 5:52:27 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	190_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	Xplore iX104	<b>Relative Permittivity:</b>	55.21
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	0.991
<b>Phantom S/No:</b>	HeadBox_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-36.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-175.00 mm
<b>Antenna Configuration:</b>	integral	<b>Max E Field:</b>	18.54 V/m
<b>Test Frequency:</b>	848.8MHz	<b>SAR 1g:</b>	0.299 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.208 W/kg
<b>Conversion Factors:</b>	.522 / .522 / .522	<b>SAR Start:</b>	0.118 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.119 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.02 dB
<b>Diode Compression Factors (V*200):</b>	11.9 / 12.3 / 10	<b>Probe battery last changed:</b>	2/3/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

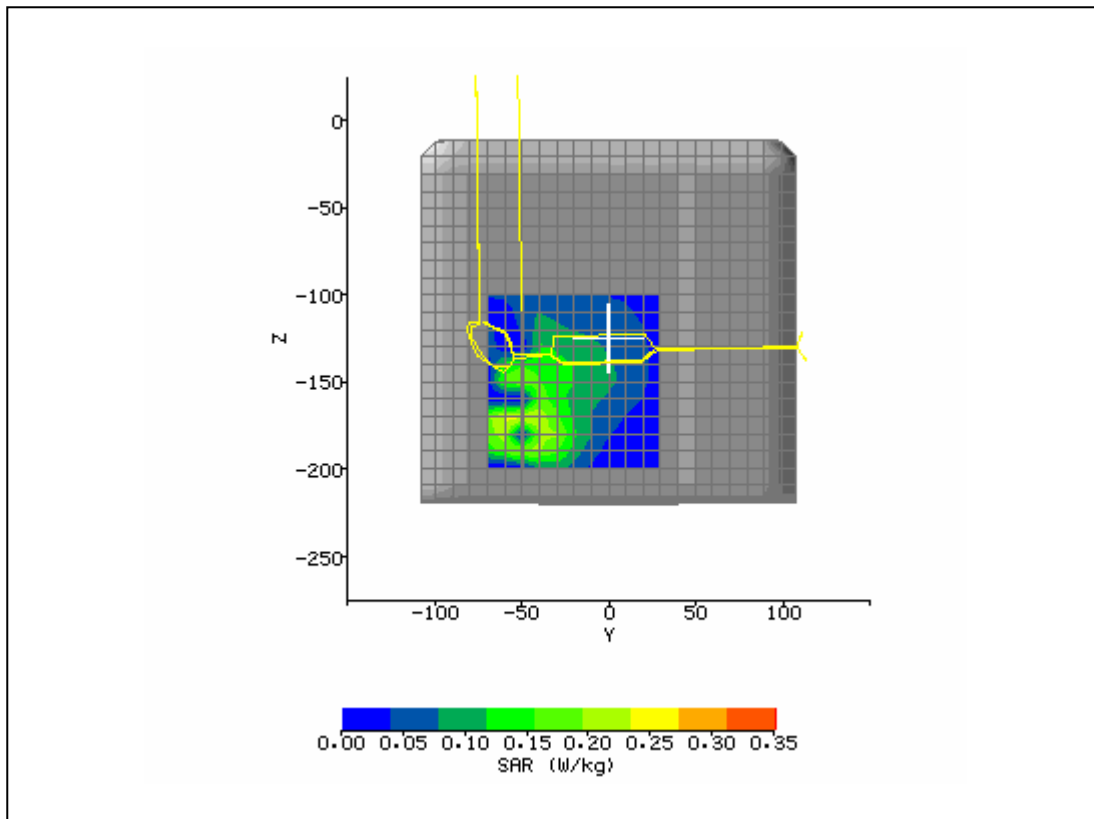

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	2/16/2005 1:19:14 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	512_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	Xplore iX104	<b>Relative Permittivity:</b>	53.12
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.542
<b>Phantom S/No:</b>	HeadBox_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-28.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-180.00 mm
<b>Antenna Configuration:</b>	integral	<b>Max E Field:</b>	12.57 V/m
<b>Test Frequency:</b>	1880MHz	<b>SAR 1g:</b>	0.212 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.130 W/kg
<b>Conversion Factors:</b>	0.666 / 0.666 / 0.666	<b>SAR Start:</b>	0.066 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.066 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.01 dB
<b>Diode Compression Factors (V*200):</b>	11.9 / 12.3 / 10	<b>Probe battery last changed:</b>	2/3/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

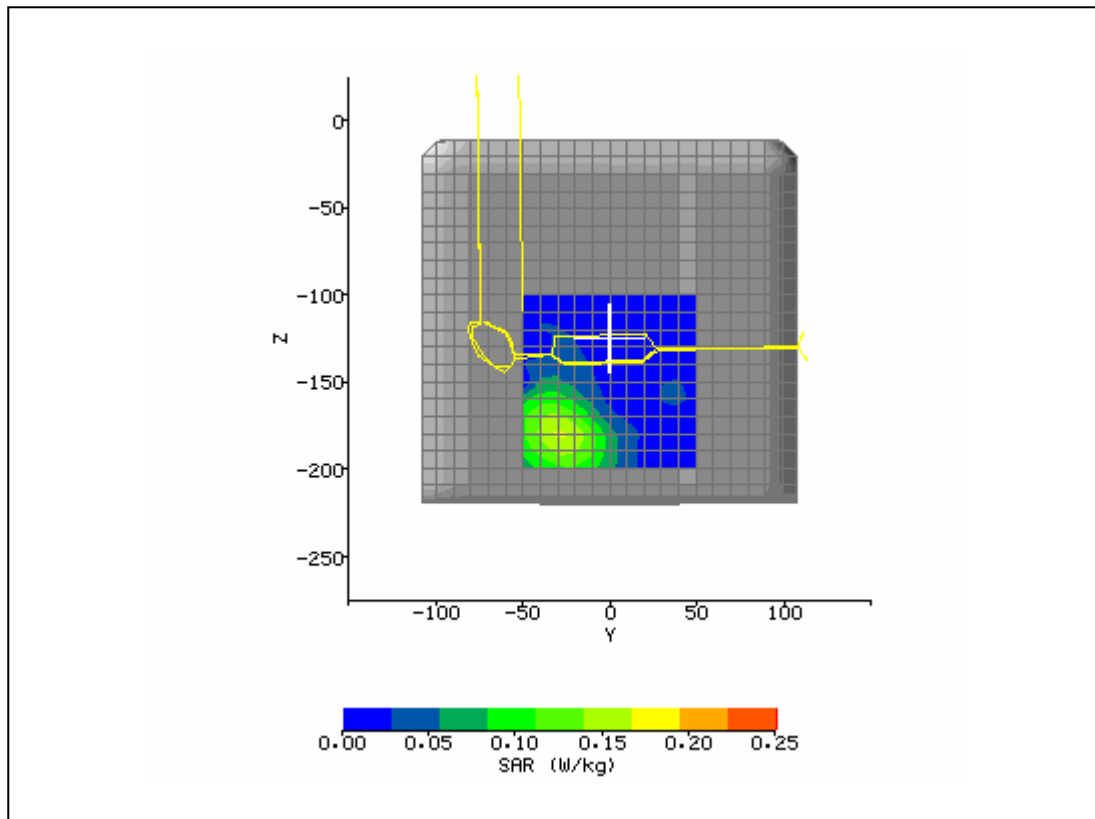

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	2/16/2005 12:33:47 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	Xplore iX104	<b>Relative Permittivity:</b>	53.28
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.525
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-29.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-179.00 mm
<b>Antenna Configuration:</b>	integral	<b>Max E Field:</b>	11.79 V/m
<b>Test Frequency:</b>	1850.2MHz	<b>SAR 1g:</b>	0.172 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.100 W/kg
<b>Conversion Factors:</b>	0.666 / 0.666 / 0.666	<b>SAR Start:</b>	0.049 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.047 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.16 dB
<b>Diode Compression Factors (V*200):</b>	11.9 / 12.3 / 10	<b>Probe battery last changed:</b>	2/3/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

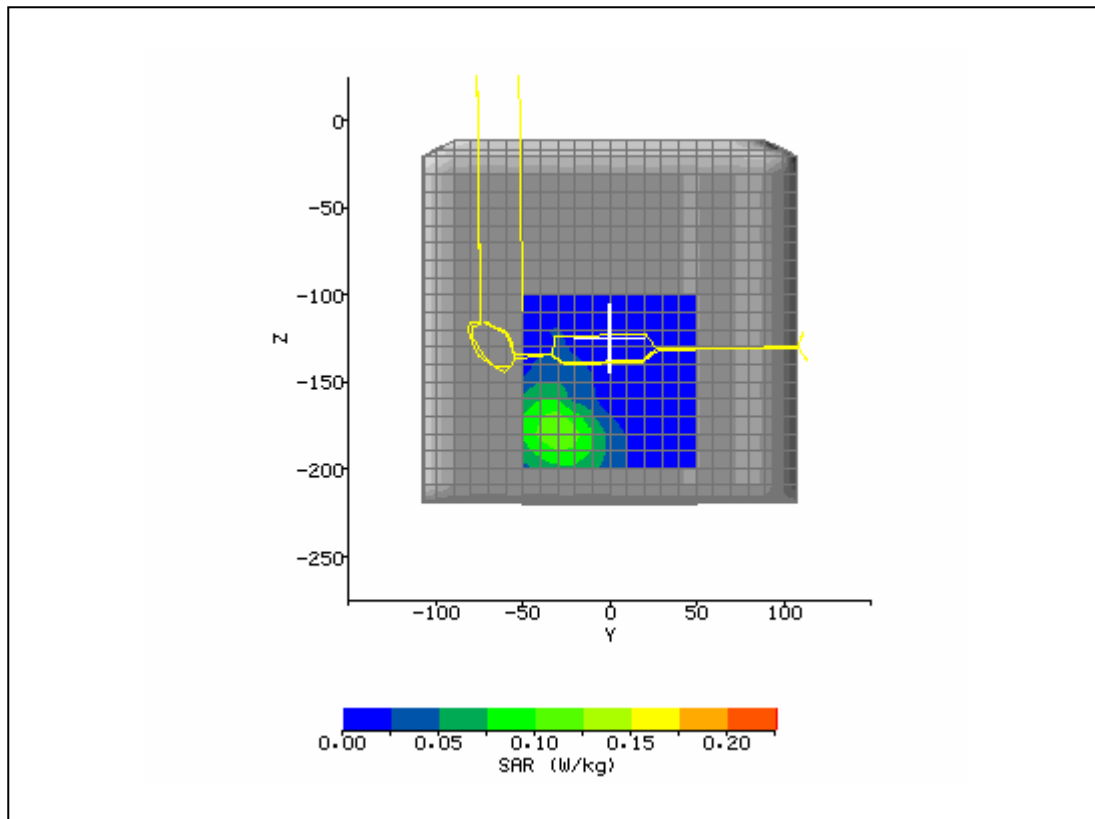

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	2/16/2005 1:49:28 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	661_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	Xplore iX104	<b>Relative Permittivity:</b>	53.01
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.555
<b>Phantom S/No:</b>	HeadBox_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-28.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-181.00 mm
<b>Antenna Configuration:</b>	integral	<b>Max E Field:</b>	12.10 V/m
<b>Test Frequency:</b>	1909.8MHz	<b>SAR 1g:</b>	0.183 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.111 W/kg
<b>Conversion Factors:</b>	0.666 / 0.666 / 0.666	<b>SAR Start:</b>	0.066 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.066 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.01 dB
<b>Diode Compression Factors (V*200):</b>	11.9 / 12.3 / 10	<b>Probe battery last changed:</b>	2/3/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

