




<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/17/2005 3:01:38 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	51.35
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.947
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-45.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-138.80 mm
<b>Antenna Configuration:</b>	WLAN	<b>Max E Field:</b>	3.29 V/m
<b>Test Frequency:</b>	2412MHz 802.11b 1Mb	<b>SAR 1g:</b>	0.017 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.009 W/kg
<b>Conversion Factors:</b>	0.705 / 0.705 / 0.705	<b>SAR Start:</b>	0.006 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.006 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.00 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

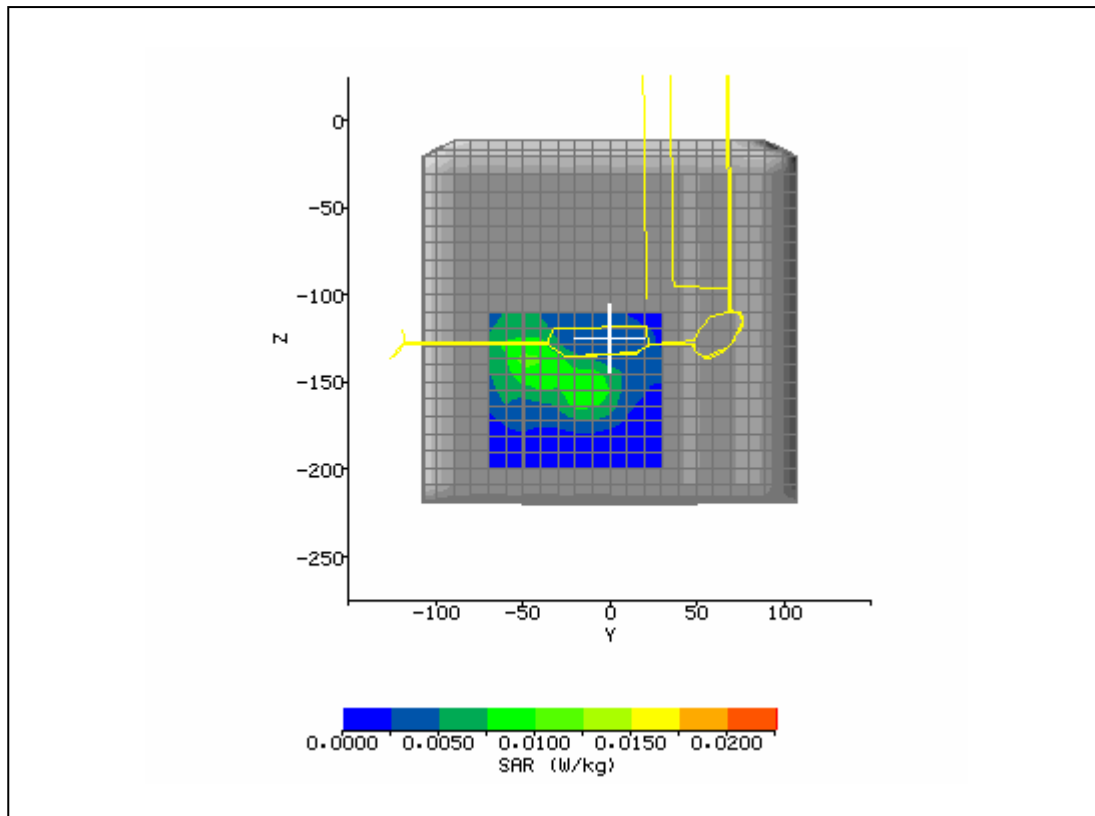

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/17/2005 3:35:38 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap2412_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	51.70
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.959
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-26.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-140.60 mm
<b>Antenna Configuration:</b>	WLAN	<b>Max E Field:</b>	4.67 V/m
<b>Test Frequency:</b>	2437 802.11b 1Mb/SMHz	<b>SAR 1g:</b>	0.035 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.020 W/kg
<b>Conversion Factors:</b>	0.705 / 0.705 / 0.705	<b>SAR Start:</b>	0.009 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.009 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.01 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

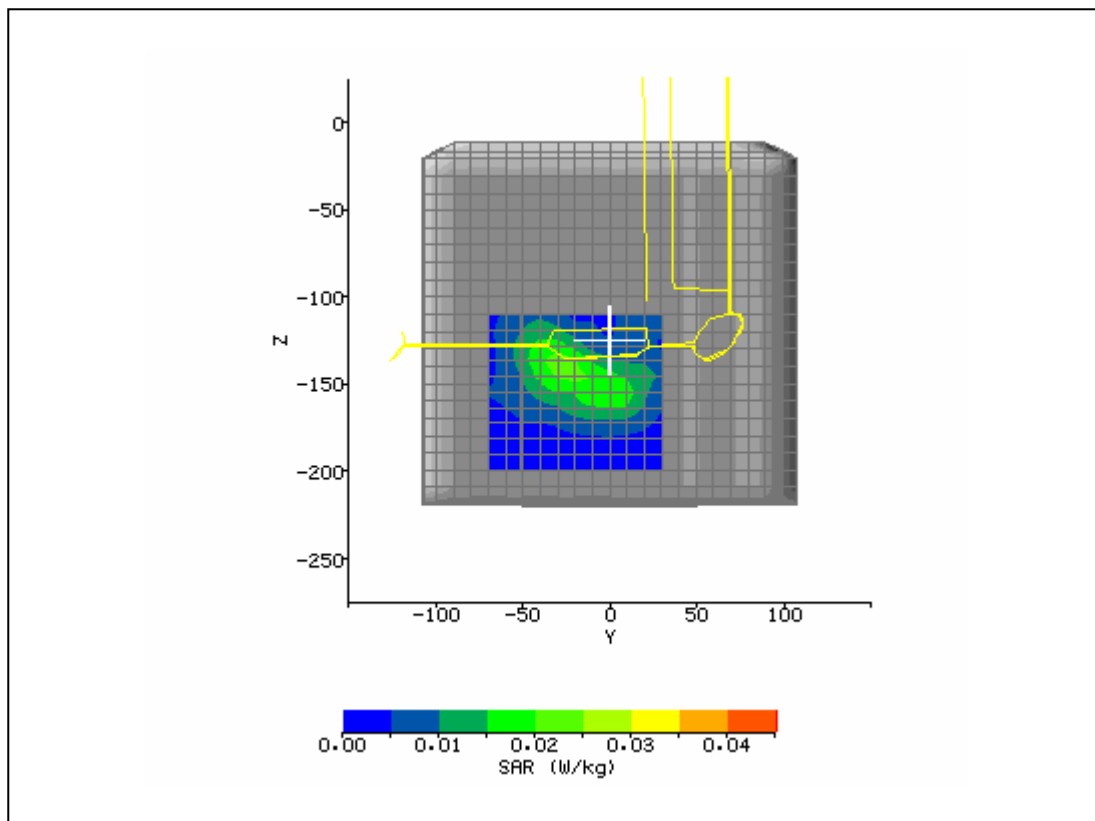

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/17/2005 4:16:39 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap2437_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	51.09
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.957
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-12.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-153.20 mm
<b>Antenna Configuration:</b>	WLAN	<b>Max E Field:</b>	5.23 V/m
<b>Test Frequency:</b>	2462 802.11b 1Mb/SMHz	<b>SAR 1g:</b>	0.042 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.024 W/kg
<b>Conversion Factors:</b>	0.705 / 0.705 / 0.705	<b>SAR Start:</b>	0.011 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.011 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.02 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

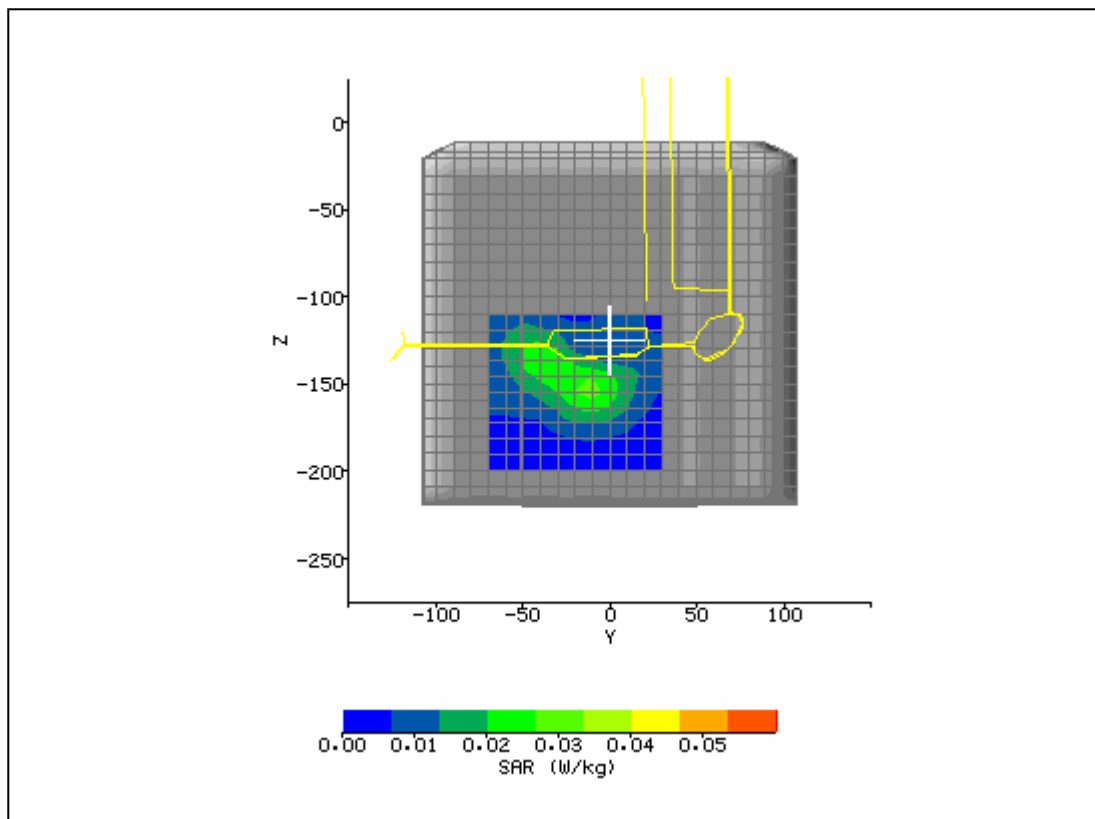

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/17/2005 4:52:30 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap2462_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	51.35
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.947
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-26.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-138.80 mm
<b>Antenna Configuration:</b>	WLAN	<b>Max E Field:</b>	3.79 V/m
<b>Test Frequency:</b>	2412 802.11g 6Mb/SMHz	<b>SAR 1g:</b>	0.022 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.013 W/kg
<b>Conversion Factors:</b>	0.705 / 0.705 / 0.705	<b>SAR Start:</b>	0.008 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.008 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.34 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

