




<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/20/2005 12:01:11 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	56.47
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	0.981
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-29.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-176.60 mm
<b>Antenna Configuration:</b>	GPRS	<b>Max E Field:</b>	10.06 V/m
<b>Test Frequency:</b>	824.2 with 1 timeslot uplinkMHz	<b>SAR 1g:</b>	0.096 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.058 W/kg
<b>Conversion Factors:</b>	.522 / .522 / .522	<b>SAR Start:</b>	0.037 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.037 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.05 dB
<b>Diode Compression Factors (V*200):</b>	10 / 11.7 / 7.7	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

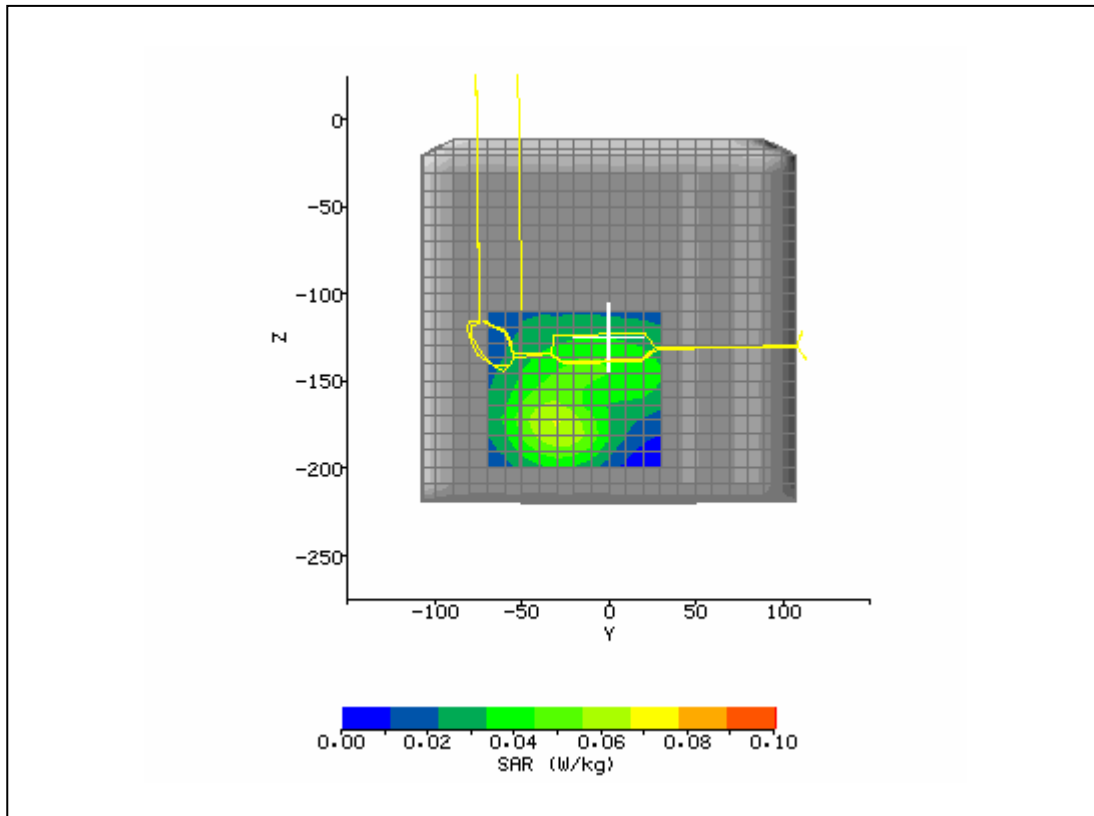


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/20/2005 12:32:17 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap128_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	56.03
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	0.984
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-29.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-176.60 mm
<b>Antenna Configuration:</b>	GPRS	<b>Max E Field:</b>	12.22 V/m
<b>Test Frequency:</b>	836.6 with 1 timeslot uplinkMHz	<b>SAR 1g:</b>	0.129 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.087 W/kg
<b>Conversion Factors:</b>	.522 / .522 / .522	<b>SAR Start:</b>	0.055 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.054 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.04 dB
<b>Diode Compression Factors (V*200):</b>	10 / 11.7 / 7.7	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

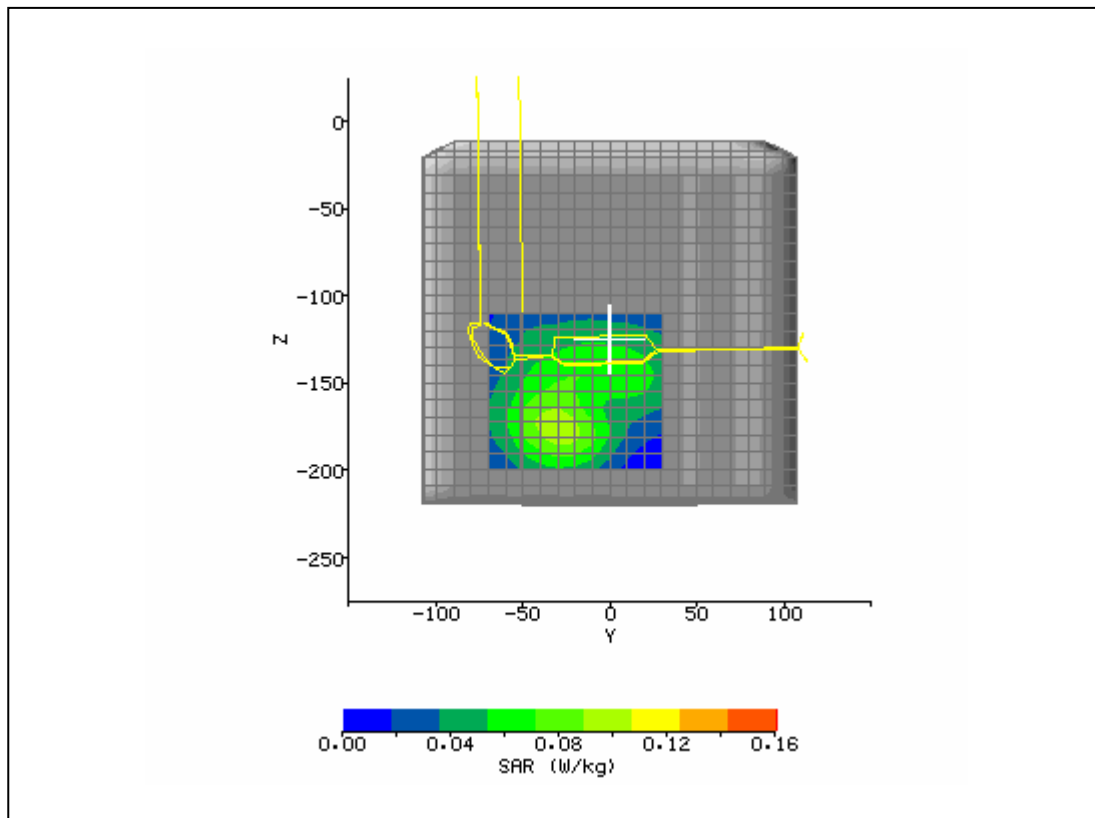


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/20/2005 1:19:18 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap190_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	56.78
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	0.989
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-29.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-176.60 mm
<b>Antenna Configuration:</b>	GPRS	<b>Max E Field:</b>	14.19 V/m
<b>Test Frequency:</b>	848.8 with 1 timeslot uplinkMHz	<b>SAR 1g:</b>	0.174 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.117 W/kg
<b>Conversion Factors:</b>	.522 / .522 / .522	<b>SAR Start:</b>	0.074 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.074 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.00
<b>Diode Compression Factors (V*200):</b>	10 / 11.7 / 7.7	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

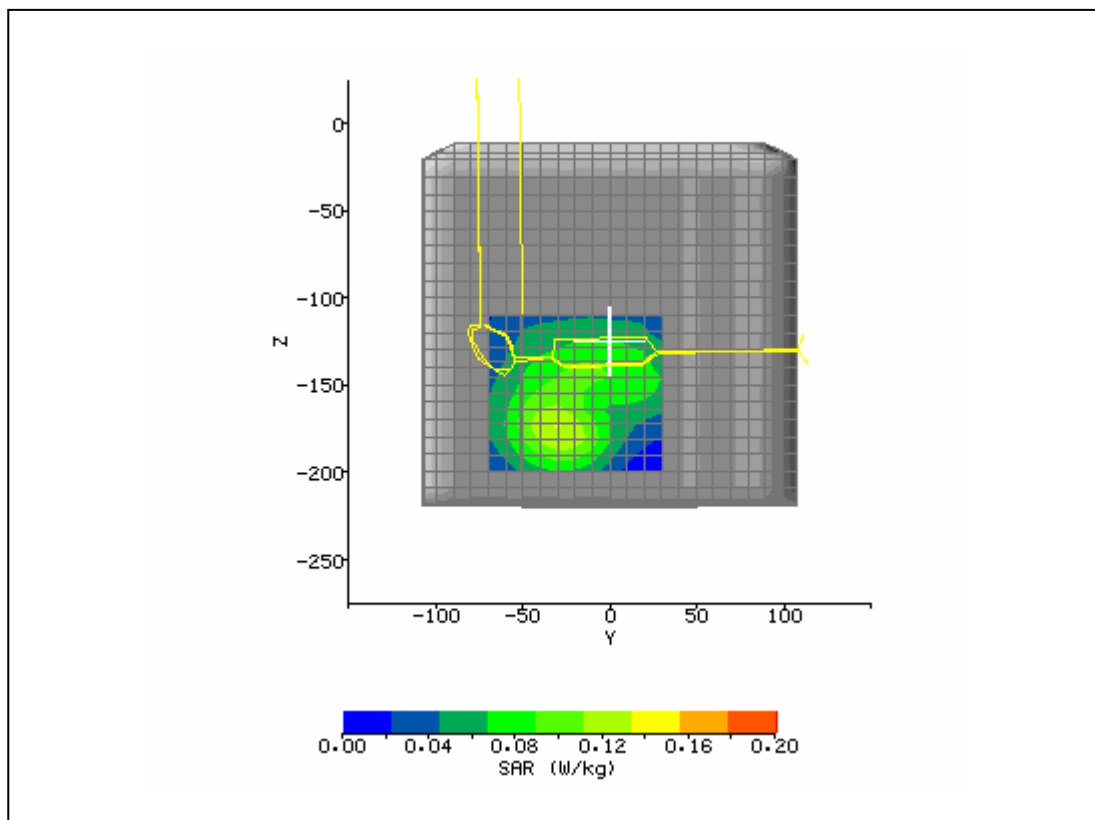


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/22/2005 12:13:52 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap128_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	56.47
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	0.981
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-26.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-174.80 mm
<b>Antenna Configuration:</b>	GPRS	<b>Max E Field:</b>	11.07 V/m
<b>Test Frequency:</b>	824.2 with 4 timeslot uplinkMHz	<b>SAR 1g:</b>	0.104 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.070 W/kg
<b>Conversion Factors:</b>	.522 / .522 / .522	<b>SAR Start:</b>	0.044 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.044 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.00 dB
<b>Diode Compression Factors (V*200):</b>	17.04 / 18.06 / 15.84	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

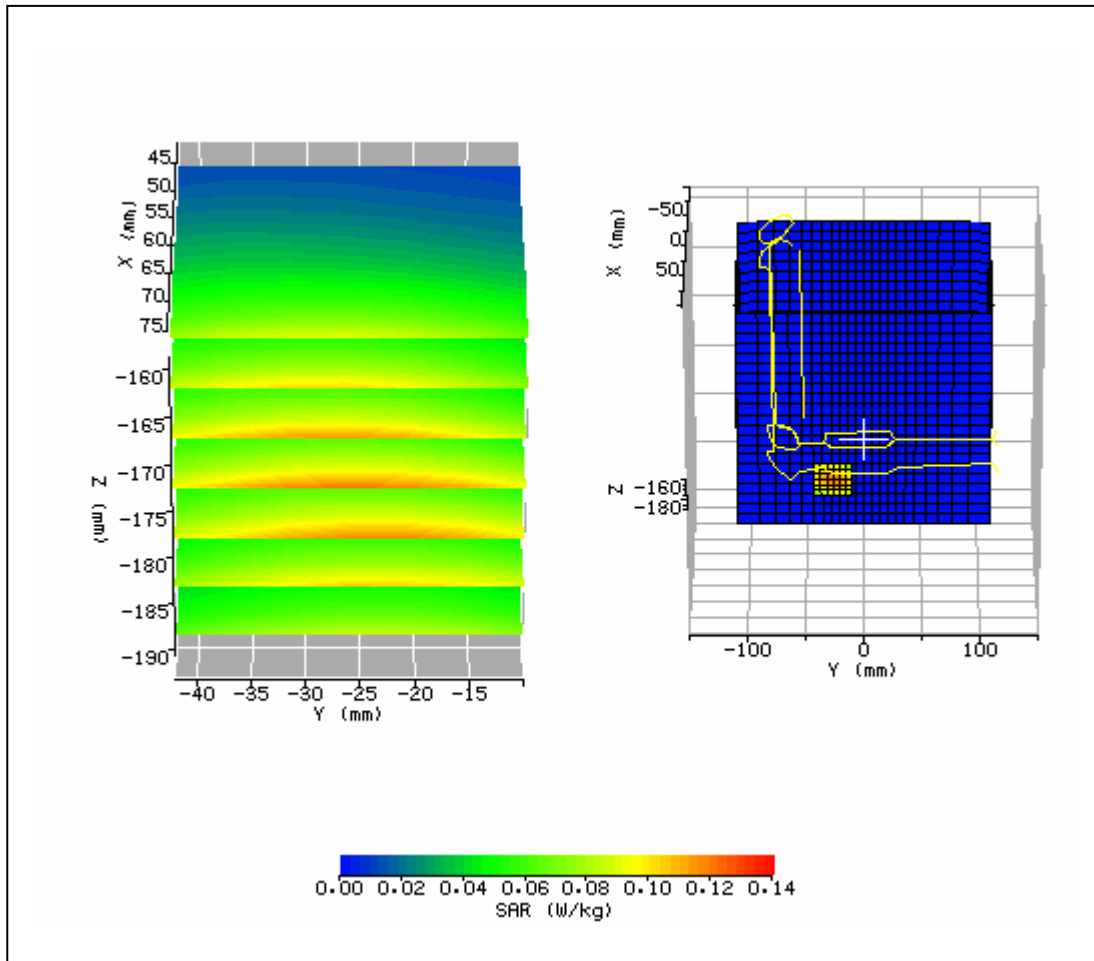


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/22/2005 12:45:54 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap128_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	56.03
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	0.984
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-26.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-175.70 mm
<b>Antenna Configuration:</b>	GPRS	<b>Max E Field:</b>	12.56 V/m
<b>Test Frequency:</b>	836.6 with 4 timeslot uplinkMHz	<b>SAR 1g:</b>	0.134 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.089 W/kg
<b>Conversion Factors:</b>	.522 / .522 / .522	<b>SAR Start:</b>	0.057 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.056 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.01 dB
<b>Diode Compression Factors (V*200):</b>	17.04 / 18.06 / 15.84	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

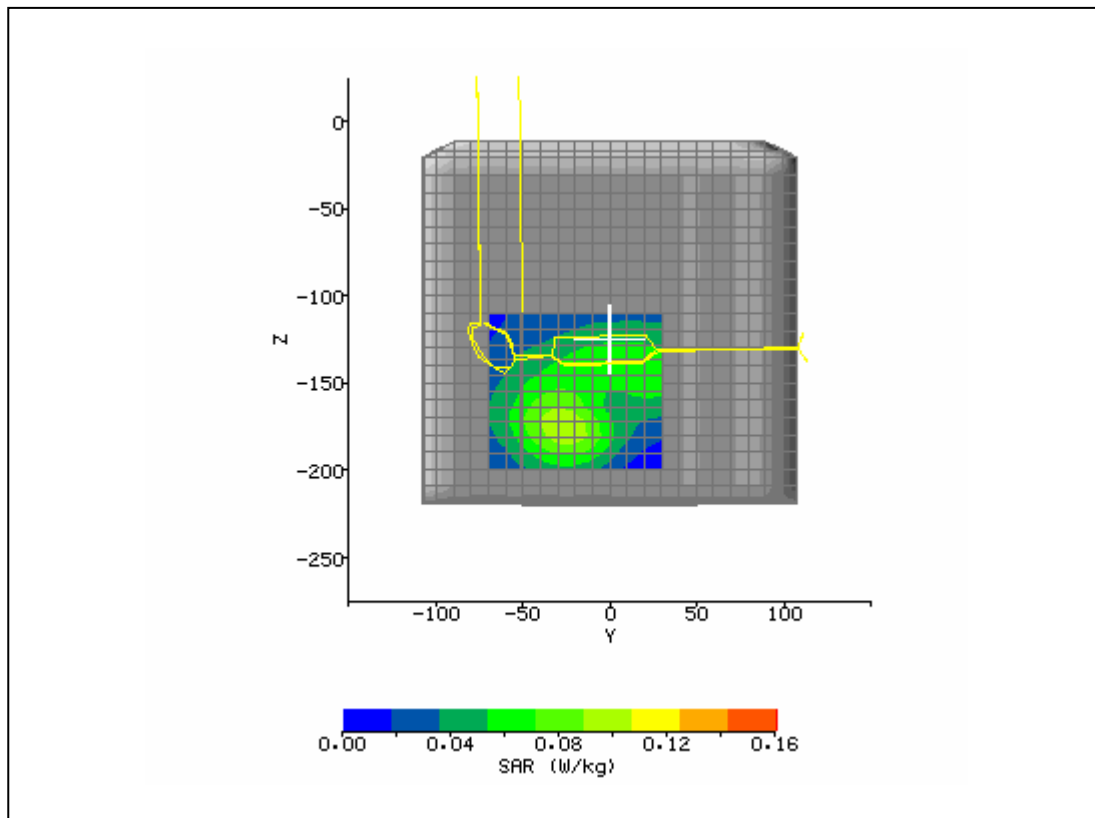


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/22/2005 1:17:31 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap190_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	56.78
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	0.989
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-26.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-175.70 mm
<b>Antenna Configuration:</b>	GPRS	<b>Max E Field:</b>	13.68 V/m
<b>Test Frequency:</b>	848.8 with 4 timeslot uplinkMHz	<b>SAR 1g:</b>	0.160 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.106 W/kg
<b>Conversion Factors:</b>	.522 / .522 / .522	<b>SAR Start:</b>	0.067 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.068 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.06 dB
<b>Diode Compression Factors (V*200):</b>	17.04 / 18.06 / 15.84	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

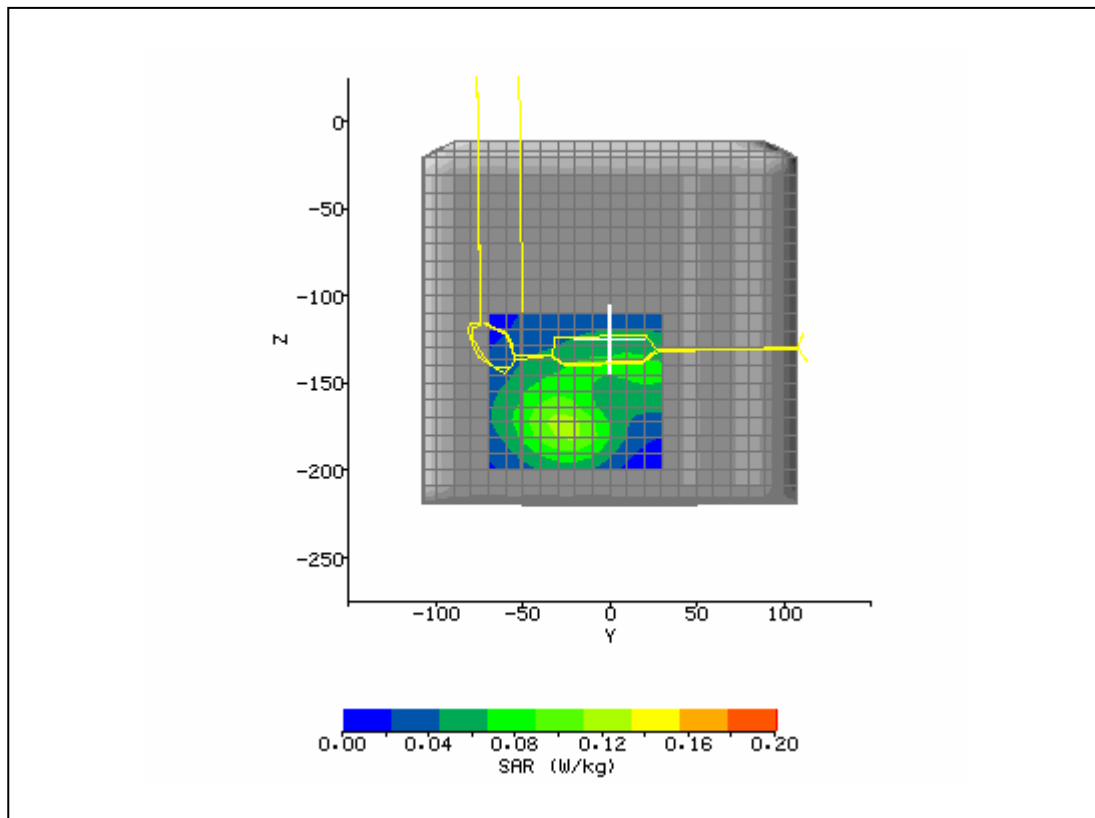

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/22/2005 5:20:13 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap810_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	53.22
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.573
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-23.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-174.80 mm
<b>Antenna Configuration:</b>	GPRS	<b>Max E Field:</b>	8.42 V/m
<b>Test Frequency:</b>	1880 with 1 timeslot uplinkMHz	<b>SAR 1g:</b>	0.097 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.054 W/kg
<b>Conversion Factors:</b>	0.666 / 0.666 / 0.666	<b>SAR Start:</b>	0.024 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.024 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.02 dB
<b>Diode Compression Factors (V*200):</b>	10 / 11.7 / 7.7	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

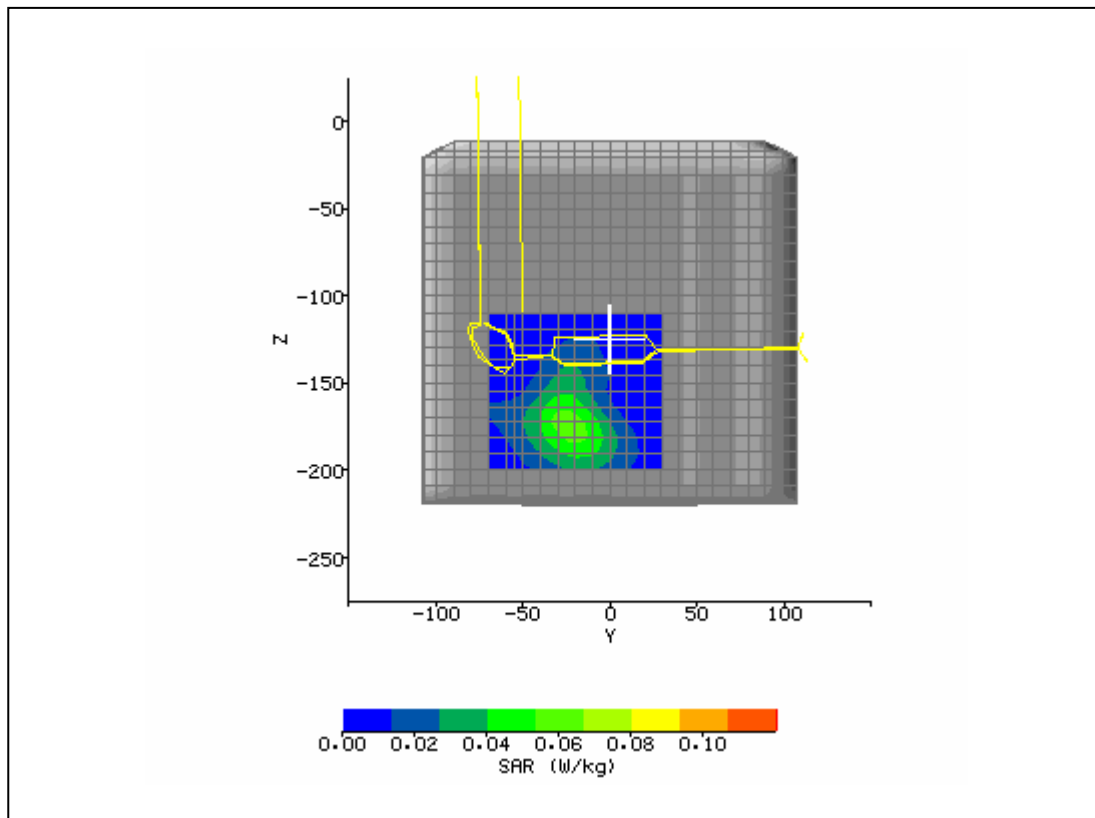


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/22/2005 2:14:04 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap251_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	53.36
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.561
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-43.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-174.80 mm
<b>Antenna Configuration:</b>	GPRS	<b>Max E Field:</b>	9.39 V/m
<b>Test Frequency:</b>	1850.2 with 4 timeslot uplinkMHz	<b>SAR 1g:</b>	0.114 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.068 W/kg
<b>Conversion Factors:</b>	0.666 / 0.666 / 0.666	<b>SAR Start:</b>	0.031 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.031 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.01 dB
<b>Diode Compression Factors (V*200):</b>	17.04 / 18.06 / 15.84	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

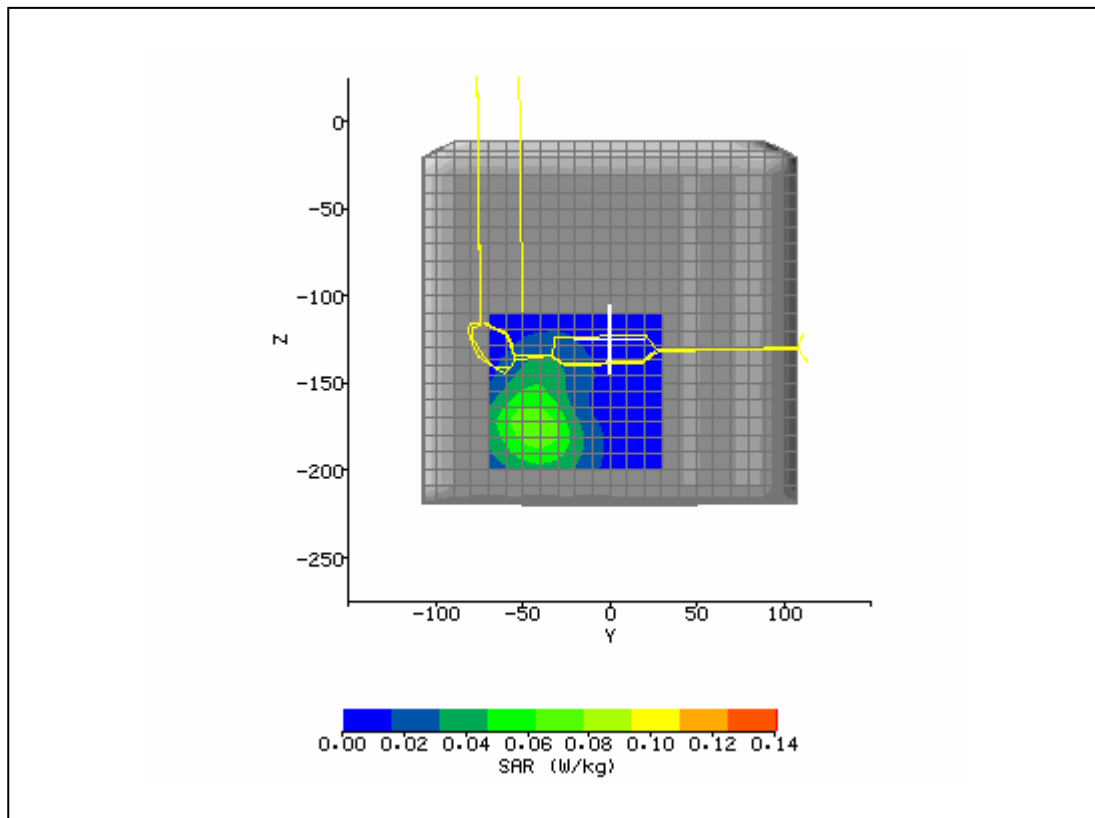





<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/22/2005 3:02:18 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	53.22
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.573
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-43.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-175.70 mm
<b>Antenna Configuration:</b>	GPRS	<b>Max E Field:</b>	9.06 V/m
<b>Test Frequency:</b>	1880 with 4 timeslot uplinkMHz	<b>SAR 1g:</b>	0.105 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.060 W/kg
<b>Conversion Factors:</b>	0.666 / 0.666 / 0.666	<b>SAR Start:</b>	0.025 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.026 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.27 dB
<b>Diode Compression Factors (V*200):</b>	17.04 / 18.06 / 15.84	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

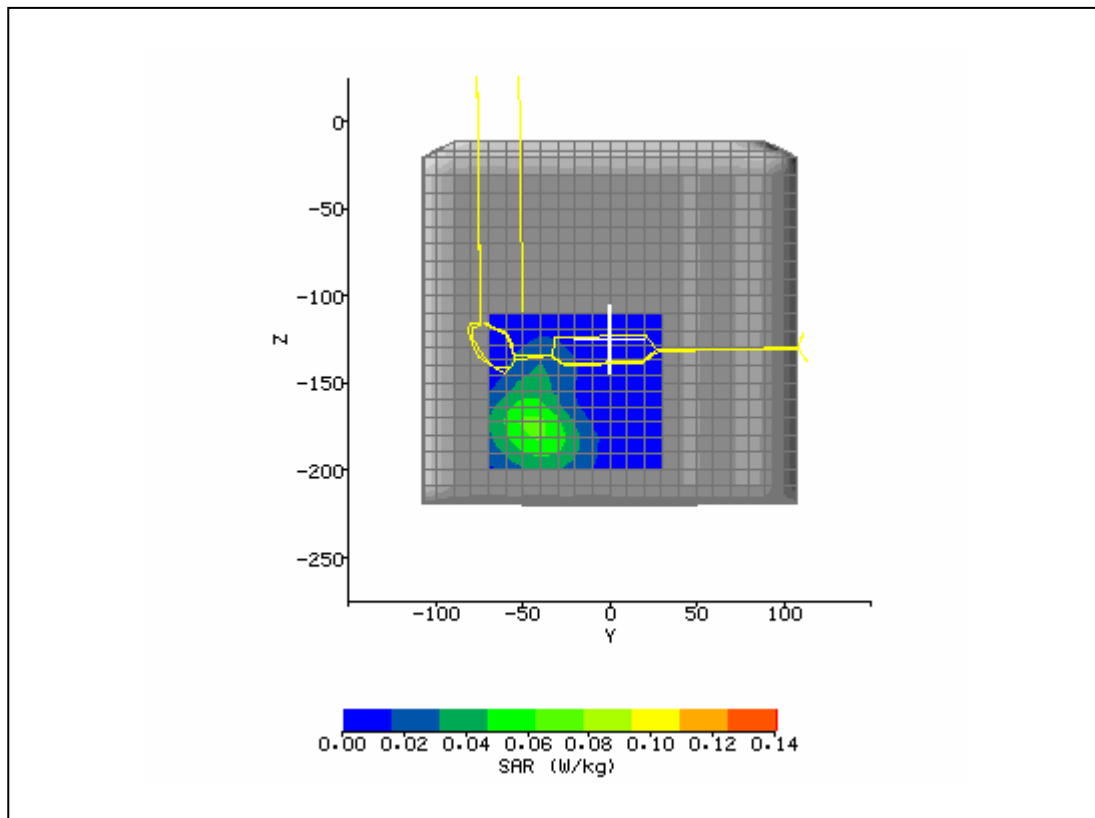


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/22/2005 4:19:19 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap661_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	52.99
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.575
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-42.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-177.50 mm
<b>Antenna Configuration:</b>	GPRS	<b>Max E Field:</b>	8.01 V/m
<b>Test Frequency:</b>	1909.8 with 4 timeslot uplinkMHz	<b>SAR 1g:</b>	0.083 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.047 W/kg
<b>Conversion Factors:</b>	0.666 / 0.666 / 0.666	<b>SAR Start:</b>	0.019 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.018 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.09 dB
<b>Diode Compression Factors (V*200):</b>	17.04 / 18.06 / 15.84	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

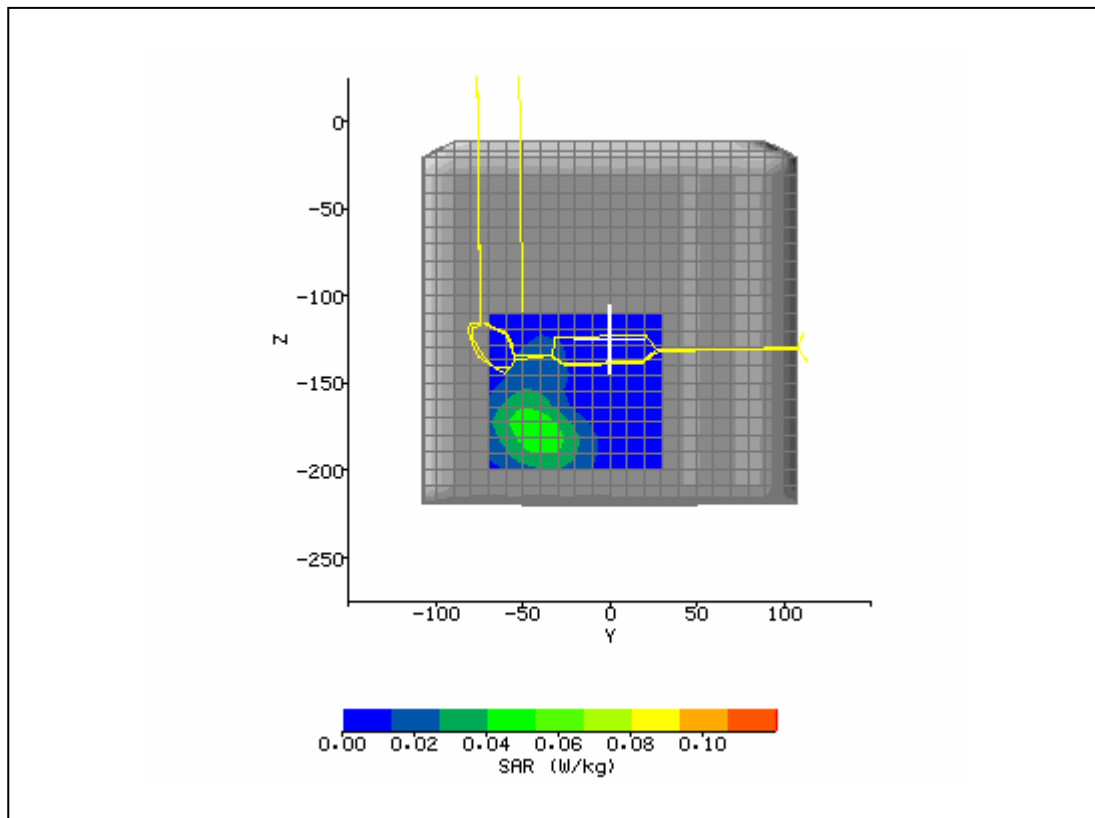


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/17/2005 3:01:38 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	51.35
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.947
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-45.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-138.80 mm
<b>Antenna Configuration:</b>	WLAN	<b>Max E Field:</b>	3.29 V/m
<b>Test Frequency:</b>	2412MHz 802.11b 1Mb	<b>SAR 1g:</b>	0.017 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.009 W/kg
<b>Conversion Factors:</b>	0.705 / 0.705 / 0.705	<b>SAR Start:</b>	0.006 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.006 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.00 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

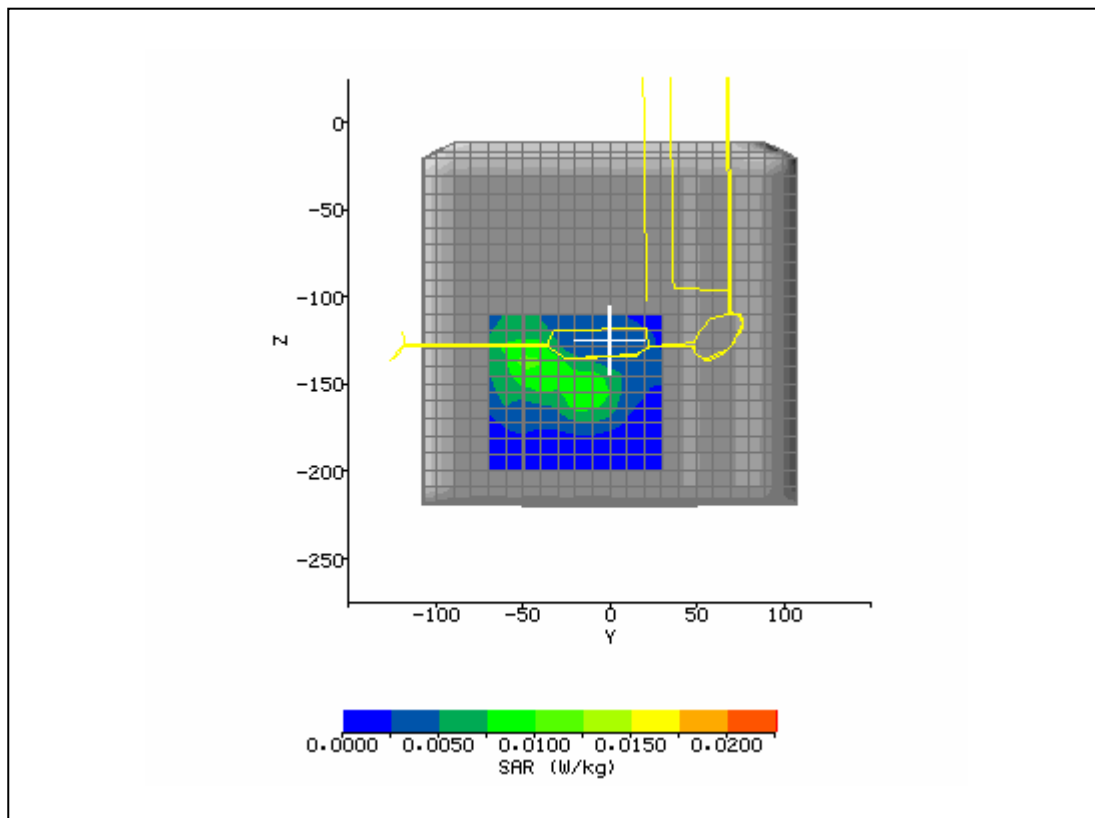


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/17/2005 3:35:38 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap2412_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	51.70
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.959
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-26.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-140.60 mm
<b>Antenna Configuration:</b>	WLAN	<b>Max E Field:</b>	4.67 V/m
<b>Test Frequency:</b>	2437 802.11b 1Mb/SMHz	<b>SAR 1g:</b>	0.035 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.020 W/kg
<b>Conversion Factors:</b>	0.705 / 0.705 / 0.705	<b>SAR Start:</b>	0.009 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.009 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.01 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

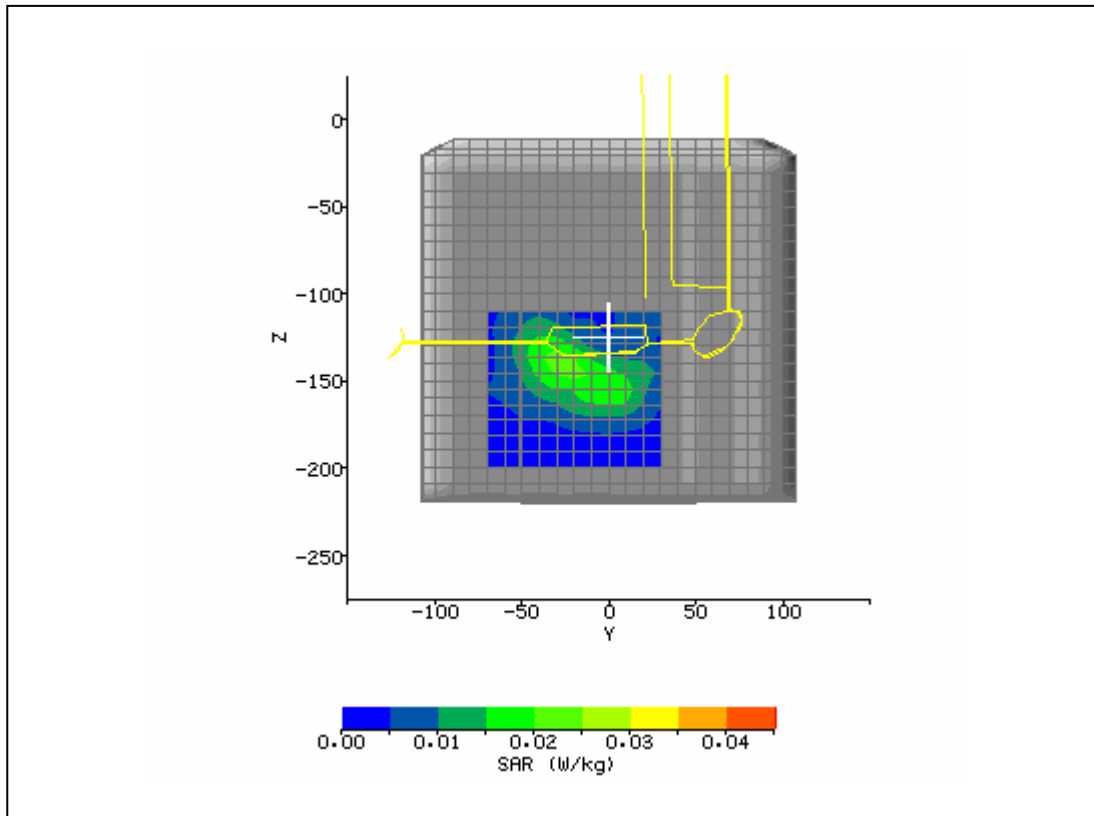


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/17/2005 4:16:39 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap2437_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	51.09
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.957
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-12.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-153.20 mm
<b>Antenna Configuration:</b>	WLAN	<b>Max E Field:</b>	5.23 V/m
<b>Test Frequency:</b>	2462 802.11b 1Mb/SMHz	<b>SAR 1g:</b>	0.042 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.024 W/kg
<b>Conversion Factors:</b>	0.705 / 0.705 / 0.705	<b>SAR Start:</b>	0.011 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.011 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.02 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

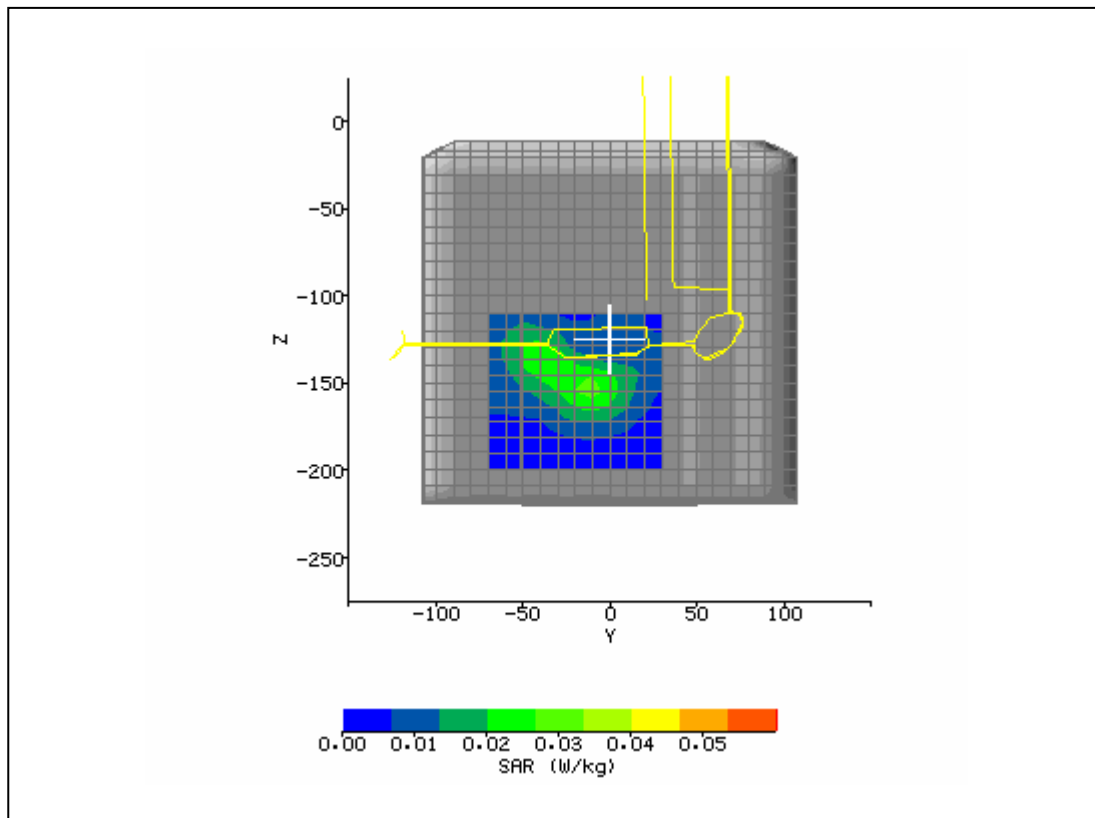


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/17/2005 4:52:30 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap2462_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	51.35
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.947
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-26.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-138.80 mm
<b>Antenna Configuration:</b>	WLAN	<b>Max E Field:</b>	3.79 V/m
<b>Test Frequency:</b>	2412 802.11g 6Mb/SMHz	<b>SAR 1g:</b>	0.022 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.013 W/kg
<b>Conversion Factors:</b>	0.705 / 0.705 / 0.705	<b>SAR Start:</b>	0.008 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.008 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.34 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

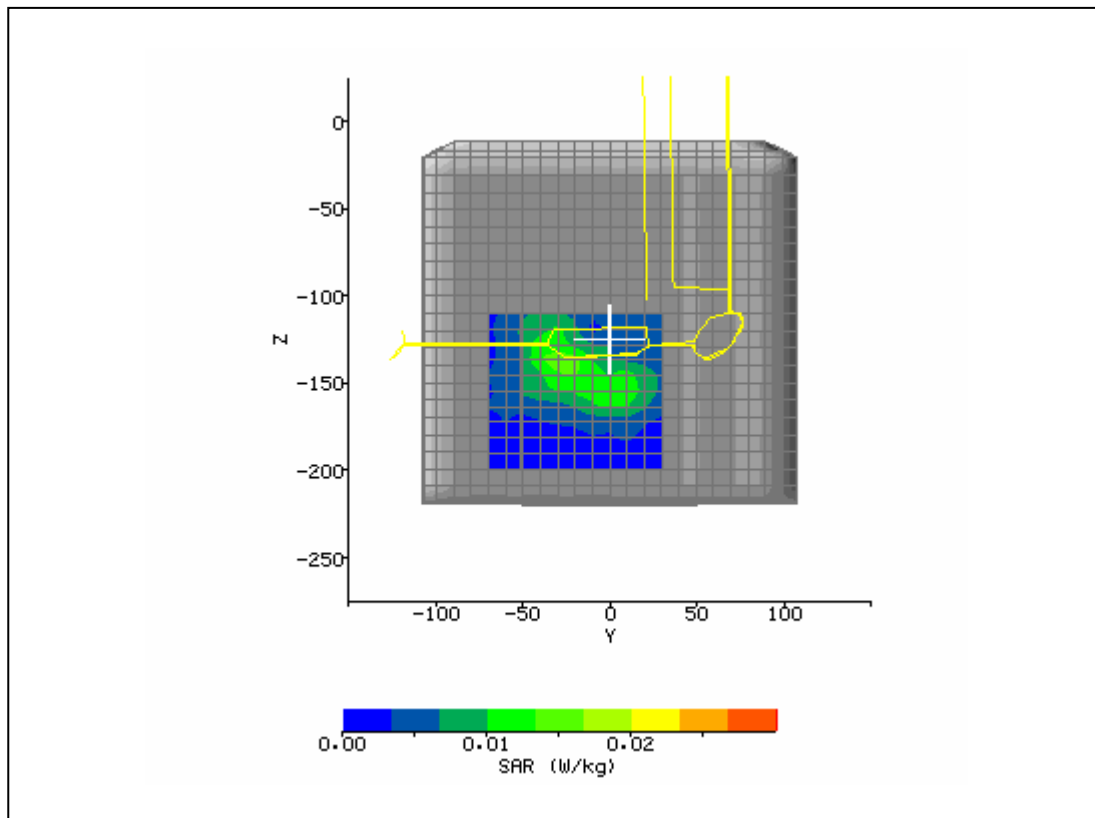

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/24/2005 12:04:32 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap5180_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	47.99
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	5.401
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-17.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-174.80 mm
<b>Antenna Configuration:</b>	WLAN	<b>Max E Field:</b>	3.20 V/m
<b>Test Frequency:</b>	5180MHz	<b>SAR 1g:</b>	0.046 W/kg
<b>Air Factors:</b>	346 / 318 / 386		
<b>Conversion Factors:</b>	0.840 / 0.840 / 0.840	<b>SAR Start:</b>	0.032 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.032 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.03 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

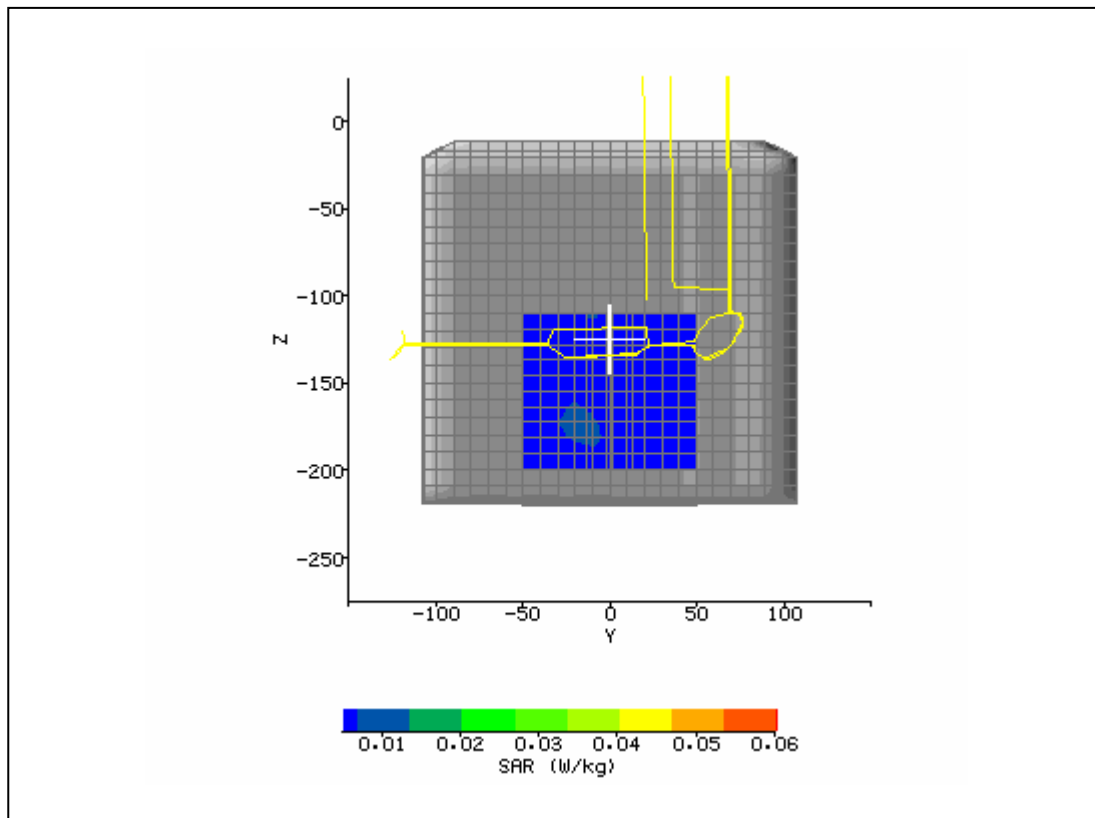

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/24/2005 1:02:46 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap5260_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	47.72
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	5.459
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-25.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-172.10 mm
<b>Antenna Configuration:</b>	WLAN	<b>Max E Field:</b>	8.59 V/m
<b>Test Frequency:</b>	5260MHz	<b>SAR 1g:</b>	0.291 W/kg
<b>Air Factors:</b>	346 / 318 / 386		
<b>Conversion Factors:</b>	0.840 / 0.840 / 0.840	<b>SAR Start:</b>	0.257 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.257 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.00 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

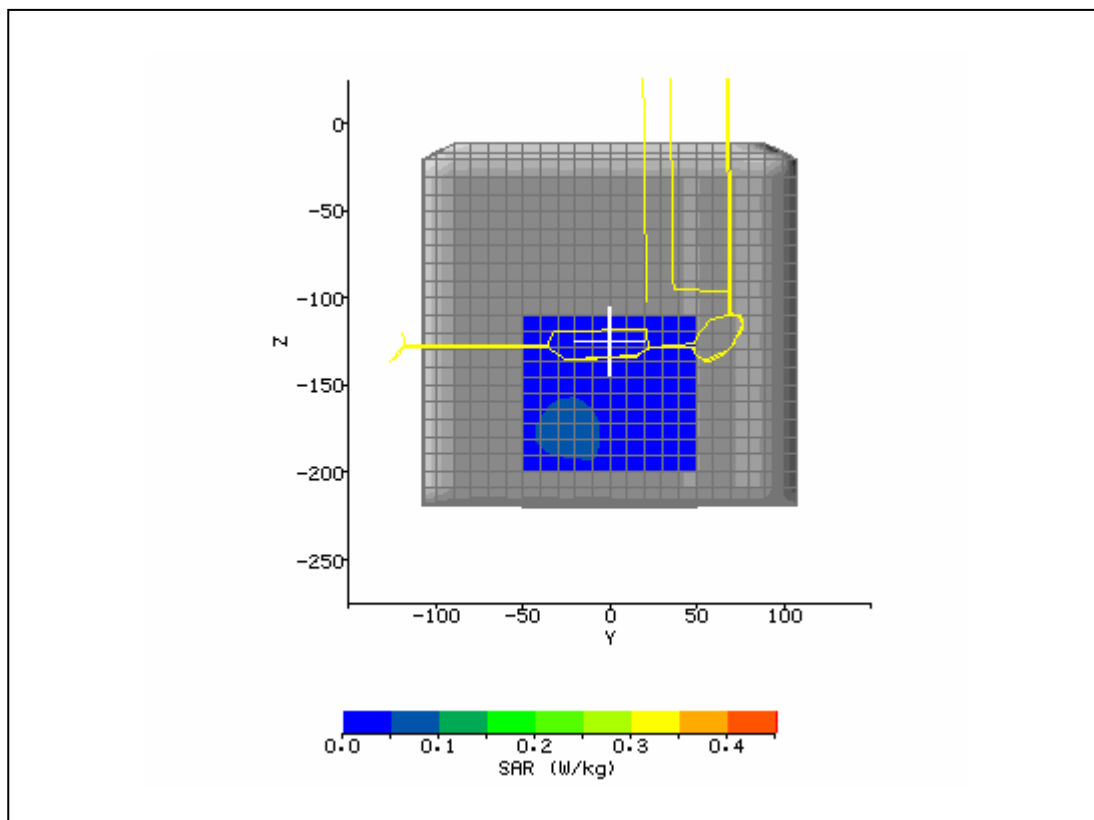



<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/24/2005 1:30:42 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap5260_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Xplore	<b>Relative Permittivity:</b>	47.66
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	5.491
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-31.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-176.60 mm
<b>Antenna Configuration:</b>	WLAN	<b>Max E Field:</b>	8.72 V/m
<b>Test Frequency:</b>	5320MHz	<b>SAR 1g:</b>	0.310 W/kg
<b>Air Factors:</b>	346 / 318 / 386		
<b>Conversion Factors:</b>	0.840 / 0.840 / 0.840	<b>SAR Start:</b>	0.260 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.261 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.02 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

