




<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	1/30/2006 4:58:28 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap128_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	Xplore lx104 w/ AC860	<b>Relative Permittivity:</b>	56.59
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.581
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-33.33 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-176.00 mm
<b>Antenna Configuration:</b>	integral	<b>Max E Field:</b>	22.72 V/m
<b>Test Frequency:</b>	824.2 GPRSMHz	<b>SAR 1g:</b>	0.435 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.288 W/kg
<b>Conversion Factors:</b>	0.666 / 0.666 / 0.666	<b>SAR Start:</b>	0.222 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.222 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.01 dB
<b>Diode Compression Factors (V*200):</b>	11.9 / 12.3 / 10	<b>Probe battery last changed:</b>	01/11/2006
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

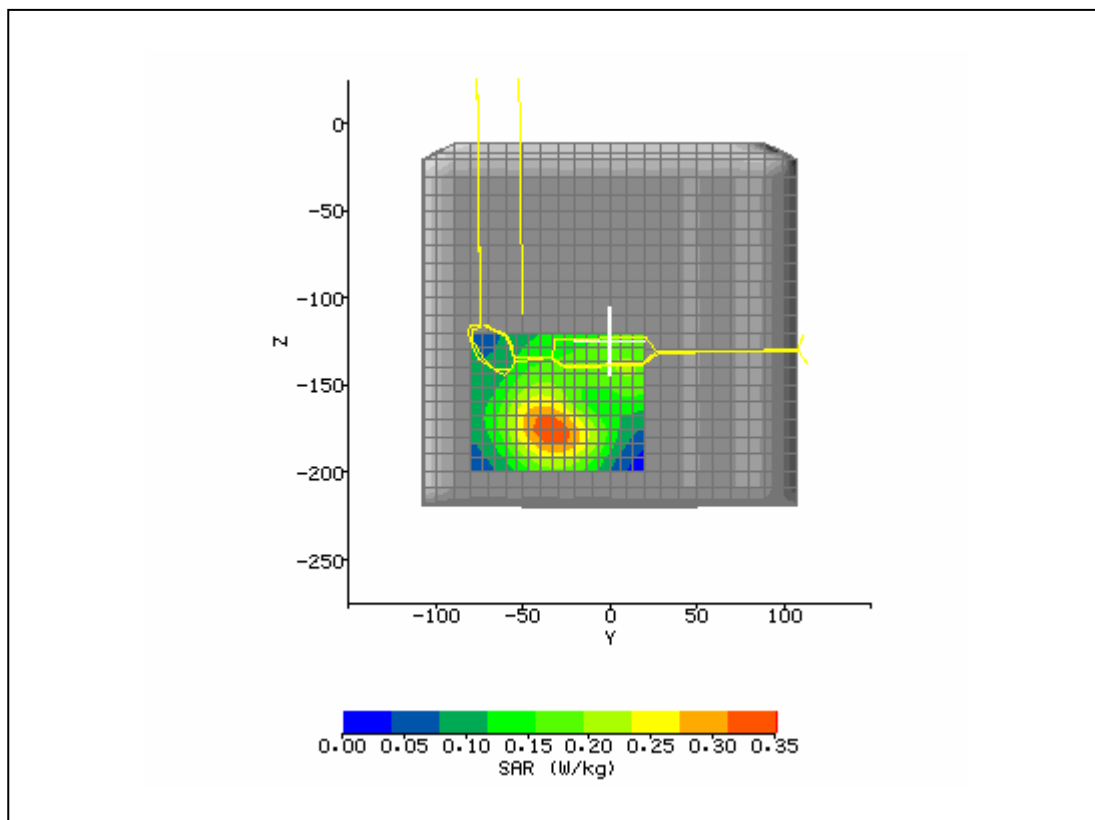


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	2/1/2006 7:28:09 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap192_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	Xplore lx104 w/ AC860	<b>Relative Permittivity:</b>	56.18
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.581
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-28.67 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-176.00 mm
<b>Antenna Configuration:</b>	integral	<b>Max E Field:</b>	26.01 V/m
<b>Test Frequency:</b>	837 GPRSMHz	<b>SAR 1g:</b>	0.577 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.381 W/kg
<b>Conversion Factors:</b>	0.666 / 0.666 / 0.666	<b>SAR Start:</b>	0.239 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.242 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.05 dB
<b>Diode Compression Factors (V*200):</b>	11.9 / 12.3 / 10	<b>Probe battery last changed:</b>	01/11/2006
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

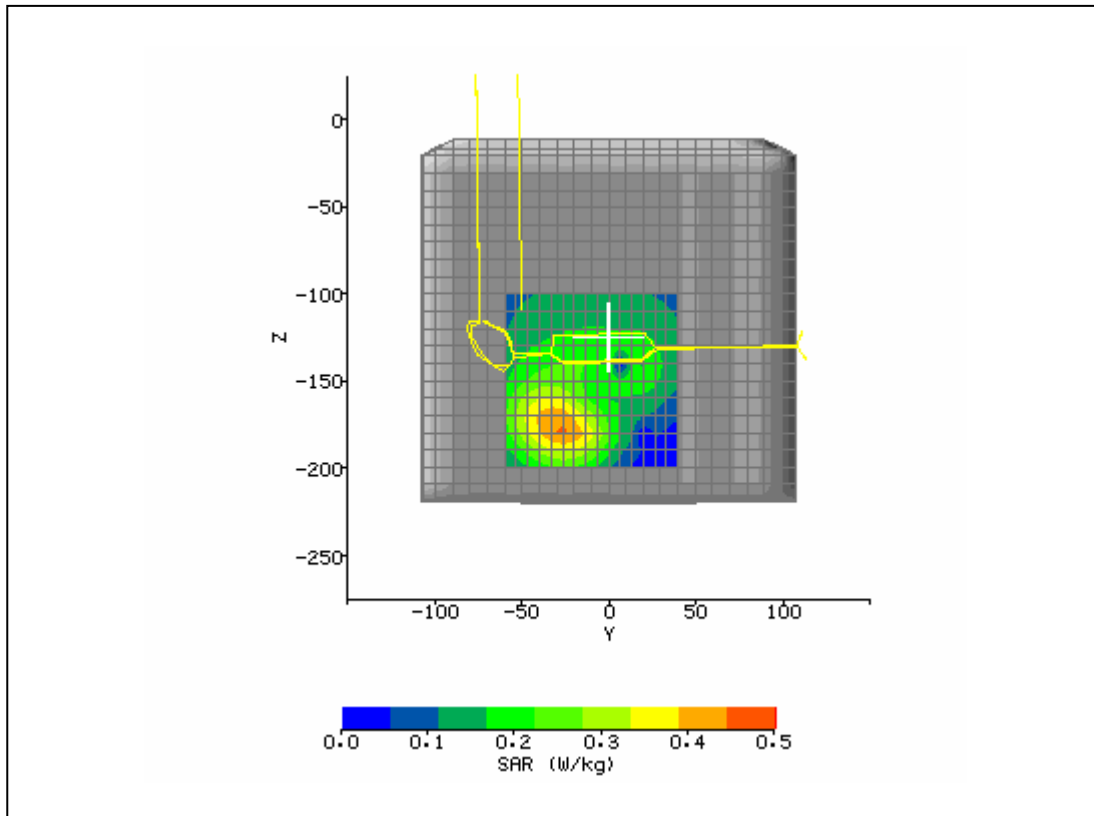


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	2/1/2006 8:04:28 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap251_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	Xplore lx104 w/ AC860	<b>Relative Permittivity:</b>	55.90
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.581
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-27.33 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-177.00 mm
<b>Antenna Configuration:</b>	integral	<b>Max E Field:</b>	25.37 V/m
<b>Test Frequency:</b>	848.8 GPRSMHz	<b>SAR 1g:</b>	0.546 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.359 W/kg
<b>Conversion Factors:</b>	0.666 / 0.666 / 0.666	<b>SAR Start:</b>	0.225 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.225 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.01 dB
<b>Diode Compression Factors (V*200):</b>	11.9 / 12.3 / 10	<b>Probe battery last changed:</b>	01/11/2006
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

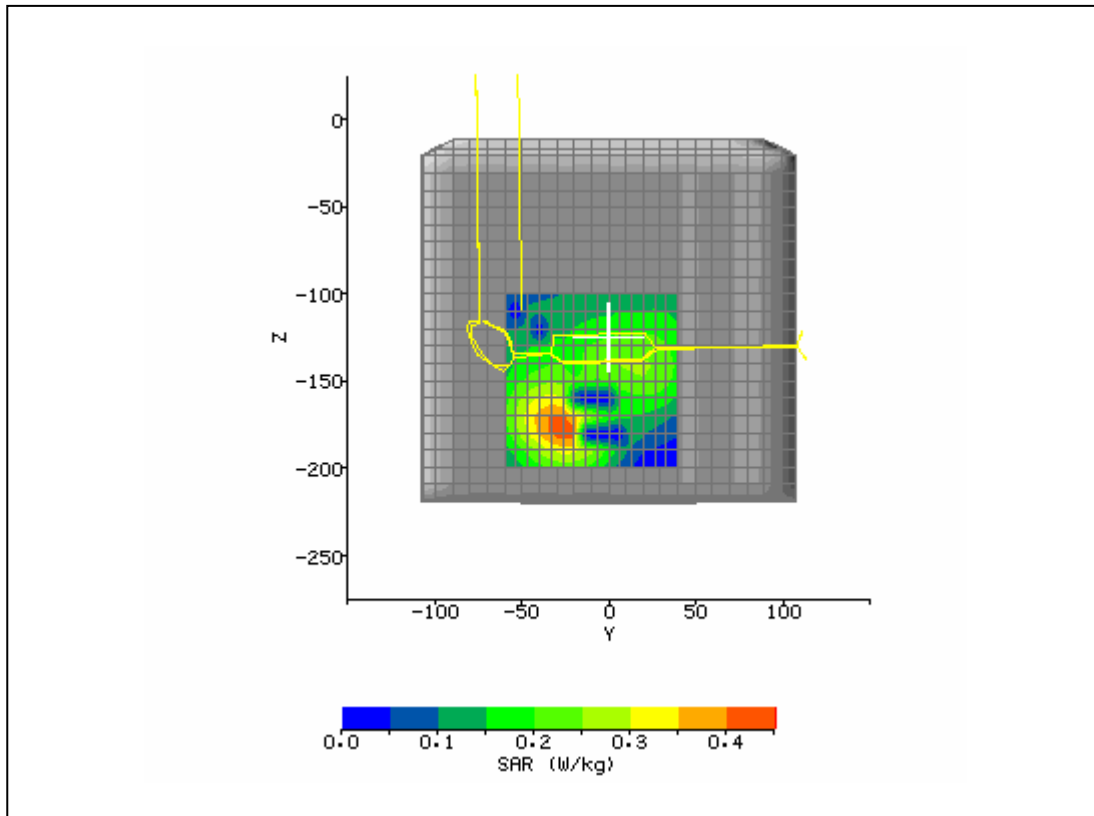


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	2/1/2006 8:47:03 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap4132_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	Xplore lx104 w/ AC860	<b>Relative Permittivity:</b>	56.59
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.581
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-26.67 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-176.00 mm
<b>Antenna Configuration:</b>	integral	<b>Max E Field:</b>	18.00 V/m
<b>Test Frequency:</b>	826.4 UMTSMHz	<b>SAR 1g:</b>	0.276 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.182 W/kg
<b>Conversion Factors:</b>	0.666 / 0.666 / 0.666	<b>SAR Start:</b>	0.116 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.113 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.11 dB
<b>Diode Compression Factors (V*200):</b>	11.9 / 12.3 / 10	<b>Probe battery last changed:</b>	01/11/2006
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

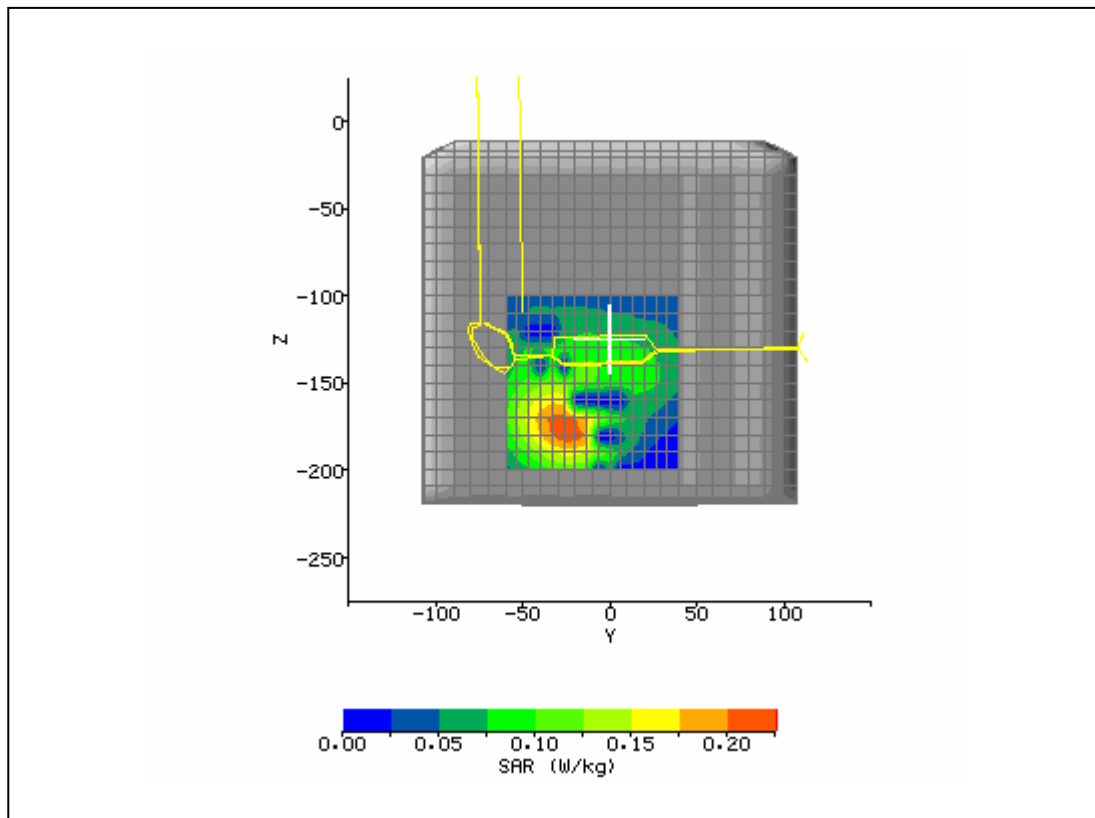


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	2/1/2006 9:20:28 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap4182_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	Xplore lx104 w/ AC860	<b>Relative Permittivity:</b>	56.18
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.581
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-22.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-177.00 mm
<b>Antenna Configuration:</b>	integral	<b>Max E Field:</b>	18.56 V/m
<b>Test Frequency:</b>	836.4 UMTSMHz	<b>SAR 1g:</b>	0.296 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.194 W/kg
<b>Conversion Factors:</b>	0.666 / 0.666 / 0.666	<b>SAR Start:</b>	0.121 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.121 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.01 dB
<b>Diode Compression Factors (V*200):</b>	11.9 / 12.3 / 10	<b>Probe battery last changed:</b>	01/11/2006
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

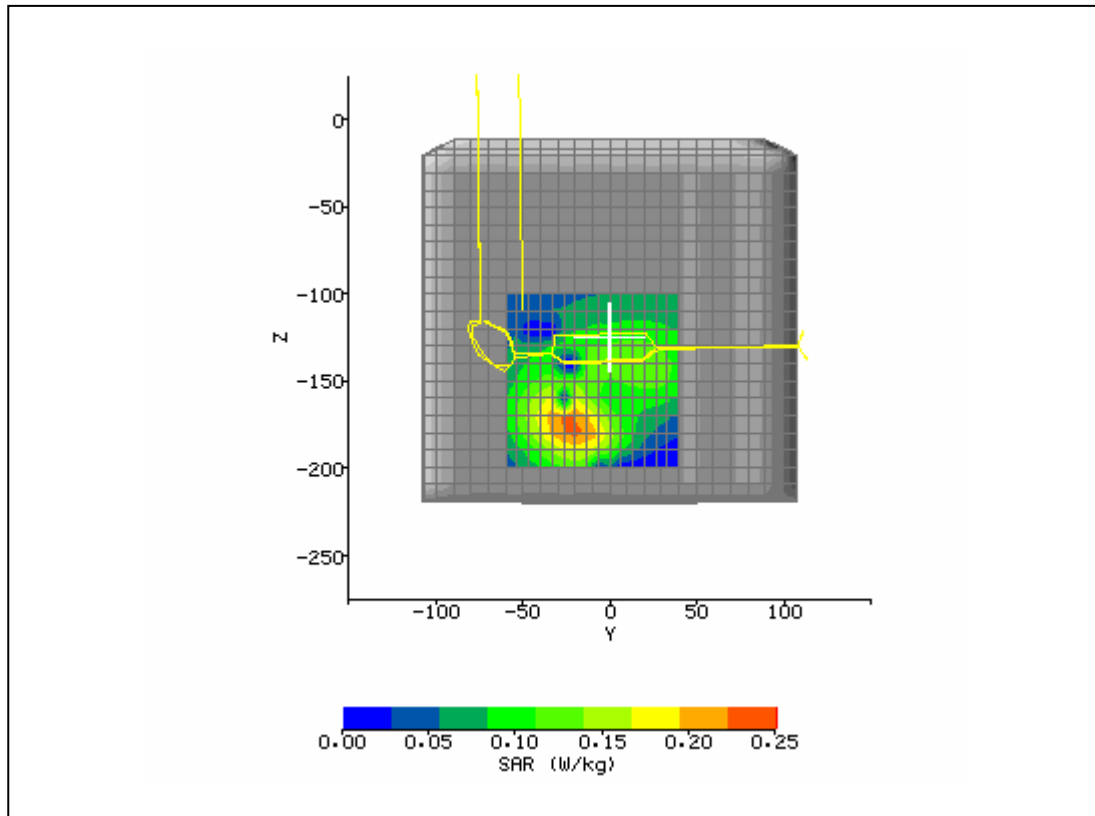


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	2/1/2006 9:53:50 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap4233_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	Xplore lx104 w/ AC860	<b>Relative Permittivity:</b>	55.90
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.581
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-18.67 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-176.00 mm
<b>Antenna Configuration:</b>	integral	<b>Max E Field:</b>	20.24 V/m
<b>Test Frequency:</b>	846.6 UMTSMHz	<b>SAR 1g:</b>	0.350 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.230 W/kg
<b>Conversion Factors:</b>	0.666 / 0.666 / 0.666	<b>SAR Start:</b>	0.139 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.137 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.06 dB
<b>Diode Compression Factors (V*200):</b>	11.9 / 12.3 / 10	<b>Probe battery last changed:</b>	01/11/2006
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

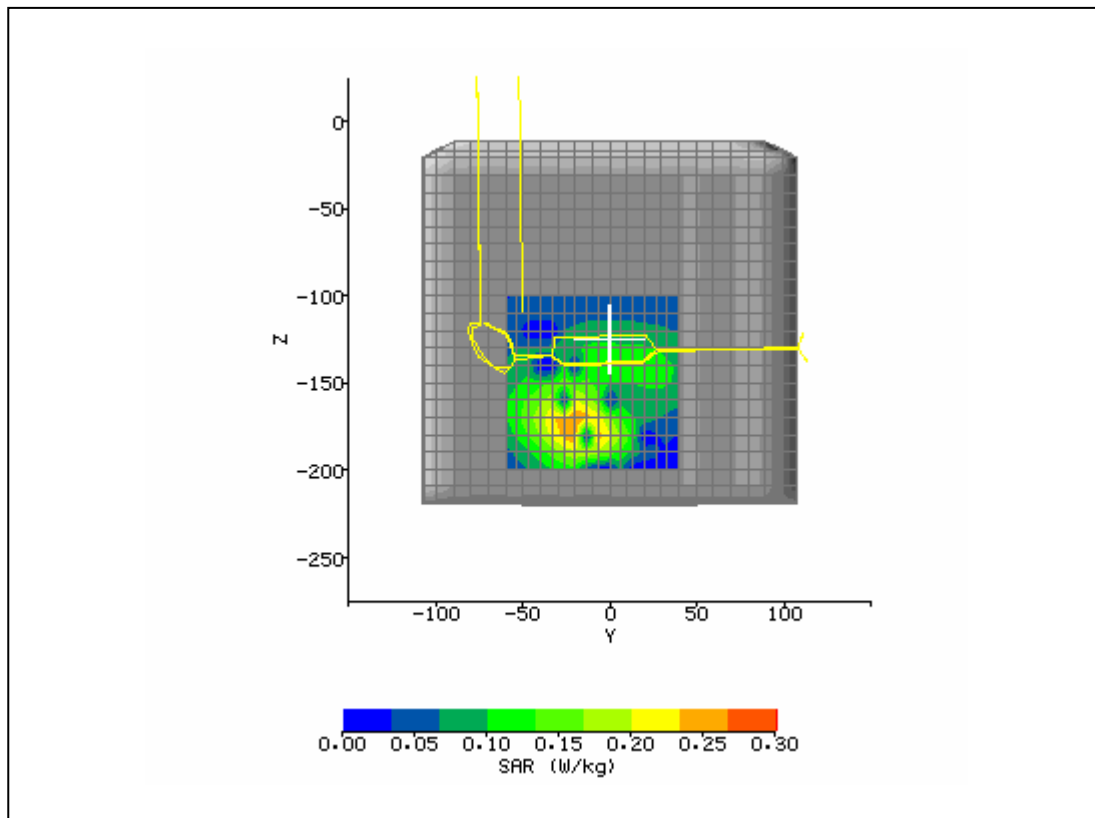

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	2/1/2006 2:37:37 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap512_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	Xplore lx104 w/ AC860	<b>Relative Permittivity:</b>	53.33
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.581
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-14.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-168.67 mm
<b>Antenna Configuration:</b>	integral	<b>Max E Field:</b>	10.18 V/m
<b>Test Frequency:</b>	1850.2MHz	<b>SAR 1g:</b>	0.139 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.086 W/kg
<b>Conversion Factors:</b>	0.666 / 0.666 / 0.666	<b>SAR Start:</b>	0.034 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.034 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.00 dB
<b>Diode Compression Factors (V*200):</b>	11.9 / 12.3 / 10	<b>Probe battery last changed:</b>	01/11/2006
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

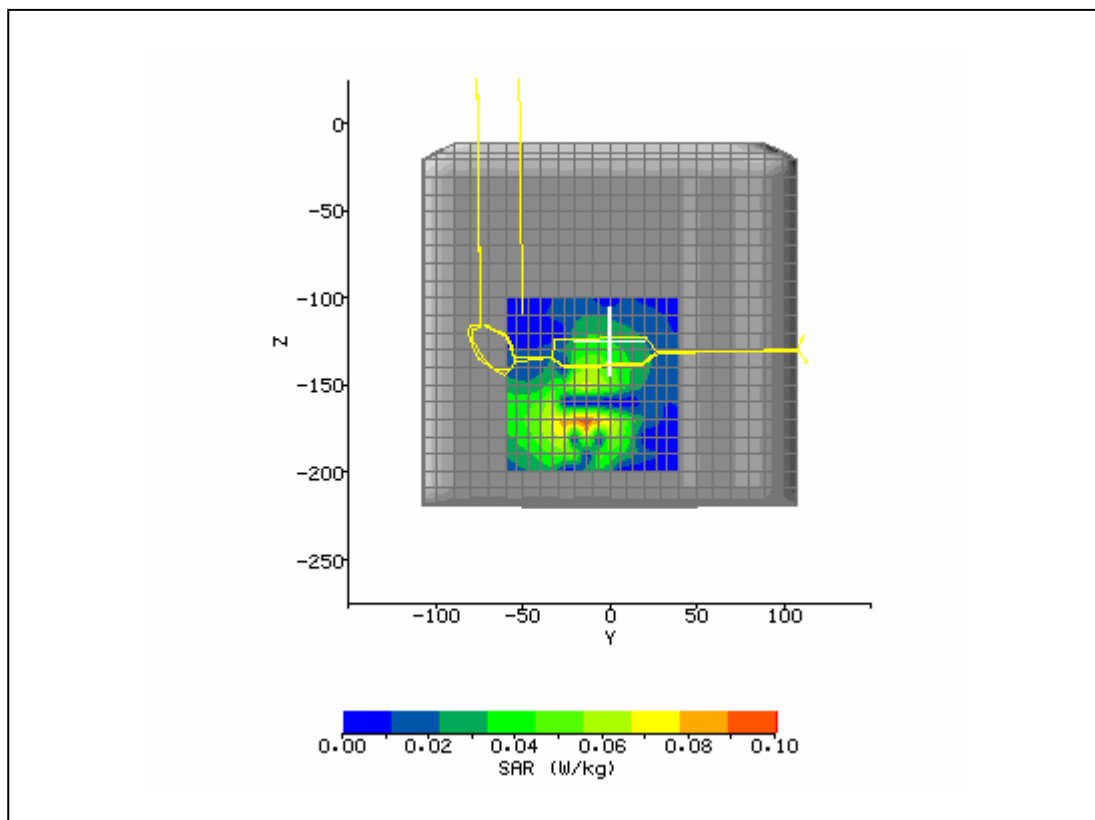


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	2/1/2006 3:11:27 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap661_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	Xplore lx104 w/ AC860	<b>Relative Permittivity:</b>	53.19
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.581
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-22.67 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-169.33 mm
<b>Antenna Configuration:</b>	integral	<b>Max E Field:</b>	8.73 V/m
<b>Test Frequency:</b>	1880MHz	<b>SAR 1g:</b>	0.101 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.063 W/kg
<b>Conversion Factors:</b>	0.666 / 0.666 / 0.666	<b>SAR Start:</b>	0.030 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.031 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.09 dB
<b>Diode Compression Factors (V*200):</b>	11.9 / 12.3 / 10	<b>Probe battery last changed:</b>	01/11/2006
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

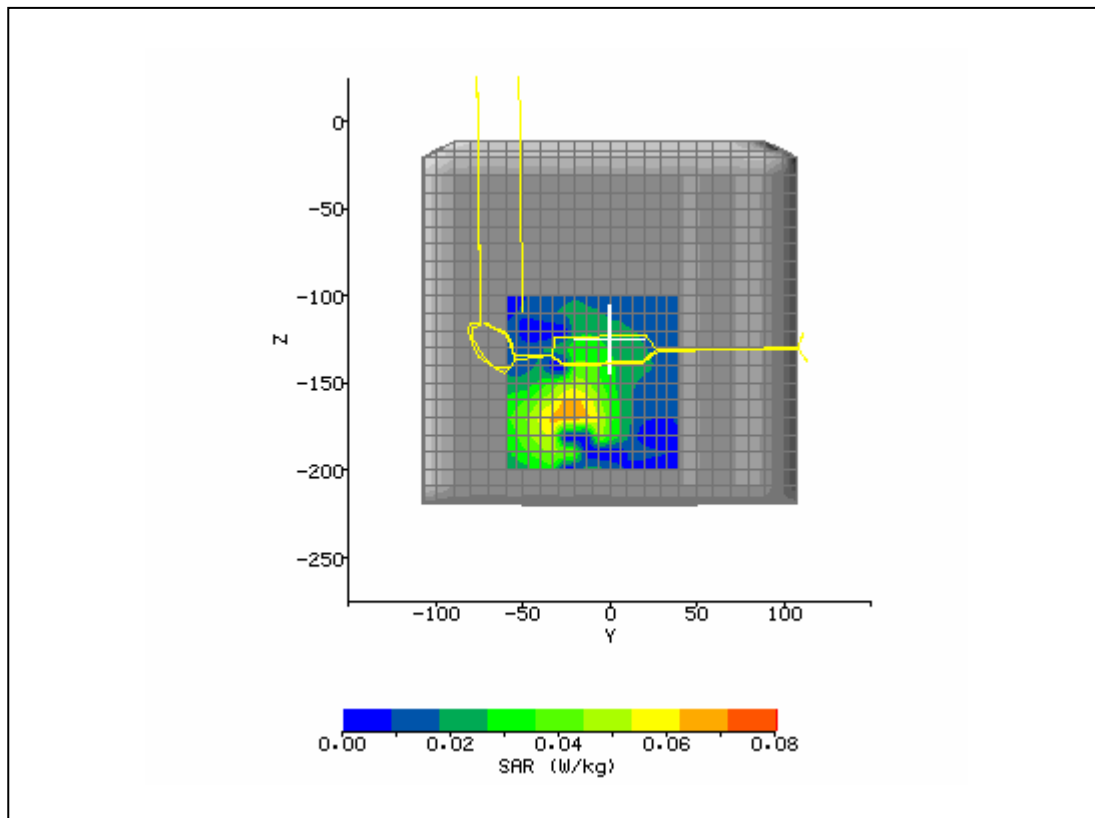





<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	2/1/2006 3:44:20 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap810_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	Xplore lx104 w/ AC860	<b>Relative Permittivity:</b>	53.02
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.581
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-26.67 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-170.67 mm
<b>Antenna Configuration:</b>	integral	<b>Max E Field:</b>	10.22 V/m
<b>Test Frequency:</b>	1909.8MHz	<b>SAR 1g:</b>	0.129 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.082 W/kg
<b>Conversion Factors:</b>	0.666 / 0.666 / 0.666	<b>SAR Start:</b>	0.041 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.041 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.00 dB
<b>Diode Compression Factors (V*200):</b>	11.9 / 12.3 / 10	<b>Probe battery last changed:</b>	01/11/2006
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

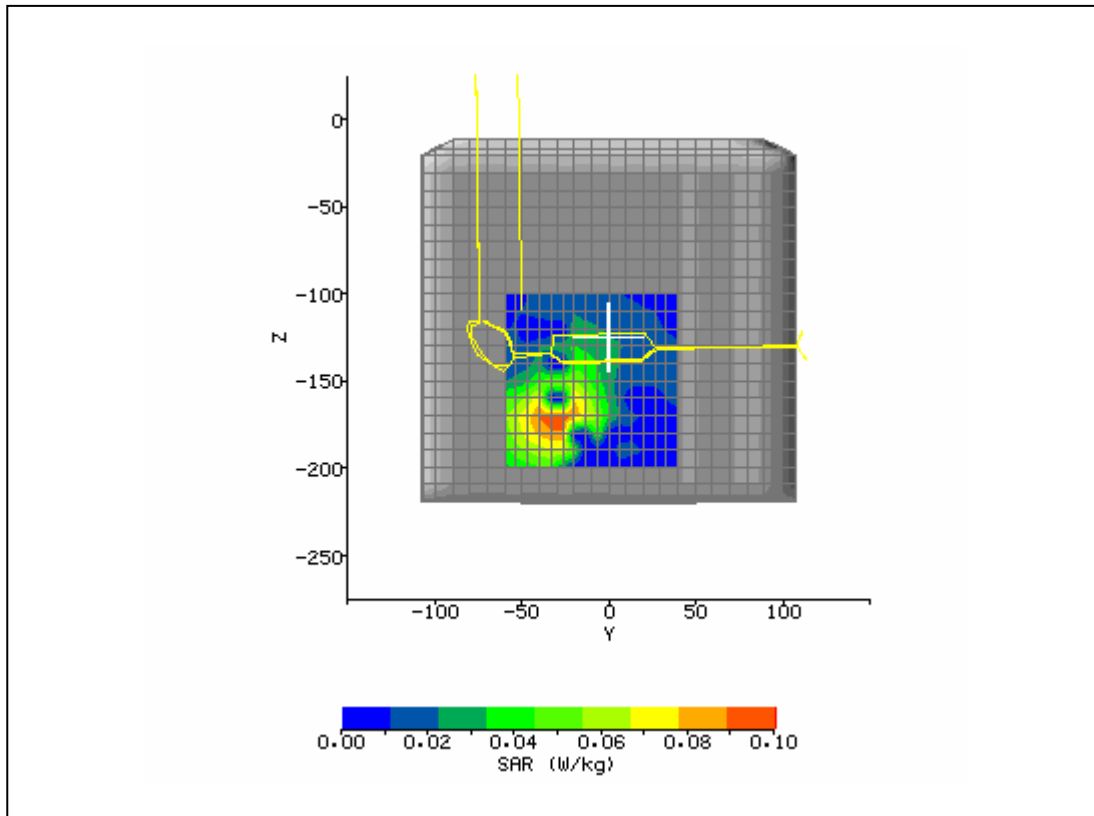

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	2/1/2006 10:41:54 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap9262_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	Xplore lx104 w/ AC860	<b>Relative Permittivity:</b>	53.33
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.581
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-22.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-167.67 mm
<b>Antenna Configuration:</b>	integral	<b>Max E Field:</b>	10.94 V/m
<b>Test Frequency:</b>	1852.4 UMTSMHz	<b>SAR 1g:</b>	0.148 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.089 W/kg
<b>Conversion Factors:</b>	0.666 / 0.666 / 0.666	<b>SAR Start:</b>	0.046 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.046 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.00 dB
<b>Diode Compression Factors (V*200):</b>	11.9 / 12.3 / 10	<b>Probe battery last changed:</b>	01/11/2006
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

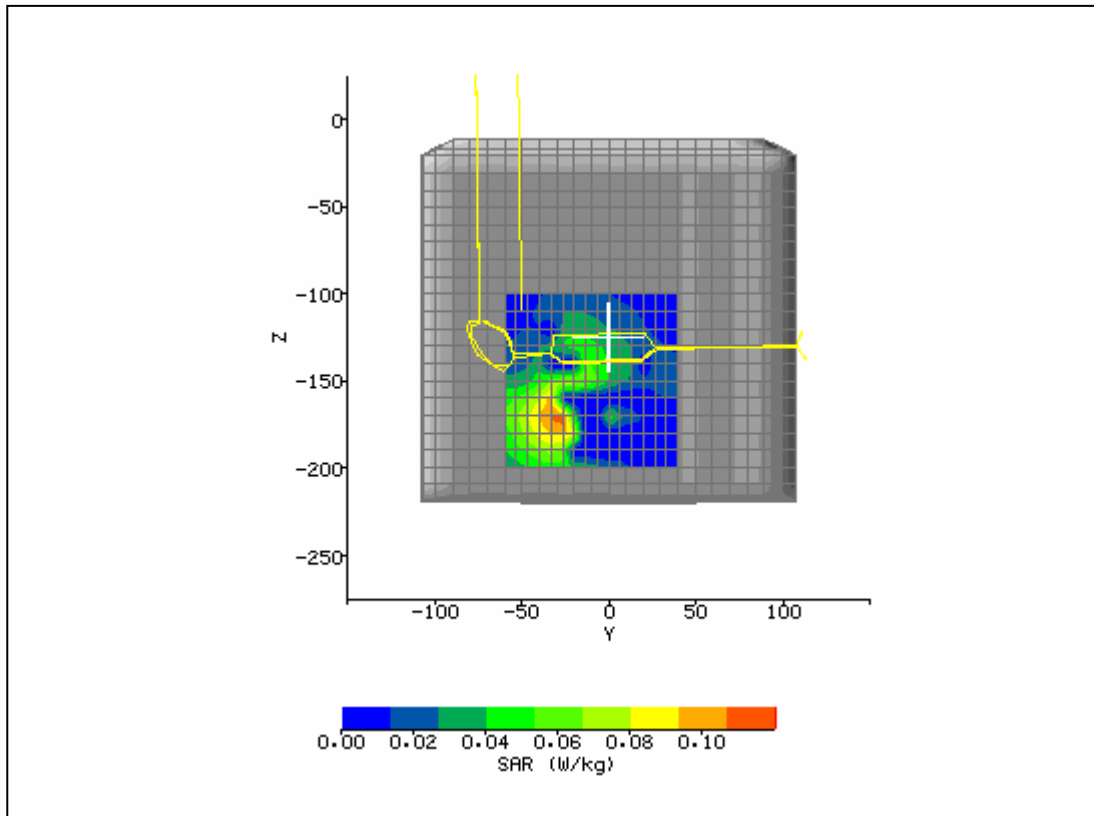

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	2/1/2006 11:17:05 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap9400_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	Xplore lx104 w/ AC860	<b>Relative Permittivity:</b>	53.19
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.581
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-27.33 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-168.67 mm
<b>Antenna Configuration:</b>	integral	<b>Max E Field:</b>	10.67 V/m
<b>Test Frequency:</b>	1880 UMTSMHz	<b>SAR 1g:</b>	0.149 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.087 W/kg
<b>Conversion Factors:</b>	0.666 / 0.666 / 0.666	<b>SAR Start:</b>	0.041 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.040 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.10 dB
<b>Diode Compression Factors (V*200):</b>	11.9 / 12.3 / 10	<b>Probe battery last changed:</b>	01/11/2006
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

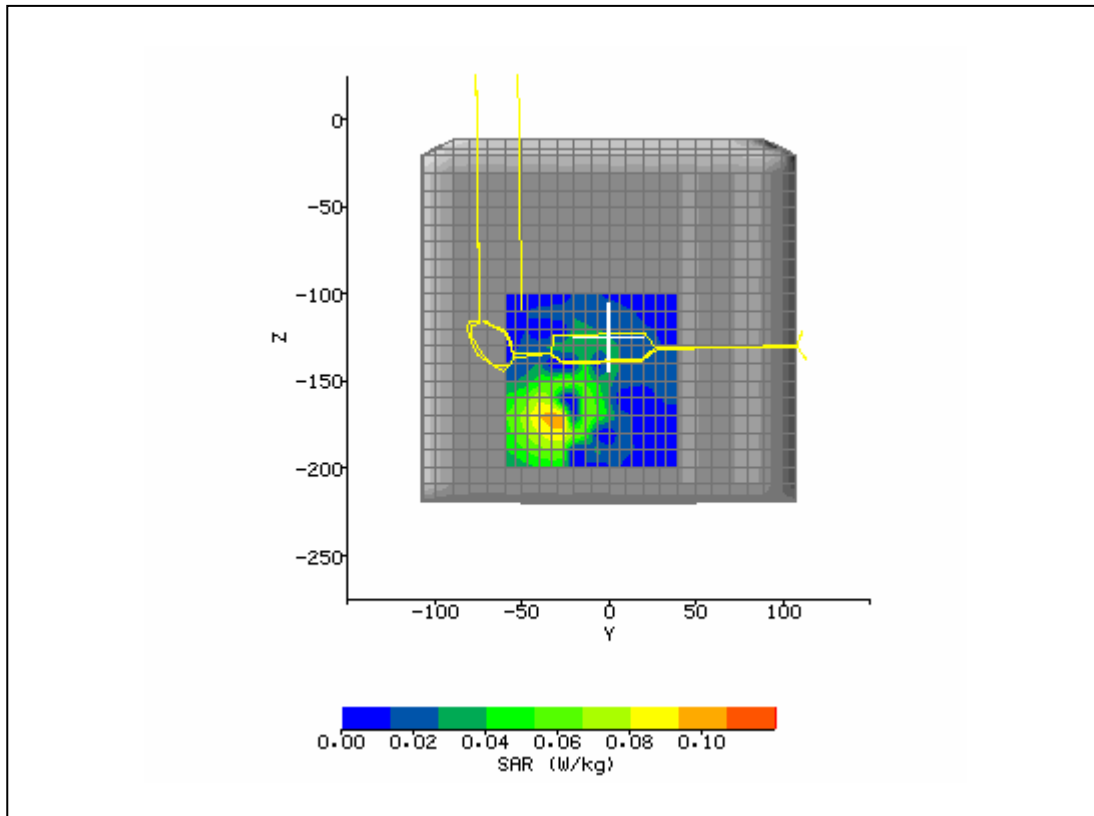

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	2/1/2006 1:55:44 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap9538_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	Xplore lx104 w/ AC860	<b>Relative Permittivity:</b>	53.02
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.581
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-26.67 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-170.00 mm
<b>Antenna Configuration:</b>	integral	<b>Max E Field:</b>	13.12 V/m
<b>Test Frequency:</b>	1907.5 UMTSMHz	<b>SAR 1g:</b>	0.220 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.127 W/kg
<b>Conversion Factors:</b>	0.666 / 0.666 / 0.666	<b>SAR Start:</b>	0.065 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.064 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.05 dB
<b>Diode Compression Factors (V*200):</b>	11.9 / 12.3 / 10	<b>Probe battery last changed:</b>	01/11/2006
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

