



<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	3/24/2006 2:36:37 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0016
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Xplore iX104 Mesh	<b>Relative Permittivity:</b>	50.96
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.861
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-24.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-170.00 mm
<b>Antenna Configuration:</b>	Mesh	<b>Max E Field:</b>	11.07 V/m
<b>Test Frequency:</b>	2410MHz	<b>SAR 1g:</b>	0.184 W/kg
<b>Air Factors:</b>	2390 / 2143 / 2668	<b>SAR 10g:</b>	0.105 W/kg
<b>Conversion Factors:</b>	.490 / .490 / .490	<b>SAR Start:</b>	0.049 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.049 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.00 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	3/20/2006
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

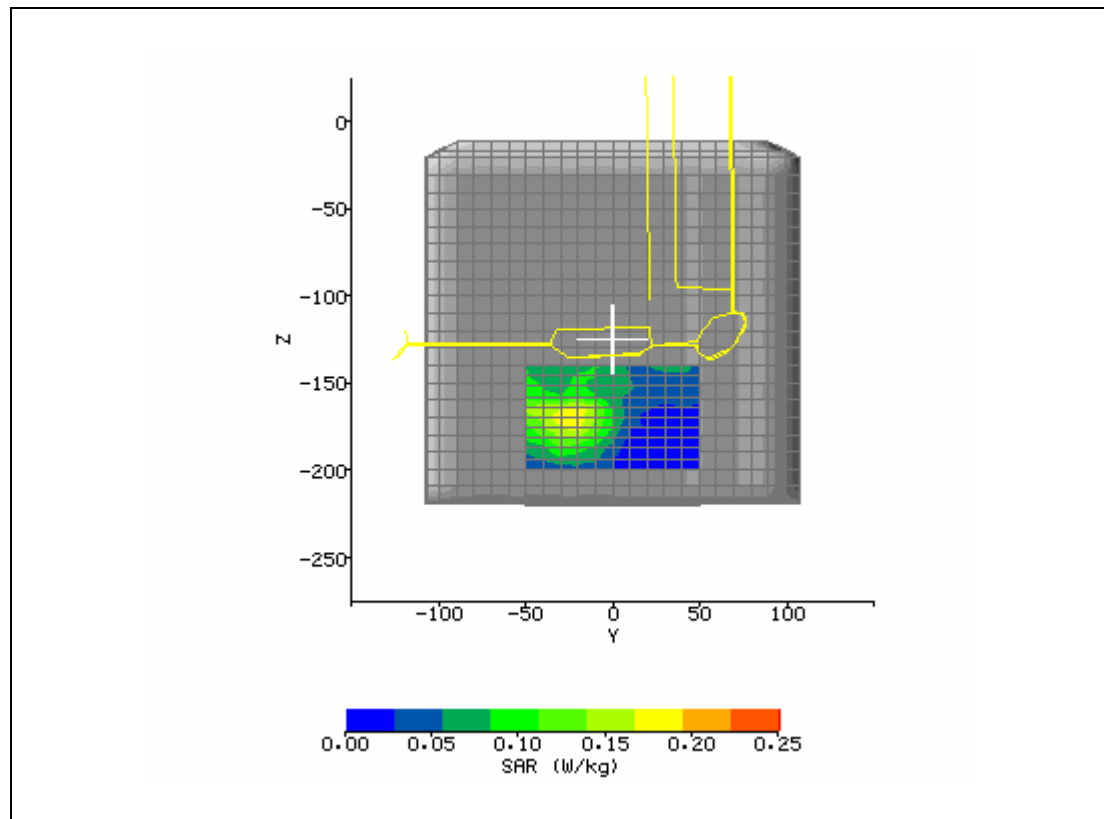

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	3/24/2006 4:07:44 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	2470lap_3d.txt	<b>Probe Serial Number:</b>	M0016
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Xplore iX104 Mesh	<b>Relative Permittivity:</b>	50.70
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.921
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-15.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-169.40 mm
<b>Antenna Configuration:</b>	Mesh	<b>Max E Field:</b>	11.00 V/m
<b>Test Frequency:</b>	2450MHz	<b>SAR 1g:</b>	0.188 W/kg
<b>Air Factors:</b>	2390 / 2143 / 2668	<b>SAR 10g:</b>	0.110 W/kg
<b>Conversion Factors:</b>	.490 / .490 / .490	<b>SAR Start:</b>	0.055 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.057 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	4.03 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	3/20/2006
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

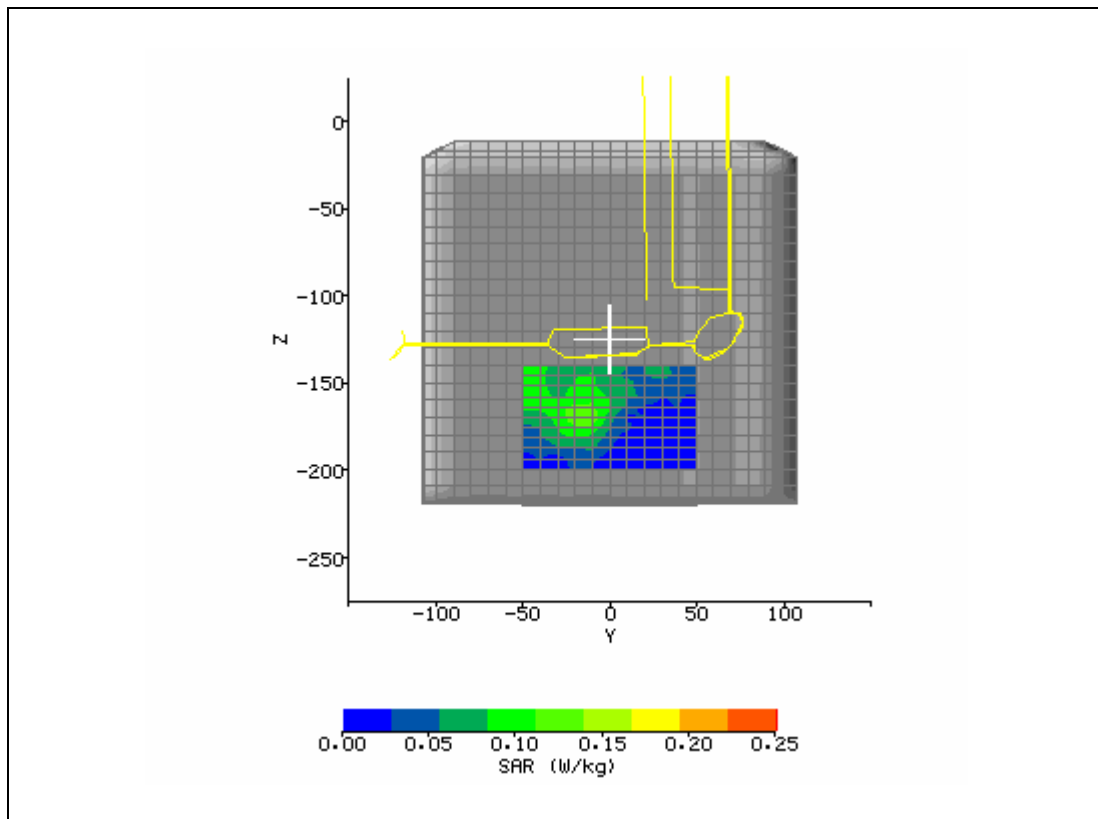

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	3/24/2006 3:42:45 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	2450lap_3d.txt	<b>Probe Serial Number:</b>	M0016
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2470
<b>Device Under Test:</b>	Xplore iX104 Mesh	<b>Relative Permittivity:</b>	50.91
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.937
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-24.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-168.80 mm
<b>Antenna Configuration:</b>	Mesh	<b>Max E Field:</b>	12.10 V/m
<b>Test Frequency:</b>	2450MHz	<b>SAR 1g:</b>	0.216 W/kg
<b>Air Factors:</b>	2390 / 2143 / 2668	<b>SAR 10g:</b>	0.106 W/kg
<b>Conversion Factors:</b>	.490 / .490 / .490	<b>SAR Start:</b>	0.052 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.053 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-1.92 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	3/20/2006
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

