User Manual

Wireless Remote Control with AC outlet Receiver

JP8301-71L8, JP8302-71L8 JP8305-71L8, JP8310-71L8

Introduction

Thank you for purchasing our products, this device is consist of receiver and wireless remote control, it is mainly used for light control.


Specification


Receiver:			
Model	JP8305-71L8		
Input Power	AC 120V/60Hz, 10A , 1200W Max.		
Output power	AC 120V/60Hz, 10A , 1200W Max.		
Receive frequency:	433.92MHz		
Receive sensitivity:	-103dBm		

Transmitter:

Model	JP8301-71L8	JP8302-71L8	JP8310-71L8	
Power Supply:	DC 3V CR2032 Battery			
Features:	Self-learning technology			
Transmit frequency:	433.92MHz			
Transmit power:	<0dBm			
Transmission	50M (in the open air)			
distance:				
Modulation:	ASK			
Key quantity:	2	4	6	
Function:	On/Off	On/Off/Up/Down	On/Off/Timing	

Operation



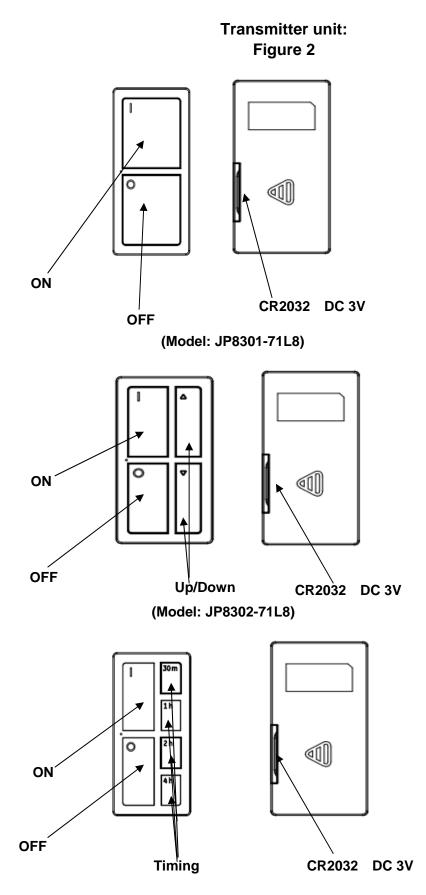

(Model: JP8310-71L8)

- 1. Plug the receiver into the AC 120V/60Hz power grid
- 2. Connect the light load into the OUTPUT port of receiver.
- 3. Install a CR2032 battery into the battery box of remote control.
- 4. Press "I" key to turn on light load or press "O" key to turn off.
- 5. Press " \triangle " or " ∇ " key to control the brightness of light load.
- 6. Press "30m", "1h", "2h" or "4h" key to control the working time of light load.

FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference. (2) This device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- ---Reorient or relocate the receiving antenna.
- ---Increase the separation between the equipment and receiver.
- ---Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- ---Consult the dealer or an experienced radio/TV technician for help.

WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

IC Statement

This device complies with Canada Industry licence-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) this device may not cause interference; and

(2) this device must accept any interference. Including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'industrie Canada applicables aux appareils radio exem pts de licence L'exploitation est autorisée aux deux conditions suivantes:

1) l'appareil ne doit pas produire de brouillage; et

2) l'utillsateur de l'appareil doit accepterbrouillage radioélectrique subi meme si le brouillage est susceptible d'encompromettre le fonctionnement. mauvais fonctionnement de l'appareil.