

Page: 1 of 40

## ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

## INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

Opticon Sensors Europe B.V. Applicant:

Opaallaan 35, 2132 XV Hoofddorp, The Netherlands

ESL Electronic Shelf Label **Product Name:** 

**OPTICON Brand Name:** Model No.: EE-292

Model Difference: N/A

FCC ID: **Q2QEE292** 

E2/2018/20014 **Report Number:** 

**FCC Rule Part:** §15.249

Apr. 16, 2018 **Issue Date:** 

Feb. 07, 2018~ Apr. 09, 2018 Date of Test:

Feb. 07, 2018 Date of EUT Received:

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Tested By:

Aken Huang / Engineer

Approved By:

Jim Chang / Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留<sup>9</sup>0天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279 f (886-2) 2298-0488

台灣檢驗科技股份有限公司

www.tw.sqs.com



Page: 2 of 40

# **Revision History**

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
E2/2018/20014	Rev.00	Initial creation of docu- ment	All	Apr. 16, 2018	Stefanie / Clerk

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⑪天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without price wither approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this decument is undertile and effective ment in the present of the industry of the content of the lower of the industry of the company. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sqs.com



Page: 3 of 40

# **Contents**

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	SUMMARY OF TEST RESULTS	10
4	DESCRIPTION OF TEST MODES	10
5	MEASUREMENT UNCERTAINTY	12
6	CONDUCTED EMISSION TEST	13
7	Radiated Emission Test	15
8	20 dB Bandwidth Measurement	37
9	Antenna Requirement	40

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate of this decument is undertically the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate of this decument. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488



Page: 4 of 40

### **GENERAL INFORMATION**

### 1.1 Product Description

#### General:

,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	
Product Name:	ESL Electronic Shelf Label
Brand Name:	OPTICON
Model No.:	EE-292
Model Difference:	N/A
Hardware Version:	DVT
Software Version:	SW v1.53
Power Supply:	5Vdc from power supply

#### Zigbee

<u>-</u>	
Transmit Power	88.66dBuV/m (Peak)
Operation Frequency:	2405 ~ 2480MHz
Channel number:	16 channels
Channel space:	5MHz
Modulation Type:	DSSS
Antenna Designation:	PIFA Antenna, 2dBi

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate of this decument is undertically the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate of this decument. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 5 of 40

### Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.249 ANSI C63.10:2013

#### Note:

All test items have been performed and record as per the above standards.

### 1.3 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333 (TAF code 0513)

FCC Registration Number and Designation are: 735305

### 1.4 Special Accessories

There are no special accessories used while test was conducted.

### 1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, intention is drawn to the limitation of liability, intention is drawn to the limitation only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Page: 6 of 40

#### 2 SYSTEM TEST CONFIGURATION

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

#### 2.3 Test Procedure

#### 2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

#### 2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

### 2.4 Measurement Results Explanation Example

#### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, intention is drawn to the limitation of liability, intention is drawn to the limitation only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Page: 7 of 40

#### 2.5 Limitation

### (1) Conducted Emission

Conducted Emission Limits is as following.

Frequency	Conducted Limit (dBuV)			
(MHz)	Quasi-Peak	Average		
0.15 – 0.5	66 - 56	56 - 46		
0.5 – 5	56	46		
5 - 30	60	50		

### (2) Radiated Emission

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following.

Frequency (MHz)	Field strength of Fundamental	Field strength of Harmonics	Distance (m)
902 – 928	50 mV/m	500 uV/m	3
	(94dBuV/m)	(54dBuV/m)	
2400 – 2483.5	50 mV/m	500 uV/m	3
	(94dBuV/m)	(54dBuV/m)	
5725 – 5875	50 mV/m	500 uV/m	3
	(94dBuV/m)	(54dBuV/m)	
24.0 – 24.25 GHz	250 mV/m	2500 uV/m	3
	(107.95dBuV/m)	(67.95dBuV/m)	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488 www.tw.sqs.com



Page: 8 of 40

#### (3) Radiated Emission

Emission Radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits as below, whichever is the lesser attenuation.

Frequency	Frequency Field strength		Field strength at
(MHz)	μ <b>V/m</b>		3m dBμV/m
1.705-30	30	30	69.54
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

#### (4) Radiated Emission

For frequencies above 1000MHz, the above field strength limits are based on average limits. The peak filed strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20dB under any condition of modulation.

#### Remark:

- 1. Emission level in dBuV/m=20 log (uV/m)
- 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
- 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of ξ 15.205 and RSS-Gen § 8.10
- 4. Emission spurious frequency which appearing within the Restricted Bands specified in provision of ξ15.205, then the general radiated emission limits in  $\xi$  15.209 apply.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, intention is drawn to the limitation of liability, intention is drawn to the limitation only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Page: 9 of 40

## 2.6 Configuration of Tested System

Fig. 2-1 Configuration of Conducted Tested System




Fig. 2-2 Configuration Radiated Emission Tested System



Table 2-1 Equipment Used in Tested System

	rabio 2 i Equipmont Good in roctou Gyotom							
Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Ca- ble	Power Cord		
1.	2.4GHz Wireless Test Software	N/A	N/A	N/A	N/A	N/A		
2.	Notebook	Lenovo	L430	PK-OCGFF	Shielded	Unshielded		
3.	DC Power Supply	Agilent	E3640A	MY53140006	N/A	Unshielded		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

www.tw.sqs.com



Page: 10 of 40

### SUMMARY OF TEST RESULTS

FCC Rules	FCC Rules Description Of Test	
§15.207(a)	AC Power Line Conducted Emission	N/A
§15.249(a)(d)(e)	Radiated Emission	Compliant
§15.215(c)	20dB bandwidth  Measurement	Compliant

#### **DESCRIPTION OF TEST MODES**

## 4.1 Operated in 2405 ~ 2480MHz Band

16 channels are provided.

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2405 MHz	5	2425MHz	9	2445 MHz	13	2465 MHz
2	2410 MHz	6	2430 MHz	10	2450 MHz	14	2470 MHz
3	2415 MHz	7	2435 MHz	11	2455 MHz	15	2475 MHz
4	2420 MHz	8	2440 MHz	12	2460 MHz	16	2480 MHz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 11 of 40

### 4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

#### **RADIATED EMISSION TEST:**

RADIATED EMISSION TEST (BELOW 1 GHz)							
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	ANTENNA PORT			
2.4G	1 to 16	2,8,16	DSSS	MAIN			
	RADIATED EMISSION TEST (ABOVE 1 GHz)						
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	ANTENNA PORT			
2.4G	1 to 16	2,8,16	DSSS	MAIN			

#### Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth LE Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

#### ANTENNA PORT CONDUCTED MEASUREMENT:

CONDUCTED TEST							
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	ANTENNA PORT			
2.4G	1 to 16	2,8,16	DSSS	MAIN			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Page: 12 of 40

## **MEASUREMENT UNCERTAINTY**

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
20dB & 99% Bandwidth	+/- 51.33 Hz
100 kHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

### Radiated Spurious Emission:

	9kHz – 30MHz: +/- 2.87 dB
	30MHz - 180MHz: +/- 3.37dB
Measurement uncertainty	180MHz -417MHz: +/- 3.19dB
(Polarization : <b>Vertical</b> )	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	9kHz – 30MHz: +/- 2.87 dB
	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 13 of 40

#### **CONDUCTED EMISSION TEST**

### 6.1 Standard Applicable:

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)			
MHz	Quasi-peak	Average		
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		

#### Note

- 1. The lower limit shall apply at the transition frequencies
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

#### 6.2 Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
<b>EMI Test Receiver</b>	R&S	ESCI 7	100950	12/24/2017	12/23/2018	
Coaxial Cables	N/A	N30N30-1042-1 50cm	N/A	08/30/2017	08/29/2018	
LISN	Schwarzbeck	NSLK 8127	8127-648	06/18/2017	06/17/2018	
Test Software	Farad	EZ-EMC	Ver. SGS-03A2	N.C.R.	N.C.R.	

#### 6.3 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號


SGS Taiwan Ltd.

f (886-2) 2298-0488



Page: 14 of 40

### 6.4 Test SET-UP (Block Diagram of Configuration)

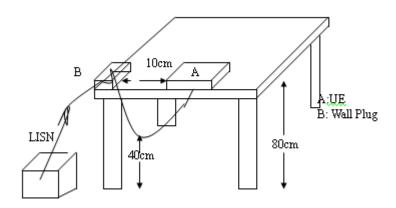

#### 6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

#### 6.6 Measurement Result:

N/A, This device is powered from 5Vdc from power supply

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488 www.tw.sqs.com



Page: 15 of 40

#### **Radiated Emission Test**

#### 7.1. Measurement Procedure


- 1. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 4. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 5. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.

Band	Duty Cycle(%)	T(µs)	1/T(kHz)	VBW Setting
2.4G	100	-	-	10 Hz

- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 7. Repeat above procedures until all frequency measured were complete.

## 7.2. Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

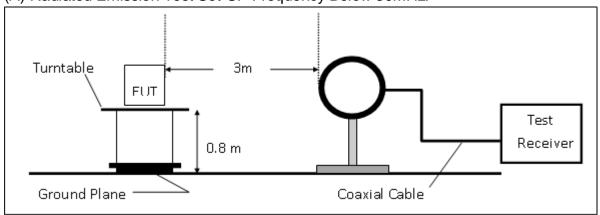

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-

tronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms-e-document.htm">www.sgs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.


No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279




Page: 16 of 40

### (B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

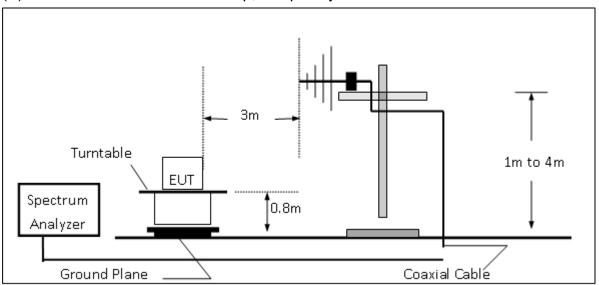

### (C) Radiated Emission Test Set-UP Frequency Over 1 GHz

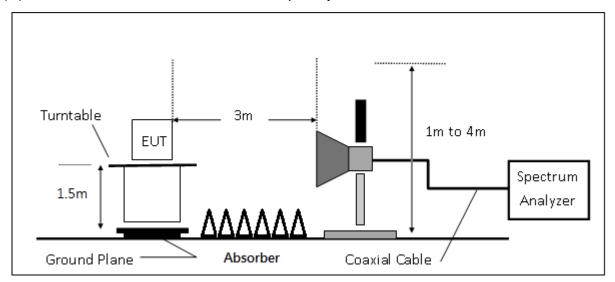

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

www.tw.sgs.com



Page: 17 of 40

## 7.3. Measurement Equipment Used:

966 Chamber						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
EMI Test Receiver	R&S	ESU 40	100363	04/18/2017	04/17/2018	
Loop Antenna	ETS-Lindgren	6502	00143303	12/23/2017	12/22/2018	
Broadband Antenna	TESEQ	CBL 6112D	35240	11/03/2017	11/02/2018	
Horn Antenna	ETS-Lindgren	3117	00143272	12/15/2017	12/16/2018	
Horn Antenna	Schwarzbeck	BBHA9170	185	08/01/2017	07/31/2018	
Pre Amplifier	EMC Instruments	EMC330	980096	12/24/2017	12/23/2018	
Pre Amplifier	EMC Instruments	EMC0011830	980199	12/24/2017	12/23/2018	
Pre Amplifier	R&S	SCU-18	10204	12/24/2017	12/23/2018	
Pre Amplifier	R&S	SCU-26	100780	12/24/2017	12/23/2018	
Coaxial Cable	Huber+Suhner	RG 214/U	966Rx 9K-30M	12/24/2017	12/23/2018	
Coaxial Cable	Huber+Suhner	RG 214/U SUCOFLEX 104	966Rx 30M-3G	12/24/2017	12/23/2018	
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Rx 1G-18G	12/24/2017	12/23/2018	
Coaxial Cable	Huber+Suhner	mini 141-12 SUCOFLEX 104	966Rx 18G-40G	12/24/2017	12/23/2018	
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Tx 30M-18G	12/24/2017	12/23/2018	
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	966Tx 18G-40G	12/24/2017	12/23/2018	
Attenuator	WOKEN	218FS-10	RF27	12/24/2017	12/23/2018	
Site NSA	SGS	966 Chamber C	SAC-C	03/02/2018	03/01/2019	
Site VSWR	SGS	966 Chamber C	SAC-C	03/02/2018	03/01/2019	
DC Power Supply	HOLA	DP-3003	D7070035	05/04/2017	05/03/2018	
Controller	MF	MF-7802	N/A	N.C.R.	N.C.R.	
Antenna Master	MF	N/A	N/A	N.C.R.	N.C.R.	
Turn Table	MF	N/A	N/A	N.C.R.	N.C.R.	
Test Software	World-Pallas	Dr. E	V 3.0 Lite	N.C.R.	N.C.R.	

Note: N.C.R refers to Not Calibrated Required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

www.tw.sqs.com

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Page: 18 of 40

## 7.4. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	G	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB $\mu$ V/m) = SPA. Reading level(dB $\mu$ V) + Factor(dB)

Factor(dB) = Antenna Factor(dB $\mu$ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency. Note:

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

Note: There is a comparison data of both open-field test site and semi-Anechoic, and test result came out very similar.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Page: 19 of 40


#### 7.5. Measurement Result

### Radiated Spurious Emission Measurement Result (MAIN)

Operation Mode: Zigbee Test Date: 2018/3/2

Fundamental Frequency: 2405 MHz Temp. / Humi. : 22.7deg\_C/57RH

Operation Band: Main CH LOW Test Engineer: Ashton EUT Pol.: Measurement Antenna Pol. : Vertical

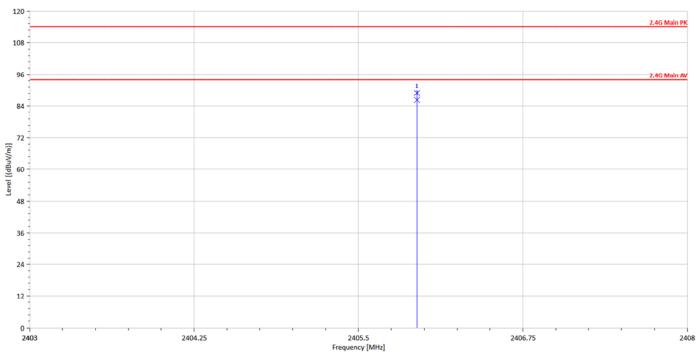

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2405.95	F	Peak	87.98	1.03	89.01	114	-24.99
2405.95	F	Average	85.32	1.03	86.35	94	-7.65

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com




Page: 20 of 40

Zigbee Operation Mode: Test Date: 2018/3/2

Fundamental Frequency: 2405 MHz 22.7deg\_C/57RH Temp. / Humi.:

Operation Band: Main CH LOW Test Engineer: Ashton EUT Pol.: Measurement Antenna Pol.: Horizontal

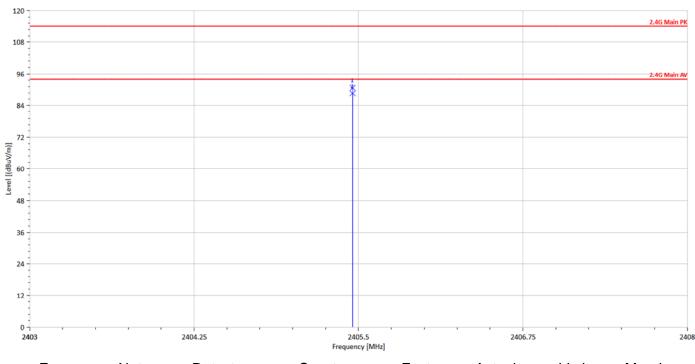

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2405.46	F	Peak	89.73	1.03	90.76	114	-23.24
2405.46	F	Average	87.63	1.03	88.66	94	-5.34

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 21 of 40

Zigbee Operation Mode: Test Date: 2018/3/2

Fundamental Frequency: 2440 MHz 22.7deg\_C/57RH Temp. / Humi. :

Operation Band: Main CH MID Test Engineer: Ashton EUT Pol.: Measurement Antenna Pol. : Vertical

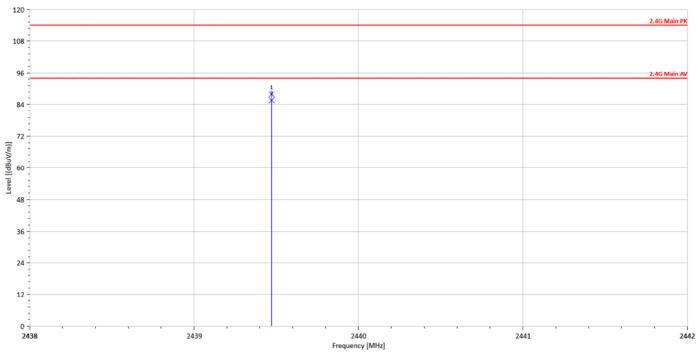

	Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin	
	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
•	2439.47	F	Peak	87.08	0.85	87.93	114	-26.07	•
	2439.47	F	Average	84.77	0.85	85.62	94	-8.38	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 22 of 40

Zigbee Operation Mode: Test Date: 2018/3/2

Fundamental Frequency: 2440 MHz 22.7deg\_C/57RH Temp. / Humi. :

Operation Band: Main CH MID Test Engineer: Ashton EUT Pol.: Measurement Antenna Pol. : Horizontal

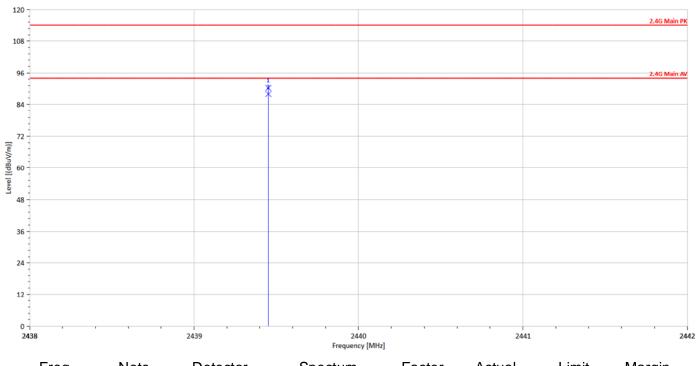

	Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
•	2439.45	F	Peak	89.51	0.85	90.36	114	-23.64
	2439.45	F	Average	87.14	0.85	87.99	94	-6.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 23 of 40

Zigbee Operation Mode: Test Date: 2018/3/2

Fundamental Frequency: 2480 MHz 22.7deg\_C/57RH Temp. / Humi.:

Operation Band: Main CH HIGH Test Engineer: Ashton EUT Pol.: Measurement Antenna Pol. : Vertical

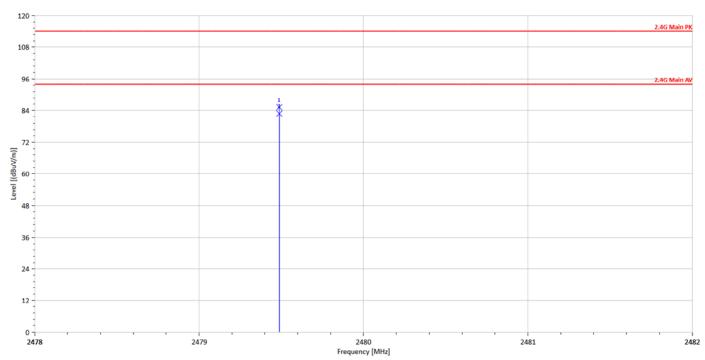

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2479.49	F	Peak	84.11	1.17	85.28	114	-28.72
2479.49	F	Average	81.71	1.17	82.88	94	-11.12

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279




Page: 24 of 40

Zigbee Operation Mode: Test Date: 2018/3/2

Fundamental Frequency: 2480 MHz 22.7deg\_C/57RH Temp. / Humi.:

Operation Band: Main CH HIGH Test Engineer: Ashton EUT Pol.: Measurement Antenna Pol. : Horizontal

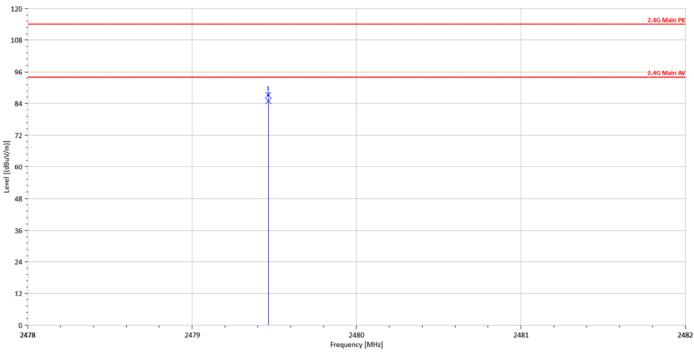

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2479.46	F	Peak	85.98	1.17	87.15	114	-26.85
2479.46	F	Average	83.82	1.17	84.99	94	-9.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 25 of 40

### **Radiated Spurious Emission Measurement Result**

Operation Mode: Test Date: Zigbee 2018/2/26

Fundamental Frequency: 2405 MHz Temp. / Humi. : 22.7deg\_C/57RH

Operation Band: TX CH LOW Test Engineer: Ashton EUT Pol.: E2 Measurement Antenna Pol.: Vertical

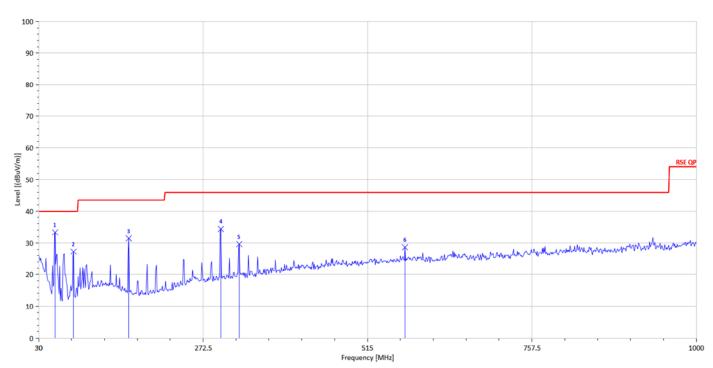

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dΒμV/m	dBµV/m	dB
54.25	S	Peak	54.25	-20.91	33.34	40	-6.66
81.41	S	Peak	47.97	-20.74	27.23	40	-12.77
162.89	S	Peak	49.03	-17.63	31.41	43.5	-12.09
298.69	S	Peak	47.55	-13.13	34.42	46	-11.58
325.85	S	Peak	41.65	-12.05	29.60	46	-16.40
570.29	S	Peak	35.10	-6.47	28.63	46	-17.37

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279




Page: 26 of 40

Operation Mode: Zigbee Test Date: 2018/2/26

Fundamental Frequency: 2405 MHz Temp. / Humi.: 22.7deg\_C/57RH

Operation Band: TX CH LOW Test Engineer: Ashton EUT Pol.: Measurement Antenna Pol. : Horizontal

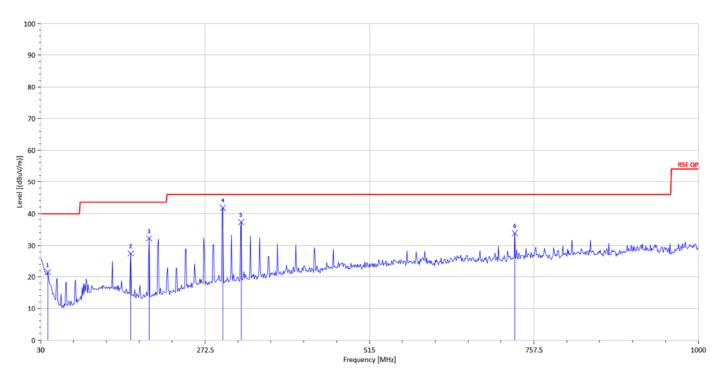

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dΒμV/m	dBµV/m	dB
40.67	S	Peak	34.80	-13.29	21.51	40	-18.49
162.89	S	Peak	45.05	-17.63	27.43	43.5	-16.07
190.05	S	Peak	50.50	-18.32	32.18	43.5	-11.32
298.69	S	Peak	54.90	-13.13	41.77	46	-4.23
325.85	S	Peak	49.37	-12.05	37.32	46	-8.68
729.37	S	Peak	38.54	-4.64	33.90	46	-12.10

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices Office pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號




Page: 27 of 40

Operation Mode: Zigbee Test Date: 2018/2/26

Fundamental Frequency: 2440 MHz Temp. / Humi. : 22.7deg\_C/57RH

Operation Band: TX CH MID Test Engineer: Ashton EUT Pol.: Measurement Antenna Pol.: E2 Vertical

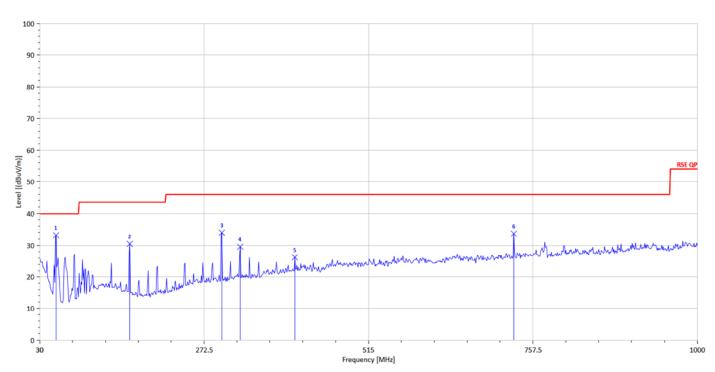

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dΒμV/m	dBµV/m	dB
54.25	S	Peak	54.11	-20.91	33.20	40	-6.80
162.89	S	Peak	48.10	-17.63	30.47	43.5	-13.03
298.69	S	Peak	47.17	-13.13	34.04	46	-11.96
325.85	S	Peak	41.59	-12.05	29.54	46	-16.46
406.36	S	Peak	35.54	-9.33	26.21	46	-19.79
729.37	S	Peak	38.36	-4.64	33.72	46	-12.28

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 28 of 40

Operation Mode: Zigbee Test Date: 2018/2/26

Fundamental Frequency: 2440 MHz Temp. / Humi. : 22.7deg\_C/57RH

Operation Band: TX CH MID Test Engineer: Ashton EUT Pol.: Measurement Antenna Pol.: E2 Horizontal

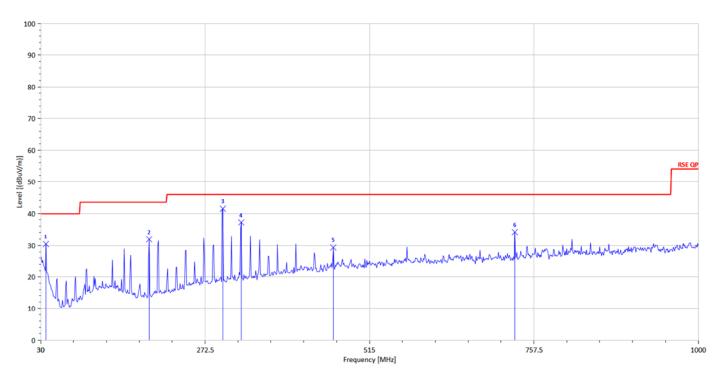

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dΒμV/m	dBµV/m	dB
37.76	S	Peak	41.89	-11.49	30.40	40	-9.60
190.05	S	Peak	50.21	-18.32	31.90	43.5	-11.60
298.69	S	Peak	54.66	-13.13	41.53	46	-4.47
325.85	S	Peak	49.29	-12.05	37.24	46	-8.76
461.65	S	Peak	37.51	-8.16	29.34	46	-16.66
729.37	S	Peak	38.85	-4.64	34.21	46	-11.79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279




Page: 29 of 40

Operation Mode: Zigbee Test Date: 2018/2/26

Fundamental Frequency: 2480 MHz Temp. / Humi.: 22.7deg\_C/57RH

Operation Band: TX CH HIGH Test Engineer: Ashton EUT Pol.: Measurement Antenna Pol. : Vertical

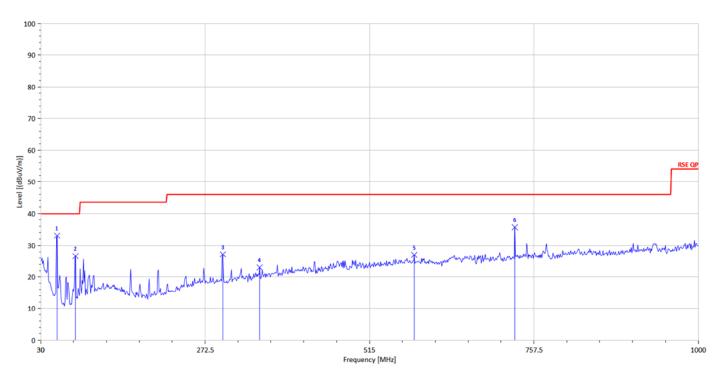

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dΒμV/m	dBµV/m	dB
54.25	S	Peak	53.97	-20.91	33.06	40	-6.94
81.41	S	Peak	47.33	-20.74	26.59	40	-13.41
298.69	S	Peak	40.27	-13.13	27.14	46	-18.86
353.01	S	Peak	34.31	-11.29	23.03	46	-22.97
580.96	S	Peak	33.10	-6.11	26.99	46	-19.01
729.37	S	Peak	40.38	-4.64	35.74	46	-10.26

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices Office pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號




Page: 30 of 40

Operation Mode: Zigbee Test Date: 2018/2/26

Fundamental Frequency: 2480 MHz Temp. / Humi.: 22.7deg\_C/57RH

Operation Band: TX CH HIGH Test Engineer: Ashton EUT Pol.: Measurement Antenna Pol. : Horizontal

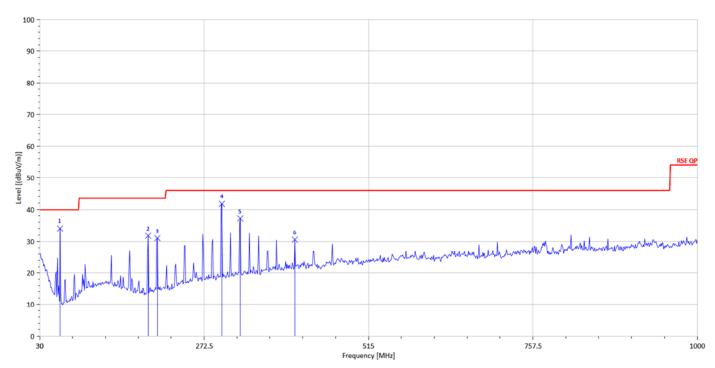

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dΒμV/m	dBµV/m	dB
60.07	S	Peak	57.02	-22.92	34.10	40	-5.90
190.05	S	Peak	50.07	-18.32	31.75	43.5	-11.75
203.63	S	Peak	48.34	-17.34	31.01	43.5	-12.49
298.69	S	Peak	54.92	-13.13	41.79	46	-4.21
325.85	S	Peak	49.27	-12.05	37.22	46	-8.78
406.36	S	Peak	39.87	-9.33	30.54	46	-15.46

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 31 of 40

Operation Mode: Test Date: Zigbee 2018/3/2

Fundamental Frequency: 2405 MHz Temp. / Humi.: 22.7deg\_C/57RH

Operation Band: TX CH LOW Test Engineer: Ashton EUT Pol.: Measurement Antenna Pol. : Vertical

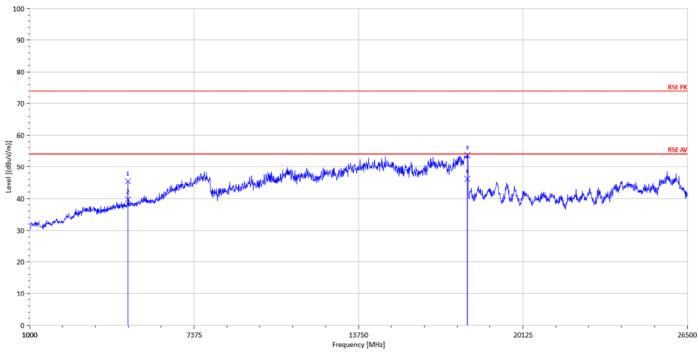

	Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
•	4810.00	Н	Peak	37.75	7.66	45.41	74	-28.59
	4810.00	Н	Average	32.15	7.66	39.81	54	-14.19

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 32 of 40

Test Date: Operation Mode: Zigbee 2018/3/2

Fundamental Frequency: 2405 MHz Temp. / Humi.: 22.7deg\_C/57RH

Operation Band: TX CH LOW Test Engineer: Ashton EUT Pol.: Measurement Antenna Pol. : Horizontal

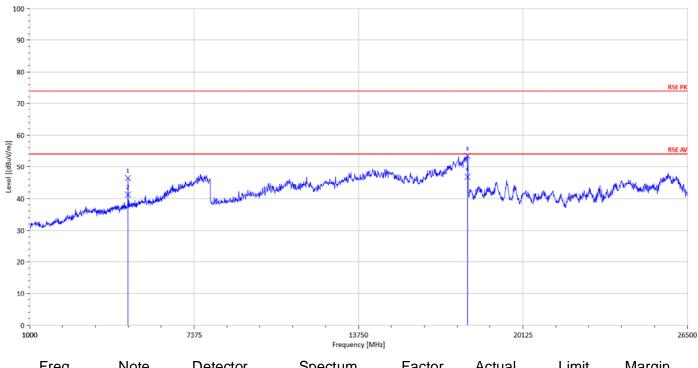

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4810.00	Н	Peak	38.80	7.66	46.46	74	-27.54
4810.00	Н	Average	33.58	7.66	41.24	54	-12.76

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

www.tw.sgs.com




Page: 33 of 40

Operation Mode: Zigbee Test Date: 2018/3/2

Fundamental Frequency: 2440 MHz Temp. / Humi.: 22.7deg\_C/57RH

Operation Band: TX CH MID Test Engineer: Ashton EUT Pol.: Measurement Antenna Pol.: E2 Vertical

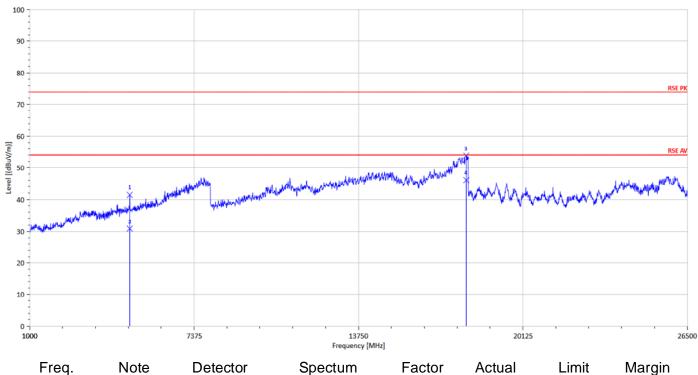

	Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
•	4880.00	Н	Peak	33.70	7.78	41.48	74	-32.52
	4880.00	Н	Average	23.07	7.78	30.85	54	-23.15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 34 of 40

Operation Mode: Zigbee Test Date: 2018/3/2

Fundamental Frequency: 2440 MHz Temp. / Humi.: 22.7deg\_C/57RH

Operation Band: TX CH MID Test Engineer: Ashton EUT Pol.: Measurement Antenna Pol.: E2 Horizontal

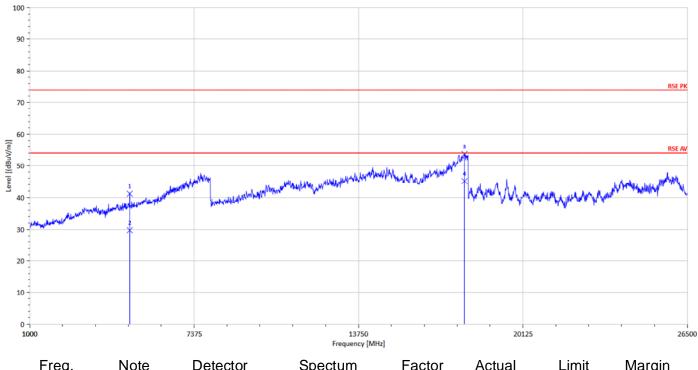

	Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
•	4880.00	Н	Peak	33.44	7.78	41.22	74	-32.78
	4880.00	Н	Average	21.95	7.78	29.73	54	-24.27

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 35 of 40

Operation Mode: Zigbee Test Date: 2018/3/2

Fundamental Frequency: 2480 MHz Temp. / Humi.: 22.7deg\_C/57RH

Operation Band: TX CH HIGH Test Engineer: Ashton EUT Pol.: Measurement Antenna Pol. : Vertical

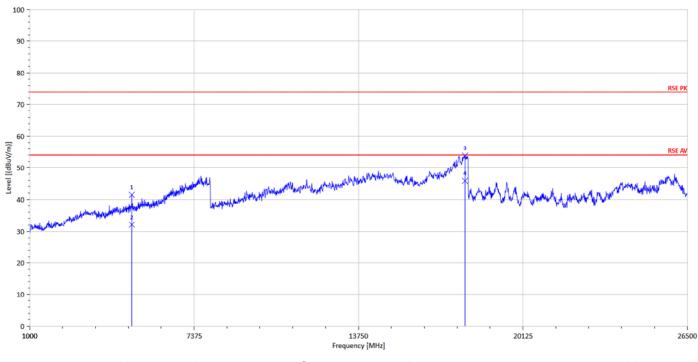

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Mode Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4960.00	Н	Peak	33.79	7.69	41.48	74	-32.52
4960.00	Н	Average	24.42	7.69	32.11	54	-21.89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 36 of 40

Operation Mode: Zigbee Test Date: 2018/3/2

Fundamental Frequency: 2480 MHz Temp. / Humi.: 22.7deg\_C/57RH

Operation Band: TX CH HIGH Test Engineer: Ashton EUT Pol.: Measurement Antenna Pol. : Horizontal

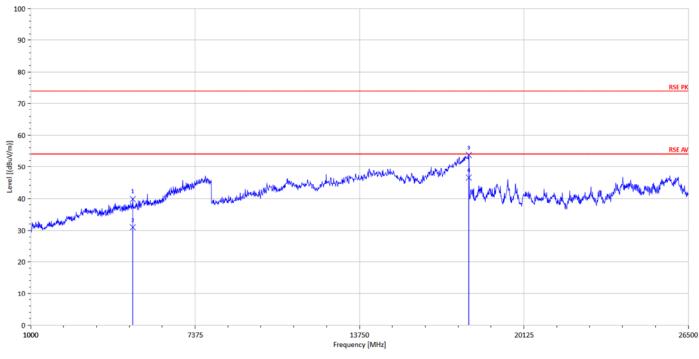

	Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
•	4960.00	Н	Peak	32.22	7.69	39.91	74	-34.09
	4960.00	Н	Average	23.26	7.69	30.95	54	-23.05

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 37 of 40

### 20 dB Bandwidth Measurement

#### 8.1 Measurement Procedure

- The EUT was placed on a turn table which is 0.8m above ground plane.
- Set ETU normal operating mode.
- 3. Set SPA Center Frequency = fundamental frequency, RBW = 100kHz, VBW = 300kHz, Span = 5MHz.
- 4. Set SPA Max hold. Mark peak, -20dB.

### 8.2 Test SET-UP (Block Diagram of Configuration)

Refer to section 7.2 for the plot.

### 8.3 Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL SERIAL		LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
Spectrum Analyzer	KEYSIGHT	N9010A	MY51440113	06/20/2017	06/19/2018	
Power Meter	Anritsu	ML2496A	1326001	06/23/2017	06/22/2018	
Power Sensor	Anritsu	MA2411B	1315048	06/23/2017	06/22/2018	
Power Sensor	Anritsu	MA2411B	1315049	06/23/2017	06/22/2018	
Coaxial Cable 30cm	WOKEN	00100A1F1A1 95C	RF01	12/24/2017	12/23/2018	
DC Block	PASTERNACK	PE8210	RF29	12/24/2017	12/23/2018	
Splitter	RF-LAMBAD	RFLT2W1G18 G	RF35	12/24/2017	12/23/2018	
Attenuator	WOKEN	218FS-10	RF23	12/24/2017	12/23/2018	
DC Power Supply	Agilent	E3640A	MY53140006	05/02/2017	05/01/2018	

#### 8.4 Measurement Results:

Frequency (MHz)	20dB Bandwidth (kHz)		
2405	2842		
2475	2822		
2480	2818		

Refer to attached data chart.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488




Page: 38 of 40

#### 2405MHz

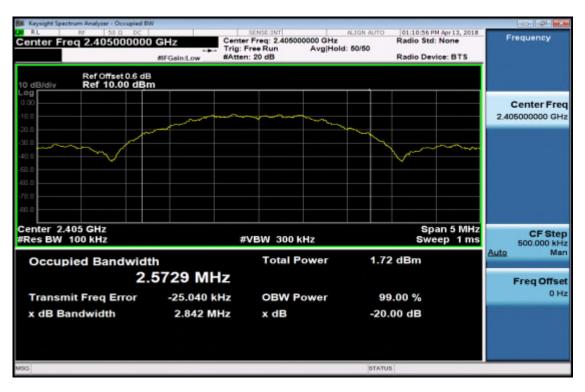

#### 2440MHz

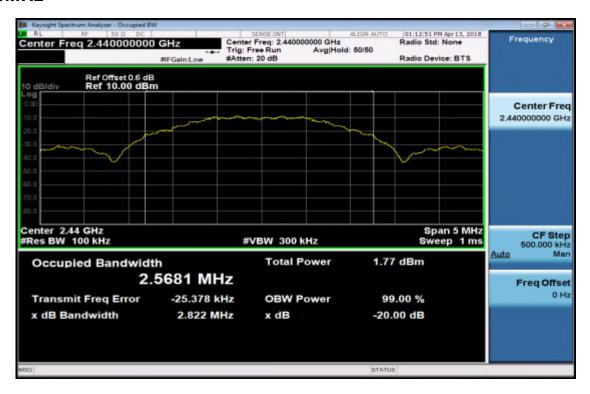

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, intention is drawn to the limitation of liability, intention is drawn to the limitation only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號


t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com




Page: 39 of 40

#### 2480MHz

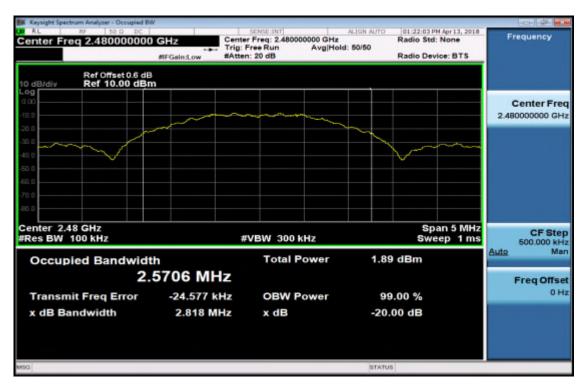

## **Duty Cycle**

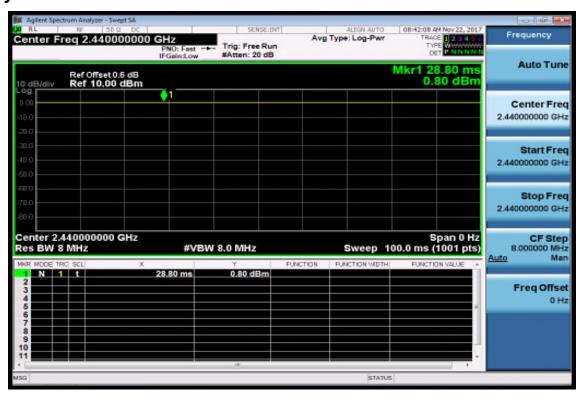

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, intention is drawn to the limitation of liability, intention is drawn to the limitation only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



Page: 40 of 40

### **Antenna Requirement**

### 9.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device. If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in

dB comparing to gain minus 6dBi.

#### 9.2 Antenna Connected Construction:

An embedded-in antenna design is used.

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo and antenna spec. for details.

The antenna gain is less than 6dBi. Therefore, it is not necessary to reduce maximum output power limit.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.