

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

| | OF |
|-----------------------|---|
| Applicant: | Opticon Sensors Europe B.V |
| | Opaallaan 35, 2132 XV Hoofddorp, The Netherlands. |
| Product Name: | Mobile computers |
| Brand Name: | Opticon |
| Model No.: | H-29 |
| Model Difference: | N/A |
| Report Number: | ER/2018/10089 |
| FCC ID | Q2QH29 |
| FCC Rule Part | Part 15.225 |
| Issue Date: | Feb. 02, 2018 |
| Date of Test: | Jan. 17, 2018 ~ Feb. 01, 2018 |
| Date of EUT Received: | Jan. 17, 2018 |

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.225.

The test results of this report relate only to the tested sample identified in this report.

Karen Huang / Clerk Prepared By:

Approved By:

tim Chang

Jim Chang / Asst. Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Revision History

| Report Number | Revision | Description | Issue Date |
|---------------|----------|------------------------------|---------------|
| ER/2018/10089 | Rev.00 | Initial creation of document | Feb. 02, 2018 |
| | | | |
| | | | |
| | | | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Table of Contents

| GENERAL INFORMATION | . 4 |
|--------------------------------------|---------------------------|
| SYSTEM TEST CONFIGURATION | . 5 |
| SUMMARY OF TEST RESULTS | 10 |
| DESCRIPTION OF TEST MODES | 10 |
| MEASUREMENT UNCERTAINTY | 11 |
| CONDUCTED EMISSIONS TEST | 12 |
| RADIATED EMISSION TEST | 15 |
| FREQUENCY TOLERANCE | 27 |
| 20 dB OCCUPIED BANDWIDTH MEASUREMENT | 32 |
| ANTENNA REQUIREMENT | 33 |
| | SYSTEM TEST CONFIGURATION |



GENERAL INFORMATION 1

1.1 Product Description

General:

| Product Name: | Mobile co | mputers | |
|-------------------|---|--|--|
| Brand Name: | Opticon | | |
| Model No.: | H-29 | | |
| Model Difference: | N/A | | |
| Hardware Version: | ES2 | | |
| Software Version: | 6.0.1.0.1.0.1 | | |
| USB Cable | Model No.: A36-A026-V119, Supplier: Conntek information Co.,LTD. | | |
| | 3.7Vdc from Rechargeable Li-polymer Battery or 5V from AC/DC Adapter | | |
| Power Supply: | Battery: | Model No.: BTBAT3, Supplier: Leung's Communication & Electric Products (Guangzhou) LTD. Model No.: BTBAT4, Supplier: Leung's Communication & Electric Products (Guangzhou) LTD. | |
| | Adapter: | Model No.: S018BDU0900200, Supplier: TENPAO INDUSTRIAL CO.,LTD. | |

NFC:

| Operating Frequency | 13.56MHz |
|---------------------|--------------------|
| Transmit Power | < 123dBuV/m at 3m. |
| Number of Channels | 1 |
| Antenna Type | Loop Antenna |
| Modulation Type | ASK |

This report complies with FCC regulatory radio rule with respect to NFC that operates on 13.56MHz.



1.2 Test Methodology

FCC Part 15, Suppart C §15.225

ANSI C63.10:2013 Note: All test items have been performed and record as per the above standards...

1.3 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803 (TAF code 0513)

FCC Registration Number and Designation number are: 509634 / TW0001

1.4 Special Accessories

There is no special accessory used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode, the Tx frequency was fixed which was for the purpose of the measurements.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2.3 Test Procedure

2.3.1 Conducted Emissions (Not apply in the report)

The EUT is a placed on as turn table which is 0.8m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.107. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m above the reference ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max, emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2.4 Limitation

(1) Conducted Emission

According to section 15.207(a) Conducted Emission Limits is as following.

| Frequency range | | Limits IB (uV) |
|-----------------|------------|-------------------|
| MHz | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |
| Note | | |

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

⁽²⁾ Radiated Emission

- a. The field strength of any emission within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- b. Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- c. Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- d. The field strength of any emissions appearing outside of the 13.110-14.010 MHz shall not exceed the general radiated emission limits in section 15.209 as below.

| Frequency (MHz) | Field strength μV/m | Distance (m) | Field strength at 3m dBµV/m |
|--------------------|------------------------|--------------|--------------------------------|
| 1.705-30 | 30 | 30 | 69.54 |
| 30-88 | 100 | 3 | 40 |
| 88-216 | 150 | 3 | 43.5 |
| 216-960 | 200 | 3 | 46 |
| Above 960 | 500 | 3 | 54 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Remark: 1. Emission level in dBuV/m=20 log (uV/m)

- 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
- 3. Distance extrapolation factor = 40 log (required distance/ test distance) (dB);
- 4. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement. Ex.20*log(30)+40*log(30/3) = 69.54dBuV/m
- 5. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of §15.205.
- 6. The general radiated emission limits in §15.209 apply for the spurious emission generate from UE, except for the fundamental emission where the respective section specifies otherwise.

⁽³⁾ Frequency Tolerance

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2.5 Configuration of Tested System

Fig. 2-1 Radiated Emission test set up configuration

Fig. 2-2 Conduction Emission test set up configuration




Table 2-1 Equipment Used in Tested System

| lte m | Equipment | Mfr/Brand | Model/Type No. | Series No. | Data Cable | Power Cord |
|----------|----------------------|-----------|-------------------|------------|------------|---------------|
| 1. | NFC Test software | N/A | N/A | N/A | N/A | N/A |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



SUMMARY OF TEST RESULTS 3

| FCC Rules | Description Of Test | Result |
|------------------------|--|-----------|
| §15.207 | AC Power Line Conducted Emission | Compliant |
| §15.225 (a)-(d) | Radiated Emission | Compliant |
| §15.209 | Radiated Emission Limits, general requirement | Compliant |
| §15.225 (e) | Frequency Stability | Compliant |
| §2.1049 §15.215 (c) | 20 dB OCCUPIED BANDWIDTH | Compliant |
| §15.203 | Antenna Requirement | Compliant |

DESCRIPTION OF TEST MODES 4

The EUT stay in continuous transmitting mode. The frequency 13.56MHz is the default channel to test, where it is the only manipulative channel as this application supports.

The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for channel Low, Mid and High the worst case H position was reported.

The data rate as the lowest supported is selected while tests are conducted.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



MEASUREMENT UNCERTAINTY 5

| Test Items | Uncertainty |
|-------------------------------------|-------------------------|
| AC Power Line Conducted Emission | +/- 2.586 dB |
| Frequency Stability | +/- 123.36 Hz |
| 20 dB OCCUPIED BANDWIDTH | +/- 123.36 Hz |
| Temperature | +/- 0.8 °C |
| Humidity | +/- 4.7 % |
| DC / AC Power Source | DC= +/- 1%, AC=+/- 0.2% |

Radiated Spurious Emission: Measurement uncertainty

9kHz - 30MHz: +/- 2.3dB

| | 30MHz - 180MHz: +/- 3.37dB |
|--|----------------------------|
| Measurement uncertainty (Polarization : Vertical) | 180MHz -417MHz: +/- 3.19dB |
| | 0.417GHz-1GHz: +/- 3.19dB |

| | 30MHz - 167MHz: +/- 4.22dB |
|--|----------------------------|
| Measurement uncertainty (Polarization : Horizontal) | 167MHz -500MHz: +/- 3.44dB |
| (i olarization : horizontar) | 0.5GHz-1GHz: +/- 3.39dB |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




6 CONDUCTED EMISSIONS TEST

6.1 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Sweep frequency starting from 150 kHz to 30 MHz for phase L1.
- 4. Repeating the measurement as lists above for phase neutral.

6.2 Test SET-UP (Block Diagram of Configuration)

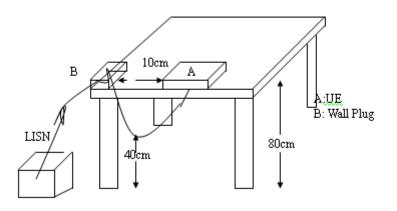

6.3 Measurement Equipment Used:

| Conducted Emission Test Site | | | | | | | | | | |
|------------------------------|-----------------|-----------------------------|----------|------------|------------|--|--|--|--|--|
| EQUIPMENT | MFR | MODEL | SERIAL | LAST | CAL DUE. | | | | | |
| TYPE | | NUMBER | NUMBER | CAL. | | | | | | |
| EMI Test Receiver | R&S | ESCI7 | 100760 | 2017/05/11 | 2018/05/10 | | | | | |
| LISN | SCHWARZBEC K | NSLK 8127 | 8127-649 | 2017/05/22 | 2018/05/21 | | | | | |
| LISN | MESS TEC | FCC-LISN-50/25 0-25-2-01 | 4034 | 2017/03/19 | 2018/03/18 | | | | | |
| Coaxial Cables | N/A | WK CE Cable | N/A | 2017/11/26 | 2018/11/25 | | | | | |

6.4 Measurement Result:

Note: Refer to next page for measurement data and plots. Note2: The * reveals the worst-case results that closet to the limit



3

4

5

6

0.2220

0.6060

2.6420

17.1940

41.32

40.78

36.33

30.00

0.07

0.08

0.14

0.46

41.39

40.86

36.47

30.46

62.74

56.00

56.00

60.00

-21.35

-15.14

-19.53

-29.54

peak

peak

peak

peak


AC POWER LINE CONDUCTED EMISSION TEST DATA

Site Conduction Room Limit: FCC Class B Conduction(QP) Mode: Operation Note:

Phase: L1 AC 120V/60Hz Power:

Temperature: 20 °C

Humidity: 58 %

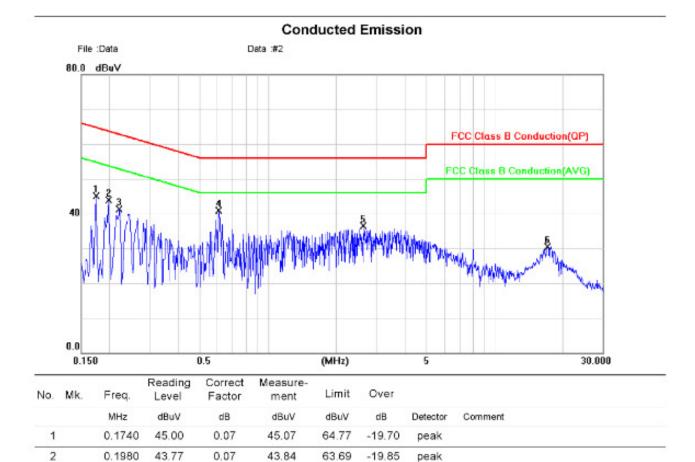



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



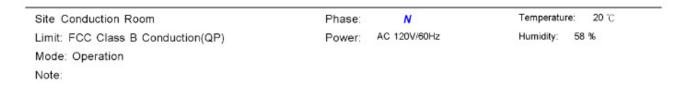

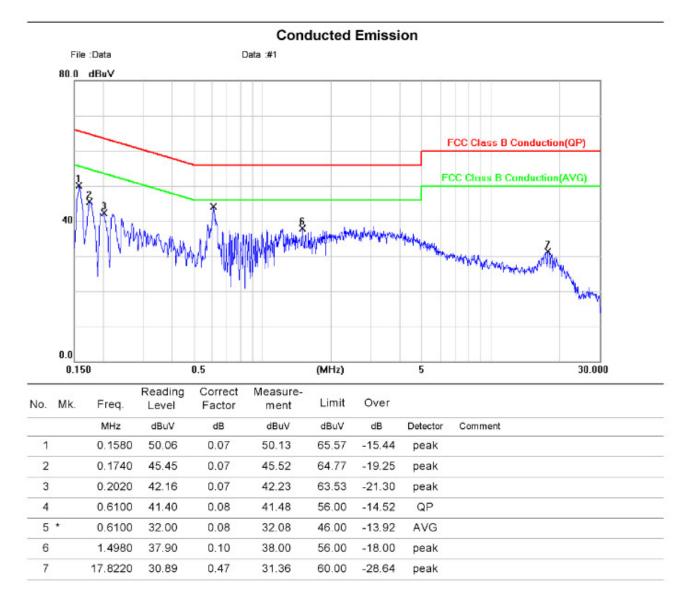

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號




RADIATED EMISSION TEST 7

7.1 Measurement Procedure


- The EUT was placed on a turn table which is 0.8m above ground plane. 1.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

7.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

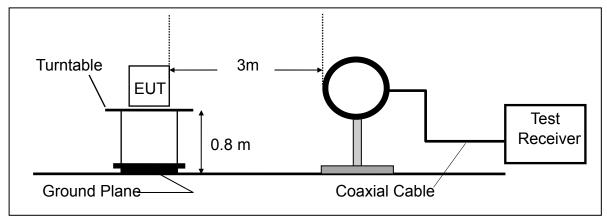

Radiated Emission Test Set-Up, Frequency Below 1000MHz (B)

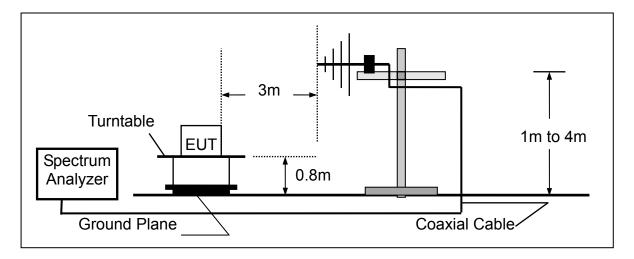

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



7.3 Measurement Equipment Used:

| SGS 966 Chamber No.C | | | | | | | | | | | |
|----------------------|--------------|----------|---------------|---------------------|--------------------|--|--|--|--|--|--|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Date | Calibration Due | | | | | | |
| Bi-log Antenna | SCHWAZBECK | VULB9168 | 378 | 2017/12/29 | 2018/12/28 | | | | | | |
| Loop Antenna | ETS.LINDGREN | 6502 | 148045 | 2017/09/26 | 2018/09/25 | | | | | | |
| Spectrum Analyzer | Agilent | E4446A | MY51100003 | 2017/05/10 | 2018/05/09 | | | | | | |
| EMI Test Receiver | R&S | ESCI7 | 100760 | 2017/06/06 | 2018/06/05 | | | | | | |
| Pre-Amplifier | HP | 8447D | 2944A07676 | 2018/01/02 | 2019/01/01 | | | | | | |
| Low Loss Cable | Huber Suhner | 966_RX | 9 | 2018/01/02 | 2019/01/01 | | | | | | |
| Notebook | Lenovo | L430 | R9-X11BG | N/A | N/A | | | | | | |



7.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

| Where | FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
|-------|------------------------|--|
| | RA = Reading Amplitude | AG = Amplifier Gain |
| | AF = Antenna Factor | |

7.5 Field Strength of Fundamental Emission

7.5.1 Limit

Field strength of fundamental emissions limit:

The field strength of fundamental emissions shall not exceed 15848 micorvolts/meter at 30 meters. The Limit is converted to 123.90dBuV/m by offsetting the distance extrapolation factor as measurement distance is taken place at 3 meters.

Distance extrapolation = $40 \times \log(30/3) = 40 \, dB$

Limit is re-adjusted in terms of limit taken in 3m = 20 *log (15848 uV/m) + 40 = 124.00dBuV/m

Note:

Actual FS(dB μ V/m) = Spectrum. Reading level(dB μ V) + Factor(dB) Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre Amplifier Gain(dB) "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note : "E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



| Funda | tion Mo | Frequency | :NFC :13.56 MHz :MAIN :H Plane | <u>.</u> | Ē | lest Date lemp./Humi. Engineer Measurement | : Antenna | : | 2018-01-23 21 deg_C / 62 RH Tin VERTICAL |
|-------|------------|-----------|---|---------------------------|---------------------------------------|---|----------------------------|--------------|---|
| 407 | Level (dBu | V/m) | | | | | | | |
| 127 | | | | | | | | | |
| 100 | | | | | | | 15 225(1) | 3.56M)MA SK | |
| 80 | | | | | · · · · · · · · · · · · · · · · · · · | | 101220(11 | | <u>_</u> |
| 60 | | | | 1 | | | | | |
| 40 | | | | | | | | | |
| 20 | | | | | · | | , , , , , , | | |
| 0 | 13.51 | 13.53 | | 13.55 Frequency (MI | 13.57 | 1: | 3.59 | 13 | .61 |
| | | | | riequency (m | 12) | | | | |
| Fre | eq. | Note | Detector Mode | Spectrum Reading Level | Fact | or Actu FS | | Limit @3m | Safe Margin |
| M | Hz | F/H/E/S | PK/QP/AV | dBµV | dB | dBµV | //m c | lBµV/m | dB |
| 13 | .56 | F | Peak | 48.45 | 11.4 | .3 59.8 | 88 | 123.90 | -64.02 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to list Client and this document does not exonerate parties to a transaction for exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipelindustrialPark, WukuBistrialPark, WukuDistrial, NewTaipeliCity, Taiwan24803/新北市五股區新北產業園區五工路134號



| Operation Fundamer Operation EUT Pol. | ital Frequency | :NFC :13.56 MHz :MAIN :H Plane | | Temp./Humi. Engineer | | | :2018-01-23 :21 deg_C / 62 RH :Tin :HORIZONTAL |
|--|----------------|---|----------------|-------------------------|--------|--------------|---|
| 127 | (dBuV/m) | | | | | | |
| 120 | | | | | | | |
| 100 | | | | | | | |
| 100 | | | | | 15.22 | 25(13.56M)MA | <u>SK</u> |
| 80 | | | | · | | | |
| | | | 1 | | | | |
| 60 | | | | | | | |
| 40 | | | | | | | |
| 20 | | | | | | | |
| 20 | | | | | | | |
| 0 13.51 | 13.53 | | 13.55 | 13.57 | 13.59 | | 13.61 |
| | | | Frequency (MHz |) | | | |
| Freq. | Note | Detector | Spectrum | Factor | Actual | Limit | Safe |
| ricq. | Note | Mode | Reading Level | 1 40101 | FS | @3m | Margin |
| MHz | F/H/E/S | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | n dB |
| 13.56 | F | Peak | 49.29 | 11.43 | 60.72 | 123.90 | -63.18 |

Report No: ER/2018/10089 Page: 20 of 33



7.5.2 Radiated Mask

- (a) 15.848 millivolts/m (84 dBµV/m) at 30 m, within the band 13.553-13.567 MHz.
- (b) 334 microvolts/m (50.5 dBµV/m) at 30 m, within the bands 13.410-13.553 MHz and 13.567-13.710 MHz.
- (c) 106 microvolts/m (40.5 dBµV/m) at 30 m, within the bands 13.110-13.410 MHz and 13.710-14.010 MHz.

Distance extrapolation = $40 \times \log(30/3) = 40 \text{ dB}$

Limit is re-adjusted in terms of limit taken in 3m for the following frequency segment of the interest:

- a) 20 *log (15848uV/m) + 40dB = 124.00dBuV/m
- b) 20 *log(334uV/m) + 40dB = 90.47dBuV/m
- c) 20*log(106uV/m) + 40dB = 80.50dBuV/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對調試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions. if any The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeilndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路134號



RH

| Operation Band | :NFC | Test Date | :2018-01-23 |
|-----------------------|------------|--------------------------|------------------|
| Fundamental Frequency | :13.56 MHz | Temp./Humi. | :21 deg_C / 62 F |
| Operation Mode | :MASK | Engineer | :Tin |
| EUT Pol. | :H Plane | Measurement Antenna Pol. | :VERTICAL |

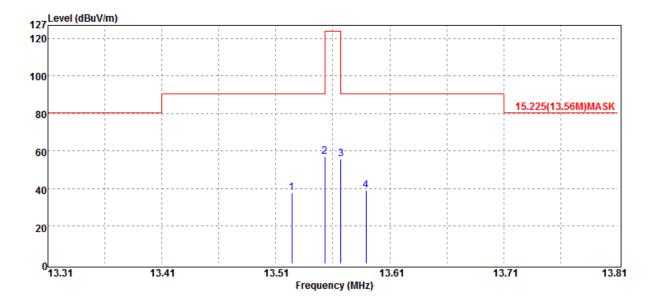

| Freq. | Note | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|-------|---------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | F/H/E/S | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | | |
| 13.52 | S | Peak | 26.51 | 11.43 | 37.94 | 90.47 | -52.53 |
| 13.55 | S | Peak | 45.61 | 11.43 | 57.04 | 90.47 | -33.43 |
| 13.57 | S | Peak | 44.19 | 11.43 | 55.62 | 90.47 | -34.85 |
| 13.59 | S | Peak | 27.47 | 11.43 | 38.90 | 90.47 | -51.57 |



Operation Band :NFC Test Date :2018-01-23 **Fundamental Frequency** Temp./Humi. :13.56 MHz :21 deg_C / 62 RH **Operation Mode** :MASK Engineer :Tin EUT Pol. :H Plane :HORIZONTAL Measurement Antenna Pol. Level (dBuV/m) 127 120 100 15.225(13.56M)MASK 80 60 40 20 ⁰13.31 13.41 13.51 13.61 13.71 13.81 Frequency (MHz)

| Freq. | Note | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|-------|---------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | F/H/E/S | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | | |
| 13.54 | S | Peak | 34.82 | 11.43 | 46.25 | 90.47 | -44.22 |
| 13.55 | S | Peak | 46.34 | 11.43 | 57.77 | 90.47 | -32.70 |
| 13.57 | S | Peak | 45.02 | 11.43 | 56.45 | 90.47 | -34.02 |
| 13.59 | S | Peak | 32.00 | 11.43 | 43.43 | 90.47 | -47.04 |
| 13.59 | S | Peak | 32.00 | 11.43 | 43.43 | 90.47 | -47.04 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



7.5.3 Radiated Emission –

Limit:

§15.225


(d) 30 microvolts/m (29.4 dBµV/m) at 30 m, outside the band 13.110-14.010 MHz. Limit is converted by adding the distance extrapolation factor as the measurement distance was taken place at 3m.

§RSS-210 A2.6

(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

a) 20*log(30uV/m) + 40dB = 69.54 dBuV/m

| Operation Band | :NFC | Test Date | :2018-01-23 |
|-----------------------|------------|--------------------------|-------------------|
| Fundamental Frequency | :13.56 MHz | Temp./Humi. | :21 deg_C / 62 RH |
| Operation Mode | :Tx CH MID | Engineer | :Tin |
| EUT Pol. | :H Plane | Measurement Antenna Pol. | :VERTICAL |
| | | | |

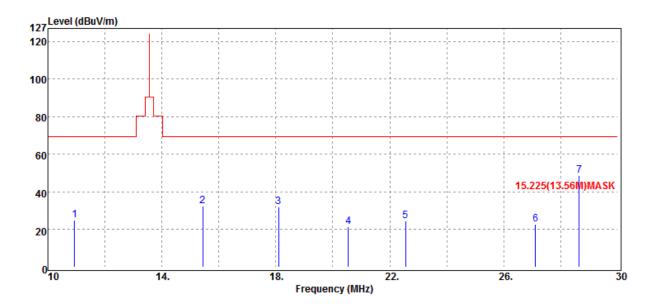

| Freq. | Note | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|-------|---------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | F/H/E/S | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| 10.94 | S | Peak | 13.81 | 11.36 | 25.17 | 69.54 | -44.37 |
| 15.44 | S | Peak | 20.95 | 11.47 | 32.42 | 69.54 | -37.12 |
| 18.10 | S | Peak | 20.64 | 11.54 | 32.18 | 69.54 | -37.36 |
| 20.54 | S | Peak | 10.11 | 11.41 | 21.52 | 69.54 | -48.02 |
| 22.56 | S | Peak | 13.92 | 10.83 | 24.75 | 69.54 | -44.79 |
| 27.12 | S | Peak | 13.01 | 9.70 | 22.71 | 69.54 | -46.83 |
| 28.64 | S | Peak | 39.62 | 9.37 | 48.99 | 69.54 | -20.55 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Operation Band :NFC **Fundamental Frequency** :13.56 MHz **Operation Mode** :Tx CH MID EUT Pol. :H Plane

Test Date :2018-01-23 Temp./Humi. :21 deg_C / 62 RH Engineer :Tin :HORIZONTAL Measurement Antenna Pol.

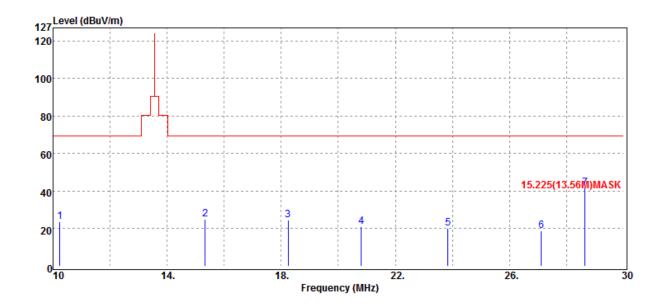


| Freq. | Note | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|-------|---------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | F/H/E/S | PK/QP/AV | dBµ̈́V | dB | dBµV/m | dBµV/m | dB |
| | | | | | | | |
| 10.24 | S | Peak | 12.28 | 11.34 | 23.62 | 69.54 | -45.92 |
| 15.34 | S | Peak | 13.39 | 11.47 | 24.86 | 69.54 | -44.68 |
| 18.24 | S | Peak | 13.18 | 11.55 | 24.73 | 69.54 | -44.81 |
| 20.80 | S | Peak | 9.78 | 11.33 | 21.11 | 69.54 | -48.43 |
| 23.84 | S | Peak | 9.78 | 10.48 | 20.26 | 69.54 | -49.28 |
| 27.12 | S | Peak | 9.21 | 9.70 | 18.91 | 69.54 | -50.63 |
| 28.64 | S | Peak | 32.51 | 9.37 | 41.88 | 69.54 | -27.66 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



RH

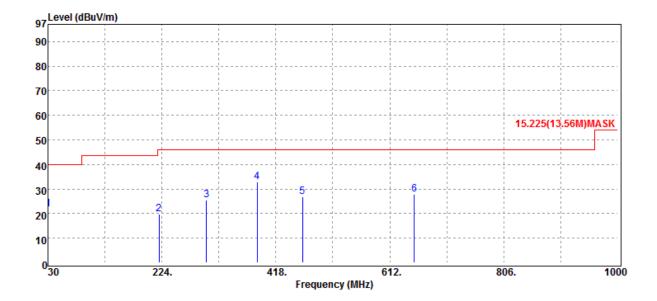


| Freq. | Note | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|--------|---------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | F/H/E/S | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | | |
| 30.00 | S | Peak | 31.02 | -9.19 | 21.83 | 40.00 | -18.17 |
| 219.15 | S | Peak | 29.08 | -9.28 | 19.80 | 46.00 | -26.20 |
| 299.66 | S | Peak | 31.44 | -5.93 | 25.51 | 46.00 | -20.49 |
| 385.99 | S | Peak | 37.13 | -4.31 | 32.82 | 46.00 | -13.18 |
| 463.59 | S | Peak | 29.44 | -2.55 | 26.89 | 46.00 | -19.11 |
| 653.71 | S | Peak | 27.51 | 0.48 | 27.99 | 46.00 | -18.01 |



Operation Band :NFC **Fundamental Frequency** :13.56 MHz **Operation Mode** :Tx CH MID EUT Pol. :H Plane

Test Date :2018-01-22 Temp./Humi. :21 deg_C / 62 RH Engineer :Tin :HORIZONTAL Measurement Antenna Pol.

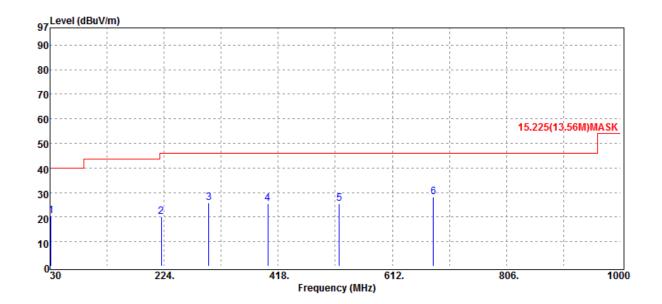

| Freq. | Note | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|--------|---------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | F/H/E/S | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | | |
| 31.94 | S | Peak | 29.63 | -9.11 | 20.52 | 40.00 | -19.48 |
| 219.15 | S | Peak | 29.54 | -9.28 | 20.26 | 46.00 | -25.74 |
| 299.66 | S | Peak | 31.76 | -5.93 | 25.83 | 46.00 | -20.17 |
| 400.54 | S | Peak | 29.40 | -3.94 | 25.46 | 46.00 | -20.54 |
| 521.79 | S | Peak | 27.03 | -1.61 | 25.42 | 46.00 | -20.58 |
| 681.84 | S | Peak | 27.44 | 0.92 | 28.36 | 46.00 | -17.64 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




FREQUENCY TOLERANCE 8

8.1 **Measurement Procedure**

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Set EUT as normal operation
- 3. Set SPA Center Frequency = fundamental frequency, RBW, VBW= 10kHz, Span =100kHz.
- 4. Set SPA Max hold. Mark peak.

8.2 Test SET-UP (Block Diagram of Configuration)

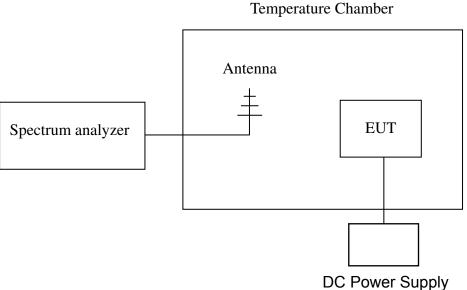

8.3 **Measurement Equipment Used:**

| Conducted Emission Test Site | | | | | |
|------------------------------|----------|-----------------|------------------|--------------|------------|
| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | CAL DUE. |
| Spectrum Analyzer | Agilent | E4446A | MY51100003 | 2017/05/10 | 2018/05/09 |
| Temperature Chamber | TERCHY | MHG-120LF | 911009 | 2017/05/19 | 2018/05/18 |
| AC Power Supply | APW-105N | 887592 | All Power | N/A | N/A |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



8.4 Measurement Results

A. Temperature Variation

| Power Supply | Environment | Frequency | | Limit (KU-) |
|--------------|------------------|-------------|------------|-------------|
| Vdc | Temperature (°C) | (MHz) | Delta (Hz) | Limit (KHz) |
| 3.7 | -20 | 13.55931246 | 687.53700 | +/- 1.356 |
| 3.7 | -10 | 13.55924432 | 755.68000 | +/- 1.356 |
| 3.7 | 0 | 13.56012984 | -129.84000 | +/- 1.356 |
| 3.7 | 10 | 13.56023374 | -233.74000 | +/- 1.356 |
| 3.7 | 20 | 13.56 | 0.00000 | +/- 1.356 |
| 3.7 | 30 | 13.56028376 | -283.76100 | +/- 1.356 |
| 3.7 | 40 | 13.56099432 | -994.32000 | +/- 1.356 |
| 3.7 | 50 | 13.56017329 | -173.29000 | +/- 1.356 |

B. Supply Voltage Variation

| Power Supply | Environment | Frequency | | |
|--------------|-----------------------------|-------------|------------|-------------|
| Vdc | Temperature ($^{\circ}C$) | (MHz) | Delta (Hz) | Limit (KHz) |
| 3.33 | 20 | 13.56015941 | -159.41110 | +/- 1.356 |
| 3.7 | 20 | 13.56 | 0.00000 | +/- 1.356 |
| 4.07 | 20 | 13.56018422 | -184.21584 | +/- 1.356 |



2 minutes

A. Temperature Variation

| Power Supply | Environment | Frequency | | |
|--------------|------------------|-------------|------------|-------------|
| Vdc | Temperature (°C) | (MHz) | Delta (Hz) | Limit (KHz) |
| 3.7 | -20 | 13.55934157 | 782.56500 | +/- 1.356 |
| 3.7 | -10 | 13.55935971 | 764.42400 | +/- 1.356 |
| 3.7 | 0 | 13.56013412 | -9.98500 | +/- 1.356 |
| 3.7 | 10 | 13.56022302 | -98.88300 | +/- 1.356 |
| 3.7 | 20 | 13.56012414 | 0.00000 | +/- 1.356 |
| 3.7 | 30 | 13.56013498 | -10.84100 | +/- 1.356 |
| 3.7 | 40 | 13.56094682 | -822.68500 | +/- 1.356 |
| 3.7 | 50 | 13.56013117 | -7.03400 | +/- 1.356 |

B. Supply Voltage Variation

| Power Supply | Environment | Frequency | Dolto (Uz) | |
|--------------|-----------------------------|-------------|------------|-------------|
| Vdc | Temperature ($^{\circ}C$) | (MHz) | Delta (Hz) | Limit (KHz) |
| 3.33 | 20 | 13.56016053 | -36.39610 | +/- 1.356 |
| 3.7 | 20 | 13.56012414 | 0.00000 | +/- 1.356 |
| 4.07 | 20 | 13.56017152 | -47.38760 | +/- 1.356 |



5 minutes

A. Temperature Variation

| Power Supply | Environment | Frequency | | |
|--------------|------------------|-------------|------------|-------------|
| Vdc | Temperature (°C) | (MHz) | Delta (Hz) | Limit (KHz) |
| 3.7 | -20 | 13.55932341 | 676.58700 | +/- 1.356 |
| 3.7 | -10 | 13.55936981 | 630.18800 | +/- 1.356 |
| 3.7 | 0 | 13.56007238 | -72.38100 | +/- 1.356 |
| 3.7 | 10 | 13.56024931 | -249.31100 | +/- 1.356 |
| 3.7 | 20 | 13.56 | 0.00000 | +/- 1.356 |
| 3.7 | 30 | 13.56027359 | -273.59400 | +/- 1.356 |
| 3.7 | 40 | 13.56071279 | -712.79000 | +/- 1.356 |
| 3.7 | 50 | 13.56021097 | -210.97000 | +/- 1.356 |

B. Supply Voltage Variation

| Power Supply | Environment | Frequency | | Limit (KHz) |
|--------------|-----------------------------|-------------|------------|-------------|
| Vdc | Temperature ($^{\circ}C$) | (MHz) | Delta (Hz) | Limit (KHz) |
| 3.33 | 20 | 13.56015114 | -151.13540 | +/- 1.356 |
| 3.7 | 20 | 13.56 | 0.00000 | +/- 1.356 |
| 4.07 | 20 | 13.56018435 | -184.34697 | +/- 1.356 |



10 minutes

A. Temperature Variation

| Power Supply | Environment | Frequency | | |
|--------------|------------------|-------------|------------|-------------|
| Vdc | Temperature (°C) | (MHz) | Delta (Hz) | Limit (KHz) |
| 3.7 | -20 | 13.55932514 | 706.33200 | +/- 1.356 |
| 3.7 | -10 | 13.55931973 | 711.74100 | +/- 1.356 |
| 3.7 | 0 | 13.56022193 | -190.45900 | +/- 1.356 |
| 3.7 | 10 | 13.56021893 | -187.45900 | +/- 1.356 |
| 3.7 | 20 | 13.56003147 | 0.00000 | +/- 1.356 |
| 3.7 | 30 | 13.56021459 | -183.12000 | +/- 1.356 |
| 3.7 | 40 | 13.56043591 | -404.44000 | +/- 1.356 |
| 3.7 | 50 | 13.56021398 | -182.50900 | +/- 1.356 |

B. Supply Voltage Variation

| Power Supply | Environment | Frequency | Dolto (Uz) | Limit (KUT) |
|--------------|-----------------------------|-------------|------------|-------------|
| Vdc | Temperature ($^{\circ}C$) | (MHz) | Delta (Hz) | Limit (KHz) |
| 3.33 | 20 | 13.56015814 | -126.67130 | +/- 1.356 |
| 3.7 | 20 | 13.56003147 | 0.00000 | +/- 1.356 |
| 4.07 | 20 | 13.56018432 | -152.84420 | +/- 1.356 |



20 dB OCCUPIED BANDWIDTH MEASUREMENT 9

9.1 Standard Applicable:

§2.1049 & §15.215 (c)

9.2 Limit:

None

9.3 Test Set-up

Refer to section 6.2 in this report

9.4 Measurement Procedure

20dB bandwidth

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak mode.
- 2. 20dB Bandwidth the resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
- 3. Measured the spectrum width with power higher than 20dB below carrier.


9.5 Measurement Equipment Used:

Refer to section 6.3 in this report

9.6 Measurement Result

| 20dB Bandwidth (kHz) |
|-------------------------|
| 2.904 |

-20dB Bandwidth

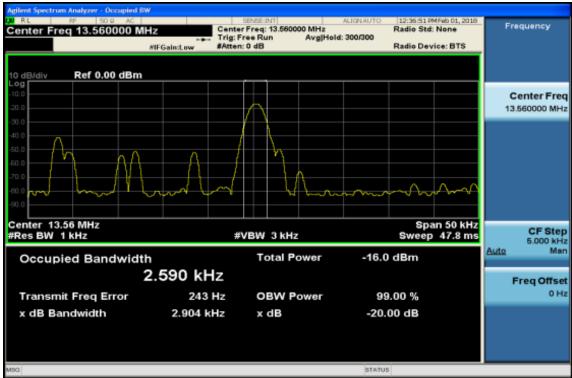

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



10 ANTENNA REQUIREMENT

10.1 Standard Applicable:

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

10.2 Antenna Connected Construction:

An embedded-in antenna design is used. Please see EUT photo and antenna spec. for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.