

DATE: 29 October 2009

I.T.L. (PRODUCT TESTING) LTD.

FCC Radio Test Report

for

AeroScout Ltd.


Equipment under test:


AeroScout TAG-2000 Tag

TAG-5100*

* See customer's declaration on page 6.

Written by: 
D. Shidlow, Documentation

Approved by: 
A. Sharabi, Test Engineer

Approved by: 
I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.

TABLE OF CONTENTS

1.	GENERAL INFORMATION -----	5
1.1	Administrative Information.....	5
1.2	List of Accreditations.....	7
1.3	Product Description.....	8
1.4	Test Methodology.....	8
1.5	Test Facility.....	8
1.6	Measurement Uncertainty.....	8
2.	SYSTEM TEST CONFIGURATION -----	9
2.1	Justification.....	9
2.2	EUT Exercise Software.....	9
2.3	Special Accessories.....	9
2.4	Equipment Modifications.....	9
2.5	Configuration of Tested System.....	10
3.	THEORY OF OPERATION -----	11
3.1	Theory of Operation.....	11
4.	6 DB MINIMUM BANDWIDTH -----	12
4.1	Test procedure.....	12
4.2	Results table.....	14
4.3	Test Equipment Used.....	15
5.	26 DB MINIMUM BANDWIDTH -----	16
5.1	Test procedure.....	16
5.1	Results table.....	18
5.2	Test Equipment Used.....	19
6.	MAXIMUM TRANSMITTED PEAK POWER OUTPUT -----	20
6.1	Test procedure.....	20
6.2	Results table.....	22
6.3	Test Equipment Used.....	23
7.	PEAK POWER OUTPUT OUT OF 2400-2483.5 MHZ BAND -----	24
7.1	Test procedure.....	24
7.2	Results table.....	38
7.3	Test Equipment Used.....	39
8.	BAND EDGE SPECTRUM -----	40
8.1	Test procedure.....	40
8.2	Results table.....	41
8.3	Test Equipment Used.....	42
9.	RADIATED EMISSION, 9 KHZ – 30 MHZ -----	43
9.1	Test Specification.....	43
9.2	Test Procedure.....	43
9.3	Measured Data.....	43
9.4	Test Instrumentation Used, Radiated Measurements.....	44
9.5	Field Strength Calculation.....	44
10.	SPURIOUS RADIATED EMISSION 30 – 1000 MHZ -----	45
10.1	Test Specification.....	45
10.2	Test Procedure.....	45
10.3	Test Data.....	46
10.4	Test Instrumentation Used, Radiated Measurements.....	47
10.5	Field Strength Calculation.....	47
11.	SPURIOUS RADIATED EMISSION ABOVE 1 GHZ -----	48
11.1	Radiated Emission Above 1 GHz.....	48
11.2	Test Data.....	49
11.3	Test Instrumentation Used, Radiated Measurements Above 1 GHz.....	56

12.	TRANSMITTED POWER DENSITY	-----57
12.1	Test procedure57
12.2	Results table59
12.3	Test Equipment Used60
13.	ANTENNA GAIN/INFORMATION	-----61
14.	APPENDIX A - CORRECTION FACTORS	-----62
14.1	Correction factors for CABLE62
14.2	Correction factors for CABLE63
14.3	Correction factors for CABLE64
12.6	Correction factors for LOG PERIODIC ANTENNA65
14.4	Correction factors for LOG PERIODIC ANTENNA66
14.5	Correction factors for BICONICAL ANTENNA67
14.6	Correction factors for Double-Ridged Waveguide Horn68
14.7	Correction factors for Horn Antenna69
14.8	Correction factors for Horn Antenna70
14.9	Correction factors for ACTIVE LOOP ANTENNA71
15.	COMPARISON INDUSTRY CANADA REQUIREMENTS WITH FCC	-----72

1. General Information

1.1 Administrative Information

Manufacturer:	AeroScout Ltd.
Manufacturer's Address:	3 Pekeris St. Einstein Entrance 4th Floor Rehovot 76702 Israel Tel: +972-8-9369393 Fax: +972-8-9365977
Manufacturer's Representative:	Dadi Matza
Equipment Under Test (E.U.T):	AeroScout TAG-2000 Tag
Equipment Model No.:	TAG-5100 (See customer's declaration on following page).
Equipment Serial No.:	Not Designated
Date of Receipt of E.U.T:	20.04.09
Start of Test:	20.04.09
End of Test:	23.04.09
Test Laboratory Location:	I.T.L (Product Testing) Ltd. Kfar Bin Nun, ISRAEL 99780
Test Specifications:	See Section 2

AeroScout[®]

Date: 14/06/2009

DECLARATION


I hereby declare that the name and model name of the E.U.T. tested at the I.T.L. EMC/Radio laboratory between 20 and 23 April 2009 is as follows:

E.U.T. Name: AeroScout TAG-2000 Tag
Model Name: TAG-5100

Please use the above names in the test reports and certificates.

The E.U.T. has two plastic enclosures, one transparent and the other non-transparent. The transparent enclosure was unavailable at the time of testing.

Thank you,

Signature: 

Reuven Amsalem
VP HW R&D

1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025B-1.
6. TUV Product Services, England, ASLLAS No. 97201.
7. Nemko (Norway), Authorization No. ELA 207.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 Product Description

The AeroScout™ T2 Tag is a key component of the AeroScout™ Location System. These dedicated battery-powered Tags send Wi-Fi compatible messages at pre-defined intervals and can be attached to non-Wi-Fi assets in order to locate them. Tags send messages with their unique ID number that are detected by Location Receivers and used to estimate the Tag's location.

The AeroScout T2 Tag is used to be integrated to customer equipment and enables the wireless network infrastructure to locate people and assets otherwise not connected to a wireless network. The tag can be used to track people in many valuable applications - child tracking in amusement parks, security personnel in enterprises, hospital patients and many more. Various types of equipment can be tagged. These include vehicles in parking lots; inventory in a manufacturing line; containers, forklifts and other assets for efficient supply chain management; shopping carts in supermarkets; and medical equipment in hospitals.

1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing August 22, 2006).

I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 Measurement Uncertainty

Radiated Emission

The Open Site complies with the ± 4 dB Normalized Site Attenuation requirements of ANSI C63.4-2003. In accordance with Paragraph 5.4.6.1 of this standard, this tolerance includes instrumentation calibration errors, measurement technique errors, and errors due to site anomalies.

2. System Test Configuration

2.1 Justification

Radiated emission screening was performed in 3 orthogonal orientations. The worst case orientation was the vertical position.

The typical operation of the Tag (as a customer would normally use) is that the Tag wake up every predefine interval (from 1 sec to 3.5 hours) and it is set to be in receive mode for a period of 100uSec to sniff the air traffic (RSSI detection) and in the case that the channel is free it will transmit a message for a period of max 500uS.

The Tag includes a low frequency receiver which is set to be in receiving mode continuously.

Due to the short period in transmit and receive mode in a typical operation mode, the tag was configured to be in continuous receive mode and in continuous transmit mode to test the tag behavior on those modes as it was found to be the worst case operating mode.

2.2 EUT Exercise Software

The Tag SW uses two working mode in typical operation a receive mode for the RSSI detection and then the Transmit mode.

In the testing SW configuration the Tag was configured to be on one of the two programmable test modes

- 1) Continuous receive mode
- 2) Continuous transmit mode.

The Low frequency receiver is active in the two test mode above.

The testing of those two modes was done on three different channels.

2.3 Special Accessories

No special accessories were needed to achieve compliance.

2.4 Equipment Modifications

The R 1078 resistor at the Vco DC regulator was modified 100 Ohm to 64.9 Ohm.

2.5 Configuration of Tested System




Figure 1. Configuration of Tested System

3. Theory of Operation

3.1 *Theory of Operation*

Each Tag has its own MAC address. Before any transmission the Tag sniffs the air interface in order to detect 802.11b transmissions (RSSI detection). If the air is free, the Tag transmits its preprogrammed 802.11b message.

4. 6 dB Minimum Bandwidth

4.1 Test procedure

The E.U.T. was set to the applicable test frequency. The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (10 dB) and an appropriate coaxial cable (cable loss = 1.2 dB). The spectrum analyzer was set to 100 kHz resolution BW. The spectrum bandwidth of the E.U.T. at the point of 6 dB below maximum peak power was measured and recorded.

The E.U.T. was tested at 2412, 2437, and 2462 MHz.

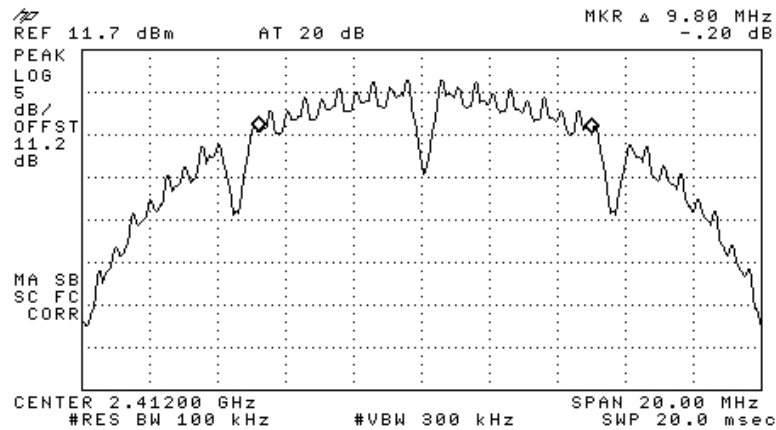


Figure 2 — 2412 MHz

4.2 Results table

E.U.T Description: AeroScout TAG-2000 Tag
 Model No.: TAG-5100
 Serial Number: Not Designated
 Specification: F.C.C. Part 15, Subpart C: (15.247-a2)

Operation Frequency (MHz)	Reading (MHz)	Specification (MHz)
2412	9.80	0.5
2437	9.75	0.5
2462	9.90	0.5

Figure 5 6 dB Minimum Bandwidth

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature: 

Date: 17.06.09

Typed/Printed Name: A. Sharabi

4.3 Test Equipment Used.

6 dB Minimum Bandwidth

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	March 17, 2009	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	April, 19, 2009	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	April 19, 2009	1 year

Figure 6 Test Equipment Used

5. 26 dB Minimum Bandwidth

5.1 Test procedure

The E.U.T. was set to the applicable test frequency. The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (10 dB) and an appropriate coaxial cable (cable loss = 1.2 dB). The spectrum analyzer was set to 100 kHz resolution BW. The spectrum bandwidth of the E.U.T. at the point of 6 dB below maximum peak power was measured and recorded.

The E.U.T. was tested at 2412, 2437, and 2462 MHz).

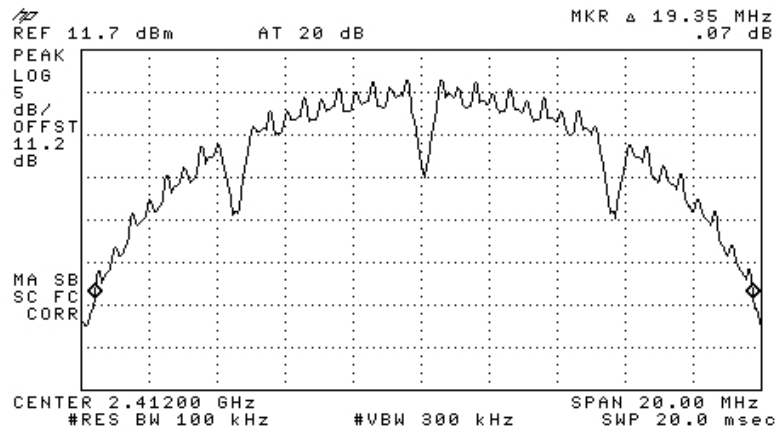


Figure 7 —2412 MHz

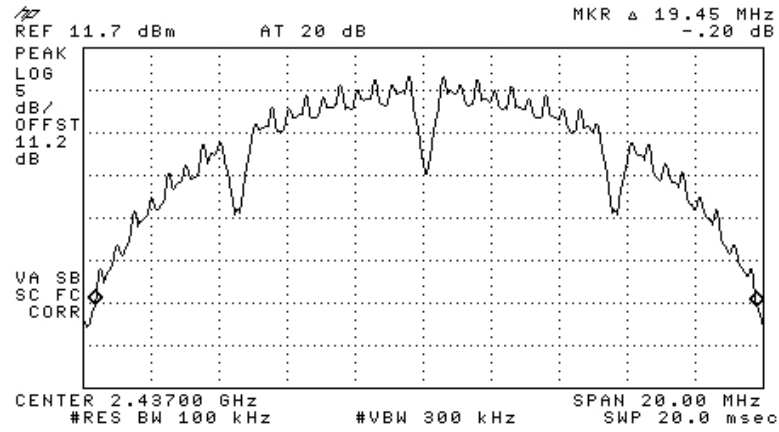


Figure 8 —2437MHz

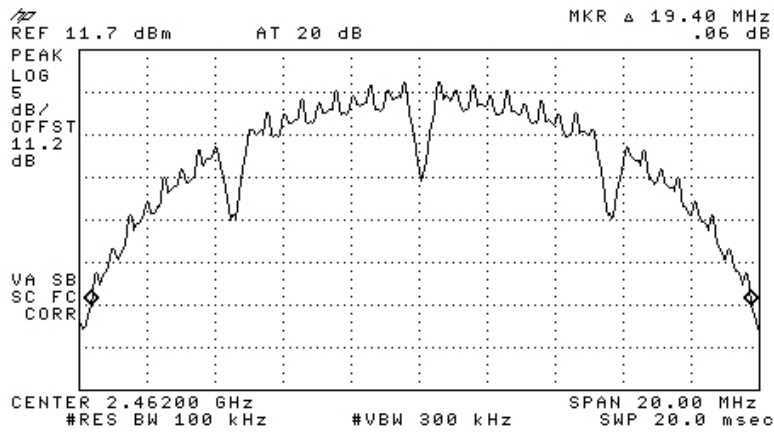


Figure 9 —2462 MHz

5.1 Results table

E.U.T Description: AeroScout TAG-2000 Tag
 Model No.: TAG-5100
 Serial Number: Not Designated

Operation Frequency (MHz)	26 dB Bandwidth (dBm)
2412	19.35
2437	19.45
2462	19.40

Figure 10 26 dB Minimum Bandwidth

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature: 

Date: 17.06.09

Typed/Printed Name: A. Sharabi

5.2 Test Equipment Used.

6 dB Minimum Bandwidth

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	March 17, 2009	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	April 19, 2009	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	April 19, 2009	1 year

Figure 11 Test Equipment Used

6. Maximum Transmitted Peak Power Output

6.1 Test procedure

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator (10dB) and an appropriate coaxial cable (cable loss = 1 dB). The Spectrum Analyzer was set to 1.0 MHz resolution BW. Peak power level was measured at selected operation frequencies.

The E.U.T. was tested at 2412, 2437, and 2462 MHz.

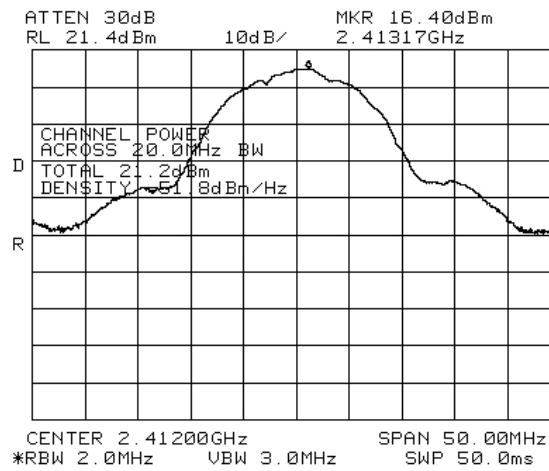


Figure 12 2412 MHz

6.3 Test Equipment Used.

Peak Power Output

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8564E	3442A00275	December 15, 2008	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	April 19, 2009	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	April 19, 2009	1 year

Figure 16 Test Equipment Used

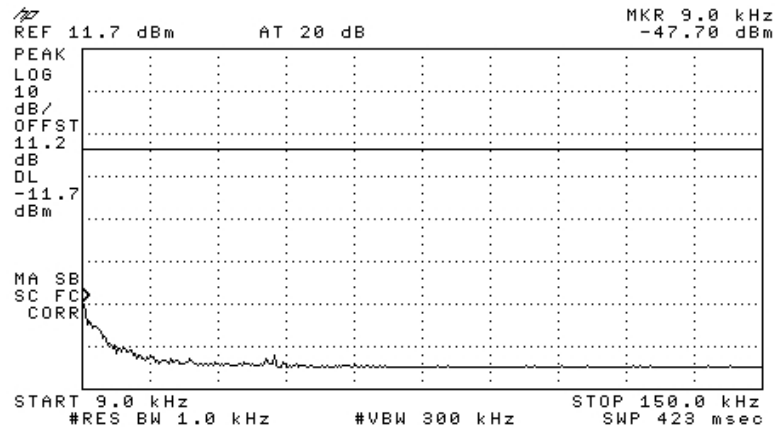


Figure 18 — 2412 MHz

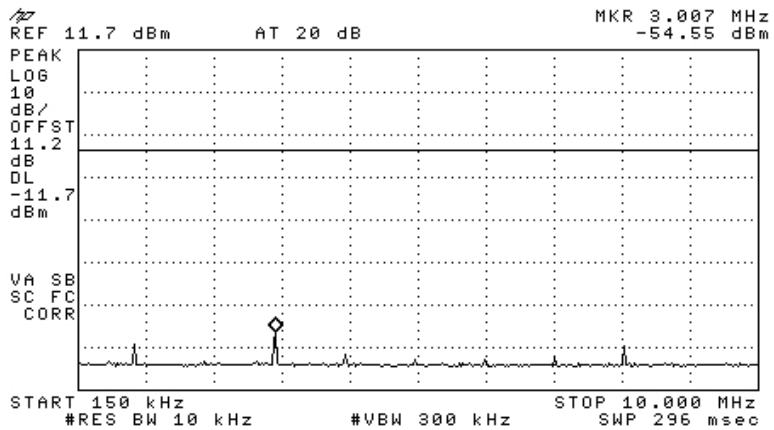


Figure 19 — 2412 MHz

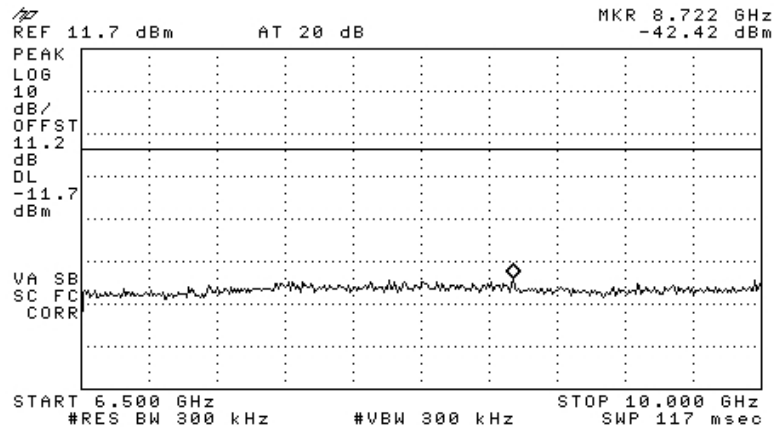


Figure 24 — 2412 MHz

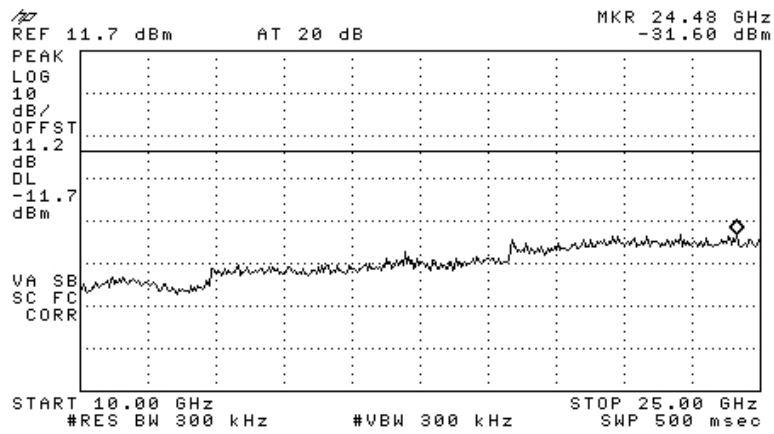


Figure 25 — 2412 MHz

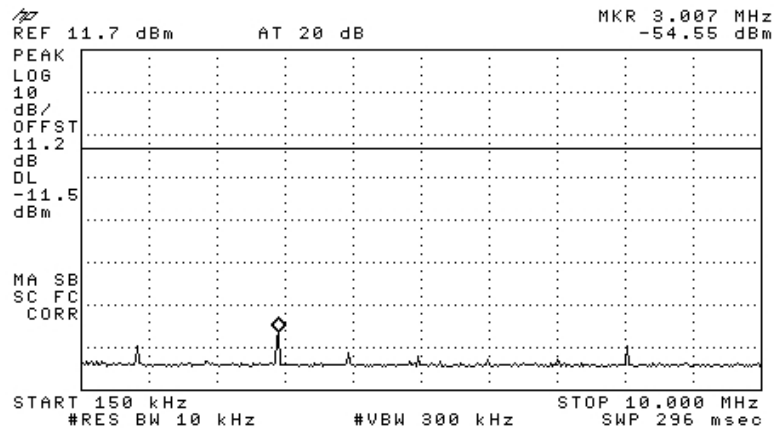


Figure 28 — 2437 MHz

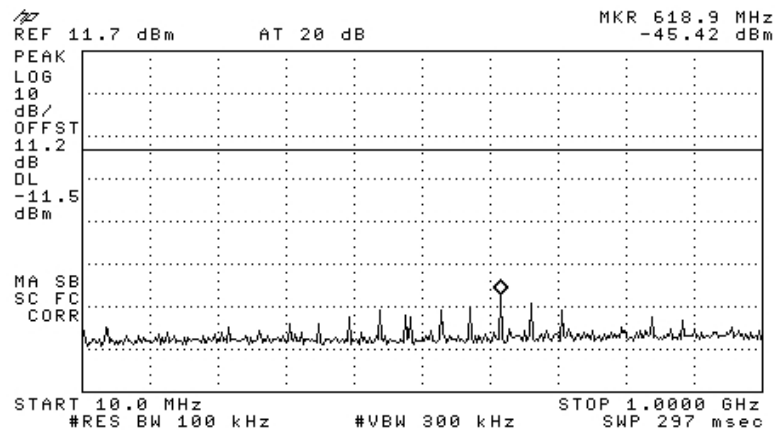


Figure 29 — 2437 MHz

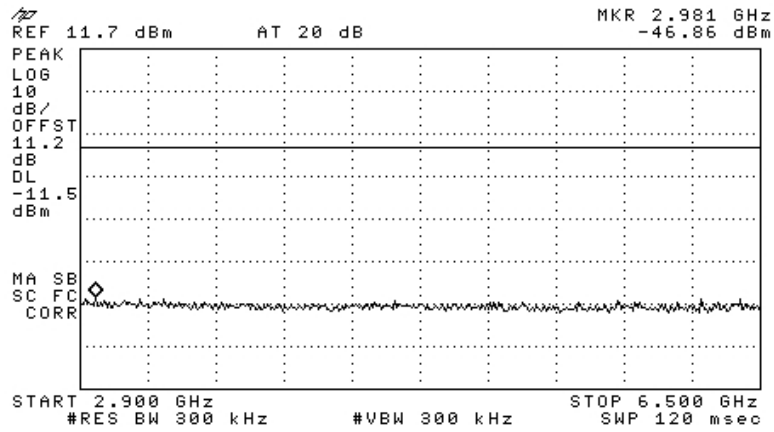


Figure 32 — 2437 MHz

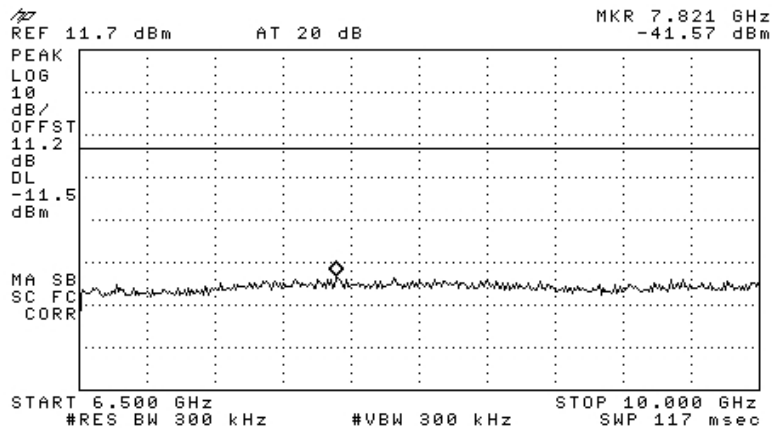


Figure 33 — 2437 MHz

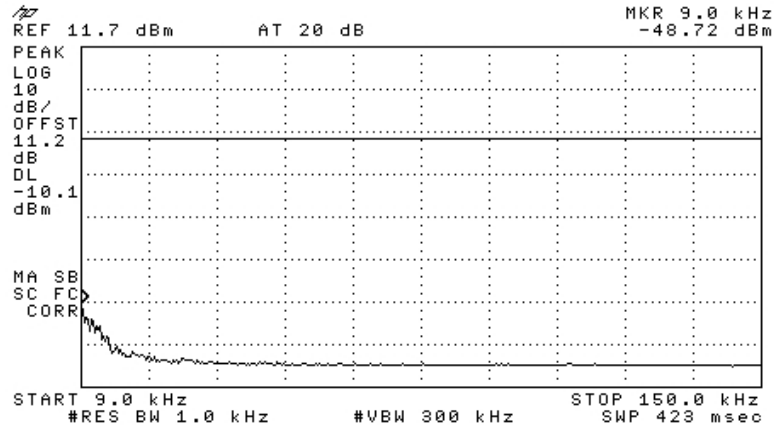


Figure 36 — 2462 MHz

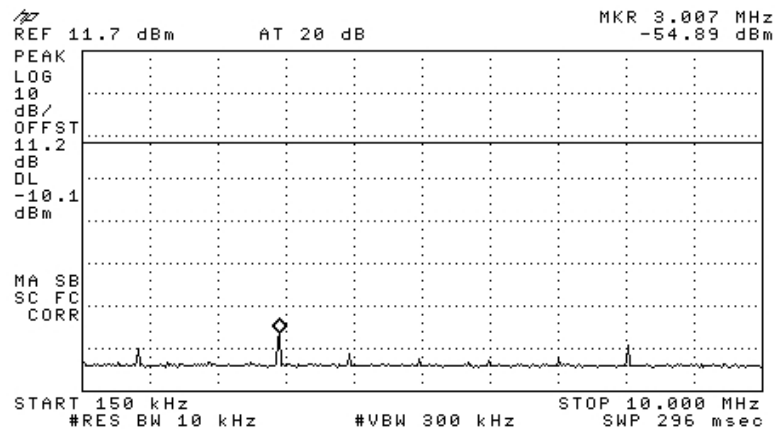


Figure 37 — 2462 MHz

7.2 Results table

E.U.T Description: AeroScout TAG-2000 Tag
 Model No.: TAG-5100
 Serial Number: Not Designated
 Specification: F.C.C. Part 15, Subpart C (15.247)

Operation Frequency (MHz)	Reading (dBc)	Specification (dBc)	Margin (dB)
2412	-23.20	20.0	-3.2
2437	-32.01	20.0	-12.01
2462	-31.56	20.0	-11.56

Figure 44 Peak Power Output of 2400-2483.5 MHz Band

JUDGEMENT: Passed by 3.2 dB

TEST PERSONNEL:

Tester Signature: _____ 

Date: 17.06.09

Typed/Printed Name: A. Sharabi

7.3 Test Equipment Used.

Peak Power Output of 2400-2438.5 MHz Band

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	March 17, 2009	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	April 19, 2009	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	April 19, 2009	1 year

Figure 45 Test Equipment Used

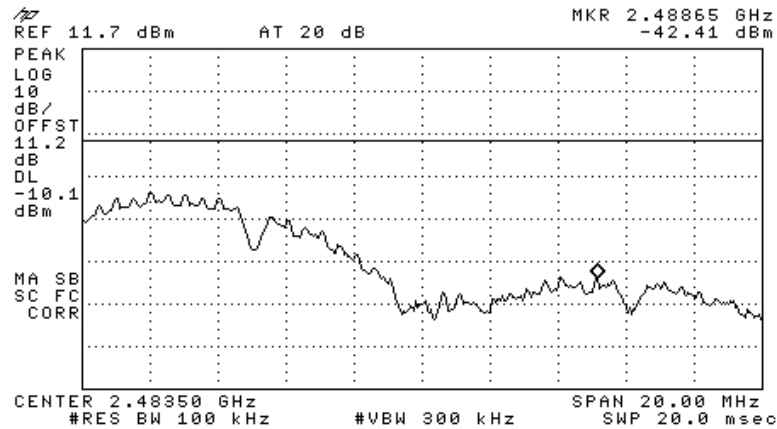


Figure 47 — 2462 MHz

8.2 Results table

E.U.T. Description: AeroScout TAG-2000 Tag
Model No.: TAG-5100
Serial Number: Not Designated
Specification: F.C.C. Part 15, Subpart C (15.247)

Operation Frequency (MHz)	Band Edge Frequency (MHz)	Spectrum Level (dBc)	Specification (dBc)	Margin (dB)
2412	2398.60	-22.95	20.0	-2.95
2462	2448.65	-42.41	20.0	-22.41

Figure 48 Band Edge Spectrum

JUDGEMENT: Passed by 2.95 dB

TEST PERSONNEL:

Tester Signature: _____  _____

Date: 17.06.09

Typed/Printed Name: A. Sharabi

8.3 Test Equipment Used.

Band edge Spectrum

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	March 17, 2009	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	April 19, 2009	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	April 19, 2009	1 year

Figure 49 Test Equipment Used

9. Radiated Emission, 9 kHz – 30 MHz

9.1 Test Specification

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

9.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 3 meters.

The E.U.T. was tested at the operating frequencies of 2412, 2437, and 2462 MHz.

9.3 Measured Data

JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 209 specification.

The results for all three operating frequencies were the same.

The signals in the band 9 kHz – 30 MHz were below the spectrum analyzer noise level, at least 20 dB below the specification limit.

TEST PERSONNEL:

Tester Signature: 

Date: 17.06.09

Typed/Printed Name: A. Sharabi

9.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 17, 2008	1 year
RF Section	HP	85420E	3705A00248	November 16, 2008	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 15, 2008	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

9.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ v/m]

RA: Receiver Amplitude [dB μ v]

AF: Receiving Antenna Correction Factor [dB/m]

CF: Cable Attenuation Factor [dB]

Example: FS = 30.7 dB μ V (RA) + 14.0 dB (AF) + 0.9 dB (CF) = 45.6 dB μ V

No external pre-amplifiers are used.

10. Spurious Radiated Emission 30 – 1000 MHz

10.1 Test Specification

30 MHz-1000 MHz, F.C.C., Part 15, Subpart C

10.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1.

The frequency range 30 MHz-1000 MHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 30-1000 MHz, the readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods:

- Turning the E.U.T on and off.

- Using a frequency span less than 10 MHz.

- Observation of the signal level during turntable rotation. Background noise is not affected by the rotation of the E.U.T.

The E.U.T. was tested at the operating frequencies of 2412, 2437 , and 2462 MHz.

10.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 17, 2008	1 year
RF Section	HP	85420E	3705A00248	November 16, 2008	1 year
Antenna Bioconical	ARA	BCD 235/B	1041	March 25, 2009	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 06, 2008	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

10.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$[\text{dB}\mu\text{v/m}] \text{ FS} = \text{RA} + \text{AF} + \text{CF}$$

- FS: Field Strength [dB μ v/m]
- RA: Receiver Amplitude [dB μ v]
- AF: Receiving Antenna Correction Factor [dB/m]
- CF: Cable Attenuation Factor [dB]

Example: FS = 30.7 dB μ V (RA) + 14.0 dB (AF) + 0.9 dB (CF) = 45.6 dB μ V

No external pre-amplifiers are used.

11. Spurious Radiated Emission Above 1 GHz

11.1 Radiated Emission Above 1 GHz

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

In the frequency range 1-2.9 GHz, a computerized EMI receiver complying to CISPR 16 requirements was used.

In the frequency range 2.9-25.0 GHz, a spectrum analyzer including a low noise amplifier was used. During average measurements, the IF bandwidth was 1 MHz and the video bandwidth was 100Hz. During peak measurements, the IF bandwidth was 1 MHz and the video bandwidth was 3 MHz.

The test distance was 3 meters.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The E.U.T. was tested at the operating frequencies of 2412, 2437, and 2462 MHz.

11.2 Test Data

JUDGEMENT: Passed by 2.2 dB

For the operation frequency of 2412 MHz, the margin between the emission level and the specification limit is 2.2 dB in the worst case at the frequency of 4822.00 MHz, horizontal and vertical polarizations.

For the operation frequency of 2437 MHz, the margin between the emission level and the specification limit is 4.7 dB in the worst case at the frequency of 4875.00 MHz, horizontal polarization.


For the operation frequency of 2462 MHz, the margin between the emission level and the specification limit is 2.2 dB in the worst case at the frequency of 4923.00 MHz, horizontal polarization.

The results for all modulations were the same.

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

The details of the highest emissions are given in *Figure 50* to *Figure 55*.

TEST PERSONNEL:

Tester Signature:  Date: 17.06.09

Typed/Printed Name: A. Sharabi

Radiated Emission Above 1 GHz

E.U.T Description AeroScout TAG-2000 Tag
 Type TAG-5100
 Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
 Test Distance: 3 meters Detector: Peak
 Operation Frequency: 2412 MHz

Freq.	Polarity	Peak Amp	Peak. Specification	Peak. Margin
(MHz)	(H/V)	(dBμV/m)	(dB μV/m)	(dB)
2390.00	H	57.4*	74.0	-16.6
2390.00	V	68.3*	74.0	-5.7
4822.00	H	71.8**	74.0	-2.2
4822.00	V	71.8**	74.0	-2.2

Figure 50. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

** “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain + Band Pass Filter

Radiated Emission Above 1 GHz

E.U.T Description AeroScout TAG-2000 Tag
 Type TAG-5100
 Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
 Test Distance: 3 meters Detector: Average
 Operation Frequency: 2412 MHz

Freq.	Polarity	Average Amp	Average Specification	Peak. Margin
(MHz)	(H/V)	(dBμV/m)	(dB μV/m)	(dB)
2390.00	H	44.4*	54.0	-14.0
2390.00	V	41.3*	54.0	-12.7
4822.00	H	39.0**	54.0	-15.0
4822.00	V	39.3**	54.0	-14.7

Figure 51. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Average

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

** “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain + Band Pass Filter

Radiated Emission Above 1 GHz

E.U.T Description AeroScout TAG-2000 Tag
 Type TAG-5100
 Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
 Test Distance: 3 meters Detector: Peak
 Operation Frequency: 2437 MHz

Freq.	Polarity	Peak Amp	Peak. Specification	Peak. Margin
(MHz)	(H/V)	(dBμV/m)	(dB μV/m)	(dB)
4875.00	H	69.3	74.0	-4.7
4875.00	V	65.8	74.0	-8.2

Figure 52. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

“Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain + Band Pass Filter

Radiated Emission Above 1 GHz

E.U.T Description AeroScout TAG-2000 Tag
 Type TAG-5100
 Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
 Test Distance: 3 meters Detector: Average
 Operation Frequency: 2437 MHz

Freq.	Polarity	Average Amp	Average Specification	Peak. Margin
(MHz)	(H/V)	(dBμV/m)	(dB μV/m)	(dB)
4875.00	H	38.9	54.0	-15.1
4875.00	V	38.7	54.0	-15.3

**Figure 53. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
 Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

“Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain + Band Pass Filter

Radiated Emission Above 1 GHz

E.U.T Description AeroScout TAG-2000 Tag
 Type TAG-5100
 Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
 Test Distance: 3 meters Detector: Peak
 Operation Frequency: 2462 MHz

Freq.	Polarity	Peak Amp	Peak. Specification	Peak. Margin
(MHz)	(H/V)	(dBμV/m)	(dB μV/m)	(dB)
2483.50	H	58.1*	74.0	-15.9
2483.50	V	69.4*	74.0	-4.6
4923.00	H	71.8**	74.0	-2.2
4923.00	V	71.2**	74.0	-2.8

**Figure 54. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
 Detector: Peak**

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

** “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain + Band Pass Filter

Radiated Emission Above 1 GHz

E.U.T Description AeroScout TAG-2000 Tag
 Type TAG-5100
 Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
 Test Distance: 3 meters Detector: Average
 Operation Frequency: 2462 MHz

Freq.	Polarity	Average Amp	Average Specification	Peak. Margin
(MHz)	(H/V)	(dBμV/m)	(dB μV/m)	(dB)
2483.50	H	45.1*	54.0	-8.9
2483.50	V	42.9*	54.0	-11.1
4923.00	H	38.4**	54.0	-15.6
4923.00	V	39.8**	54.0	-14.2

Figure 55. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Average

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

** “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain + Band Pass Filter

11.3 Test Instrumentation Used, Radiated Measurements Above 1 GHz

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	November 17, 2008	1 Year
RF Filter Section	HP	85420E	3705A00248	November 16, 2008	1 Year
Antenna Biconical	ARA	BCD 235/B	1041	March 25, 2009	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 06, 2008	1 Year
Antenna Log Periodic	A.H. Systems	SAS-200/511	253	January 29, 2009	2 Years
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 16, 2008	2 Years
Horn Antenna	ARA	SWH-28	1008	December 23, 2008	2 Years
Horn Antenna	Narda	V637	0410	December 23, 2008	2 Years
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	November 3, 2008	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	January 9, 2009	1 Year
Low Noise Amplifier	MK Milliwave	MKT6-3000 4000-30-13P	A0399	January 15, 2009	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	March 17, 2009	1 Year
Spectrum Analyzer	HP	8546E	3442A00275	December 15, 2008	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JKGC19982	N/A	N/A

12.2 Results table

E.U.T. Description: AeroScout TAG-2000 Tag
 Model No.: TAG-5100
 Serial Number: Not Designated
 Specification: F.C.C. Part 15, Subpart C (15.247)

Operation Frequency (MHz)	Reading Spectrum Analyzer (dBm)	Specification (dBm)	Margin (dB)
2412	-10.2	8.0	-18.2
2437	-9.4	8.0	-17.4
2462	-9.4	8.0	-17.4

Figure 59 Test Results

JUDGEMENT: Passed by 17.4 dB

TEST PERSONNEL:

Tester Signature: 

Date: 17.06.09

Typed/Printed Name: A. Sharabi

12.3 Test Equipment Used.

Transmitted Power Density

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8529L	3826A01204	March 17, 2009	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	April 19, 2009	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	April 19, 2009	1 year

Figure 60 Test Equipment Used

13. Antenna Gain/Information

The antenna gain is -4 dBi.

14. APPENDIX A - CORRECTION FACTORS

14.1 Correction factors for CABLE

from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

14.2 Correction factors for CABLE

from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

- 1. The cable type is RG-8.*
- 2. The overall length of the cable is 10 meters.*

14.3 Correction factors for CABLE

**from spectrum analyzer
to test antenna above 2.9 GHz**

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

- 1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.*
- 2. The cable is used for measurements above 2.9 GHz.*
- 3. The overall length of the cable is 10 meters.*

12.6 Correction factors for LOG PERIODIC ANTENNA

**Type LPD 2010/A
at 3 and 10 meter ranges.**

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

- 1. Antenna serial number is 1038.*
- 2. The above lists are located in file number 38M30.ANT for a 3 meter range, and file number 38M100.ANT for a 10 meter range.*
- 3. The files mentioned above are located on the disk marked "Radiated Emission Test EMI Receiver".*

14.4 Correction factors for LOG PERIODIC ANTENNA
Type SAS-200/511
at 3 meter range.

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".

14.5 Correction factors for BICONICAL ANTENNA
Type BCD-235/B,
at 3 meter range

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

14.6 Correction factors for Double-Ridged Waveguide Horn

**Model: 3115, S/N 29845
at 3 meter range.**

FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENN A Gain (dBi)	FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENNA Gain (dBi)
1.0	24.8	5.4	10.0	38.8	11.4
1.5	26.1	7.6	10.5	38.9	11.8
2.0	28.6	7.7	11.0	39.0	12.1
2.5	29.8	8.4	11.5	39.6	11.8
3.0	31.4	8.4	12.0	39.8	12.0
3.5	32.4	8.7	12.5	39.6	12.5
4.0	33.7	8.6	13.0	40.0	12.5
4.5	33.4	9.9	13.5	39.8	13.0
5.0	34.5	9.7	14.0	40.2	13.0
5.5	35.1	9.9	14.5	40.6	12.9
6.0	35.4	10.4	15.0	41.3	12.4
6.5	35.6	10.8	15.5	39.5	14.6
7.0	36.2	10.9	16.0	38.8	15.5
7.5	37.3	10.4	16.5	40.0	14.6
8.0	37.7	10.6	17.0	41.4	13.4
8.5	38.3	10.5	17.5	44.8	10.3
9.0	38.5	10.8	18.0	47.2	8.1
9.5	38.7	11.1			

14.7 Correction factors for

**Horn Antenna
Model: SWH-28
at 1 meter range.**

FREQUENCY (GHz)	AFE (dB /m)	Gain (dB1)
18.0	40.3	16.1
19.0	40.3	16.3
20.0	40.3	16.1
21.0	40.3	16.3
22.0	40.4	16.8
23.0	40.5	16.4
24.0	40.5	16.6
25.0	40.5	16.7
26.0	40.6	16.4

14.8 Correction factors for

**Horn Antenna
Model: V637**

FREQUENCY (GHz)	AFE (dB /m)	Gain (dB1)
26.0	43.6	14.9
27.0	43.7	15.1
28.0	43.8	15.3
29.0	43.9	15.5
30.0	43.9	15.8
31.0	44.0	16.0
32.0	44.1	16.2
33.0	44.1	16.4
34.0	44.1	16.7
35.0	44.2	16.9
36.0	44.2	17.1
37.0	44.2	17.4
38.0	44.2	17.6
39.0	44.2	17.8
40.0	44.2	18.0

14.9 Correction factors for ACTIVE LOOP ANTENNA
Model 6502
S/N 9506-2950

FREQUENCY (MHz)	Magnetic Antenna Factor (dB)	Electric Antenna Factor (dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2

15. Comparison Industry Canada Requirements With FCC

AeroScout T2 Tag

M/N : TAG-2000

IC: 5115A-TAG2000 FCC ID: Q3HTAG2000

Test	FCC	IC
<input type="checkbox"/> Max power / Peak power	15.247(b)(3)	RSS 210 Issue 7 A8.4(4)
<input type="checkbox"/> 6dB BW	15.247(a)2	RSS 210 Issue 7 A8.2a
<input type="checkbox"/> Power density	15.247(e)	RSS 210 Issue 7 A8.2b
<input type="checkbox"/> Spurious radiated emission in the restricted band	15.205(c)	RSS 210 Issue 7 2.7(Table2)
<input type="checkbox"/> Band edge spectrum	15.247(d)	RSS 210 Issue 7 A8.5
<input type="checkbox"/> RF Exposure Limits	1.1307(b)(1)	RSS 102 4.4