

Test of: RADWIN Ltd AP0158770 RF Module

To: FCC 47 CFR Part 15.407

Test Report Serial No.: RDWN34-U6 Rev A



# TEST REPORT

FROM



Test of: RADWIN Ltd AP0158770 RF Module

to

To FCC 47 CFR Part 15.407

Test Report Serial No.: RDWN34-U6 Rev A

This report supersedes None

Applicant: RADWIN Ltd  
27 Habarzel Street  
Tel Aviv, 6971039  
Israel

Product Function: 5 GHz Wireless Module

Copy No: pdf Issue Date: 31st January 2015

## **This Test Report is Issued Under the Authority of;**

### **MiCOM Labs, Inc.**

575 Boulder Court  
Pleasanton, California 94566  
USA

Phone: +1 (925) 462-0304

Fax: +1 (925) 462-0306

[www.micomlabs.com](http://www.micomlabs.com)



TESTING CERT #2381.01

**MiCOM Labs is an ISO 17025 Accredited Testing Laboratory**



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 3 of 203

---

This page has been left intentionally blank

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## TABLE OF CONTENTS

<b>ACCREDITATION, LISTINGS &amp; RECOGNITION</b> .....	<b>5</b>
<b>TESTING ACCREDITATION</b> .....	<b>5</b>
<b>RECOGNITION</b> .....	<b>6</b>
<b>PRODUCT CERTIFICATION</b> .....	<b>7</b>
<b>1. TEST RESULT CERTIFICATE</b> .....	<b>9</b>
<b>2. REFERENCES AND MEASUREMENT UNCERTAINTY</b> .....	<b>10</b>
2.1. Normative References .....	10
2.2. Test and Uncertainty Procedures .....	11
<b>3. PRODUCT DETAILS AND TEST CONFIGURATIONS</b> .....	<b>12</b>
3.1. Technical Details .....	12
3.2. Scope of Test Program .....	13
3.3. Equipment Model(s) and Serial Number(s) .....	16
3.4. Antenna Details .....	17
3.5. Cabling and I/O Ports .....	18
3.6. Test Configurations .....	18
3.7. Equipment Modifications .....	19
3.8. Deviations from the Test Standard .....	19
3.9. Subcontracted Testing or Third Party Data .....	19
<b>4. TESTING EQUIPMENT CONFIGURATION(S)</b> .....	<b>20</b>
4.1. Conducted RF Emission Test Set-up .....	20
4.2. Radiated Spurious Emission Test Set-up > 1 GHz .....	23
4.3. Digital Emissions Test Set-up (0.03 – 1 GHz) .....	24
4.4. ac Wireline Emission Test Set-up .....	26
<b>5. TEST SUMMARY</b> .....	<b>27</b>
<b>6. TEST RESULTS</b> .....	<b>29</b>
6.1. Device Characteristics .....	29
6.1.1. <i>Conducted Testing</i> .....	29
6.1.2. <i>Radiated Emission Testing</i> .....	78
6.1.3. <i>Digital Emissions (30M-1 GHz)</i> .....	113
6.1.4. <i>AC Wireline Conducted Emissions (150 kHz – 30 MHz)</i> .....	116
<b>7. PHOTOGRAPHS</b> .....	<b>120</b>
7.1. Conducted Test Setup .....	120
7.2. Test Setup - Digital Emissions above 1 GHz .....	121
<b>7.3. Radiated Emissions Test Setup &lt;1 GHz</b> .....	<b>129</b>
7.4. ac Wireline Test Setup .....	130
<b>APPENDIX</b> .....	<b>132</b>
<b>A. SUPPORTING INFORMATION</b> .....	<b>132</b>
A.1. CONDUCTED TEST PLOTS .....	132
A.1.1. <i>26 dB &amp; 99% Bandwidth</i> .....	133
A.1.2. <i>Peak Power Spectral Density</i> .....	161

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## ACCREDITATION, LISTINGS & RECOGNITION

### TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## **RECOGNITION**

MiCOM Labs, Inc has widely recognized Electrical testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA\*\* countries. Our test reports are widely accepted for global type approvals.

<b>Country</b>	<b>Recognition Body</b>	<b>Status</b>	<b>Phase</b>	<b>Identification No.</b>
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

\*\*APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

N/A – Not Applicable

\*\*EU MRA – European Union Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the EU member countries.

\*\*NB – Notified Body

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## **PRODUCT CERTIFICATION**

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard EN ISO/IEC 17065. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



**USA Telecommunication Certification Body (TCB)** - TCB Identifier – US0159

**Industry Canada Certification Body** - CAB Identifier – US0159

**European Notified Body** - Notified Body Identifier - 2280

**Japan – Recognized Certification Body (RCB)** - RCB Identifier – 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 8 of 203

---

## DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
Rev A	31 <sup>st</sup> January 2015	Initial release

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 9 of 203

## 1. TEST RESULT CERTIFICATE

Applicant:	RADWIN Ltd 27 Habarzel Street Tel Aviv, 6971039 Israel	Tested By:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California, 94566, USA
EUT:	5 GHz Wireless Module.	Tel:	+1 925 462 0304
Model:	AP0158770	Fax:	+1 925 462 0306
S/N:	Prototype		
Test Date(s):	2nd - 12th December 2014	Website:	www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC 47 CFR Part 15.407 & IC RSS-210	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

### Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:



TESTING CERT #2381.01

Graeme Grieve  
Quality Manager MiCOM Labs,

Gordon Hurst  
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## **2. REFERENCES AND MEASUREMENT UNCERTAINTY**

### **2.1. Normative References**

<b>Ref.</b>	<b>Publication</b>	<b>Year</b>	<b>Title</b>
<b>(i)</b>	FCC 47 CFR Part 15.407	18 <sup>th</sup> December 2014	Code of Federal Regulations
<b>(ii)</b>	FCC 06-96	June 2006	Memorandum Opinion and Order
<b>(iii)</b>	FCC OET KDB 662911	4 <sup>th</sup> April 2011	Emissions Testing of Transmitters with Multiple Outputs in the Same Band
<b>(iv)</b>	ANSI C63.4	2009	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>(v)</b>	CISPR 22/ EN 55022	2008 2006+A1:2007	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
<b>(vi)</b>	M 3003	Edition 1 Dec. 1997	Expression of Uncertainty and Confidence in Measurements
<b>(vii)</b>	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
<b>(viii)</b>	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
<b>(ix)</b>	A2LA	July 2012	Reference to A2LA Accreditation Status – A2LA Advertising Policy
<b>(x)</b>	FCC Public Notice – DA 02-2138	2002	Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 11 of 203

---

## **2.2. Test and Uncertainty Procedures**

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 12 of 203

### 3. PRODUCT DETAILS AND TEST CONFIGURATIONS

#### 3.1. Technical Details

Details	Description
Purpose:	Test of RADWIN Ltd AP0158770 to FCC Part 15.407 regulations
Applicant:	RADWIN Ltd 27 Habarzel Street Tel Aviv, 6971039, Israel
Manufacturer:	As applicant
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton, California 94566 USA
Test report reference number:	RDWN34-U6 Rev A
Date EUT received:	1 <sup>st</sup> December 2014
Standard(s) applied:	FCC 47 CFR Part 15.407
Dates of test (from - to):	2nd - 12th December 2014
No of Units Tested:	One
Type of Equipment:	5 GHz Wireless Module 2x2 Spatial Multiplexing MIMO configuration
Applicants Trade Name:	RADWIN
Model(s):	AP0158770
Location for use:	Outdoor
Declared Frequency Range(s):	5,150 – 5,250 MHz
Hardware Rev	Prototype
Software Rev	Radwin Art GUI
Type of Modulation:	Per 802.11n/ac BPSK, QPSK, 16QAM, 64QAM, 256 QAM, OFDM
Declared Nominal Output Power: (Average Power)	5 MHz: +25.0 dBm 10 MHz: +27.0 dBm 20 MHz: +27.0 dBm 40 MHz: +27.0 dBm 80 MHz: +30.0 dBm
EUT Modes of Operation:	5, 10, 20, 40, 80 MHz
Transmit/Receive Operation:	Time Division Duplex
System Beam Forming:	AP0158770 has no capability for beam-forming
Rated Input Voltage and Current:	POE 55 Vdc 1 A
Operating Temperature Range:	Declared range -35° to +60°C
ITU Emission Designator:	5 MHz 5M00W7W 10 MHz 10M0W7W 20 MHz 20M0W7W 40 MHz 40M0W7W 80 MHz 80M0W7W
Equipment Dimensions:	1.9" X 2.0" x 0.3"
Weight:	0.042 lb. (19g)
Primary function of equipment:	RF module for transmitting and receiving data

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 13 of 203

---

### 3.2. Scope of Test Program

#### **AP0158770 5 GHz Wireless Module**

The scope of the test program was to test the AP0158770 5 GHz 2x2 MIMO RF module configurations in the frequency range 5150 - 5250 MHz for compliance against FCC 47 CFR Part 15.407.

#### **FCC OET KDB Implementation**

This test program implements the following FCC KDB – 662911 4/4/2011;

#### ***Emissions Testing of Transmitters with Multiple Outputs in the Same Band***

The KDB document provides guidance for measurements of conducted output emissions of devices that employ a single transmitter with multiple outputs in the same band, with the outputs occupying the same or overlapping frequency ranges. It applies to EMC compliance measurements on devices that transmit on multiple antennas simultaneously in the same or overlapping frequency ranges through a coordinated process. Examples include, but are not limited to, devices employing beam forming or multiple-input and multiple-output (MIMO.) This guidance applies to both licensed and unlicensed devices wherever the FCC rules call for conducted output measurements. Guidance is provided for in-band, out-of-band and spurious emission measurements.

This guidance does not apply to the multiple transmitters included in a composite device, such as a device that combines an 802.11 modem with a cell phone in one enclosure with each driving its own antenna.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

RADWIN Ltd  
AP0158770 Wireless Module



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

RADWIN Ltd  
AP0158770 Wireless Module (Rear)





**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 16 of 203

---

### 3.3. Equipment Model(s) and Serial Number(s)

Equipment Type	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	5 GHz Wireless Module	RADWIN Ltd	AP0158770	Prototype
Support	Laptop PC	DELL	LATITUDE D530	None

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





### 3.4. Antenna Details

Radiated emissions testing were performed in the mode with the highest spectral density to verify compliance. Radiated emissions were performed on the highest gain of each type of antenna as identified in the table below;-

Radiated Emission Results (Antenna #)	Antenna Type	Manufacturer	Model Number	Antenna Gain(dBi)
				5150-5250 MHz
1	Sector Dual Pole Integrated 120 Deg	RADWIN Ltd.	MT0128930	11
Not Tested	Sector Dual Pole 120 Deg	RADWIN Ltd.	RW-9061-5004	11
2	Shark Fin Monopole	RADWIN Ltd	RW-9401-5002	12.5
3	Sector Dual Pole Integrated 95 Deg	RADWIN Ltd.	AM0135060	12
Not Tested	Sector Dual Pole 90 Deg	RADWIN Ltd.	RW-9061-5001	14
4	Sector Dual Pole 60 Deg	RADWIN Ltd.	RW-9061-5002	15.5
Not Tested	Sector Dual Pole Integrated 90 Deg	RADWIN Ltd.	MT0125250	13
Not Tested	Flat Panel Dual Pole Integrated	RADWIN Ltd.	AM0119960	16
5	Flat Panel Dual Pole Integrated	RADWIN Ltd.	AM0111760	16
Not Tested	Flat Panel Dual Pole External	RADWIN Ltd.	RW-9612-5001	23
6	Flat Panel Dual Pole Integrated	RADWIN Ltd.	MT0070760	23.5
7	Flat Panel Dual Pole External	RADWIN Ltd.	RW-9622-5001	29
Not Tested	Dual Pole Dish	RADWIN Ltd.	RW-9721-5158	28
8	Dual Pole Dish	RADWIN Ltd.	RW-9732-4958	32

The "Not Tested" antennas were covered by testing higher gain antennas of the same family



### 3.5. Cabling and I/O Ports

Number and type of I/O ports

1. 1 x 10/100/1000 Ethernet (includes POE +55 Vdc)

### 3.6. Test Configurations

Testing was performed to determine the highest power level versus bit rate. The variant with the highest power was used to exercise the product.

Matrix of test configurations

Channel Bandwidth	Data Rates with Highest Power	Frequencies (MHz)
5 MHz	15 MCS	5157.5 / 5200 / 5245
10 MHz	15 MCS	5162 / 5200 / 5245
20 MHz	15 MCS	5165 / 5200 / 5240
40 MHz	15 MCS	5172 / 5200 / 5230
80 MHz	15 MCS	5190 / 5210

#### Antenna Test Configurations for Radiated Emissions and Band-Edge

The following measurements were performed on all antenna configurations identified in Section 3.4 Antenna Details. Results for the following configurations are provided in this report.

5,150 – 5,250 MHz			
Operating Bandwidth V's Channel Frequencies (MHz)			
5 MHz	Con/SE/BE: 5157.5	40 MHz	Con/BE: 5172
	Con/SE: 5200		Con: 5200
	Con/SE: 5245		Con: 5230
10 MHz	Con/BE: 5162	80 MHz	Con/BE: 5190
	Con: 5200		Con: 5210
	Con: 5245	KEY:	Con - Conducted
Con/BE: 5165	<u>Radiated</u>		
Con: 5200	SE – Spurious Emissions		
20 MHz	Con: 5240		BE – Band-Edge

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 19 of 203

---

### **3.7. Equipment Modifications**

The following modifications were required to bring the equipment into compliance:

1. Band-Edge Power Reduction

The power settings required for each antenna to comply with the requirements are detailed in Section 6.1.1.2 "Maximum Conducted Output Power"

### **3.8. Deviations from the Test Standard**

The following deviations from the test standard were required in order to complete the test program:

1. NONE

### **3.9. Subcontracted Testing or Third Party Data**

1. NONE

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 4. TESTING EQUIPMENT CONFIGURATION(S)


### 4.1. Conducted RF Emission Test Set-up

The following tests were performed using the conducted test set-up shown in the diagram below.

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.1.1. 26 dB and 99% Bandwidth
2. Section 6.1.1.2. Maximum Conducted Output Power
3. Section 6.1.1.3. Peak Power Spectral Density

#### Conducted Test Set-Up Pictorial Representation

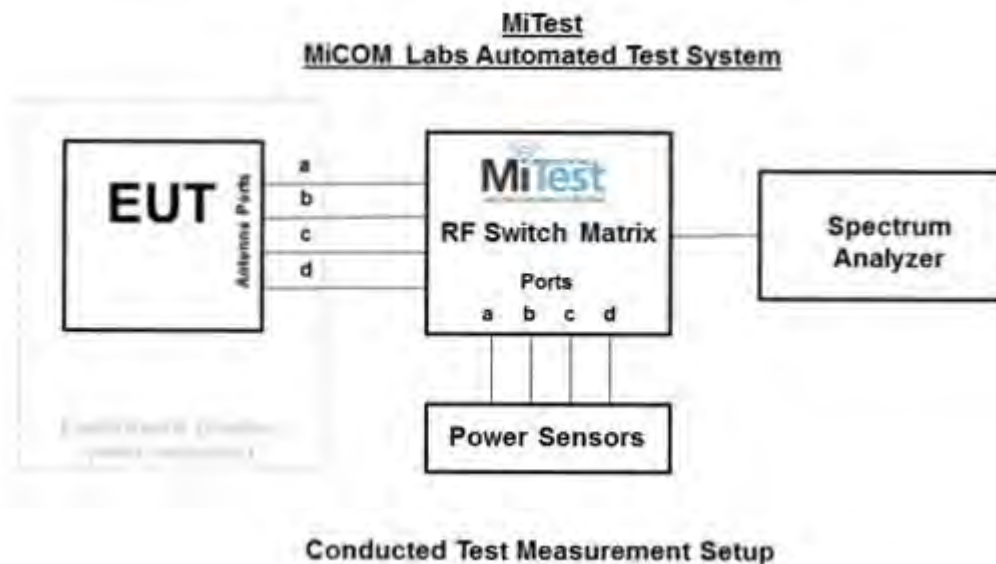

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 21 of 203

### Traceability of Test Equipment Utilized for Conducted Testing

Asset#	Description	Manufacturer	Model #	Serial #	Calibration Due Date
158	Barometer/Thermometer	Control Company	4196	E2846	04 Dec 2015
193	Receiver 20 Hz to 7 GHz	Rhode & Schwarz	ESI 7	838496/007	14 Jan 2015
249	Resistance Thermometer	Thermotronics	GR2105-02	9340 #2	30 Oct 2015
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	31 Jul 2015
361	Desktop for RF#1, Labview Software installed	Dell	Vostro 220	WS RF#1	Not Required
378	Rohde & Schwarz 40 GHz Receiver with Generator	Rhode & Schwarz	ESIB40	100107/040	17 Jul 2015
380	4x4 RF Switch Box	MiCOM Labs	MiTest RF Switch Box	MIC001	20 Jan 2015
390	USB Power Head 50MHz - 24GHz -60 to +20dBm	Agilent	U2002A	MY50000103	17 Oct 2015
398	Test Software	MiCOM	MiTest ATS	Version 1.9	Not Required
405	DC Power Supply 0-60V	Agilent	6654A	MY4001826	Cal when used
408	USB to GPIB interface	National Instruments	GPIB-USB HS	14C0DE9	Not Required
440	USB Wideband Power Sensor	Boonton	55006	9178	25 Sep 2015
441	USB Wideband Power Sensor	Boonton	55006	9179	25 Sep 2015
442	USB Wideband Power Sensor	Boonton	55006	9181	25 Sep 2015
445	PoE Injector	D-Link	DPE-101GL	QTAH1E2000625	Not Required
75	Environmental Chamber	Thermatron	SE-300-2-2	27946	28 Nov 2015
RF#1 GPIB#1	GPIB cable to Power Supply	HP	GPIB	None	Not Required
RF#1 SMA#1	EUT to Mitest box port 1	Flexco	SMA Cable port1	None	20 Jan 2015
RF#1 SMA#2	EUT to Mitest box port 2	Flexco	SMA Cable port2	None	20 Jan 2015
RF#1 SMA#3	EUT to Mitest box port 3	Flexco	SMA Cable port3	None	20 Jan 2015
RF#1 SMA#4	EUT to Mitest box port 4	Flexco	SMA Cable port4	None	20 Jan 2015
RF#1 SMA#SA	Mitest box to SA	Flexco	SMA Cable SA	None	20 Jan 2015
RF#1 USB#1	USB Cable to Mitest Box	Dynex	USB Cable	None	Not Required

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Measurement and Presentation of Test Data

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs “[MiTest](#)” Automated Test System“ (Patent Pending)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

#### 4.2. Radiated Spurious Emission Test Set-up > 1 GHz

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.2.

#### Radiated Emission Measurement Setup – Above 1 GHz

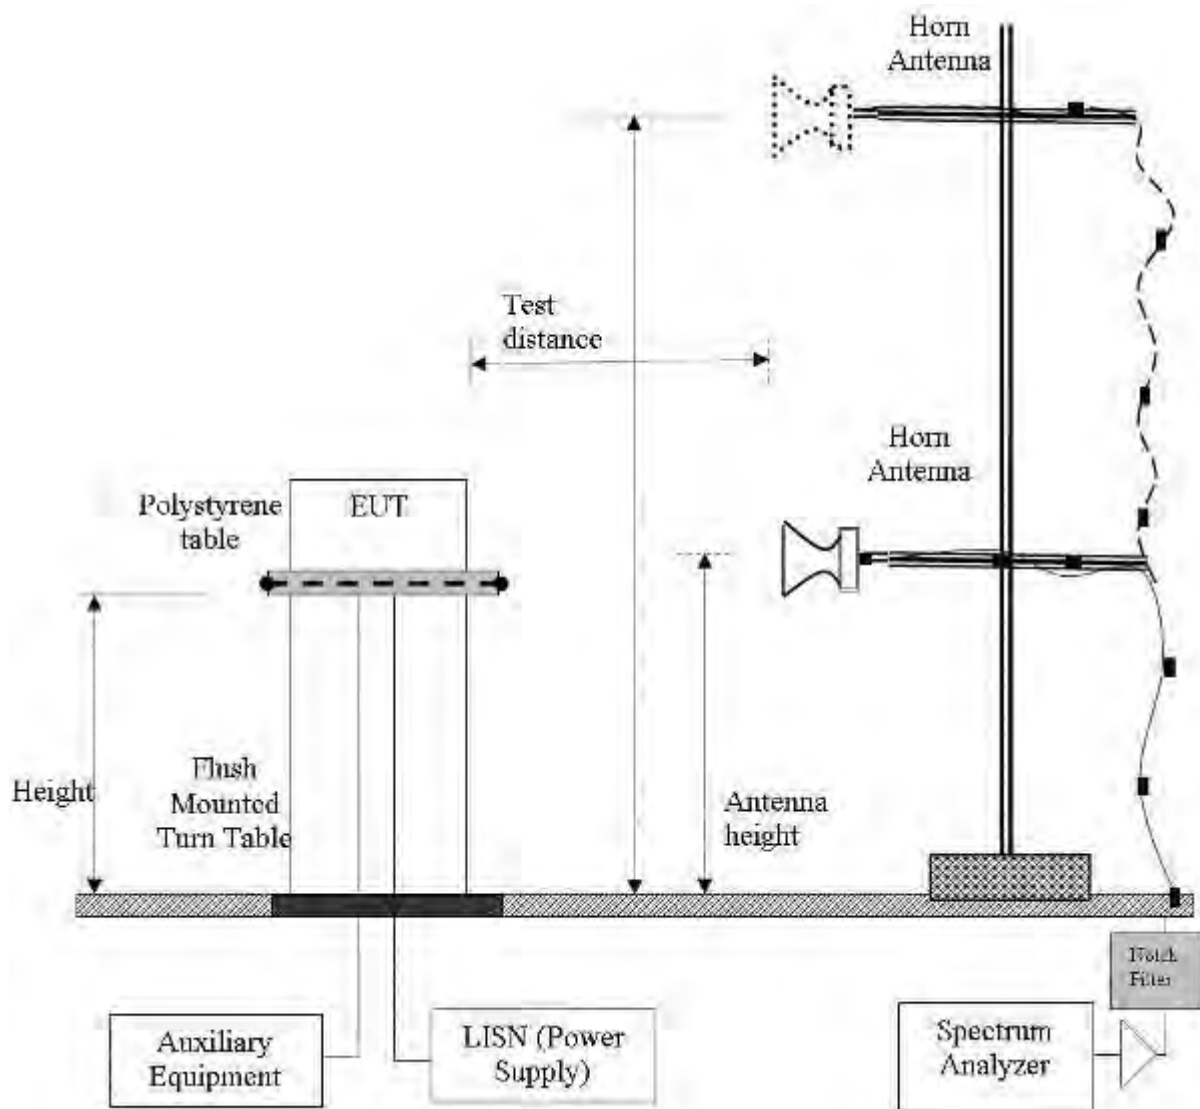


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 4.3. Digital Emissions Test Set-up (0.03 – 1 GHz)

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.2.4. Digital Emissions

#### Digital Emission Measurement Setup – Below 1 GHz

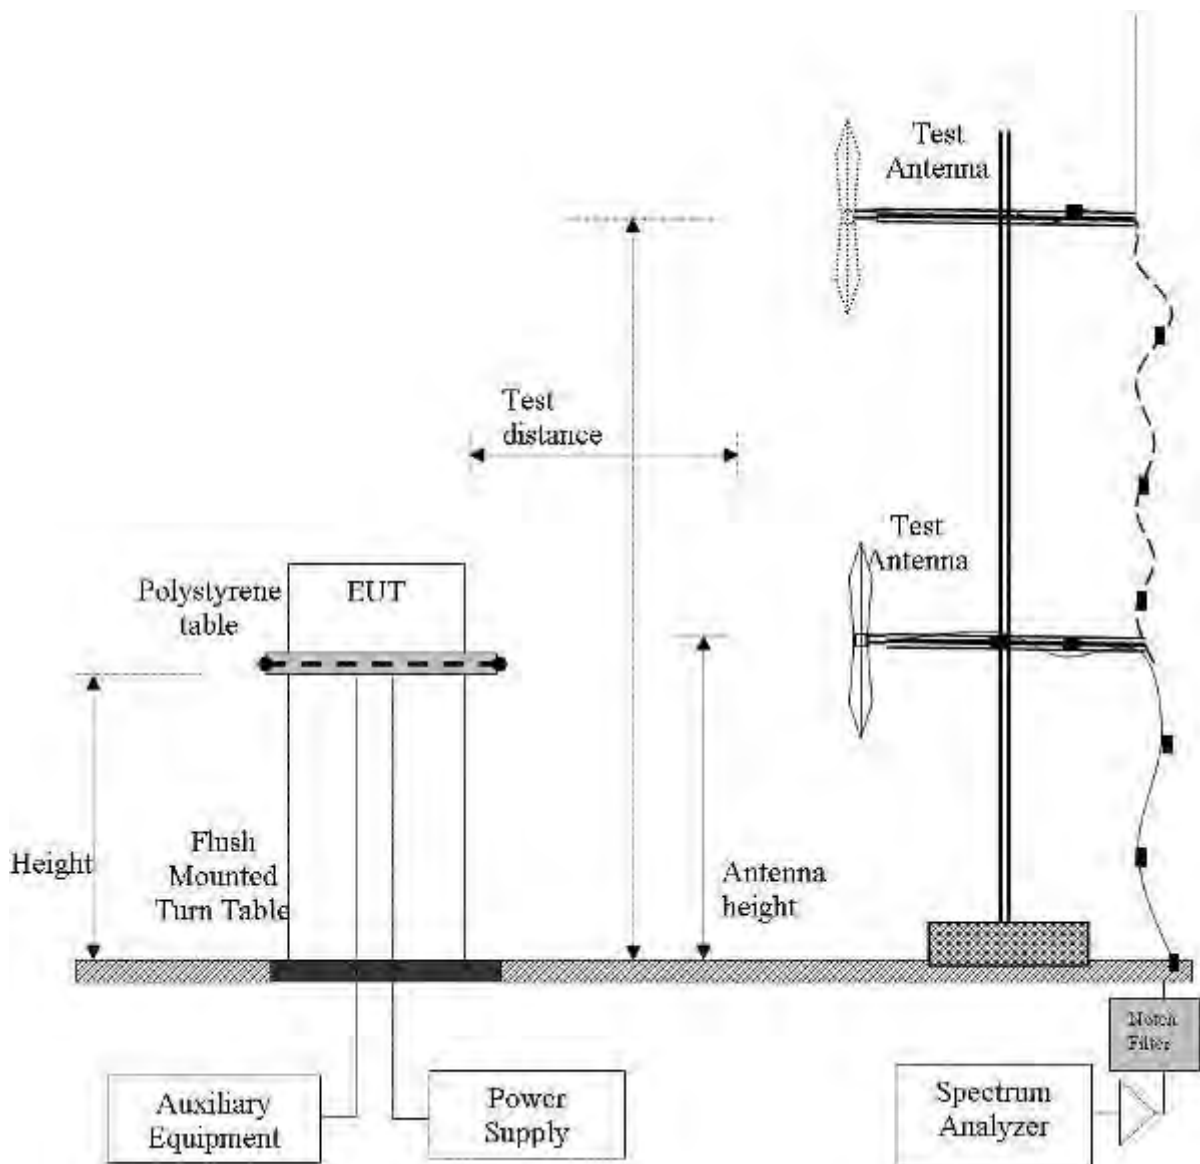

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 25 of 203

### Traceability of Test Equipment Utilized for Radiated Emission Testing

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
158	Barometer/Thermometer	Control Company	4196	E2846	04 Dec 2015
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CY101	04R08507	Not Required
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	31 Jul 2015
301	5470 to 5725 MHz Notch Filter	Microtronics	RBC50704	001	08 Oct 2015
302	5150 to 5350 MHz Notch Filter	Microtronics	BRC50703	002	08 Oct 2015
303	5725 to 5875 MHz Notch filter	Microtronics	BRC50705	003	08 Oct 2015
310	SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001	30 Oct 2015
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	14 Aug 2015
342	2.4 GHz Notch Filter	EWT	EWT-14-0203	H1	08 Oct 2015
343	5.15 GHz Notch Filter	EWT	EWT-14-0200	H1	08 Oct 2015
344	5.35 GHz Notch Filter	EWT	EWT-14-0201	H1	08 Oct 2015
345	5.46 GHz Notch Filter	EWT	EWT-14-0202	H1	08 Oct 2015
377	Band Rejection Filter 5150 to 5880MHz	Microtronics	BRM50716	034	08 Oct 2015
396	2.4 GHz Notch Filter	Microtronics	BRM50701	001	07 Oct 2015
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	23 Oct 2015
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	10 Oct 2015
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	30 May 2015
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
414	DC Power Supply 0-60V	HP	6274	1029A01285	Cal when used
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
502	Test Software for Radiated Emissions	EMISoft	Vasona	Version 5 Build 59	Not Required
87	Uninterruptible Power Supply	Falcon Electric	ED2000-1/2LC	F3471 02/01	Cal when used


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

#### 4.4. ac Wireline Emission Test Set-up

The following tests were performed using the conducted test set-up shown in the diagram below.

##### 1. Section 6.1.3 ac Wireline Conducted Emissions

#### Conducted Test Set-Up Pictorial Representation

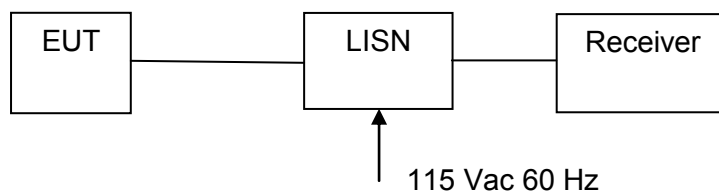

Measurement set up for ac Wireline Conducted Emissions Test

#### Traceability of Test Equipment Utilized for ac Wireline Emission Testing

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
158	Barometer/Thermometer	Control Company	4196	E2846	04 Dec 2015
184	Pulse Limiter	Rhode & Schwarz	ESH3Z2	357.8810.52	Cal when used
190	LISN (two-line V-network)	Rhode & Schwarz	ESH3Z5	836679/006	12 Sep 2015
193	Receiver 20 Hz to 7 GHz	Rhode & Schwarz	ESI 7	838496/007	14 Jan 2015
307	BNC-CABLE	Megaphase	1689 1GVT4	15F50B002	Cal when used
316	Dell desktop computer workstation with Vasona	Dell	Desktop	WS04	Not Required

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## 5. TEST SUMMARY

### List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
<b>15.407(a)</b>	26dB and 99% Emission BW	Emission bandwidth measurement	Conducted	Complies	6.1.1.1 A.1.1
<b>15.407(a)</b>	Maximum Conducted Output Power	Power Measurement	Conducted	Complies	6.1.1.2
<b>15.407(a)</b>	Peak Power Spectral Density	PPSD	Conducted	Complies	6.1.1.3 A.1.2
<b>15.407(g)</b> <b>15.31</b>	Frequency Stability	Limits: contained within band of operation at all times.	Applicant declaration	Complies	6.1.1.5
<b>15.407(f)</b>	Radio Frequency Radiation Exposure	Exposure to radio frequency energy levels, Maximum Permissible Exposure (MPE)	Conducted	See separate MPE attachment	N/A

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**List of Measurements (continued)**

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
<b>15.407(b)(2)</b> <b>15.205(a)</b> <b>15.209(a)</b>	Radiated Emissions		Radiated		6.1.2
	Transmitter Radiated Spurious Emissions	Emissions above 1 GHz		Complies	6.1.2
	Radiated Band Edge	Band edge results		Complies	6.1.2
<b>15.407(b)(6)</b> <b>15.205(a)</b> <b>15.209(a)</b>	Digital Radiated Emissions	Emissions <1 GHz (30M-1 GHz)		Complies	6.1.4
<b>15.407(b)(6)</b> <b>15.207</b>	AC Wireline Conducted Emissions 150 kHz–30 MHz	Conducted Emissions	Conducted	Complies EUT is POE powered - not shipped with equipment	6.1.5

Note 1: Test results reported in this document relate only to the items tested

Note 2: The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

Note 3: Section 3.7 Equipment Modifications highlights the equipment modifications that were required to bring the product into compliance with the above test matrix



## 6. TEST RESULTS

### 6.1. Device Characteristics

#### 6.1.1. Conducted Testing

##### 6.1.1.1. 26 dB and 99 % Bandwidth

<b>Conducted Test Conditions for 26 dB and 99% Bandwidth</b>			
<b>Standard:</b>	FCC CFR 47:15.407	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	26 dB and 99 % Bandwidth	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.407 (a)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	KDB 789033 - D01 DTS General UNII Test Procedures v01		

**Test Procedure for 26 dB and 99% Bandwidth Measurement**

The bandwidth at 26 dB and 99 % is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency. KDB 789033 Section 5.1 Emission Bandwidth was used in order to prove compliance. The Resolution Bandwidth was set to approximately 1% of the emission bandwidth.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### Measurement Results for 26 dB and 99 % Operational Bandwidth(s)

Equipment Configuration for 26 dB & 99% Occupied Bandwidth			
<b>Variant:</b>	5 MHz	<b>Duty Cycle (%):</b>	97.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

Test Measurement Results								
Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5157.5	<a href="#">7.640</a>	<a href="#">6.738</a>	--	--	7.640	6.738		
5200.0	<a href="#">6.789</a>	<a href="#">7.189</a>	--	--	7.189	6.789		
5245.0	<a href="#">7.064</a>	<a href="#">6.864</a>	--	--	7.064	6.864		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5157.5	<a href="#">4.935</a>	<a href="#">4.935</a>	--	--	4.935	4.935		
5200.0	<a href="#">4.910</a>	<a href="#">4.960</a>	--	--	4.960	4.910		
5245.0	<a href="#">4.860</a>	<a href="#">4.960</a>	--	--	4.960	4.860		

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 31 of 203

**Equipment Configuration for 26 dB & 99% Occupied Bandwidth**

<b>Variant:</b>	10 MHz	<b>Duty Cycle (%):</b>	96.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5162.0	<a href="#">12.525</a>	<a href="#">12.525</a>	--	--	12.525	12.525		
5200.0	<a href="#">13.126</a>	<a href="#">12.876</a>	--	--	13.126	12.876		
5245.0	<a href="#">13.427</a>	<a href="#">12.926</a>	--	--	13.427	12.926		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5162.0	<a href="#">9.218</a>	<a href="#">9.269</a>	--	--	9.269	9.218		
5200.0	<a href="#">9.269</a>	<a href="#">9.319</a>	--	--	9.319	9.269		
5245.0	<a href="#">9.269</a>	<a href="#">9.369</a>	--	--	9.369	9.269		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 32 of 203

**Equipment Configuration for 26 dB & 99% Occupied Bandwidth**

<b>Variant:</b>	20 MHz	<b>Duty Cycle (%):</b>	96.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5165.0	<a href="#">22.345</a>	<a href="#">22.645</a>	--	--	22.645	22.345		
5200.0	<a href="#">22.445</a>	<a href="#">23.447</a>	--	--	23.447	22.445		
5240.0	<a href="#">24.148</a>	<a href="#">23.246</a>	--	--	24.148	23.246		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5165.0	<a href="#">17.836</a>	<a href="#">17.936</a>	--	--	17.936	17.836		
5200.0	<a href="#">17.836</a>	<a href="#">17.936</a>	--	--	17.936	17.836		
5240.0	<a href="#">17.936</a>	<a href="#">17.936</a>	--	--	17.936	17.936		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 33 of 203

**Equipment Configuration for 26 dB & 99% Occupied Bandwidth**

<b>Variant:</b>	40 MHz	<b>Duty Cycle (%):</b>	94.0
<b>Data Rate:</b>	Rate 9	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5172.0	<a href="#">41.884</a>	<a href="#">42.285</a>	--	--	42.285	41.884		
5200.0	<a href="#">56.112</a>	<a href="#">42.285</a>	--	--	56.112	42.285		
5230.0	<a href="#">42.886</a>	<a href="#">41.884</a>	--	--	42.886	41.884		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5172.0	<a href="#">36.473</a>	<a href="#">36.473</a>	--	--	36.473	36.473		
5200.0	<a href="#">36.473</a>	<a href="#">36.473</a>	--	--	36.473	36.473		
5230.0	<a href="#">36.473</a>	<a href="#">36.273</a>	--	--	36.473	36.273		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 34 of 203

**Equipment Configuration for 26 dB & 99% Occupied Bandwidth**

<b>Variant:</b>	80 MHz	<b>Duty Cycle (%):</b>	76.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5190.0	<a href="#">109.419</a>	<a href="#">83.768</a>	--	--	109.419	83.768		
5210.0	<a href="#">89.379</a>	<a href="#">84.168</a>	--	--	89.379	84.168		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5190.0	<a href="#">76.152</a>	<a href="#">76.152</a>	--	--	76.152	76.152		
5210.0	<a href="#">76.553</a>	<a href="#">76.152</a>	--	--	76.553	76.152		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 6.1.1.2. Maximum Conducted Output Power

Conducted Test Conditions for Maximum Conducted Output Power			
<b>Standard:</b>	FCC CFR 47:15.407	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Maximum Conducted Output Power	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.407 (a)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	KDB 789033 - D01 DTS General UNII Test Procedures v01		

**Test Procedure for Maximum Conducted Output Power Measurement**

Method PM (Measurement using an RF average power meter). Section C) 4) of KDB 789033 defines a methodology using an average wideband power meter. Measurements were made while the EUT was operating in a continuous transmission mode (100% duty cycle) at the appropriate centre frequency. All cable losses and offsets were taken into consideration in the measured result. All operational modes and frequency bands were measured independently and the resultant  $\square$  calculated. For multiple outputs, the measurements were made simultaneously on each output port and summed in a linear fashion. This technique was used in order to prove compliance.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## Antenna Power Levels

(a) *Power limits:*

(1) For the band 5.15-5.25 GHz

Outdoor Access Point

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

Fixed Point-to-Point

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.



**Operating Frequency Band 5150 - 5250 MHz**

**Limit: +30 dBm**

Antenna		Gain	Maximum Power Calculation	
Model Number	Type	(dBi)	dBm/EIRP	Conducted Power
MT0125250	Outdoor	13.0	36.0	23.0
RW-9061-5002	Outdoor	14.5*	36.0	21.5
RW-9061-5001	Outdoor	13.0*	36.0	23.0
RW-9061-5004	Outdoor	10.0*	36.0	26.0
MT0128930	Outdoor	11.0	36.0	25.0
AM0135060	Outdoor	12.0	36.0	24.0
RW-9401-5002	Outdoor	11.5*	36.0	24.5
RW-9732-4958	Point - Point	31.0*	53.0	22.0
RW-9721-5158	Point - Point	27.0*	53.0	26.0
RW-9622-5001	Point - Point	28.0*	53.0	25.0
RW-9612-5001	Point - Point	22.0*	52.0	30.0
MT0070760	Point - Point	23.5	53.0	29.5
MT0119960	Point - Point	16.0	46.0	30.0
AM0111760	Point - Point	16.0	46.0	30.0

\* The gain includes 1 dB feeder cable loss for external antennas

The AP0158770 has no beam-forming capability. The EUT operates in five different bandwidth modes; - 5 MHz; 10 MHz; 20 MHz; 40 MHz, 80 MHz. The +30 dBm limits are calculated for each mode along with the conducted power measurements for each antenna presented in this section of the test report.



### Consolidated Power Results

The EUT was tested for radiated spurious emissions and radiated band-edge emissions and the following tables define the worst case compliant results defined for each parameter

#### Antenna Type - Outdoor

Antenna	Gain	Operational Mode	Channel	Radiated Power Setting		
Model Number	dBi	MHz	MHz	Spurious Emissions	Band-Edge	Final Setting
MT0128930	11	5	5157.5	7.5	4.0	4.0
			5200	22.0		22.0
			5245	23.0		23.0
		10	5162		4.0	4.0
			5200			
			5245			
		20	5165		2.5	2.5
			5200			
			5240			
		40	5172		3.0	3.0
			5200			
			5230			
		80	5190		1.5	1.5
			5210			

Antenna	Gain	Operational Mode	Channel	Radiated Power Setting		
Model Number	dBi	MHz	MHz	Spurious Emissions	Band-Edge	Final Setting
RW-9401-5002	11.5	5	5157.5	4.5	4.5	4.5
			5200	22.0		22.0
			5245	22.0		22.0
		10	5162		5.5	5.5
			5200			
			5245			
		20	5165		5.0	5.0
			5200			
			5240			
		40	5172		7.0	7.0
			5200			
			5230			
		80	5190		5.5	5.5
			5210			

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Antenna	Gain	Operational Mode	Channel	Radiated Power Setting		
Model Number	dBi	MHz	MHz	Spurious Emissions	Band-Edge	Final Setting
AM0135060	12	5	5157.5	4.5	4.5	4.5
			5200	18.0		18.0
			5245	22.0		22.0
		10	5162		6.0	6.0
			5200			
			5245			
		20	5165		4.0	4.0
			5200			
			5240			
		40	5172		2.5	2.5
			5200			
			5230			
80	5190		3.0	3.0		
	5210					

Antenna	Gain	Operational Mode	Channel	Radiated Power Setting		
Model Number	dBi	MHz	MHz	Spurious Emissions	Band-Edge	Final Setting
RW-9061-5002	14.5	5	5157.5	2.0	2.0	2.0
			5200	15.0		15.0
			5245	15.0		15.0
		10	5162		3.5	3.5
			5200			
			5245			
		20	5165		1.5	1.5
			5200			
			5240			
		40	5172		0.5	0.5
			5200			
			5230			
80	5190		-1.5	-1.5		
	5210					

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Antenna Type – Point - Point**

Antenna	Gain	Operational Mode	Channel	Radiated Power Setting		
Model Number	dBi	MHz	MHz	Spurious Emissions	Band-Edge	Final Setting
AM0111760	16	5	5157.5	1.5	1.5	1.5
			5200	22.0		22.0
			5245	22.0		22.0
		10	5162		1.5	1.5
			5200			
			5245			
		20	5165		0.5	0.5
			5200		17.5	17.5
			5240			
		40	5172		-0.5	-0.5
			5200		10.5	10.5
			5230		18.0	18.0
		80	5190		-3.0	-3.0
			5210		8.0	8.0

Antenna	Gain	Operational Mode	Channel	Radiated Power Setting		
Model Number	dBi	MHz	MHz	Spurious Emissions	Band-Edge	Final Setting
MT0070760	23.5	5	5157.5	-4.5	-4.5	-4.5
			5200	22.0		22.0
			5245	23.0		23.0
		10	5162		-4.5	-4.5
			5200			
			5245			
		20	5165		-8.5	-8.5
			5200		9.5	9.5
			5240			
		40	5172		-8.5	-8.5
			5200		11.0	11.0
			5230		21.5	21.5
		80	5190		-9.0	-9.0
			5210		-0.5	-0.5

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





Antenna	Gain	Operational Mode	Channel	Radiated Power Setting			
Model Number	dBi	MHz	MHz	Spurious Emissions	Band-Edge	Final Setting	
RW-9622-5001	28	5	5157.5	-6.5	-6.5	-6.5	
			5200	21.0		21.0	
			5245	21.0		21.0	
		10	5162		-10.5	-10.5	
			5200				
			5245				
		20	5165		-12.5	-12.5	
			5200		4.5	4.5	
			5240				
		40	5172		-12.5	-12.5	
			5200		4.0	4.0	
			5230		19.5	19.5	
80	5190		-14.5	-14.5			
	5210		-4.5	-4.5			

Antenna	Gain	Operational Mode	Channel	Radiated Power Setting			
Model Number	dBi	MHz	MHz	Spurious Emissions	Band-Edge	Final Setting	
RW-9732-4958	31	5	5157.5	-6.5	Tx Gain 0 DAC 220	Tx Gain 0 DAC 220	
			5200	21.0	13.5	13.5	
			5245	21.0		21.0	
		10	5162		-6.0	-6.0	
			5200				
			5245				
		20	5165		-11.0	-11.0	
			5200		5.0	5.0	
			5240				
		40	5172		-14.0	-14.0	
			5200		4.5	4.5	
			5230		18.0	18.0	
80	5190		-0.5	-0.5			
	5210		-5.5	-5.5			

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### Measurement Results for Maximum Conducted Output Power

The following tables used the lowest gain antenna (11 dBi) to calculate the maximum conducted power from the EUT. The output power was corrected for duty cycle. The output power on the channel closest to the 5150 MHz restricted band was reduced in order to comply with the band-edge limits.

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	5 MHz	<b>Duty Cycle (%):</b>	97.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	11.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5157.5	6.04	2.88	--	--	7.88	N/A	30.00	-22.12	4.50
5200.0	21.42	19.81	--	--	23.83	N/A	30.00	-6.17	13.50
5245.0	22.23	20.85	--	--	24.74	N/A	30.00	-5.26	22.00

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	10 MHz	<b>Duty Cycle (%):</b>	96.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	11.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5162.0	9.16	6.50	--	--	11.22	N/A	30.00	-18.78	6.00
5200.0	24.71	22.97	--	--	27.11	N/A	30.00	-2.89	22.00
5245.0	24.39	22.91	--	--	26.90	N/A	30.00	-3.10	23.00

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

DCCF - Duty Cycle Correction Factor

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 43 of 203

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	20 MHz	<b>Duty Cycle (%):</b>	96.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	11.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5165.0	6.72	4.15	--	--	8.81	N/A	30.00	-21.19	4.00
5200.0	21.49	19.51	--	--	23.80	N/A	30.00	-6.20	19.00
5240.0	24.48	23.06	--	--	27.02	N/A	30.00	-2.98	23.00

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	40 MHz	<b>Duty Cycle (%):</b>	94.0
<b>Data Rate:</b>	Rate 9	<b>Antenna Gain (dBi):</b>	11.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5172.0	11.47	8.86	--	--	13.64	N/A	30.00	-16.36	9.50
5200.0	25.04	23.50	--	--	27.62	N/A	30.00	-2.38	23.00
5230.0	20.16	18.45	--	--	22.67	N/A	30.00	-7.33	19.00

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

DCCF - Duty Cycle Correction Factor

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 44 of 203

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	80 MHz	<b>Duty Cycle (%):</b>	76.0
<b>Data Rate:</b>	Rate 9	<b>Antenna Gain (dBi):</b>	11.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5190.0	26.06	23.98	--	--	29.35	N/A	30.00	-0.65	24.00
5210.0	25.80	24.49	--	--	29.40	N/A	30.00	-0.60	25.00

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

DCCF - Duty Cycle Correction Factor

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



The following Output Power tables define the maximum permissible power (EIRP) that can be transmitted per antenna. The following sections are split into two FCC equipment categories “Outdoor Equipment” +36 dBm EIRP limits and “Point – Point Equipment” +53 dBm EIRP limits. The output power specified in the following tables takes into account the power setting obtained from testing Radiated Spurious Emissions and Radiated Band-Edge

### 11 dBi Antenna MT0128930 – Outdoor Equipment

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	5 MHz	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	11 (MT0128930)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>	The data contained in this matrix were calculated values based on measured data		

#### Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power Σ Port(s) dBm	Minimum 26 dB Bandwidth MHz	Limit dBm	EIRP dBm	Margin dB
	Port(s)								
MHz	a	b	c	d					
5157.5	5.54	2.38	--	--	7.25	N/A	36	18.25	-17.75
5200.0	21.42	19.81	--	--	23.70	N/A	36	34.70	-1.30
5245.0	22.23	20.85	--	--	24.60	N/A	36	35.60	-0.40

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	10 MHz	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	11 (MT0128930)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>	The data contained in this matrix were calculated values based on measured data		

#### Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power Σ Port(s) dBm	Minimum 26 dB Bandwidth MHz	Limit dBm	EIRP dBm	Margin dB
	Port(s)								
MHz	a	b	c	d					
5162.0	7.16	4.5	--	--	9.04	N/A	36	20.04	-15.96
5200.0	22.21	20.47	--	--	24.44	N/A	36	35.44	-0.56
5245.0	22.39	20.91	--	--	24.72	N/A	36	35.72	-0.28

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 46 of 203

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	20 MHz	<b>Duty Cycle (%):</b>	96.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	11 (MT0128930)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>	The data contained in this matrix were calculated values based on measured data		

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	dB
5165.0	5.22	2.65	--	--	7.13	N/A	36	18.13	-17.87
5200.0	21.49	19.51	--	--	23.62	N/A	36	34.62	-1.38
5240.0	22.48	21.06	--	--	24.84	N/A	36	35.84	-0.16

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	40 MHz	<b>Duty Cycle (%):</b>	92.0
<b>Data Rate:</b>	Rate 9	<b>Antenna Gain (dBi):</b>	11 (MT0128930)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>	The data contained in this matrix were calculated values based on measured data		

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	dB	dBm	dBm	dB
5172.0	4.97	2.36	--	--	6.87	N/A	36	17.87	-18.13
5200.0	22.54	21.00	--	--	24.85	N/A	36	35.85	-0.15
5230.0	20.16	18.45	--	--	22.40	N/A	36	33.40	-2.60

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 47 of 203

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	80 MHz	<b>Duty Cycle (%):</b>	76.0
<b>Data Rate:</b>	Rate 9	<b>Antenna Gain (dBi):</b>	11 (MT0128930)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>	The data contained in this matrix were calculated values based on measured data		

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	dB	dBm	dBm	dB
5190.0	4.97	2.36	--	--	6.87	N/A	36	17.87	-18.13
5210.0	20.16	18.45	--	--	22.40	N/A	36	33.40	-2.60

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 48 of 203

### 11.5 dBi Shark Fin Antenna RW-9401-5002 – Outdoor Equipment

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	5 MHz	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	11.5 (Antenna RW-9401-5002)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b> The data contained in this matrix were calculated values based on measured data			

#### Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	dB
5157.5	6.04	2.88	--	--	7.75	N/A	36	19.25	-16.75
5200.0	21.42	19.81	--	--	23.70	N/A	36	35.20	-0.80
5245.0	21.73	20.35	--	--	24.10	N/A	36	35.60	-0.40

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	10 MHz	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	11.5 (Antenna RW-9401-5002)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b> The data contained in this matrix were calculated values based on measured data			

#### Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	dB
5162.0	8.66	6.00	--	--	10.54	N/A	36	22.04	-13.96
5200.0	22.21	20.47	--	--	24.44	N/A	36	35.94	-0.06
5245.0	21.89	20.41	--	--	24.22	N/A	36	35.72	-0.28

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 49 of 203

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	20 MHz	<b>Duty Cycle (%):</b>	96.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	11.5 (Antenna RW-9401-5002)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b> The data contained in this matrix were calculated values based on measured data			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	dB
5165.0	6.72	4.15	--	--	8.63	N/A	36	20.13	-15.87
5200.0	21.49	19.51	--	--	23.62	N/A	36	35.12	-0.88
5240.0	21.98	20.56	--	--	24.34	N/A	36	35.84	-0.16

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	40 MHz	<b>Duty Cycle (%):</b>	92.0
<b>Data Rate:</b>	Rate 9	<b>Antenna Gain (dBi):</b>	11.5 (Antenna RW-9401-5002)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b> The data contained in this matrix were calculated values based on measured data			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	dB	dBm	dBm	dB
5172.0	8.97	6.36	--	--	10.87	N/A	36	22.37	-13.63
5200.0	22.04	20.50	--	--	24.35	N/A	36	35.85	-0.15
5230.0	20.16	18.45	--	--	22.40	N/A	36	33.9	-2.1

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 50 of 203

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	80 MHz	<b>Duty Cycle (%):</b>	76.0
<b>Data Rate:</b>	Rate 9	<b>Antenna Gain (dBi):</b>	11.5 (Antenna RW-9401-5002)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>	The data contained in this matrix were calculated values based on measured data		

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	dB	dBm	dBm	dB
5190.0	7.56	5.48	--	--	9.65	N/A	36	21.15	-14.85
5210.0	21.80	20.49	--	--	24.20	N/A	36	35.70	-0.30

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 51 of 203

## 12 dBi Antenna AM0135060 – Outdoor Equipment

### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	5 MHz	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	12 (Antenna AM0135060)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b> The data contained in this matrix were calculated values based on measured data			

### Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	dB
5157.5	6.04	2.88	--	--	7.75	N/A	36	19.75	-16.25
5200.0	21.42	19.81	--	--	23.70	N/A	36	35.70	-0.30
5245.0	21.23	19.85	--	--	23.60	N/A	36	35.60	-0.40

### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	10 MHz	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	12 (Antenna AM0135060)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b> The data contained in this matrix were calculated values based on measured data			

### Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	dB
5162.0	9.16	6.5	--	--	11.04	N/A	36	23.04	-12.96
5200.0	21.71	19.97	--	--	23.94	N/A	36	35.94	-0.06
5245.0	21.39	19.91	--	--	23.72	N/A	36	35.72	-0.28

### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 52 of 203

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	20 MHz	<b>Duty Cycle (%):</b>	96.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	12 (Antenna AM0135060)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b> The data contained in this matrix were calculated values based on measured data			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	dB
5165.0	6.72	4.15	--	--	8.63	N/A	36	20.63	-15.37
5200.0	21.49	19.51	--	--	23.62	N/A	36	35.62	-0.38
5240.0	21.48	20.06	--	--	23.84	N/A	36	35.84	-0.16

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	40 MHz	<b>Duty Cycle (%):</b>	92.0
<b>Data Rate:</b>	Rate 9	<b>Antenna Gain (dBi):</b>	12 (Antenna AM0135060)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b> The data contained in this matrix were calculated values based on measured data			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	dB	dBm	dBm	dB
5172.0	4.47	1.86	--	--	6.37	N/A	36	18.37	-17.63
5200.0	21.54	20.00	--	--	23.85	N/A	36	35.85	-0.15
5230.0	20.16	18.45	--	--	22.40	N/A	36	34.40	-1.60

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 53 of 203

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	80 MHz	<b>Duty Cycle (%):</b>	76.0
<b>Data Rate:</b>	Rate 9	<b>Antenna Gain (dBi):</b>	12 (Antenna AM0135060)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>	The data contained in this matrix were calculated values based on measured data		

**Test Measurement Results**

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	$\Sigma$ Port(s) dBm	dB	dBm	dBm	dB
5190.0	5.06	2.98	--	--	7.15	N/A	36	19.15	-16.85
5210.0	21.30	19.99	--	--	23.70	N/A	36	35.70	-0.30

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	$\pm 1.33$ dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 14.5 dBi Antenna RW-9061-5002 – Outdoor Equipment

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	5 MHz	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	14.5 (RW-9061-5002)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>	The data contained in this matrix were calculated values based on measured data		

#### Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	dB
5157.5	4.54	1.38	--	--	6.25	N/A	36	20.75	-15.25
5200.0	18.92	17.31	--	--	21.20	N/A	36	35.7	-0.3
5245.0	15.23	13.85	--	--	17.60	N/A	36	33.1	-2.9

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	10 MHz	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	14.5 (RW-9061-5002)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>	The data contained in this matrix were calculated values based on measured data		

#### Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	dB
5162.0	7.66	5.00	--	--	9.54	N/A	36	24.04	-11.96
5200.0	19.21	17.47	--	--	21.44	N/A	36	35.94	-0.06
5245.0	18.89	17.41	--	--	21.22	N/A	36	35.72	-0.28

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 55 of 203

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	20 MHz	<b>Duty Cycle (%):</b>	96.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	14.5 (RW-9061-5002)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b> The data contained in this matrix were calculated values based on measured data			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	dB
5165.0	5.22	2.65	--	--	7.13	N/A	36	21.63	-14.37
5200.0	18.99	17.01	--	--	21.12	N/A	36	35.62	-0.38
5240.0	18.98	17.56	--	--	21.34	N/A	36	35.84	-0.16

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	40 MHz	<b>Duty Cycle (%):</b>	92.0
<b>Data Rate:</b>	Rate 9	<b>Antenna Gain (dBi):</b>	14.5 (RW-9061-5002)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b> The data contained in this matrix were calculated values based on measured data			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	dB	dBm	dBm	dB
5172.0	3.47	0.86	--	--	5.37	N/A	36	19.87	-16.13
5200.0	19.04	17.50	--	--	21.35	N/A	36	35.85	-0.15
5230.0	19.16	17.45	--	--	21.40	N/A	36	35.90	-0.10

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 56 of 203

<b>Equipment Configuration for Peak Transmit Power</b>
--

<b>Variant:</b>	80 MHz	<b>Duty Cycle (%):</b>	76.0
<b>Data Rate:</b>	Rate 9	<b>Antenna Gain (dBi):</b>	14.5 (RW-9061-5002)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b> The data contained in this matrix were calculated values based on measured data			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	dB	dBm	dBm	dB
5190.0	1.56	-0.52	--	--	3.65	N/A	36	18.15	-17.85
5210.0	18.80	17.49	--	--	21.20	N/A	36	35.7	-0.30

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





The following Output Power tables define the maximum permissible power (EIRP) that can be transmitted. The equipment falls under the FCC category of "Point - Point Equipment" +53 dBm EIRP limit.

### 16 dBi Antenna AM0111760 – Point - Point Equipment

<b>Equipment Configuration for Peak Transmit Power</b>
--

<b>Variant:</b>	5 MHz	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	16 (AM0111760)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b> The data contained in this matrix were calculated values based on measured data			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	dB
5157.5	3.04	-0.12	--	--	4.75	N/A	53	20.75	-32.25
5200.0	21.42	19.81	--	--	23.70	N/A	53	39.70	-13.30
5245.0	22.23	20.85	--	--	24.60	N/A	53	40.60	-12.40

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

<b>Equipment Configuration for Peak Transmit Power</b>
--

<b>Variant:</b>	10 MHz	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	16 (AM0111760)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b> The data contained in this matrix were calculated values based on measured data			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	dB
5162.0	4.66	2.00	--	--	6.54	N/A	53	22.54	-30.46
5200.0	24.71	22.97	--	--	26.94	N/A	53	42.94	-10.06
5245.0	24.39	22.91	--	--	26.72	N/A	53	42.72	-10.28

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 58 of 203

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	20 MHz	<b>Duty Cycle (%):</b>	96.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	16 (AM0111760)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>	The data contained in this matrix were calculated values based on measured data		

**Test Measurement Results**

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	dB
5165.0	2.22	-0.35	--	--	4.13	N/A	53	20.13	-32.87
5200.0	19.99	18.01	--	--	22.12	N/A	53	38.12	-14.88
5240.0	24.48	23.06	--	--	26.84	N/A	53	42.84	-10.16

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	40 MHz	<b>Duty Cycle (%):</b>	92.0
<b>Data Rate:</b>	Rate 9	<b>Antenna Gain (dBi):</b>	16 (AM0111760)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>	The data contained in this matrix were calculated values based on measured data		

**Test Measurement Results**

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	dB	dBm	dBm	dB
5172.0	1.47	-1.14	--	--	3.37	N/A	53	19.37	-33.63
5200.0	12.54	11.00	--	--	14.85	N/A	53	30.85	-22.15
5230.0	19.16	17.45	--	--	21.40	N/A	53	37.40	-15.6

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 59 of 203

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	80 MHz	<b>Duty Cycle (%):</b>	76.0
<b>Data Rate:</b>	Rate 9	<b>Antenna Gain (dBi):</b>	16 (AM0111760)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>	The data contained in this matrix were calculated values based on measured data		

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	dB	dBm	dBm	dB
5190.0	-0.94	-3.02	--	--	1.15	N/A	53	17.15	-35.85
5210.0	8.8	7.49	--	--	11.20	N/A	53	27.20	-25.80

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 23.5 dBi Antenna MT0070760 – Point - Point Equipment

<b>Equipment Configuration for Peak Transmit Power</b>
--

<b>Variant:</b>	5 MHz	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	23.5 (MT0070760)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b> The data contained in this matrix were calculated values based on measured data			

#### Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	dB
5157.5	-2.96	-6.12	--	--	-1.25	N/A	53	22.25	-30.75
5200.0	21.42	19.81	--	--	23.70	N/A	53	47.20	-5.80
5245.0	22.23	20.85	--	--	24.60	N/A	53	48.10	-4.90

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

<b>Equipment Configuration for Peak Transmit Power</b>
--

<b>Variant:</b>	10 MHz	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	23.5 (MT0070760)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b> The data contained in this matrix were calculated values based on measured data			

#### Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	dB
5162.0	-1.34	-4.00	--	--	0.54	N/A	53	24.04	-28.96
5200.0	24.71	22.97	--	--	26.94	N/A	53	50.44	-2.56
5245.0	24.39	22.91	--	--	26.72	N/A	53	50.22	-2.78

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 61 of 203

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	20 MHz	<b>Duty Cycle (%):</b>	96.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	23.5 (MT0070760)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>	The data contained in this matrix were calculated values based on measured data		

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	dB
5165.0	-5.78	-8.35	--	--	-3.87	N/A	53	19.63	-33.37
5200.0	11.99	10.01	--	--	14.12	N/A	53	37.62	-15.38
5240.0	24.48	23.06	--	--	26.84	N/A	53	50.34	-2.66

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	40 MHz	<b>Duty Cycle (%):</b>	92.0
<b>Data Rate:</b>	Rate 9	<b>Antenna Gain (dBi):</b>	23.5 (MT0070760)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>	The data contained in this matrix were calculated values based on measured data		

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	dB	dBm	dBm	dB
5172.0	-6.53	-9.14	--	--	-4.63	N/A	53	18.87	-34.13
5200.0	13.04	11.5	--	--	15.35	N/A	53	38.85	-14.15
5230.0	20.16	18.45	--	--	22.40	N/A	53	45.90	-7.10

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 62 of 203

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	80 MHz	<b>Duty Cycle (%):</b>	76.0
<b>Data Rate:</b>	Rate 9	<b>Antenna Gain (dBi):</b>	23.5 (MT0070760)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>	The data contained in this matrix were calculated values based on measured data		

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	dB	dBm	dBm	dB
5190.0	-4.94	-7.02	--	--	-2.85	N/A	53	20.65	-32.35
5210.0	0.3	-1.01	--	--	2.70	N/A	53	26.20	-26.80

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 28 dBi Antenna RW-9622-5001 – Point - Point Equipment

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	5 MHz	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	28 (RW-9622-5001)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b> The data contained in this matrix were calculated values based on measured data			

#### Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	dB
5157.5	-3.96	-7.12	--	--	-2.25	N/A	53	25.75	-27.25
5200.0	22.42	20.81	--	--	24.70	N/A	53	52.70	-0.30
5245.0	22.23	20.85	--	--	24.60	N/A	53	52.60	-0.40

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	10 MHz	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	28 (RW-9622-5001)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b> The data contained in this matrix were calculated values based on measured data			

#### Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	dB
5162.0	-0.34	-3.00	--	--	1.54	N/A	53	29.54	-23.46
5200.0	22.71	20.97	--	--	24.94	N/A	53	52.94	-0.06
5245.0	22.39	20.91	--	--	24.72	N/A	53	52.72	-0.28

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 64 of 203

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	20 MHz	<b>Duty Cycle (%):</b>	96.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	28 (RW-9622-5001)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b> The data contained in this matrix were calculated values based on measured data			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	dB
5165.0	-4.78	-7.35	--	--	-2.87	N/A	53	25.13	-27.87
5200.0	12.99	11.01	--	--	15.12	N/A	53	43.12	-9.88
5240.0	22.48	21.06	--	--	24.84	N/A	53	52.84	-0.16

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	40 MHz	<b>Duty Cycle (%):</b>	92.0
<b>Data Rate:</b>	Rate 9	<b>Antenna Gain (dBi):</b>	28 (RW-9622-5001)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b> The data contained in this matrix were calculated values based on measured data			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	dB	dBm	dBm	dB
5172.0	-5.53	-8.14	--	--	-3.63	N/A	53	24.37	-28.63
5200.0	14.04	12.5	--	--	16.35	N/A	53	44.35	-8.65
5230.0	21.16	19.45	--	--	23.40	N/A	53	51.40	-1.60

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 65 of 203

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	80 MHz	<b>Duty Cycle (%):</b>	76.0
<b>Data Rate:</b>	Rate 9	<b>Antenna Gain (dBi):</b>	28 (RW-9622-5001)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>	The data contained in this matrix were calculated values based on measured data		

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	dB	dBm	dBm	dB
5190.0	-3.94	-6.02	--	--	-1.85	N/A	53	26.15	-26.85
5210.0	1.3	-0.01	--	--	3.70	N/A	53	31.70	-21.30

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 31 dBi Antenna RW-9732-4958 – Point - Point Equipment

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	5 MHz	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	31 (RW-9732-4958)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b> The data contained in this matrix were calculated values based on measured data			

#### Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	dB
5157.5	-7.89	-11.12	--	--	-6.20	N/A	53	24.80	-28.20
5200.0	19.42	17.81	--	--	21.70	N/A	53	52.70	-0.30
5245.0	19.23	17.85	--	--	21.60	N/A	53	52.60	-0.40

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	10 MHz	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	31 (RW-9732-4958)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b> The data contained in this matrix were calculated values based on measured data			

#### Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	dB
5162.0	-1.84	-5.5	--	--	0.04	N/A	53	31.04	-21.96
5200.0	19.71	17.97	--	--	21.94	N/A	53	52.94	-0.06
5245.0	19.39	17.91	--	--	21.72	N/A	53	52.72	-0.28

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 67 of 203

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	20 MHz	<b>Duty Cycle (%):</b>	96.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	31 (RW-9732-4958)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>	The data contained in this matrix were calculated values based on measured data		

**Test Measurement Results**

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	dB
5165.0	-7.28	-9.85	--	--	-5.37	N/A	53	25.63	-27.37
5200.0	8.49	6.51	--	--	10.62	N/A	53	41.62	-11.38
5240.0	19.48	18.06	--	--	21.84	N/A	53	52.84	-0.16

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	40 MHz	<b>Duty Cycle (%):</b>	92.0
<b>Data Rate:</b>	Rate 9	<b>Antenna Gain (dBi):</b>	31 (RW-9732-4958)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>	The data contained in this matrix were calculated values based on measured data		

**Test Measurement Results**

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	dB	dBm	dBm	dB
5172.0	-11.03	-13.64	--	--	-9.13	N/A	53	21.87	-31.13
5200.0	7.54	6.00	--	--	9.85	N/A	53	40.85	-12.15
5230.0	19.66	17.95	--	--	21.90	N/A	53	52.90	-0.10

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 68 of 203

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	80 MHz	<b>Duty Cycle (%):</b>	76.0
<b>Data Rate:</b>	Rate 9	<b>Antenna Gain (dBi):</b>	31 (RW-9732-4958)
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>	The data contained in this matrix were calculated values based on measured data		

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	EIRP	Margin
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	dB	dBm	dBm	dB
5190.0	2.56	0.48	--	--	4.65	N/A	53	35.65	-17.35
5210.0	-3.7	-5.01	--	--	-1.30	N/A	53	29.70	-23.30

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## Specification Limits

### **FCC, Part 15 §15.407 (a)(1), (a)(2)**

**(a)(1)(i)** For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

For the band 5.15-5.25 GHz the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or  $+4 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

**(a)(1)(iii)** For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.



### 6.1.1.3. Peak Power Spectral Density

Conducted Test Conditions for Power Spectral Density			
<b>Standard:</b>	FCC CFR 47:15.407	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Power Spectral Density	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (a)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	KDB 789033 - D01 DTS General UNII Test Procedures v01		
<b>Test Procedure for Power Spectral Density</b>			
The In-Band power spectral density was measured using the measure and sum approach per FCC KDB 662911 (D01 Multiple Transmitter Output v01.)			
<u>Measure and sum the spectra across the outputs.</u> With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The individual spectra are then summed mathematically in linear power units. Unlike in-band power measurements, in which the sum involves a single measured value (output power) from each output, measurements for compliance with PSD limits involve summing entire spectra across corresponding frequency bins on the various outputs. Consistency is maintained for any device with N transmitter outputs to be certain the individual outputs are all aligned with the same span and same number of points. In this instance, the linear power spectrum value within the first spectral bin of output 0 is summed with that in the first spectral bin of output 1, and the first spectral bin of output 2, and so on up to the Nth output to obtain the true value for the first frequency bin of the summed spectrum. The summed spectrum value for each frequency bin is computed in this fashion. These summed spectral values were calculated on a computer, and the results read back into the spectrum analyzer as a data file to produce a representative plot of total spectral power density.			
Calculated Power = $A + 10 \log (1/x)$ dBm			
A = Total Power Spectral Density [10 Log <sub>10</sub> (10a/10 + 10 b/10 + 10c/10 + 10d/10)]			
x = Duty Cycle			

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 71 of 203

Using the lowest gain antenna (11 dBi) the measured Power Spectral Density values were the highest values that the equipment can transmit. As can be observed in the Maximum Conducted Output Power as the antenna gain increases the power is reduced according to the regulations, as a result the Power Spectral Density follows and will comply with the regulations.

Equipment Configuration for Peak Power Spectral Density			
<b>Variant:</b>	5 MHz	<b>Duty Cycle (%):</b>	97.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	11.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.13 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5157.5	<a href="#">-0.202</a>	<a href="#">-3.360</a>	--	--	<a href="#">1.293</a>	17.0	-15.7
5200.0	<a href="#">14.148</a>	<a href="#">13.138</a>	--	--	<a href="#">16.561</a>	17.0	-0.4
5245.0	<a href="#">14.027</a>	<a href="#">12.999</a>	--	--	<a href="#">16.041</a>	17.0	-1.0

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 72 of 203

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	10 MHz	<b>Duty Cycle (%):</b>	96.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	11.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.18 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5162.0	<a href="#">-1.083</a>	<a href="#">-3.479</a>	--	--	<a href="#">3.682</a>	17.0	-13.3
5200.0	<a href="#">14.287</a>	<a href="#">12.477</a>	--	--	<a href="#">16.273</a>	17.0	-0.7
5245.0	<a href="#">12.599</a>	<a href="#">12.429</a>	--	--	<a href="#">14.655</a>	17.0	-2.4

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 73 of 203

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	20 MHz	<b>Duty Cycle (%):</b>	96.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	11.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.18 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5165.0	<a href="#">-6.604</a>	<a href="#">-9.886</a>	--	--	<a href="#">-5.135</a>	17.0	-22.1
5200.0	<a href="#">7.372</a>	<a href="#">5.264</a>	--	--	<a href="#">9.166</a>	17.0	-7.8
5240.0	<a href="#">9.749</a>	<a href="#">8.597</a>	--	--	<a href="#">11.448</a>	17.0	-5.6

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 74 of 203

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	40 MHz	<b>Duty Cycle (%):</b>	94.0
<b>Data Rate:</b>	Rate 9	<b>Antenna Gain (dBi):</b>	11.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.27 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5172.0	<a href="#">-6.910</a>	<a href="#">-10.062</a>	--	--	<a href="#">-4.996</a>	17.0	-22.0
5200.0	<a href="#">5.458</a>	<a href="#">4.507</a>	--	--	<a href="#">7.554</a>	17.0	-9.5
5230.0	<a href="#">0.800</a>	<a href="#">0.109</a>	--	--	<a href="#">2.301</a>	17.0	-14.7

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 75 of 203

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	80 MHz	<b>Duty Cycle (%):</b>	76.0
<b>Data Rate:</b>	Rate 8	<b>Antenna Gain (dBi):</b>	11.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+1.19 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5190.0	<a href="#">-0.925</a>	<a href="#">-3.407</a>	--	--	<a href="#">1.106</a>	17.0	-15.9
5210.0	<a href="#">-1.768</a>	<a href="#">-4.020</a>	--	--	<a href="#">0.825</a>	17.0	-16.2

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## Specification

### **FCC, Part 15 §15.407 (a)(1), (a)(2)**

**(a)(1)(i)** For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

For the band 5.15-5.25 GHz the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or  $+4 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

**(a)(1)(iii)** For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.



#### 6.1.1.4. Frequency Stability

##### FCC, Part 15 Subpart C §15.407(g)

#### Test Procedure

The manufacturer of the equipment is responsible for ensuring that the frequency stability is such that emissions are always maintained within the band of operation under all conditions.

#### Manufacturer Declaration

The frequency stability of the reference oscillator sets the frequency stability of the RF transceiver signals. Therefore all of the RF signals should have  $\pm 20$ ppm stability.

This stability accounts for room temp tolerance of the crystal oscillator circuit, frequency variation across temperature, and crystal ageing.

$\pm 20$ ppm at 5.250 GHz translates to a maximum frequency shift of  $\pm 105$  KHz. As the edge of the channels is at least one MHz from either of the band edges,  $\pm 105$  KHz is more than sufficient to guarantee that the intentional emission will remain in the band over the entire operating range of the EUT.

#### Specification

#### Limits

**§15.407 (g)** Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.



### 6.1.2. Radiated Emission Testing

**FCC, Part 15 Subpart C §15.407(b)(2), §15.205(a)/15.209(a)**

#### **Test Procedure**

Testing was performed in a 3-meter anechoic chamber. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. Preliminary emissions were recorded with in Spectrum Analyzer mode, using a maximum peak detector while in peak hold mode. Depending on the frequency band spanned a notch filter and/or waveguide filter was used to remove the fundamental frequency.

Emissions nearest the limits were chosen for maximization and formal measurement using a CISPR compliant receiver. Emissions above 1000 MHz are measured utilizing a CISPR compliant average detector with a tuned receiver, using a bandwidth of 1 MHz. Emissions from 30 MHz – 1000 MHz are measured utilizing a CISPR compliant quasi-peak detector with a tuned receiver, using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed.

#### **Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

FS = Field Strength  
R = Measured Spectrum analyzer Input Amplitude  
AF = Antenna Factor

$$CORR = \text{Correction Factor} = CL - AG + NFL$$

CL = Cable Loss  
AG = Amplifier Gain  
FO = Distance Falloff Factor  
NFL = Notch Filter Loss or Waveguide Loss

Field Strength Calculation Example:

Given receiver input reading of 51.5 dB $\mu$ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 79 of 203

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength (dB $\mu$ V/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dB $\mu$ V/m

**Note:** The data in this Section identifies that the EUT is in compliance with the -27dBm/MHz EIRP limit (68.23 dB $\mu$ V/m) for out of band emissions. All out of band emissions are less than 68.23 dB  $\mu$ V/m.


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 6.1.2.1. Outdoor Equipment Antenna

11 dBi Antenna MT0128930 Outdoor Equipment

<b>Test Freq.</b>	5157 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11; 5 MHz	<b>Temp (°C)</b>	17.5
<b>Freq. Range</b>	1-18 G	<b>Rel. Hum.(%)</b>	67
<b>Power Setting</b>	7.5	<b>Press. (mBars)</b>	800
<b>Antenna</b>	11 dBi		
<b>Test Notes 1</b>	EUT AP0158770, SN# EUT has no serial number		
<b>Test Notes 2</b>	11dBi Sector, MT0128930		

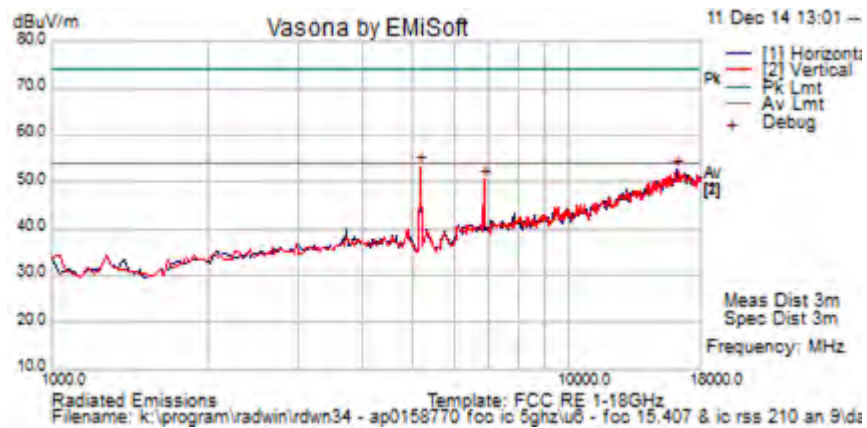

#### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5156.31263	58.9	5.9	-11.6	53.2	Peak [Scan]	V						FUND
16160.321	39.5	12.0	1.1	52.5	Peak [Scan]	H	100	0	54	-1.5	Pass	Noise
6859.719	51.1	6.9	-7.7	50.4	Peak [Scan]	V	100					NRB

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency  
 ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 81 of 203

<b>Test Freq.</b>	5200 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11; 5 MHz	<b>Temp (°C)</b>	17.5
<b>Freq. Range</b>	1-18 G	<b>Rel. Hum.(%)</b>	67
<b>Power Setting</b>	22	<b>Press. (mBars)</b>	800
<b>Antenna</b>	11 dBi		
<b>Test Notes 1</b>	EUT AP0158770, SN# EUT has no serial number		
<b>Test Notes 2</b>	11dBi Sector, MT0128930		

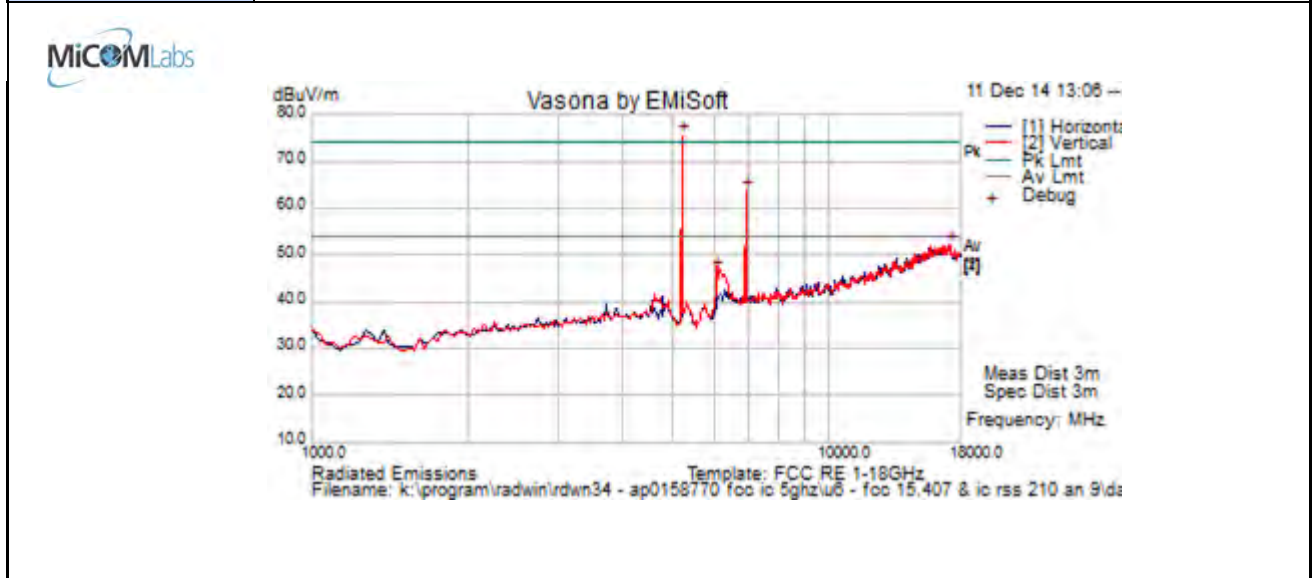

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5190.381	81.1	5.9	-11.5	75.5	Peak [Scan]							FUND
6927.85571	64.3	7.0	-7.5	63.8	Peak [Scan]	V						NRB
17114.228	39.1	12.5	0.5	52.1	Peak [Scan]	V	100	0	54	-1.9	Pass	Noise
6071.511	49.9	6.5	-9.6	46.7	Peak [Scan]	V						NRB


Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency
	ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 82 of 203

<b>Test Freq.</b>	5245 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11; 5 MHz	<b>Temp (°C)</b>	17.5
<b>Freq. Range</b>	1-18 G	<b>Rel. Hum.(%)</b>	67
<b>Power Setting</b>	23	<b>Press. (mBars)</b>	800
<b>Antenna</b>	11 dBi		
<b>Test Notes 1</b>	EUT AP0158770, SN# EUT has no serial number		
<b>Test Notes 2</b>	11dBi Sector, MT0128930		

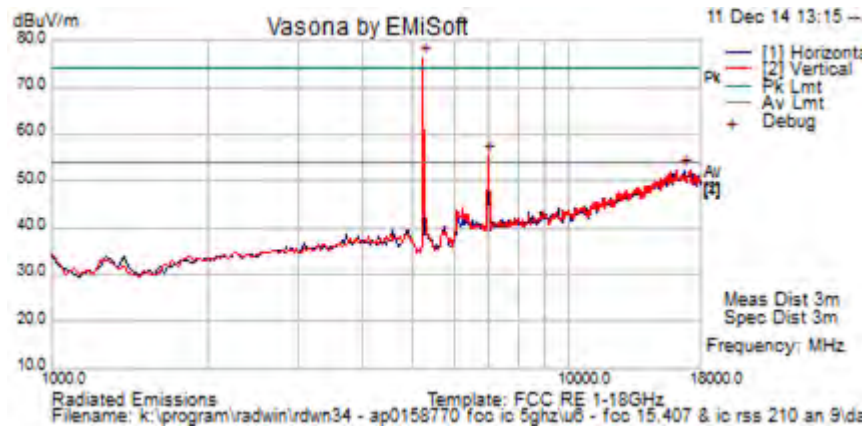

### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5224.4489	82.0	5.9	-11.4	76.5	Peak [Scan]							FUND
6995.992	56.1	7.0	-7.5	55.7	Peak [Scan]	V						NRB
16705.411	38.8	12.1	1.6	52.5	Peak [Scan]	H	100	0	54	-1.5	Pass	Noise
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency											
	ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps											

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**11 dBi Antenna MT0128930 - Radiated Band-Edge**

Peak Limit 74.0 dB $\mu$ V/m, Average Limit 54.0 dB $\mu$ V/m

5150 MHz Restricted Band-Edge			
Operational Mode (MHz)	dB $\mu$ V/m		Power Setting
	Peak	Average	
5	71.49	43.90	4.0
10	68.55	47.54	4.0
20	70.64	52.70	2.5
40	72.69	53.86	3.0
80	71.88	53.89	1.5

---


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 84 of 203

12 dBi Antenna - AM0135060 Outdoor Equipment

<b>Test Freq.</b>	5157 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11; 5 MHz	<b>Temp (°C)</b>	18
<b>Freq. Range</b>	1-18 G	<b>Rel. Hum.(%)</b>	80
<b>Power Setting</b>	4.5	<b>Press. (mBars)</b>	800
<b>Antenna</b>	12 dBi		
<b>Test Notes 1</b>	EUT AP0158770, SN# EUT has no serial number		
<b>Test Notes 2</b>	12 dBi Sector, AM0135060		

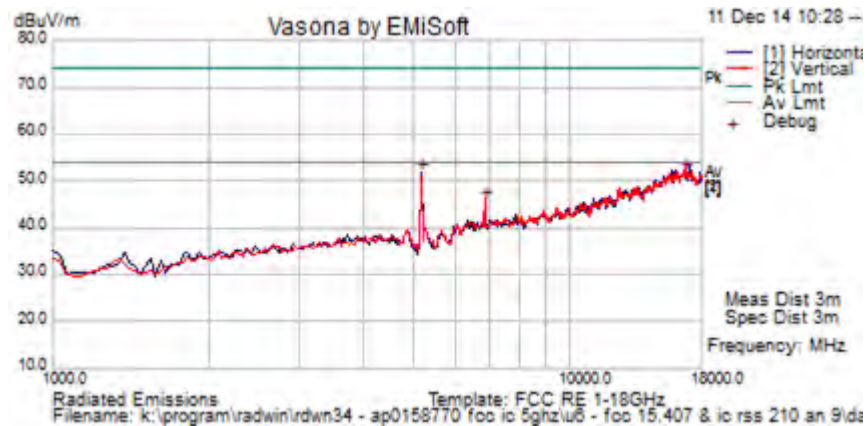

**Formally measured emission peaks**


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5156.31263	57.5	5.9	-11.6	51.8	Peak [Scan]							FUND
16705.411	37.8	12.1	1.6	51.5	Peak [Scan]	V	100	0	54	-2.5	Pass	Noise
6856.354	46.4	6.9	-7.7	45.6	Peak [Scan]	V	98	361	54	-8.4	Pass	NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 85 of 203

<b>Test Freq.</b>	5200 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11; 5 MHz	<b>Temp (°C)</b>	18
<b>Freq. Range</b>	1-18 G	<b>Rel. Hum.(%)</b>	80
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	800
<b>Antenna</b>	12 dBi		
<b>Test Notes 1</b>	EUT AP0158770, SN# EUT has no serial number		
<b>Test Notes 2</b>	12 dBi Sector, AM0135060		

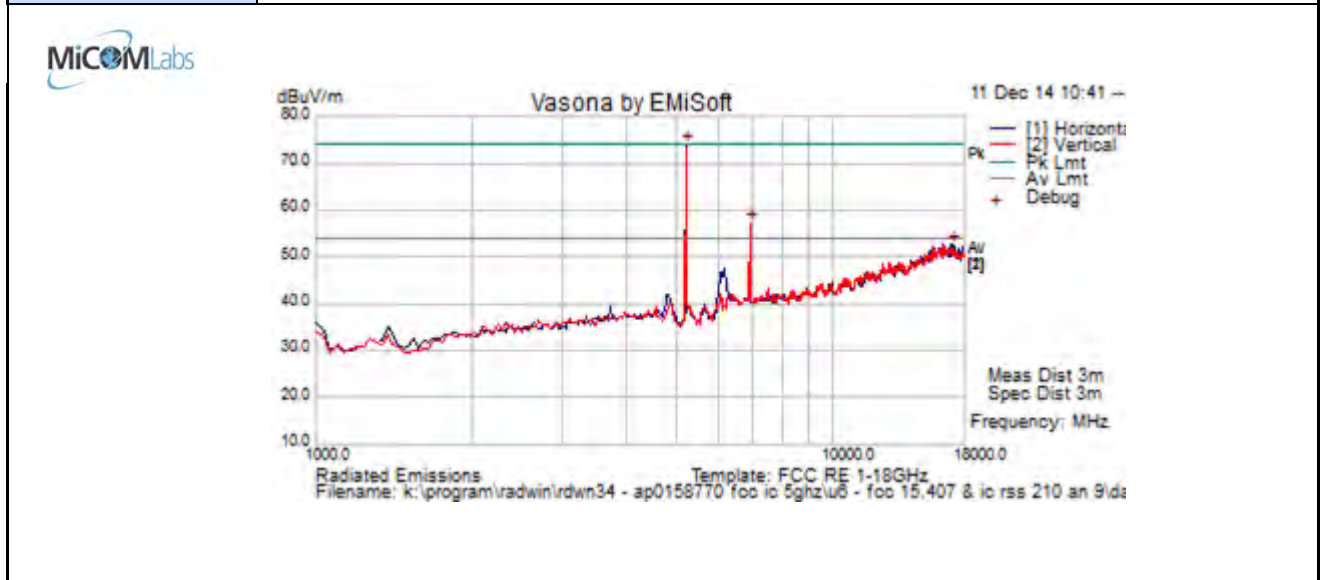

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5190.381	79.7	5.9	-11.5	74.1	Peak [Scan]							FUND
6927.85571	57.7	7.0	-7.5	57.1	Peak [Scan]	V						NRB
17080.160	39.5	12.5	0.6	52.6	Peak [Scan]	H	200	0	54	-1.4	Pass	Noise


Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency
	ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 86 of 203

<b>Test Freq.</b>	5245 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11; 5 MHz	<b>Temp (°C)</b>	18
<b>Freq. Range</b>	1-18 G	<b>Rel. Hum.(%)</b>	80
<b>Power Setting</b>	22	<b>Press. (mBars)</b>	800
<b>Antenna</b>	12 dBi		
<b>Test Notes 1</b>	EUT AP0158770, SN# EUT has no serial number		
<b>Test Notes 2</b>	12 dBi Sector, AM0135060		

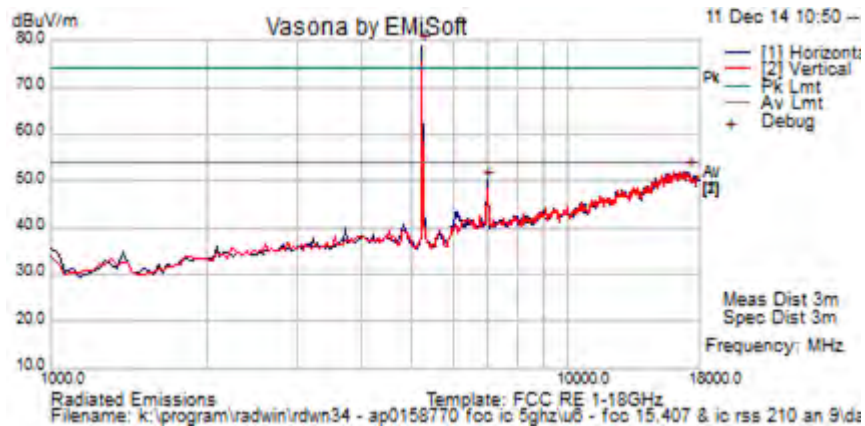

### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5224.4489	84.5	5.9	-11.4	79.0	Peak [Scan]							FUND
17114.228	39.0	12.5	0.5	52.0	Peak [Scan]	H	150	0	54	-2.0	Pass	Noise
6995.992	50.5	7.0	-7.5	50.1	Peak [Scan]	H	100	0	54	-3.9	Pass	NRB

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency  
 ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 12 dBi Antenna - AM0135060 - Radiated Band-Edge

Peak Limit 74.0 dB $\mu$ V/m, Average Limit 54.0 dB $\mu$ V/m

5150 MHz Restricted Band-Edge			
Operational Mode (MHz)	dB $\mu$ V/m		Power Setting
	Peak	Average	
5	67.23	41.50	4.5
10	68.17	45.14	6.0
20	69.81	51.43	4.0
40	72.84	51.00	2.5
80	72.59	53.92	3.0


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



11.5 dBi Antenna - RW-9401-5002 Outdoor Equipment

<b>Test Freq.</b>	5157 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11; 5 MHz	<b>Temp (°C)</b>	17.5
<b>Freq. Range</b>	1-18 G	<b>Rel. Hum.(%)</b>	67
<b>Power Setting</b>	4.5	<b>Press. (mBars)</b>	800
<b>Antenna</b>	12 dBi		
<b>Test Notes 1</b>	EUT AP015877, SN# EUT has no serial number		
<b>Test Notes 2</b>	11.5dBi Mobile Antenna, RW-9401-5002		

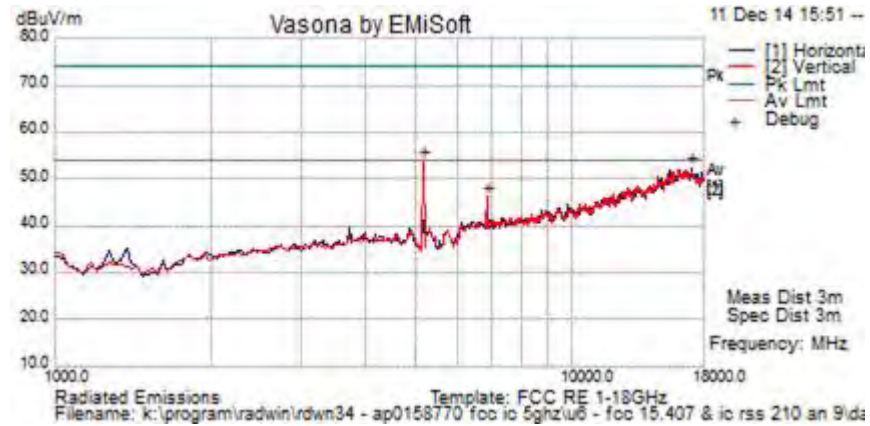

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5156.31263	59.5	5.9	-11.6	53.8	Peak [Scan]							FUND
17046.092	39.3	12.4	0.8	52.5	Peak [Scan]	H	100	0	54	-1.6	Pass	Noise
6860.789	46.9	6.9	-7.7	46.2	Peak [Scan]	V						NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps												


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 89 of 203

<b>Test Freq.</b>	5200 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11; 5 MHz	<b>Temp (°C)</b>	17.5
<b>Freq. Range</b>	1-18 G	<b>Rel. Hum.(%)</b>	67
<b>Power Setting</b>	22	<b>Press. (mBars)</b>	800
<b>Antenna</b>	12 dBi		
<b>Test Notes 1</b>	EUT AP015877, SN# EUT has no serial number		
<b>Test Notes 2</b>	11.5dBi Mobile Antenna, RW-9401-5002		

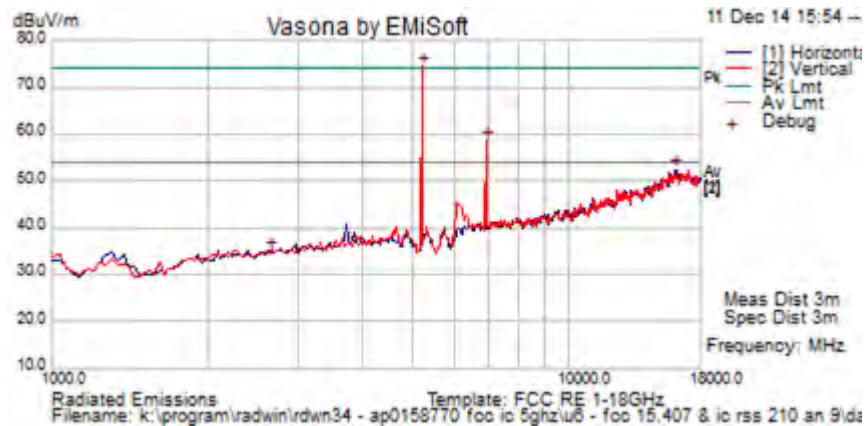

### Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5190.381	80.0	5.9	-11.5	74.4	Peak [Scan]							FUND
6927.85571	59.2	7.0	-7.5	58.7	Peak [Scan]	V						NRB
16024.048	39.8	12.0	0.7	52.5	Peak [Scan]	H	100	0	54	-1.5	Pass	Noise
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 90 of 203

<b>Test Freq.</b>	5245 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11; 5 MHz	<b>Temp (°C)</b>	17.5
<b>Freq. Range</b>	1-18 G	<b>Rel. Hum.(%)</b>	67
<b>Power Setting</b>	22	<b>Press. (mBars)</b>	800
<b>Antenna</b>	12 dBi		
<b>Test Notes 1</b>	EUT AP015877, SN# EUT has no serial number		
<b>Test Notes 2</b>	11.5dBi Mobile Antenna, RW-9401-5002		

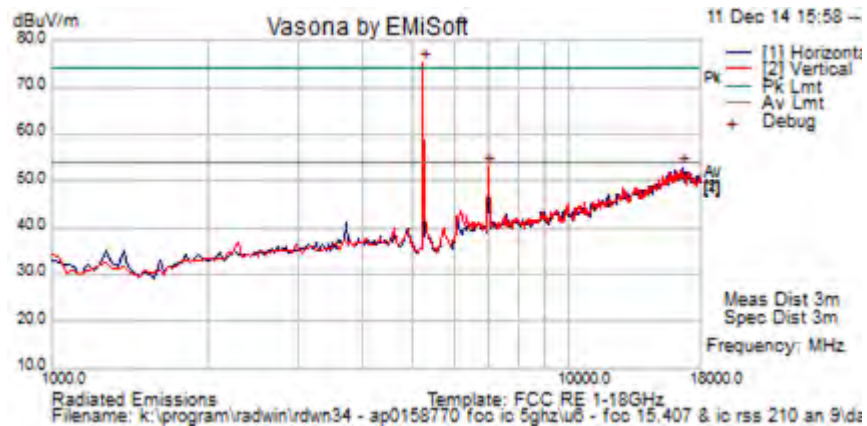

### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5224.4489	80.9	5.9	-11.4	75.4	Peak [Scan]							FUND
6995.992	53.5	7.0	-7.5	53.1	Peak [Scan]	V						NRB
16569.138	39.2	11.9	1.6	52.8	Peak [Scan]	H	150	0	54	-1.2	Pass	Noise

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency  
 ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 11.5 dBi Antenna - RW-9401-5002 - Radiated Band-Edge

Peak Limit 74.0 dB $\mu$ V/m, Average Limit 54.0 dB $\mu$ V/m

5150 MHz Restricted Band-Edge			
Operational Mode (MHz)	dB $\mu$ V/m		Power Setting
	Peak	Average	
5	70.11	42.19	4.5
10	73.32	48.37	5.5
20	69.14	53.39	5.0
40	72.65	53.69	7.0
80	72.87	53.05	5.5

---


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 92 of 203

15.5 dBi Antenna - RW-9061-5002 Outdoor Equipment

<b>Test Freq.</b>	5157 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11; 5 MHz	<b>Temp (°C)</b>	17.5
<b>Freq. Range</b>	1-18 G	<b>Rel. Hum.(%)</b>	67
<b>Power Setting</b>	2.0	<b>Press. (mBars)</b>	800
<b>Antenna</b>	15 dBi		
<b>Test Notes 1</b>	EUT AP0158770, SN# No Serial number on unit		
<b>Test Notes 2</b>			

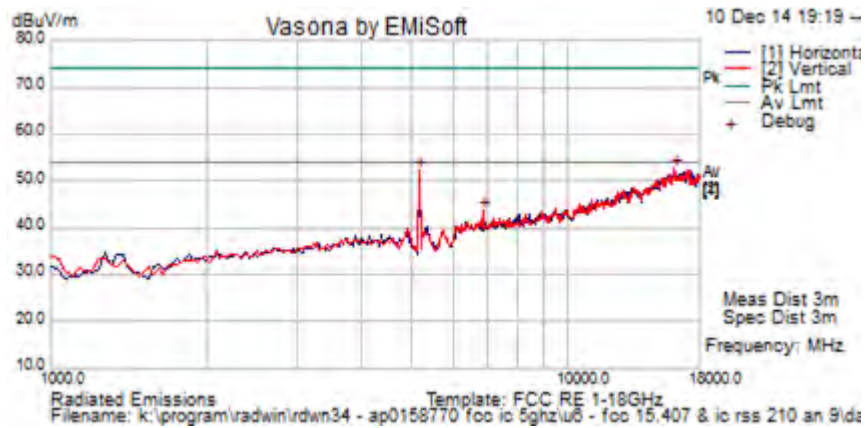

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
16092.184	39.7	12.0	1.0	52.7	Peak [Scan]							FUND
5156.313	57.9	5.9	-11.6	52.2	Peak [Scan]	V	100	0	54	-1.8	Pass	Noise
6860.055	44.5	6.9	-7.7	43.7	Peak [Scan]	V						NRB


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency  
 ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 93 of 203

<b>Test Freq.</b>	5200 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11; 5 MHz	<b>Temp (°C)</b>	17.5
<b>Freq. Range</b>	1-18 G	<b>Rel. Hum.(%)</b>	67
<b>Power Setting</b>	15.0	<b>Press. (mBars)</b>	800
<b>Antenna</b>	15.5 dBi		
<b>Test Notes 1</b>	EUT AP0158770, SN# No Serial number on unit		
<b>Test Notes 2</b>			

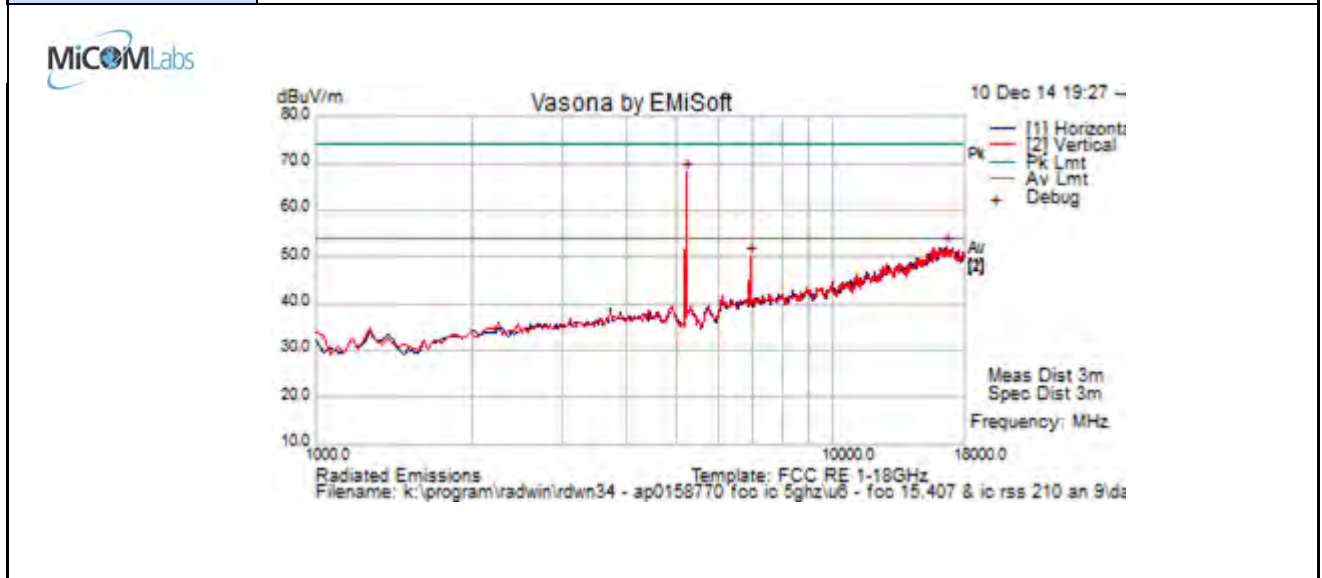

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5190.381	73.7	5.9	-11.5	68.1	Peak [Scan]							FUND
16603.206	38.6	12.0	1.6	52.2	Peak [Scan]	V	150	0	54.0	-1.8	Pass	Noise
6927.856	50.6	7.0	-7.5	50.1	Peak [Scan]	V						NRB


Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency
	ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 94 of 203

<b>Test Freq.</b>	5245 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11; 5 MHz	<b>Temp (°C)</b>	17.5
<b>Freq. Range</b>	1-18 G	<b>Rel. Hum.(%)</b>	67
<b>Power Setting</b>	15.0	<b>Press. (mBars)</b>	800
<b>Antenna</b>	15.5 dBi		
<b>Test Notes 1</b>	EUT AP0158770, SN# No Serial number on unit		
<b>Test Notes 2</b>			

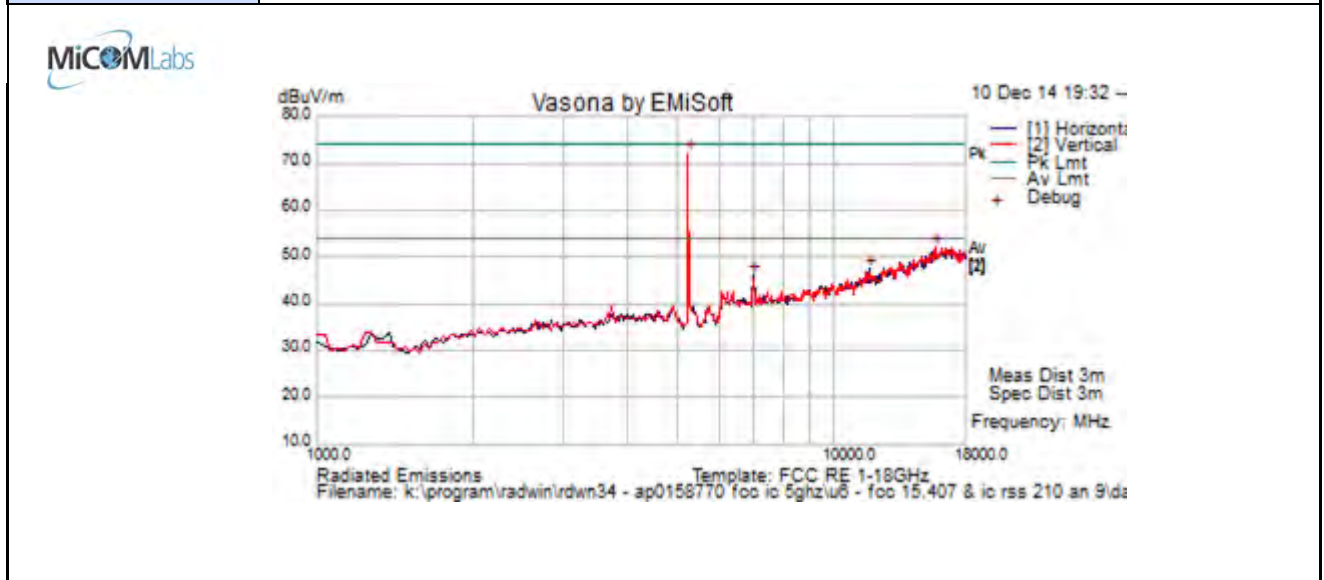

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5224.4489	77.54	5.92	-11.4	72.06	Peak [Scan]							FUND
15683.367	40.27	11.64	0.16	52.07	Peak [Scan]	V	100	0	54	-1.93	Pass	Noise
6995.96	46.66	7.01	-7.45	46.22	Peak [Scan]	V						NRB
11702.353	42.2	9.4	-4.4	47.2	Peak [Scan]	H	98	-1	54	-6.8	Pass	RB

<b>Legend:</b>	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency
	ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 15.5 dBi Antenna - RW-9061-5002 - Radiated Band-Edge

Peak Limit 74.0 dB $\mu$ V/m, Average Limit 54.0 dB $\mu$ V/m

5150 MHz Restricted Band-Edge			
Operational Mode (MHz)	dB $\mu$ V/m		Power Setting
	Peak	Average	
5	68.05	43.03	2.0
10	73.82	50.55	3.5
20	71.22	53.72	1.5
40	71.23	51.32	0.5
80	69.11	52.93	-1.5

---


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 6.1.2.2. Point - Point Equipment Antenna

16 dBi Antenna - AM0111760 Point - Point

<b>Test Freq.</b>	5157 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11; 5 MHz	<b>Temp (°C)</b>	17.5
<b>Freq. Range</b>	1-18 G	<b>Rel. Hum.(%)</b>	67
<b>Power Setting</b>	1.5	<b>Press. (mBars)</b>	800
<b>Antenna</b>	16 dBi		
<b>Test Notes 1</b>	EUT AP0158770, SN# No Serial number on unit		
<b>Test Notes 2</b>			

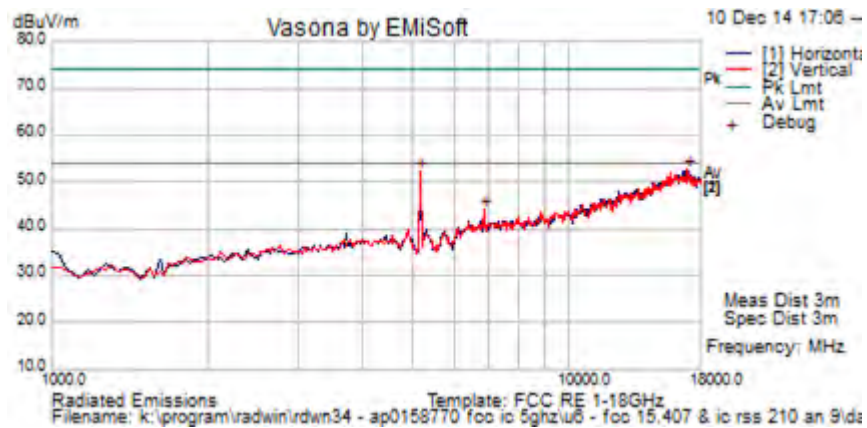

#### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
16977.956	39.4	12.4	0.8	52.6	Peak [Scan]	V	100	0	54.0	-1.4	Pass	
5156.313	57.8	5.9	-11.6	52.1	Peak [Scan]							
6860.789	44.7	6.9	-7.7	43.9	Peak [Scan]	V						

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency  
 ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 97 of 203

<b>Test Freq.</b>	5200 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11; 5 MHz	<b>Temp (°C)</b>	17.5
<b>Freq. Range</b>	1-18 G	<b>Rel. Hum.(%)</b>	67
<b>Power Setting</b>	22	<b>Press. (mBars)</b>	800
<b>Antenna</b>	16 dBi		
<b>Test Notes 1</b>	EUT AP0158770, SN# No Serial number on unit		
<b>Test Notes 2</b>			

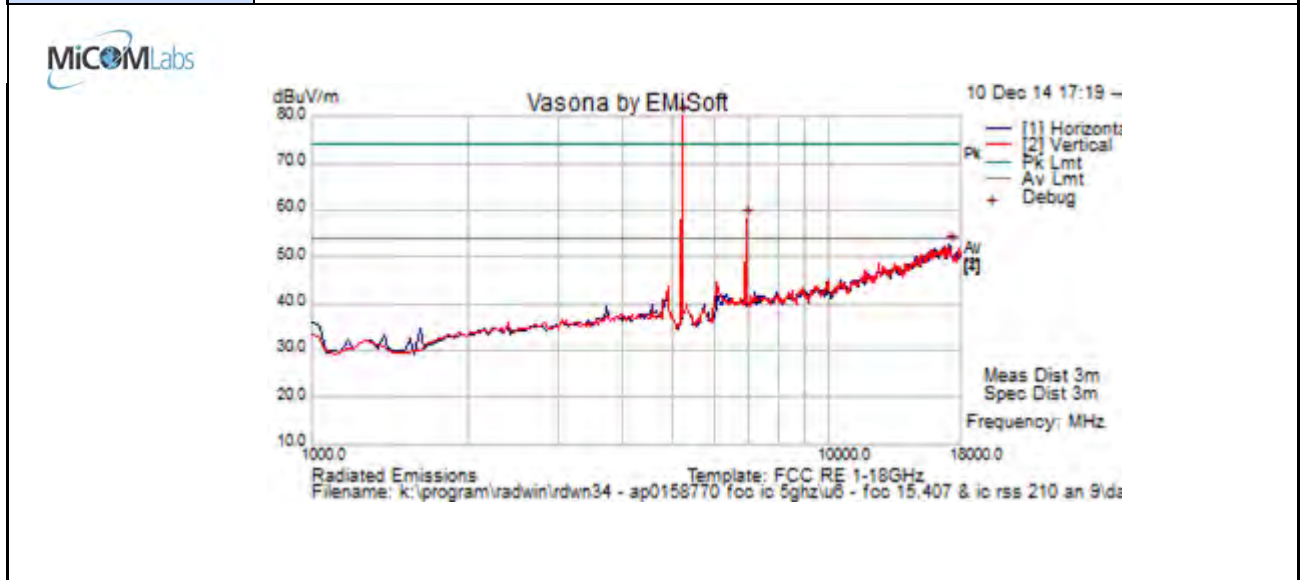

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5190.381	85.7	5.9	-11.5	80.1	Peak [Scan]							FUND
6927.85571	58.7	7.0	-7.5	58.2	Peak [Scan]	V						NRB
17114.228	39.7	12.5	0.5	52.7	Peak [Scan]	H	100	0	54	-1.3	Pass	Noise


Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency
	ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 98 of 203

<b>Test Freq.</b>	5245 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11; 5 MHz	<b>Temp (°C)</b>	17.5
<b>Freq. Range</b>	1-18 G	<b>Rel. Hum.(%)</b>	67
<b>Power Setting</b>	22	<b>Press. (mBars)</b>	800
<b>Antenna</b>	16 dBi		
<b>Test Notes 1</b>	EUT AP0158770, SN# No Serial number on unit		
<b>Test Notes 2</b>			

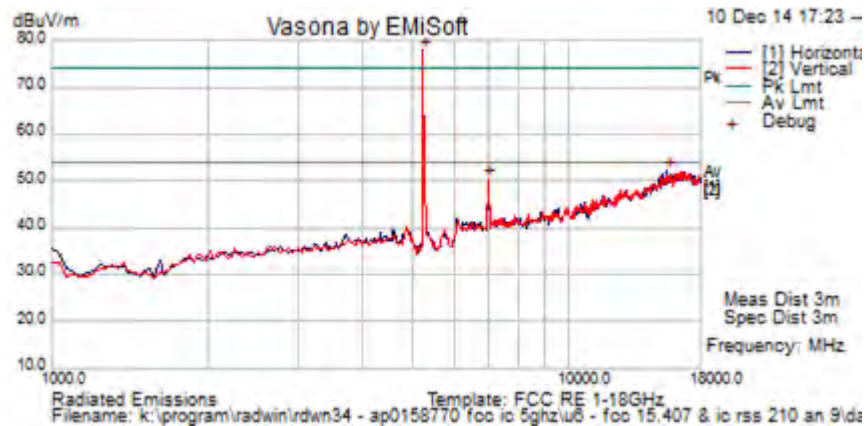

### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5224.4489	83.4	5.9	-11.4	77.9	Peak [Scan]							FUND
15513.026	41.6	11.4	-0.7	52.3	Peak [Scan]	H	150	0	54	-1.7	Pass	Noise
6995.992	50.8	7.0	-7.5	50.3	Peak [Scan]							NRB

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency  
 ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**16 dBi Antenna - AM0111760 - Radiated Band-Edge**

Peak Limit 74.0 dB $\mu$ V/m, Average Limit 54.0 dB $\mu$ V/m

Operational Mode (MHz)	5150 MHz Restricted Band-Edge		
	dB $\mu$ V/m		Power Setting
	Peak	Average	
5 (5157 MHz)	70.81	43.60	1.5
10 (5162 MHz)	73.21	51.77	1.5
20 (5165 MHz)	68.82	52.47	0.5
20 (5200 MHz)	68.79	53.72	17.5
40 (5172 MHz)	73.69	53.86	-0.5
40 (5200 MHz)	69.59	53.86	10.5
40 (5230 MHz)	63.26	47.70	18.0
80 (5190 MHz)	73.20	51.77	-3.0
80 (5210 MHz)	69.73	53.98	8.0


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 100 of 203

23.5 dBi Antenna - MT0070760 Point – Point

<b>Test Freq.</b>	5157 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11; 5 MHz	<b>Temp (°C)</b>	17.5
<b>Freq. Range</b>	1-18 G	<b>Rel. Hum.(%)</b>	67
<b>Power Setting</b>	-4.5	<b>Press. (mBars)</b>	800
<b>Antenna</b>	23 dBi		
<b>Test Notes 1</b>	SN# No Serial number on unit		
<b>Test Notes 2</b>			

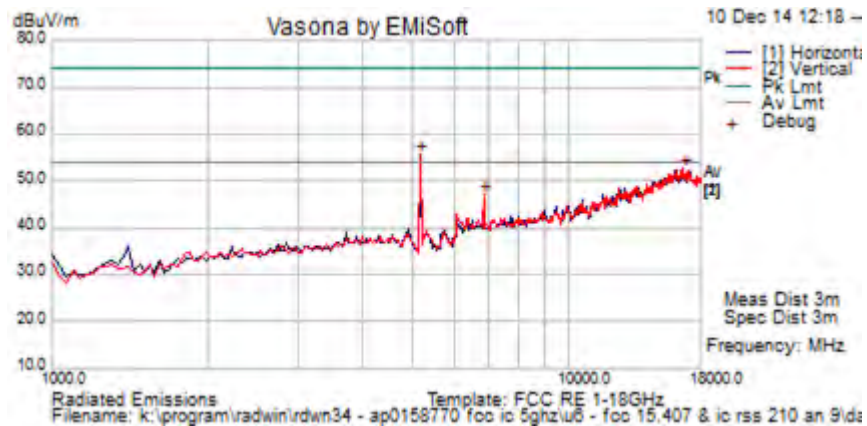

**Formally measured emission peaks**


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5156.31263	61.3	5.9	-11.6	55.7	Peak [Scan]							FUND
16637.275	38.9	12.0	1.6	52.5	Peak [Scan]	V	150	0	54	-1.5	Pass	Noise
6860.176	47.7	6.9	-7.7	47.0	Peak [Scan]	V						NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency												
ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 101 of 203

<b>Test Freq.</b>	5200 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11; 5 MHz	<b>Temp (°C)</b>	17.5
<b>Freq. Range</b>	1-18 G	<b>Rel. Hum.(%)</b>	67
<b>Power Setting</b>	22	<b>Press. (mBars)</b>	800
<b>Antenna</b>	23 dBi		
<b>Test Notes 1</b>	SN# No Serial number on unit		
<b>Test Notes 2</b>			

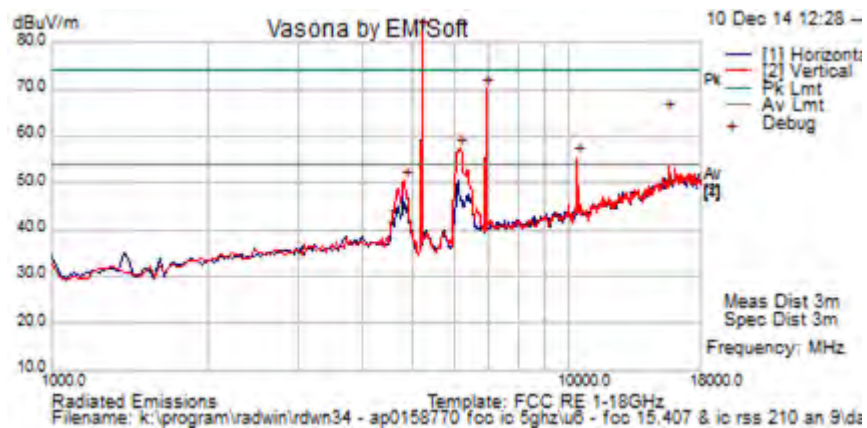

### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5190.381	88.0	5.9	-11.5	82.4	Peak [Scan]							FUND
6927.85571	70.7	7.0	-7.5	70.2	Peak [Scan]	V						NRB
6178.357	59.8	6.5	-9.0	57.2	Peak [Scan]	V						NRB
15600.450	53.7	11.5	-0.2	65.0	Peak Max	V	100	360	74	-9.1	Pass	RB
15600.450	37.6	11.5	-0.2	48.9	Average Max	V	100	360	54	-5.1	Pass	RB
10402.806	51.4	9.0	-5.0	55.4	Peak [Scan]	V						NRB
4815.631	55.9	5.7	-11.2	50.4	Peak [Scan]	V	100	0	54	-3.6	Pass	BE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency  
 ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 102 of 203

<b>Test Freq.</b>	5245 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11; 5 MHz	<b>Temp (°C)</b>	17.5
<b>Freq. Range</b>	1-18 G	<b>Rel. Hum.(%)</b>	67
<b>Power Setting</b>	23	<b>Press. (mBars)</b>	800
<b>Antenna</b>	23 dBi		
<b>Test Notes 1</b>	SN# No Serial number on unit		
<b>Test Notes 2</b>			

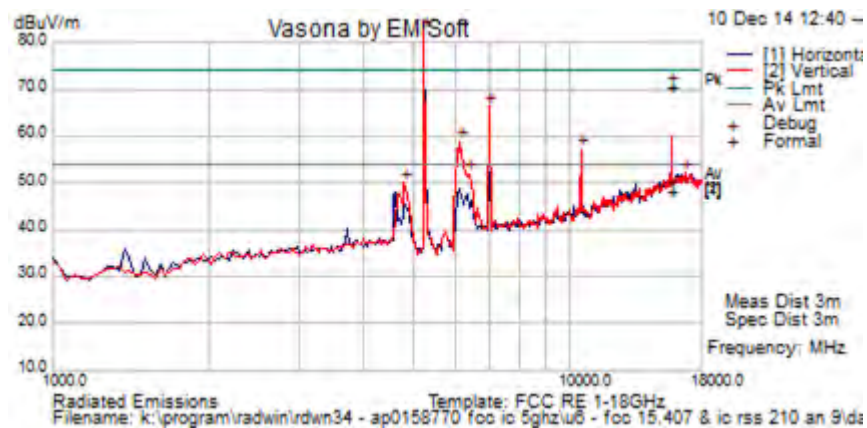

### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5224.4489	88.0	5.9	-11.4	82.5	Peak [Scan]							FUND
6995.992	66.7	7.0	-7.5	66.3	Peak [Scan]	V						NRB
6144.289	61.6	6.5	-9.2	58.9	Peak [Scan]	V						NRB
15731.933	58.7	11.6	0.2	70.5	Peak Max	V	99	4	74	-3.5	Pass	RB
15731.933	36.4	11.6	0.2	48.2	Average Max	V	99	4	54	-5.8	Pass	RB
10505.010	52.5	9.0	-4.3	57.2	Peak [Scan]	V						NRB
16739.479	38.5	12.1	1.5	52.1	Peak [Scan]	V	150	0	54	-1.9	Pass	Noise
6382.766	53.4	6.7	-8.1	52.0	Peak [Scan]	V						NRB
4781.563	55.6	5.6	-11.1	50.1	Peak [Scan]	V	100	0	54	-3.9	Pass	BE

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency  
 ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**23.5 dBi Antenna - MT0070760 - Radiated Band-Edge**

Peak Limit 74.0 dB $\mu$ V/m, Average Limit 54.0 dB $\mu$ V/m

5150 MHz Restricted Band-Edge			
Operational Mode (MHz)	dB $\mu$ V/m		Power Setting
	Peak	Average	
5 (5157 MHz)	72.12	46.17	-4.5
10 (5162 MHz)	73.24	52.43	-4.5
20 (5165 MHz)	69.00	52.12	-8.5
20 (5200 MHz)	68.55	53.48	9.5
40 (5172 MHz)	72.95	52.80	-8.5
40 (5200 MHz)	67.83	53.54	11.0
40 (5230 MHz)	69.38	53.42	21.5
80 (5190 MHz)	70.91	52.70	-9.0
80 (5210 MHz)	67.87	52.89	2.0


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 104 of 203

**29dBi Antenna - RW-9622-5001 Point – Point**

<b>Test Freq.</b>	5157 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11; 5 MHz	<b>Temp (°C)</b>	18
<b>Freq. Range</b>	1-18 G	<b>Rel. Hum.(%)</b>	59
<b>Power Setting</b>	-6.5	<b>Press. (mBars)</b>	848
<b>Antenna</b>	29 dBi		
<b>Test Notes 1</b>	EUT AP0158770, SN# No Serial number on unit		
<b>Test Notes 2</b>			

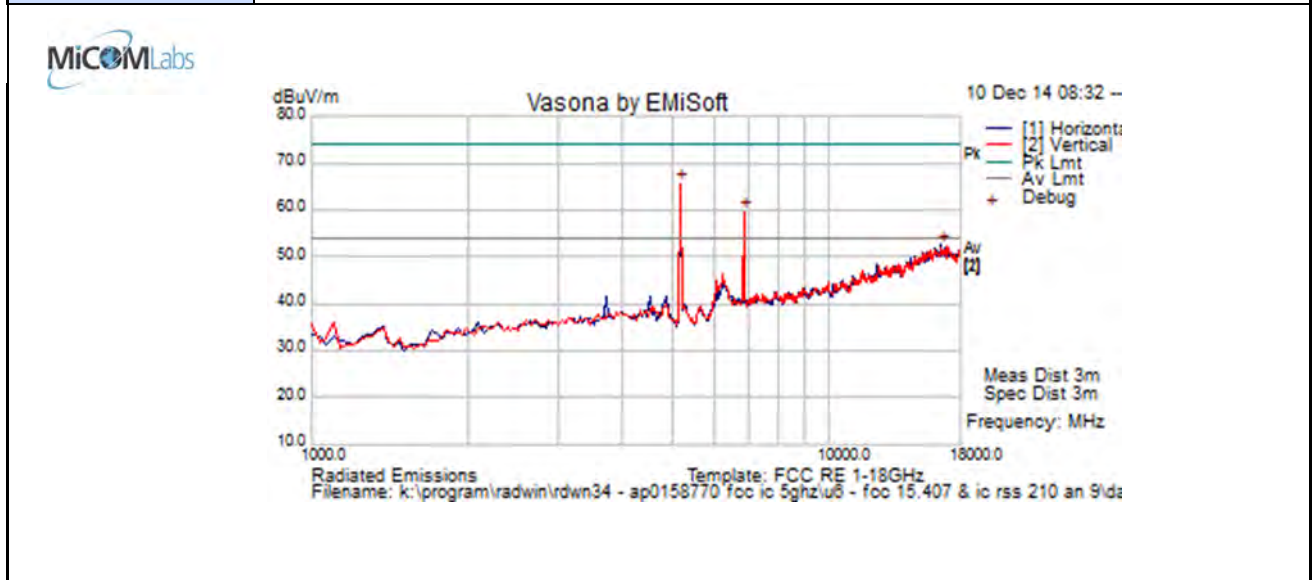

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5156.31263	71.5	5.9	-11.6	65.8	Peak [Scan]							FUND
6859.719	60.5	6.9	-7.7	59.7	Peak [Scan]	V						NRB
16535.070	39.2	11.9	1.6	52.7	Peak [Scan]	H	100	0	54	-1.3	Pass	Noise

Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency
	ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 105 of 203

<b>Test Freq.</b>	5200 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11; 5 MHz	<b>Temp (°C)</b>	18
<b>Freq. Range</b>	1-18 G	<b>Rel. Hum.(%)</b>	59
<b>Power Setting</b>	21 (EIRP)	<b>Press. (mBars)</b>	848
<b>Antenna</b>	29 dBi		
<b>Test Notes 1</b>	EUT AP0158770, SN# No Serial number on unit		
<b>Test Notes 2</b>			

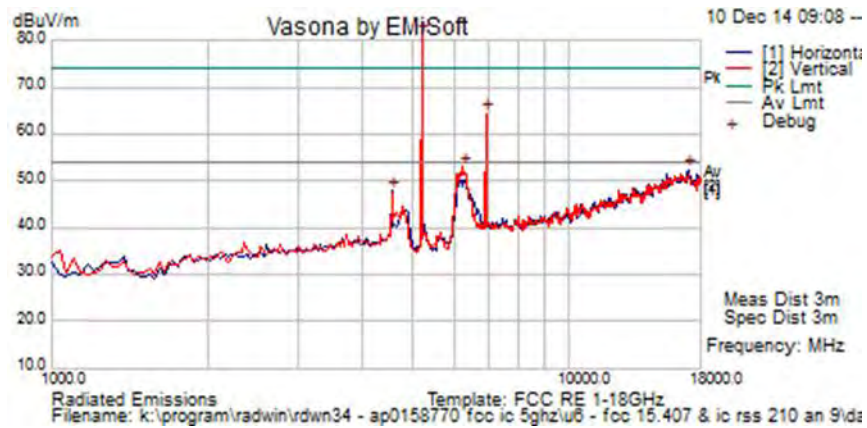

### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5190.381	86.8	5.9	-11.5	81.2	Peak [Scan]							FUND
6927.85571	64.9	7.0	-7.5	64.4	Peak [Scan]	V						NRB
6246.493	55.1	6.6	-8.6	53.1	Peak [Scan]	V						NRB
17012.024	39.3	12.4	0.8	52.5	Peak [Scan]	H	100	0	54	-1.6	Pass	Noise
4542.659	53.8	5.5	-11.4	47.9	Peak [Scan]	H	98	-1	54	-6.1	Pass	BE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency  
 ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 106 of 203

<b>Test Freq.</b>	5245 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11; 5 MHz	<b>Temp (°C)</b>	18
<b>Freq. Range</b>	1-18 G	<b>Rel. Hum.(%)</b>	59
<b>Power Setting</b>	21 (EIRP)	<b>Press. (mBars)</b>	848
<b>Antenna</b>	29 dBi		
<b>Test Notes 1</b>	EUT AP0158770, SN# No Serial number on unit		
<b>Test Notes 2</b>			

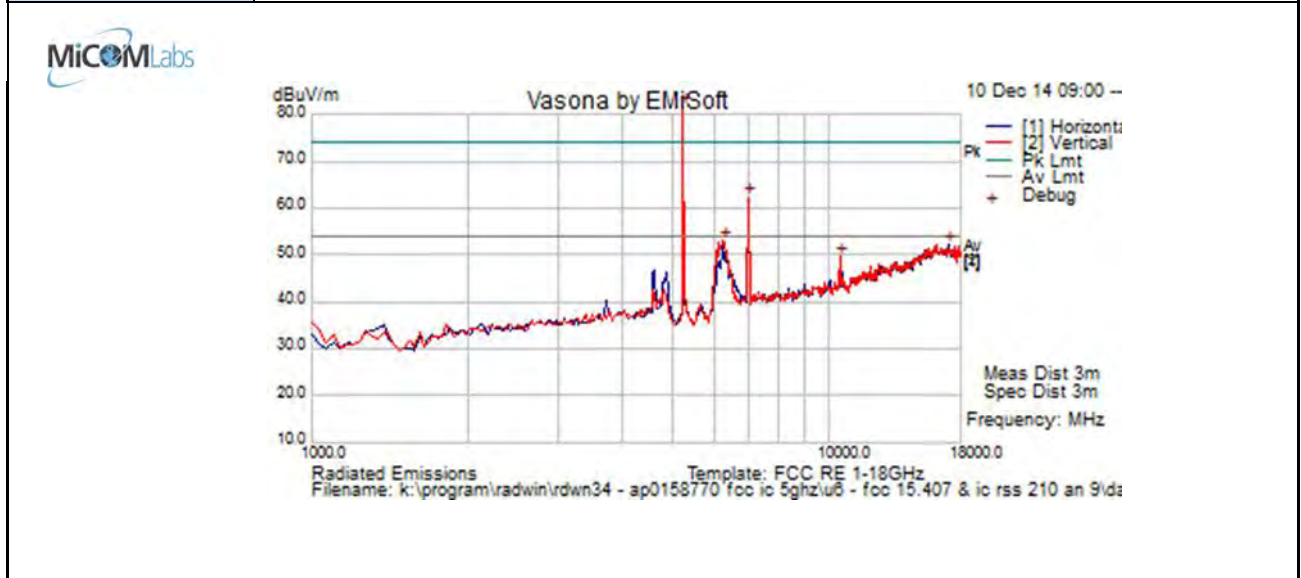

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5224.4489	87.2	5.9	-11.4	81.8	Peak [Scan]							FUND
6995.992	62.8	7.0	-7.5	62.3	Peak [Scan]	V						NRB
6246.493	55.1	6.6	-8.6	53.0	Peak [Scan]	V						NRB
17046.092	39.0	12.4	0.8	52.2	Peak [Scan]	H	100	0	54	-1.8	Pass	Noise
10505.010	44.8	9.0	-4.3	49.5	Peak [Scan]	V						NRB

Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency
	ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 29dBi Antenna - RW-9622-5001 - Radiated Band-Edge

Peak Limit 74.0 dB $\mu$ V/m, Average Limit 54.0 dB $\mu$ V/m

5150 MHz Restricted Band-Edge			
Operational Mode (MHz)	dB $\mu$ V/m		Power Setting
	Peak	Average	
5 (5157 MHz)	73.27	48.37	-6.5
10 (5162 MHz)	73.01	50.34	-10.5
20 (5165 MHz)	70.99	52.83	-12.5
20 (5200 MHz)	68.90	53.45	4.5
40 (5172 MHz)	73.00	53.12	-12.5
40 (5200 MHz)	69.12	53.42	4.0
40 (5230 MHz)	71.47	53.39	19.5
80 (5190 MHz)	72.96	52.26	-14.5


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



32dBi Antenna - RW-9732-4958 Point – Point

<b>Test Freq.</b>	5157 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11; 5 MHz	<b>Temp (°C)</b>	18
<b>Freq. Range</b>	1-18 G	<b>Rel. Hum.(%)</b>	59
<b>Power Setting</b>	-6.5	<b>Press. (mBars)</b>	848
<b>Antenna</b>	29 dBi		
<b>Test Notes 1</b>	EUT AP0158770, SN# No Serial number on unit		
<b>Test Notes 2</b>			

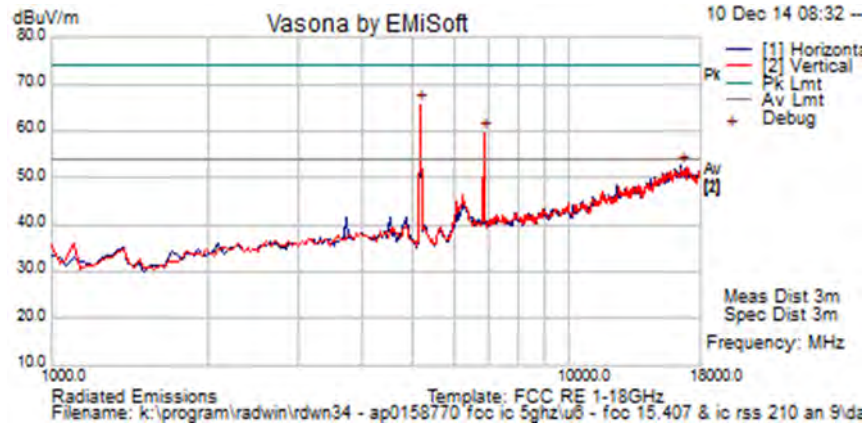

**Formally measured emission peaks**


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5156.31263	71.5	5.9	-11.6	65.8	Peak [Scan]							FUND
6859.719	60.5	6.9	-7.7	59.7	Peak [Scan]	V						NRB
16535.070	39.2	11.9	1.6	52.7	Peak [Scan]	H	100	0	54	-1.3	Pass	Noise
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 109 of 203

<b>Test Freq.</b>	5200 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11; 5 MHz	<b>Temp (°C)</b>	18
<b>Freq. Range</b>	1-18 G	<b>Rel. Hum.(%)</b>	59
<b>Power Setting</b>	21 (EIRP)	<b>Press. (mBars)</b>	848
<b>Antenna</b>	29 dBi		
<b>Test Notes 1</b>	EUT AP0158770, SN# No Serial number on unit		
<b>Test Notes 2</b>			

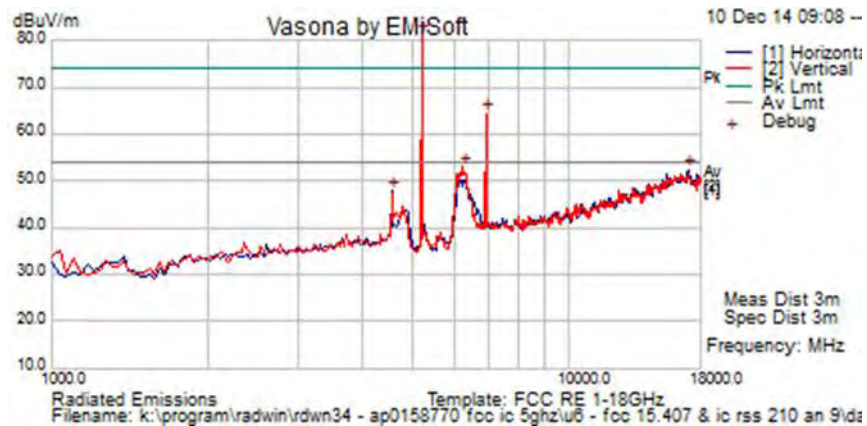

### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5190.381	86.8	5.9	-11.5	81.2	Peak [Scan]							FUND
6927.85571	64.9	7.0	-7.5	64.4	Peak [Scan]	V						NRB
6246.493	55.1	6.6	-8.6	53.1	Peak [Scan]	V						NRB
17012.024	39.3	12.4	0.8	52.5	Peak [Scan]	H	100	0	54	-1.6	Pass	Noise
4542.659	53.8	5.5	-11.4	47.9	Peak [Scan]	H	98	-1	54	-6.1	Pass	BE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency  
 ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 110 of 203

<b>Test Freq.</b>	5245 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11; 5 MHz	<b>Temp (°C)</b>	18
<b>Freq. Range</b>	1-18 G	<b>Rel. Hum.(%)</b>	59
<b>Power Setting</b>	21 (EIRP)	<b>Press. (mBars)</b>	848
<b>Antenna</b>	29 dBi		
<b>Test Notes 1</b>	EUT AP0158770, SN# No Serial number on unit		
<b>Test Notes 2</b>			

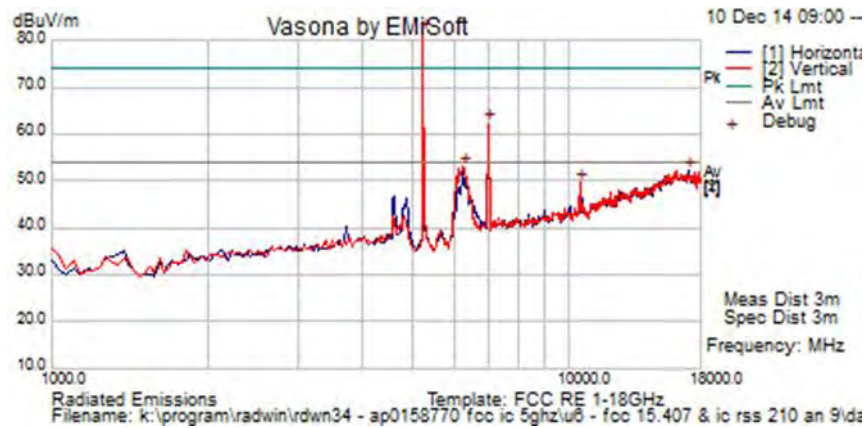

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5224.4489	87.2	5.9	-11.4	81.8	Peak [Scan]							FUND
6995.992	62.8	7.0	-7.5	62.3	Peak [Scan]	V						NRB
6246.493	55.1	6.6	-8.6	53.0	Peak [Scan]	V						NRB
17046.092	39.0	12.4	0.8	52.2	Peak [Scan]	H	100	0	54	-1.8	Pass	Noise
10505.010	44.8	9.0	-4.3	49.5	Peak [Scan]	V						NRB

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency  
 ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**32dBi Antenna - RW-9732-4958 - Radiated Band-Edge**

Peak Limit 74.0 dB $\mu$ V/m, Average Limit 54.0 dB $\mu$ V/m

Operational Mode (MHz)	5150 MHz Restricted Band-Edge		Power Setting
	dB $\mu$ V/m		
	Peak	Average	
5 (5157 MHz)	71.60	53.87	Tx Gain 0 DAC 220
5 (5200 MHz)	62.69	41.90	13.5
10 (5162 MHz)	60.29	47.87	-6.0
20 (5165 MHz)	73.36	51.74	-11.0
20 (5200 MHz)	68.60	53.96	5.0
40 (5172 MHz)	69.71	52.62	-14.0
40 (5200 MHz)	68.32	53.37	4.5
40 (5230 MHz)	68.51	52.01	18.0
80 (5190 MHz)	70.40	53.70	-0.5
80 (5210 MHz)	69.01	53.96	-5.5

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## Specification

### Radiated Spurious Emissions

**15.407 (b)(2).** All emissions outside of the 5,150-5,350MHz band shall not exceed an EIRP of -27dBm/MHz.

**FCC §15.205 (a)** Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

**FCC §15.205 (a)** Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

**FCC §15.209 (a)** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

**Table 1: FCC 15.209 & RSS-Gen Spurious Emissions Limits**

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ )	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





### 6.1.3. Digital Emissions (30M-1 GHz)

#### FCC, Part 15 Subpart C §15.205/ §15.209

##### Test Procedure

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

The EUT had two methods of powering on ac/dc converter and Power over Ethernet (POE). Both modes were tested for emissions below 1GHz.

##### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB $\mu$ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$

Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 114 of 203

<b>Test Freq.</b>	NA	<b>Engineer</b>	JMH
<b>Variant</b>	Digital Emissions	<b>Temp (°C)</b>	20
<b>Freq. Range</b>	30-1000 MHz	<b>Rel. Hum.(%)</b>	56
<b>Power Setting</b>	NA	<b>Press. (mBars)</b>	848
<b>Antenna</b>	32 dBi		
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

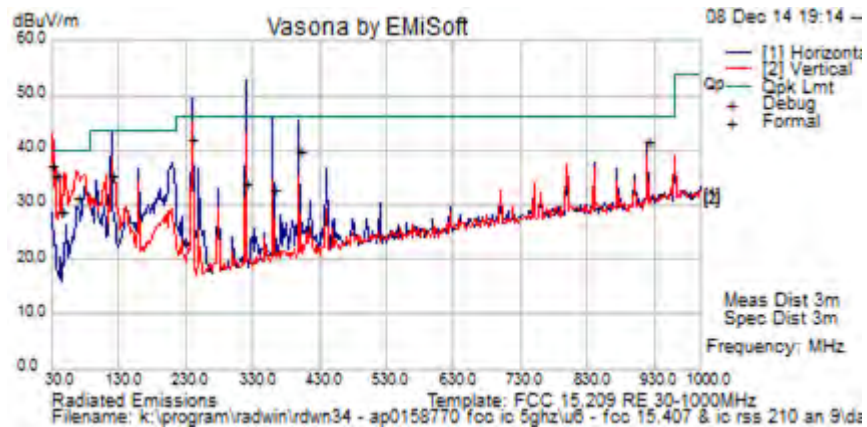

### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
319.999	45.4	5.2	-16.7	33.9	Quasi Max	H	99	179	46.0	-12.1	Pass	
240.015	56.0	4.8	-19.0	41.9	Quasi Max	H	100	157	46	-4.2	Pass	
30.251	43.5	3.5	-9.9	37.1	Quasi Max	V	224	18	40	-2.9	Pass	
34.975	45.3	3.6	-13.6	35.3	Quasi Max	V	142	12	40	-4.7	Pass	
120.005	48.6	4.2	-17.5	35.3	Quasi Max	H	209	204	43.5	-8.2	Pass	
360.008	42.9	5.3	-15.4	32.8	Quasi Max	H	217	152	46	-13.2	Pass	
399.995	49.0	5.5	-14.8	39.7	Quasi Max	H	160	202	46	-6.3	Pass	
66.934	50.9	3.8	-23.3	31.4	Quasi Max	V	108	313	40	-8.6	Pass	
44.815	45.7	3.6	-20.7	28.7	Quasi Max	V	130	349	40	-11.4	Pass	
919.995	42.0	7.2	-7.7	41.4	Quasi Max	H	109	181	46	-4.6	Pass	

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental Frequency  
 ETSI Vid Avg Type = 100 kHz RBW, 100 kHz VBW, Peak Detector, Video Average, 100 Sweeps

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## Specification

### Limits

**§15.205 (a)** Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

**§15.205 (a)** Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

**§15.209 (a)** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

### §15.209 (a) and RSS-Gen §2.2 Limit Matrix

Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

### Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 116 of 203

---

#### **6.1.4. AC Wireline Conducted Emissions (150 kHz – 30 MHz)**

##### **FCC, Part 15 Subpart C §15.207**

##### **Test Procedure**

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)**

Ambient conditions.

Temperature: 17 to 23 °C    Relative humidity: 31 to 57 %    Pressure: 999 to 1012 mbar

<b>Test Freq.</b>	N/A	<b>Engineer</b>	GMH
<b>Variant</b>	DC Line Emissions	<b>Temp (°C)</b>	20
<b>Freq. Range</b>	0.150 MHz - 30 MHz	<b>Rel. Hum.(%)</b>	75
<b>Power Setting</b>	NA	<b>Press. (mBars)</b>	999
<b>Antenna</b>	N/A		
<b>Test Notes 1</b>	POE: Sinpro 115Vac 60 Hz: 55 Vdc		
<b>Test Notes 2</b>	POE Model #: CPU55A-270-1		

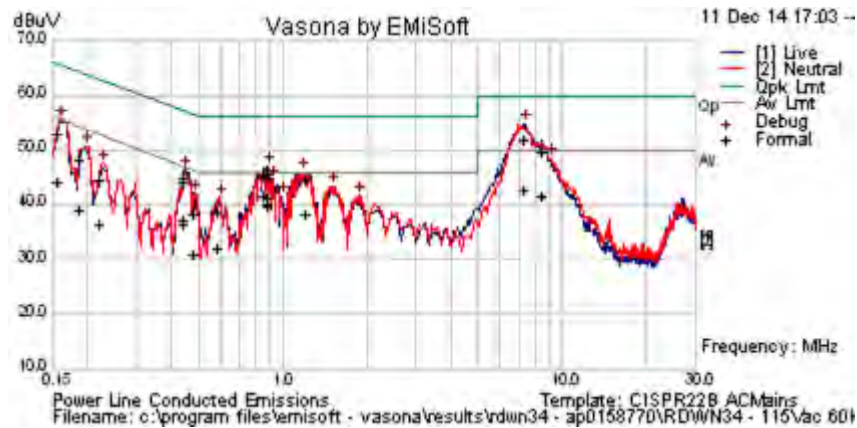

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail	Comments
0.155	34.1	9.9	0.1	44.1	Average	Neutral	55.75	-11.7	Pass	
0.155	43.1	9.9	0.1	53.1	Quasi Peak	Neutral	65.75	-12.6	Pass	
0.187	38.1	9.9	0.1	48.1	Quasi Peak	Neutral	64.19	-16.1	Pass	
0.187	29.2	9.9	0.1	39.1	Average	Neutral	54.19	-15.1	Pass	
0.217	34.7	9.9	0.1	44.7	Quasi Peak	Neutral	62.92	-18.2	Pass	
0.217	26.4	9.9	0.1	36.3	Average	Neutral	52.92	-16.6	Pass	
0.440	34.8	9.9	0.1	44.8	Quasi Peak	Live	57.06	-12.3	Pass	
0.440	27.2	9.9	0.1	37.2	Average	Live	47.06	-9.8	Pass	
0.440	26.4	9.9	0.1	36.4	Average	Live	47.06	-10.7	Pass	
0.440	34.3	9.9	0.1	44.3	Quasi Peak	Live	57.06	-12.8	Pass	
0.472	28.4	9.9	0.1	38.4	Quasi Peak	Live	56.47	-18.1	Pass	
0.472	21.0	9.9	0.1	31.0	Average	Live	46.47	-15.5	Pass	
0.578	28.8	9.9	0.1	38.9	Quasi Peak	Neutral	56	-17.2	Pass	
0.578	21.9	9.9	0.1	31.9	Average	Neutral	46	-14.1	Pass	
0.843	31.6	9.9	0.1	41.6	Average	Live	46	-4.4	Pass	
0.843	35.8	9.9	0.1	45.9	Quasi Peak	Live	56	-10.2	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 118 of 203

0.873	29.9	9.9	0.1	39.9	Average	Neutral	46	-6.1	Pass	
0.873	35.0	9.9	0.1	45.1	Quasi Peak	Neutral	56	-10.9	Pass	
0.876	30.1	9.9	0.1	40.2	Average	Live	46	-5.9	Pass	
0.876	35.5	9.9	0.1	45.5	Quasi Peak	Live	56	-10.5	Pass	
0.877	35.8	9.9	0.1	45.8	Quasi Peak	Live	56	-10.2	Pass	
0.877	31.2	9.9	0.1	41.2	Average	Live	46	-4.8	Pass	
1.189	28.2	9.9	0.1	38.2	Average	Neutral	46	-7.8	Pass	
1.189	34.6	9.9	0.1	44.6	Quasi Peak	Neutral	56	-11.4	Pass	
7.294	41.2	10.3	0.3	51.8	Quasi Peak	Live	60	-8.2	Pass	
7.294	32.0	10.3	0.3	42.6	Average	Live	50	-7.4	Pass	
8.379	39.2	10.3	0.3	49.9	Quasi Peak	Neutral	60	-10.1	Pass	
8.379	30.9	10.3	0.3	41.5	Average	Neutral	50	-8.5	Pass	
Legend:	DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency									
	NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band									

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## Specification

### Limit

**§15.207 (a)** Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu\Omega$  line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

#### **RSS-Gen §7.2.2**

The radio frequency voltage that is conducted back into the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table below. The tighter limit applies at the frequency range boundaries.

#### **§15.207 (a)** and **RSS-Gen §7.2.2** Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency

#### **Laboratory Measurement Uncertainty for Conducted Emissions**

Measurement uncertainty	$\pm 2.64$ dB
-------------------------	---------------

## **7. PHOTOGRAPHS**

### **7.1. Conducted Test Setup**



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## 7.2. Test Setup - Digital Emissions above 1 GHz

11 dBi MT0128930



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


11.5 dBi RW-9401-5002 (Shark Fin)



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

12 dBi AM0135060

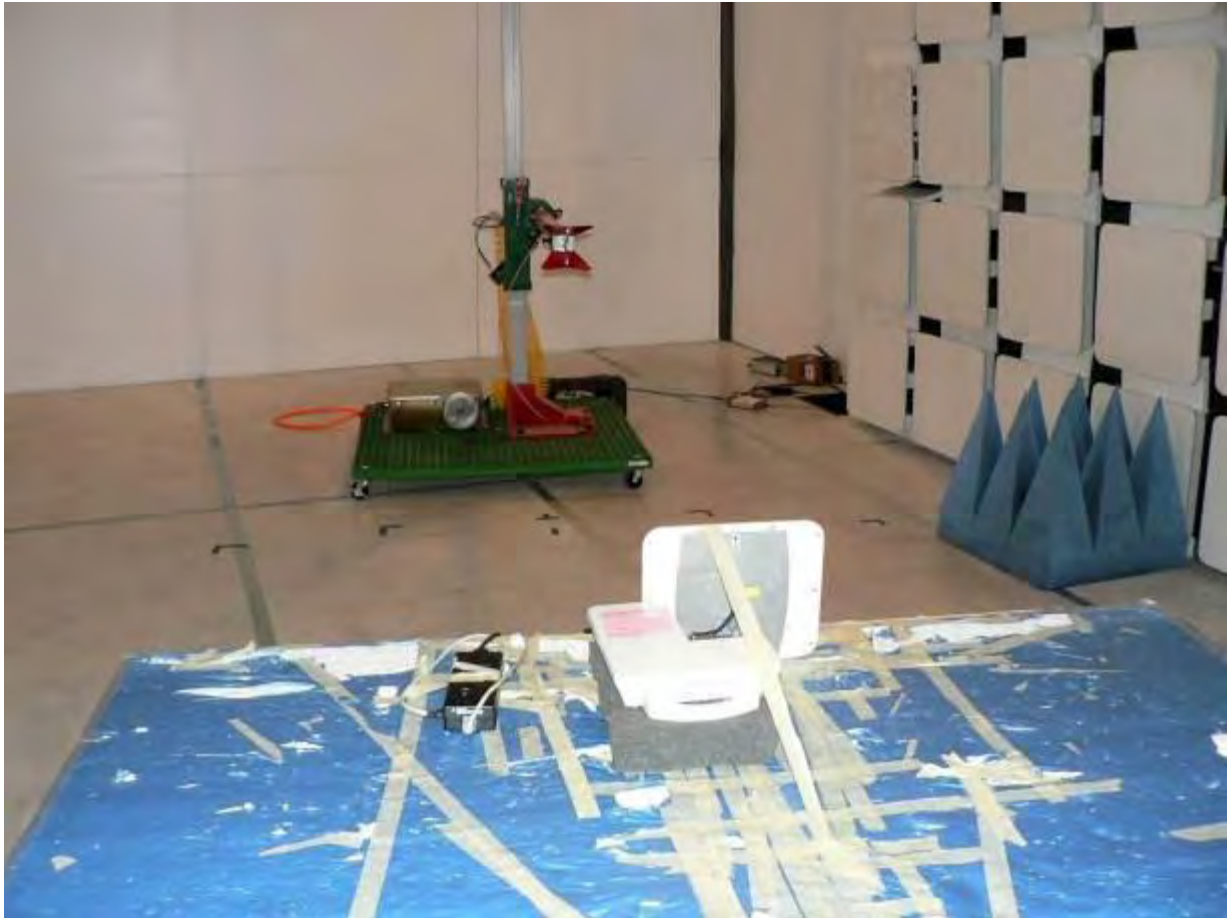

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


15.5 dBi Sector RW-9061-5002



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


16 dBi AM0111760

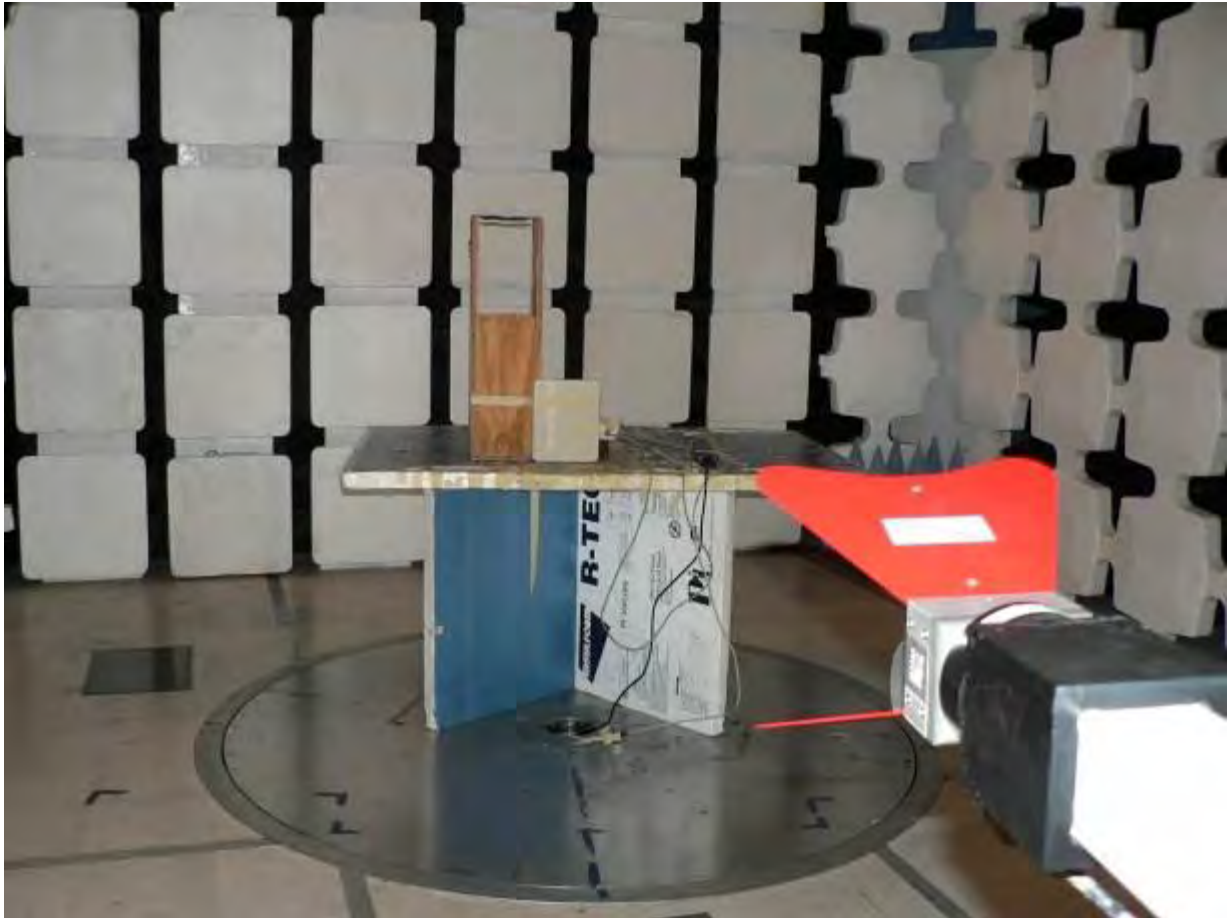

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


23 dBi ant MT0070760

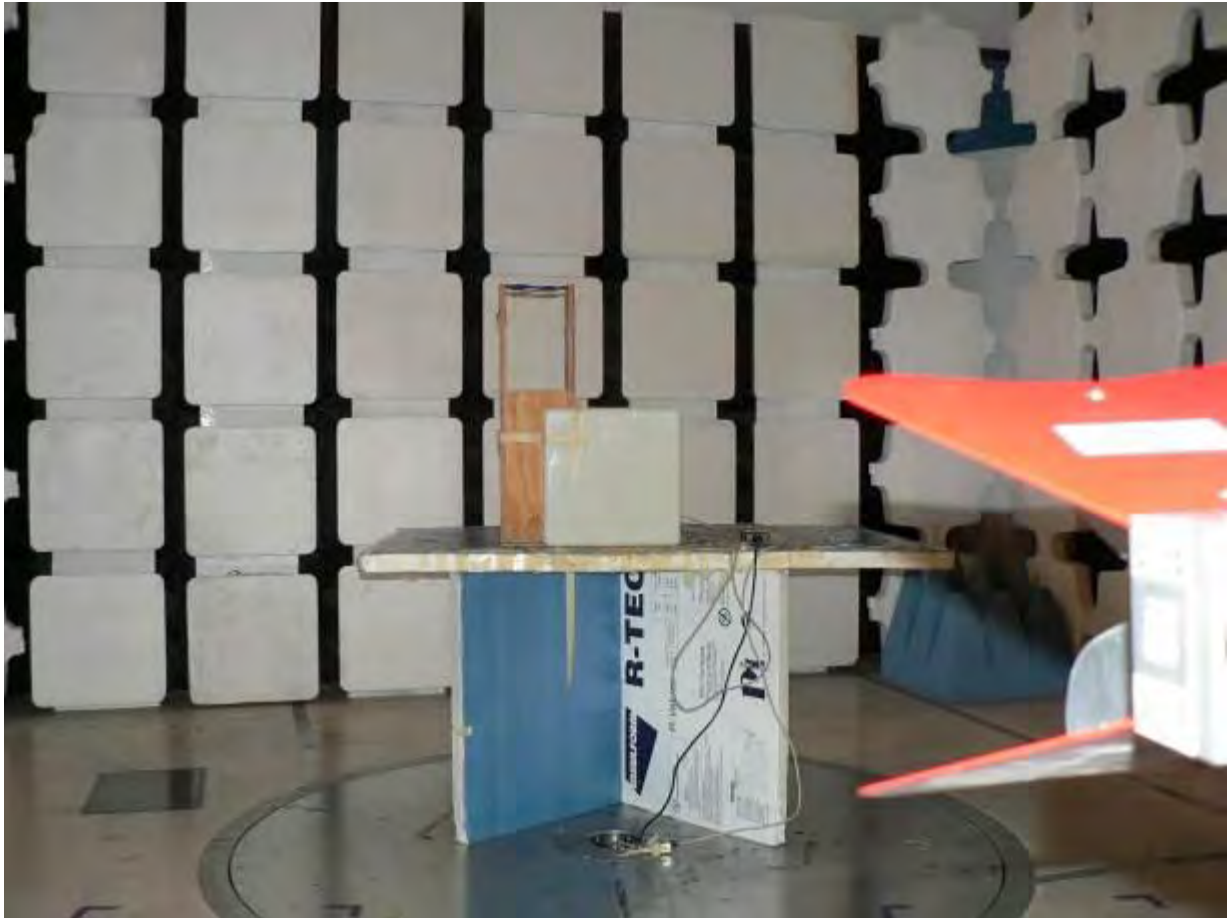

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


29 dBi Panel RW-9622-5001

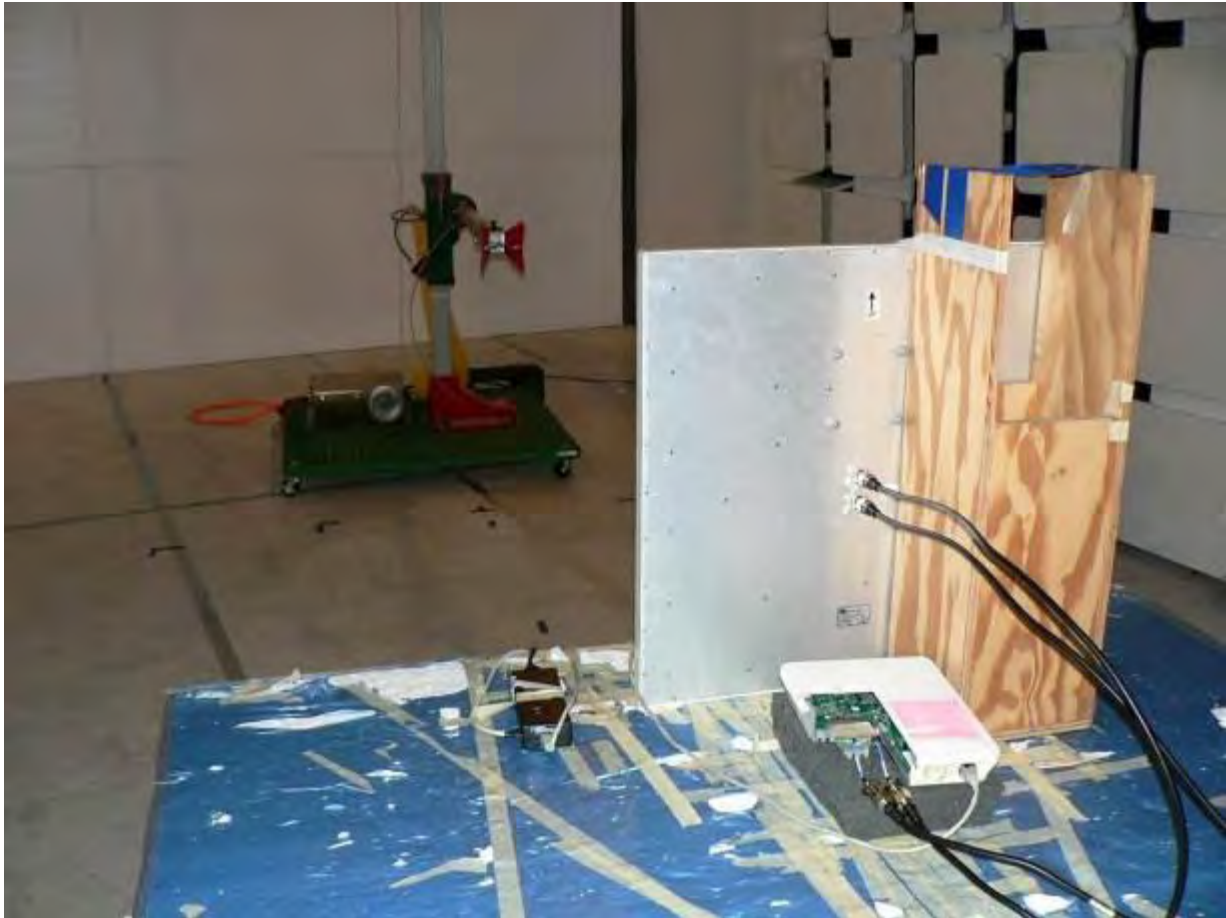

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

32 dBi Dish RW-9732-4958

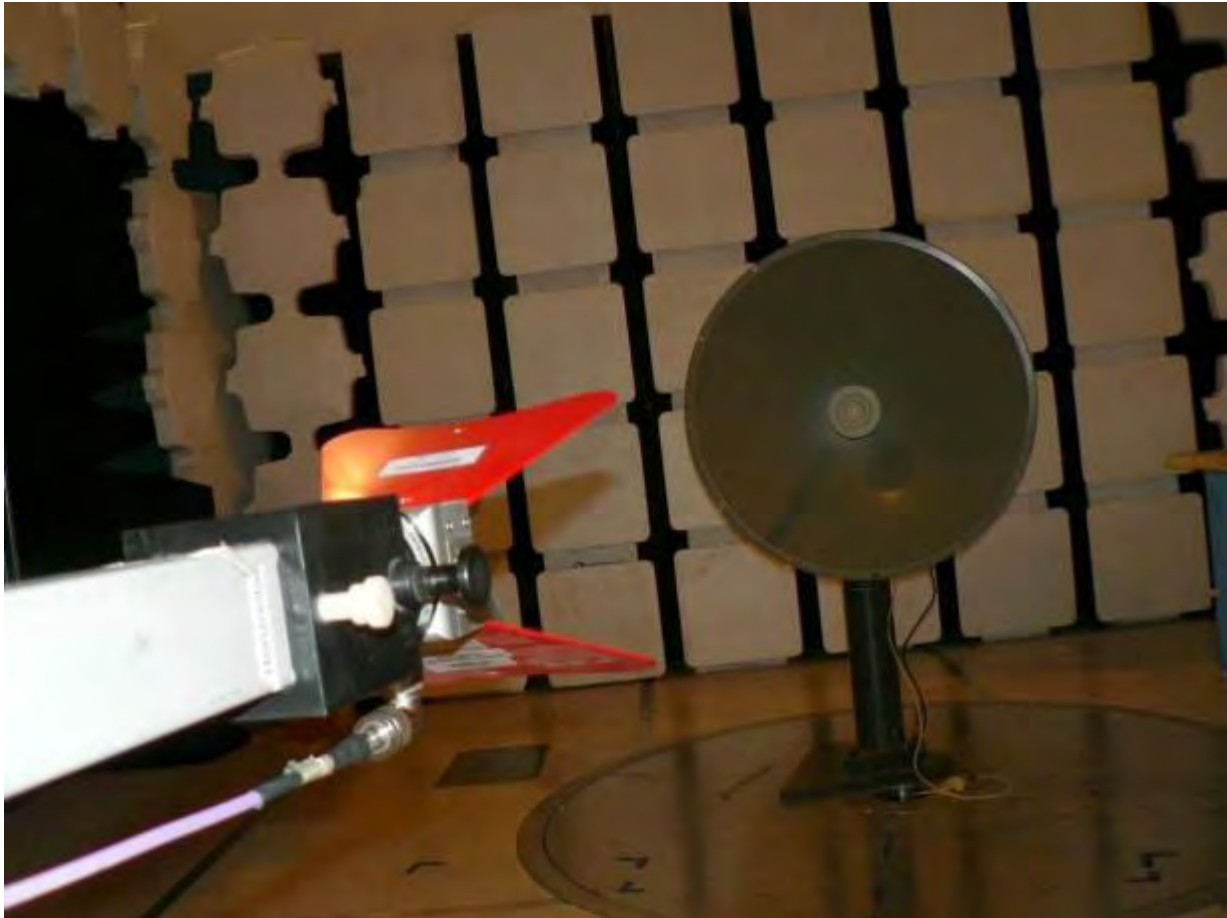


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 7.3. Radiated Emissions Test Setup <1 GHz

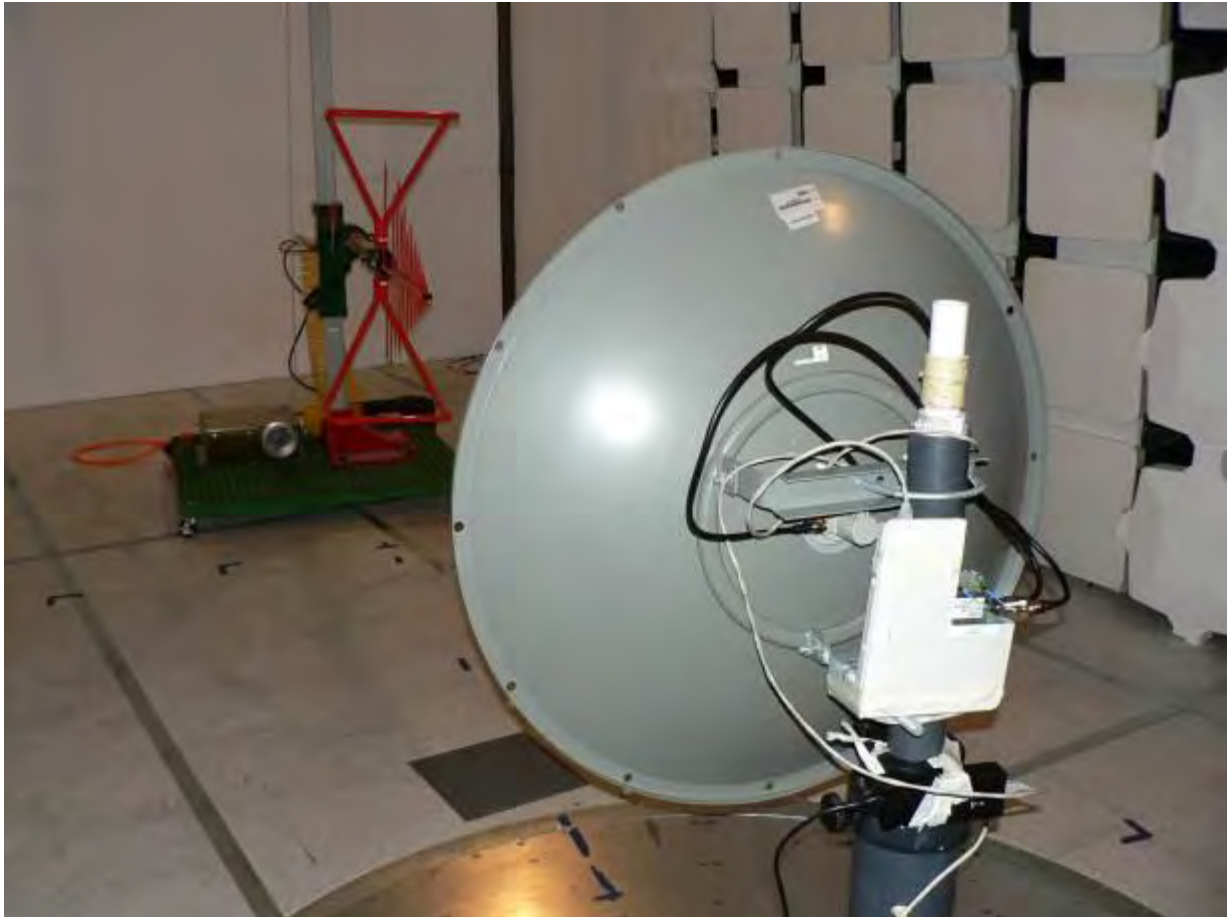

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

#### 7.4. ac Wireline Test Setup







**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 132 of 203

---

## **APPENDIX**

### **A. SUPPORTING INFORMATION**


#### **A.1. CONDUCTED TEST PLOTS**

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### A.1.1. 26 dB & 99% Bandwidth

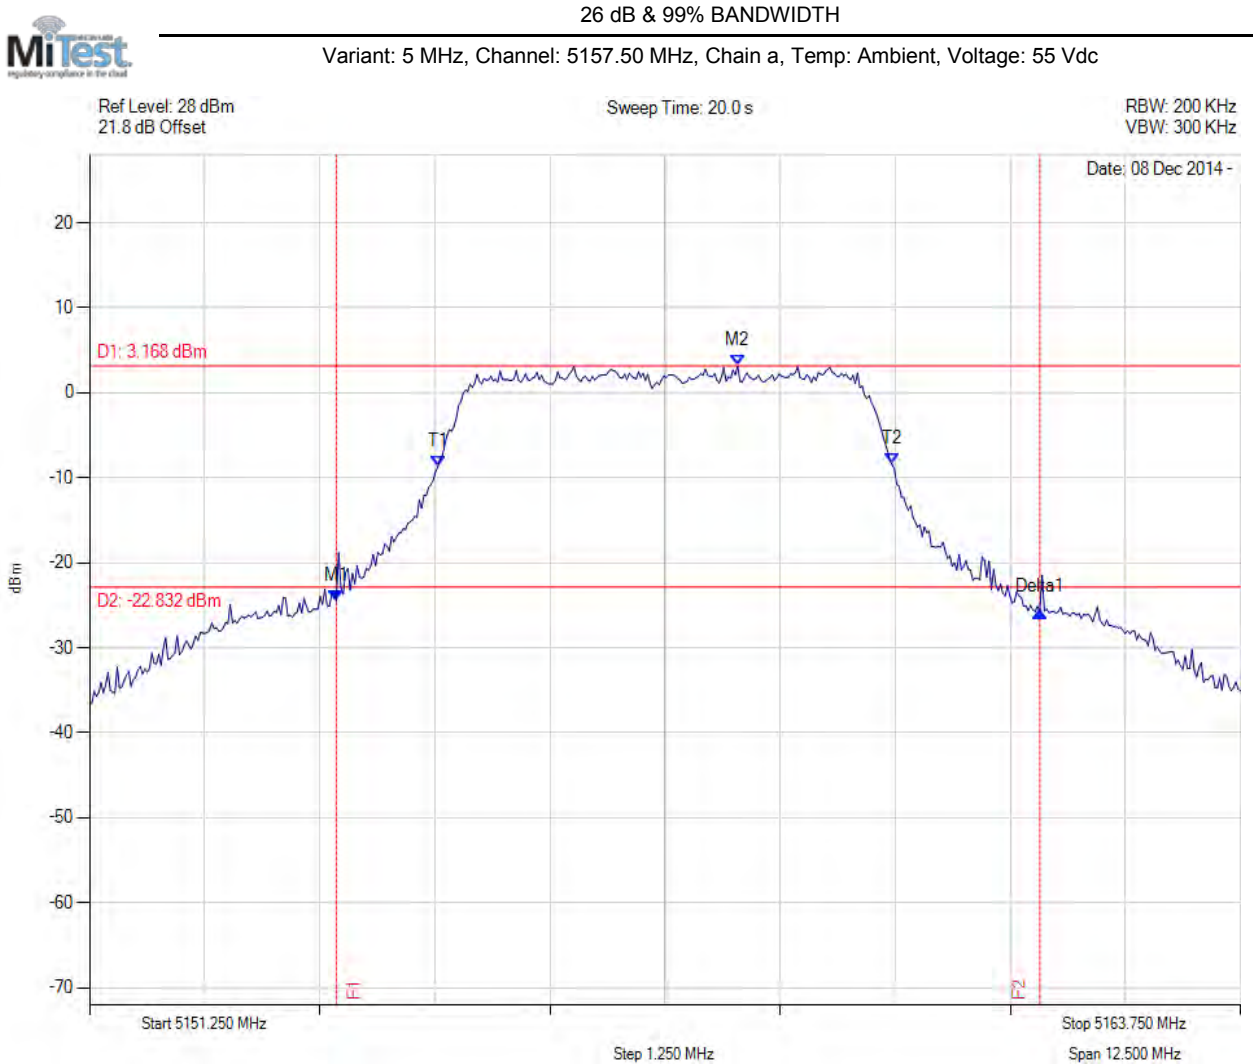

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5153.930 MHz : -24.509 dBm M2 : 5158.289 MHz : 3.168 dBm Delta1 : 7.640 MHz : -1.249 dB T1 : 5155.033 MHz : -8.711 dBm T2 : 5159.967 MHz : -8.414 dBm OBW : 4.935 MHz	Measured 26 dB Bandwidth: 7.640 MHz Measured 99% Bandwidth: 4.935 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variant: 5 MHz, Channel: 5157.50 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

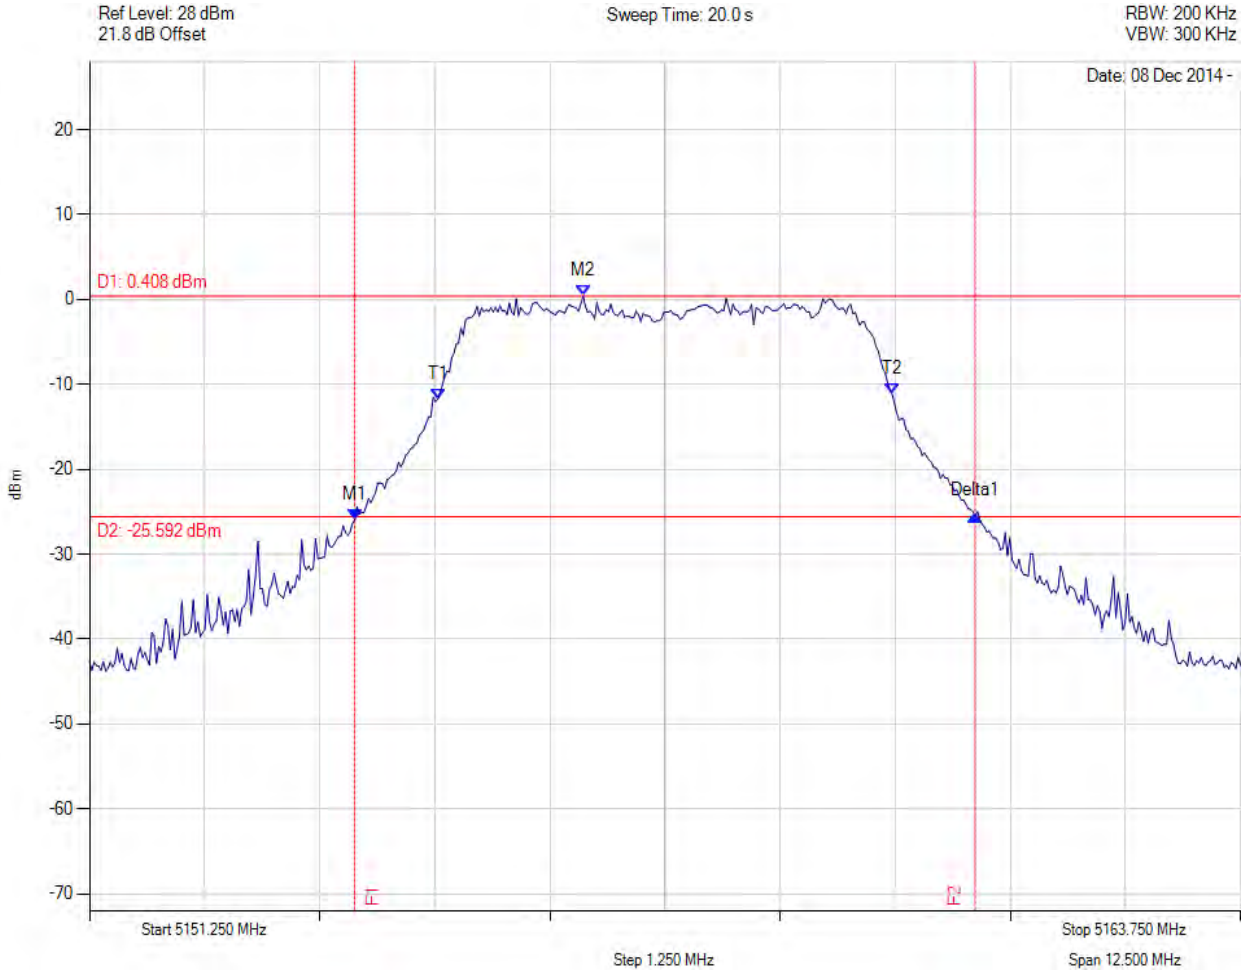

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5154.131 MHz : -25.937 dBm M2 : 5156.611 MHz : 0.408 dBm Delta1 : 6.738 MHz : 0.419 dB T1 : 5155.033 MHz : -11.699 dBm T2 : 5159.967 MHz : -11.158 dBm OBW : 4.935 MHz	Measured 26 dB Bandwidth: 6.738 MHz Measured 99% Bandwidth: 4.935 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variant: 5 MHz, Channel: 5200.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc

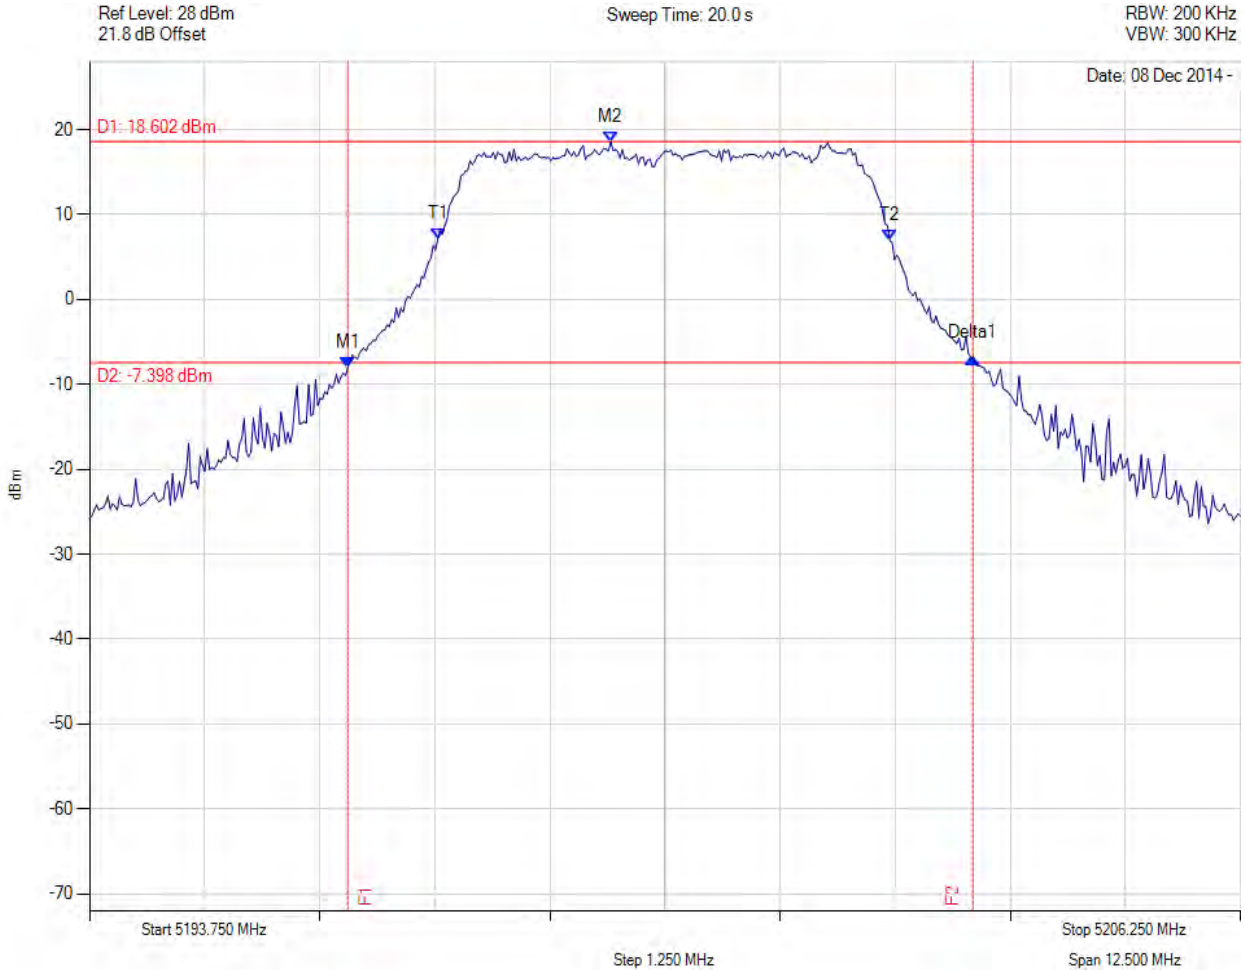

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5196.556 MHz : -7.969 dBm M2 : 5199.411 MHz : 18.602 dBm Delta1 : 6.789 MHz : 1.096 dB T1 : 5197.533 MHz : 7.176 dBm T2 : 5202.442 MHz : 6.898 dBm OBW : 4.910 MHz	Measured 26 dB Bandwidth: 6.789 MHz Measured 99% Bandwidth: 4.910 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variat: 5 MHz, Channel: 5200.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

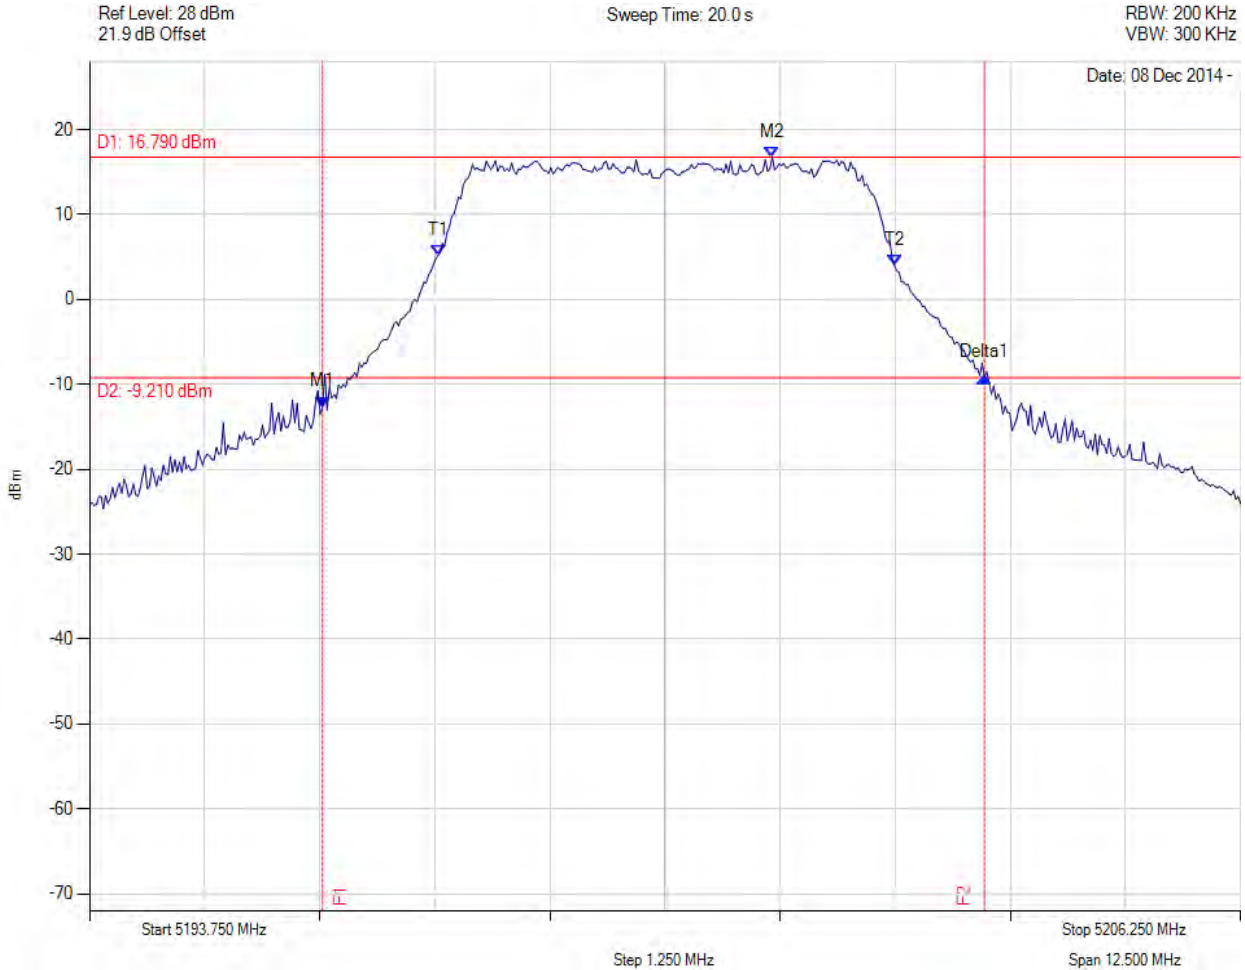

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5196.280 MHz : -12.655 dBm M2 : 5201.165 MHz : 16.790 dBm Delta1 : 7.189 MHz : 3.506 dB T1 : 5197.533 MHz : 5.141 dBm T2 : 5202.492 MHz : 4.002 dBm OBW : 4.960 MHz	Measured 26 dB Bandwidth: 7.189 MHz Measured 99% Bandwidth: 4.960 MHz

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






26 dB & 99% BANDWIDTH



Variant: 5 MHz, Channel: 5245.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc

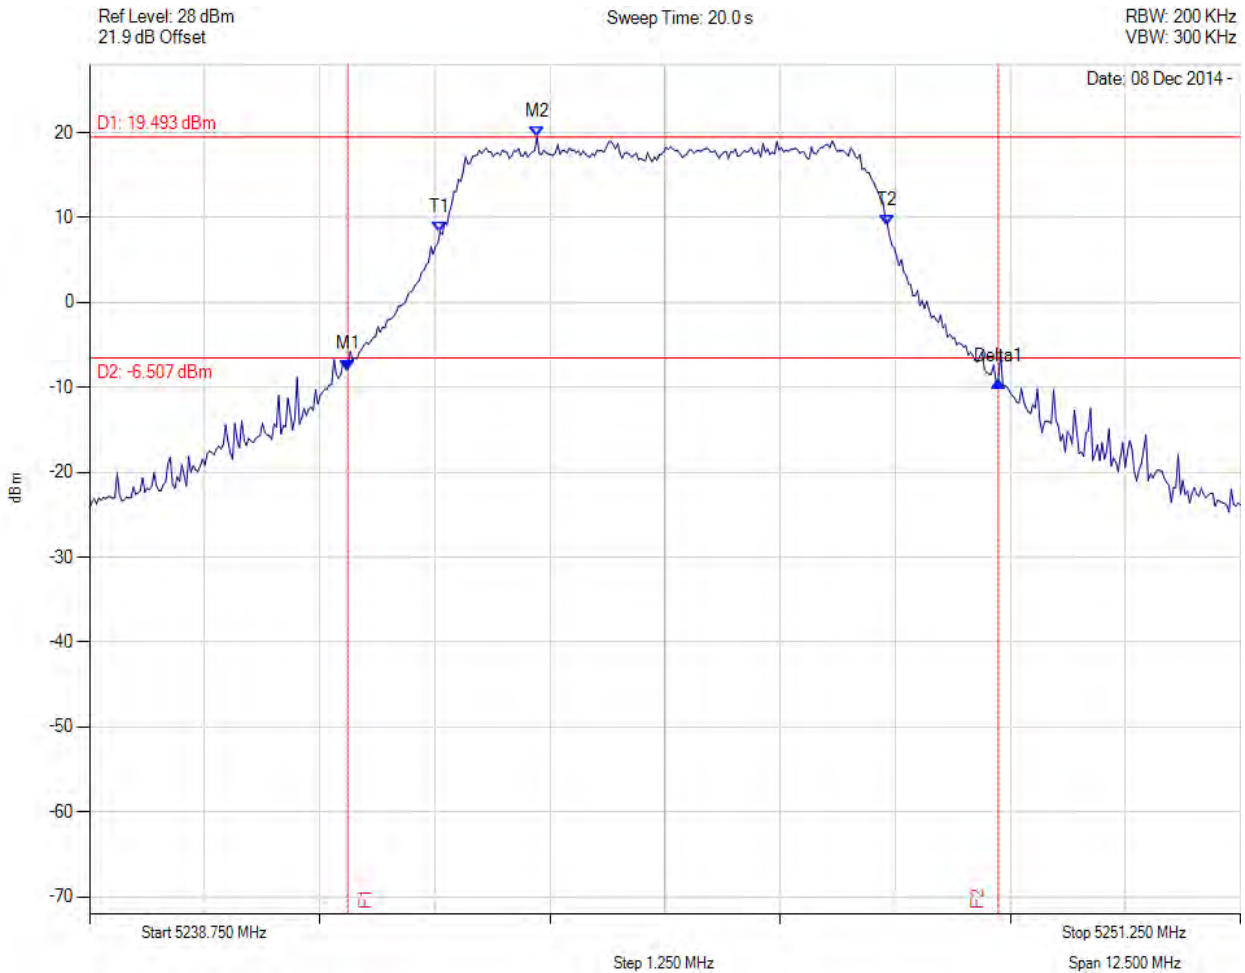

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5241.556 MHz : -7.944 dBm M2 : 5243.610 MHz : 19.493 dBm Delta1 : 7.064 MHz : -1.318 dB T1 : 5242.558 MHz : 8.311 dBm T2 : 5247.417 MHz : 9.086 dBm OBW : 4.860 MHz	Measured 26 dB Bandwidth: 7.064 MHz Measured 99% Bandwidth: 4.860 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variant: 5 MHz, Channel: 5245.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

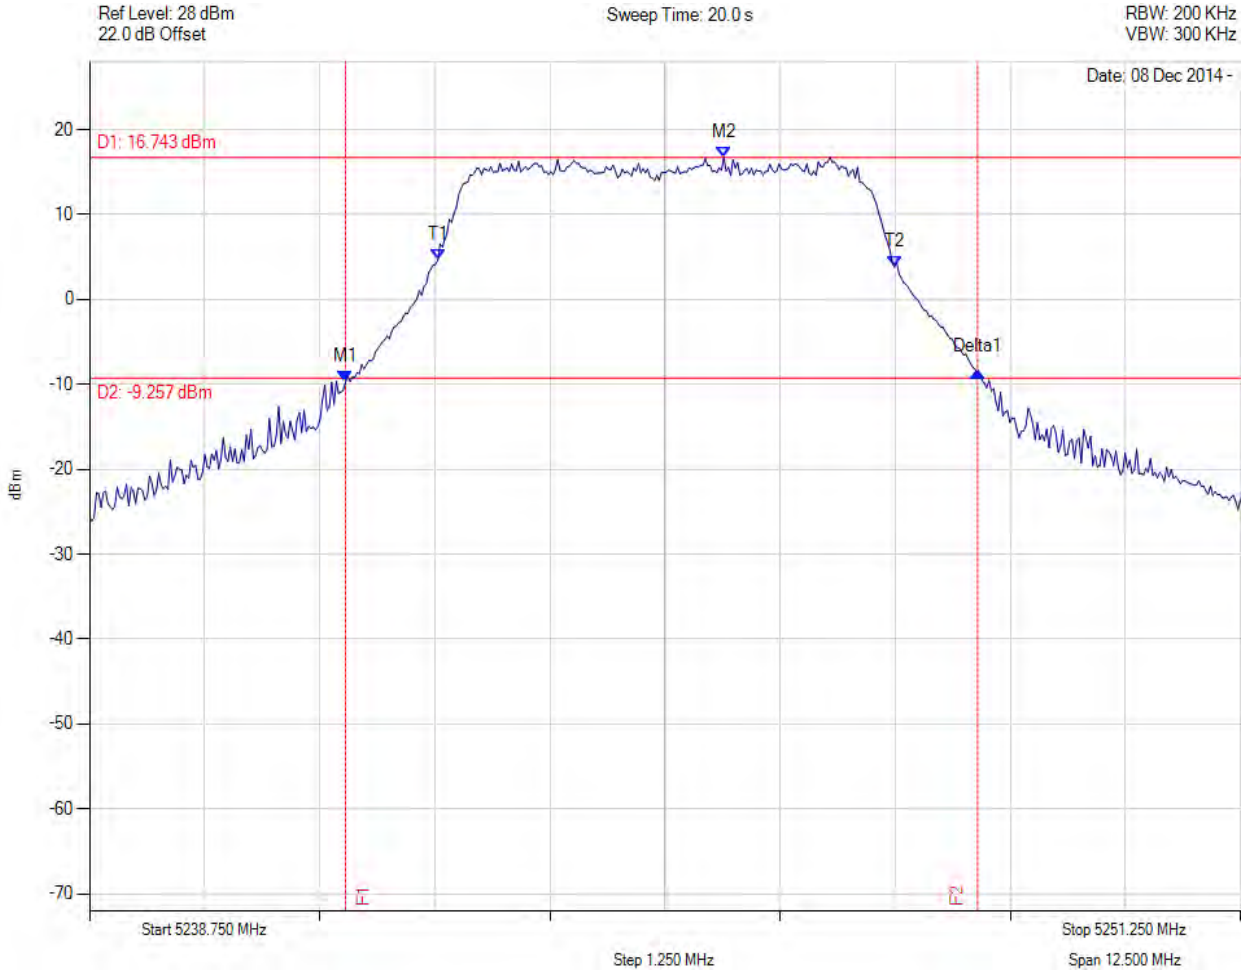

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5241.531 MHz : -9.691 dBm M2 : 5245.639 MHz : 16.743 dBm Delta1 : 6.864 MHz : 1.117 dB T1 : 5242.533 MHz : 4.653 dBm T2 : 5247.492 MHz : 3.853 dBm OBW : 4.960 MHz	Measured 26 dB Bandwidth: 6.864 MHz Measured 99% Bandwidth: 4.960 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variants: 10 MHz, Channel: 5162.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc

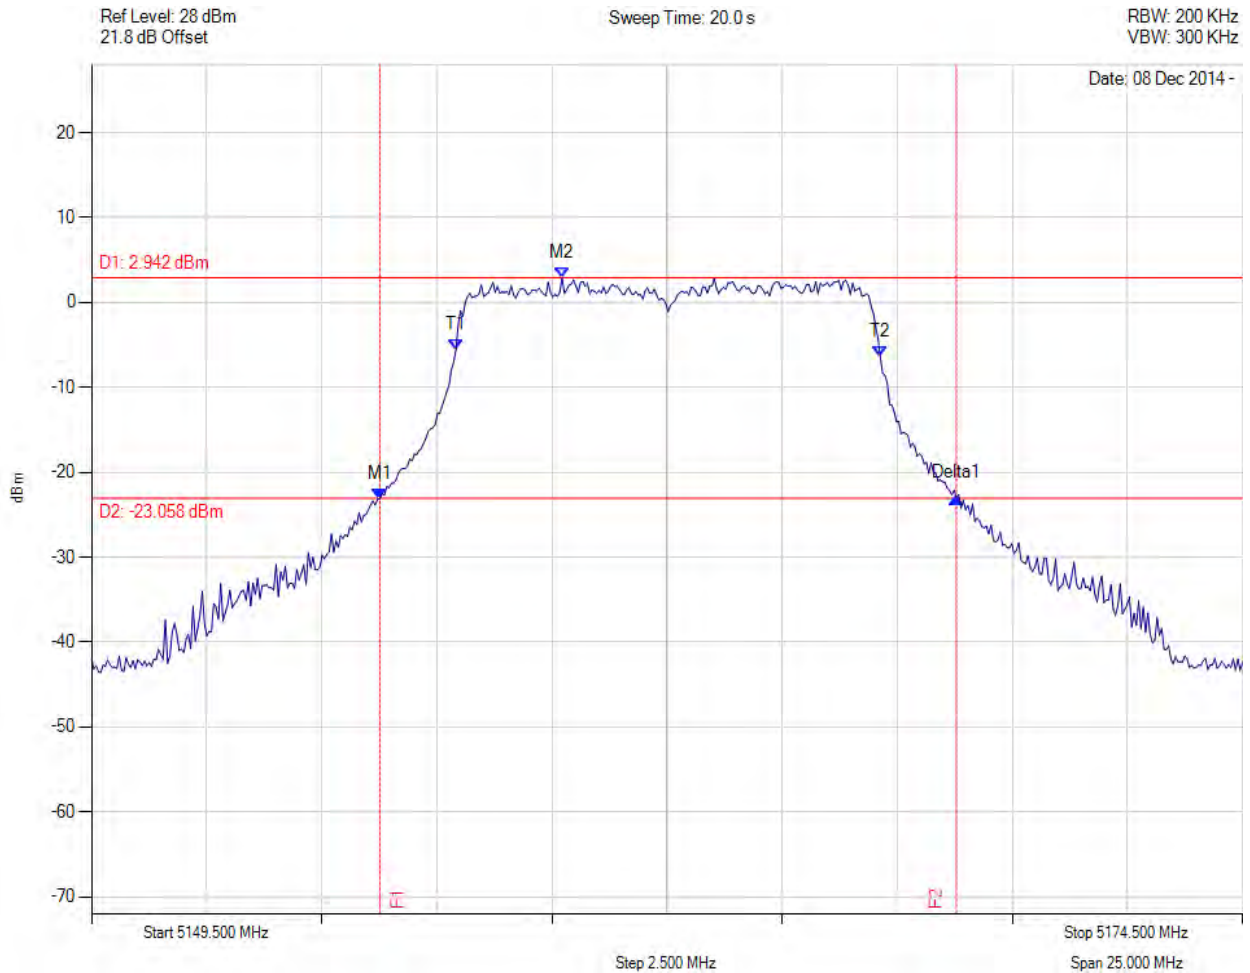

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5155.763 MHz : -23.096 dBm M2 : 5159.720 MHz : 2.942 dBm Delta1 : 12.525 MHz : 0.031 dB T1 : 5157.416 MHz : -5.534 dBm T2 : 5166.634 MHz : -6.452 dBm OBW : 9.218 MHz	Measured 26 dB Bandwidth: 12.525 MHz Measured 99% Bandwidth: 9.218 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variants: 10 MHz, Channel: 5162.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

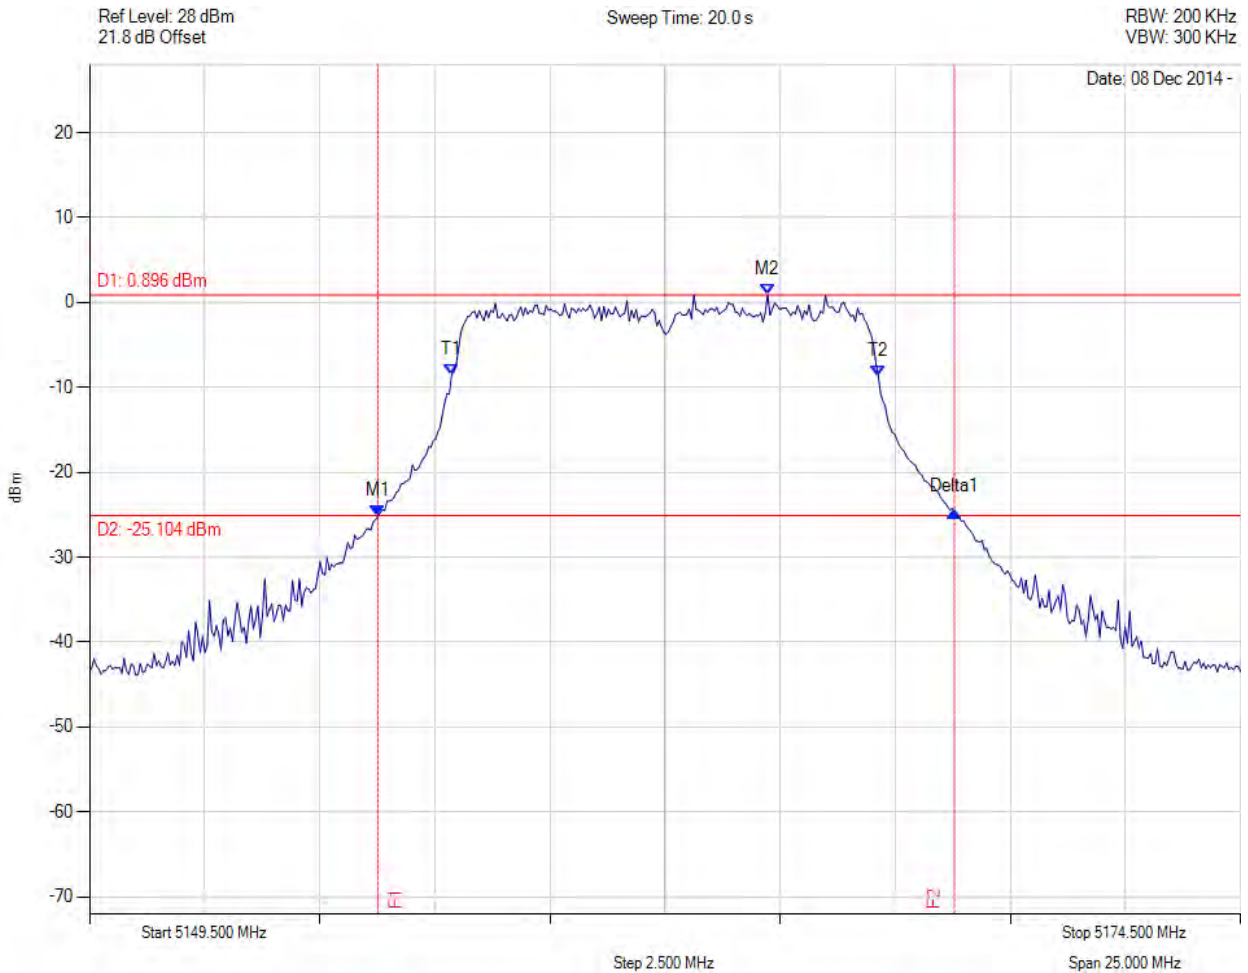

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5155.763 MHz : -25.126 dBm M2 : 5164.229 MHz : 0.896 dBm Delta1 : 12.525 MHz : 0.482 dB T1 : 5157.366 MHz : -8.522 dBm T2 : 5166.634 MHz : -8.673 dBm OBW : 9.269 MHz	Measured 26 dB Bandwidth: 12.525 MHz Measured 99% Bandwidth: 9.269 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variant: 10 MHz, Channel: 5200.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc

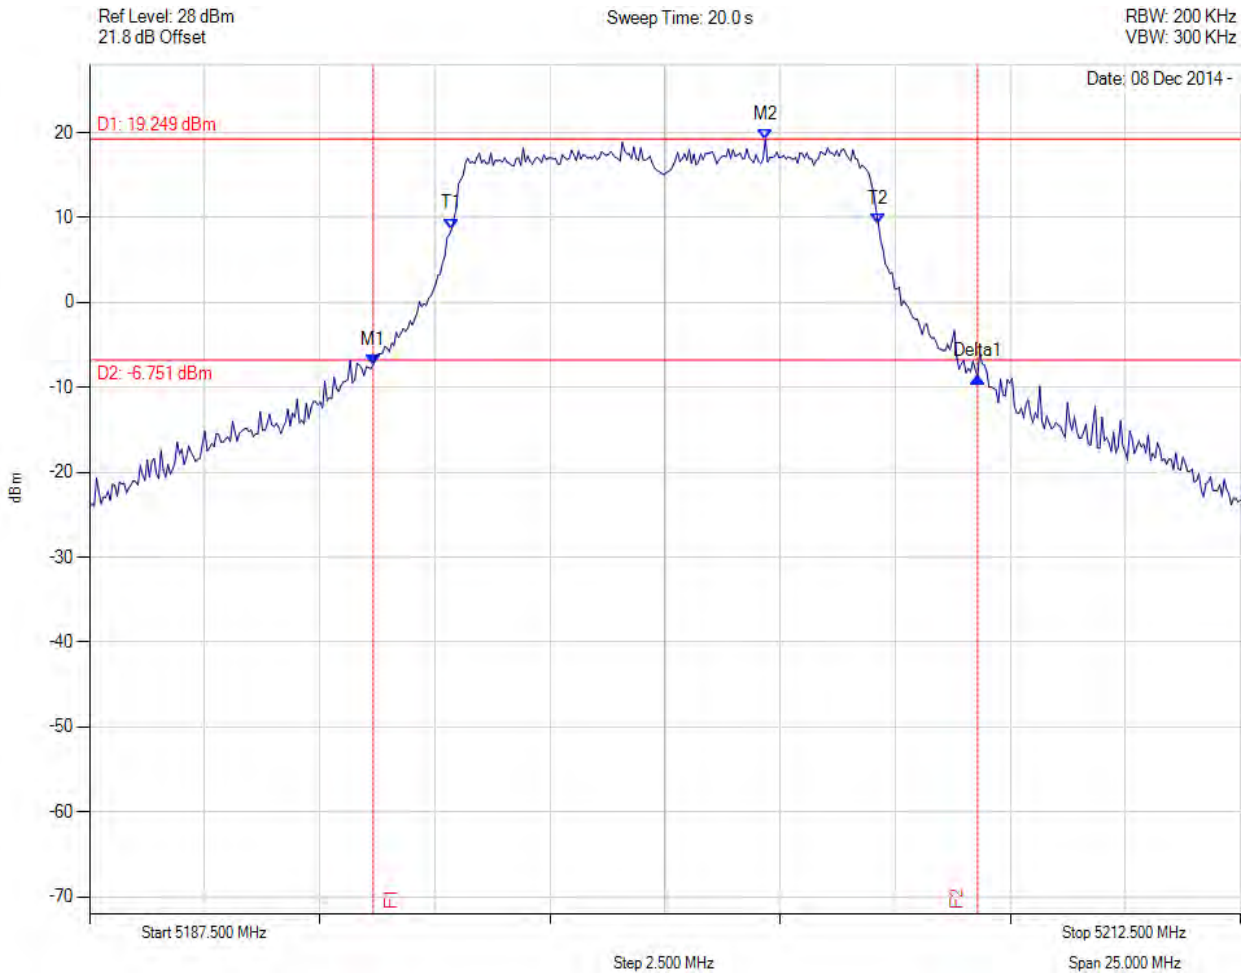

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5193.662 MHz : -7.312 dBm M2 : 5202.179 MHz : 19.249 dBm Delta1 : 13.126 MHz : -1.448 dB T1 : 5195.366 MHz : 8.673 dBm T2 : 5204.634 MHz : 9.288 dBm OBW : 9.269 MHz	Measured 26 dB Bandwidth: 13.126 MHz Measured 99% Bandwidth: 9.269 MHz


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variants: 10 MHz, Channel: 5200.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

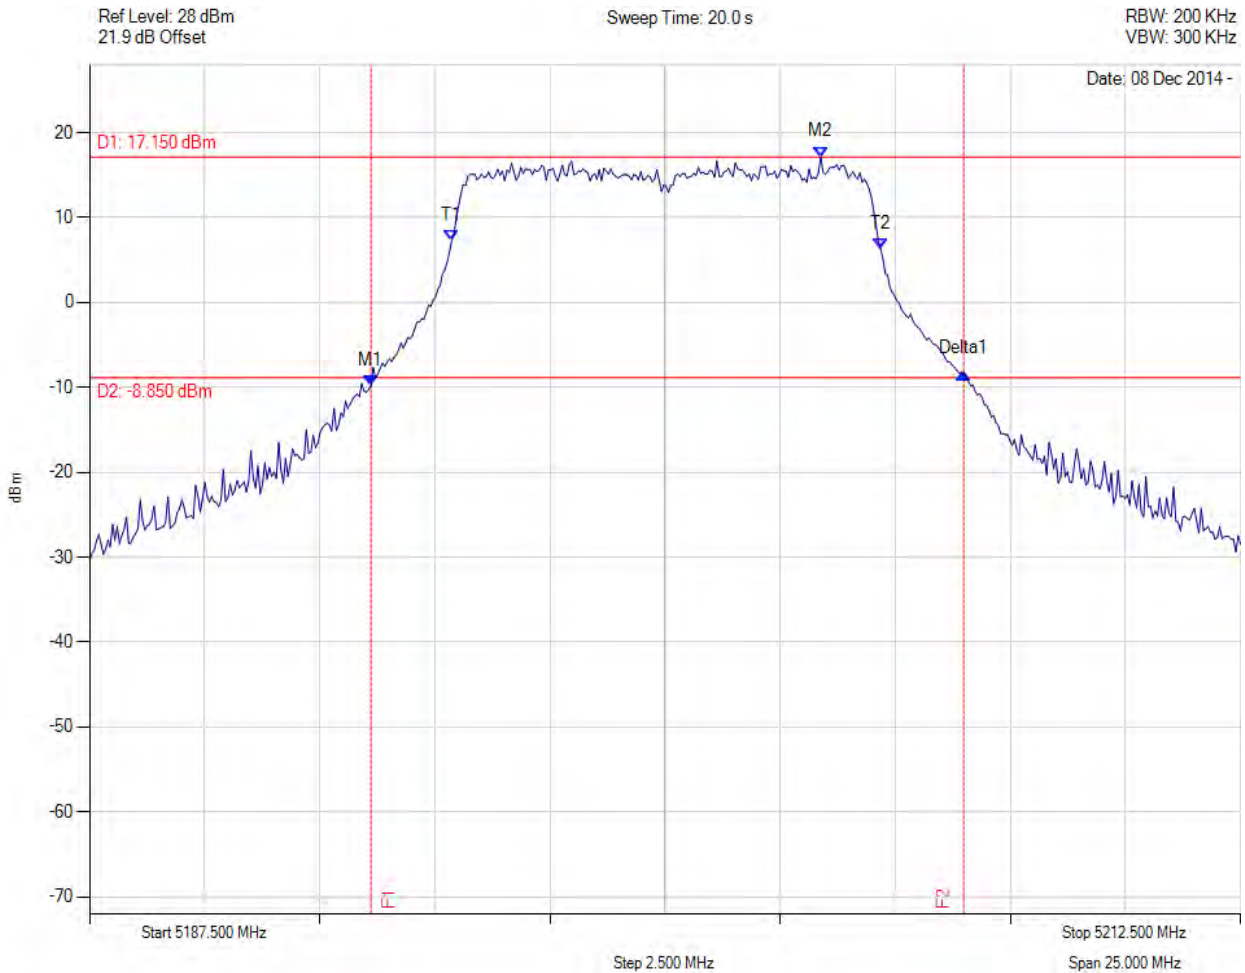

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5193.612 MHz : -9.822 dBm M2 : 5203.382 MHz : 17.150 dBm Delta1 : 12.876 MHz : 1.527 dB T1 : 5195.366 MHz : 7.311 dBm T2 : 5204.684 MHz : 6.314 dBm OBW : 9.319 MHz	Measured 26 dB Bandwidth: 12.876 MHz Measured 99% Bandwidth: 9.319 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variants: 10 MHz, Channel: 5245.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc

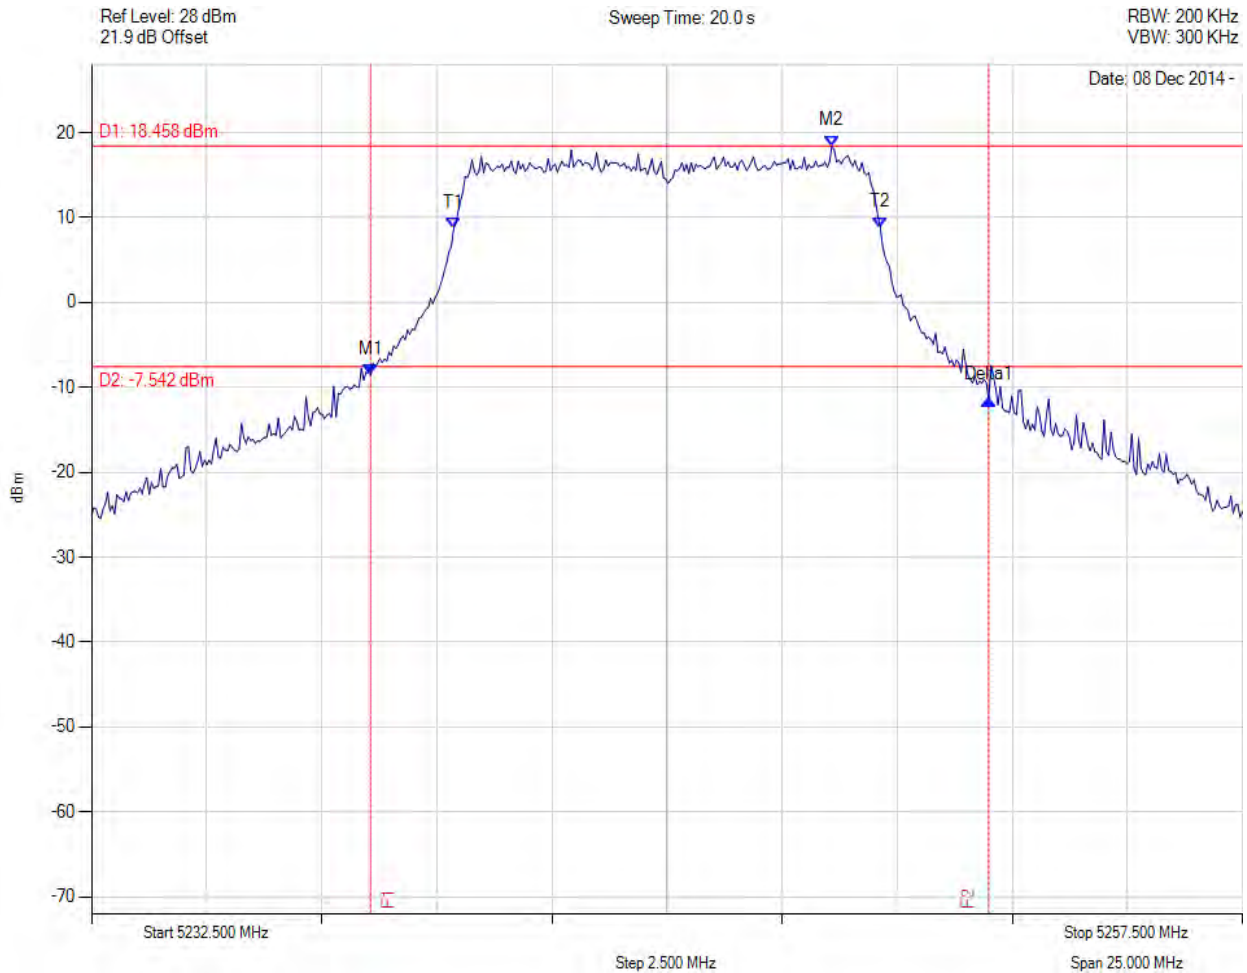

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5238.562 MHz : -8.518 dBm M2 : 5248.582 MHz : 18.458 dBm Delta1 : 13.427 MHz : -2.853 dB T1 : 5240.366 MHz : 8.704 dBm T2 : 5249.634 MHz : 8.832 dBm OBW : 9.269 MHz	Measured 26 dB Bandwidth: 13.427 MHz Measured 99% Bandwidth: 9.269 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variants: 10 MHz, Channel: 5245.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

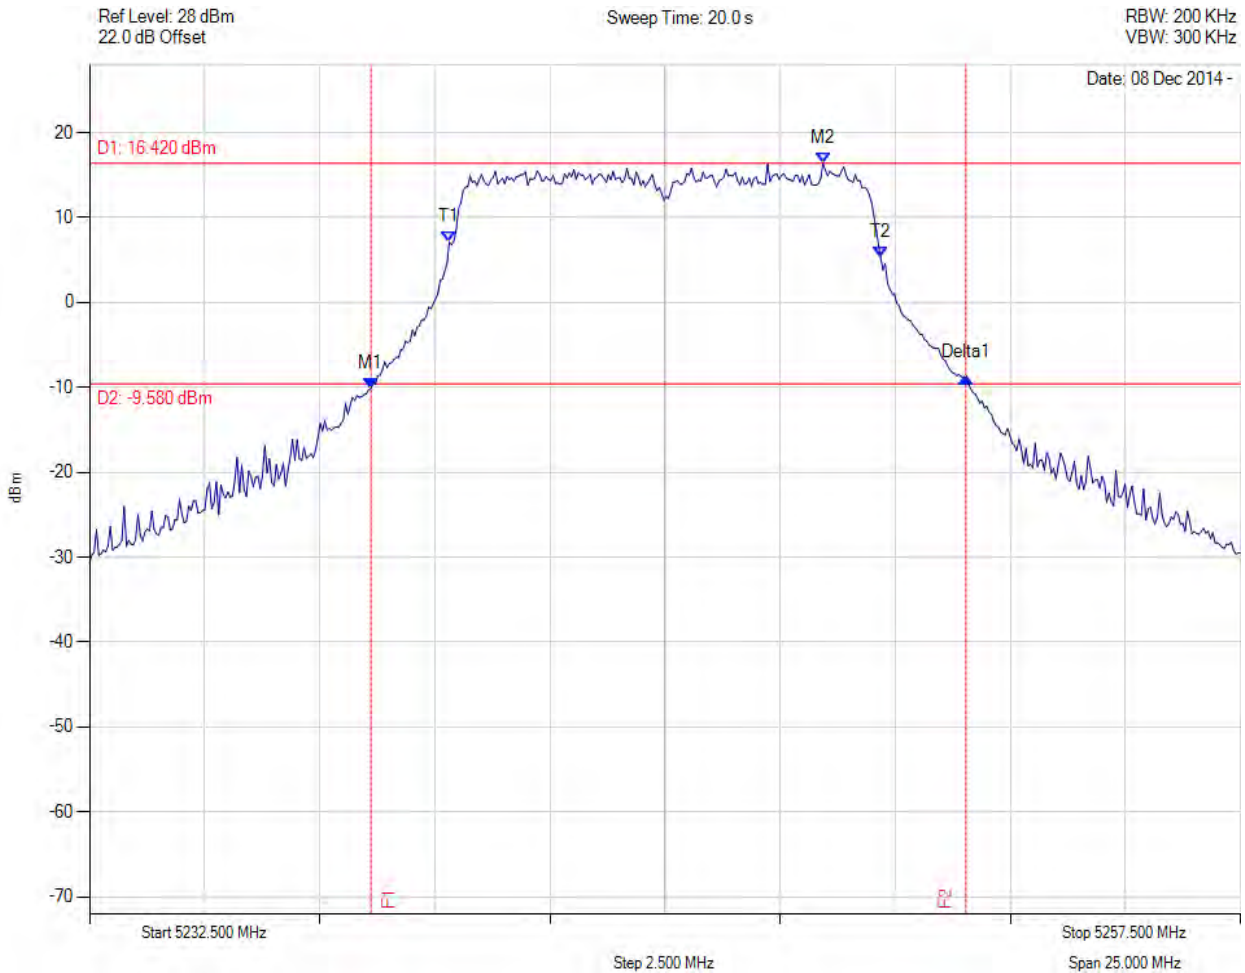

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5238.612 MHz : -10.137 dBm M2 : 5248.432 MHz : 16.420 dBm Delta1 : 12.926 MHz : 1.261 dB T1 : 5240.316 MHz : 7.130 dBm T2 : 5249.684 MHz : 5.293 dBm OBW : 9.369 MHz	Measured 26 dB Bandwidth: 12.926 MHz Measured 99% Bandwidth: 9.369 MHz

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






26 dB & 99% BANDWIDTH



Variants: 20 MHz, Channel: 5165.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc

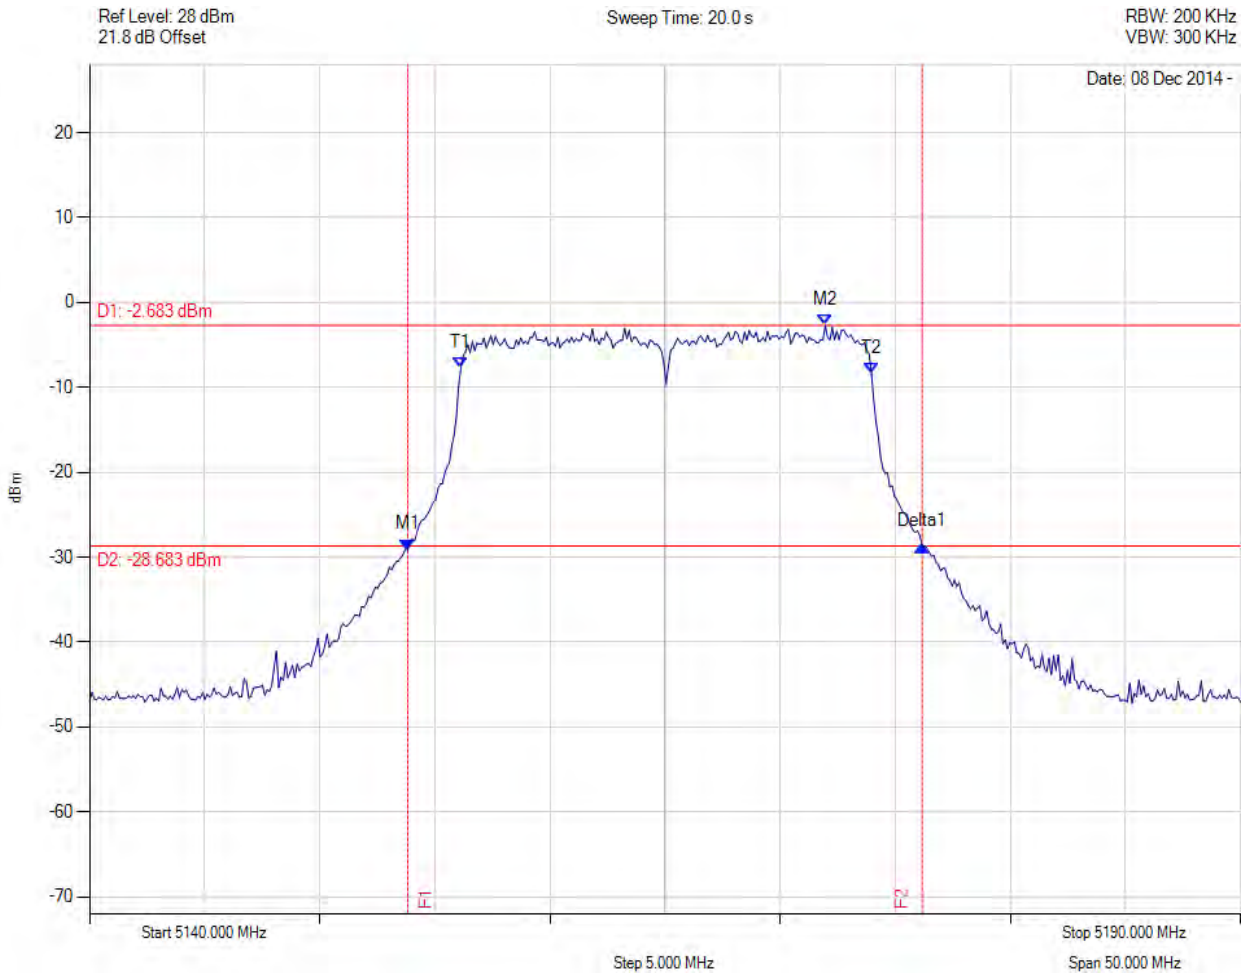

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5153.828 MHz : -29.122 dBm M2 : 5171.964 MHz : -2.683 dBm Delta1 : 22.345 MHz : 0.451 dB T1 : 5156.132 MHz : -7.650 dBm T2 : 5173.968 MHz : -8.398 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth: 22.345 MHz Measured 99% Bandwidth: 17.836 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variants: 20 MHz, Channel: 5165.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

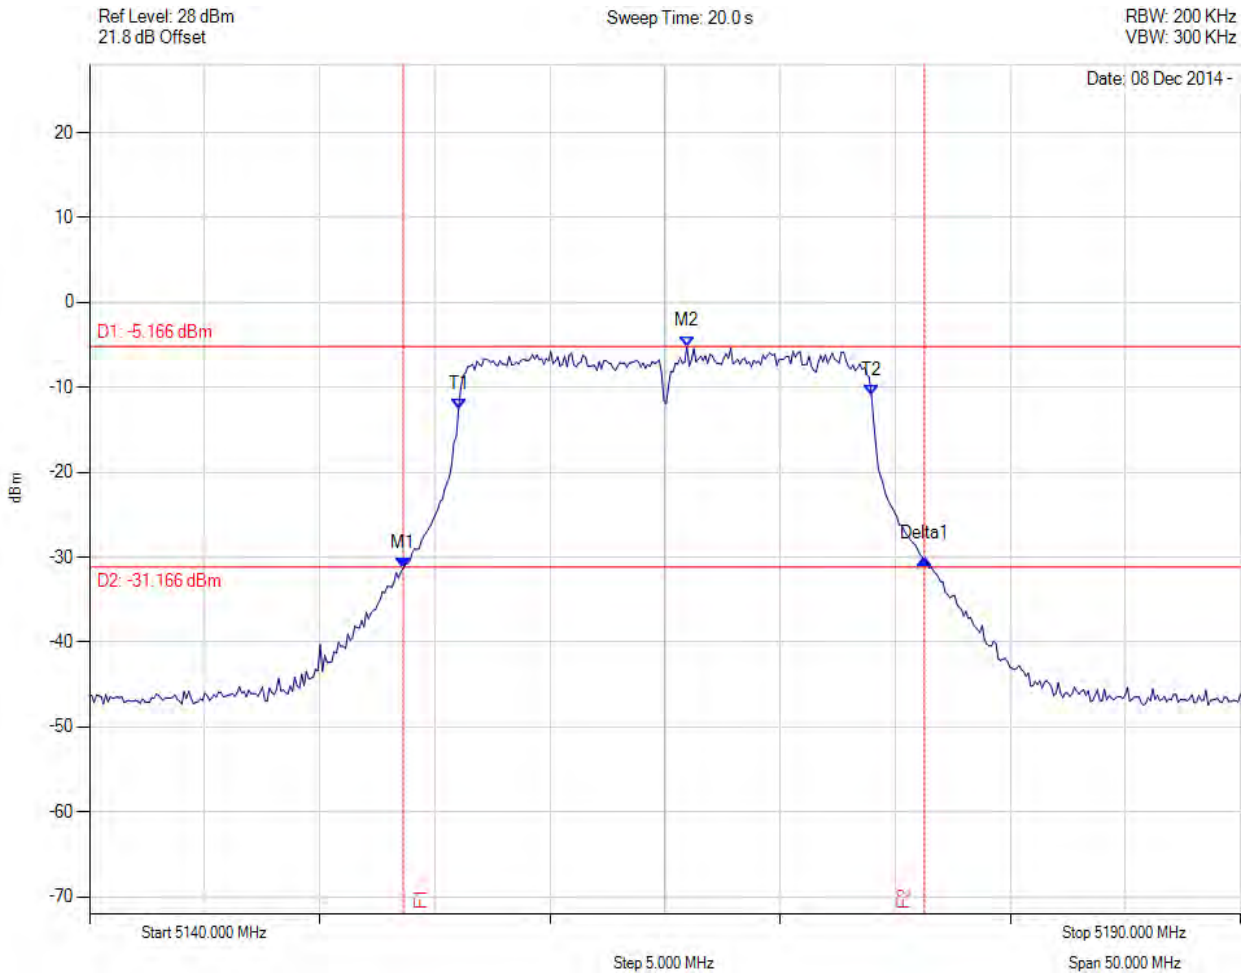

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5153.627 MHz : -31.292 dBm M2 : 5165.952 MHz : -5.166 dBm Delta1 : 22.645 MHz : 1.139 dB T1 : 5156.032 MHz : -12.585 dBm T2 : 5173.968 MHz : -10.958 dBm OBW : 17.936 MHz	Measured 26 dB Bandwidth: 22.645 MHz Measured 99% Bandwidth: 17.936 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variant: 20 MHz, Channel: 5200.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc

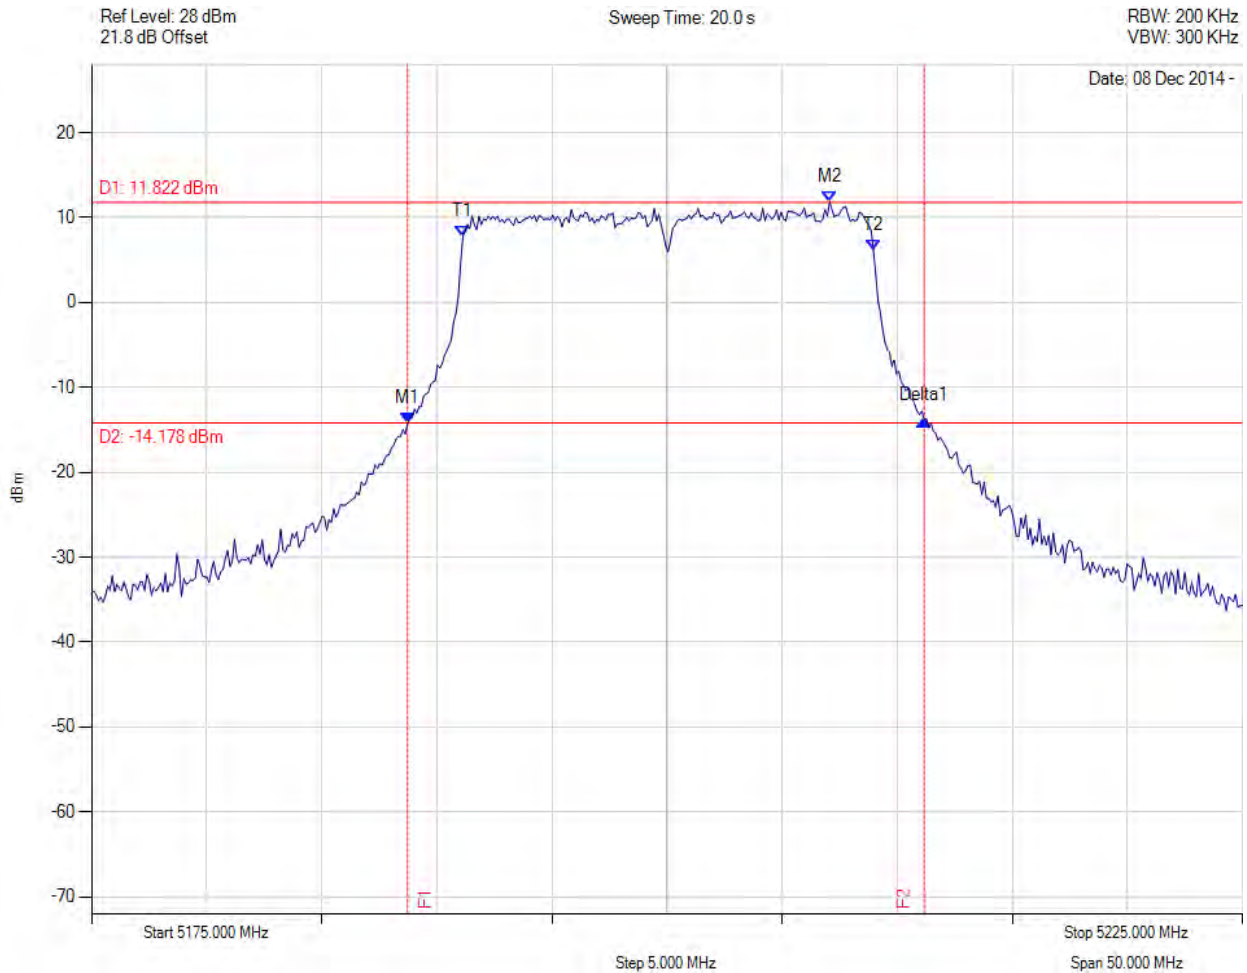

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5188.727 MHz : -14.239 dBm M2 : 5207.064 MHz : 11.822 dBm Delta1 : 22.445 MHz : 0.401 dB T1 : 5191.132 MHz : 7.811 dBm T2 : 5208.968 MHz : 6.131 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth: 22.445 MHz Measured 99% Bandwidth: 17.836 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variants: 20 MHz, Channel: 5200.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

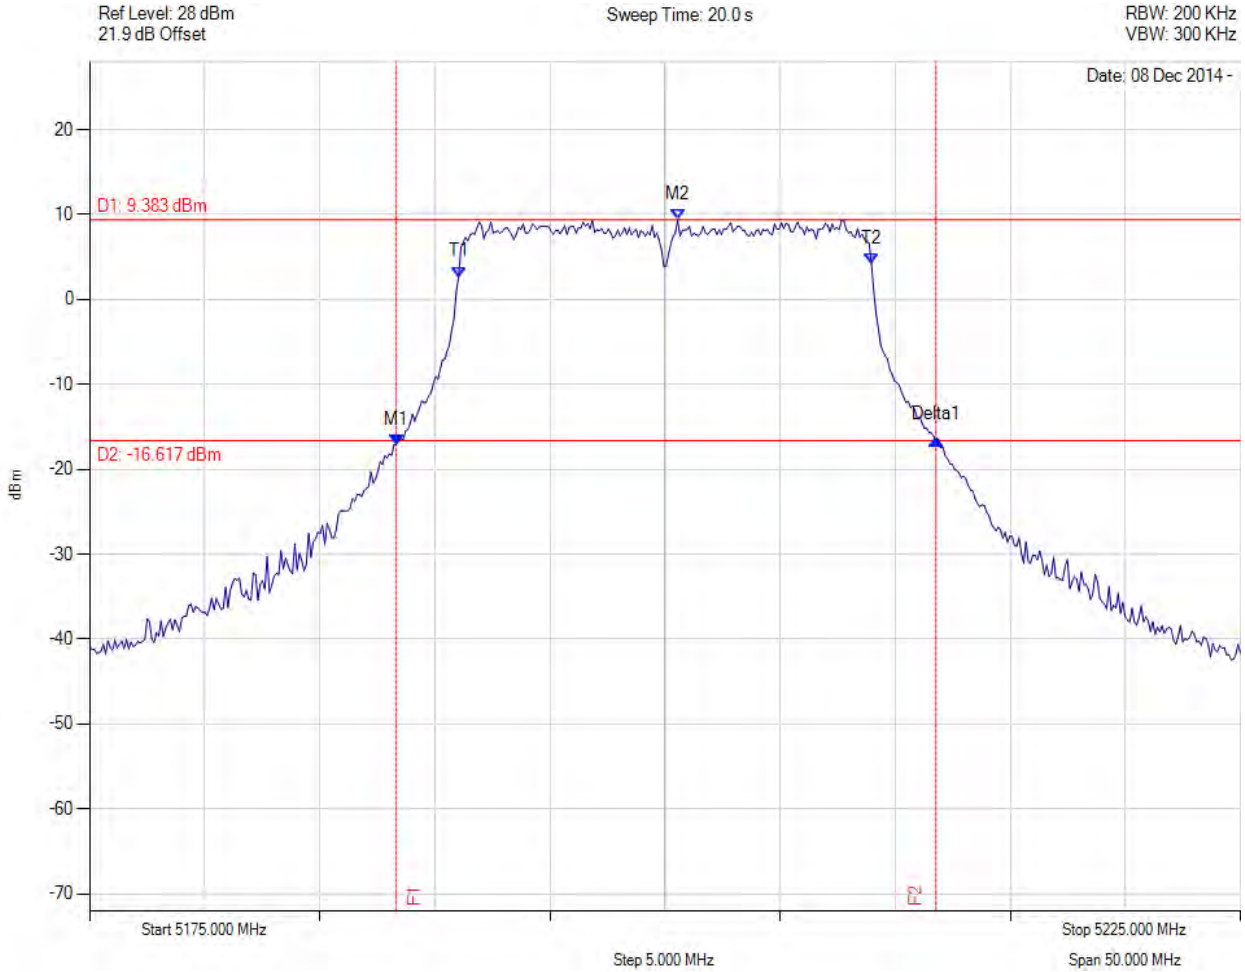

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5188.327 MHz : -17.070 dBm M2 : 5200.551 MHz : 9.383 dBm Delta1 : 23.447 MHz : 0.543 dB T1 : 5191.032 MHz : 2.655 dBm T2 : 5208.968 MHz : 4.230 dBm OBW : 17.936 MHz	Measured 26 dB Bandwidth: 23.447 MHz Measured 99% Bandwidth: 17.936 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variants: 20 MHz, Channel: 5240.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc

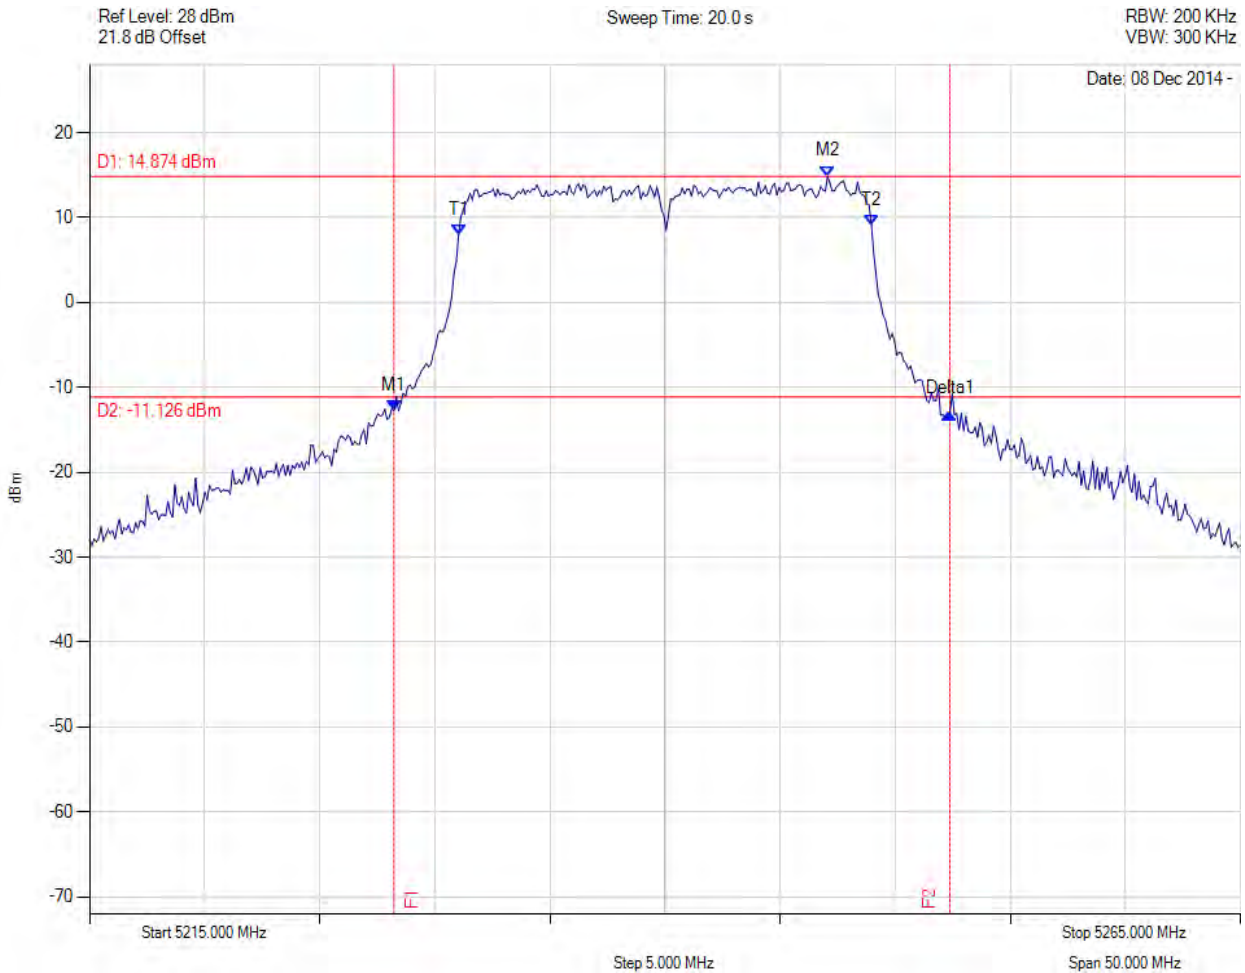

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5228.226 MHz : -12.683 dBm M2 : 5247.064 MHz : 14.874 dBm Delta1 : 24.148 MHz : -0.409 dB T1 : 5231.032 MHz : 7.998 dBm T2 : 5248.968 MHz : 9.133 dBm OBW : 17.936 MHz	Measured 26 dB Bandwidth: 24.148 MHz Measured 99% Bandwidth: 17.936 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variants: 20 MHz, Channel: 5240.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

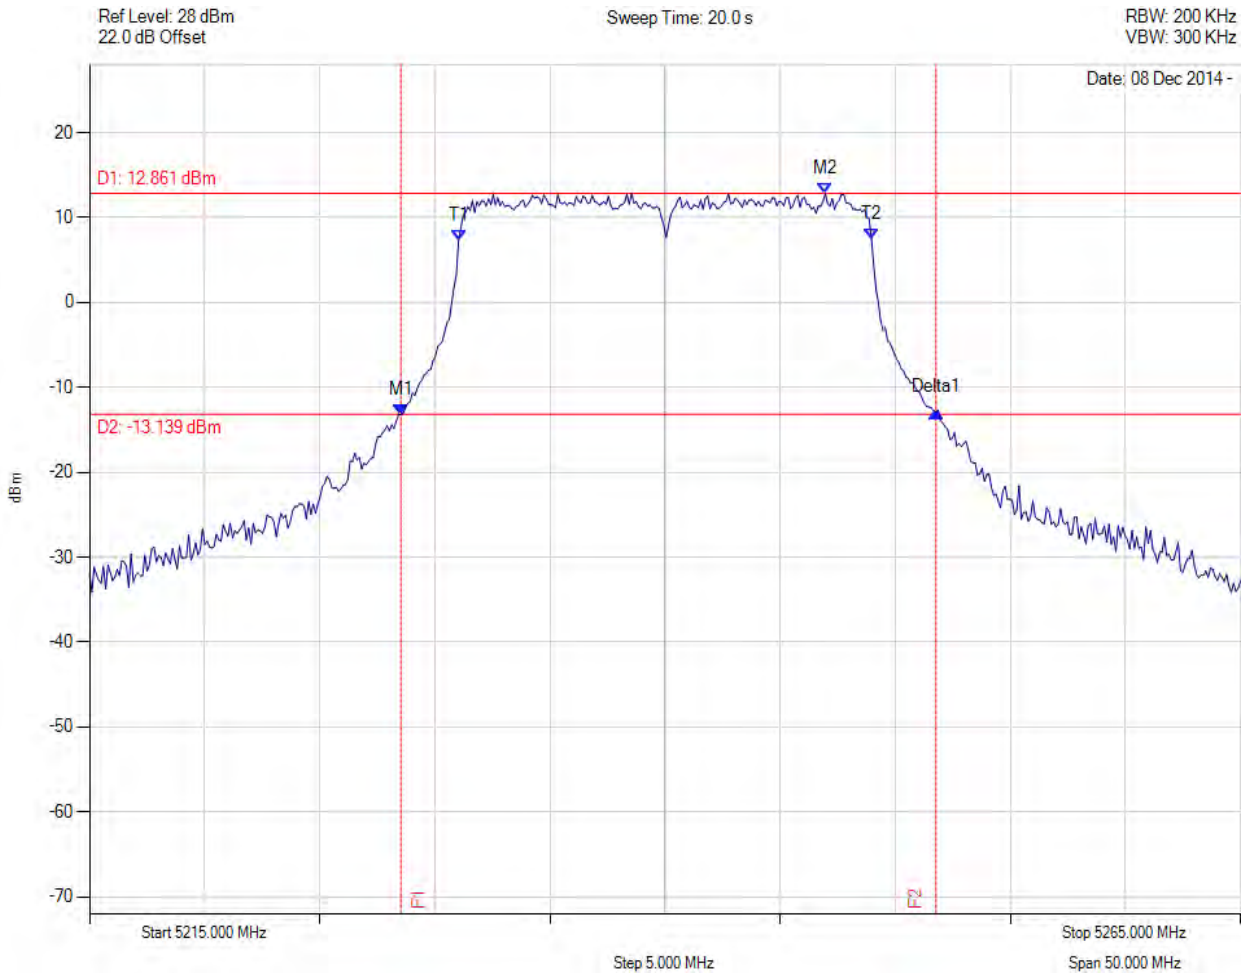

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5228.527 MHz : -13.214 dBm M2 : 5246.964 MHz : 12.861 dBm Delta1 : 23.246 MHz : 0.376 dB T1 : 5231.032 MHz : 7.319 dBm T2 : 5248.968 MHz : 7.508 dBm OBW : 17.936 MHz	Measured 26 dB Bandwidth: 23.246 MHz Measured 99% Bandwidth: 17.936 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variants: 40 MHz, Channel: 5172.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc

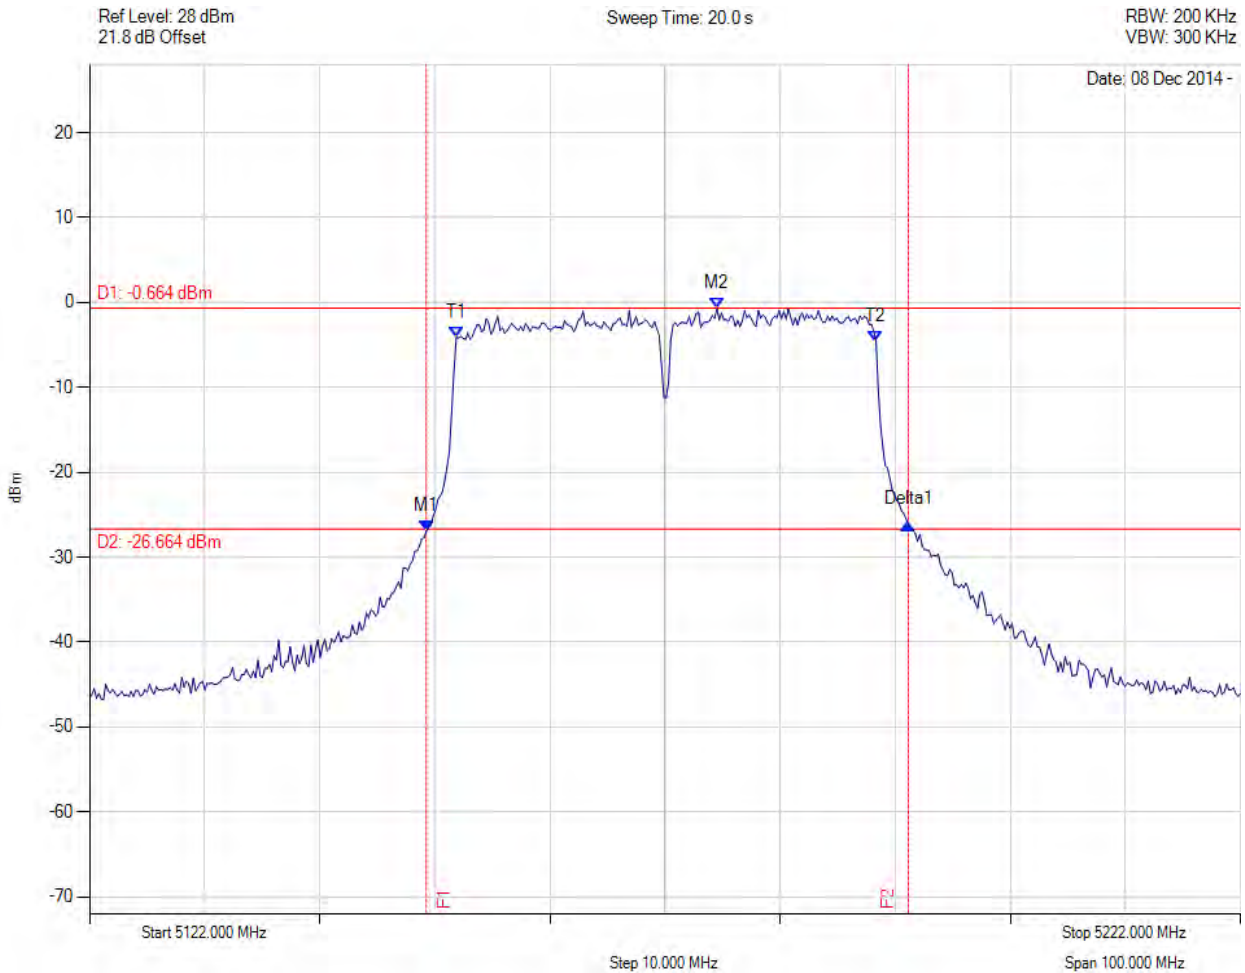

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5151.259 MHz : -26.929 dBm M2 : 5176.509 MHz : -0.664 dBm Delta1 : 41.884 MHz : 0.791 dB T1 : 5153.864 MHz : -4.103 dBm T2 : 5190.337 MHz : -4.579 dBm OBW : 36.473 MHz	Measured 26 dB Bandwidth: 41.884 MHz Measured 99% Bandwidth: 36.473 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variation: 40 MHz, Channel: 5172.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

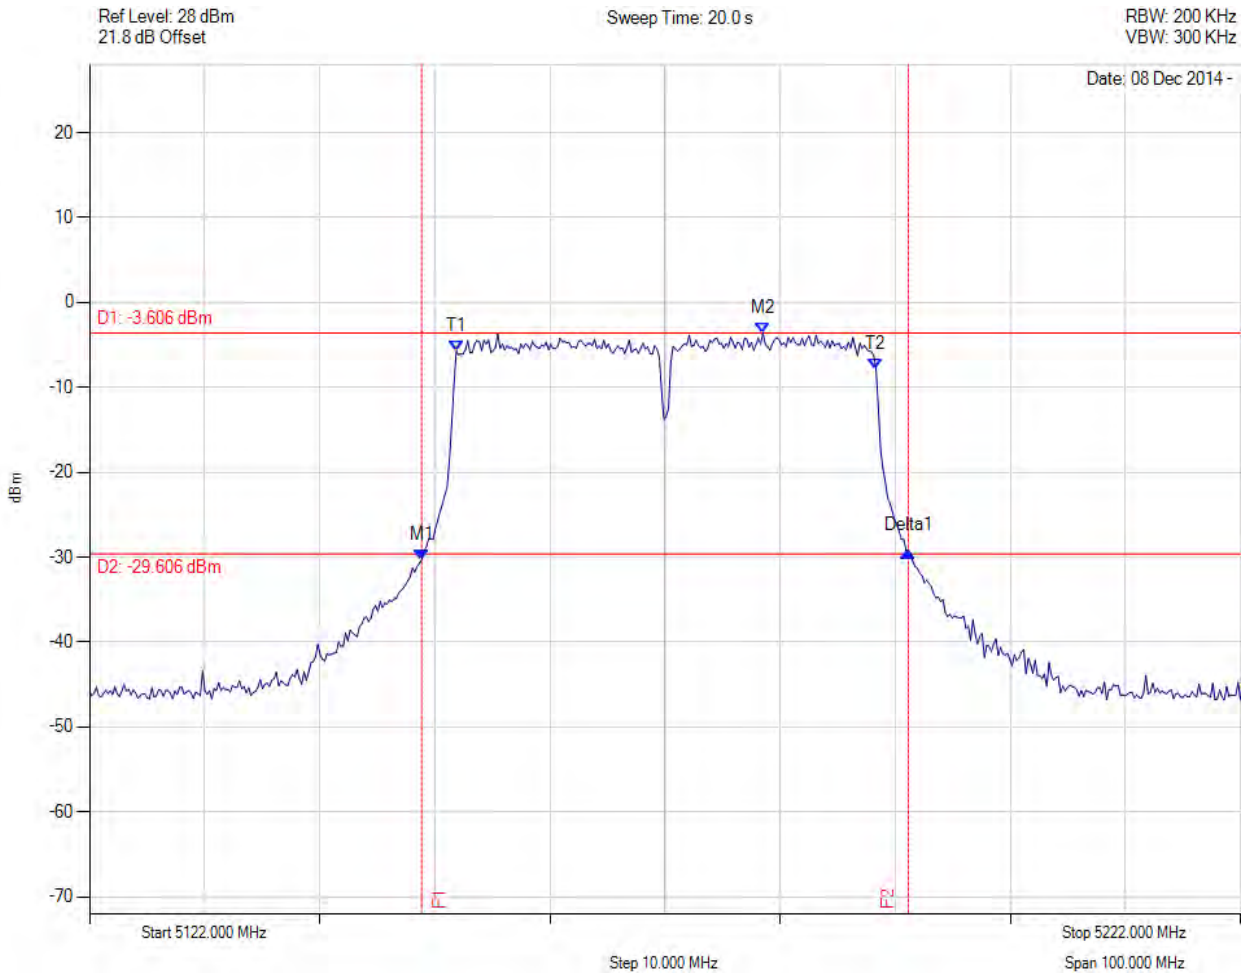

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5150.858 MHz : -30.291 dBm M2 : 5180.517 MHz : -3.606 dBm Delta1 : 42.285 MHz : 1.025 dB T1 : 5153.864 MHz : -5.717 dBm T2 : 5190.337 MHz : -7.906 dBm OBW : 36.473 MHz	Measured 26 dB Bandwidth: 42.285 MHz Measured 99% Bandwidth: 36.473 MHz

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






26 dB & 99% BANDWIDTH



Variants: 40 MHz, Channel: 5200.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc

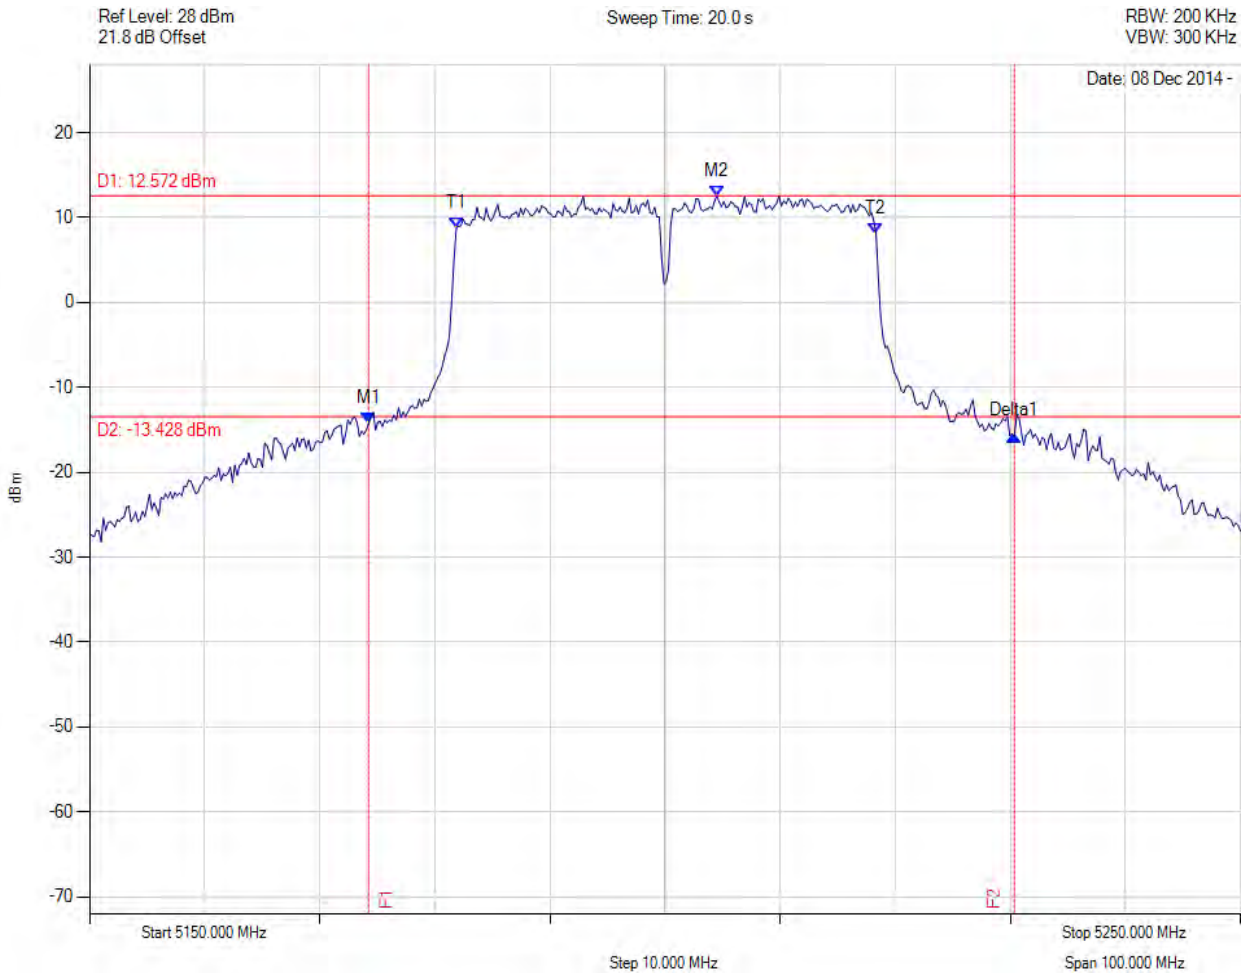

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5174.248 MHz : -14.273 dBm M2 : 5204.509 MHz : 12.572 dBm Delta1 : 56.112 MHz : -1.440 dB T1 : 5181.864 MHz : 8.771 dBm T2 : 5218.337 MHz : 8.106 dBm OBW : 36.473 MHz	Measured 26 dB Bandwidth: 56.112 MHz Measured 99% Bandwidth: 36.473 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variation: 40 MHz, Channel: 5200.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

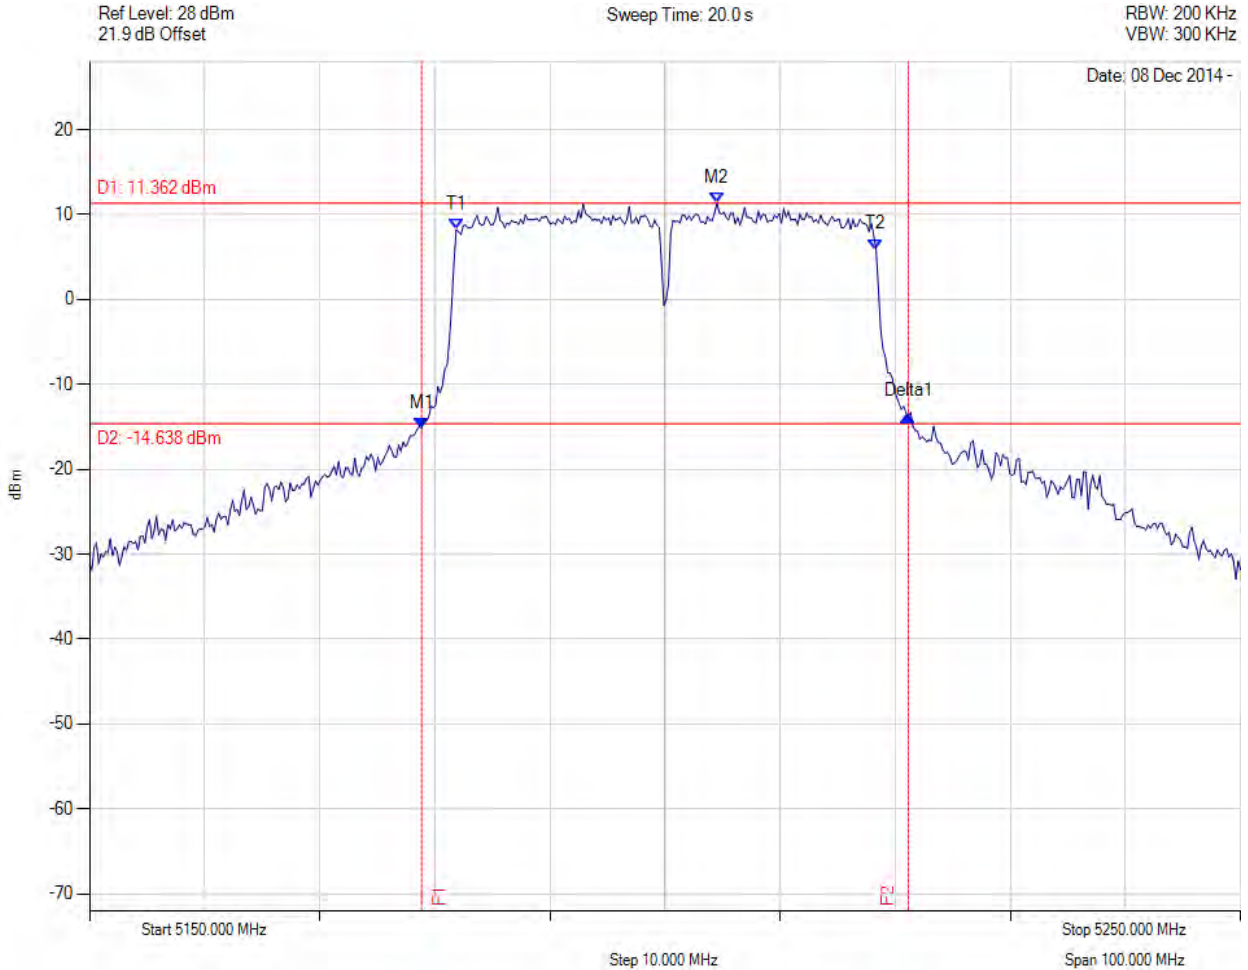

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5178.858 MHz : -15.130 dBm M2 : 5204.509 MHz : 11.362 dBm Delta1 : 42.285 MHz : 1.365 dB T1 : 5181.864 MHz : 8.216 dBm T2 : 5218.337 MHz : 5.907 dBm OBW : 36.473 MHz	Measured 26 dB Bandwidth: 42.285 MHz Measured 99% Bandwidth: 36.473 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variant: 40 MHz, Channel: 5230.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc

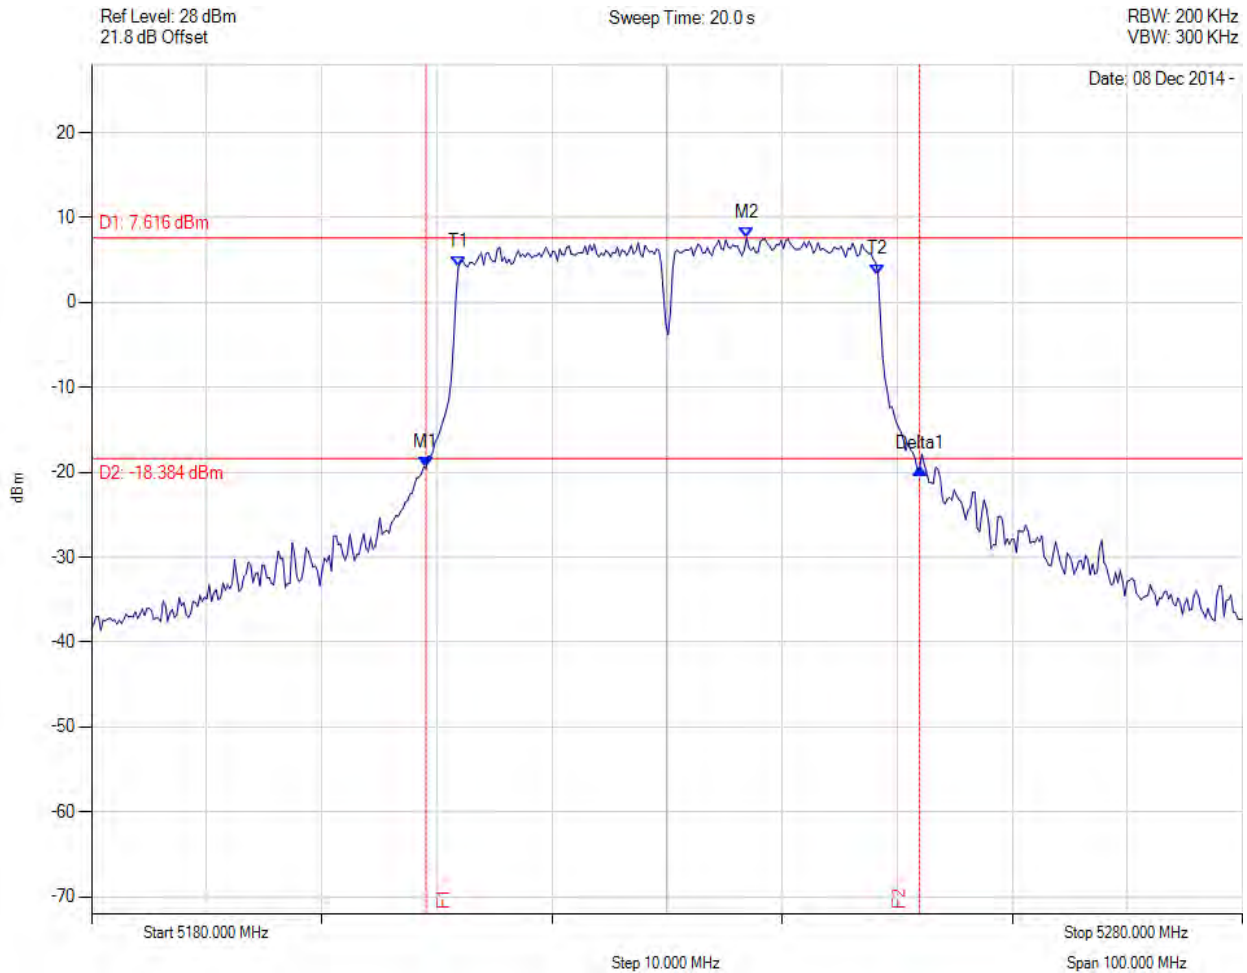

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5209.058 MHz : -19.431 dBm M2 : 5236.914 MHz : 7.616 dBm Delta1 : 42.886 MHz : -0.116 dB T1 : 5211.864 MHz : 4.144 dBm T2 : 5248.337 MHz : 3.298 dBm OBW : 36.473 MHz	Measured 26 dB Bandwidth: 42.886 MHz Measured 99% Bandwidth: 36.473 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variants: 40 MHz, Channel: 5230.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

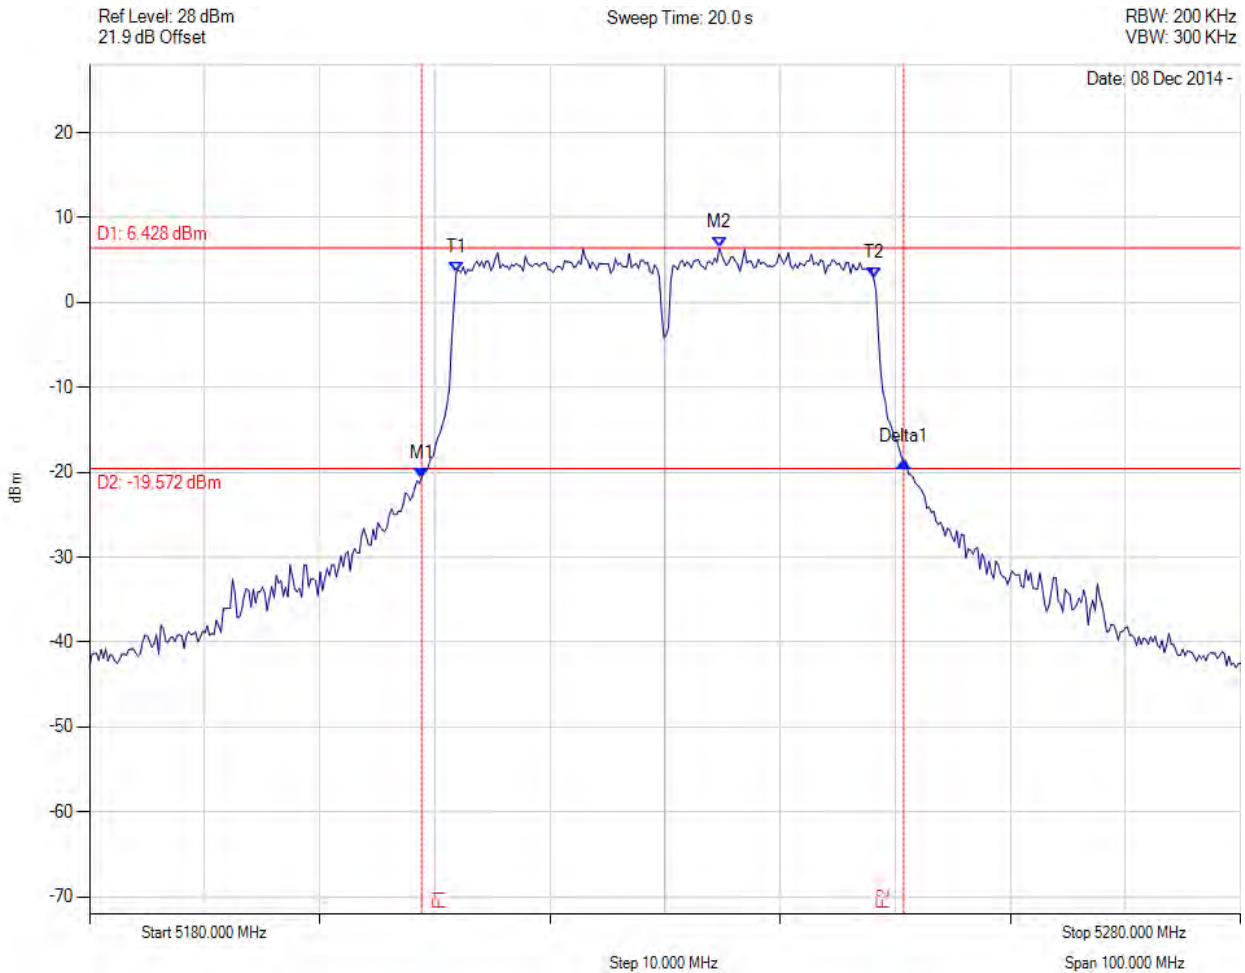

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5208.858 MHz : -20.672 dBm M2 : 5234.709 MHz : 6.428 dBm Delta1 : 41.884 MHz : 1.926 dB T1 : 5211.864 MHz : 3.601 dBm T2 : 5248.136 MHz : 2.830 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 41.884 MHz Measured 99% Bandwidth: 36.273 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variation: 80 MHz, Channel: 5190.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc

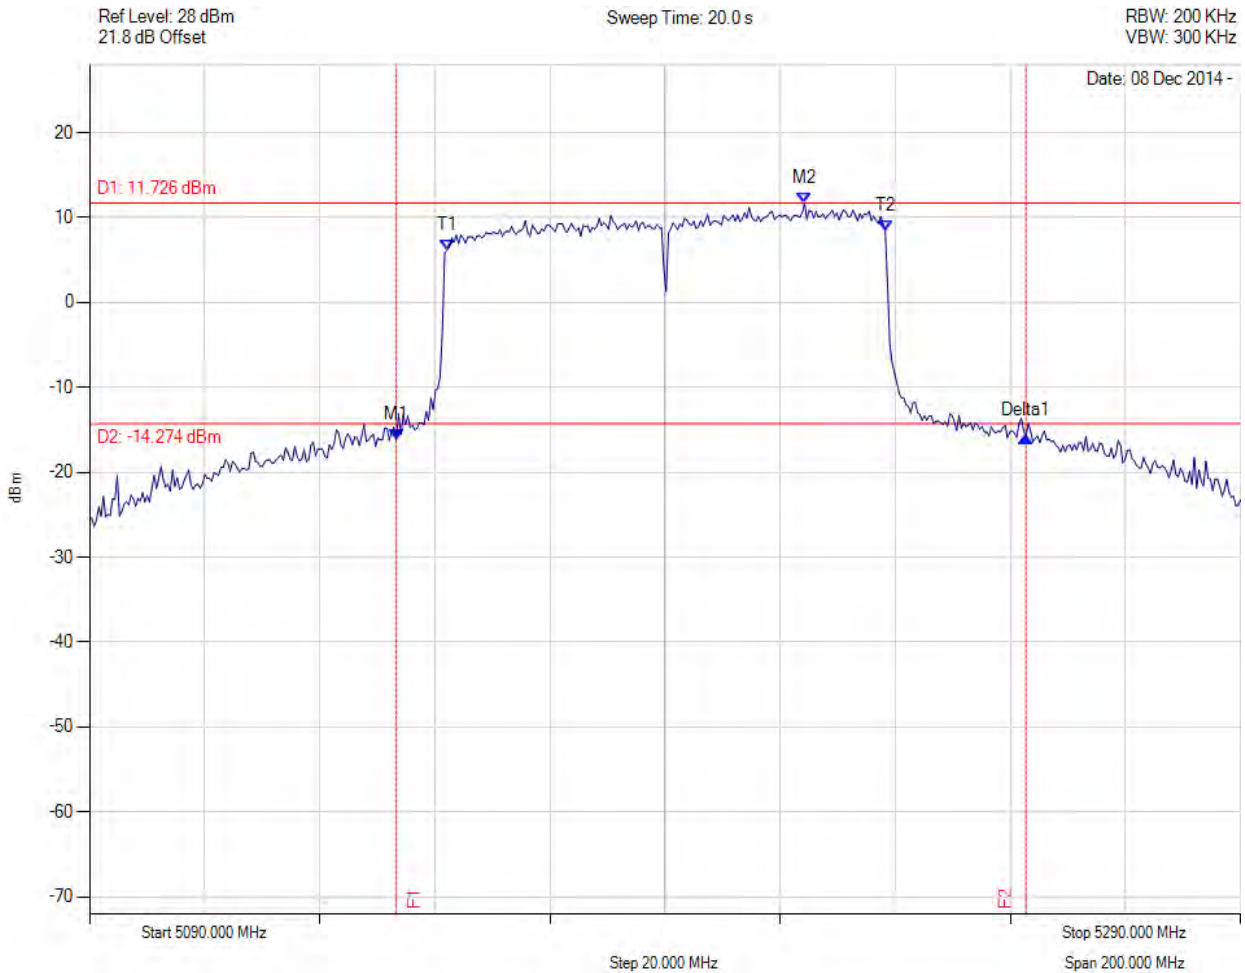

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5143.307 MHz : -16.140 dBm M2 : 5214.248 MHz : 11.726 dBm Delta1 : 109.419 MHz : 0.380 dB T1 : 5152.124 MHz : 6.212 dBm T2 : 5228.277 MHz : 8.431 dBm OBW : 76.152 MHz	Measured 26 dB Bandwidth: 109.419 MHz Measured 99% Bandwidth: 76.152 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variants: 80 MHz, Channel: 5190.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

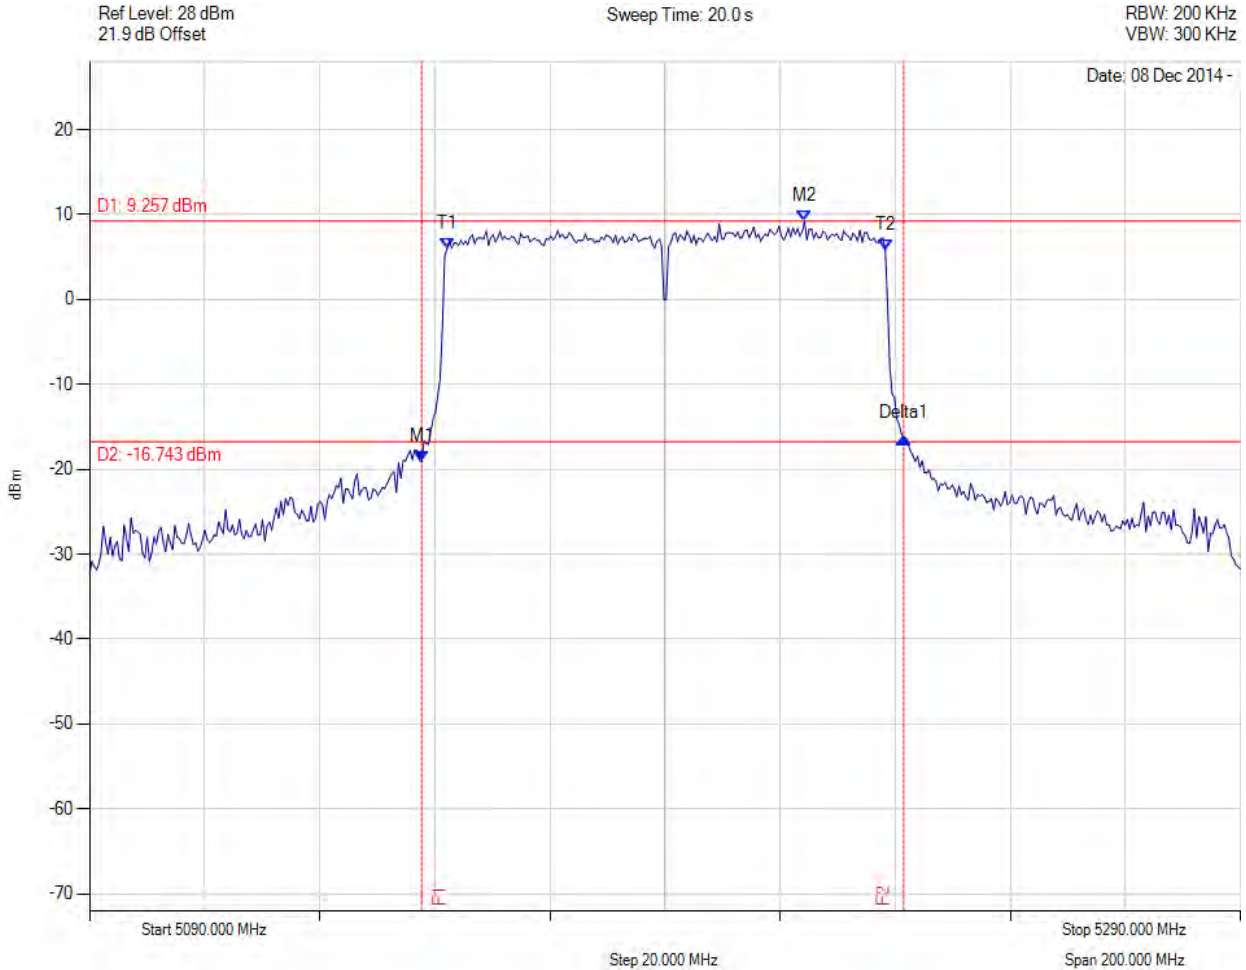

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5147.715 MHz : -19.085 dBm M2 : 5214.248 MHz : 9.257 dBm Delta1 : 83.768 MHz : 2.819 dB T1 : 5152.124 MHz : 5.930 dBm T2 : 5228.277 MHz : 5.891 dBm OBW : 76.152 MHz	Measured 26 dB Bandwidth: 83.768 MHz Measured 99% Bandwidth: 76.152 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variation: 80 MHz, Channel: 5210.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc

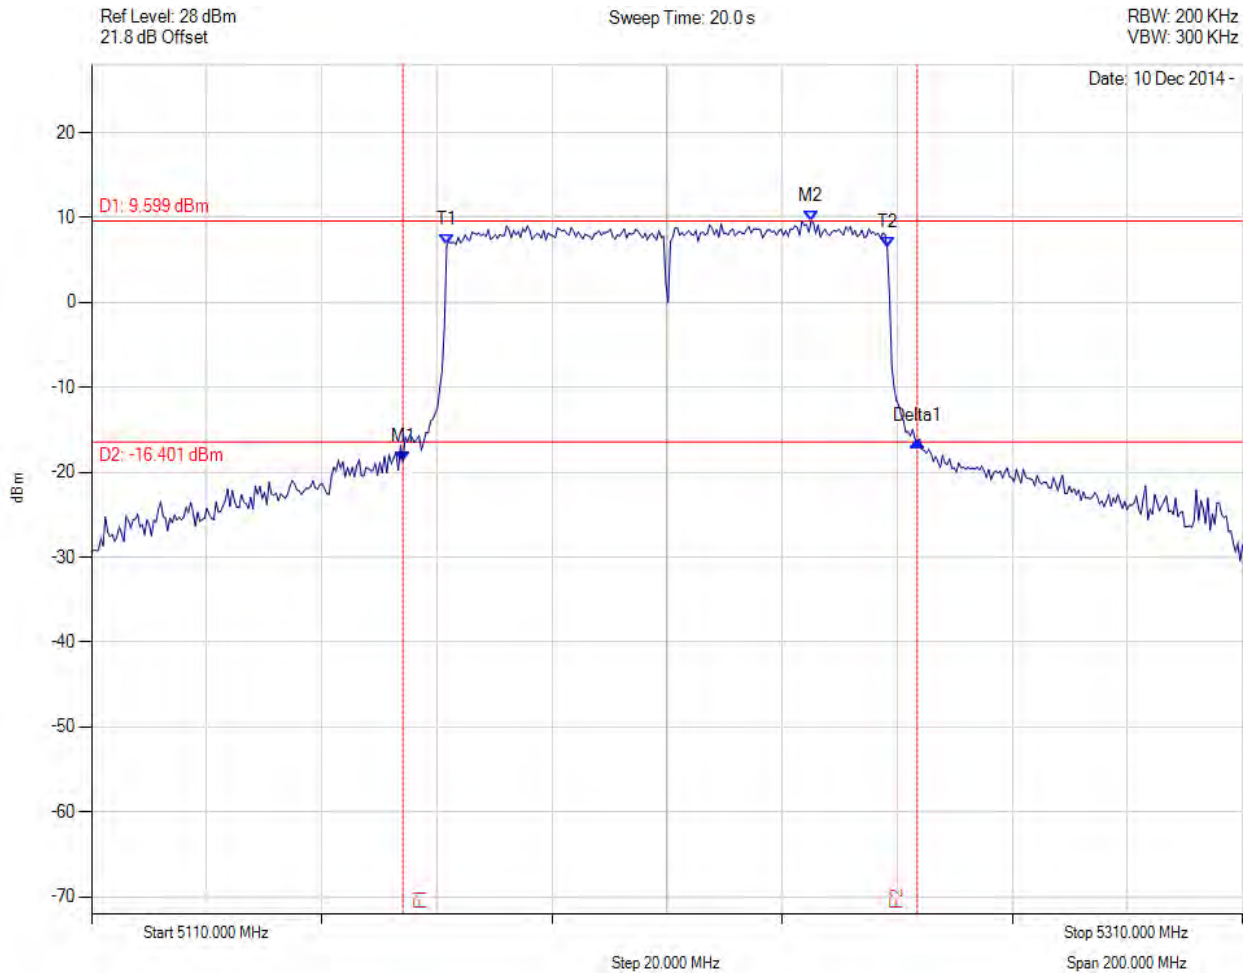

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5164.108 MHz : -18.721 dBm M2 : 5235.050 MHz : 9.599 dBm Delta1 : 89.379 MHz : 2.392 dB T1 : 5171.723 MHz : 6.735 dBm T2 : 5248.277 MHz : 6.432 dBm OBW : 76.553 MHz	Measured 26 dB Bandwidth: 89.379 MHz Measured 99% Bandwidth: 76.553 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variants: 80 MHz, Channel: 5210.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

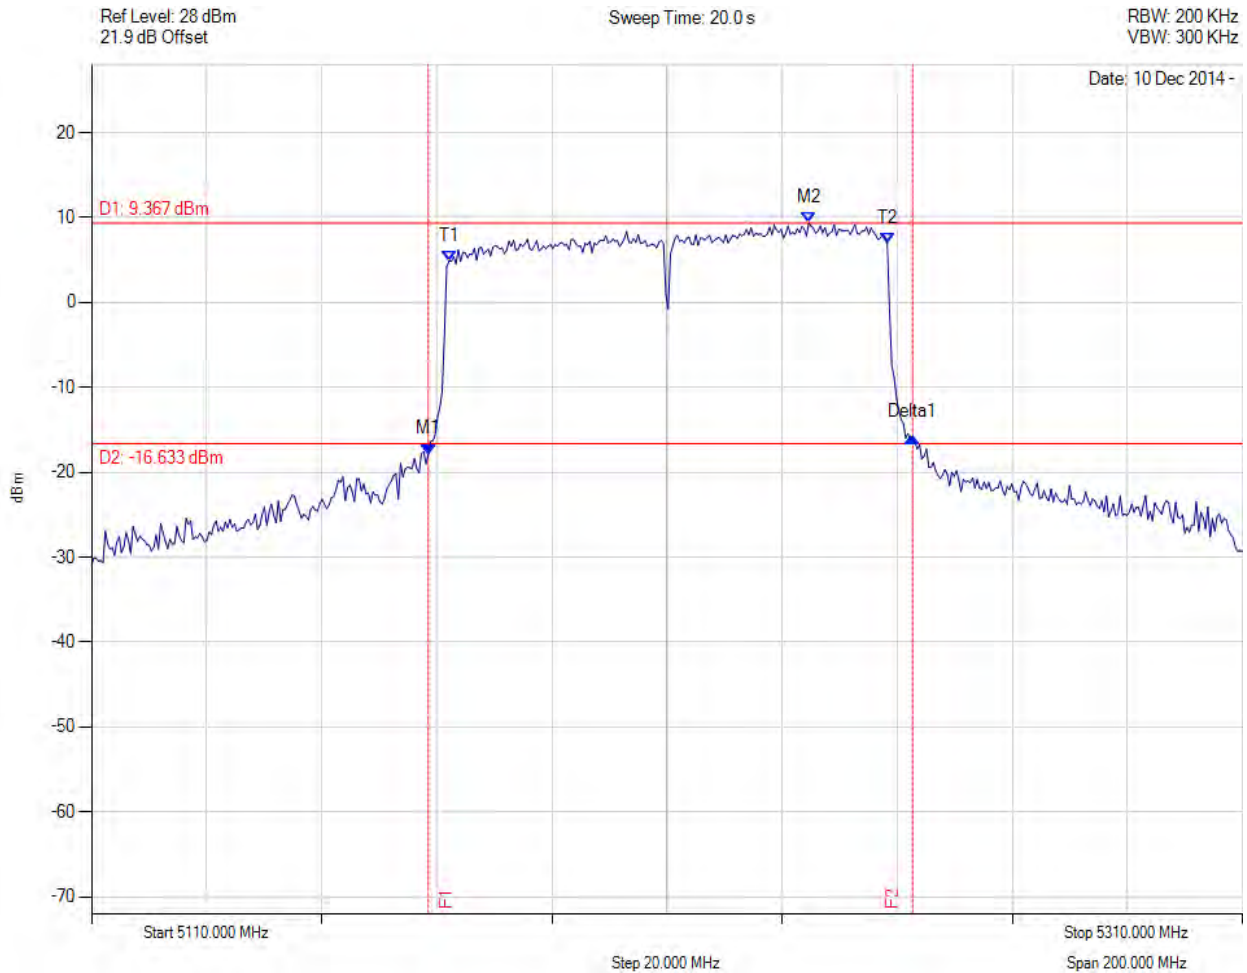

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5168.517 MHz : -17.871 dBm M2 : 5234.649 MHz : 9.367 dBm Delta1 : 84.168 MHz : 2.091 dB T1 : 5172.124 MHz : 4.884 dBm T2 : 5248.277 MHz : 7.008 dBm OBW : 76.152 MHz	Measured 26 dB Bandwidth: 84.168 MHz Measured 99% Bandwidth: 76.152 MHz


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





### A.1.2. Peak Power Spectral Density

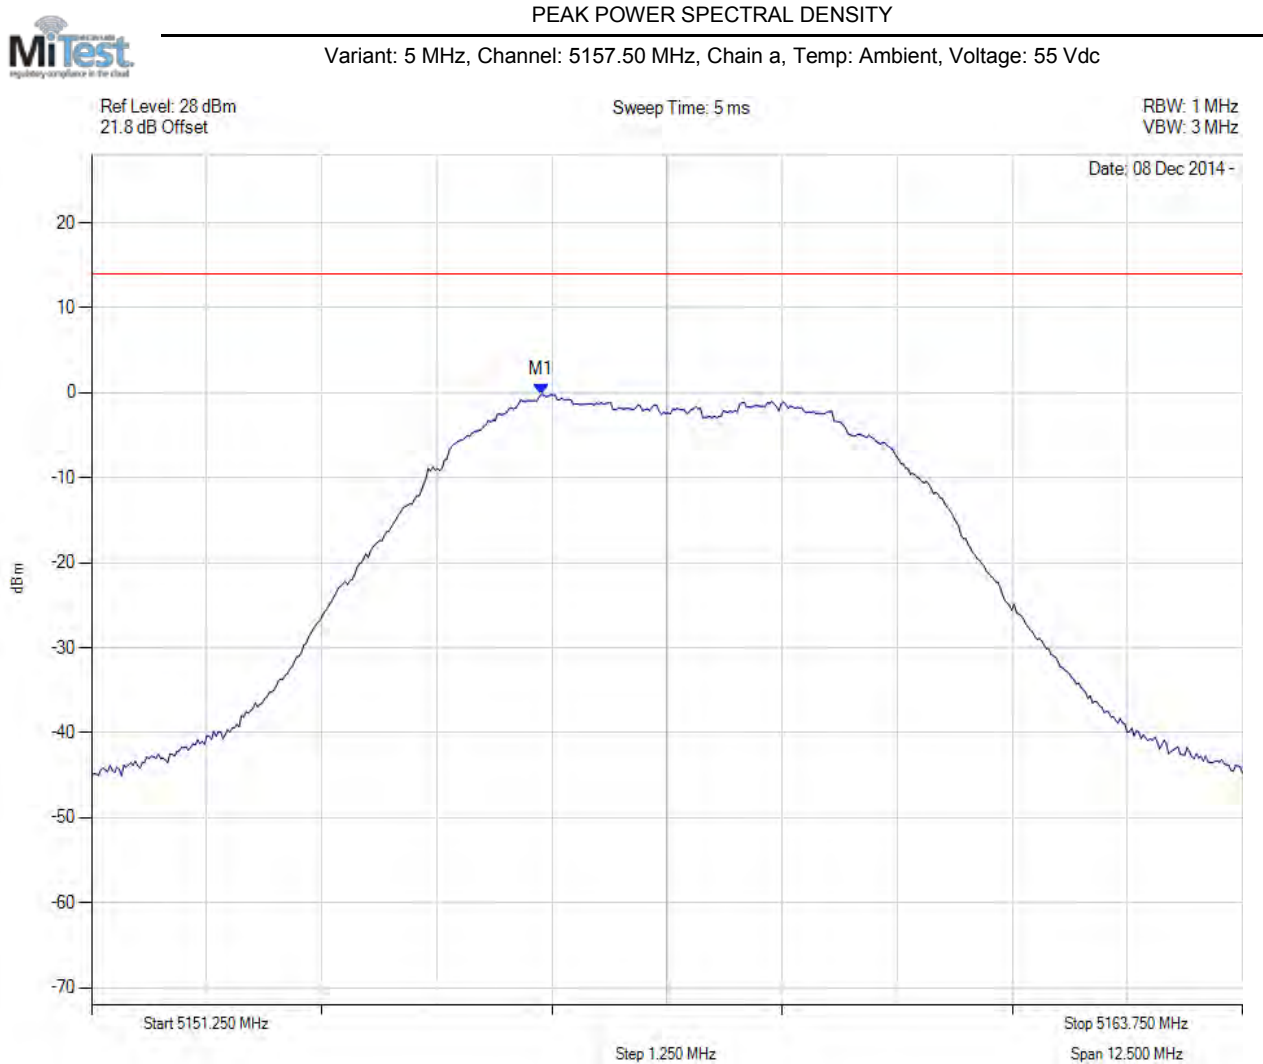

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5156.135 MHz : -0.202 dBm	Limit: ≤ 13.990 dBm

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variant: 5 MHz, Channel: 5157.50 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

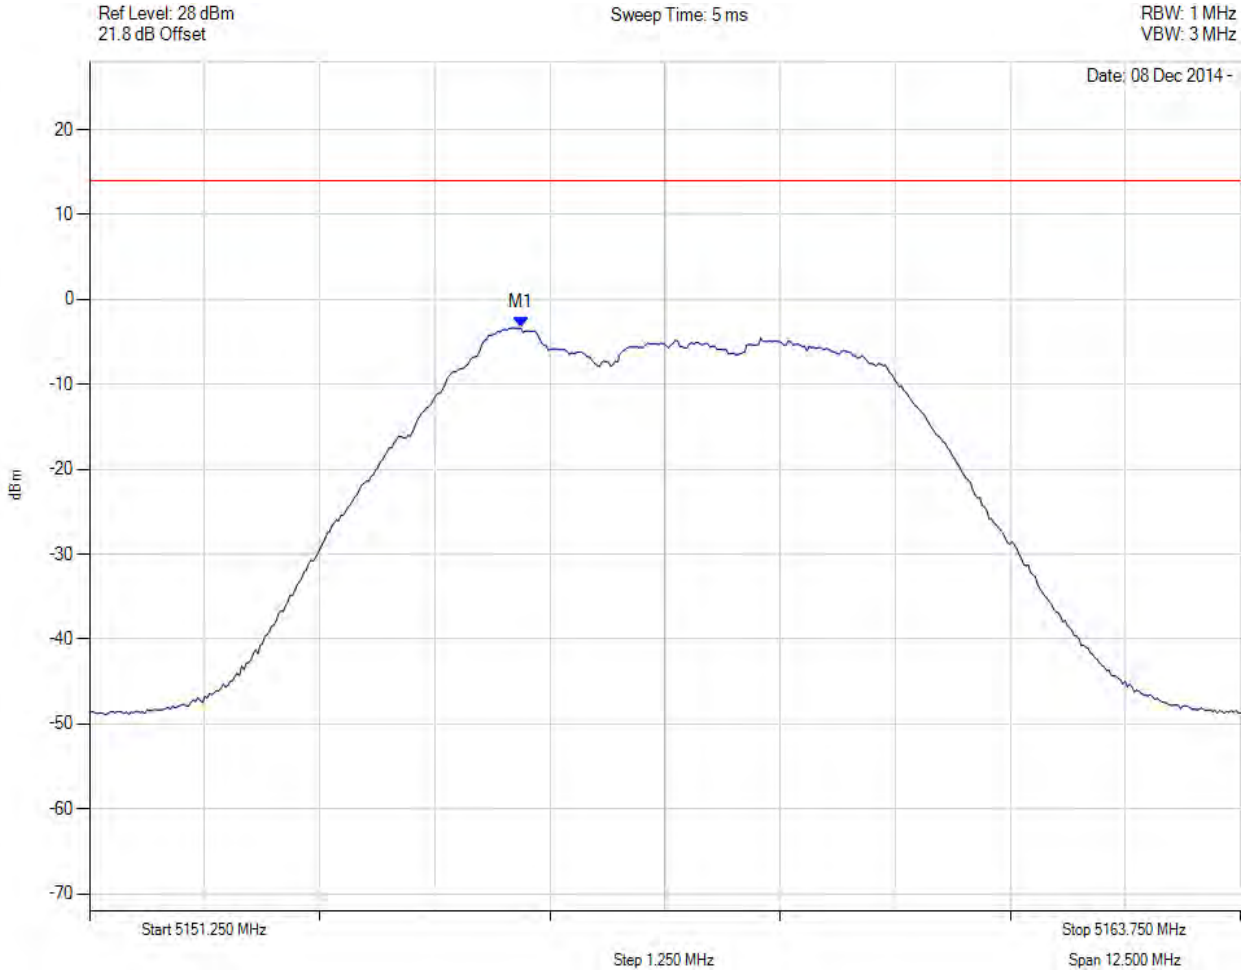

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5155.934 MHz : -3.360 dBm	Limit: ≤ 13.990 dBm

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variant: 5 MHz, Channel: 5157.50 MHz, SUM, Temp: Ambient, Voltage: 55 Vdc

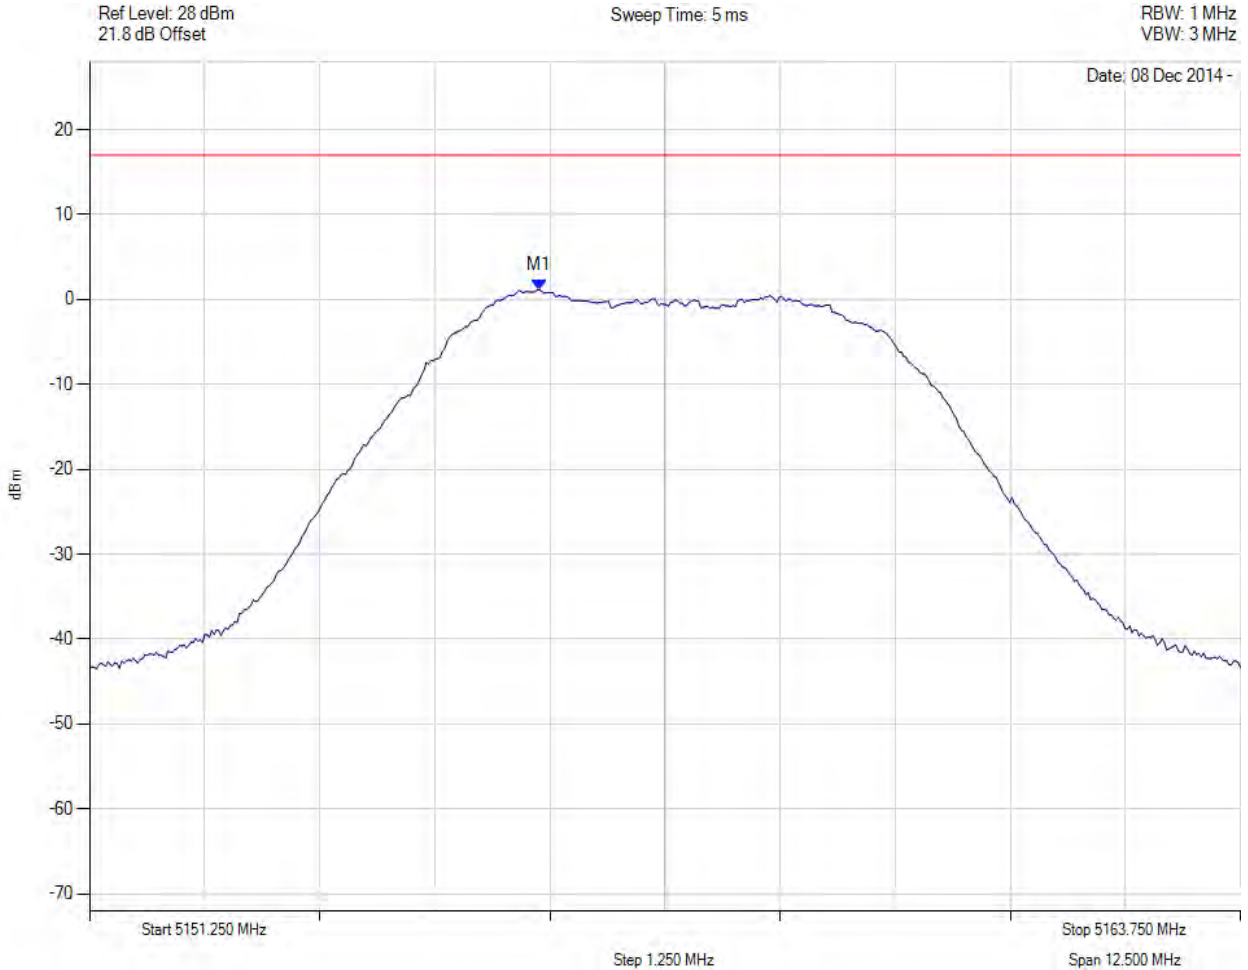

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5156 MHz : 1 dBm M1 + DCCF : 5156 MHz : 1.293 dBm Duty Cycle Correction Factor : +0.13 dB	Limit: $\leq 17.0$ dBm Margin: -15.7 dB

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variant: 5 MHz, Channel: 5200.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc



Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5199.011 MHz : 14.148 dBm	Limit: $\leq 13.990$ dBm

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variant: 5 MHz, Channel: 5200.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

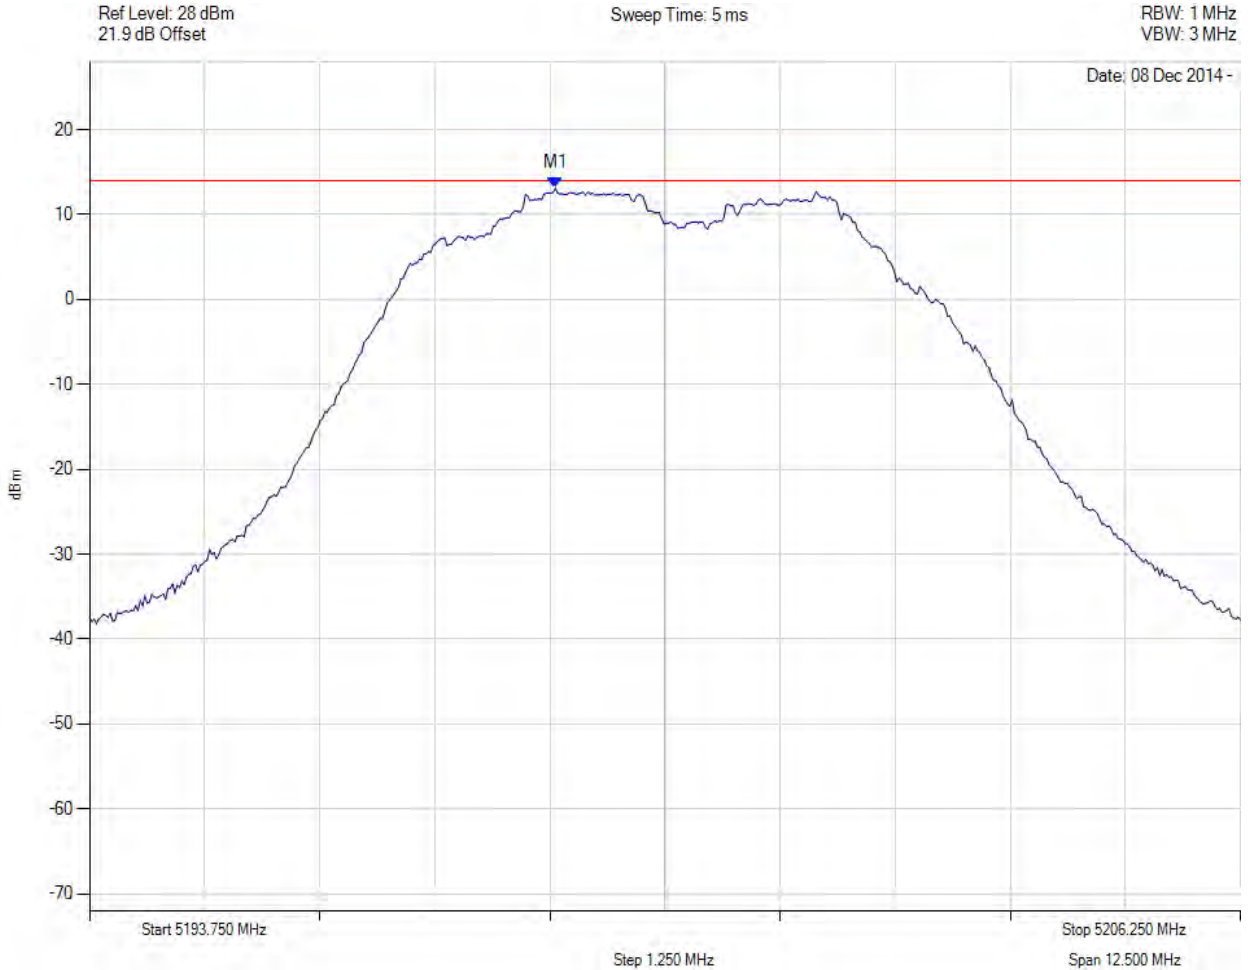

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5198.810 MHz : 13.138 dBm	Channel Frequency: 5200.00 MHz

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variant: 5 MHz, Channel: 5200.00 MHz, SUM, Temp: Ambient, Voltage: 55 Vdc



Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5199 MHz : 16 dBm M1 + DCCF : 5199 MHz : 16.561 dBm Duty Cycle Correction Factor : +0.13 dB	Limit: $\leq 17.0$ dBm Margin: -0.4 dB

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variant: 5 MHz, Channel: 5245.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc



Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5245.213 MHz : 14.027 dBm	Limit: $\leq 13.990$ dBm

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variant: 5 MHz, Channel: 5245.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

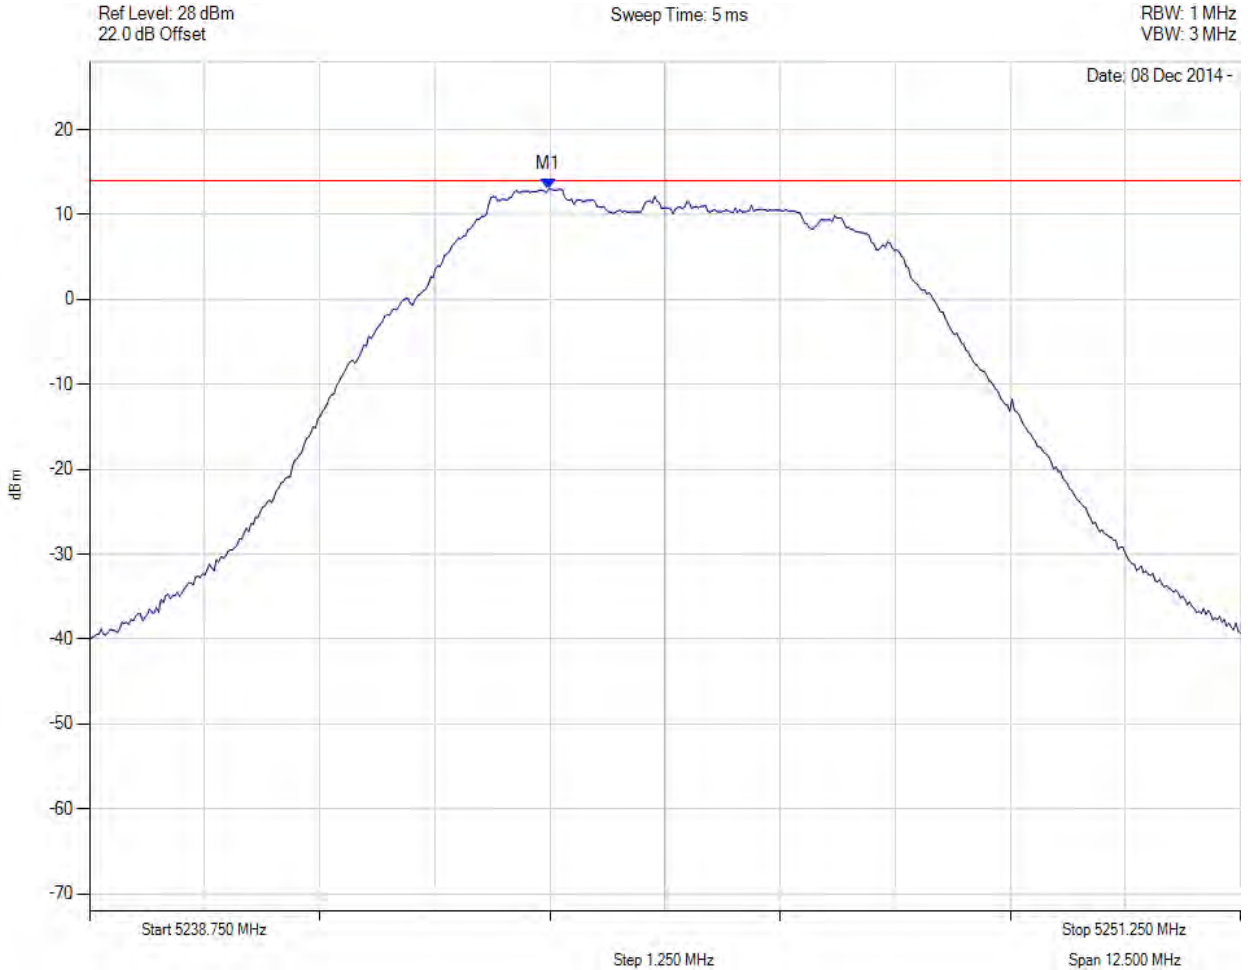

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5243.735 MHz : 12.999 dBm	Limit: $\leq 13.990$ dBm

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 169 of 203

PEAK POWER SPECTRAL DENSITY



Variant: 5 MHz, Channel: 5245.00 MHz, SUM, Temp: Ambient, Voltage: 55 Vdc

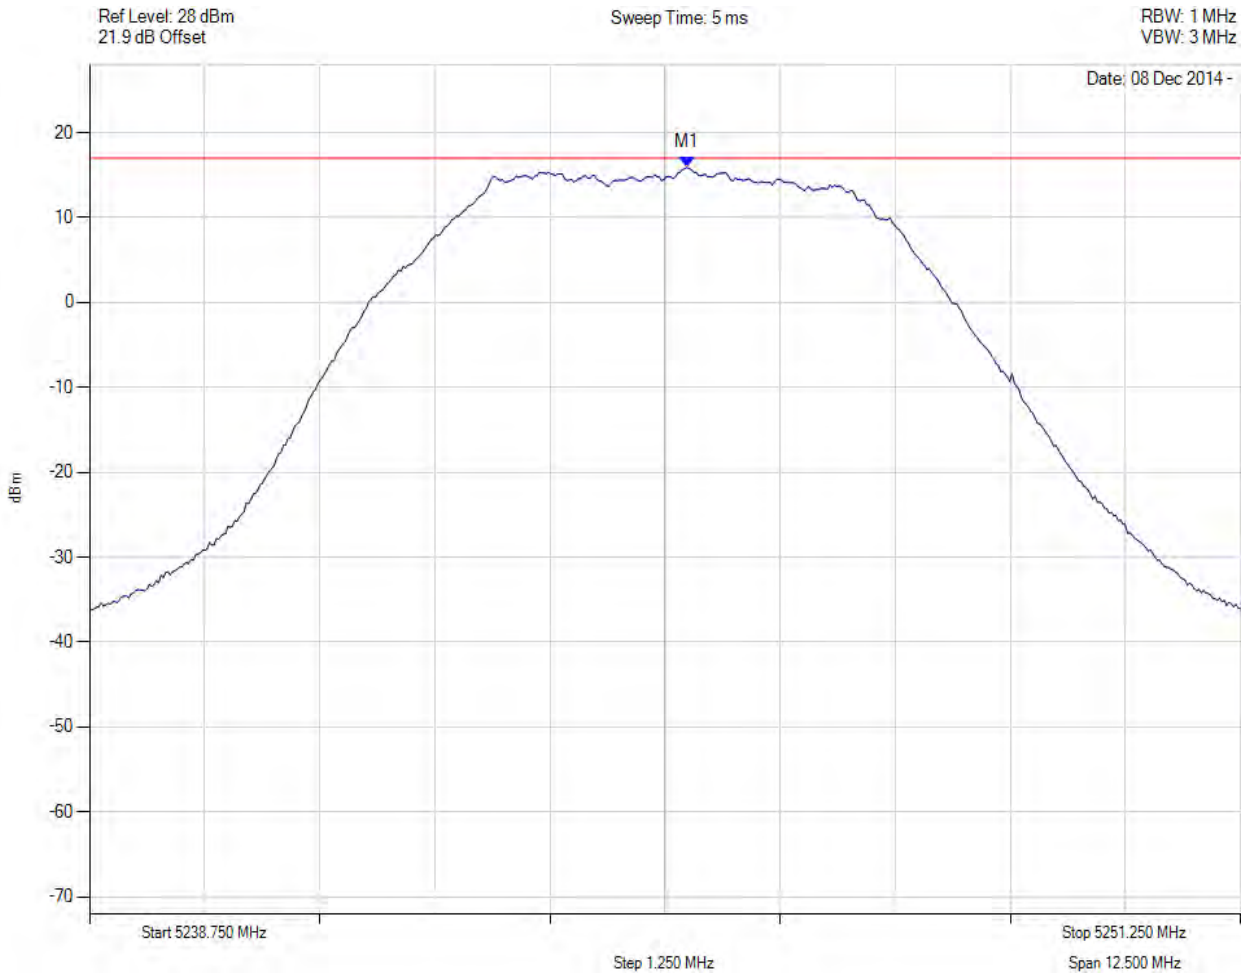

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5245 MHz : 16 dBm M1 + DCCF : 5245 MHz : 16.041 dBm Duty Cycle Correction Factor : +0.13 dB	Limit: $\leq 17.0$ dBm Margin: -1.0 dB

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variant: 10 MHz, Channel: 5162.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc

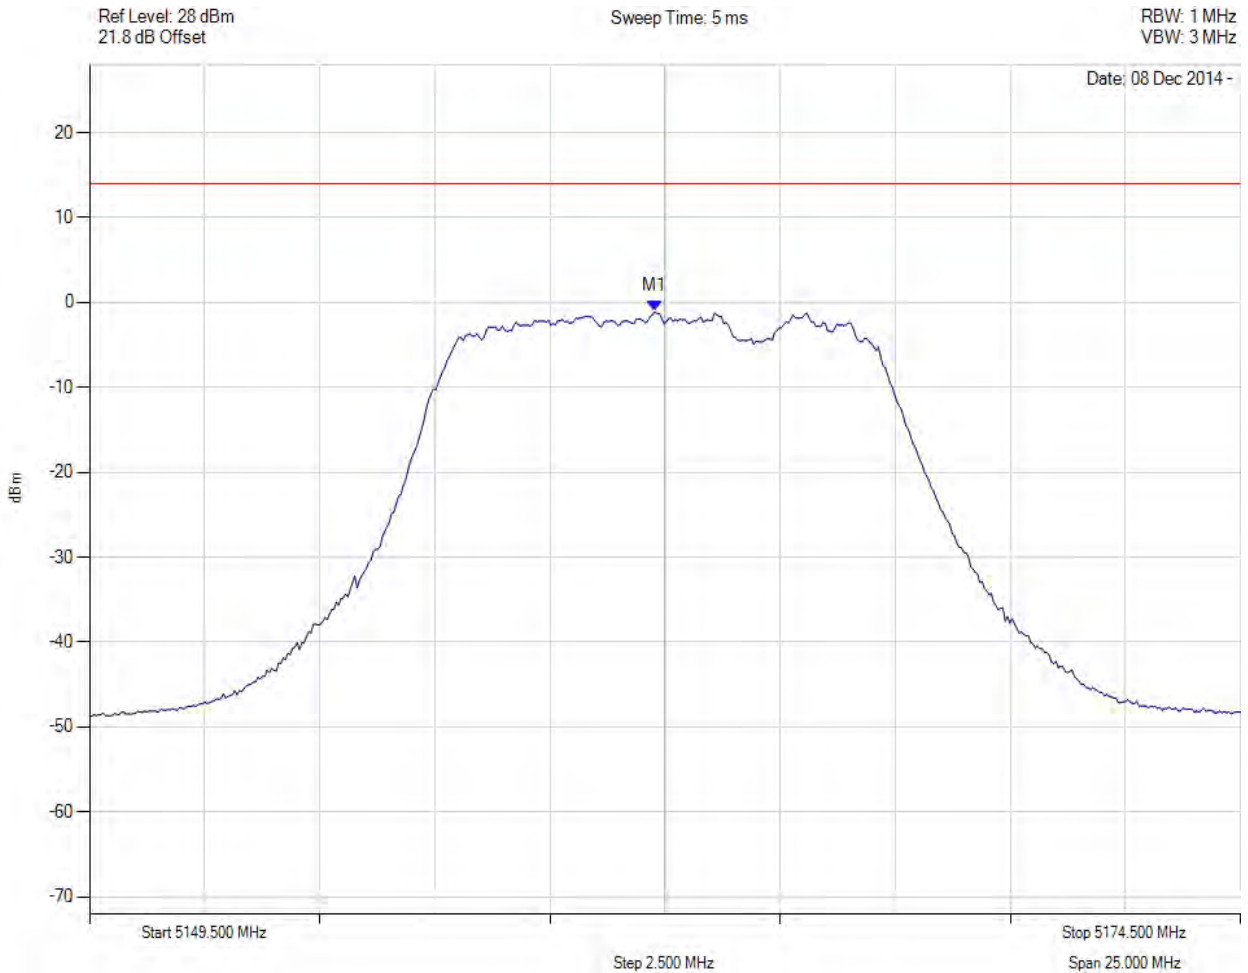

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5161.775 MHz : -1.083 dBm	Channel Frequency: 5162.00 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variants: 10 MHz, Channel: 5162.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

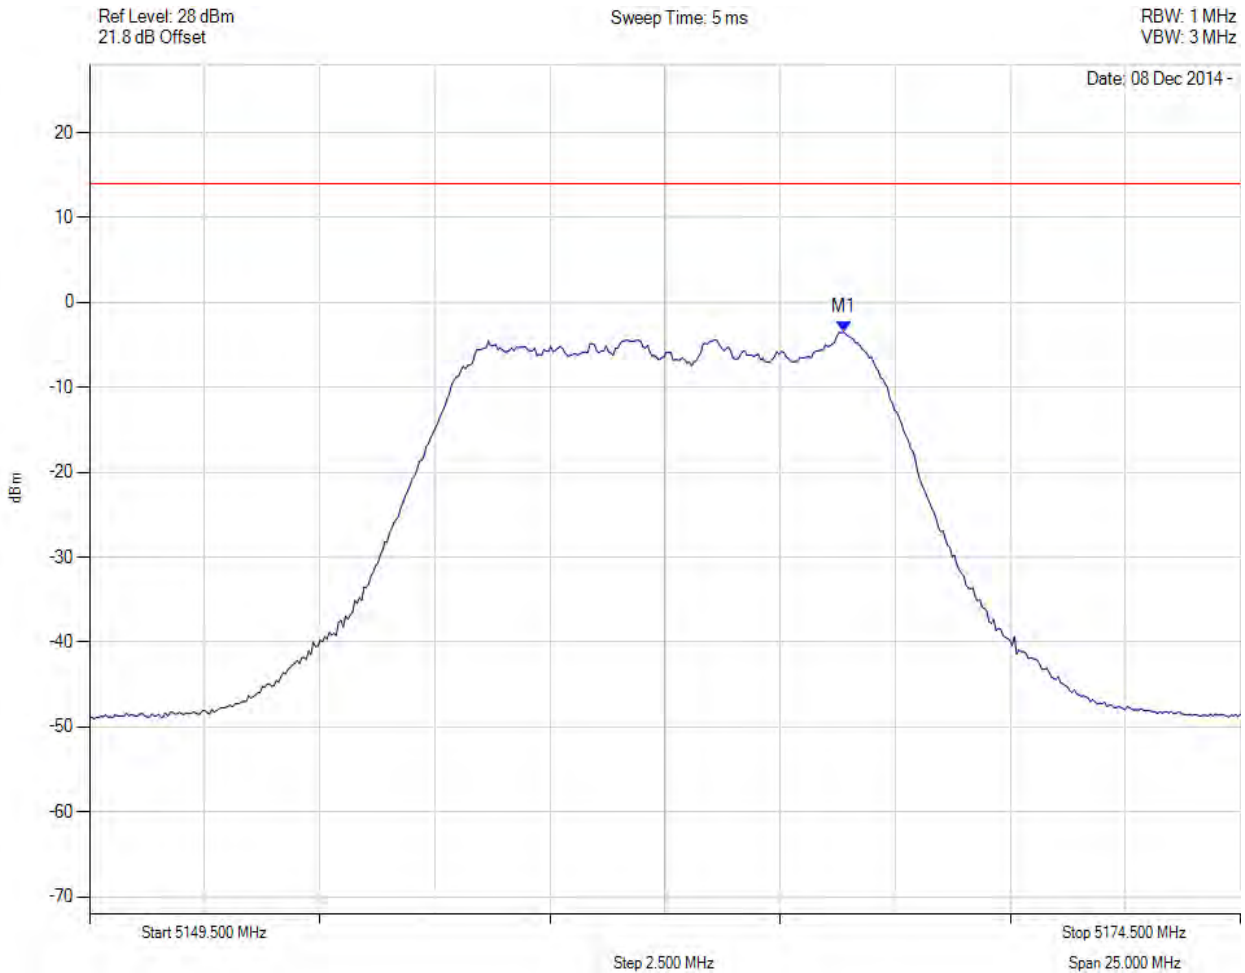

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5165.883 MHz : -3.479 dBm	Channel Frequency: 5162.00 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variant: 10 MHz, Channel: 5162.00 MHz, SUM, Temp: Ambient, Voltage: 55 Vdc

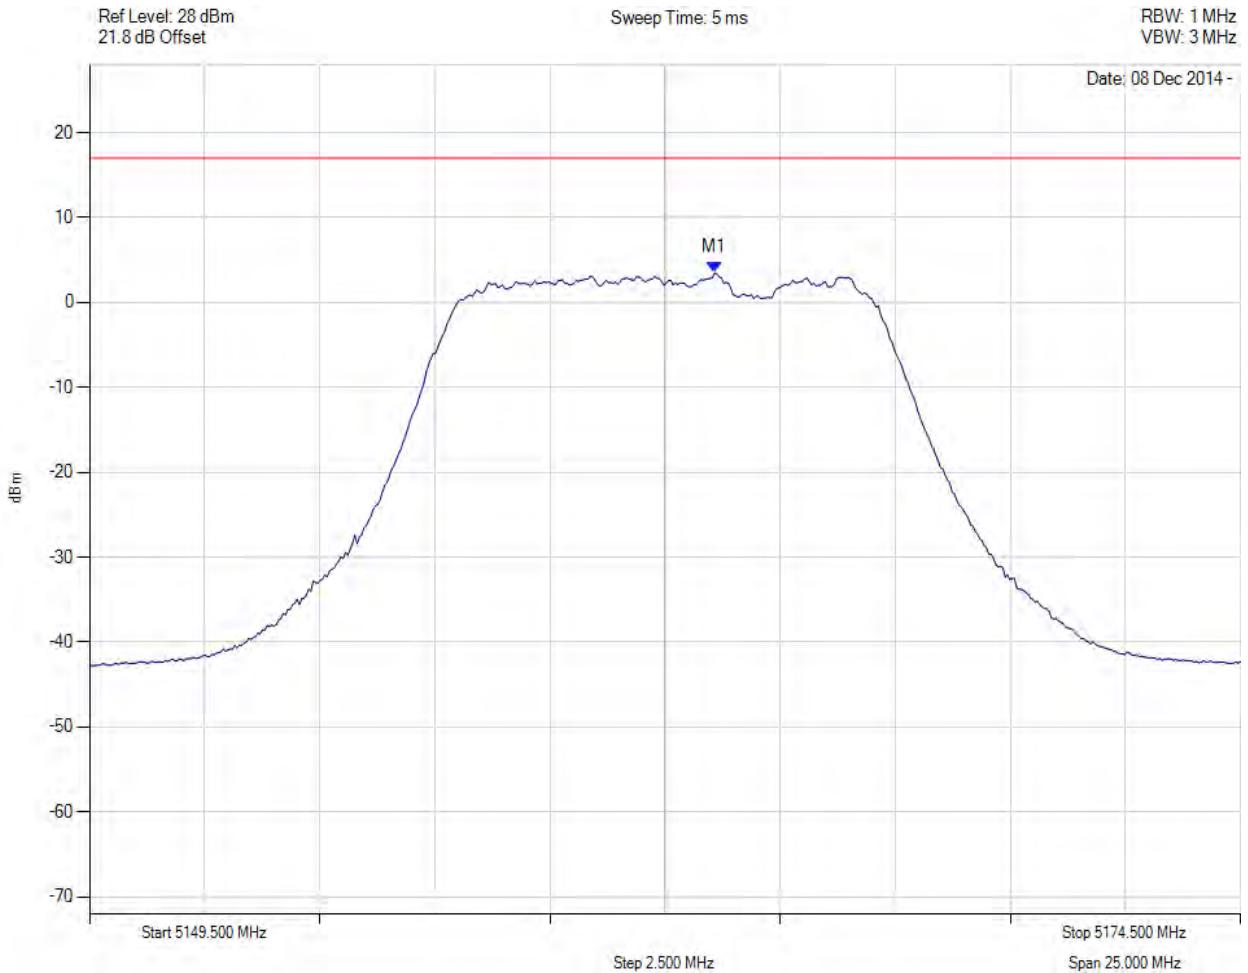

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5163 MHz : 4 dBm M1 + DCCF : 5163 MHz : 3.682 dBm Duty Cycle Correction Factor : +0.18 dB	Limit: $\leq 17.0$ dBm Margin: -13.3 dB

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variation: 10 MHz, Channel: 5200.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc

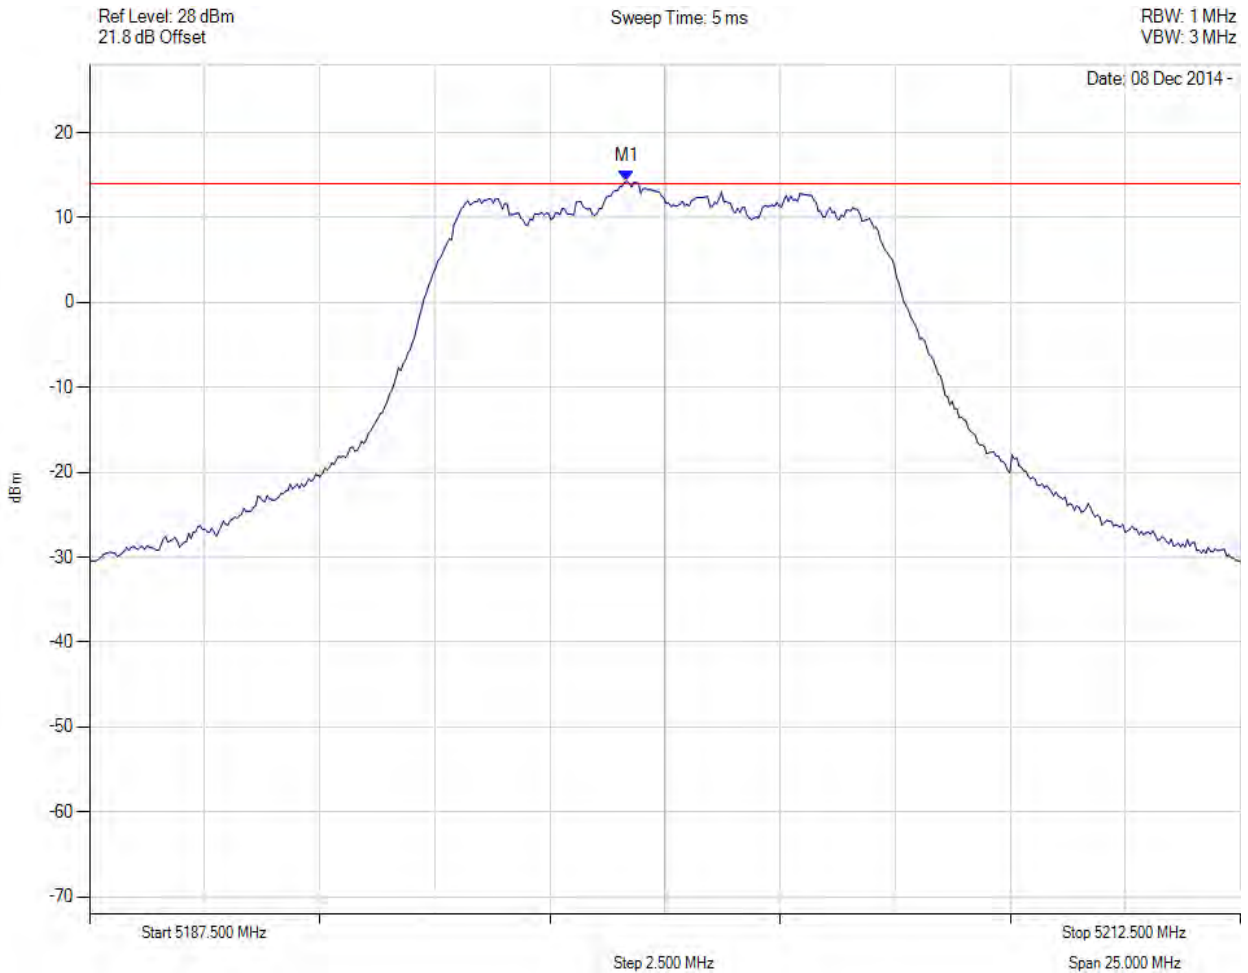

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5199.173 MHz : 14.287 dBm	Limit: $\leq 13.990$ dBm

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variant: 10 MHz, Channel: 5200.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

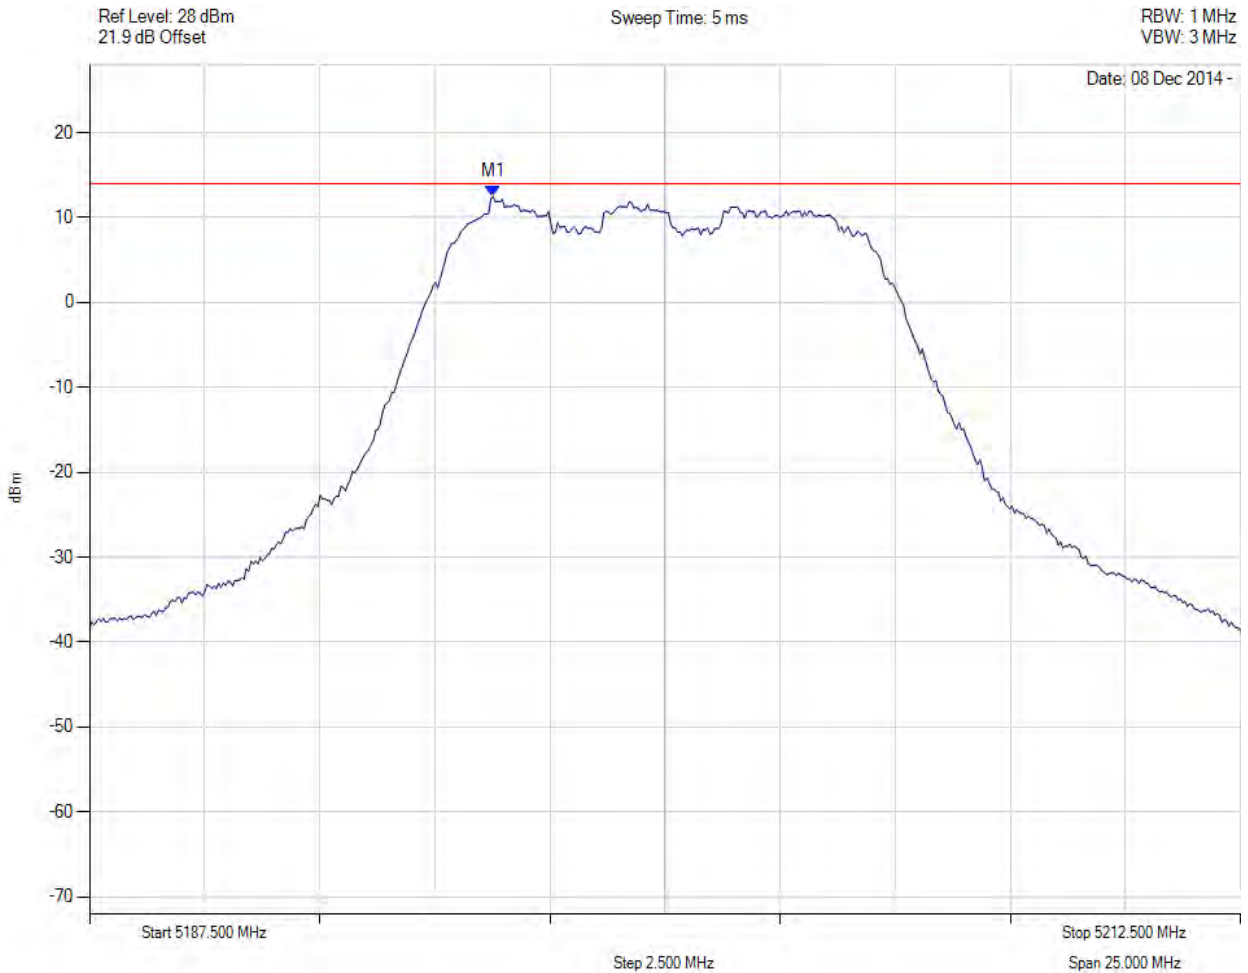

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5196.268 MHz : 12.477 dBm	Channel Frequency: 5200.00 MHz

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variant: 10 MHz, Channel: 5200.00 MHz, SUM, Temp: Ambient, Voltage: 55 Vdc



Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5199 MHz : 16 dBm M1 + DCCF : 5199 MHz : 16.273 dBm Duty Cycle Correction Factor : +0.18 dB	Limit: $\leq 17.0$ dBm Margin: -0.7 dB

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variants: 10 MHz, Channel: 5245.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc

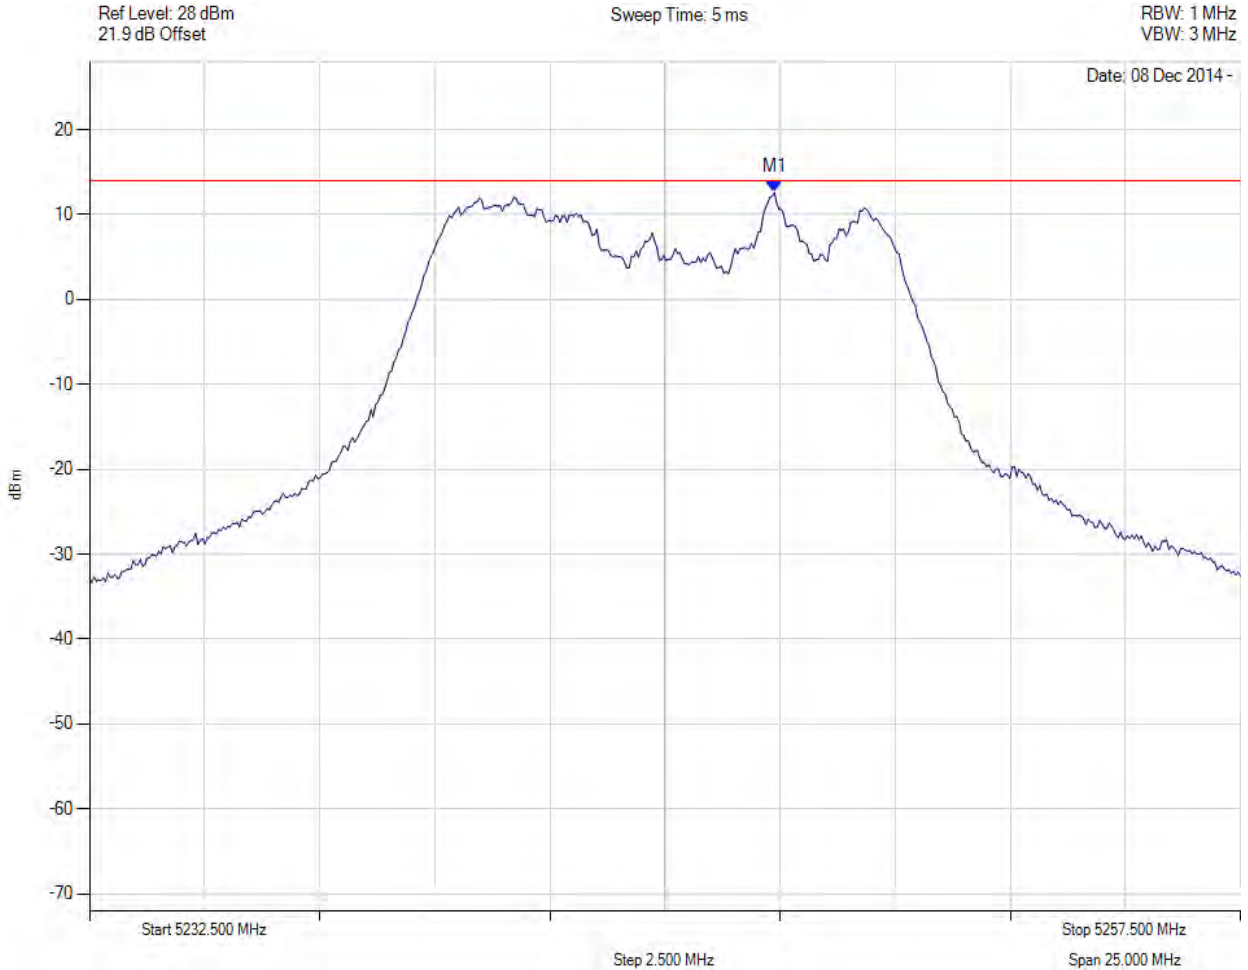

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5247.380 MHz : 12.599 dBm	Limit: $\leq 13.990$ dBm

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





PEAK POWER SPECTRAL DENSITY



Variants: 10 MHz, Channel: 5245.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc



Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5244.023 MHz : 12.429 dBm	Limit: $\leq 13.990$ dBm

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variant: 10 MHz, Channel: 5245.00 MHz, SUM, Temp: Ambient, Voltage: 55 Vdc

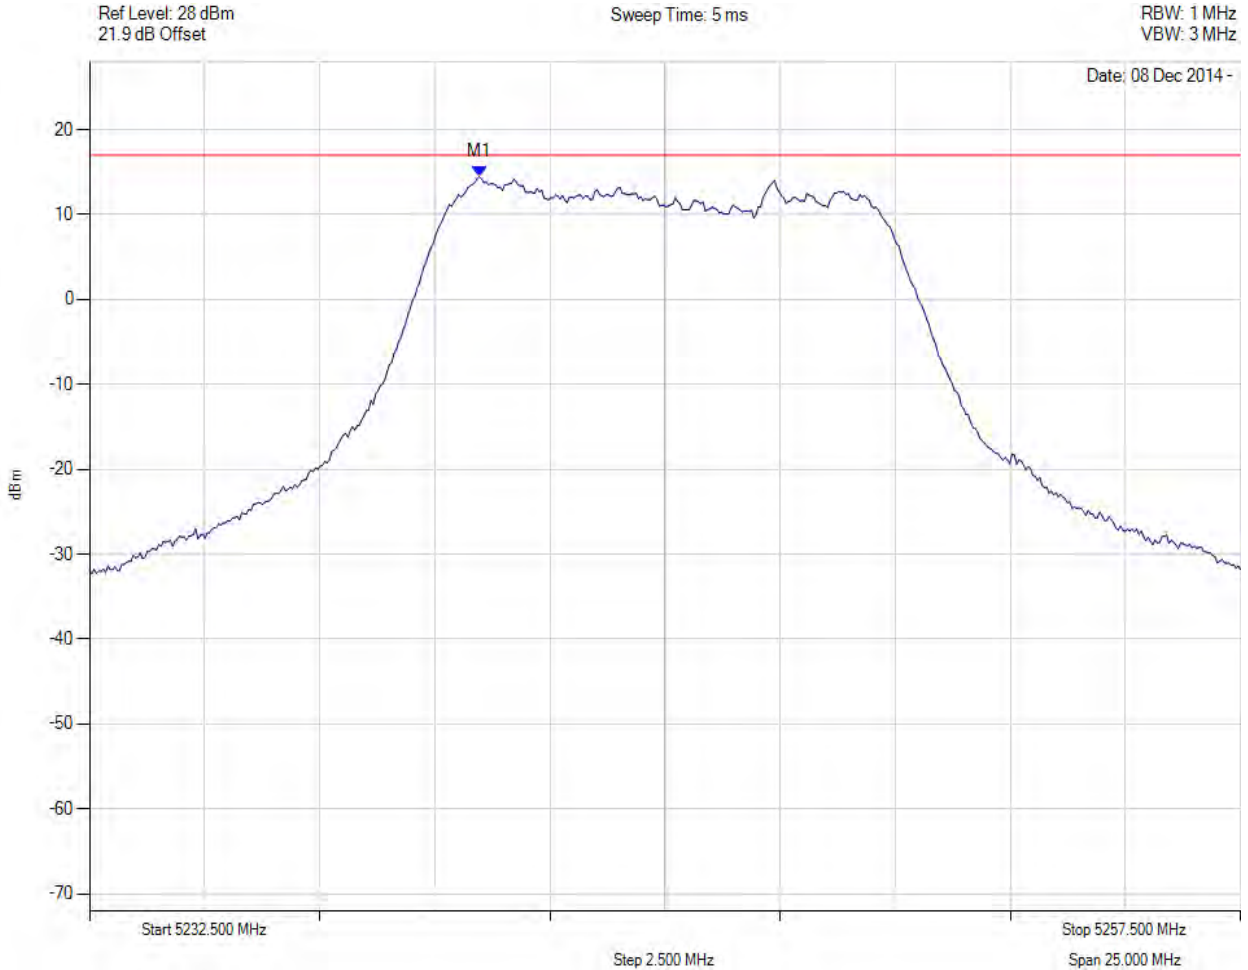

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5241 MHz : 14 dBm M1 + DCCF : 5241 MHz : 14.655 dBm Duty Cycle Correction Factor : +0.18 dB	Limit: $\leq 17.0$ dBm Margin: -2.4 dB

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variation: 20 MHz, Channel: 5165.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc

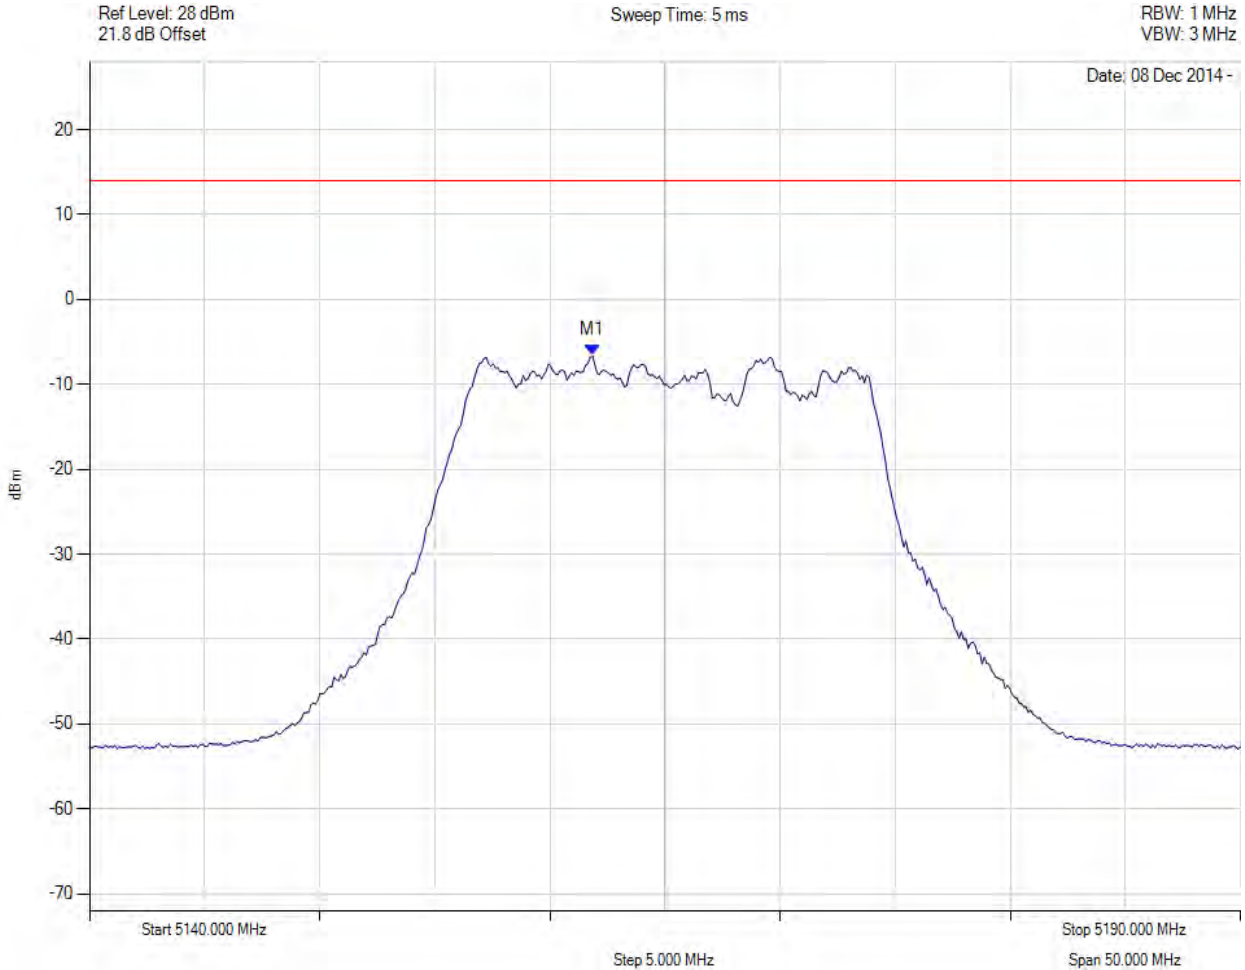

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5161.844 MHz : -6.604 dBm	Limit: $\leq 13.990$ dBm

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variation: 20 MHz, Channel: 5165.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

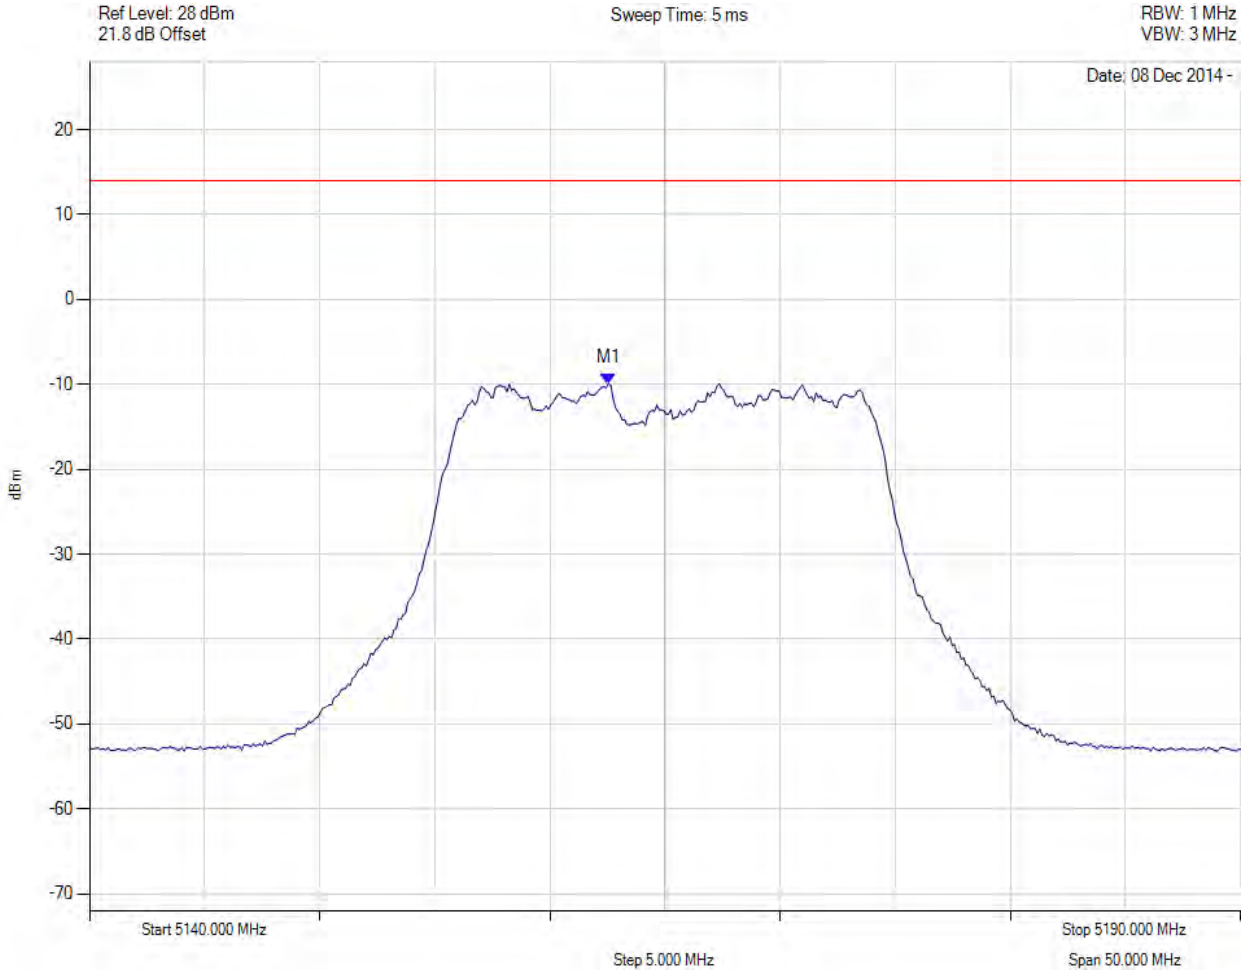

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5162.545 MHz : -9.886 dBm	Limit: $\leq 13.990$ dBm

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 181 of 203

PEAK POWER SPECTRAL DENSITY



Variation: 20 MHz, Channel: 5165.00 MHz, SUM, Temp: Ambient, Voltage: 55 Vdc

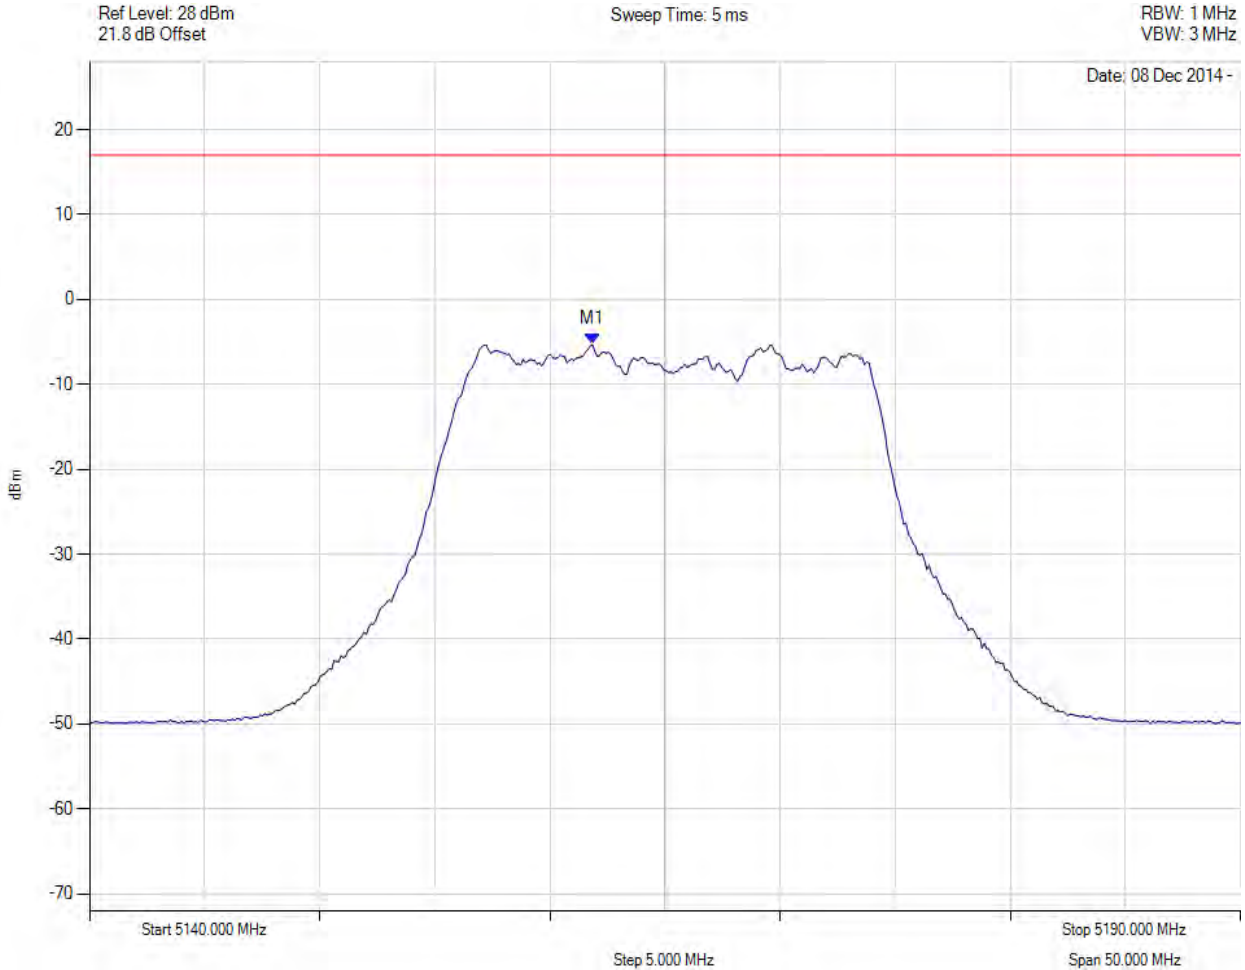

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5162 MHz : -5 dBm M1 + DCCF : 5162 MHz : -5.135 dBm Duty Cycle Correction Factor : +0.18 dB	Limit: $\leq 17.0$ dBm Margin: -22.1 dB

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 182 of 203

PEAK POWER SPECTRAL DENSITY



Variant: 20 MHz, Channel: 5200.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc

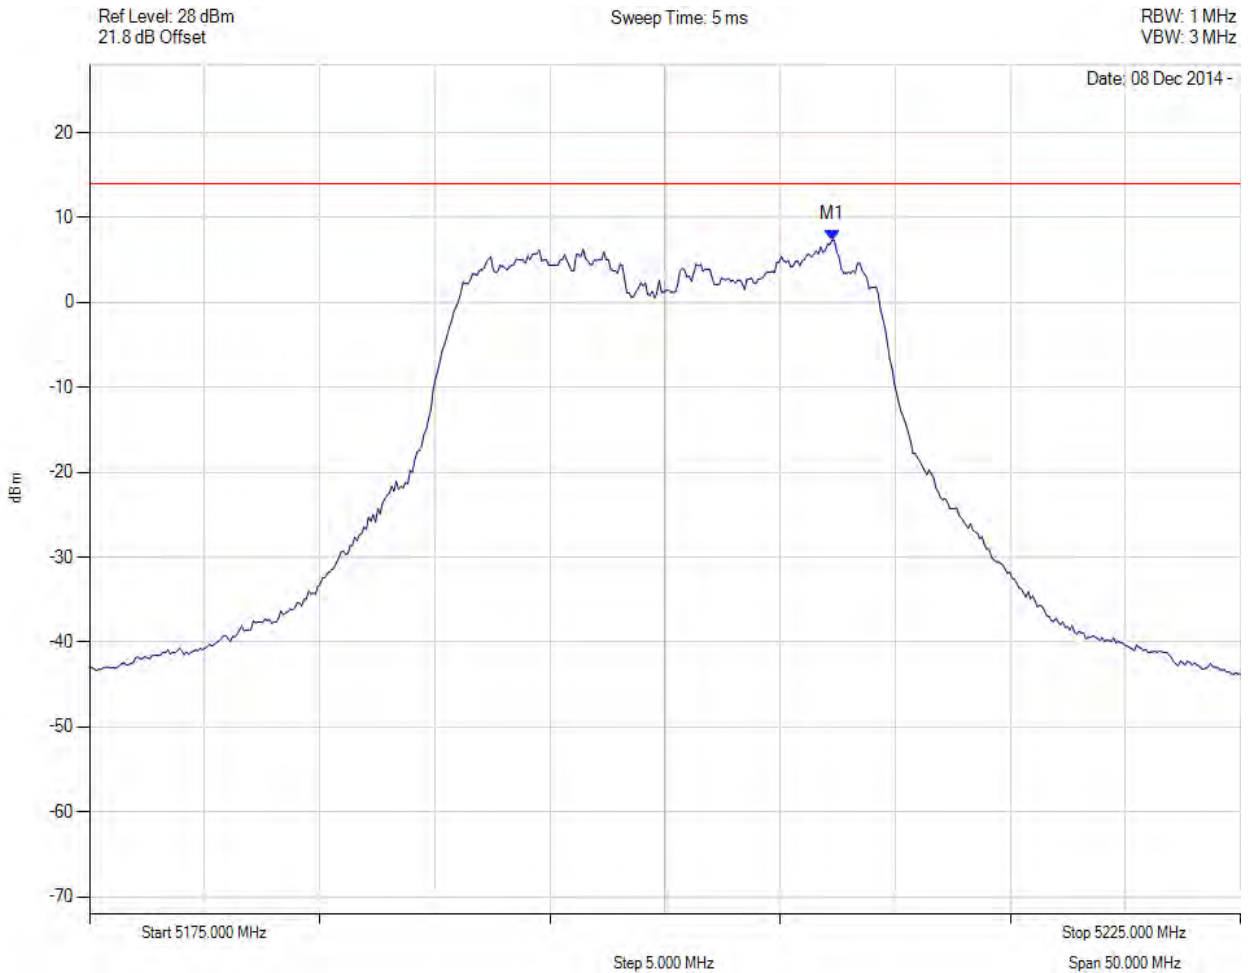

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5207.265 MHz : 7.372 dBm	Limit: $\leq 13.990$ dBm

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variant: 20 MHz, Channel: 5200.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

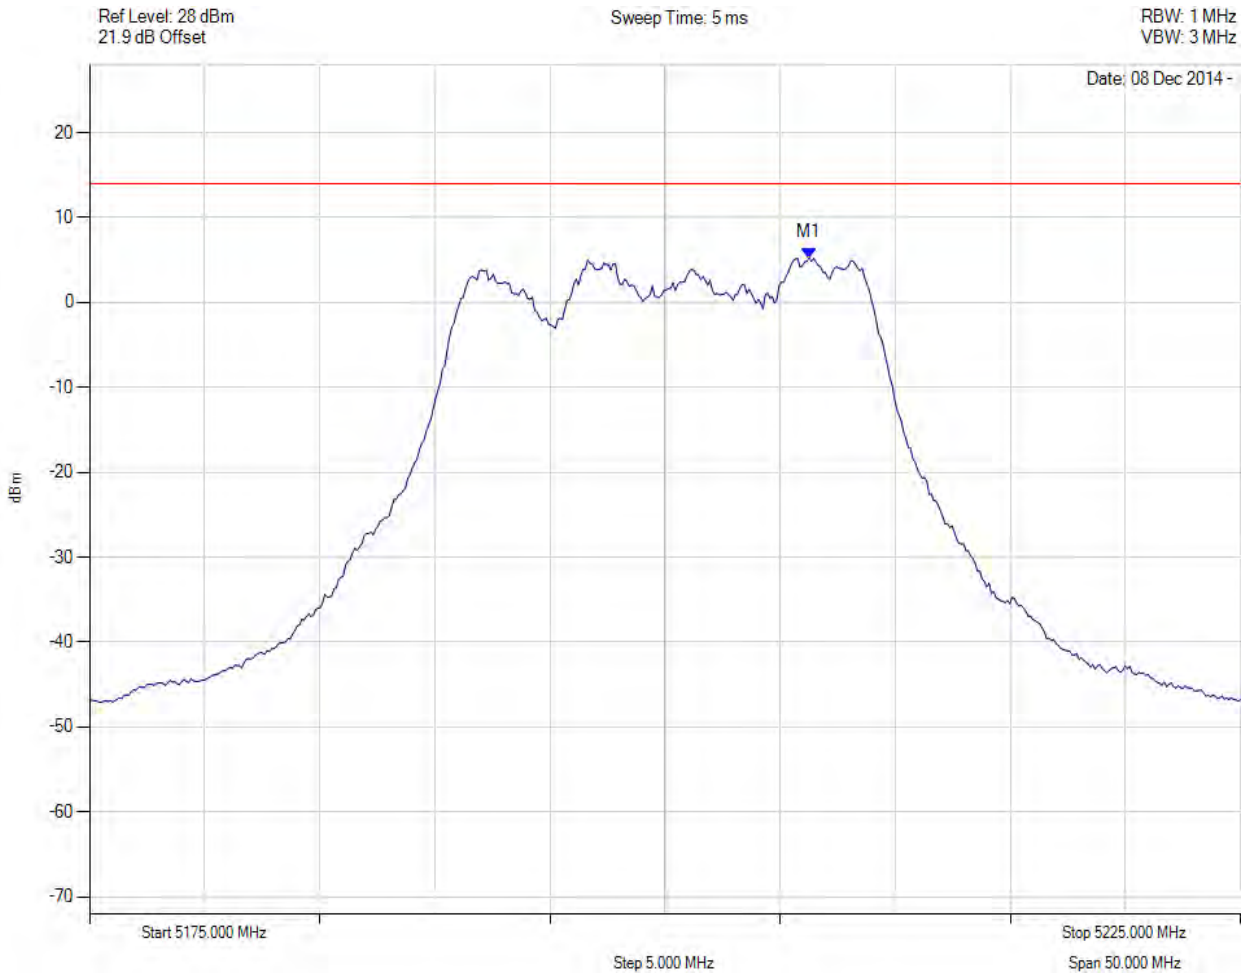

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5206.263 MHz : 5.264 dBm	Channel Frequency: 5200.00 MHz

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variant: 20 MHz, Channel: 5200.00 MHz, SUM, Temp: Ambient, Voltage: 55 Vdc

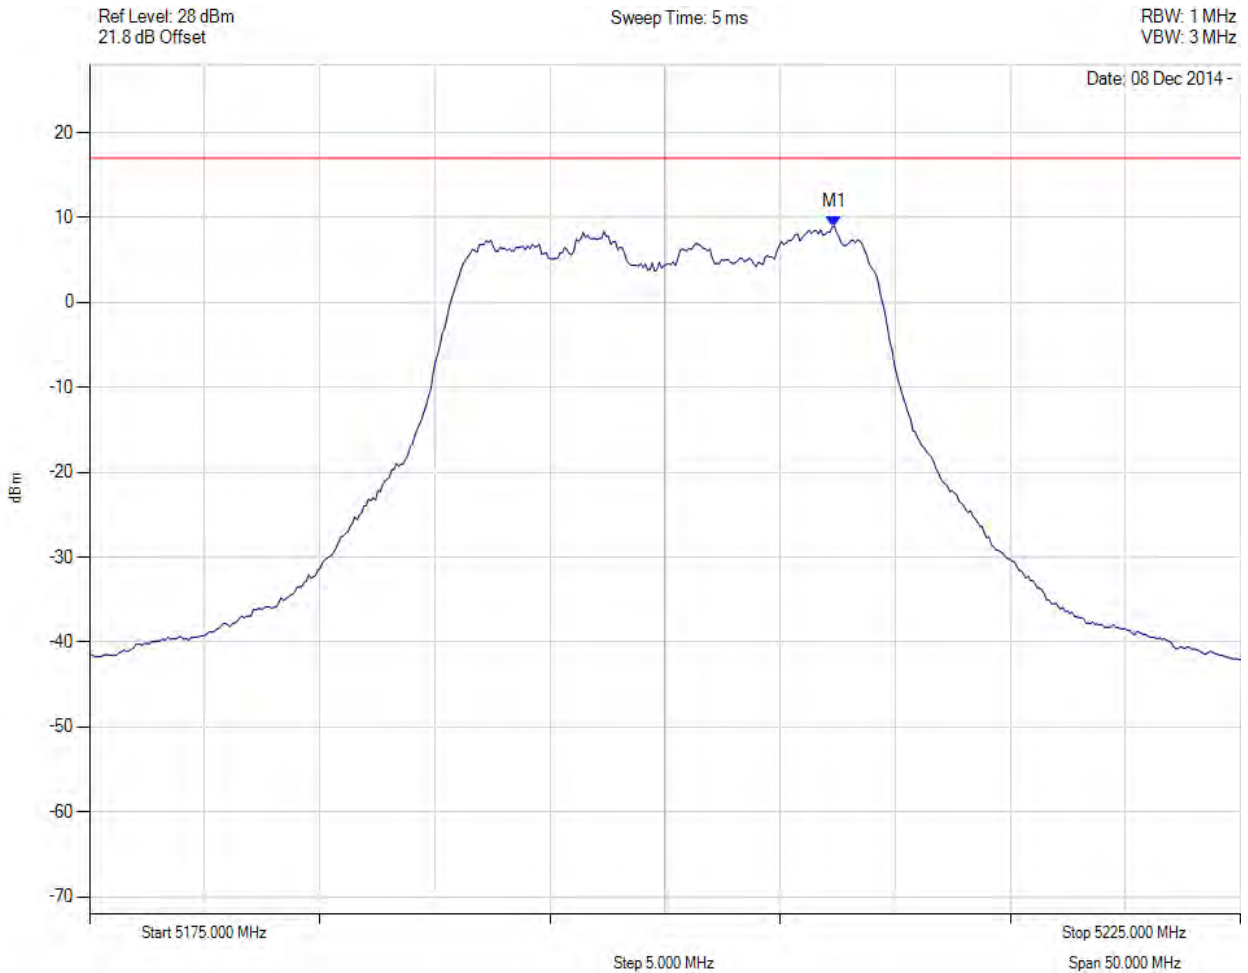

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5207 MHz : 9 dBm M1 + DCCF : 5207 MHz : 9.166 dBm Duty Cycle Correction Factor : +0.18 dB	Limit: $\leq 17.0$ dBm Margin: -7.8 dB

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






PEAK POWER SPECTRAL DENSITY



Variation: 20 MHz, Channel: 5240.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc

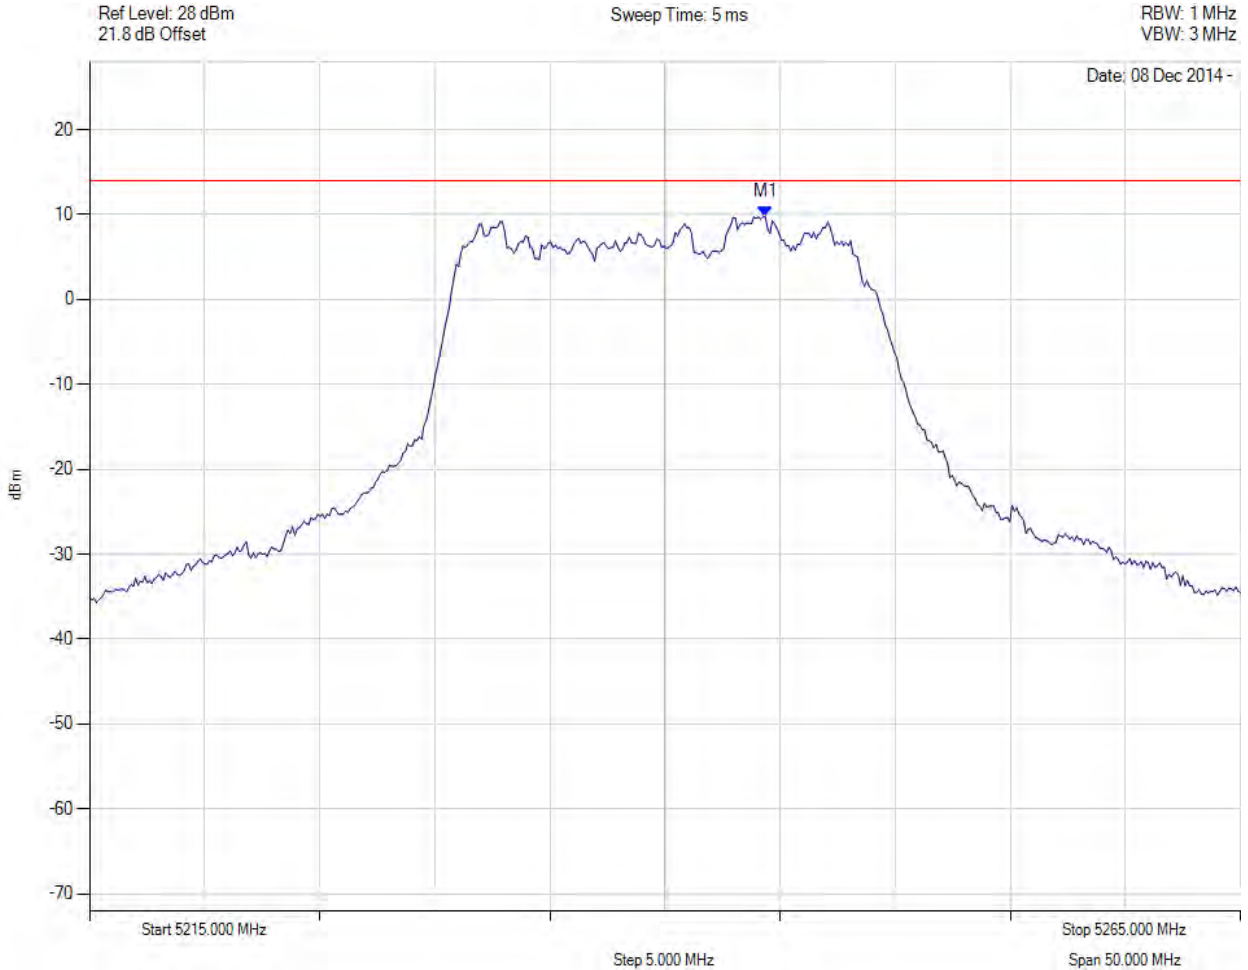

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5244.359 MHz : 9.749 dBm	Limit: $\leq 13.990$ dBm

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variation: 20 MHz, Channel: 5240.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

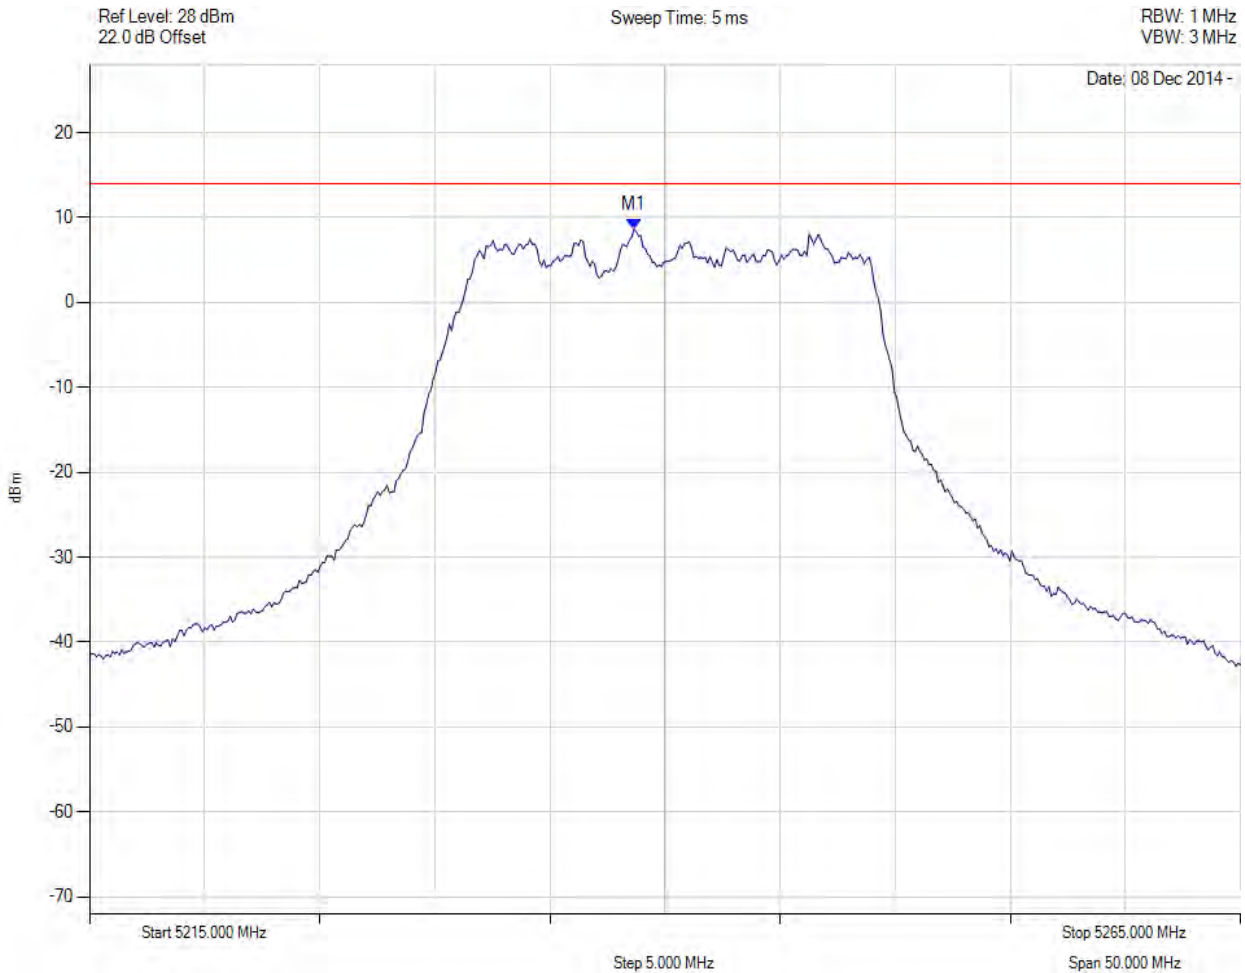

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5238.647 MHz : 8.597 dBm	Limit: $\leq 13.990$ dBm

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variation: 20 MHz, Channel: 5240.00 MHz, SUM, Temp: Ambient, Voltage: 55 Vdc

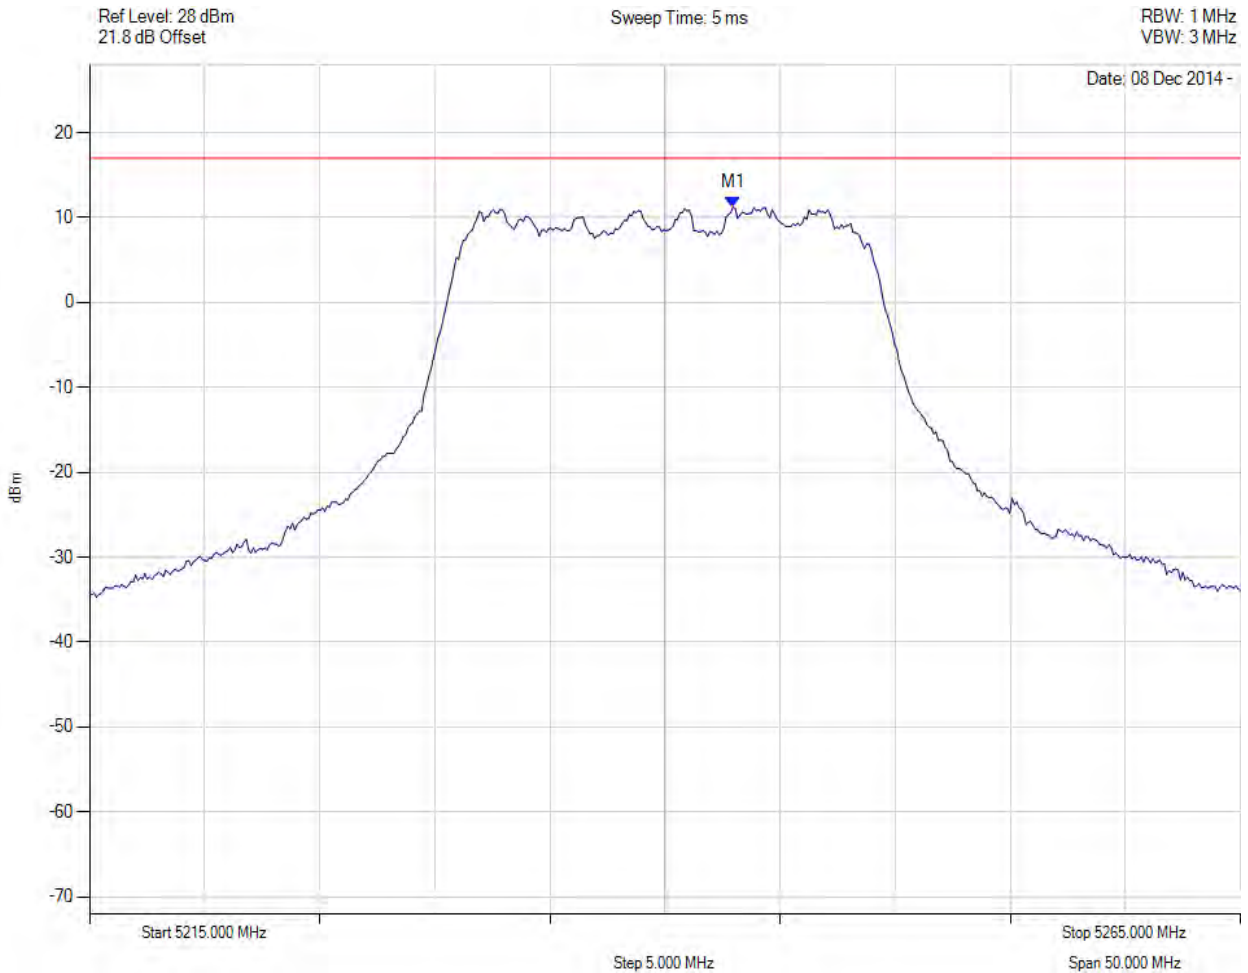

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5243 MHz : 11 dBm M1 + DCCF : 5243 MHz : 11.448 dBm Duty Cycle Correction Factor : +0.18 dB	Limit: $\leq 17.0$ dBm Margin: -5.6 dB

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variant: 40 MHz, Channel: 5172.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc

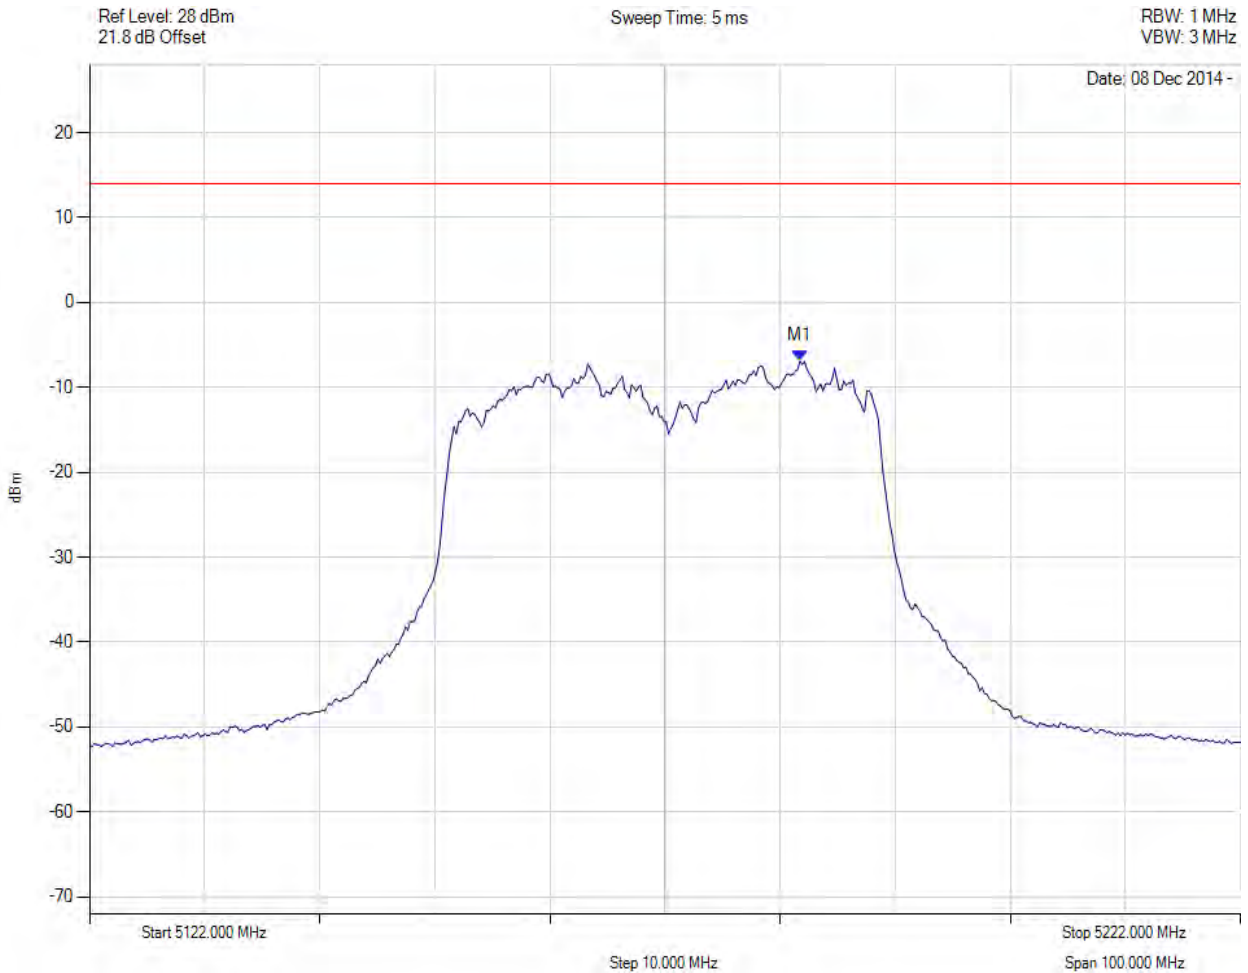

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5183.723 MHz : -6.910 dBm	Limit: $\leq$ 13.990 dBm

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variant: 40 MHz, Channel: 5172.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

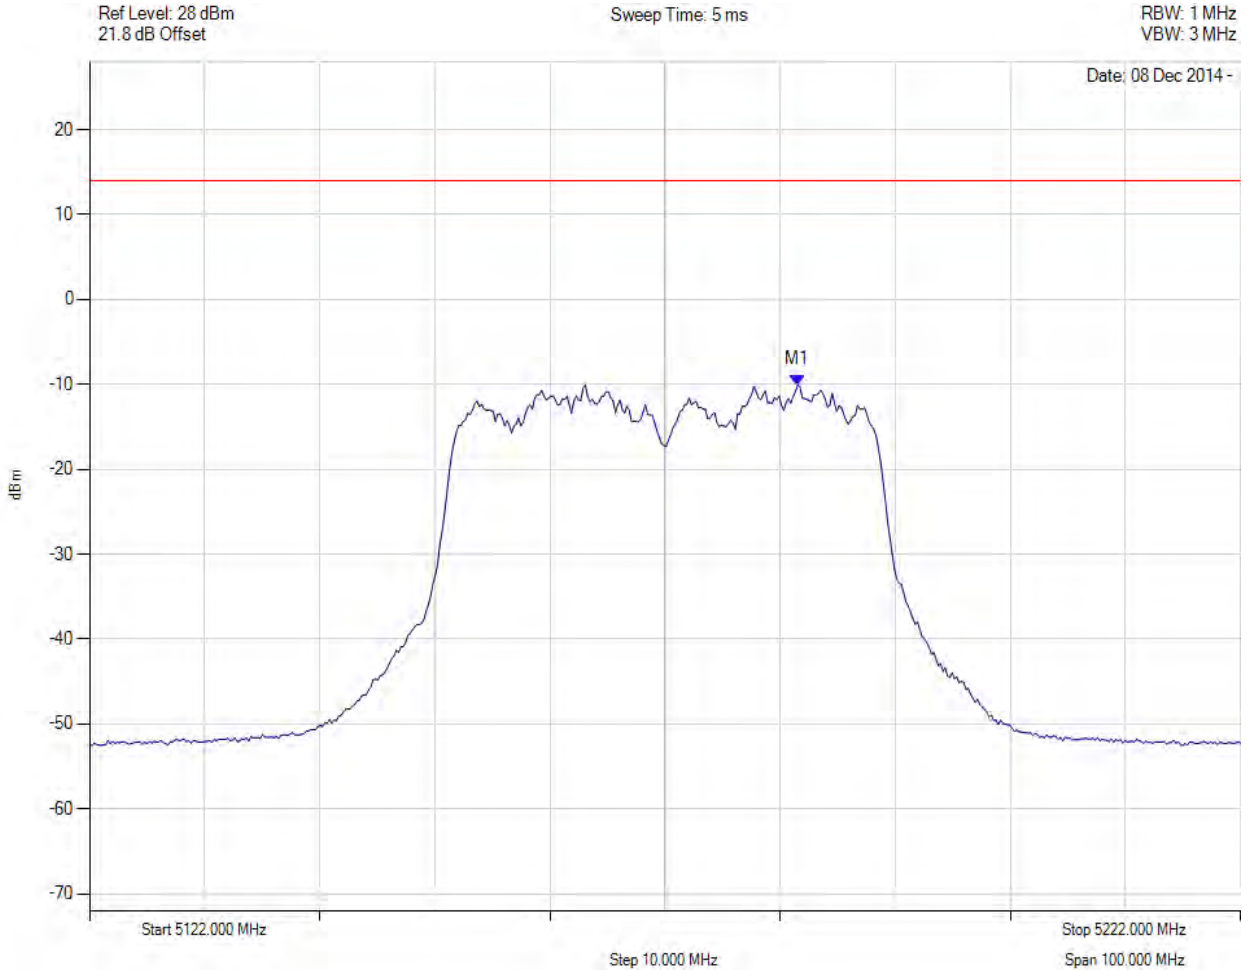

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5183.523 MHz : -10.062 dBm	Limit: $\leq 13.990$ dBm

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variation: 40 MHz, Channel: 5172.00 MHz, SUM, Temp: Ambient, Voltage: 55 Vdc

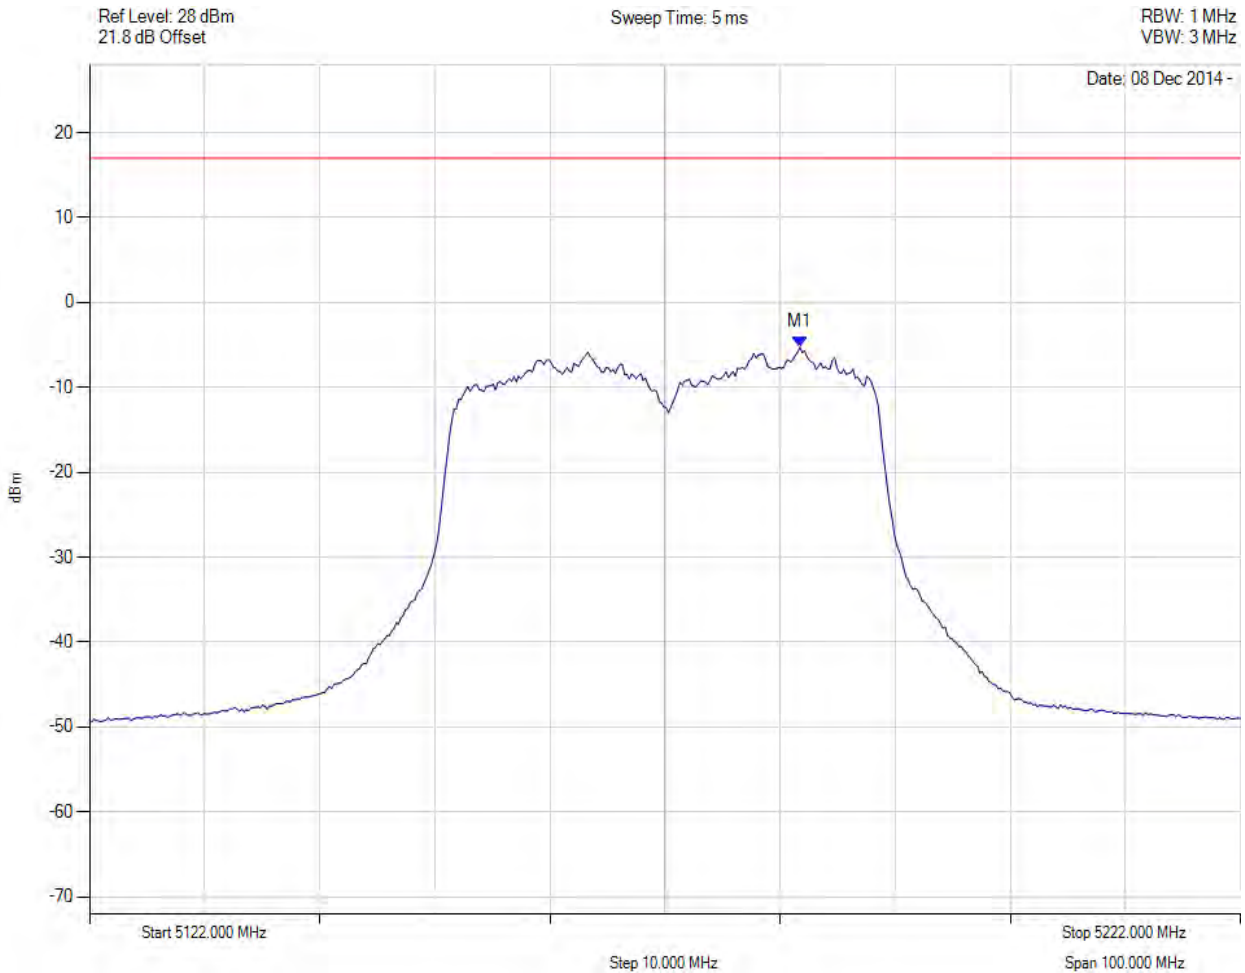

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5184 MHz : -5 dBm M1 + DCCF : 5184 MHz : -4.996 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: $\leq 17.0$ dBm Margin: -22.0 dB

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variant: 40 MHz, Channel: 5200.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc

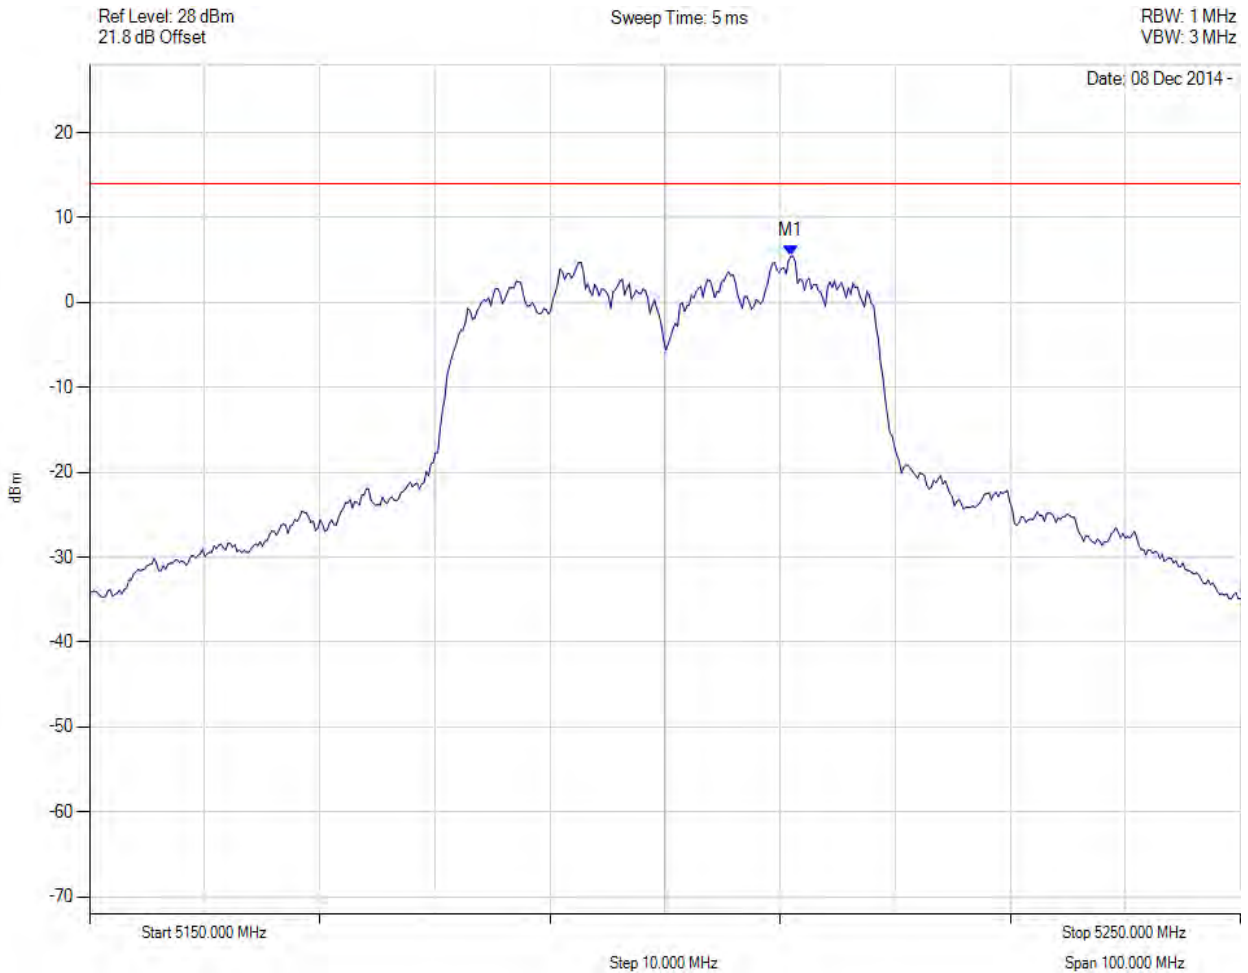

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5210.922 MHz : 5.458 dBm	Limit: $\leq 13.990$ dBm

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variant: 40 MHz, Channel: 5200.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

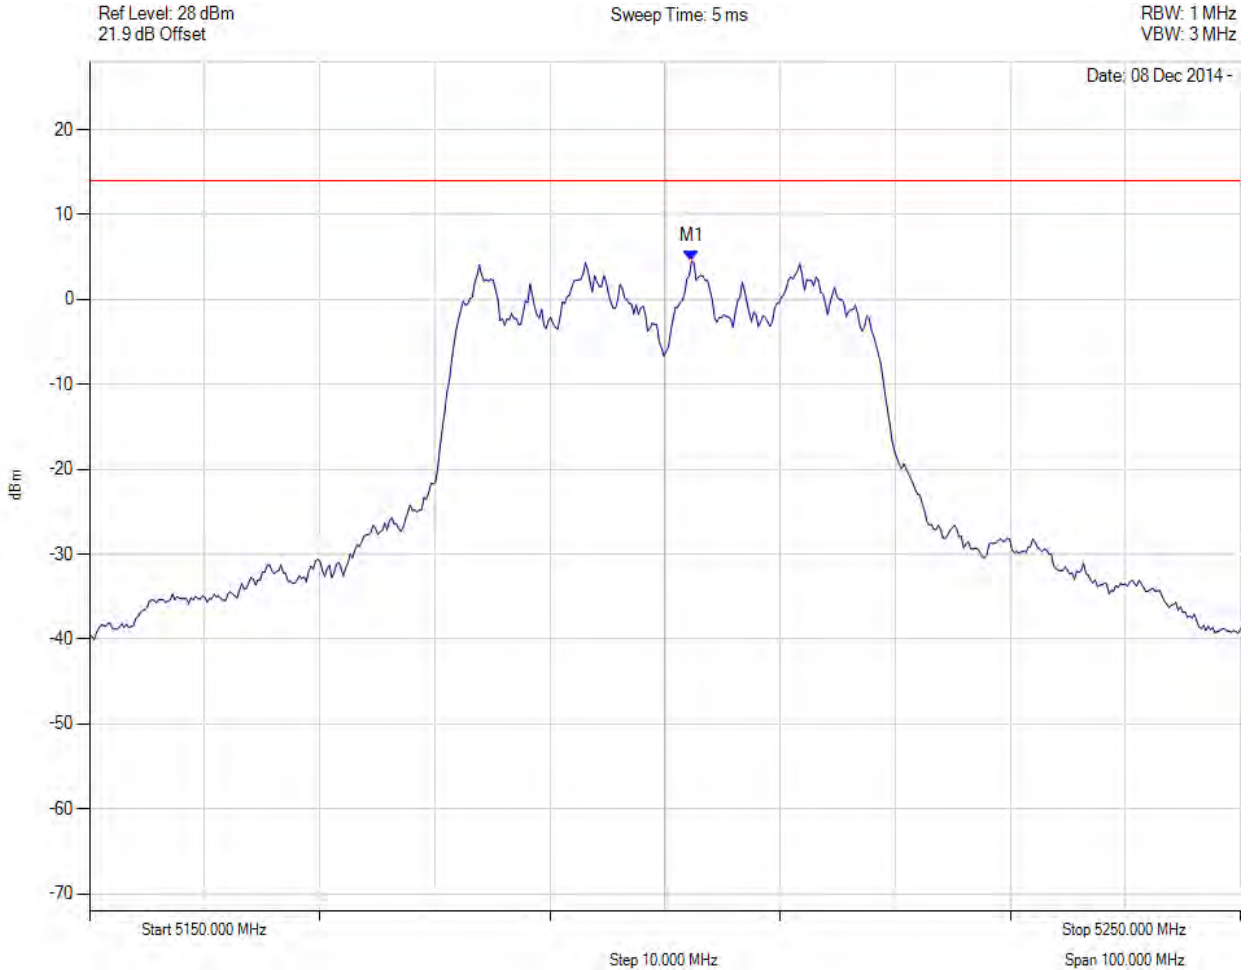

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5202.305 MHz : 4.507 dBm	Channel Frequency: 5200.00 MHz

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






PEAK POWER SPECTRAL DENSITY



Variant: 40 MHz, Channel: 5200.00 MHz, SUM, Temp: Ambient, Voltage: 55 Vdc

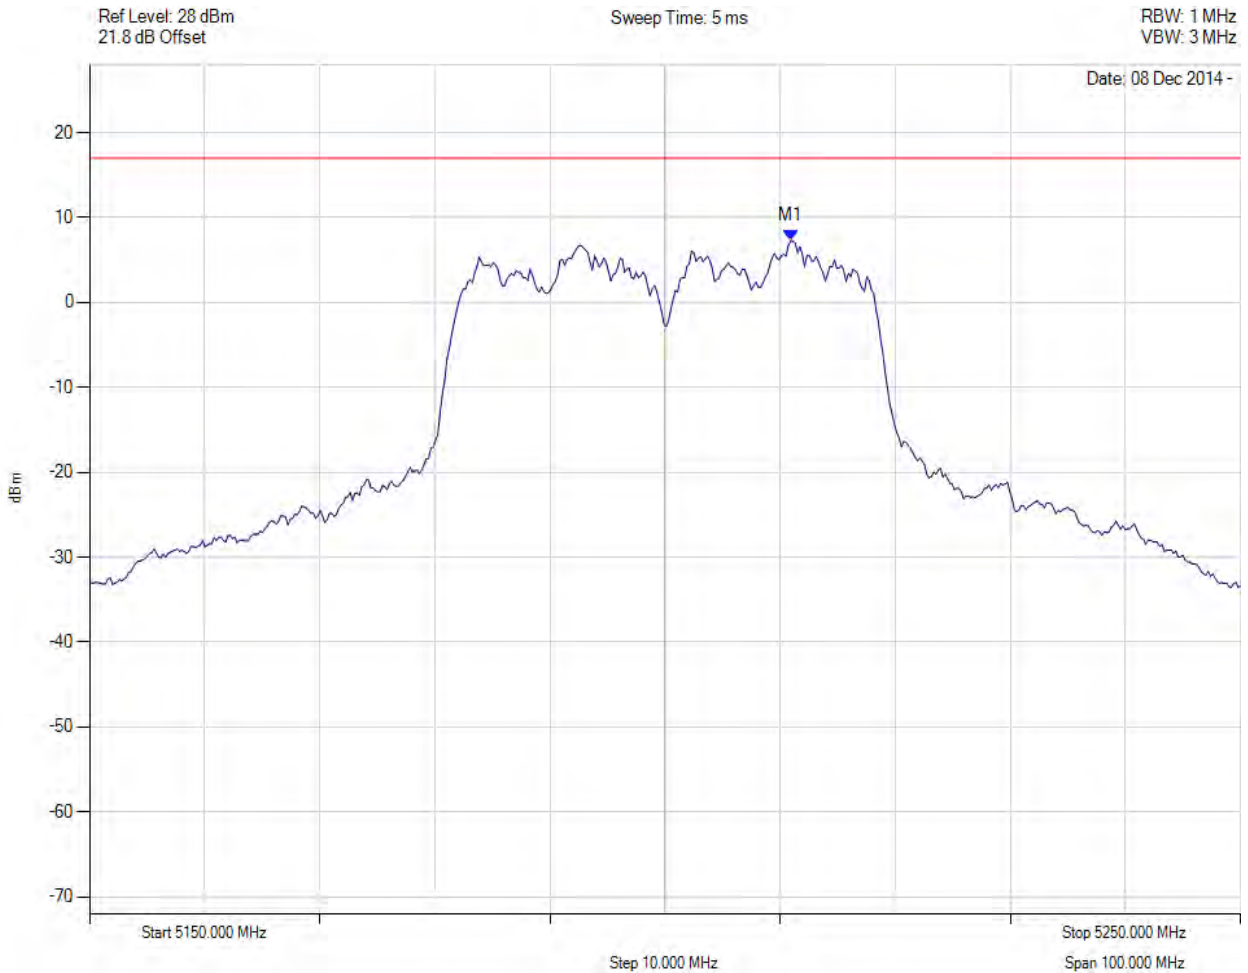

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5211 MHz : 7 dBm M1 + DCCF : 5211 MHz : 7.554 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: $\leq 17.0$ dBm Margin: -9.5 dB

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variant: 40 MHz, Channel: 5230.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc

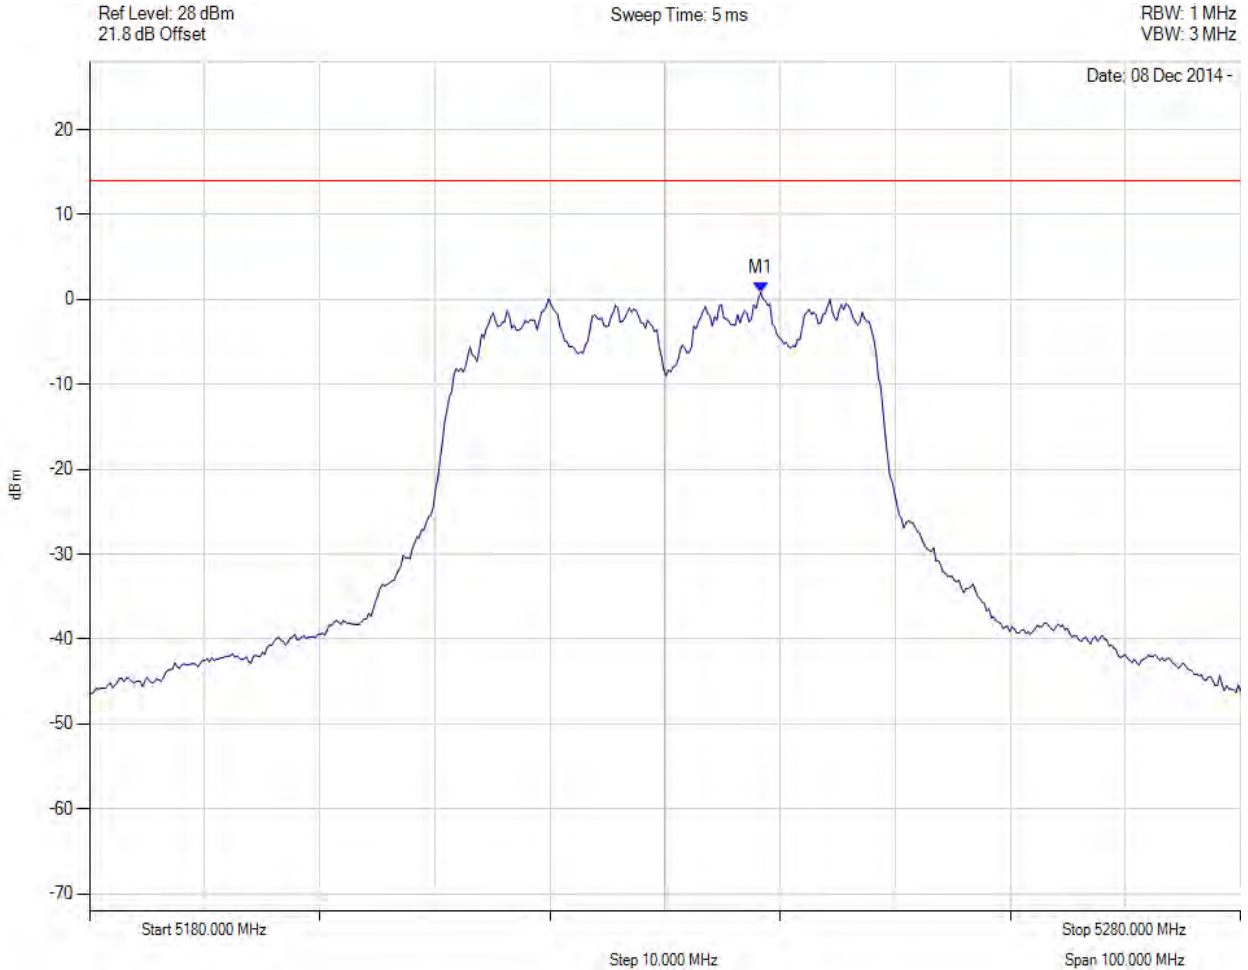

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5238.317 MHz : 0.800 dBm	Limit: $\leq 13.990$ dBm

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 195 of 203

PEAK POWER SPECTRAL DENSITY



Variant: 40 MHz, Channel: 5230.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

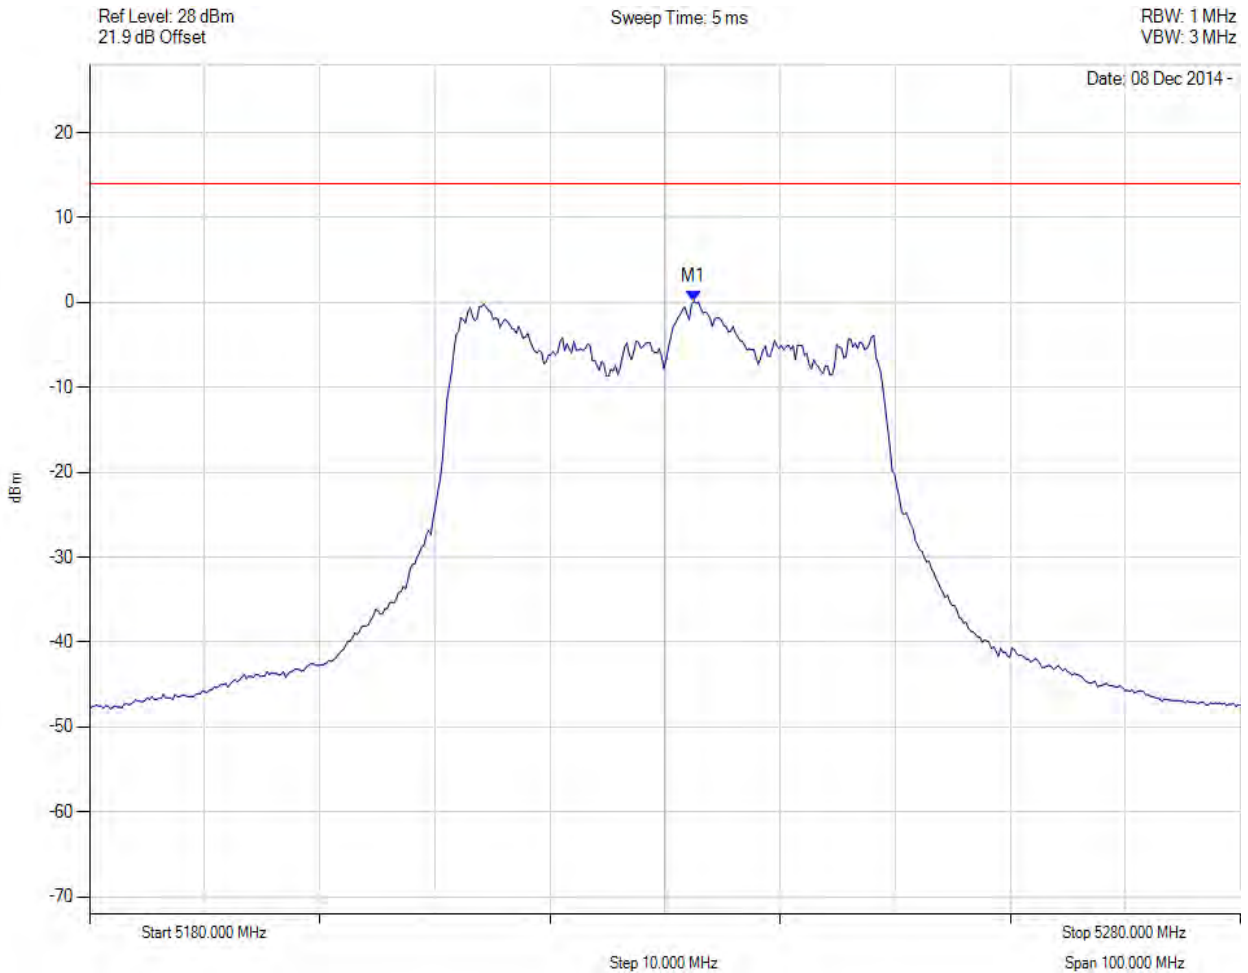

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5232.505 MHz : 0.109 dBm	Limit: $\leq 13.990$ dBm

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variant: 40 MHz, Channel: 5230.00 MHz, SUM, Temp: Ambient, Voltage: 55 Vdc

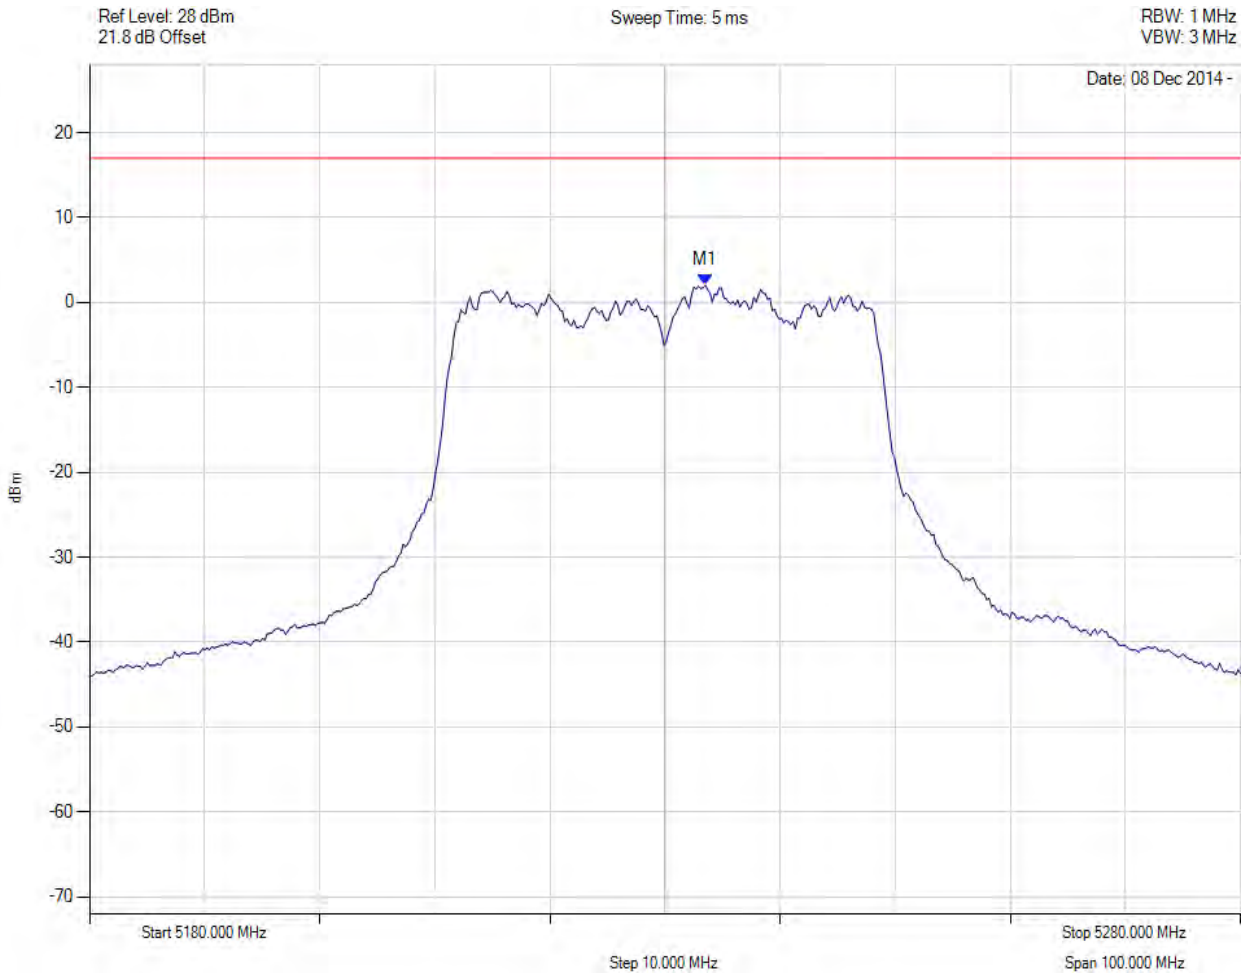

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5234 MHz : 2 dBm M1 + DCCF : 5234 MHz : 2.301 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: $\leq 17.0$ dBm Margin: -14.7 dB

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variant: 80 MHz, Channel: 5190.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc

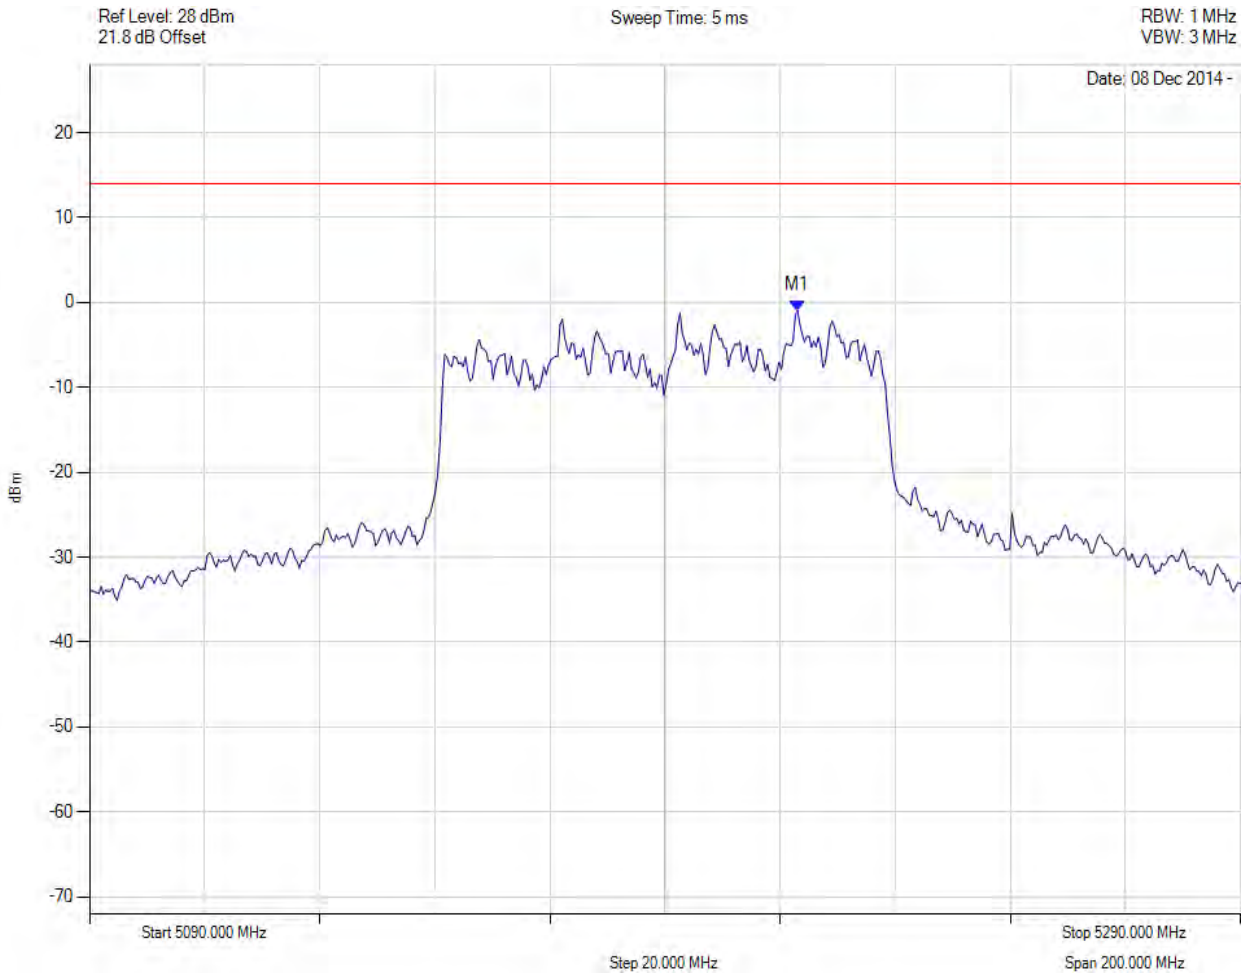

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5213.046 MHz : -0.925 dBm	Limit: ≤ 13.990 dBm

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variation: 80 MHz, Channel: 5190.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

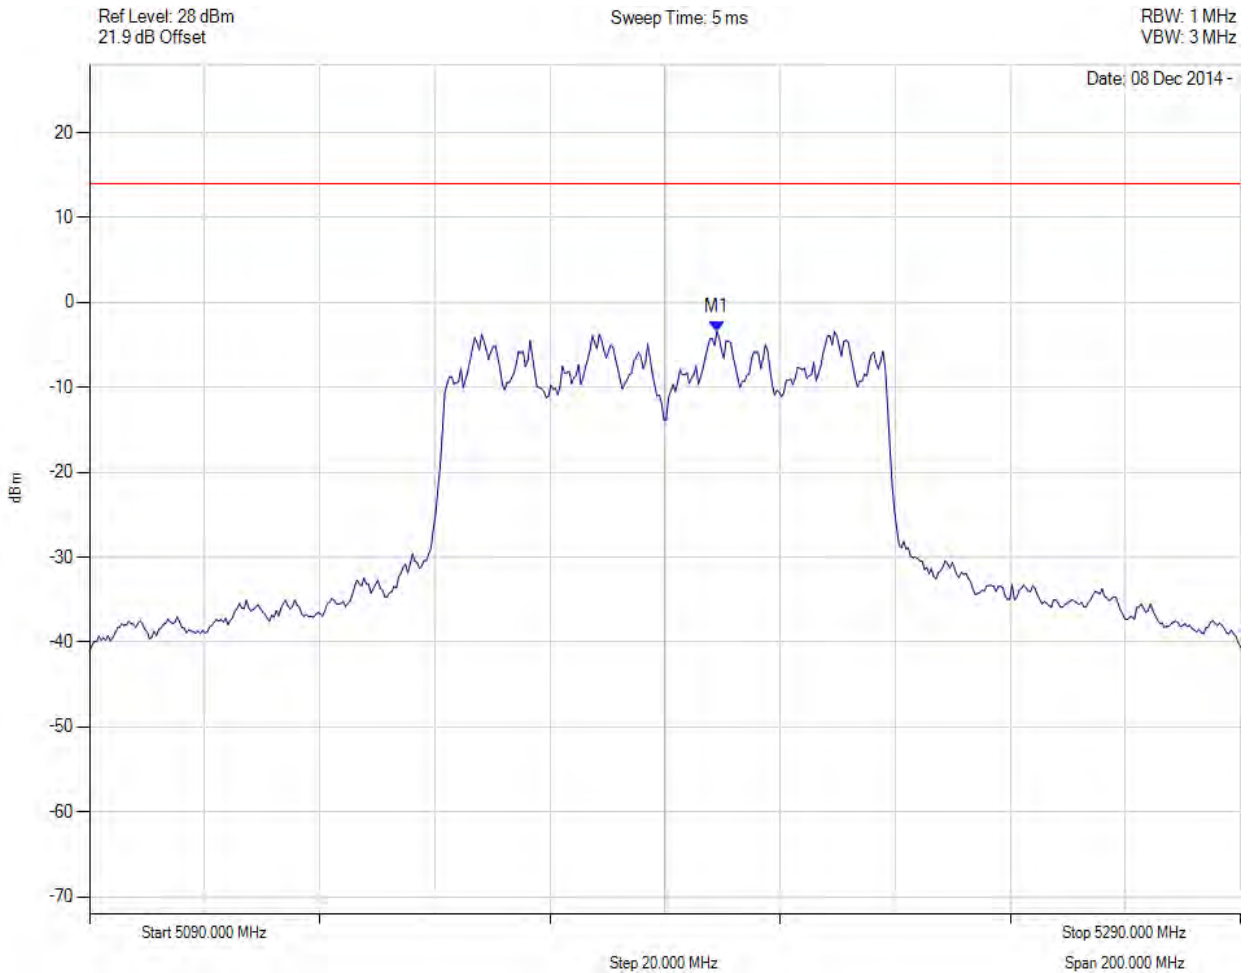

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5199.018 MHz : -3.407 dBm	Limit: ≤ 13.990 dBm

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variation: 80 MHz, Channel: 5190.00 MHz, SUM, Temp: Ambient, Voltage: 55 Vdc

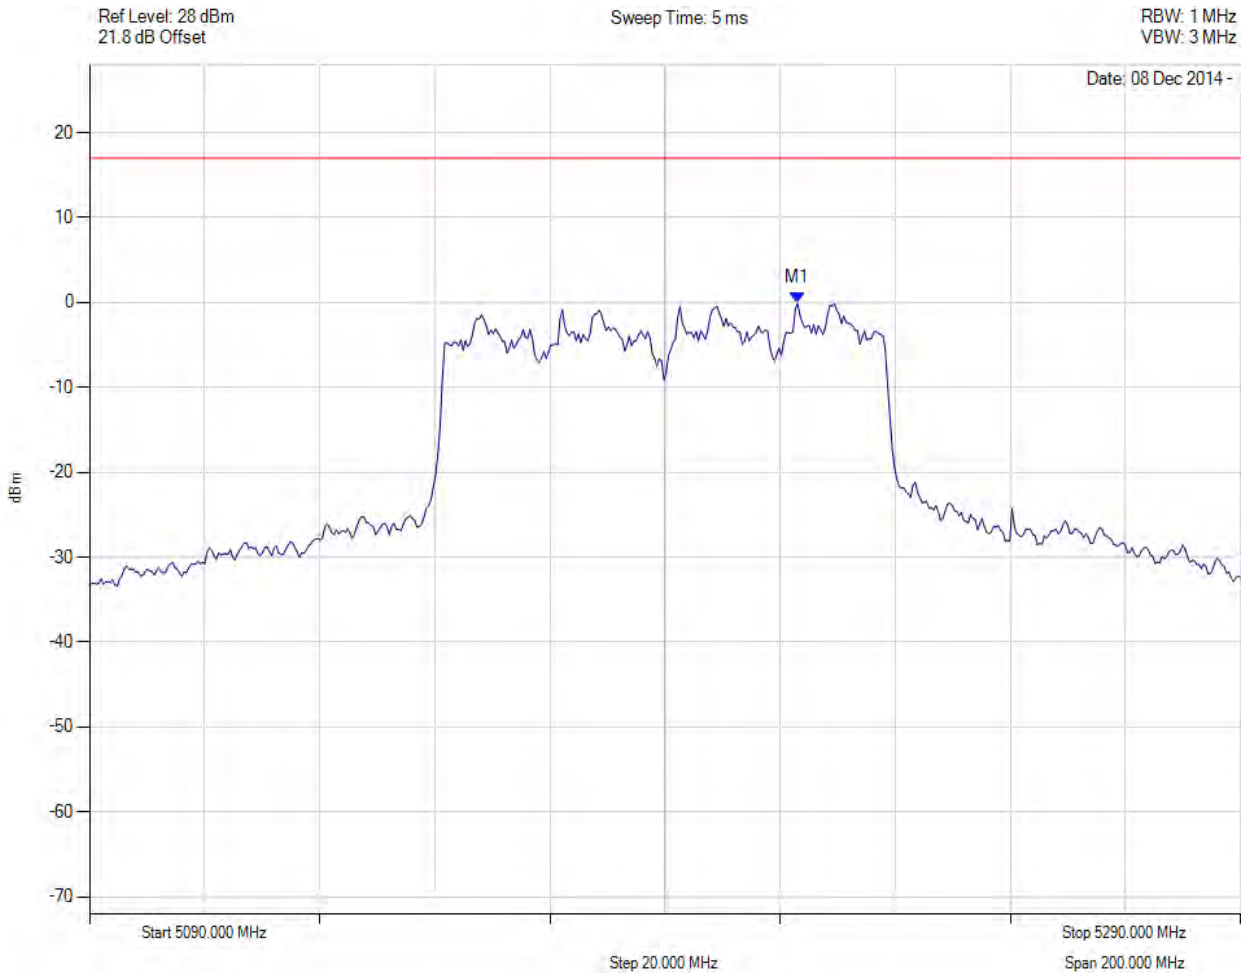

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5213 MHz : 0 dBm M1 + DCCF : 5213 MHz : 1.106 dBm Duty Cycle Correction Factor : +1.19 dB	Limit: $\leq 17.0$ dBm Margin: -15.9 dB

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK POWER SPECTRAL DENSITY



Variant: 80 MHz, Channel: 5210.00 MHz, Chain a, Temp: Ambient, Voltage: 55 Vdc

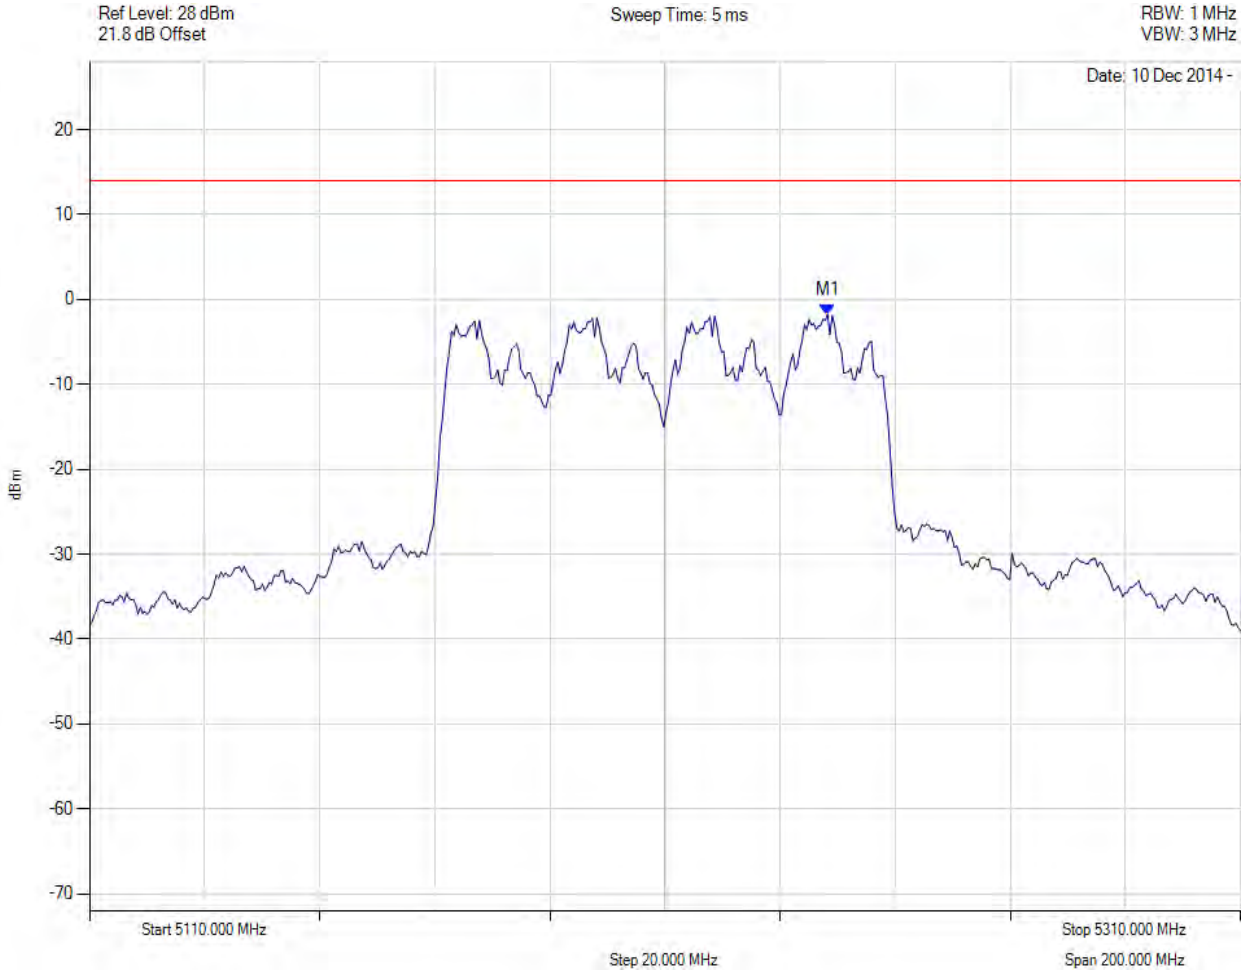

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5238.257 MHz : -1.768 dBm	Limit: ≤ 13.990 dBm

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






PEAK POWER SPECTRAL DENSITY



Variant: 80 MHz, Channel: 5210.00 MHz, Chain b, Temp: Ambient, Voltage: 55 Vdc

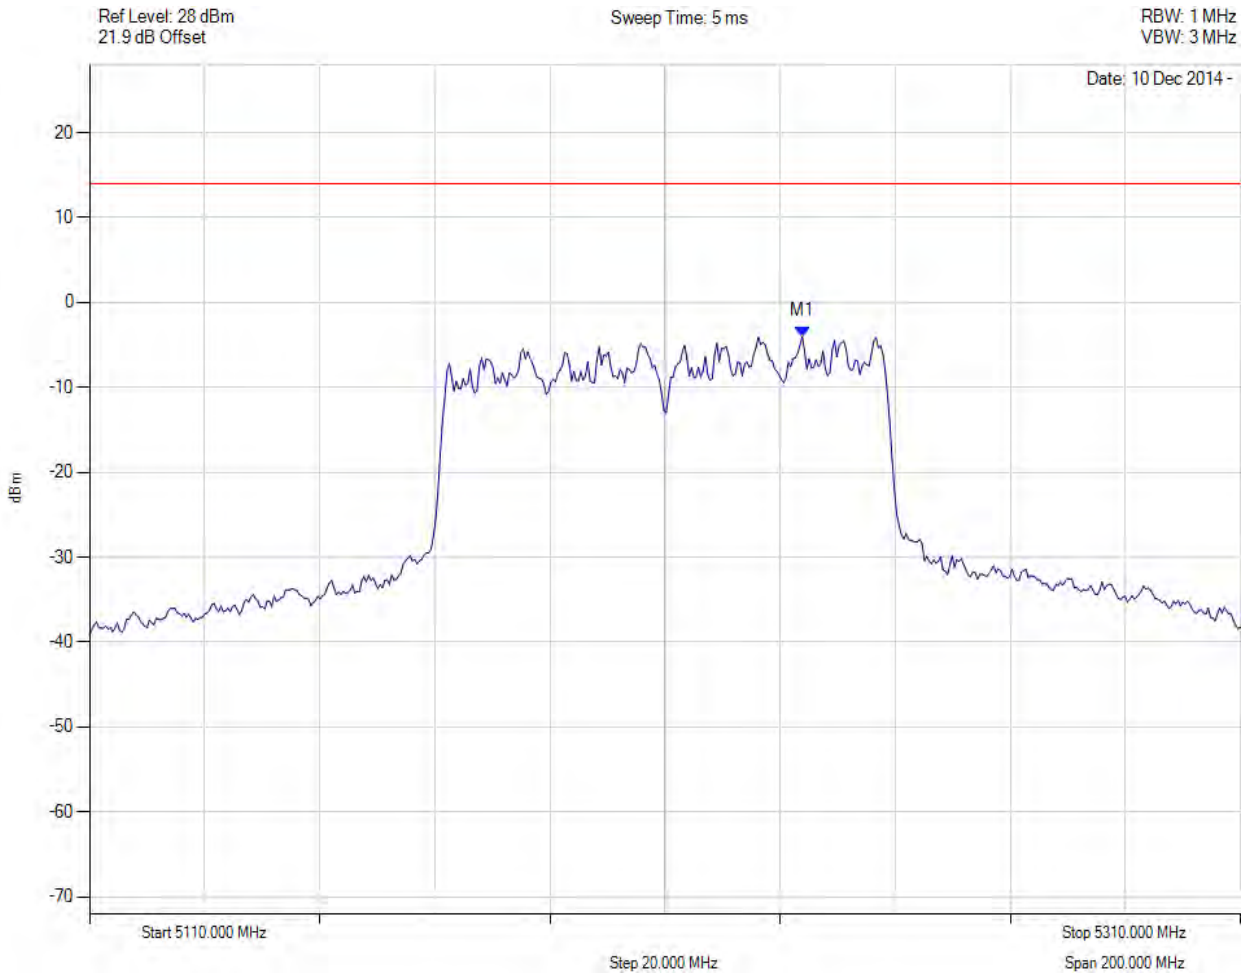

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5233.848 MHz : -4.020 dBm	Limit: $\leq 13.990$ dBm

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** RADWIN Ltd AP0158770 RF Module  
**To:** FCC 47 CFR Part 15.407  
**Serial #:** RDWN34-U6 Rev A  
**Issue Date:** 31st January 2015  
**Page:** 202 of 203

PEAK POWER SPECTRAL DENSITY



Variation: 80 MHz, Channel: 5210.00 MHz, SUM, Temp: Ambient, Voltage: 55 Vdc

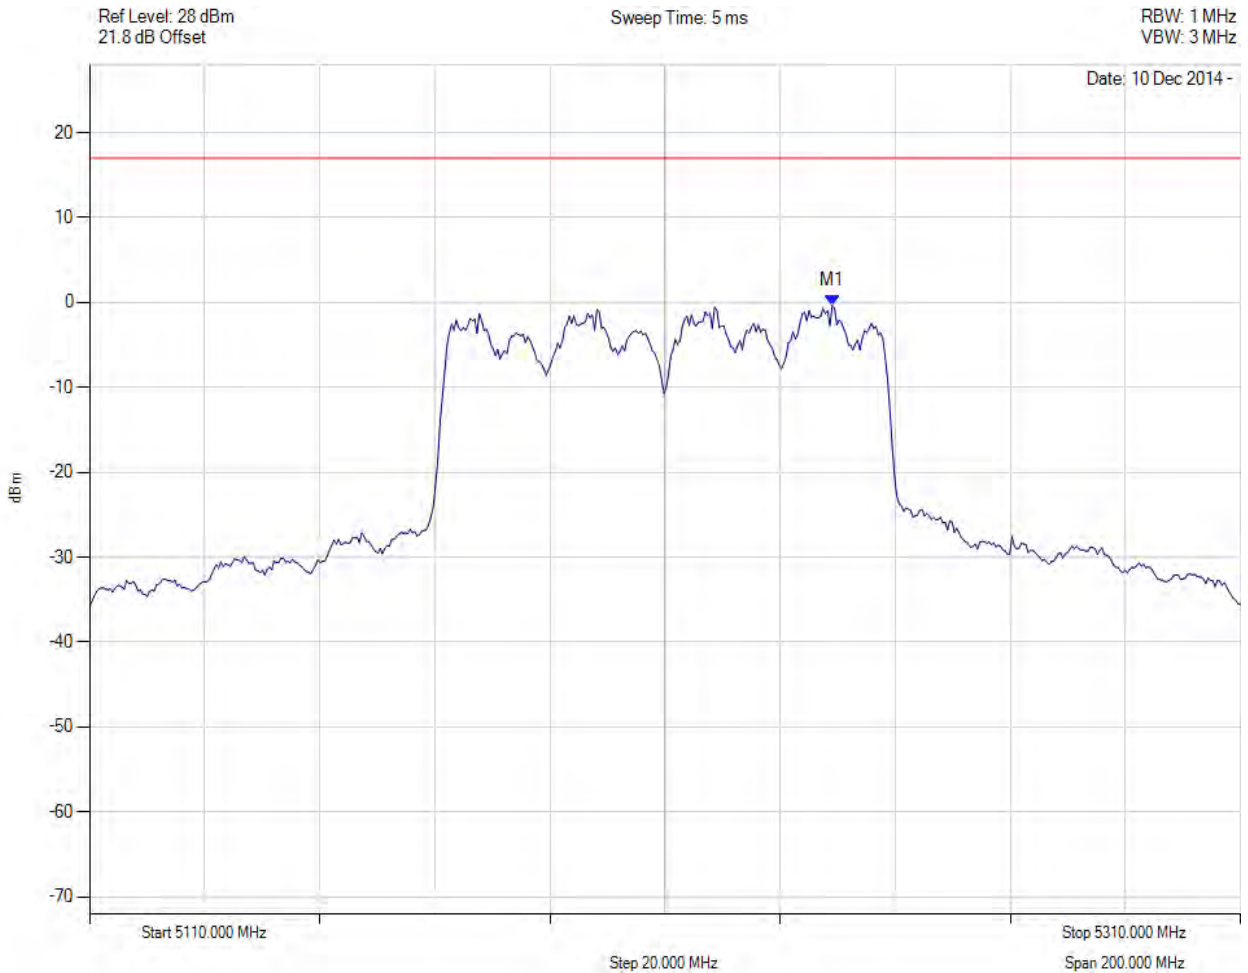

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5239 MHz : 0 dBm M1 + DCCF : 5239 MHz : 0.825 dBm Duty Cycle Correction Factor : +1.19 dB	Limit: $\leq 17.0$ dBm Margin: -16.2 dB

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



575 Boulder Court  
Pleasanton, California 94566, USA  
Tel: 1.925.462.0304  
Fax: 1.925.462.0306  
[www.micomlabs.com](http://www.micomlabs.com)