


RADWIN

AP0158770

5 GHz Wireless Module

REFERENCE GUIDE

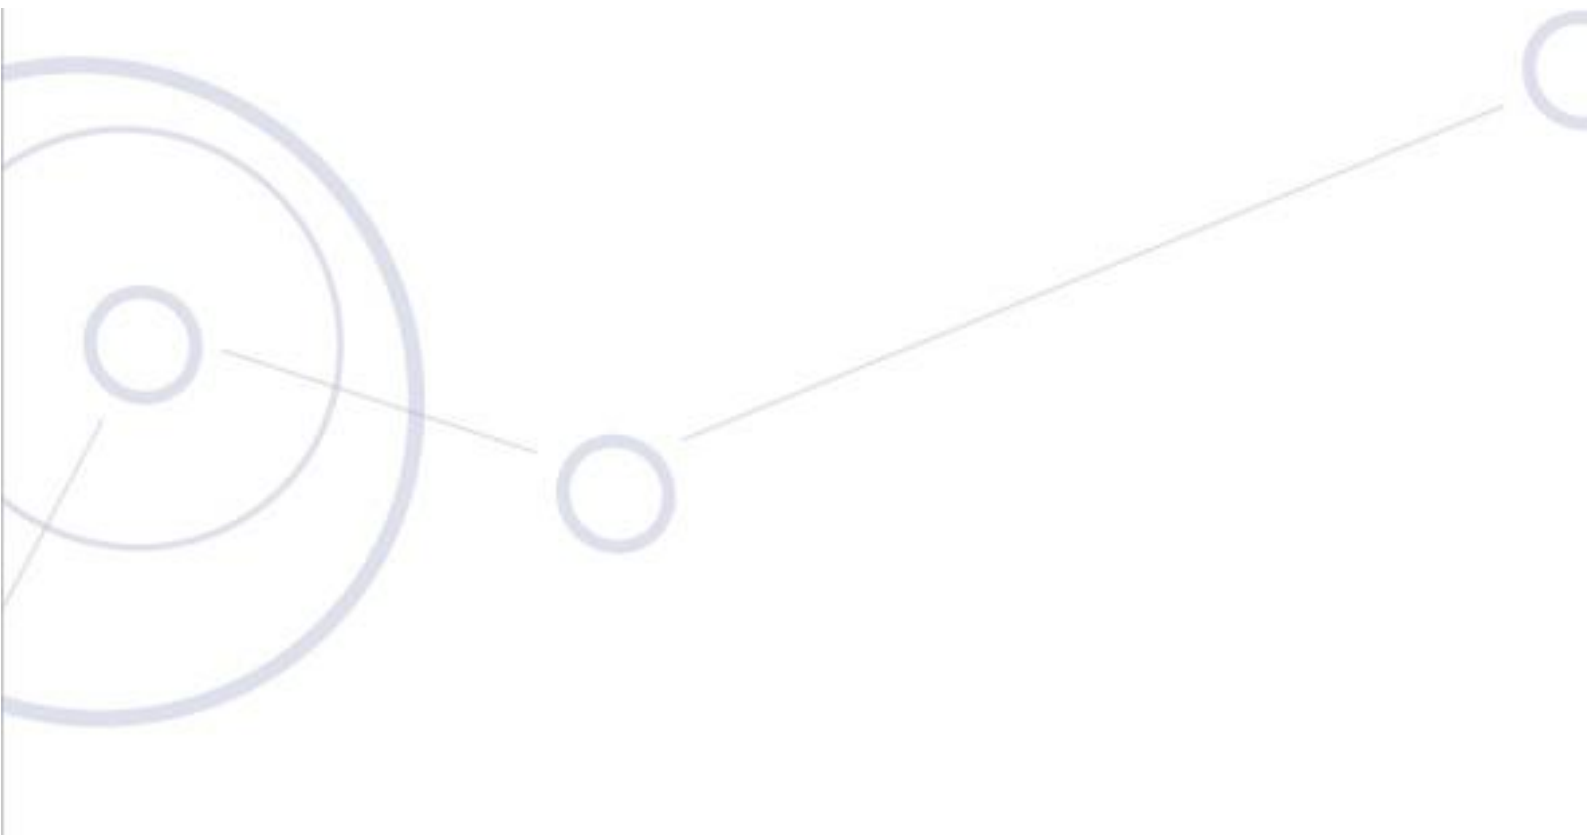

Regulatory Compliance

FCC/IC - Compliance

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules and IC RSS standards. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to this equipment not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



Warning

It is the responsibility of the installer to ensure that when using the outdoor antenna kits, only those antennas certified with the product are used. The use of any antenna other than those certified with the product is expressly forbidden by FCC rules 47 CFR part 15.204 and IC RSS standards.



Avertissement

Il est de la responsabilité de l'installateur de s'assurer que lorsque vous utilisez les kits d'antennes extérieures, seules les antennes certifiés avec le produit sont utilisés. L'utilisation d'une antenne autre que ceux qui sont certifiés avec le produit est expressément interdite par la réglementation FCC partie 47 CFR 15.204 et IC normes RSS.



Caution

Outdoor units and antennas should be installed ONLY by experienced installation professionals who are familiar with local building and safety codes and, wherever applicable, are licensed by the appropriate government regulatory authorities. Failure to do so may void the product warranty and may expose the end user or the service provider to legal and financial liabilities. Resellers or distributors of this equipment are not liable for injury, damage or violation of regulations associated with the installation of outdoor units or antennas. The installer should configure the output power level of antennas according to country regulations and antenna type.



Prudence

Les unités extérieures et les antennes doivent être installés que par des professionnels expérimentés d'installation qui sont familiers avec les normes locales et les codes de sécurité et, si applicable, sont agréées par les autorités gouvernementales de réglementation compétents. Ne pas le faire peut annuler la garantie du produit et peuvent exposer l'utilisateur final ou le fournisseur de services d'obligations juridiques et financiers. Revendeurs ou distributeurs de ces équipements ne sont pas responsables des blessures, des dommages ou violation des règlements liés à l'installation des unités extérieures ou des antennes. L'installateur doit configurer le niveau de puissance de sortie des antennes conformément aux réglementations nationales et le type d'antenne.



Warning

The antennas used for this transmitter must be installed to provide a separation distance of at least 314 cm from all persons and must not be co-located or operating in conjunction with another antenna or transmitter within a device



Avertissement

Les antennes utilisées pour cet émetteur doivent être installées de manière à fournir une distance de séparation d'au moins 314 cm par rapport à toutes les personnes et ne doivent pas être co-localisées ou fonctionner conjointement avec une autre antenne ou un autre émetteur dans un appareil



Warning

The module is granted to operate under FCC certification in the 4.9/5.1/5.3/5.4/5.8 GHz bands.

This device complies with Part 15 of the FCC rules and with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Cet appareil est conforme la norme d'Industrie Canada exempts de licence RSS (s). Son fonctionnement est soumis aux deux conditions suivantes:

1. Cet appareil ne peut pas causer d'interférences, et
2. Cet appareil doit accepter toute 3nterference, y compris les 3nterferences qui peuvent causer un mauvais fonctionnement de l'appareil.

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme la norme NMB-003 du Canada

Overview

The AP0158770 is a wireless module operating in the 4.9, 5.1, 5.3, 5.4 and 5.8 GHz frequency bands. It is a TDD OFDM radio supporting 5 MHz, 10 MHz, 20 MHz, 40 MHz and 80 MHz channel bandwidths.

The wireless module cannot work as a stand-alone device. It can operate and be controlled only when attached to a digital main board and altogether assembled in an enclosure suitable for outdoor use. The assembly of the wireless module attached to the digital main board is hereafter referred to as 'ODU'. The ODU in its various outdoor enclosures is manufactured by RADWIN.

The wireless module is certified as a limited modular approval type under the FCC ID: Q3K-5XACMOLD. It is also certified under IC: 5100A-5XACMOD.

Condition of Use

The AP0158770 wireless module is a proprietary radio interface and can only be connected to digital boards manufactured by RADWIN. The ODU resides in an outdoor enclosure also manufactured and assembled by RADWIN or its subcontractors. The wireless module is not for sale to the general public.

FCC rules and IC Regulation Restrictions

The ODU firmware is factory programmed to operate under the FCC rules and Industry Canada regulation restrictions. The firmware is locked and inaccessible by any third party. As a result of the above the user interface allows both the installer and the user to control the ODU only within the boundaries of the regional restrictions.

Antennas

The AP0158770 wireless module is certified with a wide range of antenna types covering both Point-to-Point and Point-to-Multipoint systems up to 32 dBi gain.

Antennas

Following is the list of antennas supported by the AP0158770 5 GHz Wireless Module:

Antenna Type	Manufacturer	Model Number	Antenna Max Gain (dBi)
Sector Dual Pole Integrated 120 Deg	RADWIN Ltd.	MT0128930	11
Sector Dual Pole 120 Deg	RADWIN Ltd.	RW-9061-5004	11
Sector Dual Pole Integrated 95 Deg	RADWIN Ltd.	AM0135060	12
Sector Dual Pole 90 Deg	RADWIN Ltd.	RW-9061-5001	14
Sector Dual Pole 60 Deg	RADWIN Ltd.	RW-9061-5002	16.5
Sector Dual Pole Integrated 90 Deg	RADWIN Ltd.	MT0125250	13
Flat Panel Dual Pole Integrated	RADWIN Ltd.	AM0119960	16
Flat Panel Dual Pole Integrated	RADWIN Ltd.	AM0111760	16.5
Flat Panel Dual Pole Integrated	RADWIN Ltd.	MT0070760	24
Flat Panel Dual Pole External	RADWIN Ltd.	RW-9612-5001	23
Flat Panel Dual Pole External	RADWIN Ltd.	RW-9622-5001	29
Dual Pole Dish	RADWIN Ltd.	RW-9721-5158	29
Dual Pole Dish	RADWIN Ltd.	RW-9732-4958*	32
Shark Fin Monopole	RADWIN Ltd.	RW-9401-5002	12.5
Smart Antenna Multi Pole Integrated	RADWIN Ltd.	AM0156430	20.5

* Not applicable for 4.9 GHz band

Maximum Output Power

5725 – 5850 MHz band - FCC/IC

The maximum output power can be set as follows, when operating in the 5.8 GHz band, under FCC and IC regulations. The power values are for PtP systems and PtMP systems with 0 to 6 dBi total antenna assembly gain. For PtMP systems the total EIRP is limited to 36 dBm. Therefore the output power for these systems, using higher than 6 dBi total antenna assembly gains will be reduced to comply with 36 dBm EIRP.

The highest conducted output power shall be limited to 30 dBm in all channel bandwidths

5150 – 5250 MHz band – FCC

The maximum output power can be set as follows when transmitting in the 5.1 GHz band, under FCC regulations.

The total EIRP limit for PtP applications is 53 dBm.

The total EIRP limit for PtMP applications is 36 dBm.

The total EIRP limit for PtMP applications when transmitting at elevations above 30° relative to the horizon is 21 dBm.

5 MHz: 25.0 dBm 40 MHz: 27.0 dBm
10 MHz: 27.0 dBm 80 MHz: 29.0 dBm
20 MHz: 27.0 dBm

5250 – 5350 MHz band – FCC/IC

The maximum output power can be set as follows, when operating in the 5.3 GHz band. The total EIRP limit is 30 dBm.

5 MHz: 14.0 dBm	40 MHz: 19.0 dBm
10 MHz: 16.0 dBm	80 MHz: 19.0 dBm
20 MHz: 19.0 dBm	

5470 – 5725 MHz band – FCC/IC*

The maximum output power can be set as follows, when operating in the 5.3 GHz band. The total EIRP limit is 30 dBm.

5 MHz: 14.0 dBm	40 MHz: 19.0 dBm
10 MHz: 17.0 dBm	80 MHz: 19.0 dBm
20 MHz: 19.0 dBm	

4940 – 4990 MHz band - FCC/IC

The maximum output power can be set as follows, when operating in the 4.9 GHz band, under FCC and IC. The power values shown below are for systems using 0 to 26 dBi total antenna assembly gain. Systems using 29 dBi antenna gain must reduce output power by 3 dB.

5 MHz: 26.97 dBm
10 MHz: 27.41 dBm
20 MHz: 28.24 dBm

Radio parameters accessed by end-user

The following parameters can be accessed by user:

1. Output Power
2. Frequency channel
3. Channel bandwidth
4. Antenna gain in external antenna type device

* Under IC regulations the 5600-5650 MHz band is excluded from operation