

# TEST REPORT ADDENDUM - RADIATED

FROM



Test of: Radwin Ltd. Outdoor Subscriber Radio Unit

To: FCC CFR 47 Part 15 Subpart E 15.407

Test Report Serial No.: RDWN41-U5\_Radiated (non-DFS Bands) Rev A

Issue Date: 13<sup>th</sup> July 2016

Master Document Number	Addendum Reports
RDWN41 – U5 _Master	RDWN41 – U5 _Conducted
	RDWN41 – U5 _Radiated
	RDWN41-U5_(FCC Part15B & ICES-003)



**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 2 of 49

---

## Table of Contents

<b>1. MEASUREMENT AND PRESENTATION OF TEST DATA .....</b>	<b>3</b>
<b>2. TEST RESULTS .....</b>	<b>4</b>
2.1. Radiated .....	4
2.1.1. <i>Restricted Band Emissions</i> .....	7
2.1.2. <i>Restricted Band-Edge Emissions</i> .....	13
2.1.3. <i>Colocation</i> .....	26
<b>A. APPENDIX - GRAPHICAL IMAGES .....</b>	<b>28</b>
A.1. Radiated .....	29
A.1.1. <i>Restricted Band Emissions</i> .....	29
A.1.2. <i>Restricted Band-Edge Emissions</i> .....	35
A.1.3. <i>Colocation Emissions</i> .....	47

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





## 2. TEST RESULTS

### 2.1. Radiated

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions			
<b>Standard:</b>	FCC CFR 47:15.407	<b>Ambient Temp. (°C):</b>	20.0 - 24.5
<b>Test Heading:</b>	Radiated Spurious and Band-Edge Emissions	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.407 (b), 15.205, 15.209	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for Radiated Spurious and Band-Edge Emissions

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Undesirable Measurement were per the Radiated Test Set-up specified in this document.

15.407 (b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

#### Limits for Restricted Bands (15.205, 15.209)

**Peak emission: 74 dBuV/m**

**Average emission: 54 dBuV/m**

#### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

**FS = Field Strength**

**R = Measured Spectrum analyzer Input Amplitude**

**AF = Antenna Factor**

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**CORR = Correction Factor = CL – AG + NFL**  
**CL = Cable Loss**  
**AG = Amplifier Gain**  
**FO = Distance Falloff Factor**  
**NFL = Notch Filter Loss or Waveguide Loss**

**Example:**

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength (dBμV/m);

$$E = 1000000 \times \sqrt{\frac{30P}{3}} \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz equates to 68.23 dBuV/m

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:

$$\text{Level (dBmV/m)} = 20 * \text{Log (level (mV/m))}$$

40 dBmV/m = 100 mV/m

48 dBmV/m = 250 mV/m

**Restricted Bands of Operation (15.205)**

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 6 of 49

---

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.
- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to §15.213.
- (4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.
- (6) Transmitters operating under the provisions of subparts D or F of this part.
- (7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.
- (8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).
- (9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 7 of 49

## 2.1.1. Restricted Band Emissions

### 2.1.1.1. RADWIN Ltd. NA

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions

<b>Antenna:</b>	RADWIN Ltd. NA	<b>Variant:</b>	20 MHz
<b>Antenna Gain (dBi):</b>	16.00	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5160.00	<b>Data Rate:</b>	15.00 MBit/s
<b>Power Setting:</b>	16	<b>Tested By:</b>	JMH

#### Test Measurement Results

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
<a href="#">#1</a>	3282.56	56.84	3.02	-11.20	48.66	Peak (NRB)	Horizontal	101	130	--	--	Pass
<a href="#">#2</a>	3439.93	56.02	3.11	-11.25	47.88	Peak (NRB)	Vertical	200	0	--	--	Pass
<a href="#">#3</a>	5161.08	67.57	3.68	-11.55	59.70	Fundamental	Horizontal	101	189	--	--	
<a href="#">#4</a>	6250.04	53.56	3.93	-8.57	48.92	Peak (NRB)	Vertical	148	229	--	--	Pass

Test Notes: EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 8 of 49

**Equipment Configuration for Radiated Spurious - Restricted Band Emissions**

<b>Antenna:</b>	RADWIN Ltd. NA	<b>Variant:</b>	10 MHz
<b>Antenna Gain (dBi):</b>	16.00	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5200.00	<b>Data Rate:</b>	15.00 MBit/s
<b>Power Setting:</b>	22.75	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	3215.91	58.83	2.99	-11.27	50.55	Peak (NRB)	Horizontal	100	220	--	--	Pass
#2	3466.56	63.38	3.11	-11.25	55.24	Peak (NRB)	Vertical	100	0	--	--	Pass
#3	5200.76	89.63	3.66	-11.46	81.83	Fundamental	Horizontal	101	172	--	--	
#4	6249.98	52.93	3.93	-8.57	48.29	Peak (NRB)	Vertical	148	220	--	--	Pass
#5	10401.74	51.58	5.42	-5.02	51.98	Peak (NRB)	Horizontal	148	220	--	--	Pass
#6	15599.64	50.60	6.04	-0.25	56.39	Max Peak	Vertical	190	18	74.0	-17.6	Pass
#7	15599.64	36.10	6.04	-0.25	41.89	Max Avg	Vertical	190	18	54.0	-12.1	Pass

Test Notes: EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 9 of 49

**Equipment Configuration for Radiated Spurious - Restricted Band Emissions**

<b>Antenna:</b>	RADWIN Ltd. NA	<b>Variant:</b>	10 MHz
<b>Antenna Gain (dBi):</b>	16.00	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5245.00	<b>Data Rate:</b>	15.00 MBit/s
<b>Power Setting:</b>	22.75	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	3222.91	55.64	2.99	-11.27	47.35	Peak (NRB)	Horizontal	100	0	--	--	Pass
#2	3467.56	61.58	3.11	-11.25	53.44	Peak (NRB)	Vertical	100	0	--	--	Pass
#3	5238.79	85.43	3.66	-11.46	77.63	Fundamental	Horizontal	105	192	--	--	
#4	6250.08	52.63	3.93	-8.57	47.99	Peak (NRB)	Vertical	149	0	--	--	Pass
#5	10489.56	53.88	5.42	-5.02	53.28	Peak (NRB)	Horizontal	149	0	--	--	Pass
#6	15743.55	51.59	6.02	-0.25	57.36	Max Peak	Vertical	177	12	74.0	-16.6	Pass
#7	15743.55	36.22	6.02	-0.25	41.99	Max Avg	54.00	0	12177	-12.1	--	

Test Notes: EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 10 of 49

**Equipment Configuration for Radiated Spurious - Restricted Band Emissions**

<b>Antenna:</b>	RADWIN Ltd. NA	<b>Variant:</b>	10 MHz
<b>Antenna Gain (dBi):</b>	16.00	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5730.00	<b>Data Rate:</b>	15.00 MBit/s
<b>Power Setting:</b>	27	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	3214.53	52.65	2.99	-11.27	44.37	Peak (NRB)	Horizontal	101	0	--	--	Pass
#2	3849.66	60.41	3.23	-10.81	52.83	Max Peak	Horizontal	100	65	74.0	-21.2	Pass
#3	3849.66	58.31	3.23	-10.81	50.53	Max Avg	Horizontal	100	65	54.0	-3.3	Pass
#4	5730.14	68.18	3.79	-10.43	61.54	Fundamental	Horizontal	101	0	--	--	
#5	6103.82	54.59	3.87	-9.45	49.01	Peak (NRB)	Vertical	101	0	--	--	Pass
#6	7705.12	54.24	4.41	-6.85	51.30	Max Peak	Horizontal	100	135	74.0	-22.2	Pass
#7	7705.12	49.07	4.41	-6.85	46.63	Max Avg	Horizontal	100	135	54.0	-7.4	Pass

Test Notes: EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 11 of 49

**Equipment Configuration for Radiated Spurious - Restricted Band Emissions**

<b>Antenna:</b>	RADWIN Ltd. NA	<b>Variant:</b>	10 MHz
<b>Antenna Gain (dBi):</b>	16.00	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5785.00	<b>Data Rate:</b>	15.00 MBit/s
<b>Power Setting:</b>	27	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	3215.53	54.65	2.99	-11.27	46.37	Peak (NRB)	Horizontal	101	178	--	--	Pass
#2	3856.66	62.41	3.23	-10.81	54.83	Max Peak	Horizontal	100	60	74.0	-19.2	Pass
#3	3856.66	59.91	3.23	-10.81	52.33	Max Avg	Horizontal	100	60	54.0	-1.7	Pass
#4	5788.14	68.18	3.79	-10.43	61.54	Fundamental	Horizontal	101	178	--	--	
#5	6107.82	53.59	3.87	-9.45	48.01	Peak (NRB)	Vertical	101	169	--	--	Pass
#6	7713.22	52.94	4.41	-6.85	50.50	Max Peak	Horizontal	100	129	74.0	-23.5	Pass
#7	7713.22	47.03	4.41	-6.85	44.59	Max Avg	Horizontal	100	129	54.0	-9.4	Pass
#8	11570.20	51.84	5.46	-4.64	52.66	Max Peak	Horizontal	121	209	74.0	-21.3	Pass
#9	11570.20	36.98	5.46	-4.64	37.80	Max Avg	Horizontal	121	209	54.0	-16.2	Pass

Test Notes: EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 12 of 49

**Equipment Configuration for Radiated Spurious - Restricted Band Emissions**

<b>Antenna:</b>	RADWIN Ltd. NA	<b>Variant:</b>	10 MHz
<b>Antenna Gain (dBi):</b>	16.00	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5845.00	<b>Data Rate:</b>	15.00 MBit/s
<b>Power Setting:</b>	27	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	3214.53	51.85	2.99	-11.27	43.57	Peak (NRB)	Horizontal	101	178	--	--	Pass
#2	3859.76	59.01	3.23	-10.81	51.43	Max Peak	Horizontal	100	60	74.0	-22.6	Pass
#3	3859.76	58.31	3.23	-10.81	50.73	Max Avg	Horizontal	100	60	54.0	-3.3	Pass
#4	5843.14	69.78	3.79	-10.43	63.14	Fundamental	Horizontal	101	178	--	--	
#5	6133.82	52.59	3.87	-7.95	48.51	Peak (NRB)	Vertical	101	169	--	--	Pass
#6	7725.12	54.24	4.41	-6.85	51.30	Max Peak	Horizontal	100	129	74.0	-22.2	Pass
#7	7725.12	49.07	4.41	-6.85	46.63	Max Avg	Horizontal	100	129	54.0	-7.4	Pass

Test Notes: EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 13 of 49

## 2.1.2. Restricted Band-Edge Emissions

### 2.1.2.2. RADWIN Ltd. NA

#### RESULTS SUMMARY FOR RADIATED BAND-EDGE EMISSIONS

##### 5150 - 5250 MHz

RADWIN Ltd. NA		Band-Edge Freq	Limit 74.0dB $\mu$ V/m	Limit 54.0dB $\mu$ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB $\mu$ V/m	dB $\mu$ V/m	
10 MHz	5160.00	5150.00	70.85	53.73	16
20 MHz	5165.00	5150.00	68.91	53.73	13.5
40 MHz	5170.00	5150.00	73.86	51.17	5.25
80 MHz	5190.00	5150.00	68.73	53.73	0.0

##### 5725 - 5850 MHz

RADWIN Ltd. NA		Band-Edge Freq	Limit 68.2dB $\mu$ V/m	Limit 78.2dB $\mu$ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB $\mu$ V/m	dB $\mu$ V/m	
10 MHz	5730.00	5725.00	68.23	78.15	5.5
20 MHz	5735.00	5725.00	68.23	77.99	16.5
40 MHz	5745.00	5725.00	68.23	76.55	18.75
80 MHz	5765.00	5725.00	68.23	77.85	13.5

##### 5725 - 5850 MHz

RADWIN Ltd. NA		Band-Edge Freq	Limit 78.2dB $\mu$ V/m	Limit 68.2dB $\mu$ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB $\mu$ V/m	dB $\mu$ V/m	
10 MHz	5845.00	5850.00	78.23	53.46	0.0
20 MHz	5840.00	5850.00	78.23	61.07	14.5
40 MHz	5825.00	5850.00	78.23	66.72	18.5
80 MHz	5810.00	5850.00	78.23	56.38	11.5

Click on the links to view the data.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 14 of 49

**Equipment Configuration for Restricted Lower Band-Edge Emissions**

<b>Antenna:</b>	RADWIN Ltd. NA	<b>Variant:</b>	10 MHz
<b>Antenna Gain (dBi):</b>	16.00	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5160.00	<b>Data Rate:</b>	15.00 MBit/s
<b>Power Setting:</b>	16	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5150.00	15.95	3.67	34.11	53.73	Max Avg	Vertical	144	180	54.0	-0.3	Pass
#2	5150.00	33.07	3.67	34.11	70.85	Max Peak	Vertical	144	180	74.0	-3.2	Pass
#3	5150.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Power Reduction to meet Band Edge Limit

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 15 of 49

**Equipment Configuration for Restricted Lower Band-Edge Emissions**

<b>Antenna:</b>	RADWIN Ltd. NA	<b>Variant:</b>	20 MHz
<b>Antenna Gain (dBi):</b>	16.00	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5165.00	<b>Data Rate:</b>	15.00 MBit/s
<b>Power Setting:</b>	13.5	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5150.00	15.95	3.67	34.11	53.73	Max Avg	Vertical	144	180	54.0	-0.3	Pass
#2	5150.00	31.13	3.67	34.11	68.91	Max Peak	Vertical	144	180	74.0	-5.1	Pass
#3	5150.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Power Reduction to meet Band Edge Limit

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 16 of 49

**Equipment Configuration for Restricted Lower Band-Edge Emissions**

<b>Antenna:</b>	RADWIN Ltd. NA	<b>Variant:</b>	40 MHz
<b>Antenna Gain (dBi):</b>	16.00	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5170.00	<b>Data Rate:</b>	15.00 MBit/s
<b>Power Setting:</b>	5.25	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5150.00	13.39	3.67	34.11	51.17	Max Avg	Vertical	144	180	54.0	-2.8	Pass
#2	5150.00	36.08	3.67	34.11	73.86	Max Peak	Vertical	144	180	74.0	-0.1	Pass
#3	5150.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Power Reduction to meet Band Edge Limit

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 17 of 49

**Equipment Configuration for Restricted Lower Band-Edge Emissions**

<b>Antenna:</b>	RADWIN Ltd. NA	<b>Variant:</b>	80 MHz
<b>Antenna Gain (dBi):</b>	16.00	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5190.00	<b>Data Rate:</b>	15.00 MBit/s
<b>Power Setting:</b>	0.0	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5150.00	15.95	3.67	34.11	53.73	Max Avg	Vertical	144	180	54.0	-0.3	Pass
#2	5150.00	30.95	3.67	34.11	68.73	Max Peak	Vertical	144	180	74.0	-5.3	Pass
#3	5150.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Power Reduction to meet Band Edge Limit

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 18 of 49

**Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions**

<b>Antenna:</b>	RADWIN Ltd. NA	<b>Variant:</b>	10 MHz
<b>Antenna Gain (dBi):</b>	16.00	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5730.00	<b>Data Rate:</b>	15.00 MBit/s
<b>Power Setting:</b>	5.5	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	5715.00	15.50	3.81	34.34	53.65	Max Avg	Horizontal	193	180	68.2	-14.6	Pass
#2	5725.00	40.01	3.79	34.35	78.15	Max Avg	Horizontal	193	180	78.2	-0.1	Pass
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Power reduction to meet Restricted Band Limit

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 19 of 49

**Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions**

<b>Antenna:</b>	RADWIN Ltd. NA	<b>Variant:</b>	20 MHz
<b>Antenna Gain (dBi):</b>	16.00	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5735.00	<b>Data Rate:</b>	15.00 MBit/s
<b>Power Setting:</b>	16.5	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	5715.00	22.55	3.81	34.34	60.70	Max Avg	Horizontal	193	180	68.2	-7.5	Pass
#2	5725.00	39.85	3.79	34.35	77.99	Max Avg	Horizontal	193	180	78.2	-0.2	Pass
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Power reduction to meet Restricted Band Limit

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 20 of 49

**Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions**

<b>Antenna:</b>	RADWIN Ltd. NA	<b>Variant:</b>	40 MHz
<b>Antenna Gain (dBi):</b>	16.00	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5745.00	<b>Data Rate:</b>	15.00 MBit/s
<b>Power Setting:</b>	18.75	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5712.82	27.53	3.82	34.34	65.69	Max Avg	Horizontal	193	180	68.2	-2.5	Pass
#2	5725.00	38.41	3.79	34.35	76.55	Max Avg	Horizontal	193	180	78.2	-1.7	Pass
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Power reduction to meet Restricted Band Limit

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 21 of 49

**Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions**

<b>Antenna:</b>	RADWIN Ltd. NA	<b>Variant:</b>	80 MHz
<b>Antenna Gain (dBi):</b>	16.00	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5765.00	<b>Data Rate:</b>	15.00 MBit/s
<b>Power Setting:</b>	13.50	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5715.00	20.36	3.81	34.34	58.51	Max Avg	Horizontal	193	180	68.2	-9.7	Pass
#2	5725.00	39.71	3.79	34.35	77.85	Max Avg	Horizontal	193	180	78.2	-0.4	Pass
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Power reduction to meet Restricted Band Limit

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 22 of 49

**Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions**

<b>Antenna:</b>	RADWIN Ltd. NA	<b>Variant:</b>	10 MHz
<b>Antenna Gain (dBi):</b>	16.00	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5845.00	<b>Data Rate:</b>	15.00 MBit/s
<b>Power Setting:</b>	0.0	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5850.00	39.57	3.81	34.63	78.01	Max Avg	Horizontal	172	181	78.2	-0.2	Pass
#3	5860.00	14.95	3.86	34.65	53.46	Max Avg	Horizontal	172	181	68.2	-14.8	Pass
#2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Power reduction to meet Restricted Band Limit

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 23 of 49

**Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions**

<b>Antenna:</b>	RADWIN Ltd. NA	<b>Variant:</b>	20 MHz
<b>Antenna Gain (dBi):</b>	16.00	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5840.00	<b>Data Rate:</b>	15.00 MBit/s
<b>Power Setting:</b>	14.5	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5850.00	39.67	3.81	34.63	78.11	Max Avg	Horizontal	172	181	78.2	-0.1	Pass
#3	5860.00	22.56	3.86	34.65	61.07	Max Avg	Horizontal	172	181	68.2	-7.2	Pass
#2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Power reduction to meet Restricted Band Limit

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 24 of 49

**Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions**

<b>Antenna:</b>	RADWIN Ltd. NA	<b>Variant:</b>	40 MHz
<b>Antenna Gain (dBi):</b>	16.00	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5825.00	<b>Data Rate:</b>	15.00 MBit/s
<b>Power Setting:</b>	18.5	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5850.00	30.84	3.81	34.63	69.28	Max Avg	Horizontal	172	181	78.2	-9.0	Pass
#3	5860.00	28.21	3.86	34.65	66.72	Max Avg	Horizontal	172	181	68.2	-1.5	Pass
#2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Power reduction to meet Restricted Band Limit

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 25 of 49

**Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions**

<b>Antenna:</b>	RADWIN Ltd. NA	<b>Variant:</b>	80 MHz
<b>Antenna Gain (dBi):</b>	16.00	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5810.00	<b>Data Rate:</b>	15.00 MBit/s
<b>Power Setting:</b>	11.5	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5850.00	39.64	3.81	34.63	78.08	Max Avg	Horizontal	172	181	78.2	-0.2	Pass
#3	5860.00	17.87	3.86	34.65	56.38	Max Avg	Horizontal	172	181	68.2	-11.9	Pass
#2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Power reduction to meet Restricted Band Limit

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 26 of 49

### 2.1.3. Colocation

Colocation: Band Edge 5150 MHz

#### Equipment Configuration for Restricted Lower Band-Edge Emissions

<b>Antenna:</b>	RADWIN Ltd. NA	<b>Variant:</b>	Colocation
<b>Antenna Gain (dBi):</b>	16.00	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	2462.00 & 5160.00	<b>Data Rate:</b>	15.00 MBit/s
<b>Power Setting:</b>	22 (2462) 16 (5160)	<b>Tested By:</b>	JMH

#### Test Measurement Results

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	5145.64	34.64	3.69	34.11	72.44	Max Peak	Horizontal	154	179	74.0	-1.6	Pass
#2	5150.00	10.29	3.67	34.11	48.07	Max Avg	Horizontal	154	179	54.0	-5.9	Pass
#3	5150.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Colocation - broadcasting simultaneously at 2462 and 5160 MHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 27 of 49

Colocation: TX Spurious 1-18GHz

**Equipment Configuration for Radiated Spurious - Restricted Band Emissions**

<b>Antenna:</b>	RADWIN Ltd. NA	<b>Variant:</b>	20 MHz
<b>Antenna Gain (dBi):</b>	16.00	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	2462.00 & 5160.00	<b>Data Rate:</b>	15.00 MBit/s
<b>Power Setting:</b>	22 (2462) 16 (5160)	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	3282.56	56.84	3.02	-11.20	48.66	Peak (NRB)	Horizontal	101	130	--	--	Pass
#2	3439.93	56.02	3.11	-11.25	47.88	Peak (NRB)	Vertical	200	0	--	--	Pass
#3	5161.08	67.57	3.68	-11.55	59.70	Fundamental	Horizontal	101	189	--	--	
#4	6250.04	53.56	3.93	-8.57	48.92	Peak (NRB)	Vertical	148	229	--	--	Pass

Test Notes: EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Colocation - broadcasting simultaneously at 2462 and 5160 MHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 28 of 49

---

## **A. APPENDIX - GRAPHICAL IMAGES**

---


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



## A.1. Radiated

### A.1.1. Restricted Band Emissions

#### A.1.1.1. RADWIN Ltd. NA

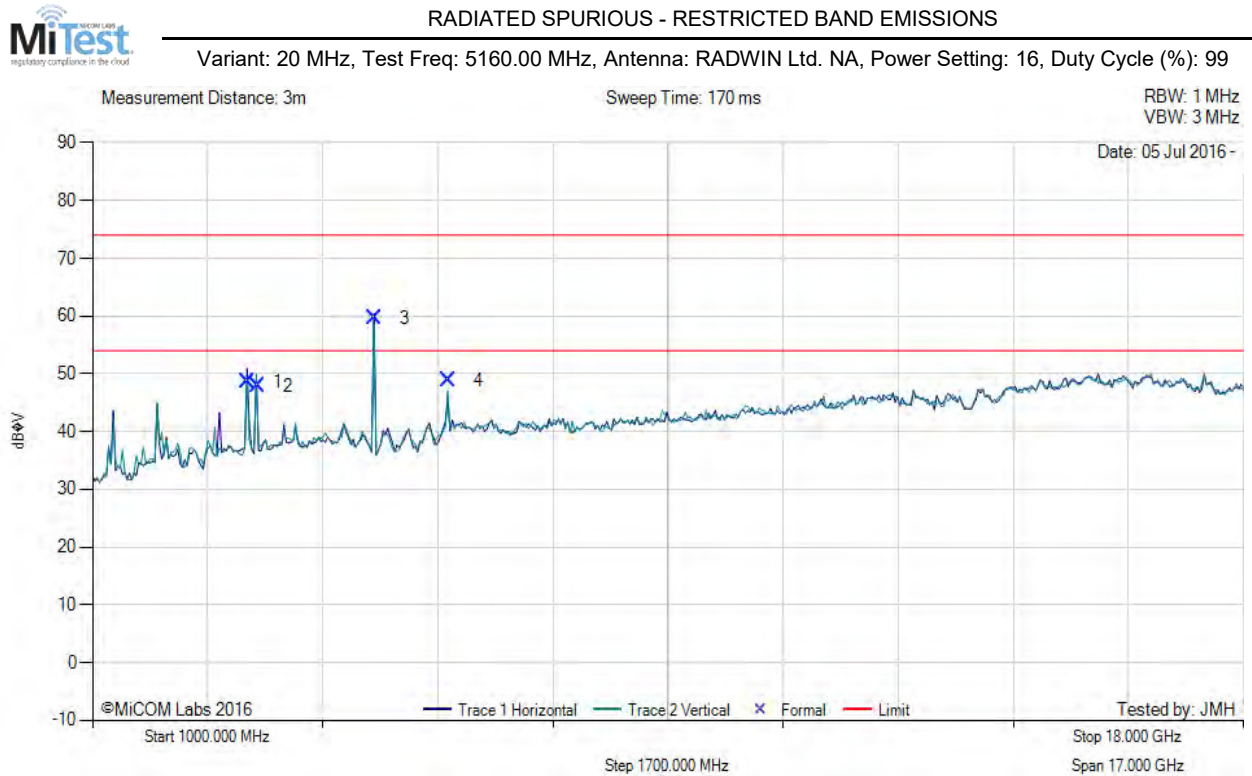

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	3282.56	56.84	3.02	-11.20	48.66	Peak (NRB)	Horizontal	101	130	--	--	Pass
2	3439.93	56.02	3.11	-11.25	47.88	Peak (NRB)	Vertical	200	0	--	--	Pass
3	5161.08	67.57	3.68	-11.55	59.70	Fundamental	Horizontal	101	189	--	--	
4	6250.04	53.56	3.93	-8.57	48.92	Peak (NRB)	Vertical	148	229	--	--	Pass

**Test Notes:** EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup.


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS**

Variant: 10 MHz, Test Freq: 5200.00 MHz, Antenna: RADWIN Ltd. NA, Power Setting: 22.75, Duty Cycle (%): 99

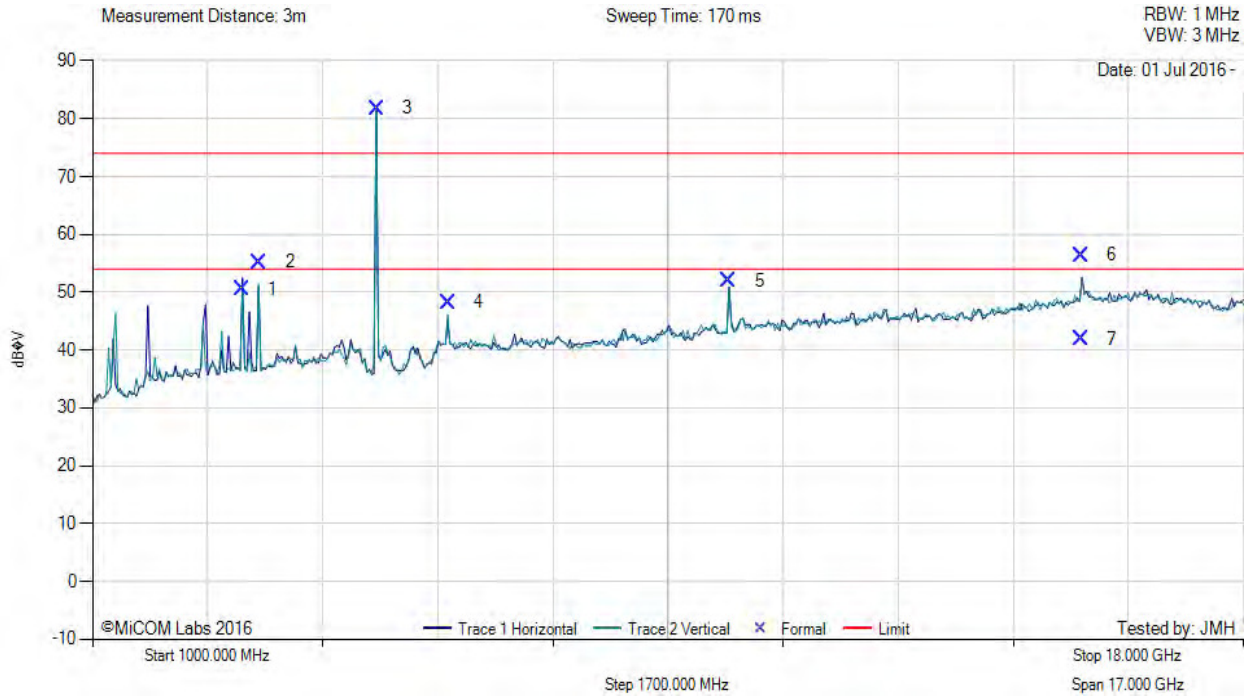

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	3215.91	58.83	2.99	-11.27	50.55	Peak (NRB)	Horizontal	100	220	--	--	Pass
2	3466.56	63.38	3.11	-11.25	55.24	Peak (NRB)	Vertical	100	0	--	--	Pass
3	5200.76	89.63	3.66	-11.46	81.83	Fundamental	Horizontal	101	172	--	--	
4	6249.98	52.93	3.93	-8.57	48.29	Peak (NRB)	Vertical	148	220	--	--	Pass
5	10401.74	51.58	5.42	-5.02	51.98	Peak (NRB)	Horizontal	148	220	--	--	Pass
6	15599.64	50.60	6.04	-0.25	56.39	Max Peak	Vertical	190	18	74.0	-17.6	Pass
7	15599.64	36.10	6.04	-0.25	41.89	Max Avg	Vertical	190	18	54.0	-12.1	Pass

**Test Notes:** EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 31 of 49



**RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS**

Variant: 10 MHz, Test Freq: 5245.00 MHz, Antenna: RADWIN Ltd. NA, Power Setting: 22.75, Duty Cycle (%): 99

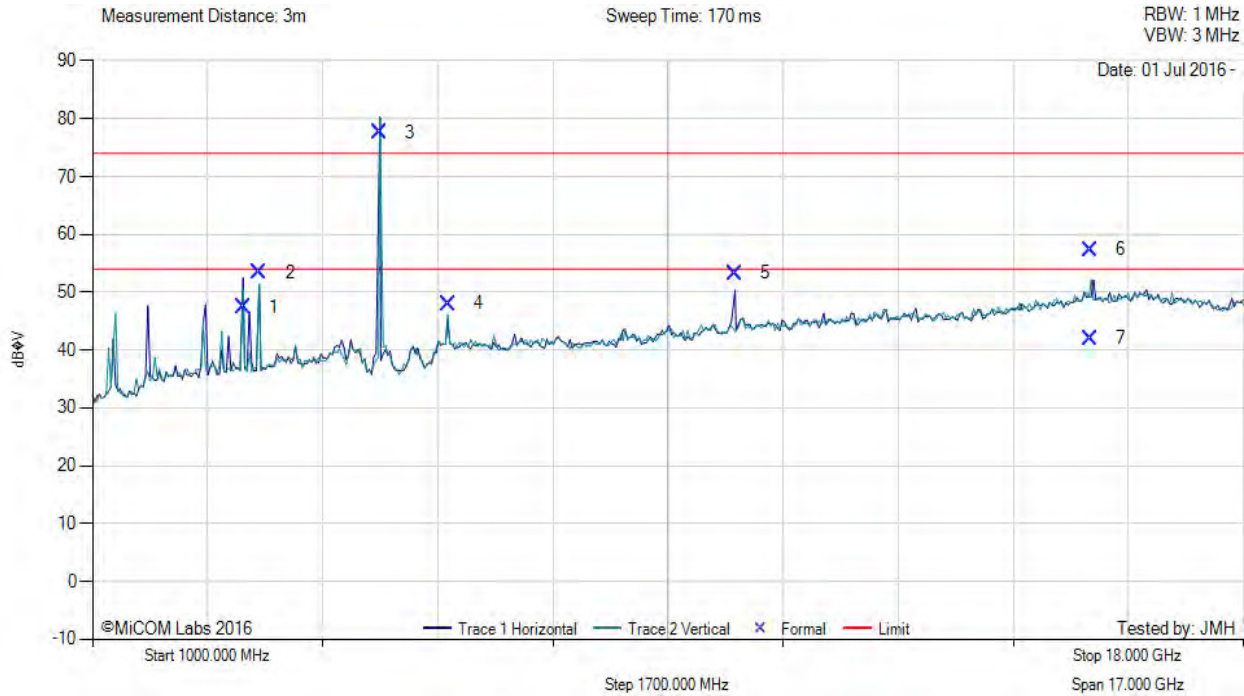

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	3222.91	55.64	2.99	-11.27	47.35	Peak (NRB)	Horizontal	100	0	--	--	Pass
2	3467.56	61.58	3.11	-11.25	53.44	Peak (NRB)	Vertical	100	0	--	--	Pass
3	5238.79	85.43	3.66	-11.46	77.63	Fundamental	Horizontal	105	192	--	--	
4	6250.08	52.63	3.93	-8.57	47.99	Peak (NRB)	Vertical	149	0	--	--	Pass
5	10489.56	53.88	5.42	-5.02	53.28	Peak (NRB)	Horizontal	149	0	--	--	Pass
6	15743.55	51.59	6.02	-0.25	57.36	Max Peak	Vertical	177	12	74.0	-16.6	Pass
7	15743.55	36.22	6.02	-0.25	41.99	Max Avg	54.00	0	12177	-12.1	--	

**Test Notes:** EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 10 MHz, Test Freq: 5730.00 MHz, Antenna: RADWIN Ltd. NA, Power Setting: 27, Duty Cycle (%): 99

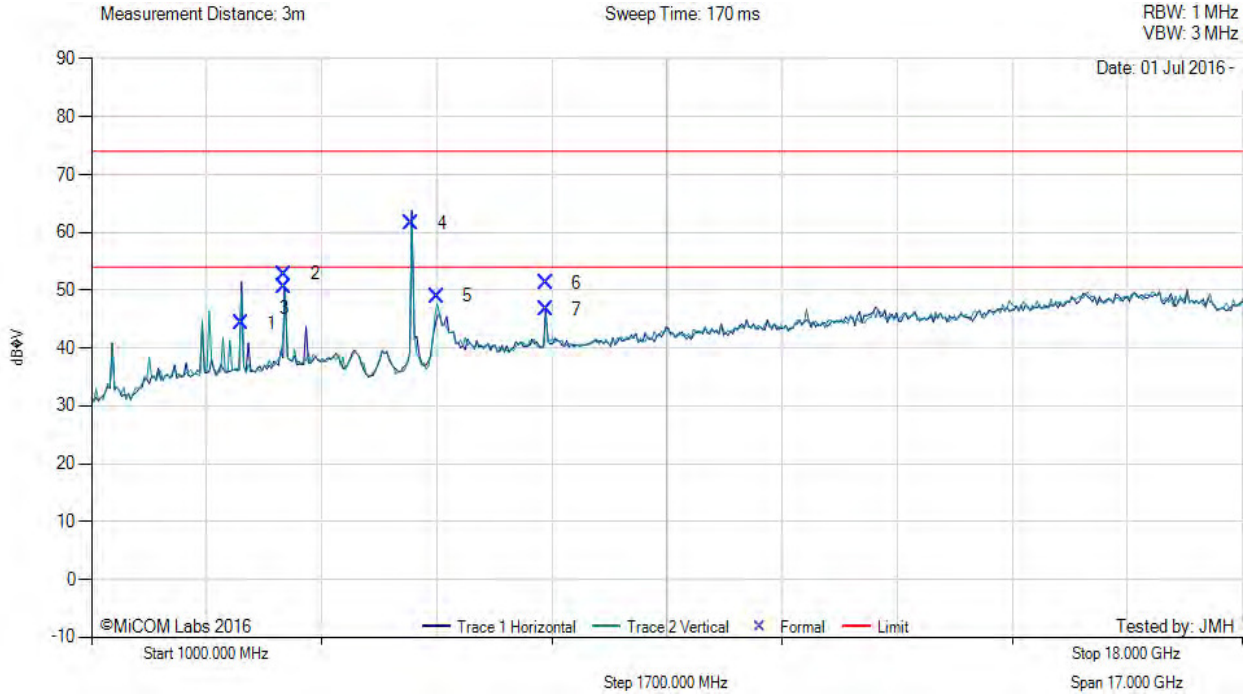

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	3214.53	52.65	2.99	-11.27	44.37	Peak (NRB)	Horizontal	101	0	--	--	Pass
2	3849.66	60.41	3.23	-10.81	52.83	Max Peak	Horizontal	100	65	74.0	-21.2	Pass
3	3849.66	58.31	3.23	-10.81	50.53	Max Avg	Horizontal	100	65	54.0	-3.3	Pass
4	5730.14	68.18	3.79	-10.43	61.54	Fundamental	Horizontal	101	0	--	--	
5	6103.82	54.59	3.87	-9.45	49.01	Peak (NRB)	Vertical	101	0	--	--	Pass
6	7705.12	54.24	4.41	-6.85	51.30	Max Peak	Horizontal	100	135	74.0	-22.2	Pass
7	7705.12	49.07	4.41	-6.85	46.63	Max Avg	Horizontal	100	135	54.0	-7.4	Pass

**Test Notes:** EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 33 of 49



**RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS**

Variant: 10 MHz, Test Freq: 5785.00 MHz, Antenna: RADWIN Ltd. NA, Power Setting: 27, Duty Cycle (%): 99

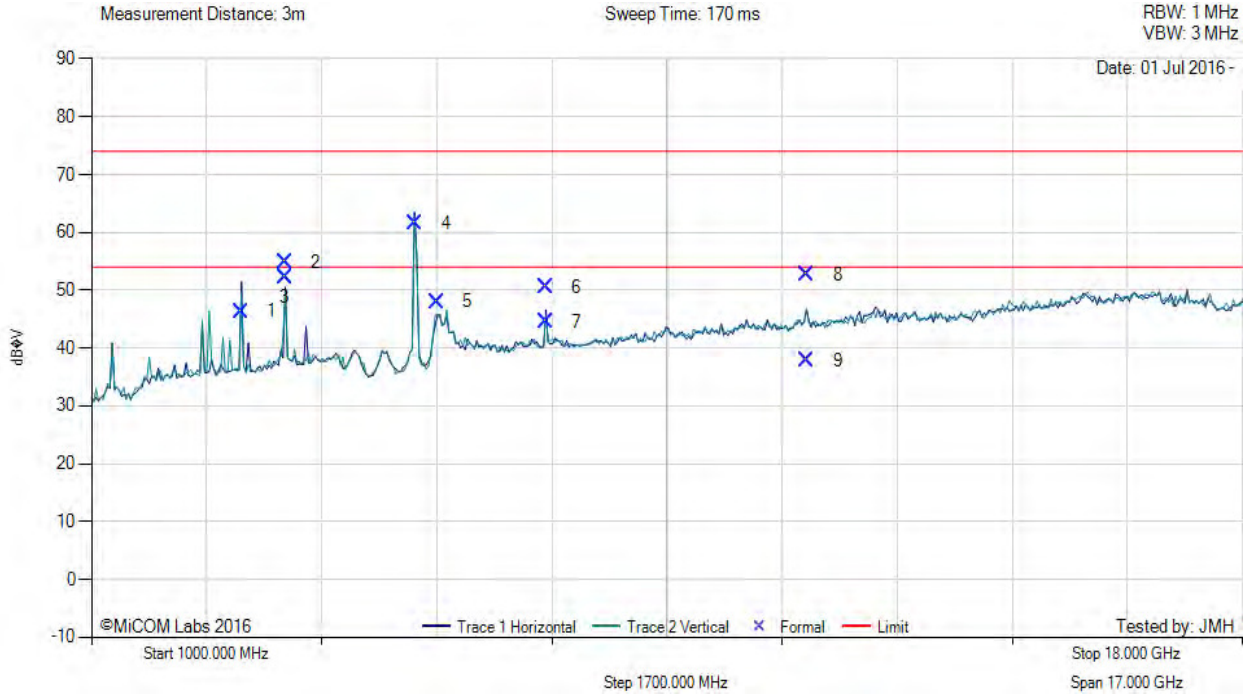

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	3215.53	54.65	2.99	-11.27	46.37	Peak (NRB)	Horizontal	101	178	--	--	Pass
2	3856.66	62.41	3.23	-10.81	54.83	Max Peak	Horizontal	100	60	74.0	-19.2	Pass
3	3856.66	59.91	3.23	-10.81	52.33	Max Avg	Horizontal	100	60	54.0	-1.7	Pass
4	5788.14	68.18	3.79	-10.43	61.54	Fundamental	Horizontal	101	178	--	--	
5	6107.82	53.59	3.87	-9.45	48.01	Peak (NRB)	Vertical	101	169	--	--	Pass
6	7713.22	52.94	4.41	-6.85	50.50	Max Peak	Horizontal	100	129	74.0	-23.5	Pass
7	7713.22	47.03	4.41	-6.85	44.59	Max Avg	Horizontal	100	129	54.0	-9.4	Pass
8	11570.20	51.84	5.46	-4.64	52.66	Max Peak	Horizontal	121	209	74.0	-21.3	Pass
9	11570.20	36.98	5.46	-4.64	37.80	Max Avg	Horizontal	121	209	54.0	-16.2	Pass

**Test Notes:** EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 10 MHz, Test Freq: 5845.00 MHz, Antenna: RADWIN Ltd. NA, Power Setting: 27, Duty Cycle (%): 99

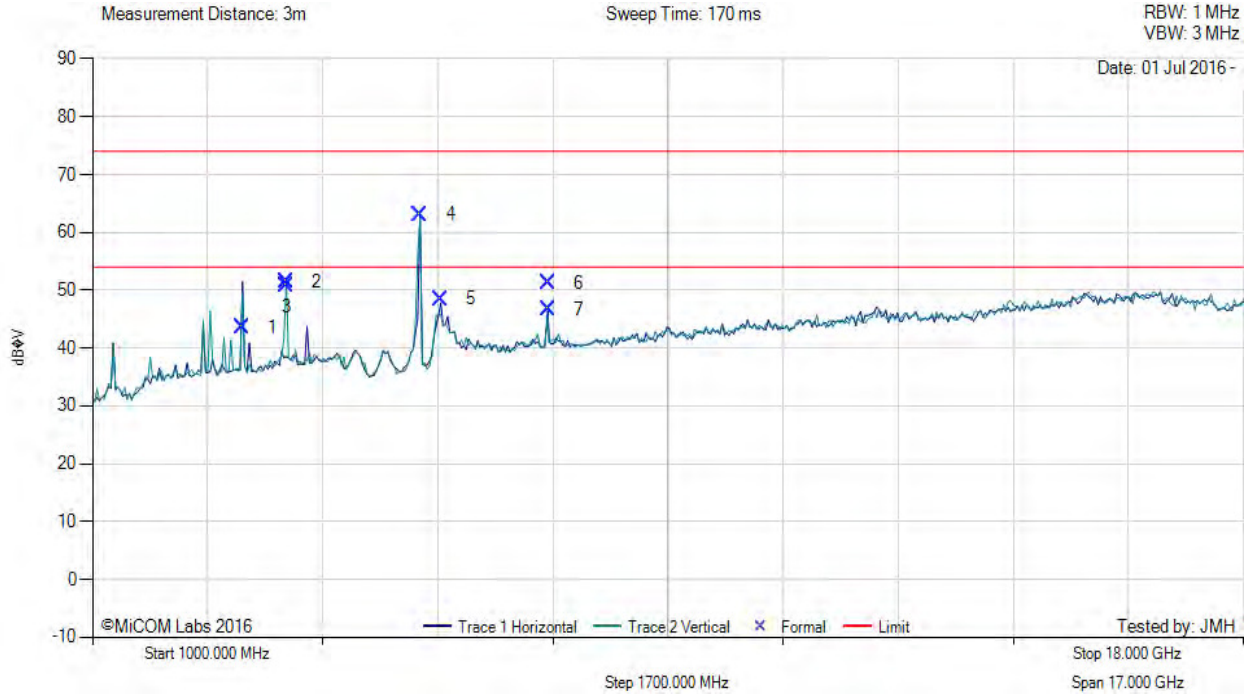

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	3214.53	51.85	2.99	-11.27	43.57	Peak (NRB)	Horizontal	101	178	--	--	Pass
2	3859.76	59.01	3.23	-10.81	51.43	Max Peak	Horizontal	100	60	74.0	-22.6	Pass
3	3859.76	58.31	3.23	-10.81	50.73	Max Avg	Horizontal	100	60	54.0	-3.3	Pass
4	5843.14	69.78	3.79	-10.43	63.14	Fundamental	Horizontal	101	178	--	--	
5	6133.82	52.59	3.87	-7.95	48.51	Peak (NRB)	Vertical	101	169	--	--	Pass
6	7725.12	54.24	4.41	-6.85	51.30	Max Peak	Horizontal	100	129	74.0	-22.2	Pass
7	7725.12	49.07	4.41	-6.85	46.63	Max Avg	Horizontal	100	129	54.0	-7.4	Pass

**Test Notes:** EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 35 of 49


## A.1.2. Restricted Band-Edge Emissions

### A.1.2.2. RADWIN Ltd. NA



#### RESTRICTED LOWER BAND-EDGE EMISSIONS

Variant: 10 MHz, Test Freq: 5160.00 MHz, Antenna: RADWIN Ltd. NA, Power Setting: 16, Duty Cycle (%): 99

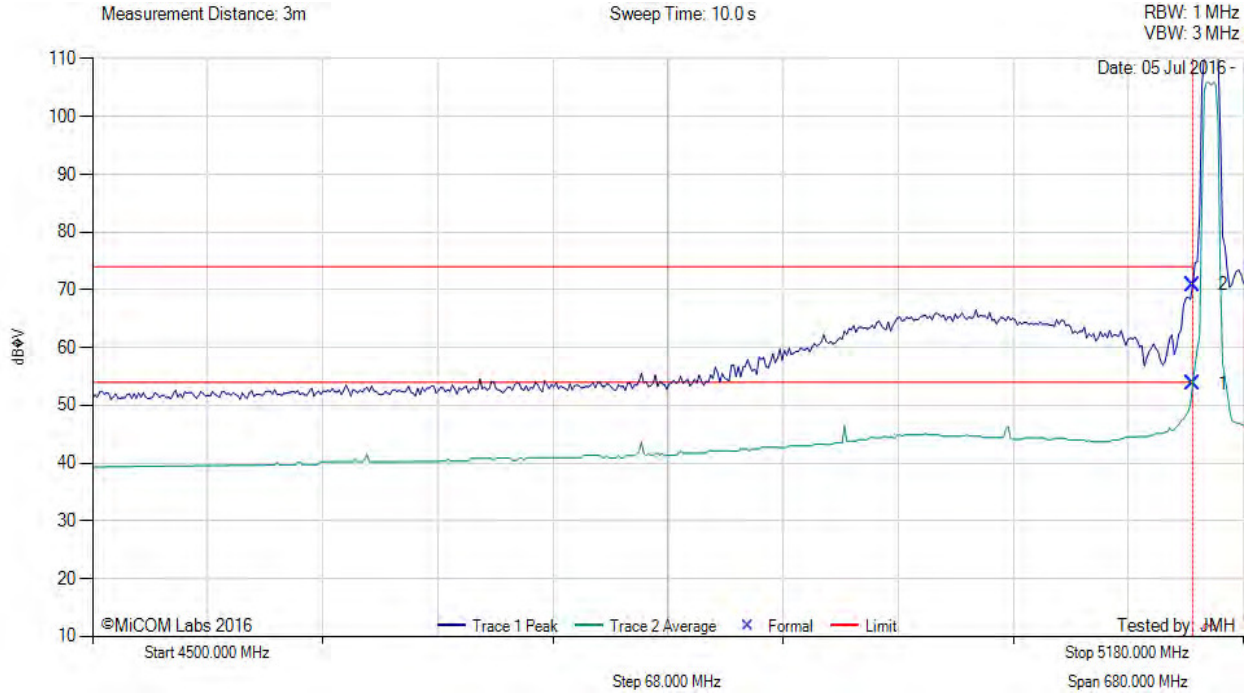

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	5150.00	15.95	3.67	34.11	53.73	Max Avg	Vertical	144	180	54.0	-0.3	Pass
2	5150.00	33.07	3.67	34.11	70.85	Max Peak	Vertical	144	180	74.0	-3.2	Pass
3	5150.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

**Test Notes:** EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Power Reduction to meet Band Edge Limit

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 36 of 49



RESTRICTED LOWER BAND-EDGE EMISSIONS

Variant: 20 MHz, Test Freq: 5165.00 MHz, Antenna: RADWIN Ltd. NA, Power Setting: 13.5, Duty Cycle (%): 99

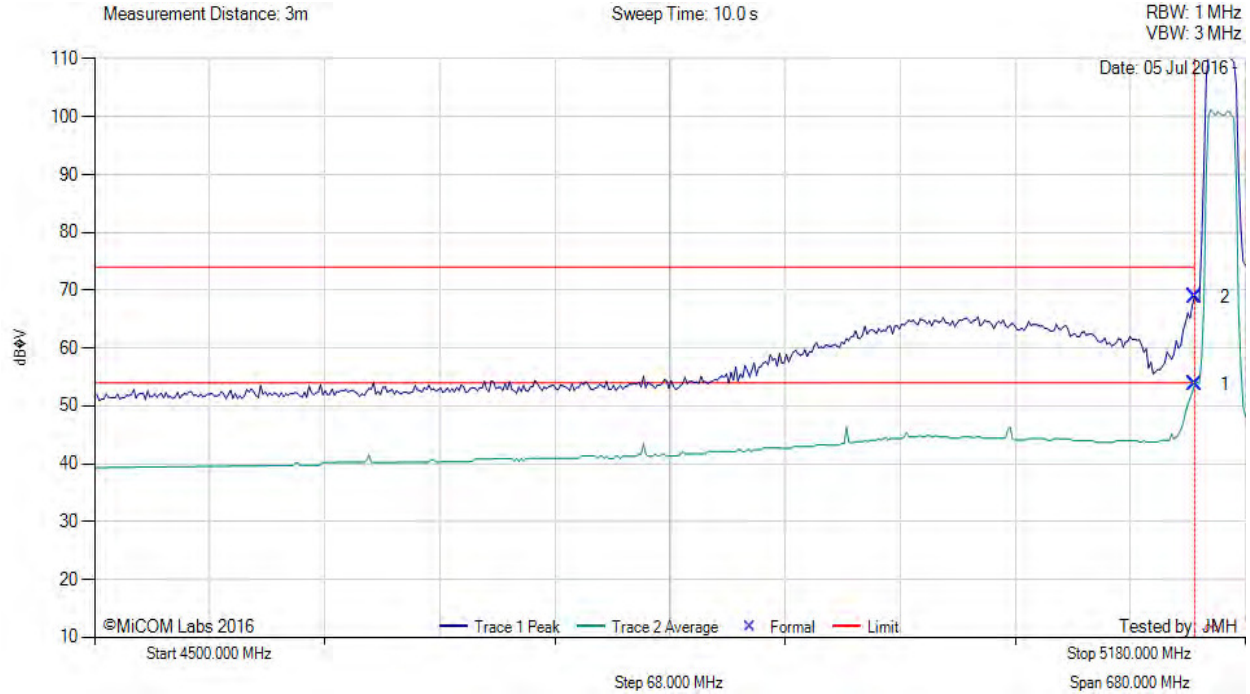

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	5150.00	15.95	3.67	34.11	53.73	Max Avg	Vertical	144	180	54.0	-0.3	Pass
2	5150.00	31.13	3.67	34.11	68.91	Max Peak	Vertical	144	180	74.0	-5.1	Pass
3	5150.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

**Test Notes:** EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Power Reduction to meet Band Edge Limit

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 37 of 49



RESTRICTED LOWER BAND-EDGE EMISSIONS

Variant: 40 MHz, Test Freq: 5170.00 MHz, Antenna: RADWIN Ltd. NA, Power Setting: 5.25, Duty Cycle (%): 99

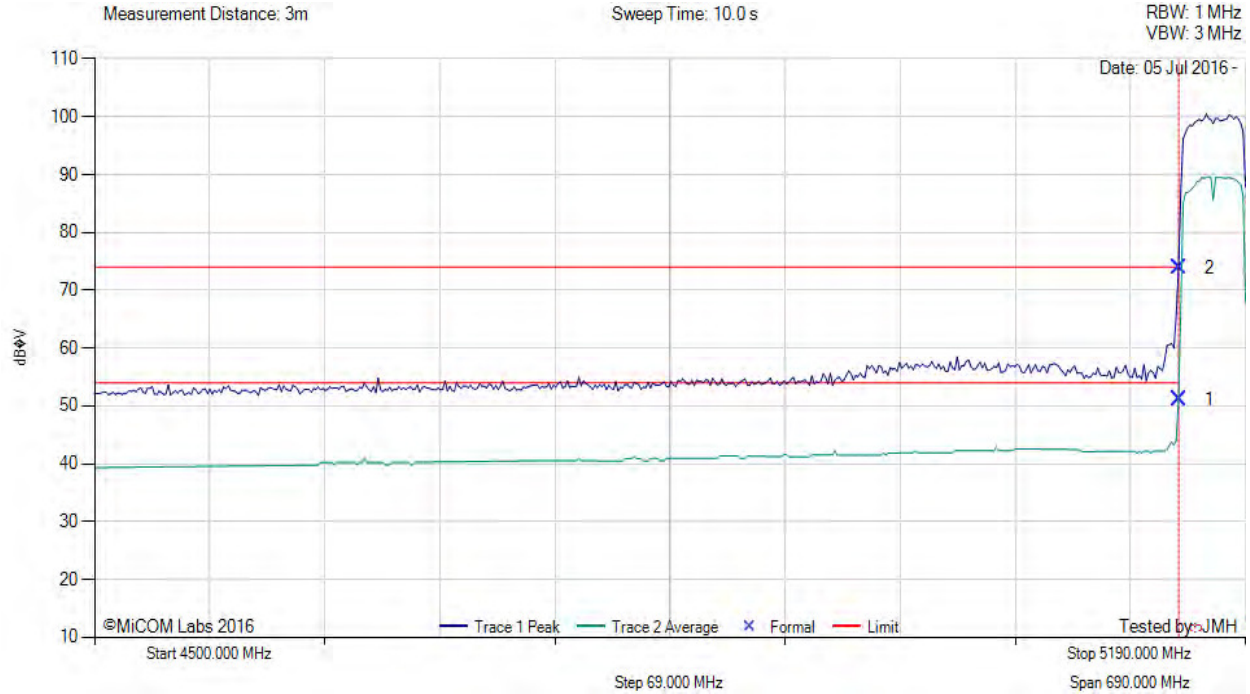

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5150.00	13.39	3.67	34.11	51.17	Max Avg	Vertical	144	180	54.0	-2.8	Pass
2	5150.00	36.08	3.67	34.11	73.86	Max Peak	Vertical	144	180	74.0	-0.1	Pass
3	5150.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

**Test Notes:** EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Power Reduction to meet Band Edge Limit

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 38 of 49



RESTRICTED LOWER BAND-EDGE EMISSIONS

Variant: 80 MHz, Test Freq: 5190.00 MHz, Antenna: RADWIN Ltd. NA, Power Setting: 0.0, Duty Cycle (%): 99

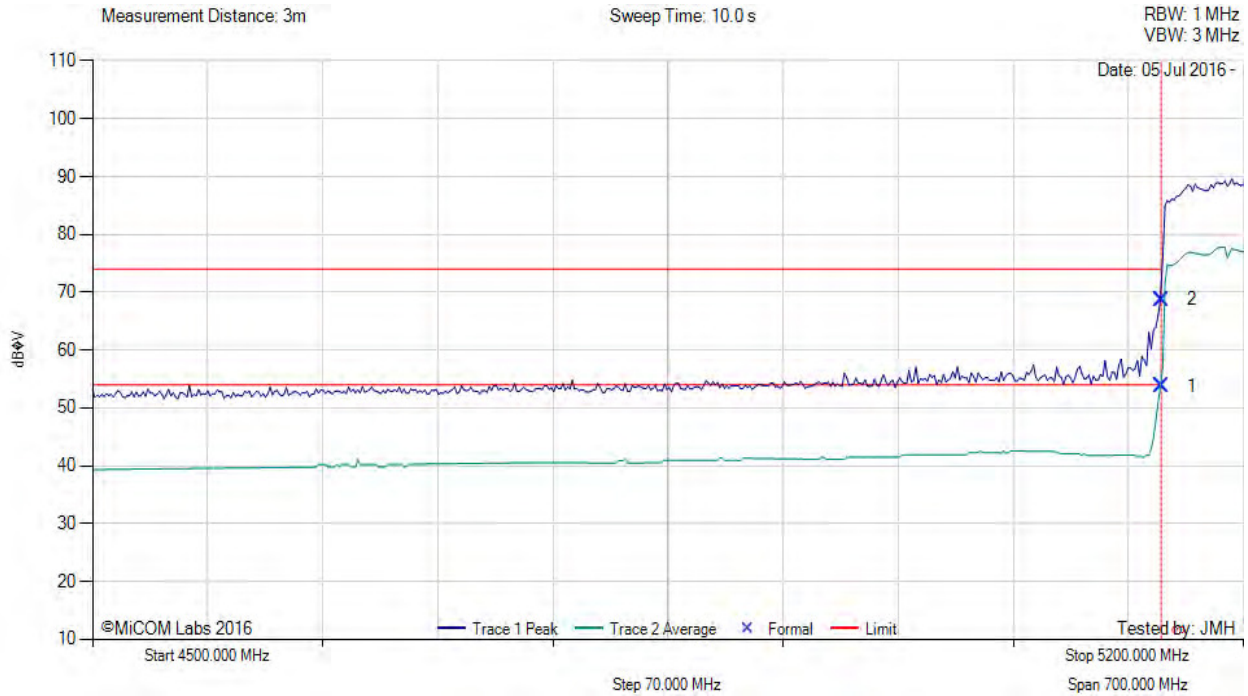

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5150.00	15.95	3.67	34.11	53.73	Max Avg	Vertical	144	180	54.0	-0.3	Pass
2	5150.00	30.95	3.67	34.11	68.73	Max Peak	Vertical	144	180	74.0	-5.3	Pass
3	5150.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

**Test Notes:** EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Power Reduction to meet Band Edge Limit

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 39 of 49



5725 MHz RADIATED BAND-EDGE EMISSIONS

Variant: 10 MHz, Test Freq: 5730.00 MHz, Antenna: RADWIN Ltd. NA, Power Setting: 5.5, Duty Cycle (%): 99

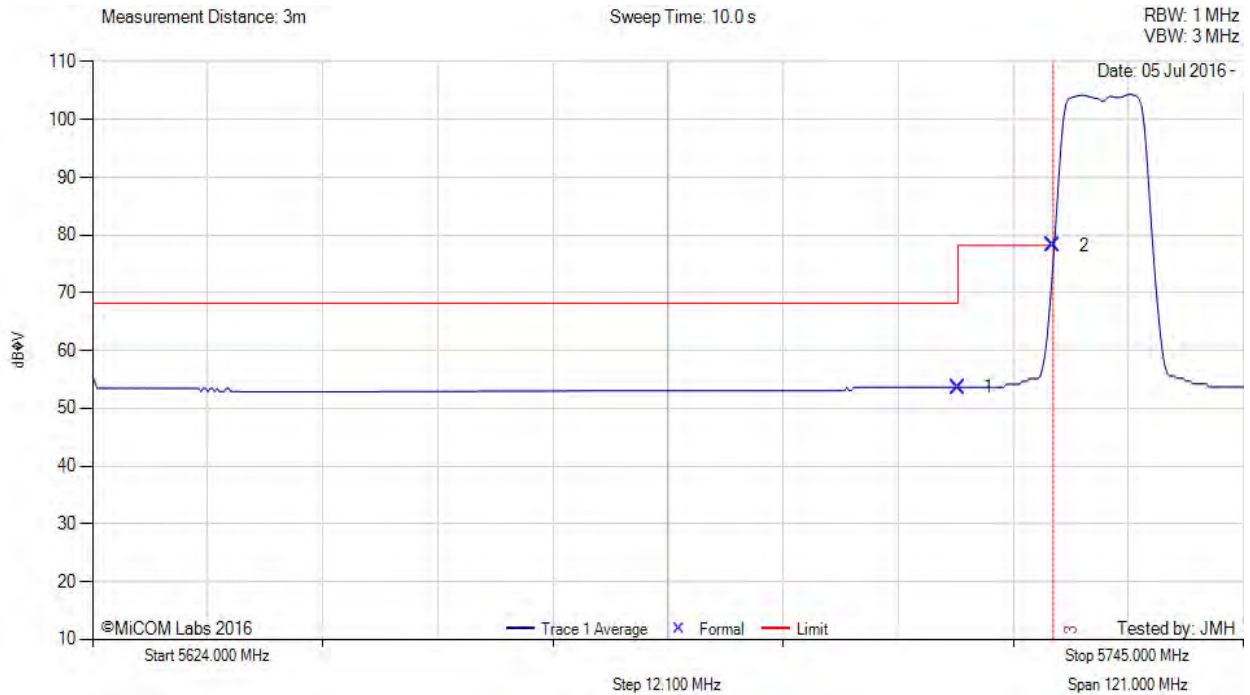

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5715.00	15.50	3.81	34.34	53.65	Max Avg	Horizontal	193	180	68.2	-14.6	Pass
2	5725.00	40.01	3.79	34.35	78.15	Max Avg	Horizontal	193	180	78.2	-0.1	Pass
3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

**Test Notes:** EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Power reduction to meet Restricted Band Limit

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 40 of 49



5725 MHz RADIATED BAND-EDGE EMISSIONS

Variant: 20 MHz, Test Freq: 5735.00 MHz, Antenna: RADWIN Ltd. NA, Power Setting: 16.5, Duty Cycle (%): 99

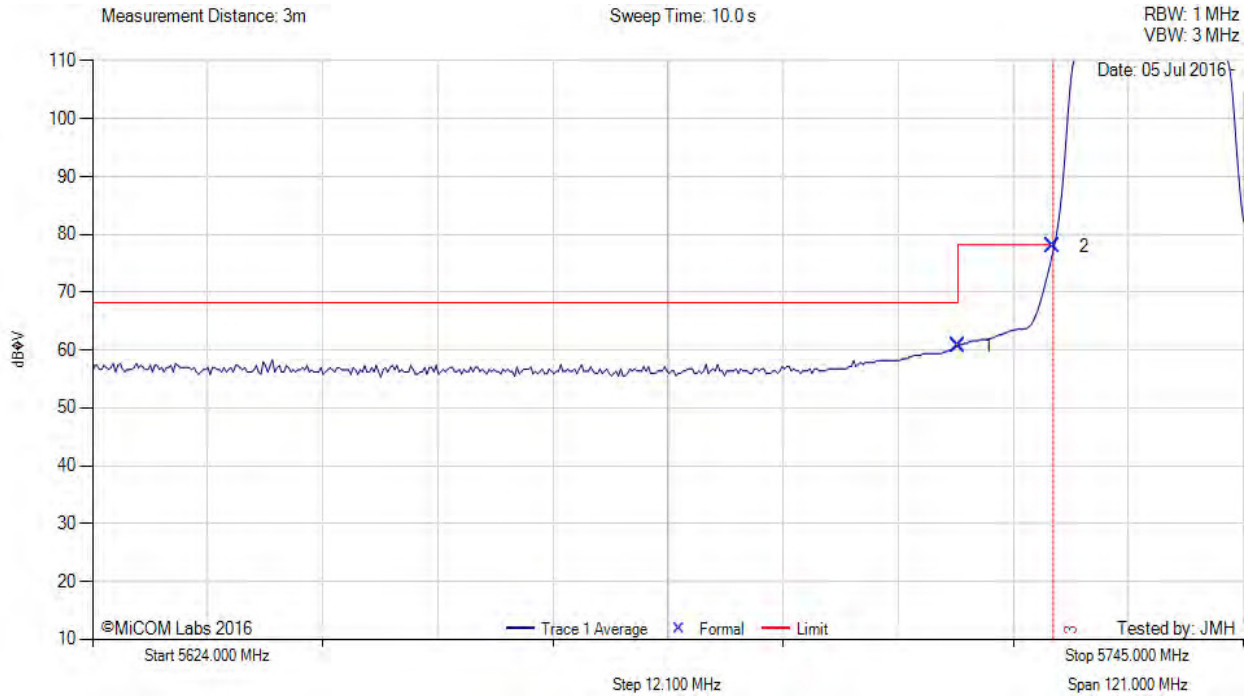

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5715.00	22.55	3.81	34.34	60.70	Max Avg	Horizontal	193	180	68.2	-7.5	Pass
2	5725.00	39.85	3.79	34.35	77.99	Max Avg	Horizontal	193	180	78.2	-0.2	Pass
3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

**Test Notes:** EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Power reduction to meet Restricted Band Limit

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 41 of 49



5725 MHz RADIATED BAND-EDGE EMISSIONS

Variant: 40 MHz, Test Freq: 5745.00 MHz, Antenna: RADWIN Ltd. NA, Power Setting: 18.75, Duty Cycle (%): 99

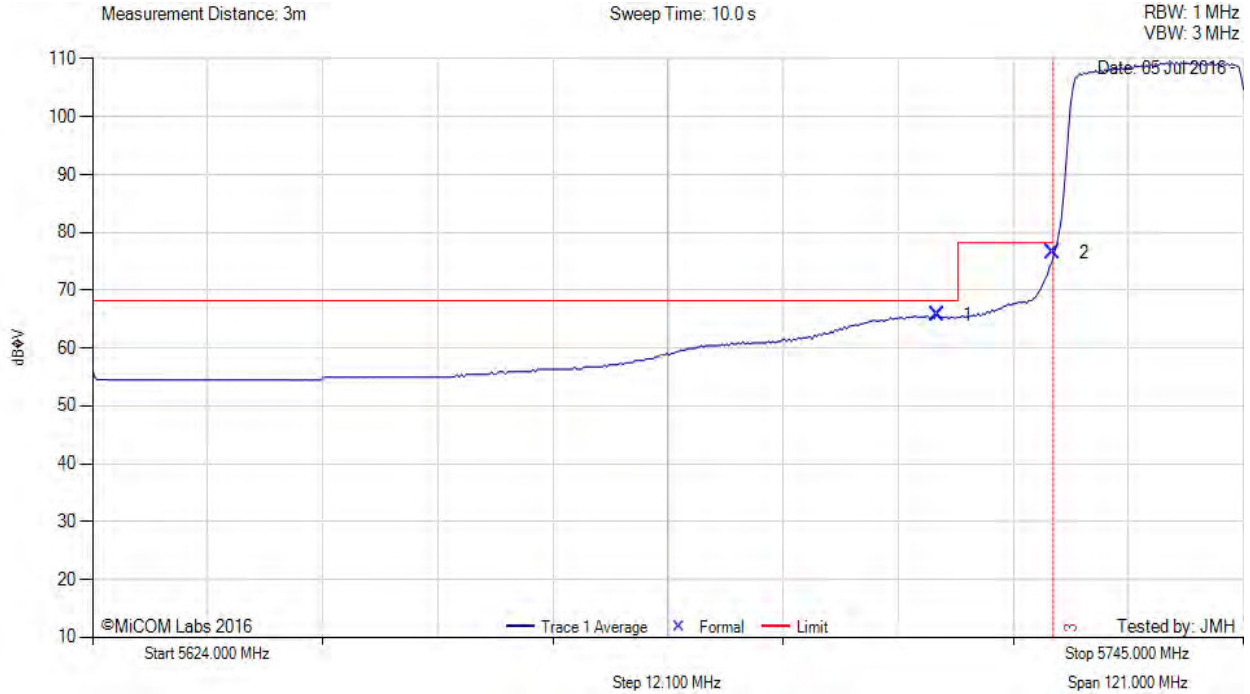

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5712.82	27.53	3.82	34.34	65.69	Max Avg	Horizontal	193	180	68.2	-2.5	Pass
2	5725.00	38.41	3.79	34.35	76.55	Max Avg	Horizontal	193	180	78.2	-1.7	Pass
3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

**Test Notes:** EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Power reduction to meet Restricted Band Limit

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 42 of 49



5725 MHz RADIATED BAND-EDGE EMISSIONS

Variant: 80 MHz, Test Freq: 5765.00 MHz, Antenna: RADWIN Ltd. NA, Power Setting: 13.50, Duty Cycle (%): 99

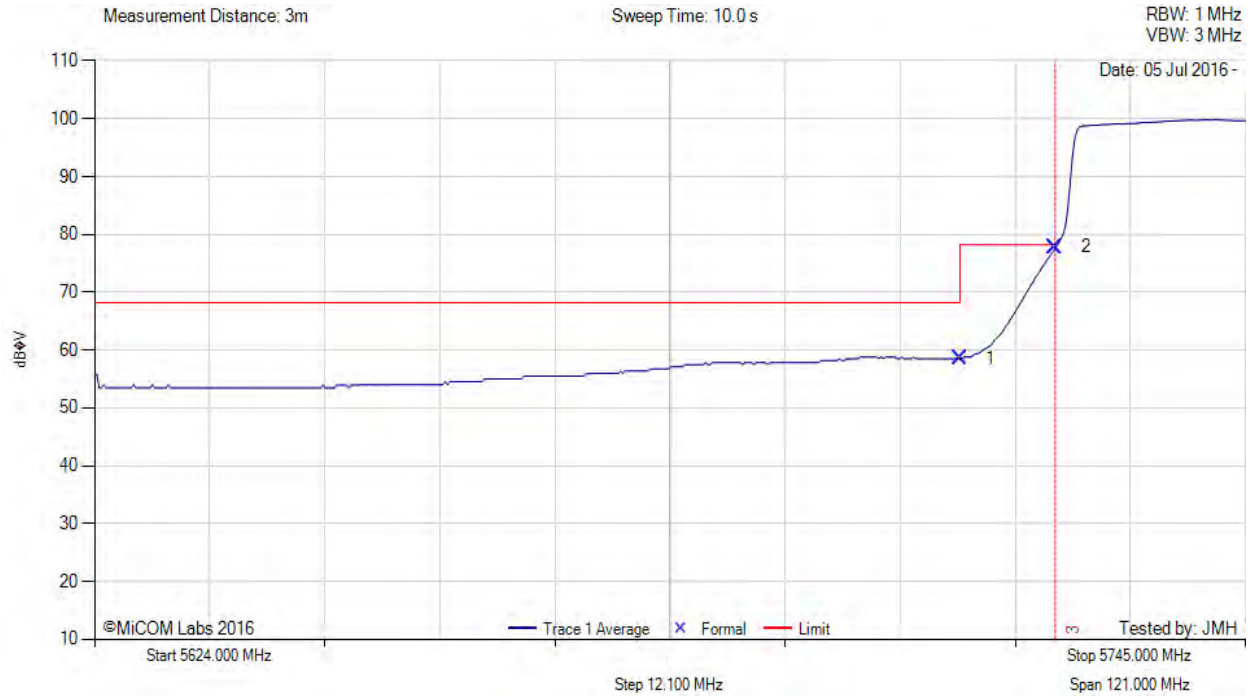

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	5715.00	20.36	3.81	34.34	58.51	Max Avg	Horizontal	193	180	68.2	-9.7	Pass
2	5725.00	39.71	3.79	34.35	77.85	Max Avg	Horizontal	193	180	78.2	-0.4	Pass
3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

**Test Notes:** EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Power reduction to meet Restricted Band Limit

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 43 of 49



5850 MHz RADIATED BAND-EDGE EMISSIONS

Variant: 10 MHz, Test Freq: 5845.00 MHz, Antenna: RADWIN Ltd. NA, Power Setting: 0.0, Duty Cycle (%): 99

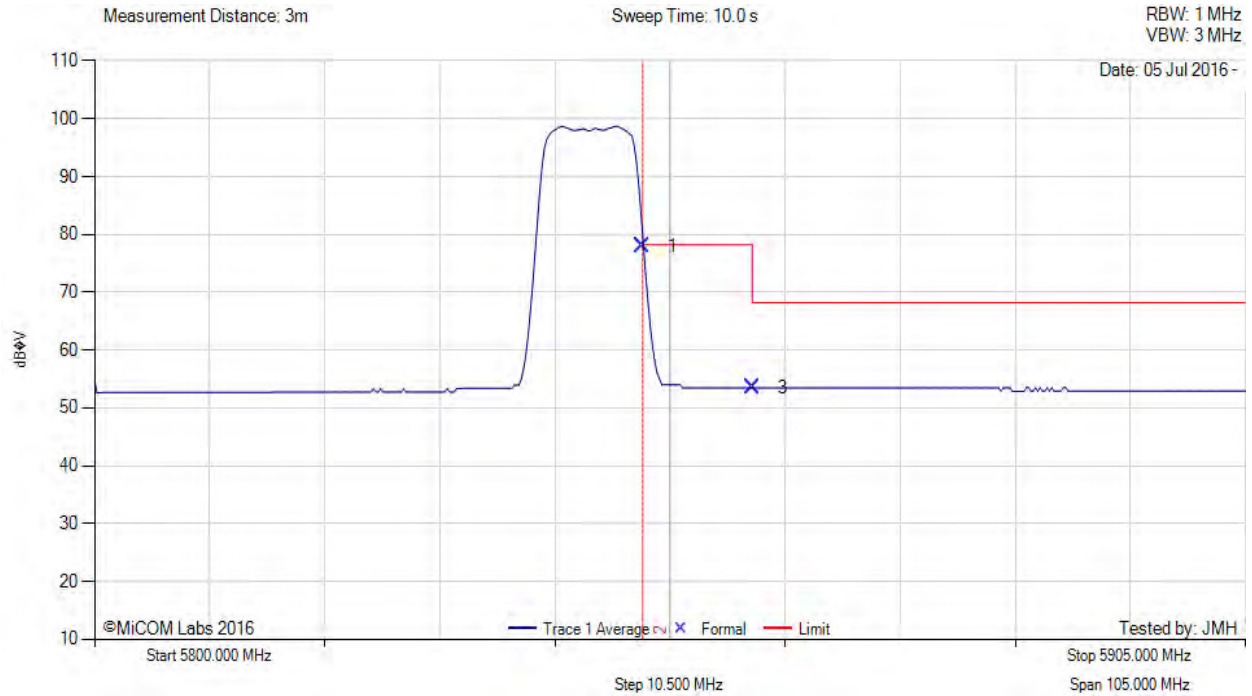

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	5850.00	39.57	3.81	34.63	78.01	Max Avg	Horizontal	172	181	78.2	-0.2	Pass
3	5860.00	14.95	3.86	34.65	53.46	Max Avg	Horizontal	172	181	68.2	-14.8	Pass
2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

**Test Notes:** EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Power reduction to meet Restricted Band Limit

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 44 of 49



5850 MHz RADIATED BAND-EDGE EMISSIONS

Variant: 20 MHz, Test Freq: 5840.00 MHz, Antenna: RADWIN Ltd. NA, Power Setting: 14.5, Duty Cycle (%): 99

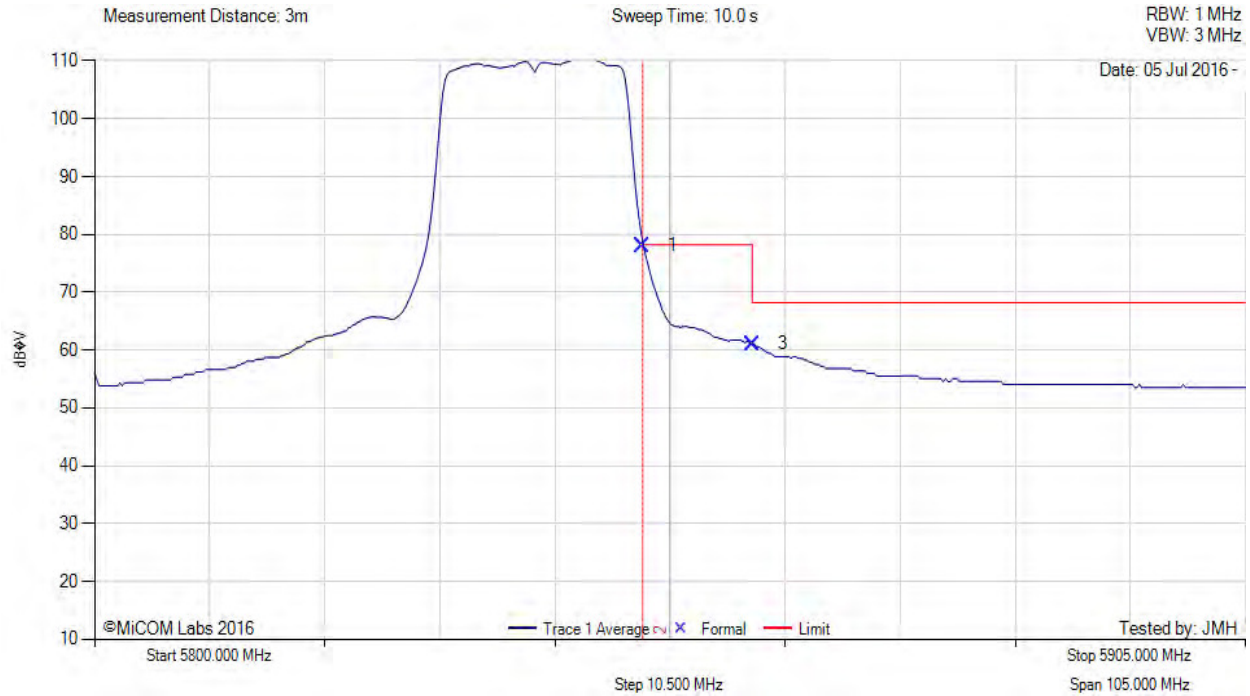

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	39.67	3.81	34.63	78.11	Max Avg	Horizontal	172	181	78.2	-0.1	Pass
3	5860.00	22.56	3.86	34.65	61.07	Max Avg	Horizontal	172	181	68.2	-7.2	Pass
2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

**Test Notes:** EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Power reduction to meet Restricted Band Limit

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 45 of 49



5850 MHz RADIATED BAND-EDGE EMISSIONS

Variant: 40 MHz, Test Freq: 5825.00 MHz, Antenna: RADWIN Ltd. NA, Power Setting: 18.5, Duty Cycle (%): 99

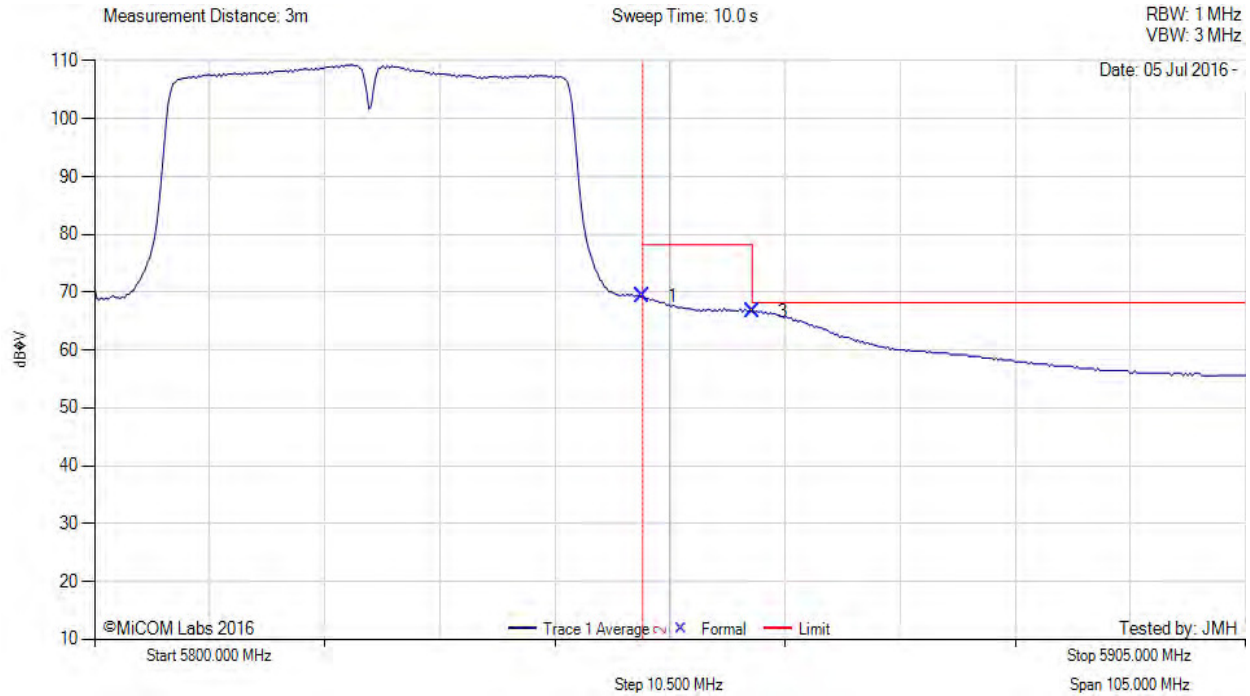

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	30.84	3.81	34.63	69.28	Max Avg	Horizontal	172	181	78.2	-9.0	Pass
3	5860.00	28.21	3.86	34.65	66.72	Max Avg	Horizontal	172	181	68.2	-1.5	Pass
2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

**Test Notes:** EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Power reduction to meet Restricted Band Limit

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 46 of 49



5850 MHz RADIATED BAND-EDGE EMISSIONS

Variant: 80 MHz, Test Freq: 5810.00 MHz, Antenna: RADWIN Ltd. NA, Power Setting: 11.5, Duty Cycle (%): 99

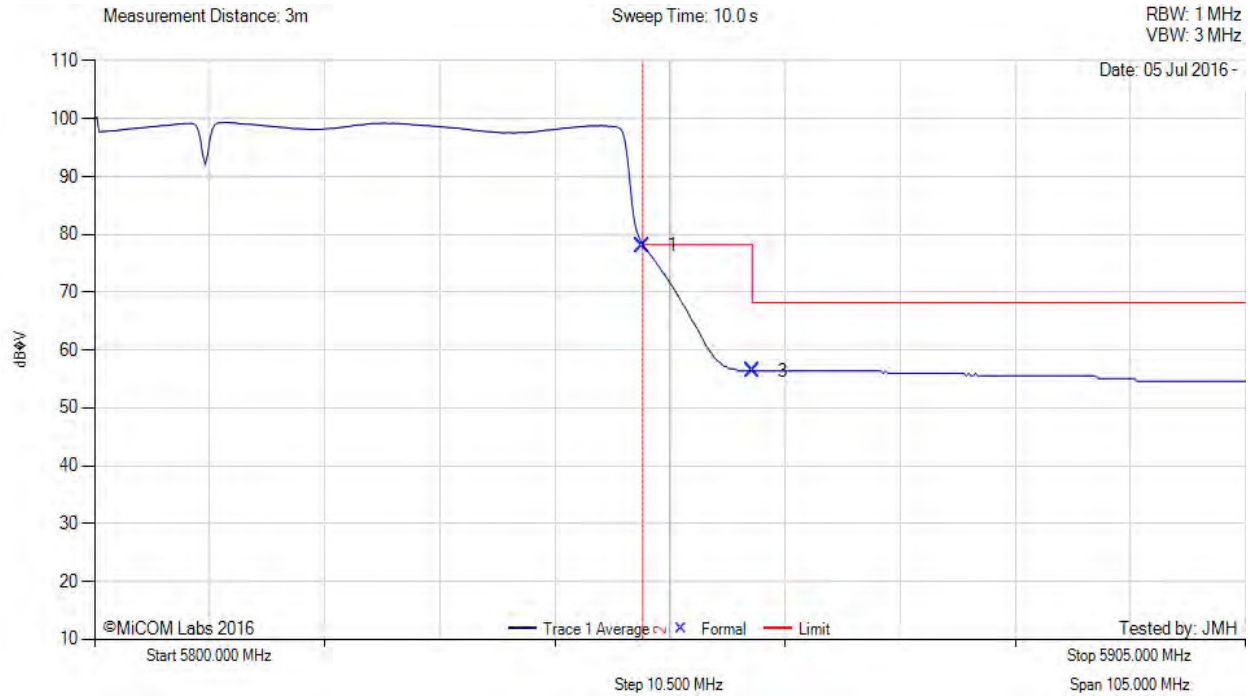

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	5850.00	39.64	3.81	34.63	78.08	Max Avg	Horizontal	172	181	78.2	-0.2	Pass
3	5860.00	17.87	3.86	34.65	56.38	Max Avg	Horizontal	172	181	68.2	-11.9	Pass
2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

**Test Notes:** EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Power reduction to meet Restricted Band Limit

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 47 of 49


### A.1.3. Colocation Emissions

Colocation: Band Edge 5150 MHz



#### RESTRICTED LOWER BAND-EDGE EMISSIONS

Variant: Colocation, Test Freq: 5160.00 and 2462 MHz, Antenna: RADWIN Ltd. NA, Power Setting: 22 (2462) 16 (5160), Duty Cycle (%): 99

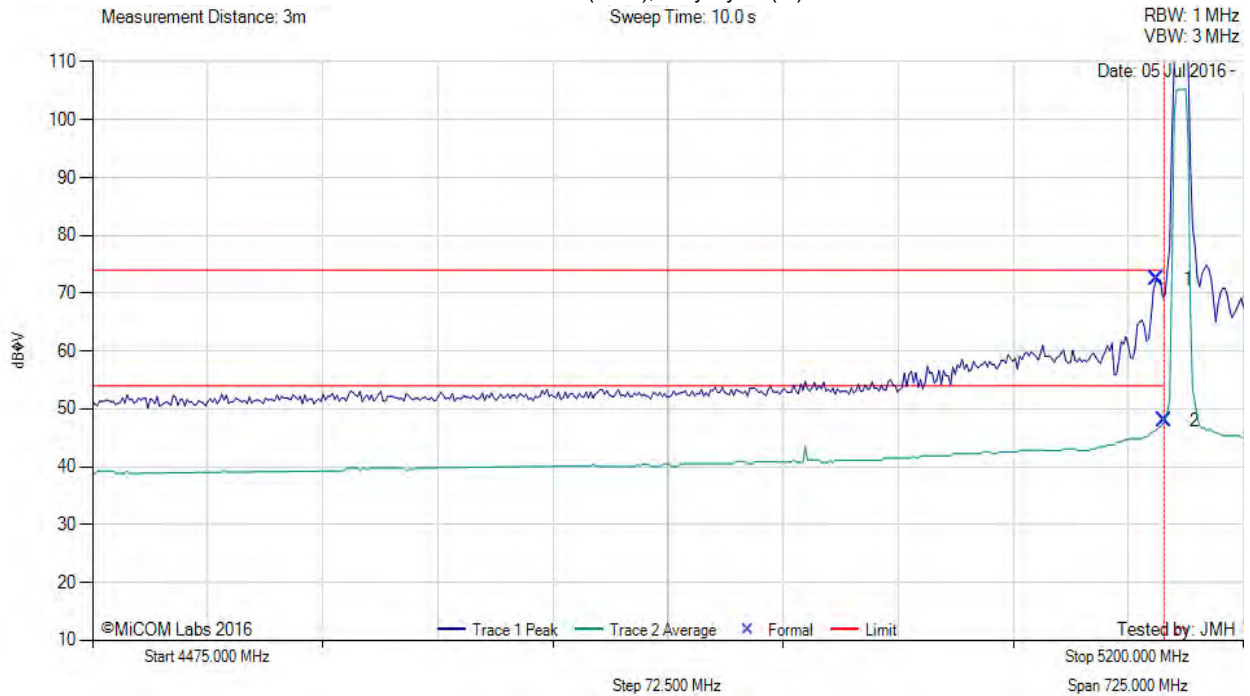

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	5145.64	34.64	3.69	34.11	72.44	Max Peak	Horizontal	154	179	74.0	-1.6	Pass
2	5150.00	10.29	3.67	34.11	48.07	Max Avg	Horizontal	154	179	54.0	-5.9	Pass
3	5150.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

**Test Notes:** EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Colocation - broadcasting simultaneously at 2462 and 5160 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Radwin Ltd. Outdoor Subscriber Radio Unit  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** RDWN41-U5\_Radiated Rev A (non-DFS Bands)  
**Issue Date:** 13<sup>th</sup> July 2016  
**Page:** 48 of 49

Colocation: TX Spurious 1-18GHz



RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 20 MHz, Test Freq: 5160.00 MHz, Antenna: RADWIN Ltd. NA, Power Setting: 22 (2462) 16 (5160), Duty Cycle (%): 99

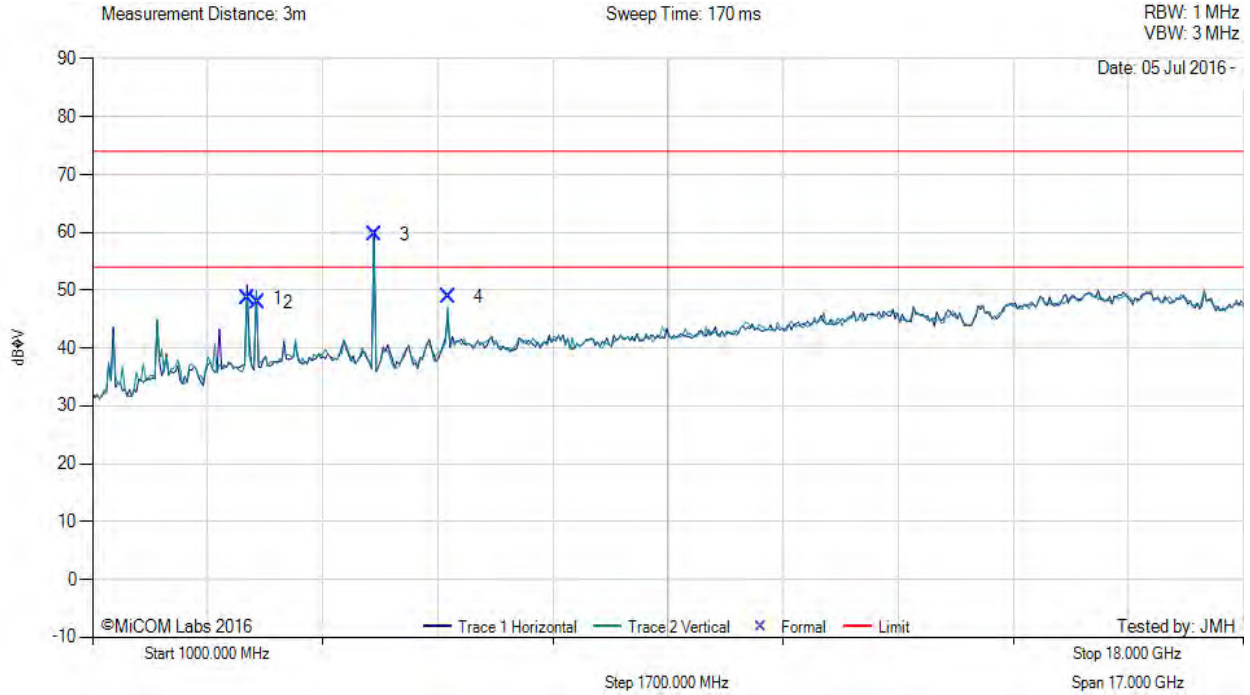

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	3282.56	56.84	3.02	-11.20	48.66	Peak (NRB)	Horizontal	101	130	--	--	Pass
2	3439.93	56.02	3.11	-11.25	47.88	Peak (NRB)	Vertical	200	0	--	--	Pass
3	5161.08	67.57	3.68	-11.55	59.70	Fundamental	Horizontal	101	189	--	--	
4	6250.04	53.56	3.93	-8.57	48.92	Peak (NRB)	Vertical	148	229	--	--	Pass

**Test Notes:** EUT on 150 cm table powered by 24V POE. Heat Sink grounded to turntable simulating physical setup. Colocation - broadcasting simultaneously at 2462 and 5160 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





575 Boulder Court  
Pleasanton, California 94566, USA  
Tel: +1 (925) 462 0304  
Fax: +1 (925) 462 0306  
[www.micomlabs.com](http://www.micomlabs.com)