

## FCC Test Report

**Report No.:** RF171124C14

**FCC ID:** Q3N-2220

**Test Model:** 2220

**Received Date:** Nov. 24, 2017

**Test Date:** Nov. 27 ~ Dec. 12, 2017

**Issued Date:** Dec. 13, 2017

**Applicant:** CIPHERLAB CO., LTD

**Address:** 12F, 333 Dunhua S. Rd., Sec.2 Taipei, Taiwan 106

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)

**FCC Registration /  
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT.....	7
3.2 Description of Test Modes.....	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Description of Support Units.....	11
3.3.1 Configuration of System under Test.....	11
3.4 General Description of Applied Standards.....	11
<b>4 Test Types and Results</b> .....	<b>12</b>
4.1 Radiated Emission and Bandedge Measurement.....	12
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	12
4.1.2 Test Instruments.....	13
4.1.3 Test Procedures.....	14
4.1.4 Deviation from Test Standard.....	14
4.1.5 Test Set Up.....	15
4.1.6 EUT Operating Conditions.....	16
4.1.7 Test Results.....	17
4.2 Number of Hopping Frequency Used.....	31
4.2.1 Limits of Hopping Frequency Used Measurement.....	31
4.2.2 Test Setup.....	31
4.2.3 Test Instruments.....	31
4.2.4 Test Procedure.....	31
4.2.5 Deviation from Test Standard.....	31
4.2.6 Test Results.....	32
4.3 Dwell Time on Each Channel.....	33
4.3.1 Limits of Dwell Time on Each Channel Measurement.....	33
4.3.2 Test Setup.....	33
4.3.3 Test Instruments.....	33
4.3.4 Test Procedures.....	33
4.3.5 Deviation from Test Standard.....	33
4.3.6 Test Results.....	34
4.4 Channel Bandwidth.....	35
4.4.1 Limits of Channel Bandwidth Measurement.....	35
4.4.2 Test Setup.....	35
4.4.3 Test Instruments.....	35
4.4.4 Test Procedure.....	35
4.4.5 Deviation from Test Standard.....	35
4.4.6 EUT Operating Condition.....	35
4.4.7 Test Results.....	36
4.5 Hopping Channel Separation.....	37
4.5.1 Limits of Hopping Channel Separation Measurement.....	37
4.5.2 Test Setup.....	37
4.5.3 Test Instruments.....	37
4.5.4 Test Procedure.....	37
4.5.5 Deviation from Test Standard.....	37
4.5.6 Test Results.....	38
4.6 Maximum Output Power.....	39
4.6.1 Limits of Maximum Output Power Measurement.....	39
4.6.2 Test Setup.....	39

4.6.3 Test Instruments .....	39
4.6.4 Test Procedure .....	39
4.6.5 Deviation from Test Standard .....	39
4.6.6 EUT Operating Condition .....	39
4.6.7 Test Results .....	39
4.7 Conducted Out of Band Emission Measurement.....	40
4.7.1 Limits Of Conducted Out of Band Emission Measurement.....	40
4.7.2 Test Instruments .....	40
4.7.3 Test Procedure .....	40
4.7.4 Deviation from Test Standard .....	40
4.7.5 EUT Operating Condition .....	40
4.7.6 Test Results .....	40
<b>5 Pictures of Test Arrangements.....</b>	<b>42</b>
<b>Appendix – Information on the Testing Laboratories .....</b>	<b>43</b>

### Release Control Record

Issue No.	Description	Date Issued
RF171124C14	Original release	Dec. 13, 2017

## 1 Certificate of Conformity

**Product:** OMNIDIRECTIONAL PRESENTATION SCANNER

**Brand:** CIPHERLAB

**Test Model:** 2220

**Sample Status:** Engineering sample

**Applicant:** CIPHERLAB CO., LTD

**Test Date:** Nov. 27 ~ Dec. 12, 2017

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :**  , **Date:** Dec. 13, 2017  
Polly Chien / Specialist

**Approved by :**  , **Date:** Dec. 13, 2017  
Ken Liu / Senior Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -9.00dB at 0.41953MHz.
15.247(a)(1)(i)	Number of Hopping Frequency Used	Pass	Meet the requirement of limit.
15.247(a)(1)(i)	Dwell Time on Each Channel	Pass	Meet the requirement of limit.
15.247(a)(1) (i)	Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	Pass	Meet the requirement of limit.
15.247(b)(2)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
15.205 & 209	Radiated Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -2.4dB at 86.17MHz.
15.247(d)	Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -11.1dB at 2709.72MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is U.FL not a standard connector.

**NOTE:** If the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.44 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.59 dB
	200MHz ~1000MHz	3.60 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	OMNIDIRECTIONAL PRESENTATION SCANNER
Brand	CIPHERLAB
Test Model	2220
Status of EUT	Engineering sample
Power Supply Rating	5Vdc, 1A
Modulation Type	ASK
Channel Spacing	480kHz
Operating Frequency	903.24MHz ~ 926.76MHz
Number of Channel	50
Output Power	267.301mW
Antenna Type	RHCP PATC antenna with 2.29dBi gain
Antenna Connector	U.FL
Accessory Device	NA
Data Cable Supplied	2m shielded Dual-USB cable without core

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 Description of Test Modes

50 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	903.24	26	915.24
2	903.72	27	915.72
3	904.20	28	916.20
4	904.68	29	916.68
5	905.16	30	917.16
6	905.64	31	917.64
7	906.12	32	918.12
8	906.60	33	918.60
9	907.08	34	919.08
10	907.56	35	919.56
11	908.04	36	920.04
12	908.52	37	920.52
13	909.00	38	921.00
14	909.48	39	921.48
15	909.96	40	921.96
16	910.44	41	922.44
17	910.92	42	922.92
18	911.40	43	923.40
19	911.88	44	923.88
20	912.36	45	924.36
21	912.84	46	924.84
22	913.32	47	925.32
23	913.80	48	925.80
24	914.28	49	926.28
25	914.76	50	926.76



### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz      **RE<1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**NOTE:** The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on Z-plane.

#### Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
-	1 to 50	1, 26, 50	ASK

#### Radiated Emission Test (Below 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
-	1 to 50	1, 26, 50	ASK

#### Power Line Conducted Emission Test:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
-	1 to 50	1, 26, 50	ASK

#### Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
-	1 to 50	1, 26, 50	ASK

**Test Condition:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (System)	TESTED BY
RE $\geq$ 1G	25deg. C, 66%RH	120Vac, 60Hz	James Yang
RE<1G	25deg. C, 66%RH	120Vac, 60Hz	James Yang
PLC	22deg. C, 62%RH	120Vac, 60Hz	Willy Cheng
APCM	25deg. C, 60%RH	120Vac, 60Hz	Chris Lin

### 3.3 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5520	8Y4DMQ1	FCC DoC Approved	-

Note: All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB cable	1	1.9	Y	0	Provided by client

#### 3.3.1 Configuration of System under Test

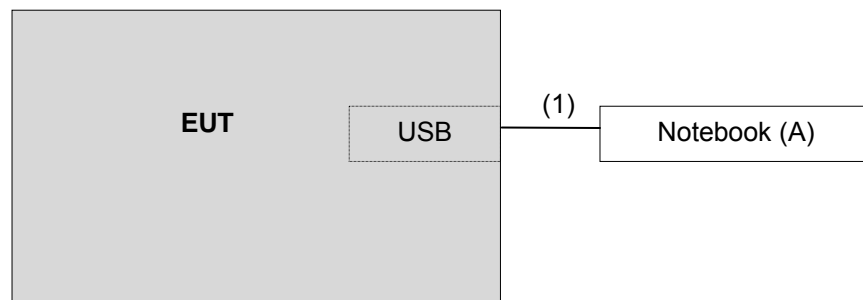

### 3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)**  
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver KEYSIGHT	N9038A	MY55420137	Mar. 27, 2017	Mar. 26, 2018
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	May 11, 2017	May 10, 2018
BILOG Antenna SCHWARZBECK	VULB9168	9168-148	Dec. 28, 2016	Dec. 27, 2017
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Dec. 27, 2016	Dec. 26, 2017
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Dec. 14, 2016	Dec. 13, 2017
Loop Antenna EMCI	EM-6879	269	Aug. 11, 2017	Aug. 10, 2018
Preamplifier Agilent (Below 1GHz)	8447D	2944A10638	Aug. 08, 2017	Aug. 07, 2018
Preamplifier Agilent (Above 1GHz)	8449B	3008A01638	Feb. 22, 2017	Feb. 21, 2018
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-02 (248780+MY13377)	Aug. 08, 2017	Aug. 07, 2018
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(250795/4)	Aug. 08, 2017	Aug. 07, 2018
RF signal cable Woken	8D-FB	Cable-CH9-01	Aug. 01, 2017	Jul. 31, 2018
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in HwaYa Chamber 9.  
 3. The FCC Designation Number is TW0003. The number will be varied with the Lab location and scope as attached.  
 4. The IC Site Registration No. is IC 7450F-9.

#### 4.1.3 Test Procedures

##### **For Radiated emission below 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### **Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

##### **For Radiated emission above 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


##### **Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10 Hz (Duty cycle  $\geq 98\%$ ) for Peak detection at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.


#### 4.1.4 Deviation from Test Standard

No deviation.


4.1.5 Test Set Up  
For Radiated emission below 30MHz

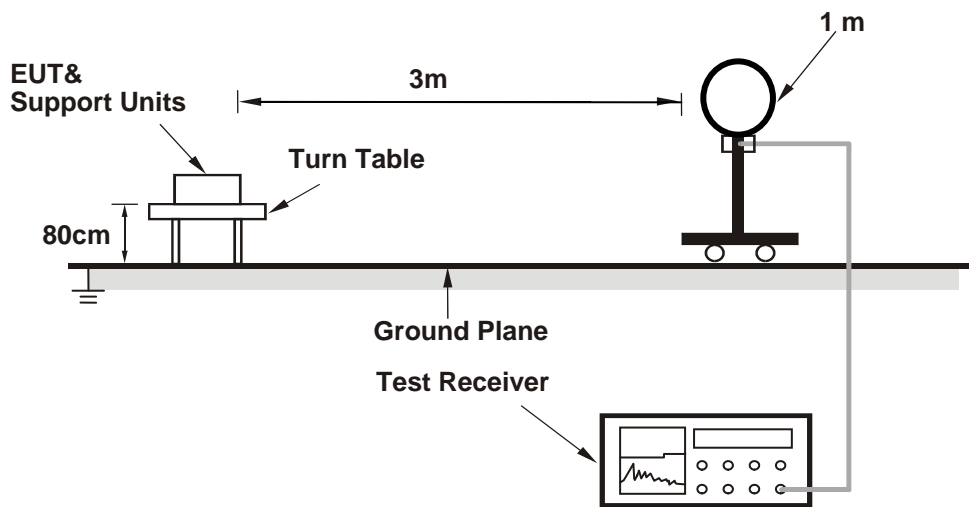

For Radiated emission 30MHz to 1GHz

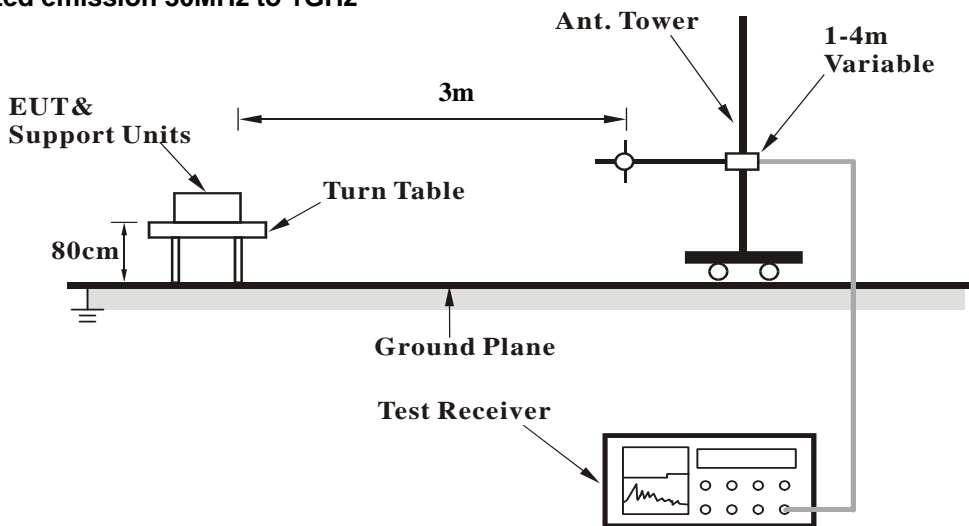

### For Radiated emission above 1GHz

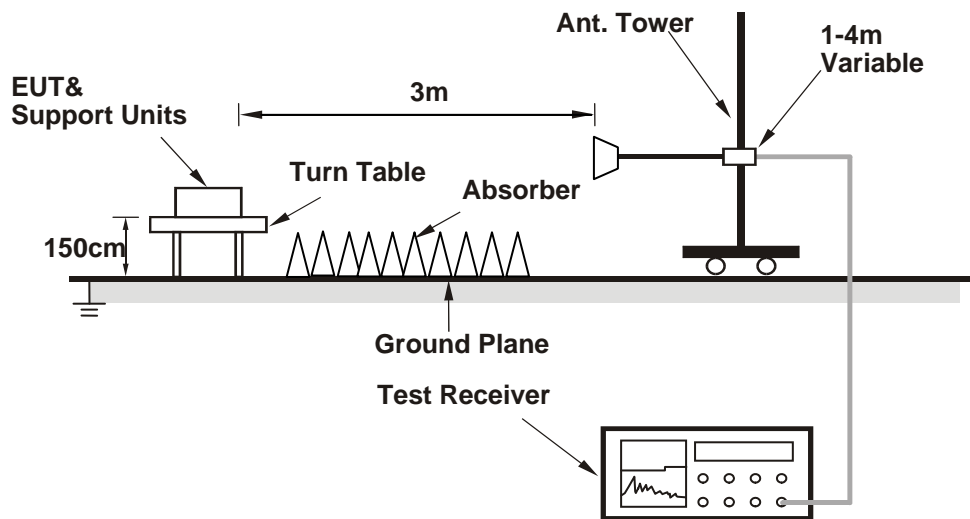

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

Set the EUT under transmission condition continuously at specific channel frequency.



4.1.7 Test Results

**ABOVE 1GHz DATA :**

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#902.00	55.8 PK	95.7	-39.9	1.00 H	0	30.80	25.00
2	#902.00	45.9 AV	95.5	-49.6	1.00 H	0	20.90	25.00
3	*903.24	115.7 PK			1.00 H	0	90.60	25.10
4	*903.24	115.5 AV			1.00 H	0	90.40	25.10
5	#1806.48	45.1 PK	95.7	-50.6	2.20 H	146	51.30	-6.20
6	#1806.48	40.8 AV	95.5	-54.7	2.20 H	146	47.00	-6.20
7	2709.72	47.4 PK	74.0	-26.6	2.20 H	167	49.80	-2.40
8	2709.72	42.6 AV	54.0	-11.4	2.20 H	167	45.00	-2.40
9	#6322.68	51.7 PK	95.7	-44.0	1.90 H	86	45.70	6.00
10	#6322.68	44.5 AV	95.5	-51.0	1.90 H	86	38.50	6.00

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#902.00	53.8 PK	86.0	-32.2	1.09 V	252	28.80	25.00
2	#902.00	44.3 AV	85.6	-41.3	1.09 V	252	19.30	25.00
3	*903.24	106.0 PK			1.09 V	252	80.90	25.10
4	*903.24	105.6 AV			1.09 V	252	80.50	25.10
5	#1806.48	47.1 PK	86.0	-38.9	3.26 V	175	53.30	-6.20
6	#1806.48	42.4 AV	85.6	-43.2	3.26 V	175	48.60	-6.20
7	2709.72	47.5 PK	74.0	-26.5	3.24 V	222	49.90	-2.40
8	2709.72	42.9 AV	54.0	-11.1	3.24 V	222	45.30	-2.40
9	#6322.68	52.0 PK	86.0	-34.0	3.73 V	177	46.00	6.00
10	#6322.68	44.6 AV	85.6	-41.0	3.73 V	177	38.60	6.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 26	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*915.24	122.5 PK			1.46 H	0	97.20	25.30
2	*915.24	122.4 AV			1.46 H	0	97.10	25.30
3	#1830.48	55.6 PK	102.5	-46.9	1.00 H	194	61.60	-6.00
4	#1830.48	54.5 AV	102.4	-47.9	1.00 H	194	60.50	-6.00
5	2745.72	44.6 PK	74.0	-29.4	1.96 H	357	46.90	-2.30
6	2745.72	38.3 AV	54.0	-15.7	1.96 H	357	40.60	-2.30
7	#6406.68	50.6 PK	102.5	-51.9	1.78 H	75	44.20	6.40
8	#6406.68	42.6 AV	102.4	-59.8	1.78 H	75	36.20	6.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*915.24	120.3 PK			1.10 V	324	95.00	25.30
2	*915.24	120.1 AV			1.10 V	324	94.80	25.30
3	#1830.48	54.2 PK	100.3	-46.1	3.04 V	175	60.20	-6.00
4	#1830.48	52.7 AV	100.1	-47.4	3.04 V	175	58.70	-6.00
5	2745.72	45.3 PK	74.0	-28.7	2.97 V	135	47.60	-2.30
6	2745.72	39.5 AV	54.0	-14.5	2.97 V	135	41.80	-2.30
7	#6406.68	49.4 PK	100.3	-50.9	2.60 V	285	43.00	6.40
8	#6406.68	40.2 AV	100.1	-59.9	2.60 V	285	33.80	6.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 50	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*926.76	115.8 PK			1.45 H	40	90.30	25.50
2	*926.76	115.7 AV			1.45 H	40	90.20	25.50
3	#928.00	64.1 PK	95.8	-31.7	1.45 H	40	38.60	25.50
4	#928.00	54.9 AV	95.7	-40.8	1.45 H	40	29.40	25.50
5	#1853.52	43.1 PK	95.8	-52.7	3.10 H	113	49.10	-6.00
6	#1853.52	37.6 AV	95.7	-58.1	3.10 H	113	43.60	-6.00
7	2780.28	46.3 PK	74.0	-27.7	2.72 H	358	48.60	-2.30
8	2780.28	40.5 AV	54.0	-13.5	2.72 H	358	42.80	-2.30
9	#6487.32	51.0 PK	95.8	-44.8	1.65 H	172	44.30	6.70
10	#6487.32	42.3 AV	95.7	-53.4	1.65 H	172	35.60	6.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*926.76	113.9 PK			1.08 V	357	88.40	25.50
2	*926.76	113.7 AV			1.08 V	357	88.20	25.50
3	#928.00	64.1 PK	93.9	-29.8	1.08 V	357	38.60	25.50
4	#928.00	54.8 AV	93.7	-38.9	1.08 V	357	29.30	25.50
5	#1853.52	43.6 PK	93.9	-50.3	3.14 V	172	49.60	-6.00
6	#1853.52	37.3 AV	93.7	-56.4	3.14 V	172	43.30	-6.00
7	2780.28	46.8 PK	74.0	-27.2	3.39 V	218	49.10	-2.30
8	2780.28	40.7 AV	54.0	-13.3	3.39 V	218	43.00	-2.30
9	#6487.32	50.6 PK	93.9	-43.3	3.41 V	274	43.90	6.70
10	#6487.32	41.1 AV	93.7	-52.6	3.41 V	274	34.40	6.70

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

**BELOW 1GHz WORST-CASE DATA:**

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	52.21	29.6 QP	40.0	-10.4	2.00 H	17	43.20	-13.60
2	165.73	36.0 QP	43.5	-7.5	1.50 H	159	49.70	-13.70
3	287.97	32.4 QP	46.0	-13.6	1.00 H	193	45.00	-12.60
4	527.61	38.3 QP	46.0	-7.7	1.50 H	241	47.30	-9.00
5	665.38	33.2 QP	46.0	-12.8	1.00 H	142	39.80	-6.60
6	936.07	33.9 QP	46.0	-12.1	1.00 H	218	36.20	-2.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	53.18	36.0 QP	40.0	-4.0	1.01 V	58	49.60	-13.60
2	99.75	36.9 QP	43.5	-6.6	1.01 V	203	54.90	-18.00
3	384.02	28.9 QP	46.0	-17.1	1.51 V	189	40.00	-11.10
4	551.87	39.2 QP	46.0	-6.8	1.01 V	260	48.00	-8.80
5	696.43	33.1 QP	46.0	-12.9	1.51 V	124	39.30	-6.20
6	936.07	35.3 QP	46.0	-10.7	1.01 V	182	37.60	-2.30

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 26	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	52.21	27.0 QP	40.0	-13.0	1.50 H	19	40.60	-13.60
2	124.98	32.6 QP	43.5	-10.9	1.50 H	87	48.00	-15.40
3	197.74	32.5 QP	43.5	-11.0	1.50 H	165	48.60	-16.10
4	287.97	32.0 QP	46.0	-14.0	1.01 H	135	44.60	-12.60
5	336.48	30.2 QP	46.0	-15.8	1.01 H	193	41.90	-11.70
6	527.61	37.1 QP	46.0	-8.9	1.50 H	252	46.10	-9.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	32.81	33.6 QP	40.0	-6.4	1.00 V	10	48.80	-15.20
2	144.38	31.7 QP	43.5	-11.8	1.50 V	8	45.40	-13.70
3	384.02	28.2 QP	46.0	-17.8	1.50 V	177	39.30	-11.10
4	551.87	38.7 QP	46.0	-7.3	1.00 V	267	47.50	-8.80
5	696.43	32.9 QP	46.0	-13.1	1.50 V	63	39.10	-6.20
6	936.07	35.6 QP	46.0	-10.4	1.00 V	190	37.90	-2.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 50	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	124.98	33.6 QP	43.5	-9.9	1.50 H	261	49.00	-15.40
2	165.73	35.3 QP	43.5	-8.2	1.00 H	176	49.00	-13.70
3	235.58	32.5 QP	46.0	-13.5	1.50 H	219	47.60	-15.10
4	295.73	32.3 QP	46.0	-13.7	1.00 H	172	44.80	-12.50
5	527.61	38.2 QP	46.0	-7.8	1.50 H	240	47.20	-9.00
6	887.56	32.0 QP	46.0	-14.0	1.50 H	56	35.20	-3.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	52.21	35.9 QP	40.0	-4.1	1.01 V	27	49.50	-13.60
<b>2</b>	<b>86.17</b>	<b>37.6 QP</b>	<b>40.0</b>	<b>-2.4</b>	<b>1.50 V</b>	<b>197</b>	<b>56.50</b>	<b>-18.90</b>
3	144.38	33.2 QP	43.5	-10.3	1.01 V	12	46.90	-13.70
4	431.56	30.2 QP	46.0	-15.8	1.01 V	207	40.50	-10.30
5	551.87	39.0 QP	46.0	-7.0	1.01 V	263	47.80	-8.80
6	713.89	38.5 QP	46.0	-7.5	1.01 V	171	44.40	-5.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCS 30	100288	Aug. 17, 2017	Aug. 16, 2018
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond2-01	Sep. 08, 2017	Sep. 07, 2018
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Jan. 17, 2017	Jan. 16, 2018
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Aug. 02, 2017	Aug. 01, 2018
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 2.

3. The VCCI Site Registration No. is C-2047.

#### 4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation From Test Standard

No deviation.

#### 4.2.5 Test Setup

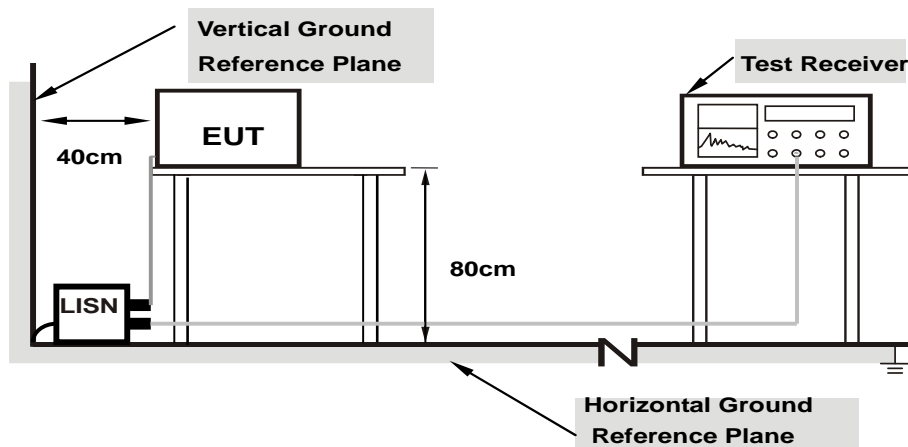

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Condition

Same as 4.1.6.




#### 4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	TX Channel 1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.45	29.08	21.03	39.53	31.48	65.79	55.79	-26.26	-24.31
2	0.38047	10.30	27.62	18.64	37.92	28.94	58.27	48.27	-20.35	-19.33
3	0.47031	10.31	24.94	14.96	35.25	25.27	56.51	46.51	-21.26	-21.24
4	0.79063	10.37	22.15	16.55	32.52	26.92	56.00	46.00	-23.48	-19.08
5	1.88672	10.37	24.32	19.26	34.69	29.63	56.00	46.00	-21.31	-16.37
6	8.40625	10.53	18.39	12.10	28.92	22.63	60.00	50.00	-31.08	-27.37

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

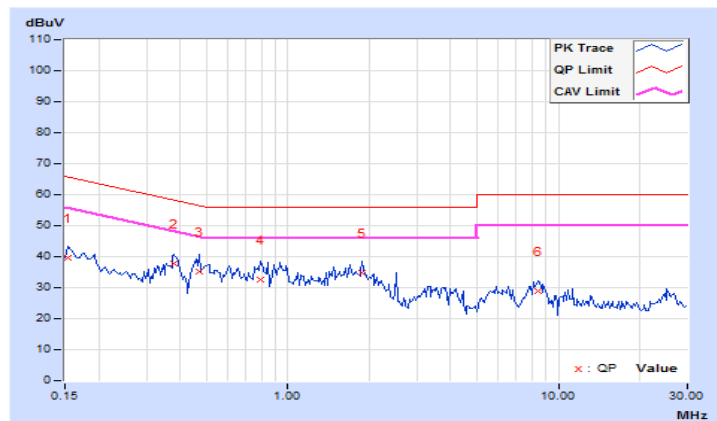


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	TX Channel 1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.25547	10.23	22.55	17.71	32.78	27.94	61.58
2	0.41953	10.33	28.37	26.93	38.70	37.26	57.46	47.46	-18.76	-10.20
3	0.87266	10.32	19.51	15.67	29.83	25.99	56.00	46.00	-26.17	-20.01
4	1.99219	10.41	24.51	20.06	34.92	30.47	56.00	46.00	-21.08	-15.53
5	3.17188	10.52	12.95	7.61	23.47	18.13	56.00	46.00	-32.53	-27.87
6	25.94141	10.84	10.44	5.27	21.28	16.11	60.00	50.00	-38.72	-33.89

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

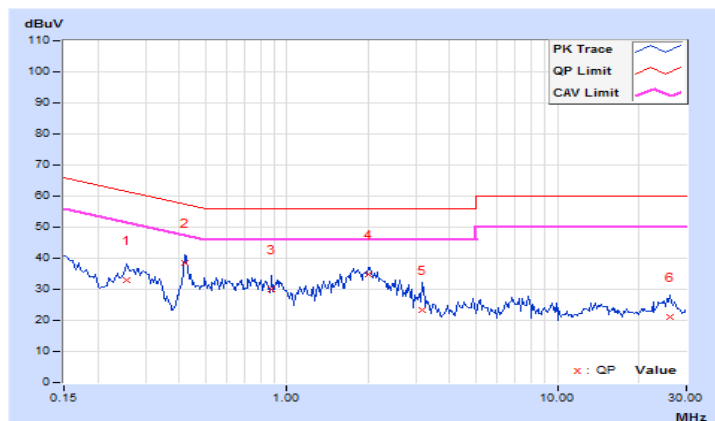


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	TX Channel 26		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16172	10.43	29.08	21.79	39.51	32.22	65.38
2	0.20859	10.32	27.28	18.00	37.60	28.32	63.26	53.26	-25.66	-24.94
3	0.47422	10.31	26.26	15.02	36.57	25.33	56.44	46.44	-19.87	-21.11
4	0.84531	10.38	25.03	23.08	35.41	33.46	56.00	46.00	-20.59	-12.54
5	2.05469	10.37	24.86	17.01	35.23	27.38	56.00	46.00	-20.77	-18.62
6	7.22656	10.51	15.34	4.42	25.85	14.93	60.00	50.00	-34.15	-35.07

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

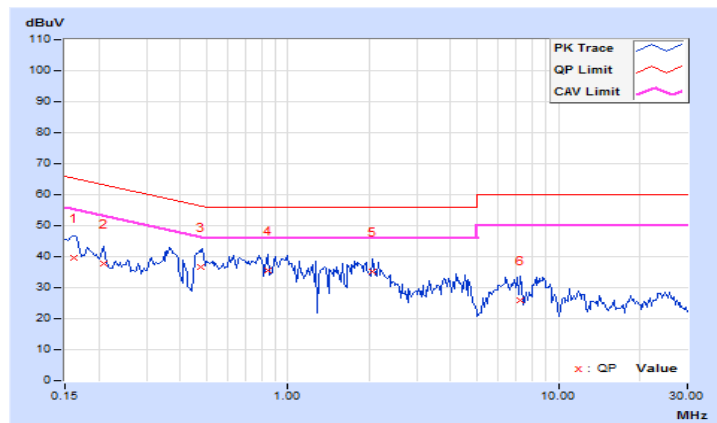


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	TX Channel 26		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.28	28.95	21.78	39.23	32.06	65.79	55.79	-26.56	-23.73
2	0.26328	10.24	24.54	19.02	34.78	29.26	61.33	51.33	-26.55	-22.07
3	0.41953	10.33	29.11	26.80	39.44	37.13	57.46	47.46	-18.02	-10.33
4	2.37500	10.45	22.38	16.62	32.83	27.07	56.00	46.00	-23.17	-18.93
5	6.01563	10.57	9.59	5.05	20.16	15.62	60.00	50.00	-39.84	-34.38
6	9.94922	10.52	11.02	3.03	21.54	13.55	60.00	50.00	-38.46	-36.45

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

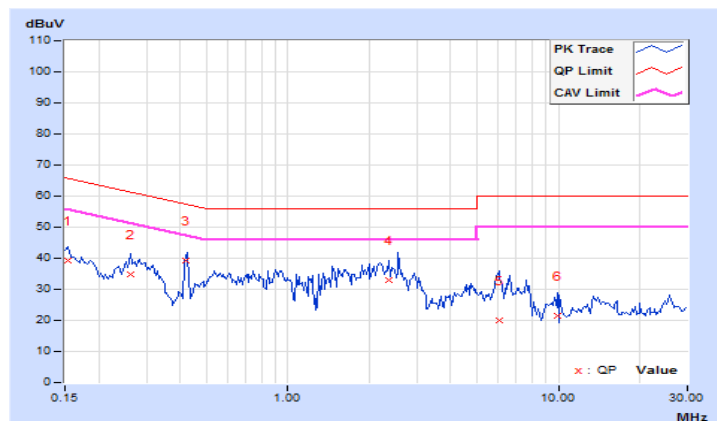


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	TX Channel 50		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15781	10.44	27.76	19.40	38.20	29.84	65.58
2	0.37266	10.30	28.12	17.63	38.42	27.93	58.44	48.44	-20.02	-20.51
3	0.46641	10.31	27.91	15.40	38.22	25.71	56.58	46.58	-18.36	-20.87
4	1.87109	10.37	26.17	20.80	36.54	31.17	56.00	46.00	-19.46	-14.83
5	4.20703	10.47	17.51	10.16	27.98	20.63	56.00	46.00	-28.02	-25.37
6	8.48438	10.53	20.03	13.47	30.56	24.00	60.00	50.00	-29.44	-26.00

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

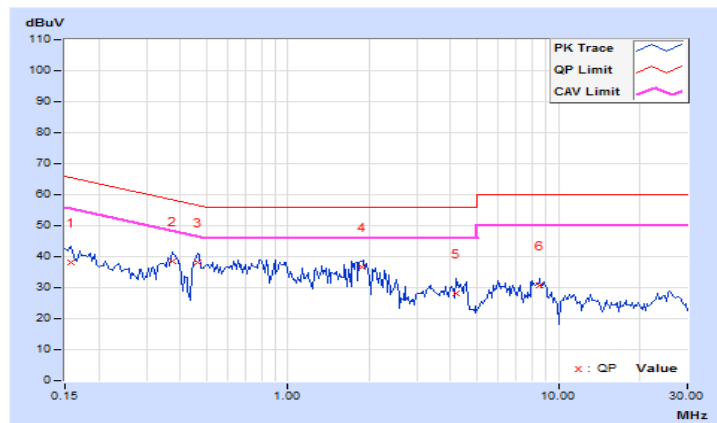


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	TX Channel 50		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.26328	10.24	24.60	18.34	34.84	28.58	61.33
<b>2</b>	<b>0.41953</b>	<b>10.33</b>	<b>29.36</b>	<b>28.13</b>	<b>39.69</b>	<b>38.46</b>	<b>57.46</b>	<b>47.46</b>	<b>-17.77</b>	<b>-9.00</b>
3	0.88438	10.32	22.50	15.81	32.82	26.13	56.00	46.00	-23.18	-19.87
4	2.00000	10.41	25.35	20.41	35.76	30.82	56.00	46.00	-20.24	-15.18
5	7.31641	10.55	14.22	7.16	24.77	17.71	60.00	50.00	-35.23	-32.29
6	9.90625	10.52	11.04	3.70	21.56	14.22	60.00	50.00	-38.44	-35.78

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

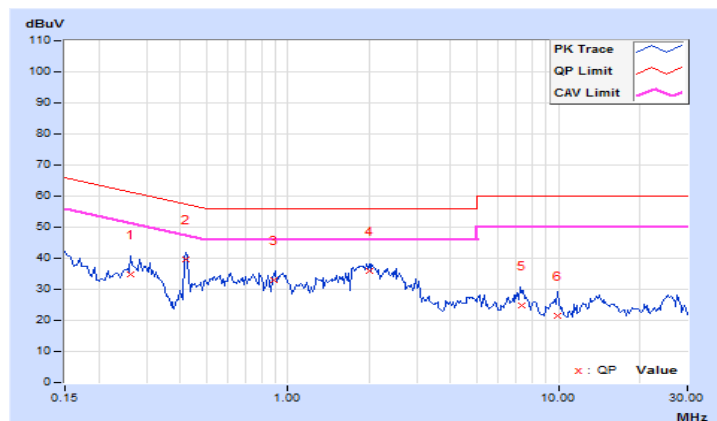


### 4.3 Number of Hopping Frequency Used

#### 4.3.1 Limits of Hopping Frequency Used Measurement

At least 50 channels frequencies, and should be equally spaced.

#### 4.3.2 Test Setup

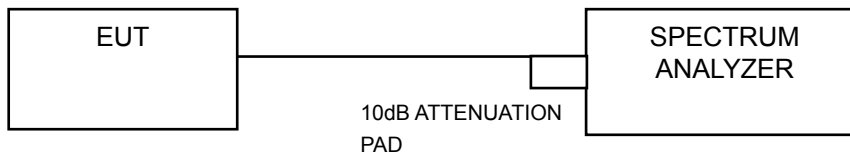

#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure


- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

#### 4.3.5 Deviation from Test Standard

No deviation.

### 4.3.6 Test Results

There are 50 hopping frequencies in the hopping mode. On the plots, it shows that the hopping frequencies are equally spaced.

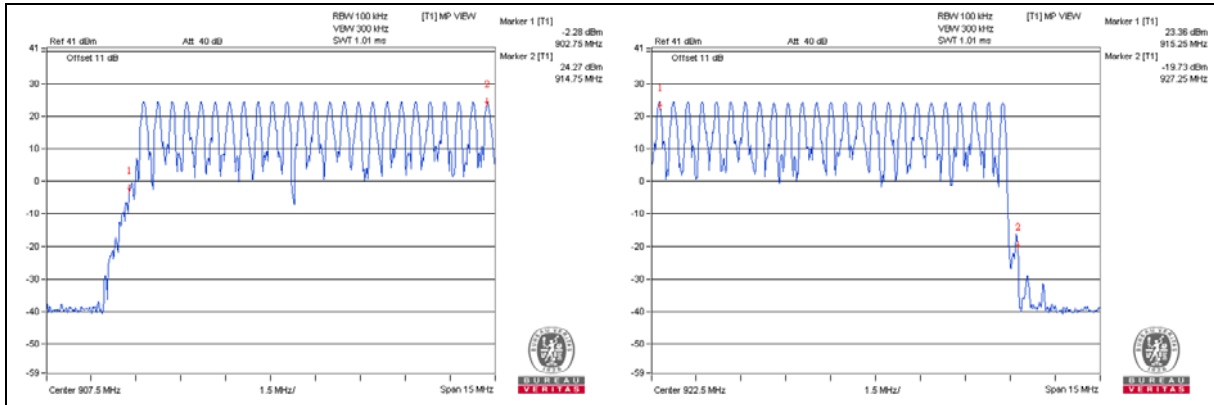



#### 4.4 Dwell Time on Each Channel

##### 4.4.1 Limits of Dwell Time on Each Channel Measurement

The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.

##### 4.4.2 Test Setup



##### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

##### 4.4.4 Test Procedures

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.


##### 4.4.5 Deviation from Test Standard

No deviation.

#### 4.4.6 Test Results

Number of transmission in a 20 (50Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
1 (times / 10 sec) * 2 = 2 times	9.71	19.42	400

**NOTE:** Test plots of the transmitting time slot are shown on following.

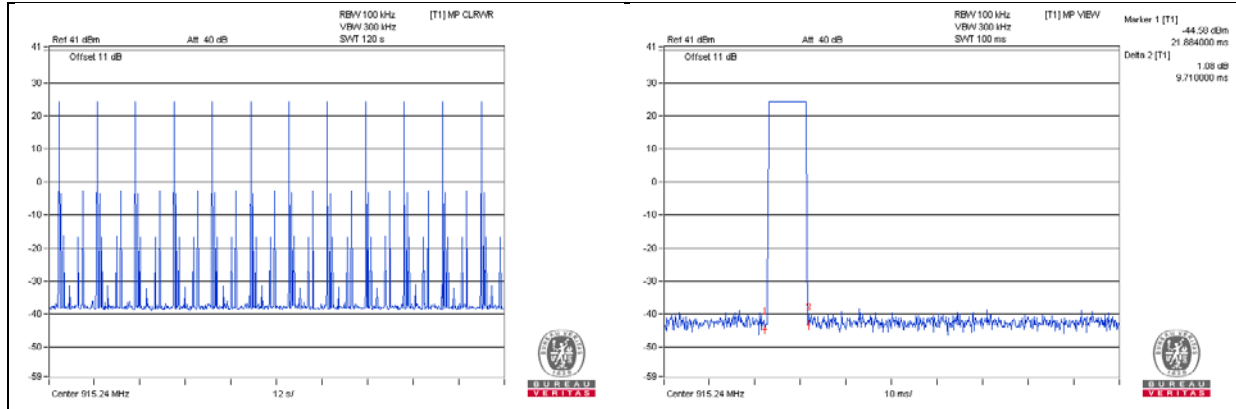

## 4.5 Channel Bandwidth

### 4.5.1 Limits of Channel Bandwidth Measurement

The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

### 4.5.2 Test Setup



### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

### 4.5.5 Deviation from Test Standard

No deviation.


### 4.5.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

#### 4.5.7 Test Results

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
1	903.24	0.17	0.5
26	915.24	0.17	0.5
50	926.76	0.17	0.5

Note: 20 dB bandwidth of the hopping channel is less than 500 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.

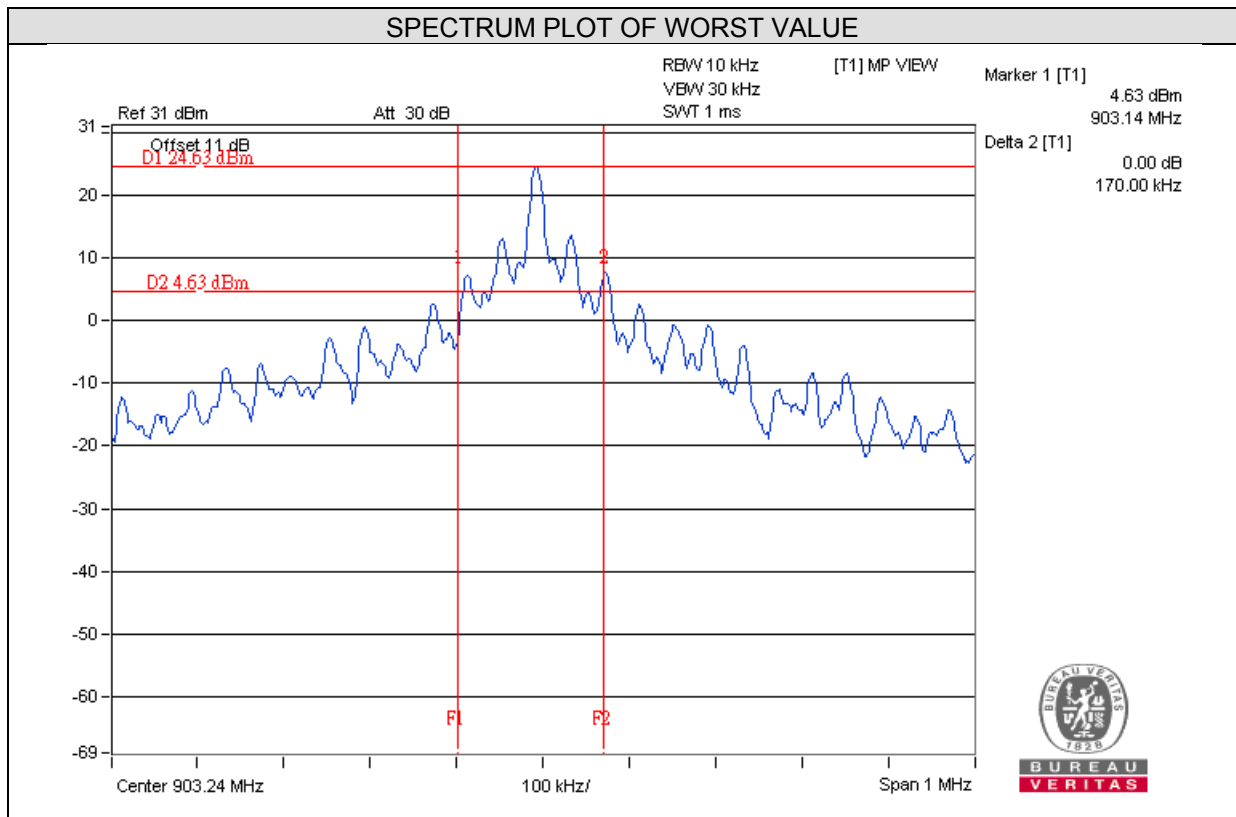


## 4.6 Hopping Channel Separation

### 4.6.1 Limits of Hopping Channel Separation Measurement

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

### 4.6.2 Test Setup

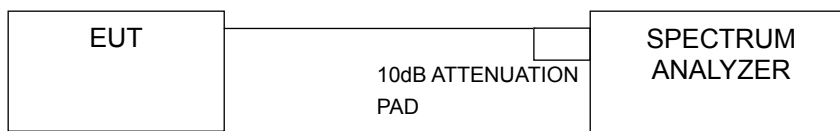

### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure


- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- c. By using the MaxHold function record the separation of two adjacent channels.
- d. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

### 4.6.5 Deviation from Test Standard

No deviation.

#### 4.6.6 Test Results

Channel	Frequency (MHz)	Adjacent Channel Separation (MHz)	Minimum Limit (MHz)	Pass / Fail
1	903.24	0.486	0.17	PASS
26	915.24	0.485	0.17	PASS
50	926.76	0.482	0.17	PASS

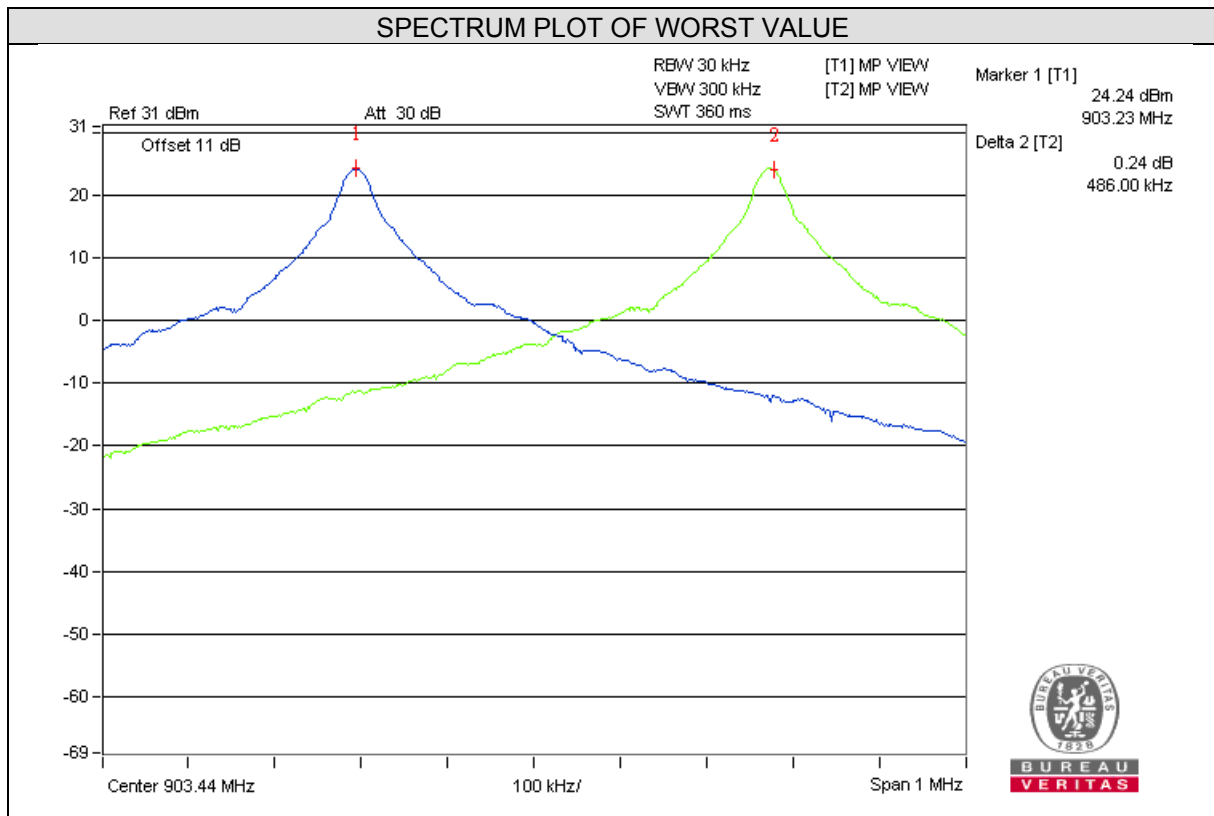


#### 4.7 Maximum Output Power

##### 4.7.1 Limits of Maximum Output Power Measurement

The maximum peak conducted output power of the intentional radiator shall not exceed the following: 2 Watts without coordination, 4 Watts with coordination.

##### 4.7.2 Test Setup

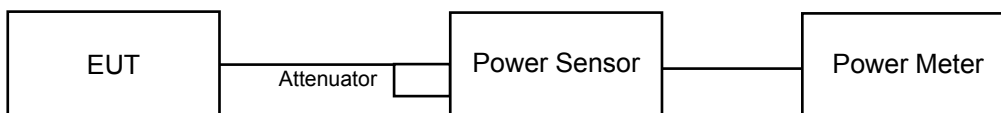

##### 4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

##### 4.7.4 Test Procedure

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor. Record the power level.

##### 4.7.5 Deviation from Test Standard

No deviation.

##### 4.7.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

##### 4.7.7 Test Results

Channel	Frequency (MHz)	Output Power (mW)	Output Power (dBm)	Power Limit (dBm)	Pass / Fail
1	903.24	<b>267.301</b>	24.27	30	PASS
26	915.24	261.216	24.17	30	PASS
50	926.76	250.611	23.99	30	PASS

## 4.8 Conducted Out of Band Emission Measurement

### 4.8.1 Limits Of Conducted Out of Band Emission Measurement

Below -20dB of the highest emission level of operating band (in 100kHz RBW).

### 4.8.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.8.3 Test Procedure

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

### 4.8.4 Deviation from Test Standard

No deviation.

### 4.8.5 EUT Operating Condition


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

### 4.8.6 Test Results


The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




### Hopping disabled Low Channel

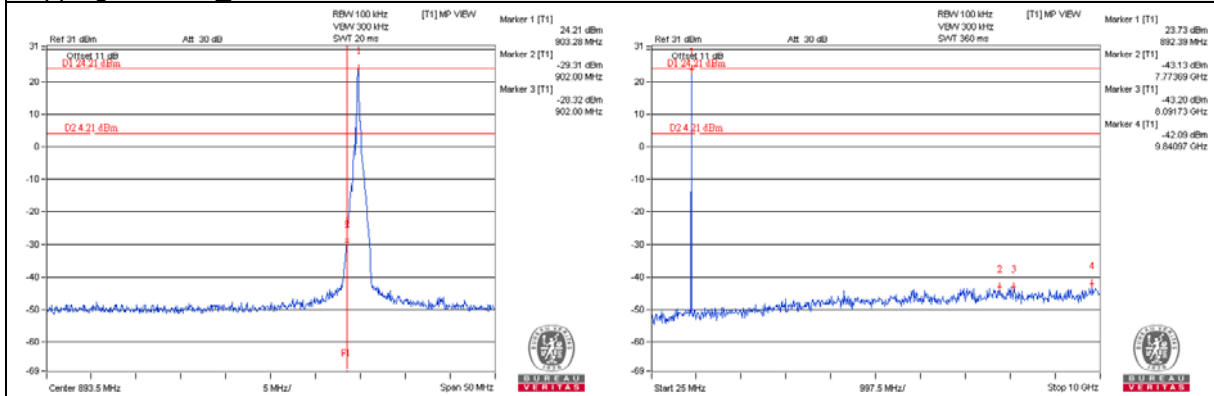

### Hopping disabled High Channel

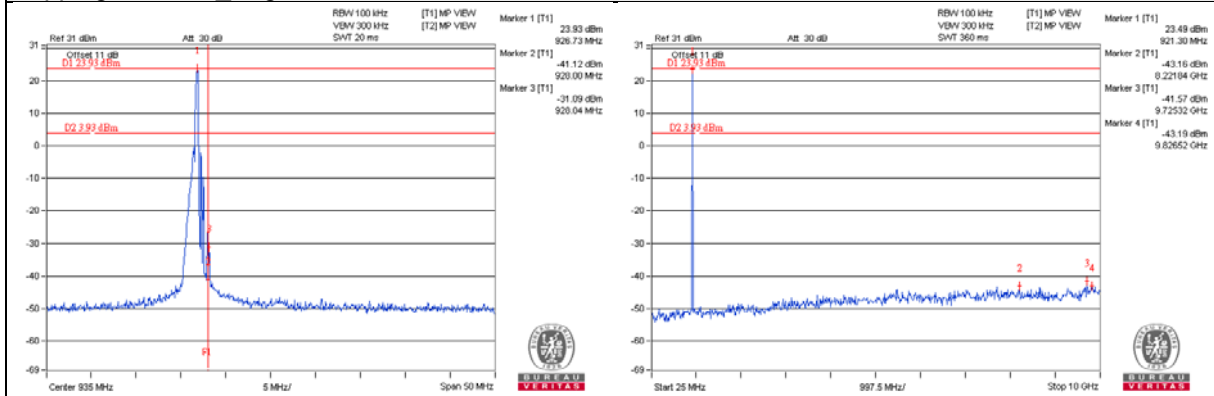

### Hopping enabled

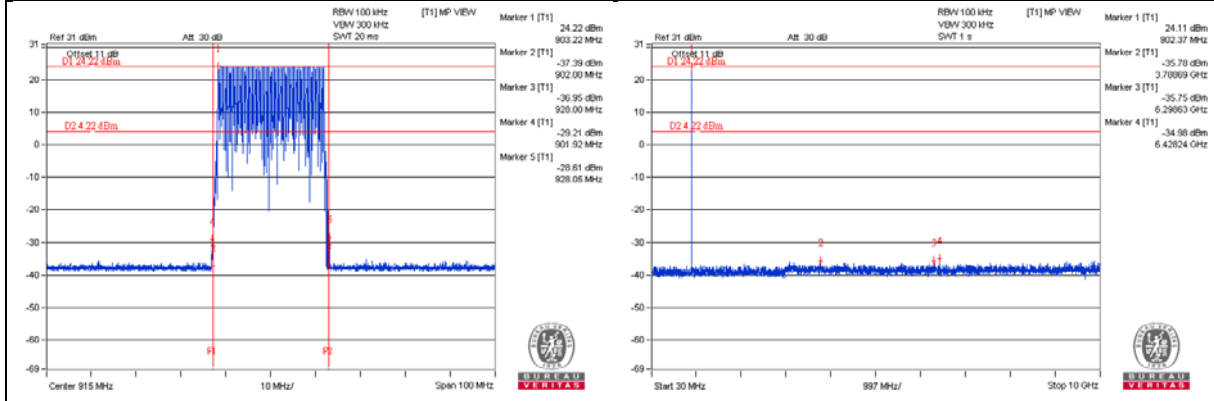

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

--- END ---