

# **FCC RADIO TEST REPORT**

according to

47 CFR FCC Part 15 Subpart C § 15.225

**Equipment** : **Terminal**  
**Brand Name** : **CIPHERLAB**  
**Model No.** : **8300**  
**Filing Type** : **New Application**  
**Applicant** : **CIPHERLAB CO.,LTD**  
12F, 333, Dunhua S.Rd., Sec.2, Taipei, Taiwan  
**FCC ID** : **Q3N-8300WR1**  
**Manufacturer** : **CIPHERLAB CO.,LTD**  
12F, 333, Dunhua S.Rd., Sec.2, Taipei, Taiwan  
**Test Freq. Range** : **13.553 ~ 13.567MHz**  
**Receive Date** : **Sep. 14, 2006**  
**Test Date** : **Sep. 22, 2006**

## Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C** .

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Lab Code: 200079-0

***SPORTON International Inc.***

*6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.*

**Table of Contents**

**1. SUMMARY OF THE TEST RESULT ..... 2**

**2. GENERAL INFORMATION..... 3**

2.1. Product Details ..... 3

2.2. Table for Carrier Frequencies ..... 3

2.3. Table for Filed Antenna ..... 3

2.4. Table for Test Modes ..... 3

2.5. Table for Testing Locations ..... 3

2.6. Table for Supporting Units..... 4

2.7. Test Configurations ..... 4

**3. TEST RESULT ..... 6**

3.1. AC Power Line Conducted Emissions Measurement..... 6

3.2. Field Strength of Fundamental Emissions Measurement..... 10

3.3. 20dB Spectrum Bandwidth Measurement..... 13

3.4. Radiated Emissions Measurement..... 15

3.5. Band Edge Emissions Measurement ..... 21

3.6. Frequency Stability Measurement..... 22

3.7. Antenna Requirements..... 24

**4. LIST OF MEASURING EQUIPMENTS ..... 25**

**5. TEST LOCATION..... 26**

**6. NVLAP CERTIFICATE OF ACCREDITATION..... 27**

**APPENDIX A. TEST PHOTOS ..... A1 ~ A6**

**APPENDIX B. PHOTOGRAPHS OF EUT ..... B1 ~ B32**

**APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE..... C1 ~ C3**

**APPENDIX D. COLLOCATION REPORT ..... D1 ~ D24**



## CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart C § 15.225

Equipment : Terminal  
Model No. : 8300  
Brand Name : CIPHERLAB  
Applicant : CIPHERLAB CO.,LTD  
12F, 333, Dunhua S.Rd., Sec.2, Taipei, Taiwan

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Sep. 14, 2006 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Wayne Hsu

**SPORTON International Inc.**

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Page No. : 1 of 27

Issued Date : May 2, 2007

FCC ID : Q3N-8300WR1

6F, No.106, Sec.1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C. TEL:886-2-26962468 FAX:886-2-26962255

**1. SUMMARY OF THE TEST RESULT**

<b>Applied Standard: 47 CFR FCC Part 15 Subpart C</b>				
<b>Part</b>	<b>Rule Section</b>	<b>Description of Test</b>	<b>Result</b>	<b>Under Limit</b>
3.1	15.207	AC Power Line Conducted Emissions	Complies	11.01 dB
3.2	15.225(a)	Field Strength of Fundamental Emissions	Complies	66.96 dB
3.3	15.215(c)	20dB Spectrum Bandwidth	Complies	-
3.4	15.225(d)	Radiated Emissions	Complies	6.03 dB
3.5	15.225(d)	Band Edge Emissions	Complies	30.51 dB
3.6	15.225(e)	Frequency Stability	Complies	-
3.7	15.203	Antenna Requirements	Complies	-

<b>Test Items</b>	<b>Uncertainty</b>	<b>Remark</b>
AC Power Line Conducted Emissions	±2.26dB	Confidence levels of 95%
Field Strength of Fundamental Emissions	±0.754dB	Confidence levels of 95%
20dB Spectrum Bandwidth / Frequency Stability	±1.64×10 <sup>-6</sup>	Confidence levels of 95%
Radiated / Band Edge Emissions (9kHz~30MHz)	±0.754dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.89dB	Confidence levels of 95%
Temperature	±0.7	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±0.04%	Confidence levels of 95%

**2. GENERAL INFORMATION**

**2.1. Product Details**

EUT is a Terminal with 802.11bg and RFID radio functions. Only the radio detail of RFID is shown in the table below. For more detailed features description, please refer to the manufacturer’s specifications or user’s manual.

Items	Description
Power Type	5V DC from adapter ; 3.7V DC from battery
Modulation	ASK
Channel Number	1
Channel Band Width (99%)	8.72 kHz
Max. Field Strength	57.04 dBuV/m at 3m (QP)
Carrier Frequencies	13.56 MHz (CH 1)
Antenna Type	Only RFID radio functions use Loop Antenna. WLAN + RFID radio functions use Chip and Loop antenna.

**2.2. Table for Carrier Frequencies**

Frequency Band	Channel No.	Frequency
13.553 ~ 13.567MHz	1	13.56 MHz

**2.3. Table for Filed Antenna**

Ant.	Antenna Type	Connector	Gain (dBi)	Remark
1	Chip Antenna	NA	3.00	WLAN

Note: WLAN functions use Chip antenna.

**2.4. Table for Test Modes**

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel
AC Power Line Conducted Emissions	WLAN+ RFID+ Scanner Mode	-
Field Strength of Fundamental Emissions	CTX	1
20dB Spectrum Bandwidth	CTX	1
Radiated Emissions 9kHz~1GHz	CTX / CCD (39keys keypad) WLAN+ RFID+ Charging Mode	1
Band Edge Emissions	CTX	1
Frequency Stability	Un-modulation	1

Note: 1. CTX=continuously transmitting

2. During radiated and band edge emissions test, WLAN+RFID is turned on to evaluated the collocation effect (refer to Appendix D)

**2.5. Table for Testing Locations**

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-


Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

**2.6. Table for Supporting Units**


Support Unit	Brand	Model	FCC ID
Notebook	DELL	PPT	DoC
Notebook	DELL	PP01L	DoC
Mouse	Microsoft	1004	DoC

**2.7. Test Configurations**

**2.7.1. Radiation Emissions Test Configuration**

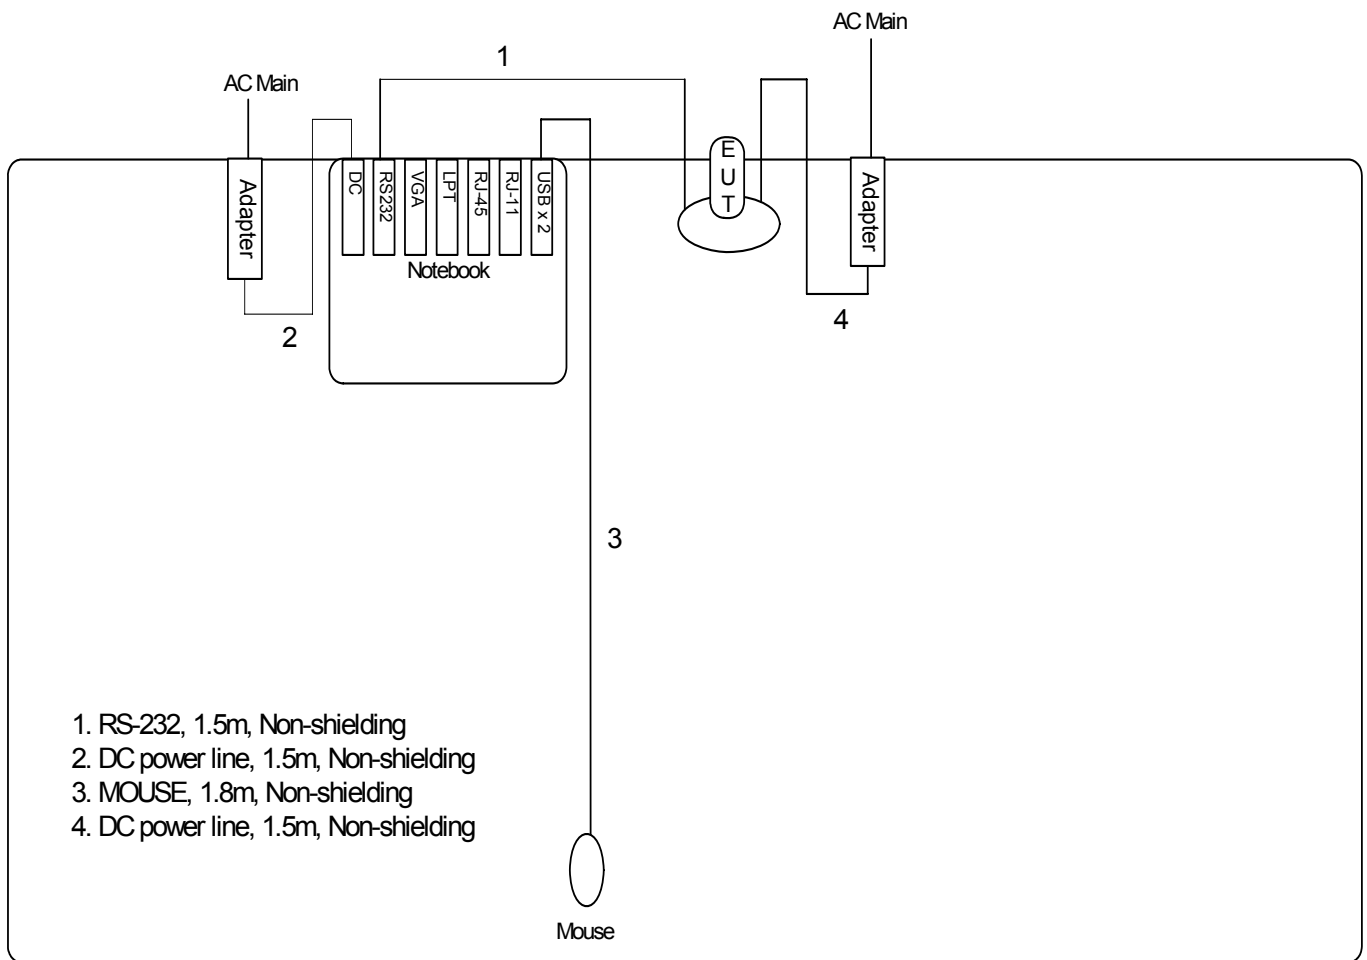

**2.7.2. AC Power Line Conduction Emissions Test Configuration**

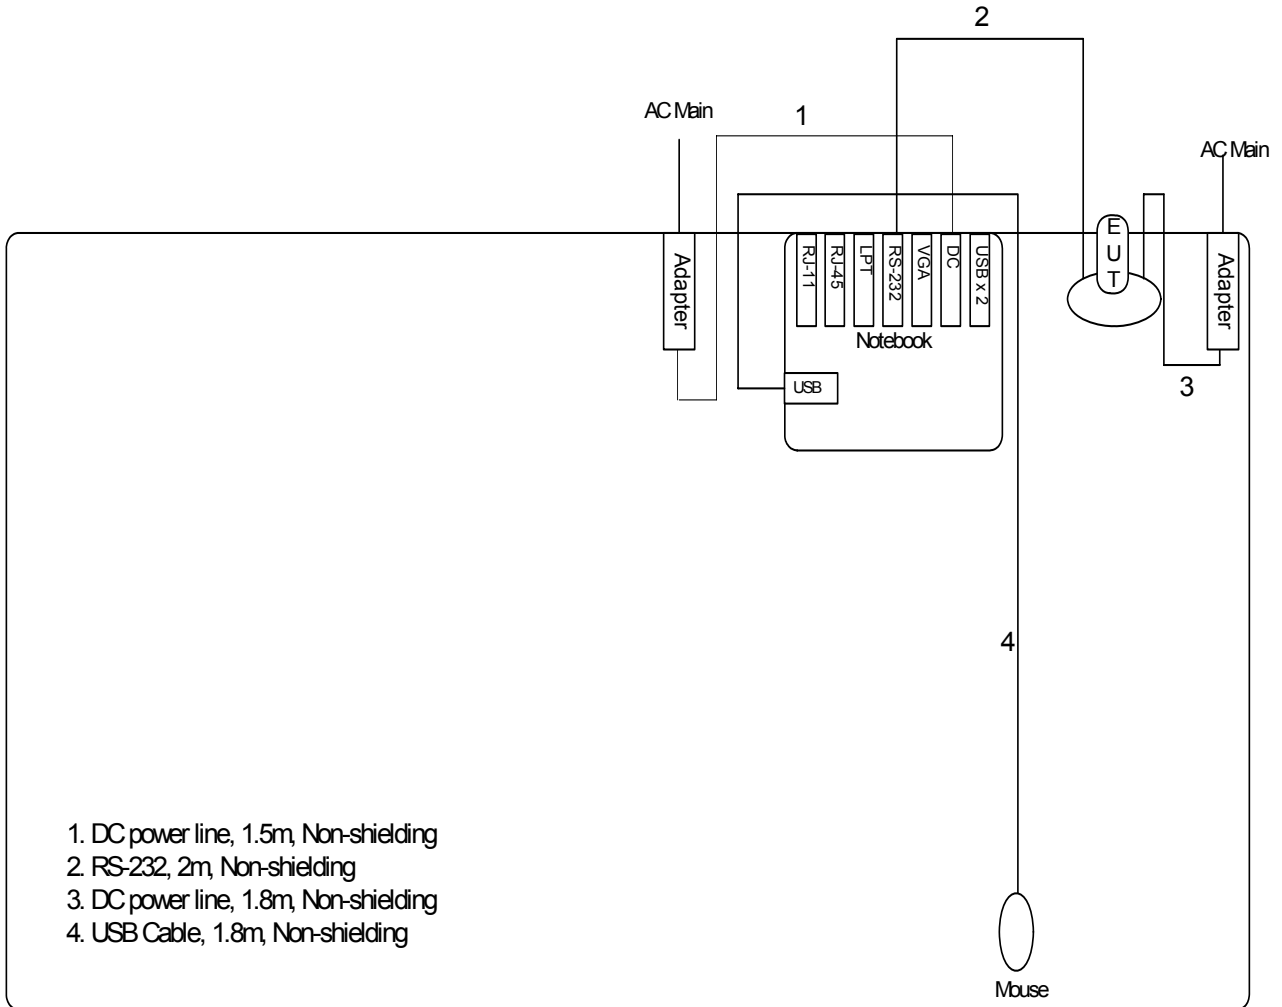



**3. TEST RESULT**

**3.1. AC Power Line Conducted Emissions Measurement**

**3.1.1. Limit**

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

**3.1.2. Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

**3.1.3. Test Procedures**

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

3.1.4. Test Setup Layout

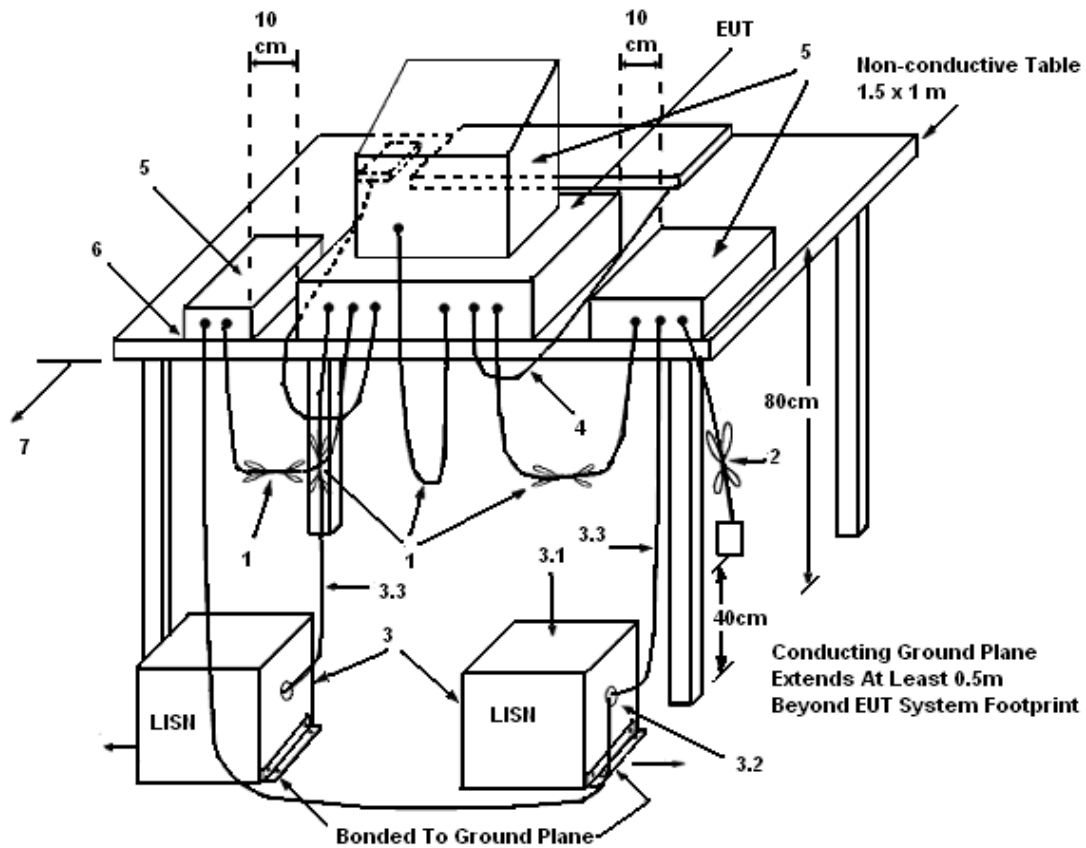

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

**3.1.5. Test Deviation**


There is no deviation with the original standard.

**3.1.6. EUT Operation during Test**

The EUT was placed on the test table and programmed in normal function.


**3.1.7. Results of AC Power Line Conducted Emissions Measurement**

<b>Temperature</b>	27	<b>Humidity</b>	45%
<b>Test Engineer</b>	Ted Chiu	<b>Phase</b>	Line
<b>Configuration</b>	WLAN+ RFID+ Scanner Mode		

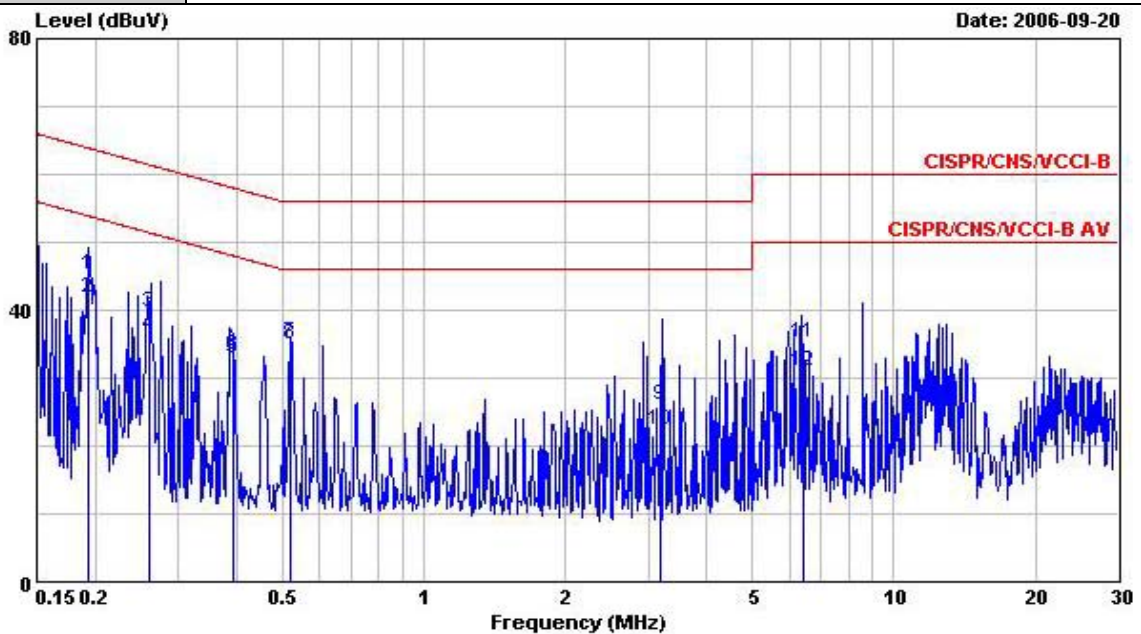

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1934380	45.30	-18.59	63.89	45.16	0.10	0.04	QP
2	0.1934380	41.83	-12.06	53.89	41.69	0.10	0.04	Average
3	0.2605110	39.66	-21.76	61.42	39.49	0.10	0.07	QP
4	0.2605110	36.20	-15.22	51.42	36.03	0.10	0.07	Average
5	0.3910560	33.00	-25.04	58.04	32.79	0.10	0.11	QP
6	0.3910560	33.35	-14.69	48.04	33.14	0.10	0.11	Average
7	0.5220620	35.31	-20.69	56.00	34.93	0.10	0.28	QP
8	0.5220620	34.99	-11.01	46.00	34.61	0.10	0.28	Average
9	3.195	25.96	-30.04	56.00	25.53	0.10	0.33	QP
10	3.195	22.42	-23.58	46.00	21.99	0.10	0.33	Average
11	6.390	35.14	-24.86	60.00	34.49	0.15	0.50	QP
12	6.390	30.94	-19.06	50.00	30.29	0.15	0.50	Average

Temperature	27	Humidity	45%
Test Engineer	Ted Chiu	Phase	Neutral
Configuration	WLAN+ RFID+ Scanner Mode		

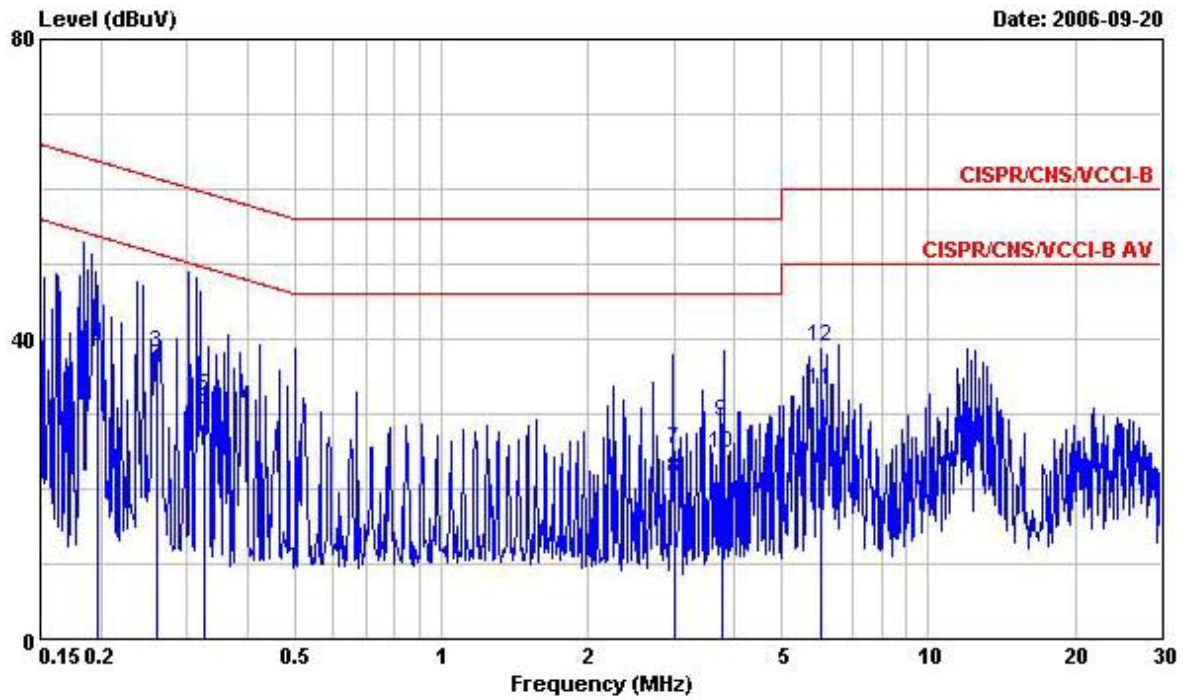

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1969900	42.31	-21.43	63.74	42.17	0.10	0.04	QP
2	0.1969900	39.04	-14.70	53.74	38.90	0.10	0.04	Average
3	0.2606250	38.08	-23.33	61.41	37.91	0.10	0.07	QP
4	0.2606250	35.70	-15.71	51.41	35.53	0.10	0.07	Average
5	0.3260250	32.40	-27.15	59.55	32.21	0.10	0.09	QP
6	0.3260250	30.58	-18.97	49.55	30.39	0.10	0.09	Average
7	3.003	25.18	-30.82	56.00	24.70	0.16	0.32	QP
8	3.003	21.44	-24.56	46.00	20.96	0.16	0.32	Average
9	3.785	28.89	-27.11	56.00	28.32	0.19	0.38	QP
10	3.785	24.84	-21.16	46.00	24.27	0.19	0.38	Average
11	6.002	33.21	-16.79	50.00	32.48	0.24	0.49	Average
12	6.002	39.05	-20.95	60.00	38.32	0.24	0.49	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

**3.2. Field Strength of Fundamental Emissions Measurement**

**3.2.1. Limit**

The field strength of any emissions within this band shall not exceed 15848 microvolts/meter at 30 meters. The emissions limit in this paragraph is based on measurement instrumentation employing an QP detector.

Frequency Band (MHz)	Fundamental Emissions Limit (dBuV/m) at 3m
13.553 ~ 13.567MHz	124 (QP)

Mask limit:

Rules and specifications	CFR 47 Part 15 section 15.225(a)-(d)			
Description	Compliance with the spectrum mask is tested using a spectrum analyzer with RB set to a 1kHz for the band 13.553~13.567MHz			
Limit	Freq. of Emission (MHz)	Field Strength (uV/m) at 30m	Field Strength (dBuV/m) at 30m	Field Strength (dBuV/m) at 3m
	1.705~13.110	30	29.5	69.5
	13.110~13.410	106	40.5	80.5
	13.410~13.553	334	50.5	90.5
	13.553~13.567	15848	84.0	124.0
	13.567~13.710	334	50.5	90.5
	13.710~14.010	106	40.5	80.5
14.010~30.000	30	29.5	69.5	

**3.2.2. Measuring Instruments and Setting**

Please refer to section 4 of equipments list in this report. The following table is the setting of the power meter.


Receiver Parameter	Setting
Attenuation	Auto
Center Frequency	Fundamental Frequency
RB	9 kHz
Detector	QP

**3.2.3. Test Procedures**

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.

- 5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

**3.2.4. Test Setup Layout**

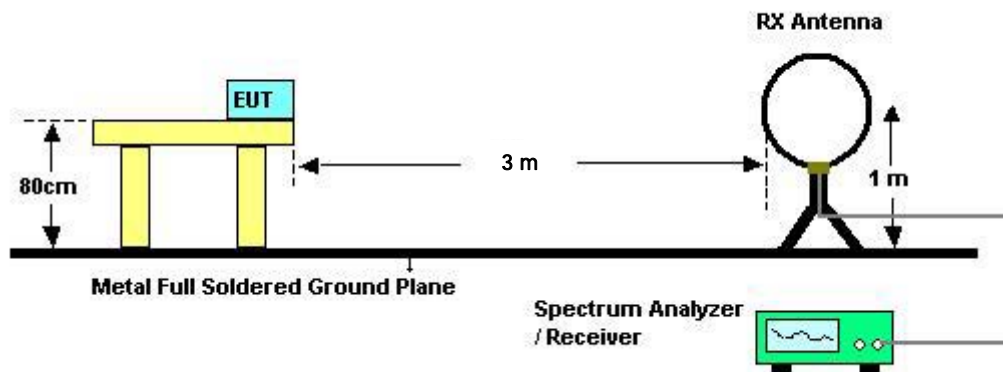

**3.2.5. Test Deviation**

There is no deviation with the original standard.

**3.2.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

3.2.7. Test Result of Field Strength of Fundamental Emissions

Temperature	27	Humidity	51%
Test Engineer	Vic Hsiao	Configurations	Channel 1

Carrier Output Level

Freq. (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m) at 3m	Remark
13.56 MHz	57.04	-66.96	124	QP

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.2.8. Test Result of Mask

Temperature	27	Humidity	51%
Test Engineer	Vic Hsiao	Configurations	Channel 1

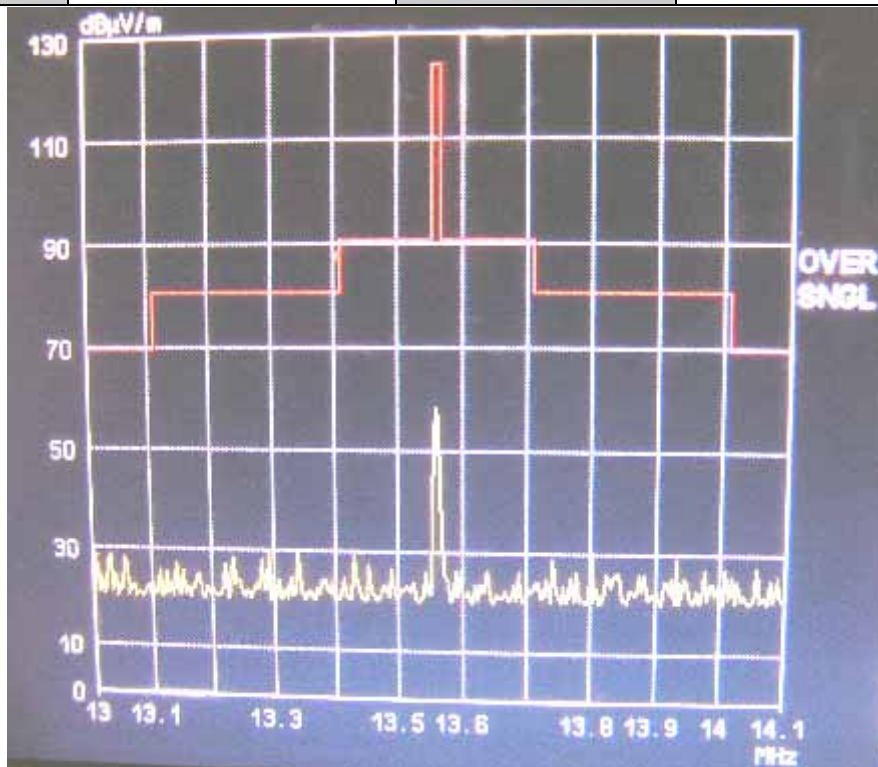

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

**3.3. 20dB Spectrum Bandwidth Measurement**

**3.3.1. Limit**

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (13.553 ~ 13.567MHz).

**3.3.2. Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 20dB Bandwidth
RB	1 kHz
VB	1 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

**3.3.3. Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 1 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.

**3.3.4. Test Setup Layout**

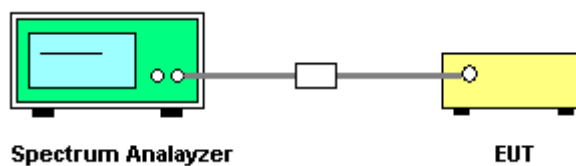

**3.3.5. Test Deviation**

There is no deviation with the original standard.

**3.3.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.




3.3.7. Test Result of 20dB Spectrum Bandwidth

Temperature	25	Humidity	58%
Test Engineer	Sam Lee	Configurations	Channel 1

Frequency	20dB BW (kHz)	99% OBW (kHz)	Frequency range (MHz) $f_L > 13.553$ MHz	Frequency range (MHz) $f_H < 13.567$ MHz	Test Result
13.56 MHz	4.56	8.72	13.5572	13.5618	Complies

20 dB/99% Bandwidth Plot on 13.56 MHz

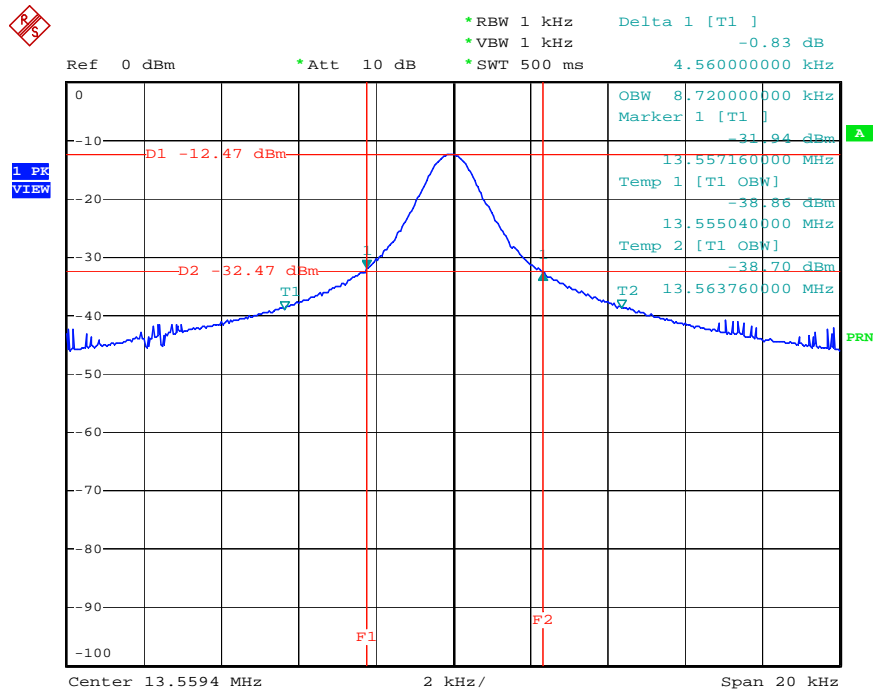

Date: 22.SEP.2006 10:05:27

**3.4. Radiated Emissions Measurement**

**3.4.1. Limit**

The field strength of any emissions which appear outside of 13.553 ~ 13.567MHz band shall not exceed the general radiated emissions limits in Section 15.209(a)

<b>Frequencies (MHz)</b>	<b>Field Strength (micorvolts/meter)</b>	<b>Measurement Distance (meters)</b>
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**3.4.2. Measuring Instruments and Setting**

Please refer to section 4 of equipments list in this report. The following table is the setting of receiver.

<b>Receiver Parameter</b>	<b>Setting</b>
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

**3.4.3. Test Procedures**


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1

seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.


- 7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

**3.4.4. Test Setup Layout**

**For radiated emissions below 30MHz**

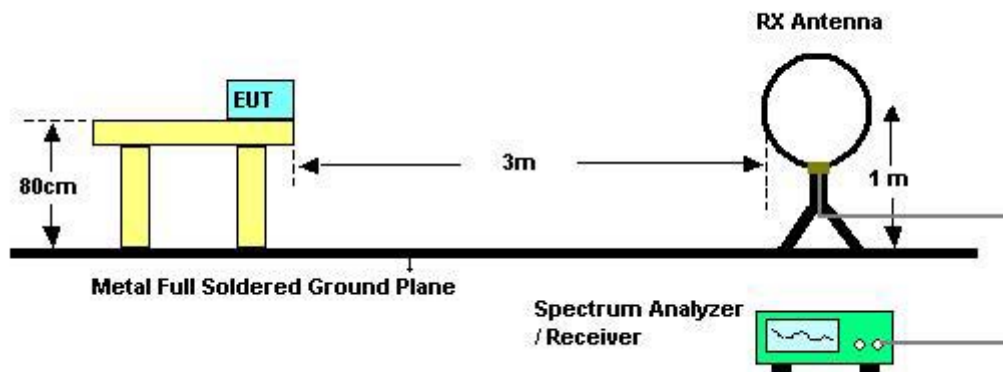

**For radiated emissions above 30MHz**

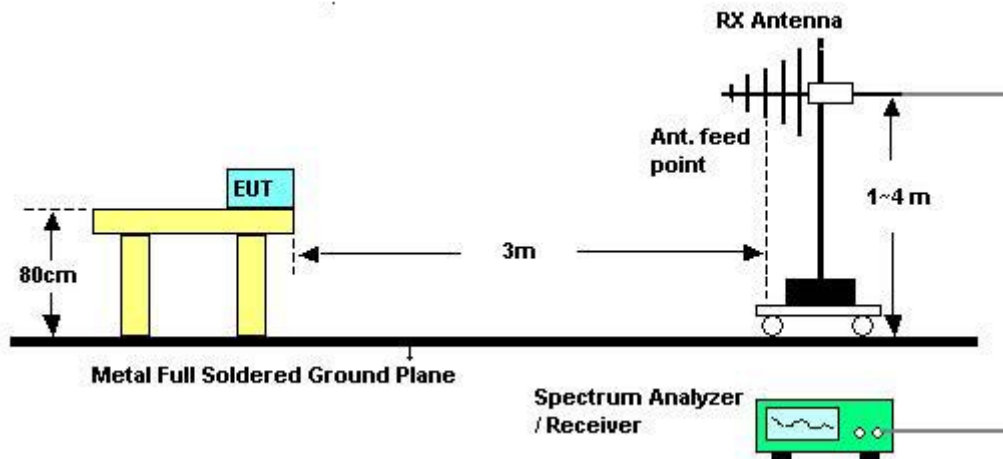

**3.4.5. Test Deviation**


There is no deviation with the original standard.

3.4.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.4.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	28	Humidity	61%
Test Engineer	Kay	Configurations	Channel 1

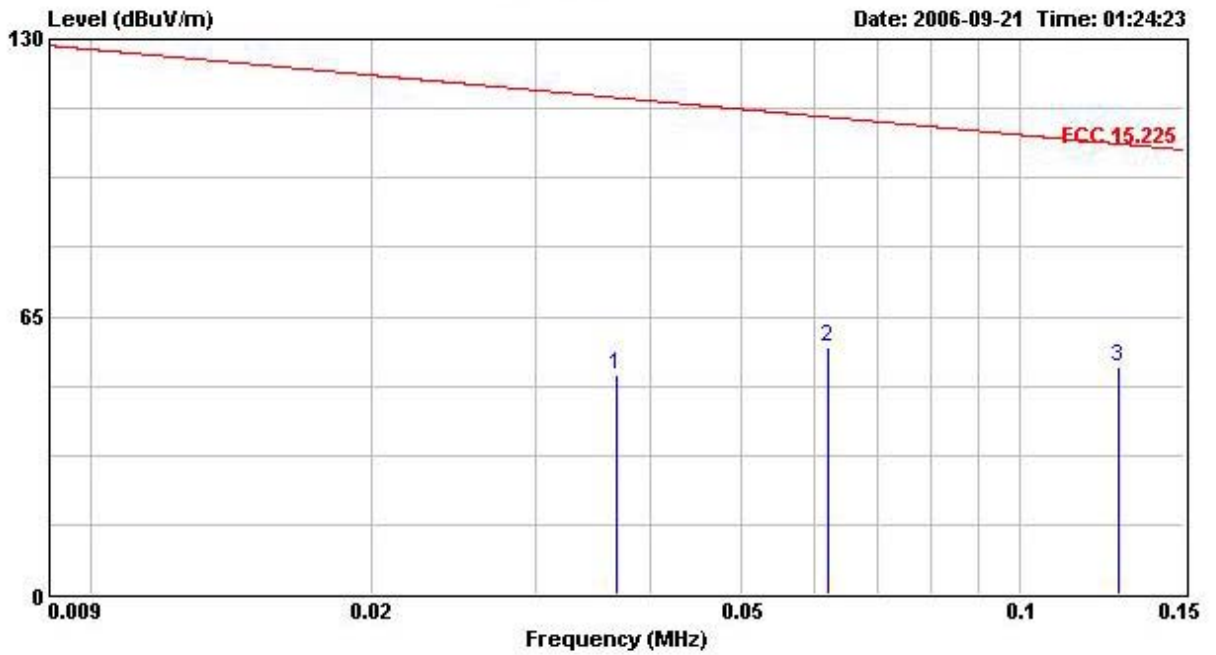

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	
1 @0.0367770	51.49	-64.81	116.30	51.49	0.00	0.00	QP
2 @0.0620160	57.75	-54.01	111.76	57.75	0.00	0.00	QP
3 @0.1274400	53.19	-52.31	105.50	53.19	0.00	0.00	QP

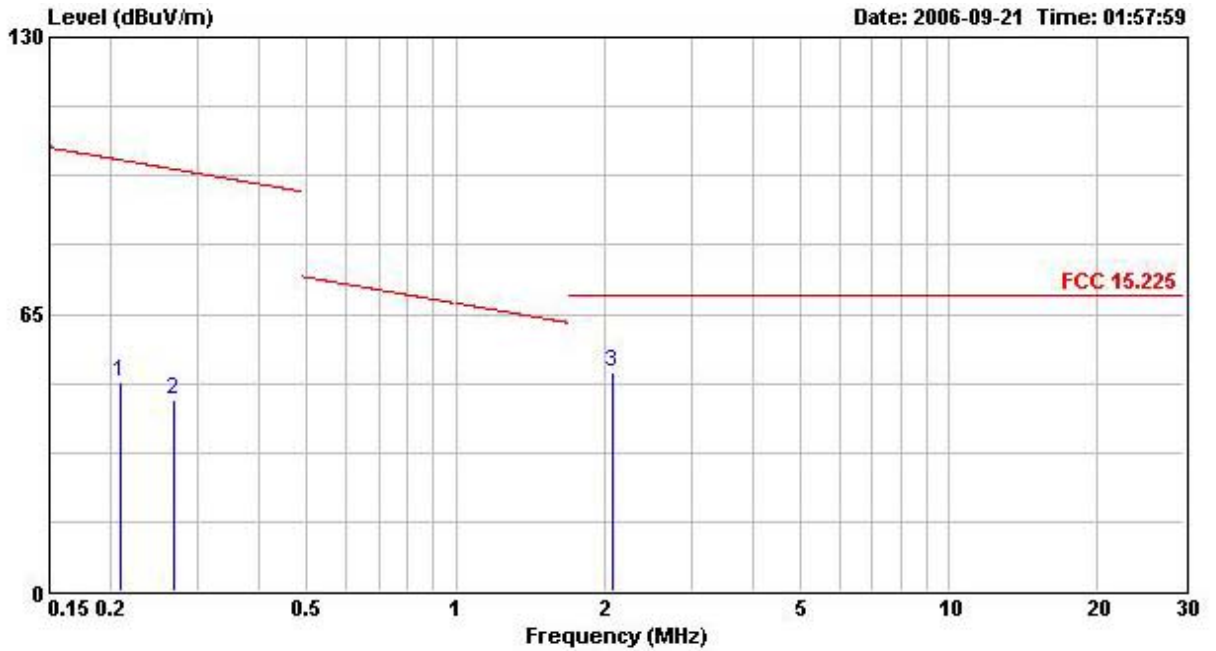

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Remark
MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	
1 @ 0.2097000	49.03	-52.14	101.17	49.03	0.00	0.00	QP
2 @ 0.2694000	45.10	-53.90	99.00	45.10	0.00	0.00	QP
3 @ 2.090	51.38	-18.16	69.54	51.38	0.00	0.00	QP

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBUV) + distance extrapolation factor.

3.4.8. Results for Radiated Emissions (30MHz~1GHz)


Temperature	27	Humidity	51%
Test Engineer	Vic Hsiao	Configurations	CCD (39keys keypad) WLAN+ RFID+ Charging Mode / Channel 1

Horizontal

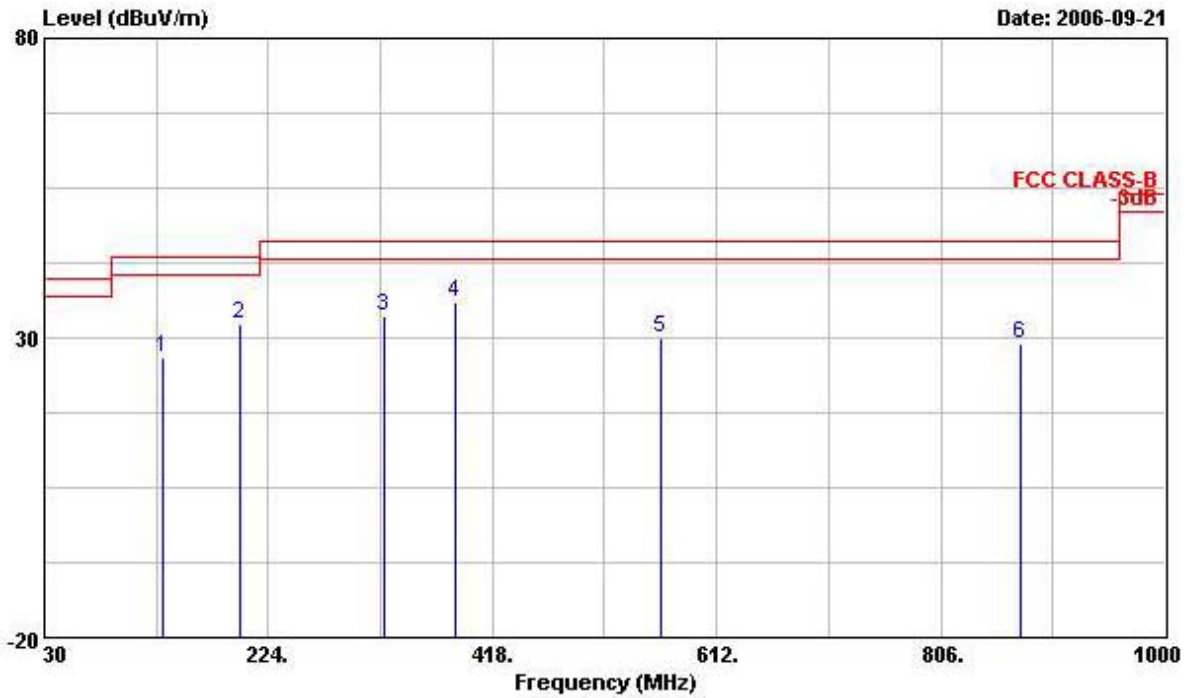

	Freq	Level	Over Limit	Limit Line	Read&Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB/m	dB	dB	
1	132.820	26.75	-16.75	43.50	40.92	12.10	1.80	28.07	Peak
2	198.780	32.24	-11.26	43.50	48.49	9.61	2.30	28.16	Peak
3	323.910	33.54	-12.46	46.00	44.68	14.43	3.13	28.70	Peak
4 @	385.990	36.04	-9.96	46.00	45.77	15.98	3.35	29.06	Peak
5	563.500	29.93	-16.07	46.00	36.08	19.30	4.23	29.69	Peak
6	874.870	29.05	-16.95	46.00	32.46	20.94	5.46	29.81	Peak

Vertical

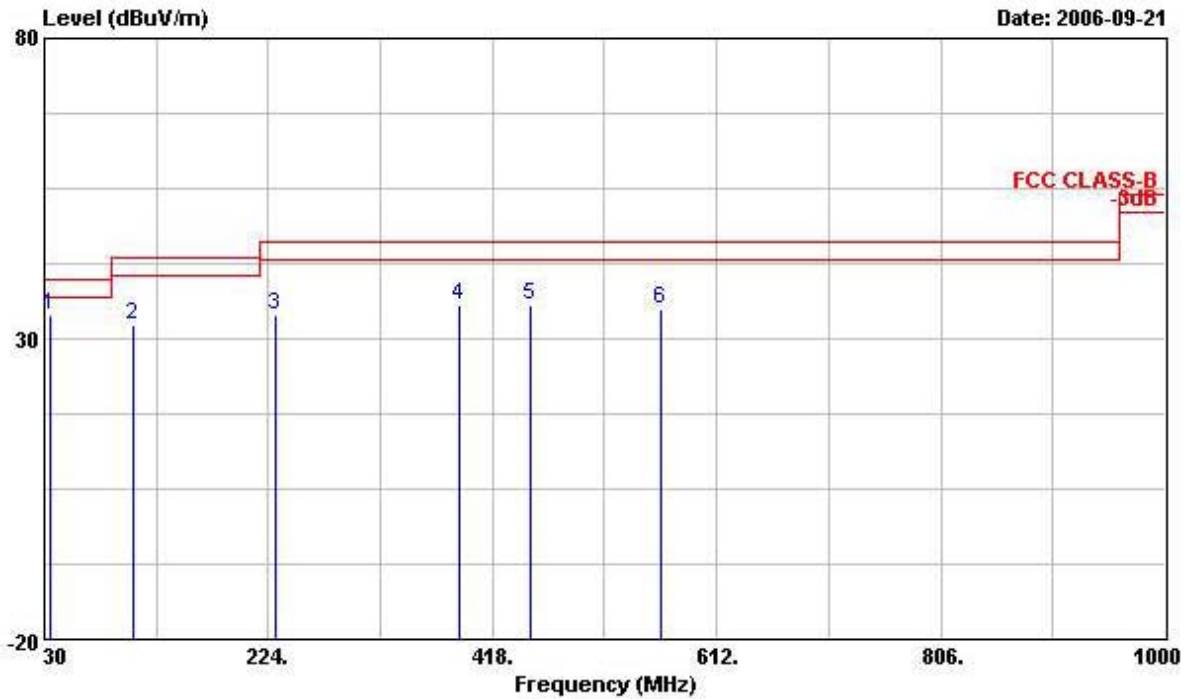

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	35.820	33.97	-6.03	40.00	46.33	14.94	0.50	27.80	Peak
2	106.630	32.39	-11.11	43.50	46.81	12.04	1.44	27.90	Peak
3	230.790	33.91	-12.09	46.00	49.33	10.48	2.47	28.36	Peak
4	388.900	35.74	-10.26	46.00	45.39	16.08	3.35	29.08	Peak
5	450.980	35.53	-10.47	46.00	44.02	17.13	3.66	29.28	Peak
6	563.500	34.99	-11.01	46.00	41.14	19.30	4.23	29.69	Peak

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

**3.5. Band Edge Emissions Measurement**

**3.5.1. Limit**

Band edge emissions outside of the frequency bands shown in below table.

Outside Frequency Band Edge	Limit (dBuV/m) at 3m
Low band edge	69.54 (QP)
High band edge	69.54 (QP)

**3.5.2. Measuring Instruments and Setting**

Please refer to section 4 in this report. The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	Auto
Center Frequency	Fundamental Frequency
RB	9 KHz
Detector	QP

**3.5.3. Test Procedures**

The test procedure is the same as section 3.2.3, only the frequency range investigated is limited to 2MHz around bandedges.

**3.5.4. Test Setup Layout**

This test setup layout is the same as that shown in section 3.2.4.

**3.5.5. Test Deviation**

There is no deviation with the original standard.

**3.5.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.5.7. Test Result of Band Edge Emissions**

<b>Temperature</b>	27	<b>Humidity</b>	51%
<b>Test Engineer</b>	Vic Hsiao	<b>Configurations</b>	Channel 1

**Channel 1**

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
13.500	38.17	-31.37	69.54	QP
13.590	39.03	-30.51	69.54	QP

Note:

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.



**3.6. Frequency Stability Measurement**

**3.6.1. Limit**

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

**3.6.2. Measuring Instruments and Setting**


Please refer to section 4 in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	1 kHz
VB	1 kHz
Sweep Time	Auto

**3.6.3. Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 1 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c-f)/f_c \times 10^6$  ppm and the limit is less than  $\pm 100$ ppm.
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is -20°C~50°C.

**3.6.4. Test Setup Layout**

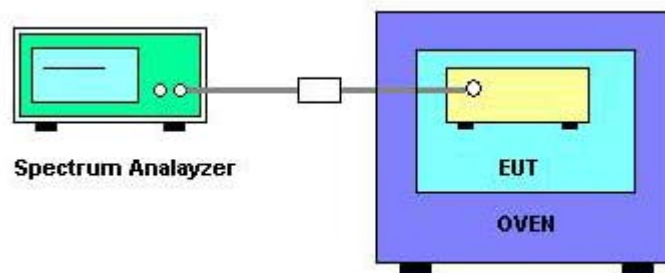

**3.6.5. Test Deviation**

There is no deviation with the original standard.

**3.6.6. EUT Operation during Test**

The EUT was programmed to be in continuously un-modulation transmitting mode.

**3.6.7. Test Result of Frequency Stability**

<b>Temperature</b>	25	<b>Humidity</b>	58%
<b>Test Engineer</b>	Sam Lee	<b>Configurations</b>	Channel 1

**Voltage vs. Frequency Stability**

<b>Voltage</b>	<b>Measurement Frequency (MHz)</b>
(V)	13.56 MHz
126.50	13.5597
110.00	13.5594
93.50	13.5591
Max. Deviation (MHz)	0.0009
Max. Deviation (ppm)	66.3717

**Temperature vs. Frequency Stability**

<b>Temperature</b>	<b>Measurement Frequency (MHz)</b>
( )	13.56 MHz
-30	13.5598
-20	13.5596
-10	13.5594
0	13.5592
10	13.5592
20	13.5594
30	13.5591
40	13.5589
50	13.5588
Max. Deviation (MHz)	0.0012
Max. Deviation (ppm)	88.4956

### **3.7. Antenna Requirements**

#### **3.7.1. Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

**4. LIST OF MEASURING EQUIPMENTS**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Feb. 22, 2006	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Dec. 19, 2005	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9708-1839	9kHz – 30MHz	Mar. 18, 2006	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2006	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 15, 2006	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	CPA9231A	18667	9 kHz - 2 GHz	Jan. 18, 2006	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	May 29, 2006	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004/040	9 kHz - 40 GHz	Sep. 30, 2005	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Jul. 24, 2006	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6903	1GHz ~ 18GHz	Mar. 15, 2006	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	NCR	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec.02, 2005	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec.02, 2005	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Nov. 26, 2005	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100764	DC ~ 40GHz	Jul, 20, 2006	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 40GHz	Jul. 20, 2006	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jun, 10, 2006	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Dec. 28, 2005	Conducted (TH01-HY)
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2005	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 30, 2005	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 30, 2005	Conducted (TH01-HY)
Oscilloscope	Tektronix	TDS1012	CO38515	100MHz / 1GS/s	Jun. 20, 2006	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Dec. 30, 2005	Conducted (TH01-HY)
Data Generator	Tektronix	DG2030	063-2920-50	0.1Hz~400MHz	Jun. 16, 2006	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year. NCR: Non-Calibration required.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	MITEQ	AMF-6F-260400	923364	26.5 GHz - 40 GHz	Jan. 24, 2006*	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2006*	Radiation (03CH03-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Apr. 21, 2005*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

## 5. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

6. NVLAP CERTIFICATE OF ACCREDITATION

United States Department of Commerce  
National Institute of Standards and Technology



**Certificate of Accreditation to ISO/IEC 17025:2005**

NVLAP LAB CODE: 200079-0

**Sporton International, Inc. Hwa Ya EMC Laboratory**  
Tao Yuan Hsien 333  
TAIWAN

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,  
listed on the Scope of Accreditation, for:*

**ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS**

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.  
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality  
management system (refer to joint ISO-ILAC-IAF Communique dated 18 June 2005).*

2007-01-01 through 2007-12-31  
Effective dates



*Sally J. Bruce*  
For the National Institute of Standards and Technology

NVLAP-01C (REV. 2006-09-13)