

WCDMA Band II

Frequency: 1852.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.454$ S/m; $\epsilon_r = 51.475$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE3 Sn360; Calibrated: 2013/01/30
- Probe: EX3DV4 - SN3665; ConvF(7.49, 7.49, 7.49); Calibrated: 2012/04/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150

Front Side/WCDMA BandII/CH9262/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.164 W/kg

Front Side/WCDMA BandII/CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.055 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.205 W/kg

SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.084 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.178 W/kg

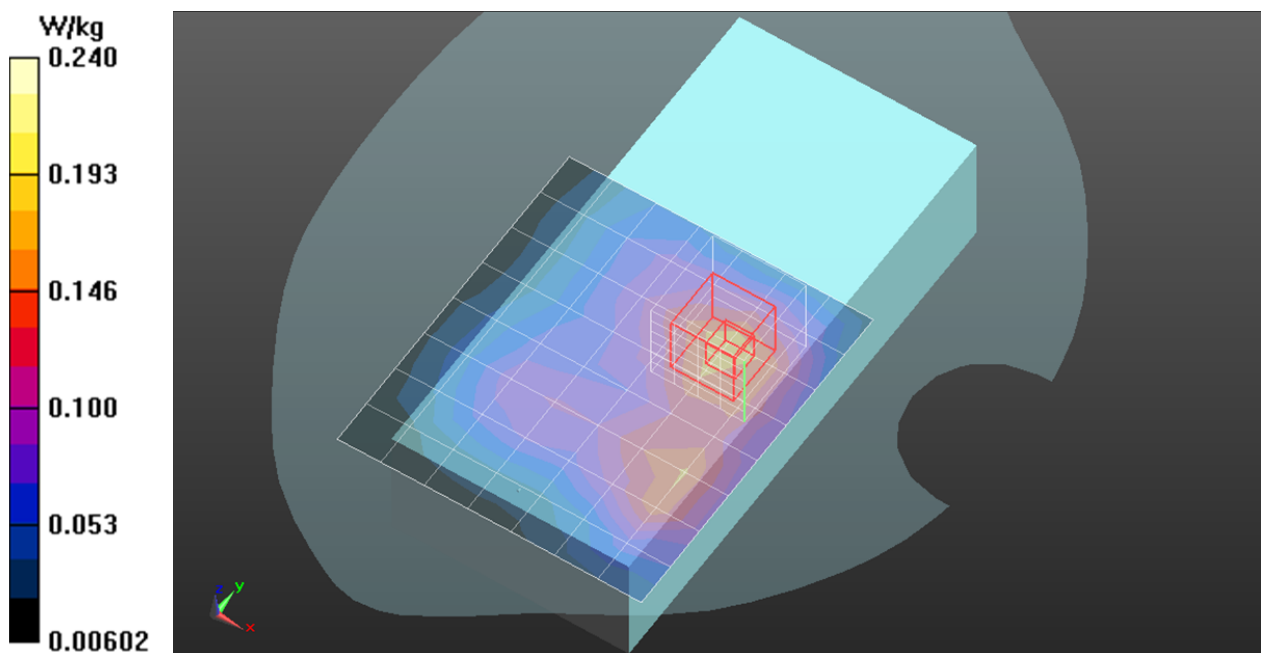

WCDMA Band II

Frequency: 1852.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.454$ S/m; $\epsilon_r = 51.475$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE3 Sn360; Calibrated: 2013/01/30
- Probe: EX3DV4 - SN3665; ConvF(7.49, 7.49, 7.49); Calibrated: 2012/04/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150

Rear Side/WCDMA BandII/CH9262/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.606 W/kg

Rear Side/WCDMA BandII/CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 5.624 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.807 W/kg

SAR(1 g) = 0.485 W/kg; SAR(10 g) = 0.277 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.695 W/kg

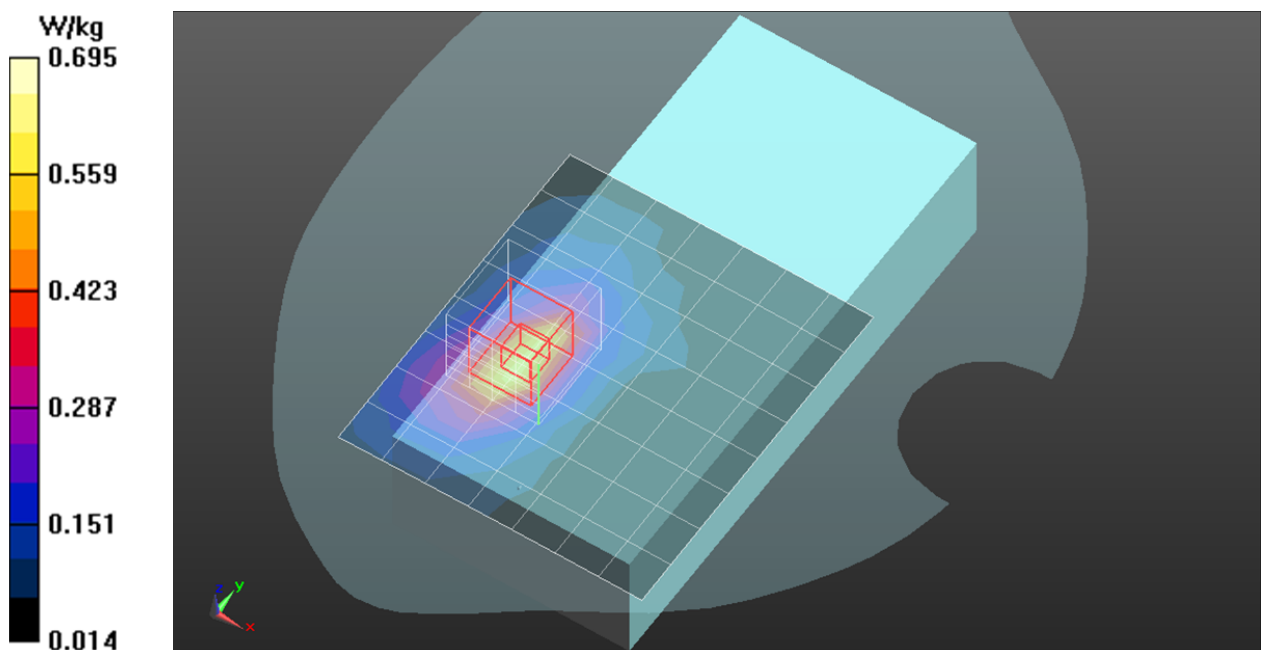


WCDMA Band II

Frequency: 1852.4 MHz; Duty Cycle: 1:1

Rear Side/WCDMA BandII/CH9262/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.465 W/kg

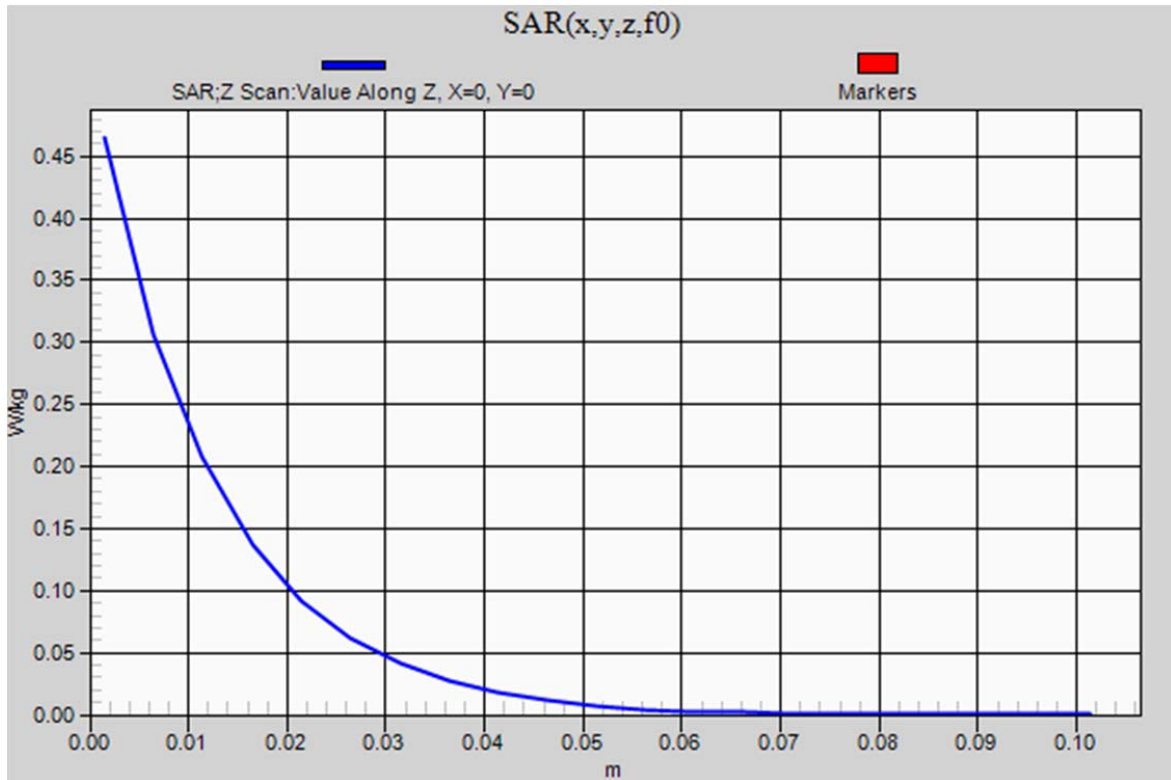

WCDMA Band II

Frequency: 1852.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.454$ S/m; $\epsilon_r = 51.475$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE3 Sn360; Calibrated: 2013/01/30
- Probe: EX3DV4 - SN3665; ConvF(7.49, 7.49, 7.49); Calibrated: 2012/04/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150

Rear Side/WCDMA BandII/CH9262 Thick/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.411 W/kg

Rear Side/WCDMA BandII/CH9262 Thick/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.572 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.836 W/kg

SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.095 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.340 W/kg

