

WCDMA Band V

Frequency: 826.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r = 53.496$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE3 Sn360; Calibrated: 2013/01/30
- Probe: EX3DV4 - SN3665; ConvF(9.69, 9.69, 9.69); Calibrated: 2012/04/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150

Front Side/WCDMA BandV/CH4132/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.323 W/kg

Front Side/WCDMA BandV/CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,

dy=8mm, dz=5mm


Reference Value = 14.494 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.368 W/kg

SAR(1 g) = 0.249 W/kg; SAR(10 g) = 0.171 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.320 W/kg

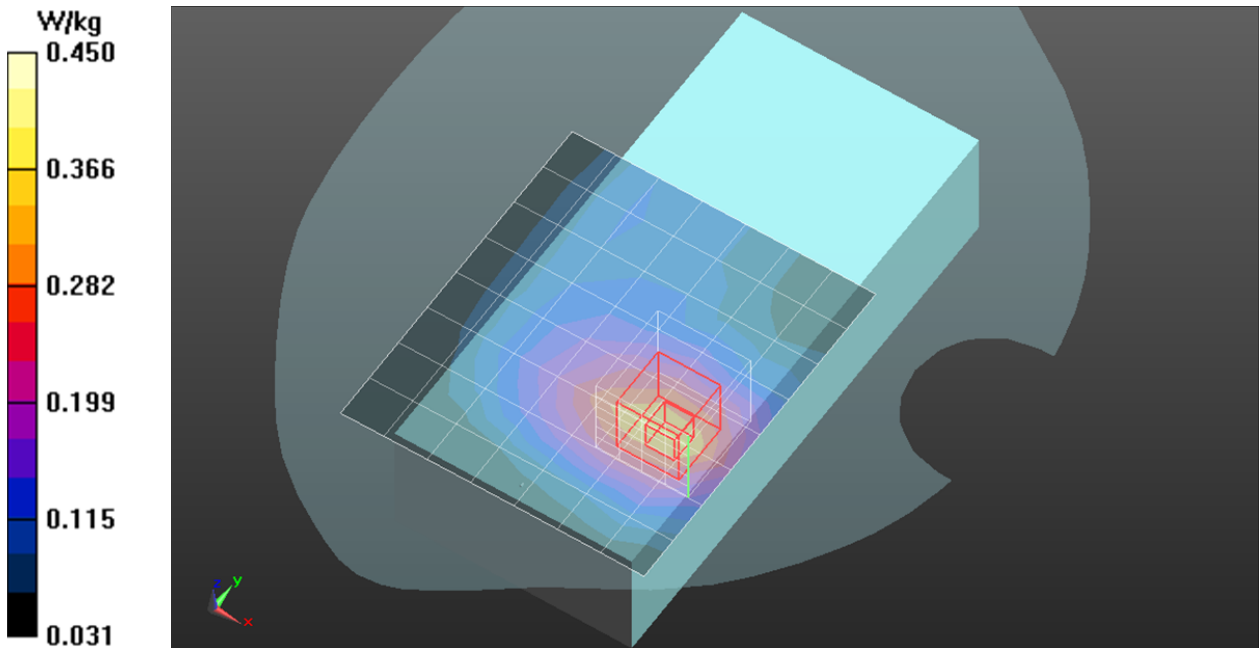

WCDMA Band V

Frequency: 826.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r = 53.496$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE3 Sn360; Calibrated: 2013/01/30
- Probe: EX3DV4 - SN3665; ConvF(9.69, 9.69, 9.69); Calibrated: 2012/04/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150

Rear Side/WCDMA BandV/CH4132/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.494 W/kg

Rear Side/WCDMA BandV/CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 14.494 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.597 W/kg

SAR(1 g) = 0.422 W/kg; SAR(10 g) = 0.293 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.532 W/kg

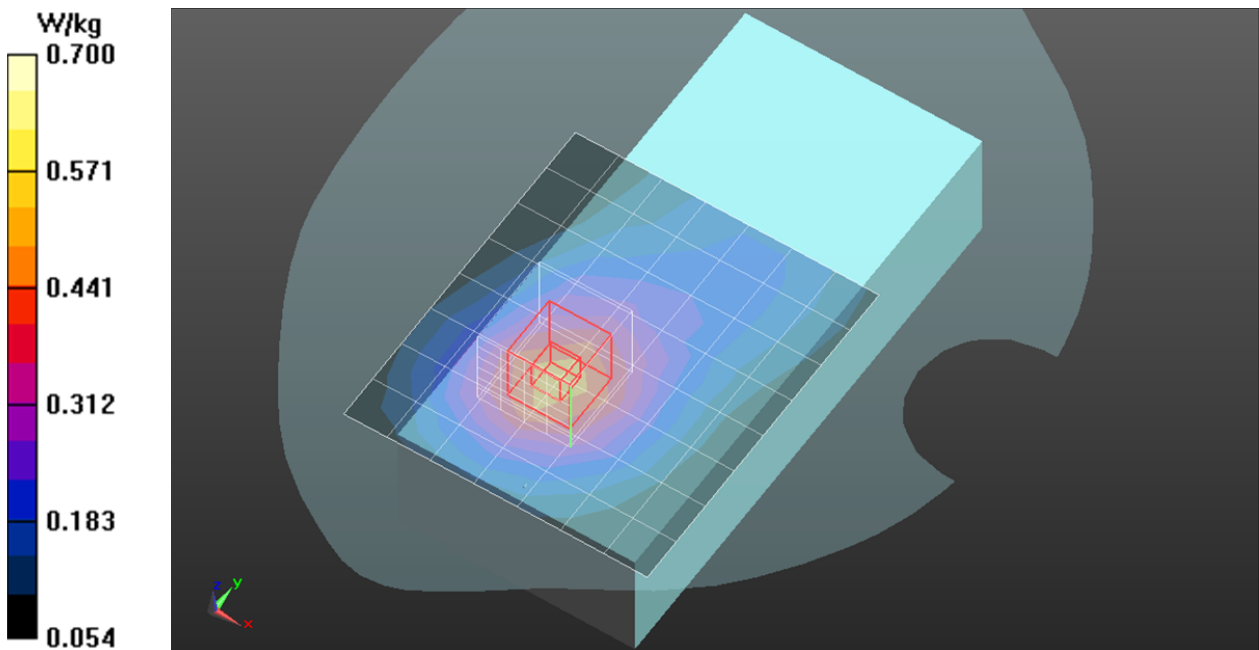


WCDMA Band V

Frequency: 826.4 MHz; Duty Cycle: 1:1

Rear Side/WCDMA BandV/CH4132/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.225 W/kg

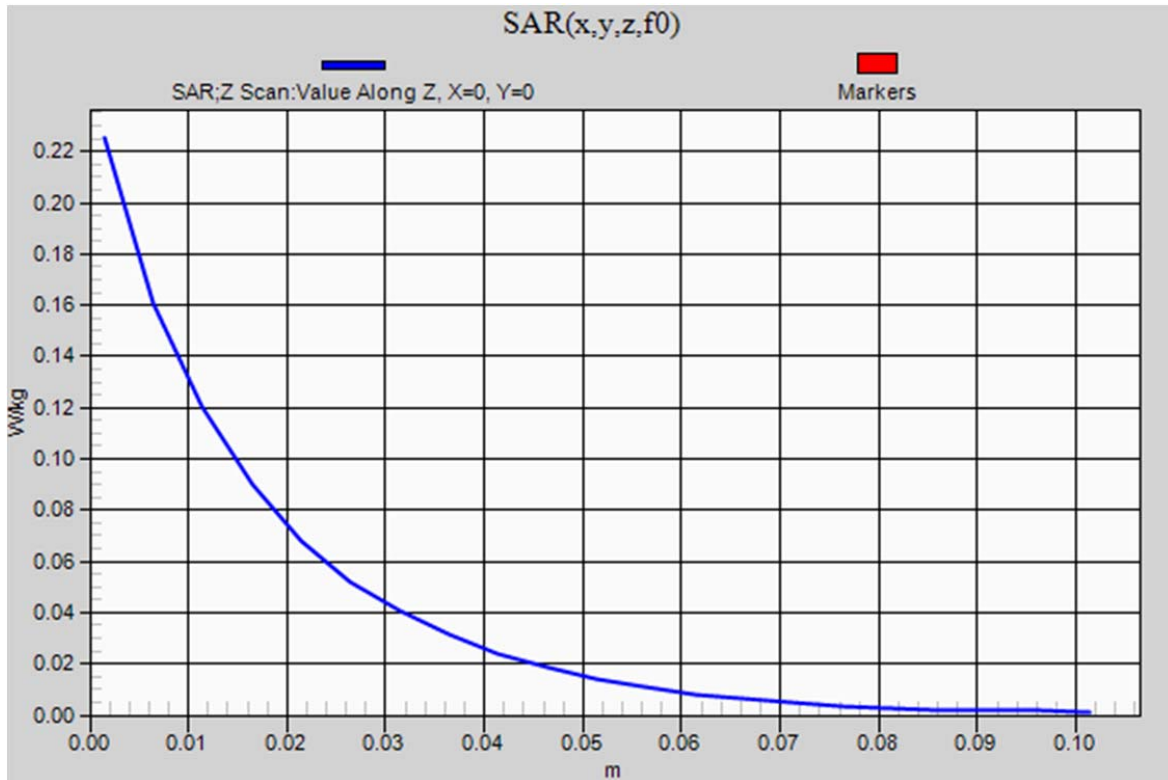

WCDMA Band V

Frequency: 826.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r = 53.496$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE3 Sn360; Calibrated: 2013/01/30
- Probe: EX3DV4 - SN3665; ConvF(9.69, 9.69, 9.69); Calibrated: 2012/04/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150

Rear Side/WCDMA BandV/CH4132 Thick/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.365 W/kg

Rear Side/WCDMA BandV/CH4132 Thick/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.661 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.413 W/kg

SAR(1 g) = 0.285 W/kg; SAR(10 g) = 0.202 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.367 W/kg

