



Test report No.: 2360754R-RFUSV07S-A

TEST REPORT

Product Name	Mobile Computer
Trademark	CIPHERLAB
Model and /or type reference	RK26
FCC ID	Q3N-RK26
Applicant's name / address	CipherLab Co., Ltd. 12F, 333, Dunhua S.Rd., Sec.2, Taipei, Taiwan
Manufacturer's name	CIPHERLAB CO. LTD.
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Verdict Summary	IN COMPLIANCE
Documented By (Senior Project Specialist / April Chen)	<i>April Chen</i>
Tested By (Senior Engineer / Ivan Chuang)	<i>Ivan Chuang</i>
Approved By (Senior Engineer / Alan Chen)	<i>Alan Chen</i>
Date of Receipt	2023/06/28
Date of Issue	2023/09/08
Report Version	V1.0

INDEX

	Page
1. General Information.....	5
1.1. EUT Description.....	5
1.2. Tested System Details.....	6
1.3. Configuration of tested System	6
1.4. EUT Exercise Software	6
1.5. Test Facility	7
1.6. List of Test Equipment.....	8
1.7. Uncertainty	9
2. Conducted Emission	10
2.1. Test Setup	10
2.2. Limits.....	10
2.3. Test Procedure	11
2.4. Test Result of Conducted Emission.....	12
3. Radiated Emission	13
3.1. Test Setup	13
3.2. Limits.....	14
3.3. Test Procedure	15
3.4. Test Result of Radiated Emission.....	16
4. Band Edge	19
4.1. Test Setup	19
4.2. Limits.....	19
4.3. Test Procedure	20
4.4. Test Result of Band Edge	21
5. Frequency Tolerance	22
5.1. Test Setup	22
5.2. Limits.....	22
5.3. Test Procedure	22
5.4. Test Result of Frequency Stability.....	23
6. 20dB Bandwidth	25
6.1. Test Setup	25
6.2. Limits.....	25
6.3. Test Procedure	25
6.4. Test Result of 20dB Bandwidth.....	26

Appendix 1: EUT Test Photographs

Appendix 2: Product Photos-Please refer to the file: 2360754R-Product Photos

Competences and Guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

General conditions

1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Revision History

Report No.	Version	Description	Issued Date
2360754R-RFUSV07S-A	V1.0	Initial issue of report.	2023/09/08

1. General Information

1.1. EUT Description

Product Name	Mobile Computer
Trademark	CIPHERLAB
Model and /or type reference	RK26
EUT Rated Voltage	AC 100-240V, 50-60Hz (Power by Adapter) or DC 3.85V (Power by Battery)
EUT Test Voltage	AC 120V/60Hz and DC 5V (Power by USB)
Frequency Range	13.56 MHz
Modulation	ASK
Power Cable (Optional)	Non-Shielded, 1.5m, with one ferrite core bonded.
Power Adapter #1 (Optional)	MFR: Sunny, M/N: SYS1561-1005 Input: AC 100-240V~, 1.0A MAX, 50-60Hz Output: +5.0V=2.0A, 10.0W MAX.
Power Adapter #2 (Optional)	MFR: CWT, M/N: 2AEA010BC3D Input: AC 100-240V~ 50-60Hz 0.35A Output: 5.0V=2.0A, 10.0W

Antenna List

No.	Manufacturer	Part No.	Antenna Type
1	auden	KZNF0FC260011	Coil

Note: The antenna gain as by the manufacturer provided, The antenna of EUT conforms to FCC 15.203.

Frequency of Each Channel:

Channel	Frequency (MHz)
1	13.56

Note:

1. This device is a Mobile Computer with a built-in 13.56 MHz transceiver.
2. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.225.
3. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

Test Mode	Mode 1	Transmit
-----------	--------	----------


1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Power Adapter	Sunny	SYS1561-1005	N/A
2	Notebook PC	DELL	P117F	8NJ1PL3

Cable Type	Cable Description
A	Power Cable
B	USB Cable

1.3. Configuration of tested System

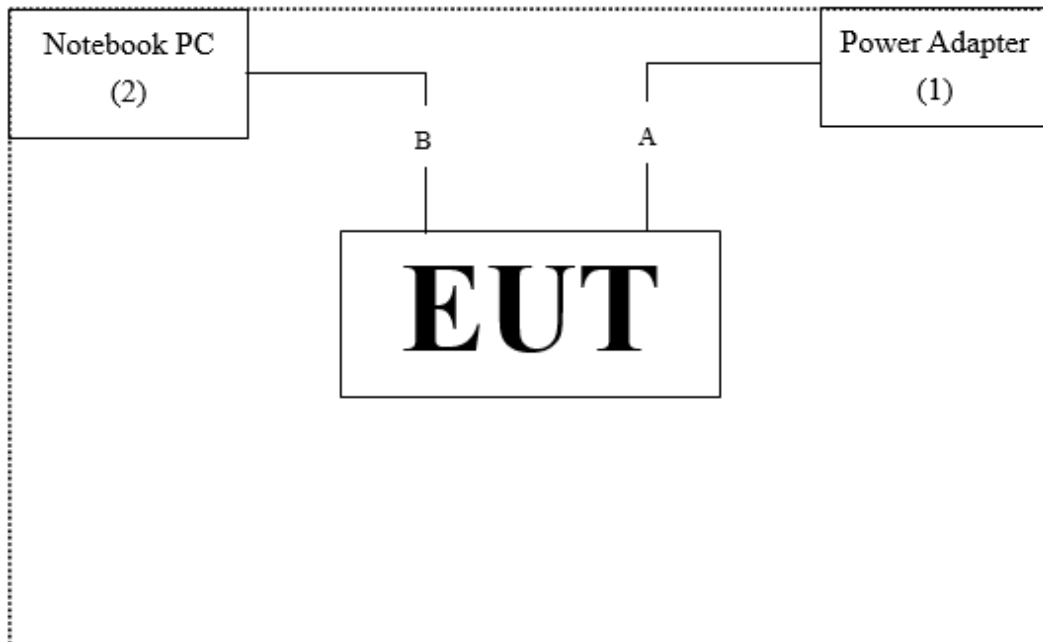

1.4. EUT Exercise Software

1	Setup the EUT as shown in Section 1.3.
2	Turn on NFC function.
3	Configure the test mode, the test channel.
4	Press “OK” to start the continuous transmit.
5	Verify that the EUT works properly.

1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	10~40 °C	26.7 °C
	Humidity (%RH)	10~90 %	57.0 %
Radiated Emission	Temperature (°C)	10~40 °C	22.0 °C
	Humidity (%RH)	10~90 %	60.0 %
Conductive	Temperature (°C)	10~40 °C	25.0 °C
	Humidity (%RH)	10~90 %	50.0 %

USA	FCC Registration Number: TW0033
Canada	CAB Identifier Number: TW3023 / Company Number: 26930

Site Description	Accredited by TAF
	Accredited Number: 3023

Test Laboratory	DEKRA Testing and Certification Co., Ltd.
	Linkou Laboratory
Address	No.5-22, Ruishukeng Linkou District, New Taipei City, 24451, Taiwan, R.O.C
Performed Location	No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan, R.O.C.
Phone Number	+886-3-275-7255
Fax Number	+886-3-327-8031

1.6. List of Test Equipment

For Conduction Measurements / HY-SR01

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	EMI Test Receiver	R&S	ESR7	101601	2023/06/20	2024/06/19
V	Two-Line V-Network	R&S	ENV216	101306	2023/03/16	2024/03/15
V	Two-Line V-Network	R&S	ENV216	101307	2023/08/17	2024/08/16
V	Coaxial Cable	SUHNER	RG400_BNC	RF001	2023/01/10	2024/01/09

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version: e3 230303 dekra V9.

For Conducted measurements / HY-SR03

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Temperature Chamber	KSON	THS-D4T-100	A0606	2023/08/10	2024/08/09
V	Dual Output Autoranging DC Power Supply	Keysight	E36234A	MY59001234	2022/10/31	2023/10/30
V	Spectrum Analyzer	R&S	FSV30	103466	2022/12/22	2023/12/21

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.

For Radiated Measurements /HY-CB01

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Loop Antenna	AMETEK	HLA6121	49611	2023/02/21	2024/02/20
V	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-0678	2021/09/23	2023/09/22
	Horn Antenna	RF SPIN	DRH18-E	210802A18ES	2023/03/23	2024/03/22
	Horn Antenna	Com-Power	AH-840	101101	2021/11/30	2023/11/29
V	Pre-Amplifier	SGH	0301	20211007-7	2023/01/10	2024/01/09
	Pre-Amplifier	EMCI	EMC051845SE	980632	2023/01/10	2024/01/09
	Pre-Amplifier	EMCI	EMC05820SE	980362	2023/01/10	2024/01/09
	Pre-Amplifier	EMCI	EMC184045SE	980369	2023/01/10	2024/01/09
	Coaxial Cable	EMCI	EMC102-KM-KM-600	1160314		
	Coaxial Cable	EMCI	EMC102-KM-KM-7000	170242		
	Filter	MICRO TRONICS	BRM50702	G251	2023/01/05	2024/01/04
	Filter	MICRO TRONICS	BRM50716	067	2023/01/05	2024/01/04
	WIFI 6E Filter	Marvelous Microwave Inc.	MFN-5925.7125.S1	C50001N	2023/01/05	2024/01/04
	Filter	MICRO TRONICS	HPM50110	G116	2023/01/05	2024/01/04
	Filter	MICRO TRONICS	HPM50115	G069	2023/01/05	2024/01/04
V	EMI Test Receiver	R&S	ESR3	102792	2022/12/29	2023/12/28
	Spectrum Analyzer	R&S	FSV3044	101115	2023/01/06	2024/01/05
V	Coaxial Cable	SUHNER	SUCOFLEX 106	25450/6	2023/01/10	2024/01/09
	Coaxial Cable	SGH	HA800	GD20110222-8		
	Coaxial Cable	SGH	SGH18	2021003-8		
	Coaxial Cable	EMCI	EMC106	151113		
	GNSS Signal Simulator	Spectracom	GSG-5	201550	2023/07/07	2024/07/06
	Bluetooth tester	R&S	CBT	101238	2023/02/14	2024/02/13
	Universal Radiocommunication tester	R&S	CMU200	113574	2023/07/07	2024/07/06
	Radio communication test station	Anritsu	MT8000A	6262134961	2023/05/30	2024/05/29

Note:

1. Bi-Log Antenna and Horn Antenna(AH-840) is calibrated every two years, the other equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version: e3 230303 dekra V9.

1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document.


The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty
Conducted Emission	± 3.50 dB
Radiated Emission	9 kHz~30 MHz: ± 3.88 dB 30 MHz~1 GHz: ± 4.42 dB 1 GHz~18 GHz: ± 4.28 dB 18 GHz~40 GHz: ± 3.90 dB
Band Edge	9 kHz~30 MHz: ± 3.88 dB 30 MHz~1 GHz: ± 4.42 dB 1 GHz~18 GHz: ± 4.28 dB 18 GHz~40 GHz: ± 3.90 dB
Frequency Tolerance	± 1580.61 Hz
20dB Bandwidth	± 1580.61 Hz

2. Conducted Emission

2.1. Test Setup

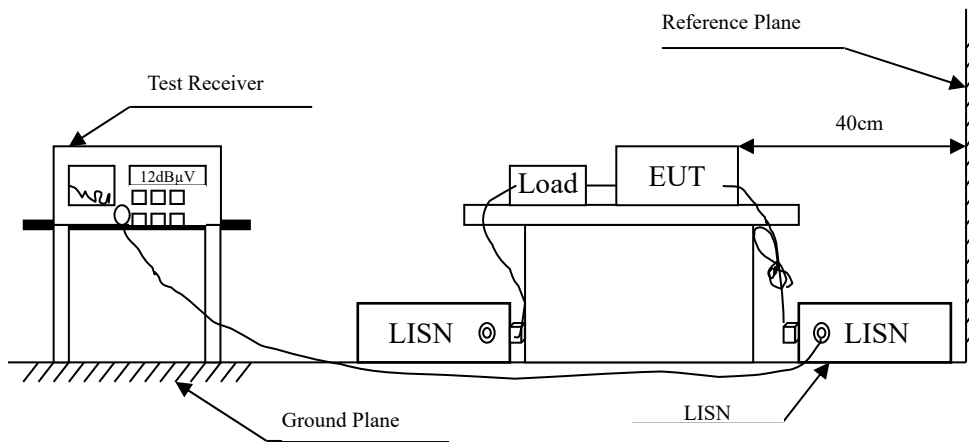

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56 ^(§§)	56-46 ^(§§)
0.50 - 5.0	56	46
5.0 - 30	60	50


2.3. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a receiver bandwidth of 9 kHz.


2.4. Test Result of Conducted Emission

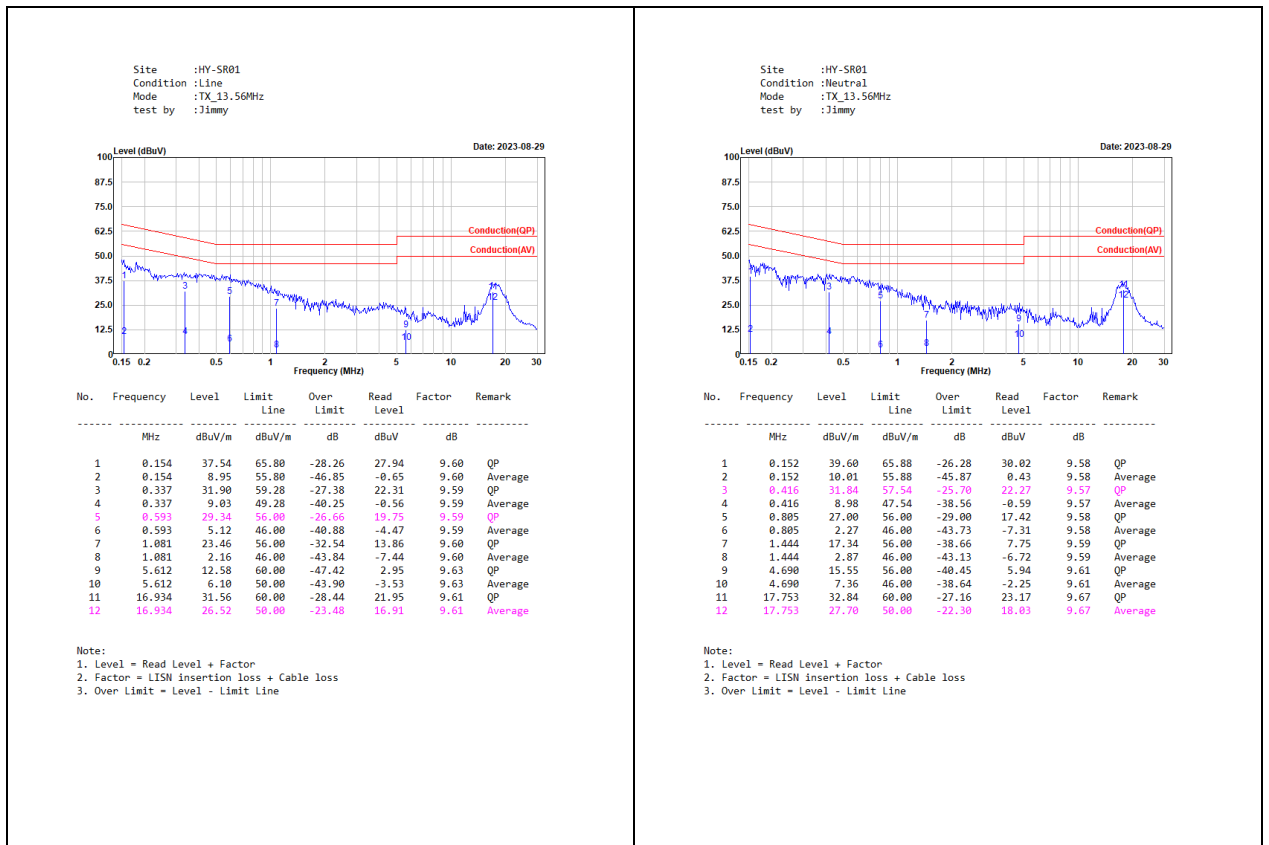


3. Radiated Emission

3.1. Test Setup

Radiated Emission Under 30 MHz

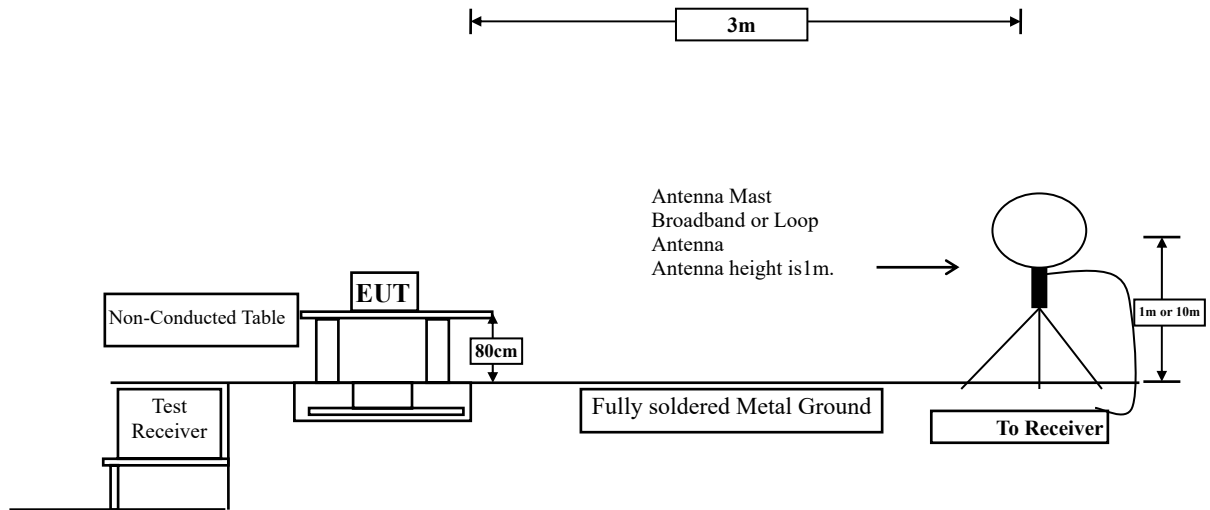

Radiated Emission Below 1 GHz

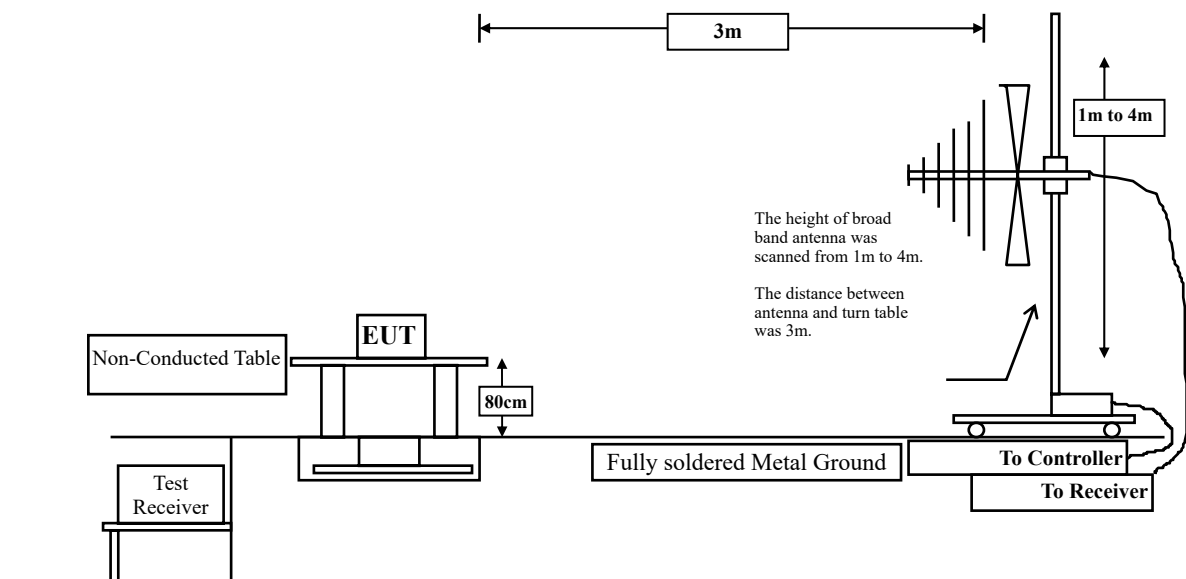

3.2. Limits

➤ Fundamental electric field strength Limit

Fundamental Frequency MHz	Field strength of fundamental			
	$\mu\text{V/m}$	Distance (meter)	$\text{dB}\mu\text{V/m}$	Distance (meter)
13.553 – 13.567	15848	30	124	3
13.410 – 13.553 and 13.567 – 13.710	334	30	90.47	3
13.110 – 13.410 and 13.710 – 14.010	106	30	80.50	3
Outside of the 13.110 – 14.010	See 15.209 Limits			

Remarks :

1. RF Voltage ($\text{dB}\mu\text{V}$) = $20 \log$ RF Voltage (μV)
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
3. The emission limit in this paragraph is based on measurement instrumentation employing an quasi-peak detector.

➤ Spurious electric field strength Limit

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	$2400/\text{F}(\text{kHz})$	300
0.490-1.705	$24000/\text{F}(\text{kHz})$	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks :

1. RF Voltage ($\text{dB}\mu\text{V}$) = $20 \log$ RF Voltage (μV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.3. Test Procedure

Fundamental electric field strength:

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum electric field strength. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna which is 1 meter above ground. All X-axis, Y-axis and Z-axis polarization of the antenna are set on measurement.

Spurious electric field strength:

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.



Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.





The bandwidth below 30 MHz setting on the field strength meter is 9 kHz and above 30 MHz is 120 kHz.

The frequency range from 9 kHz to 10th harmonics is checked.

3.4. Test Result of Radiated Emission

<p>Site :HY-CB01 Condition :3m ,Horizontal Mode :TX_Fundamental_X TEST BY :Caster</p> <p>Date: 2023-08-26</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency MHz</th> <th>Level dBuV/m</th> <th>Limit dBuV/m</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>13.010</td><td>25.83</td><td>69.50</td><td>-43.67</td><td>4.53</td><td>21.30</td><td>QP</td></tr> <tr><td>2</td><td>13.218</td><td>24.90</td><td>80.50</td><td>-55.60</td><td>3.60</td><td>21.30</td><td>QP</td></tr> <tr><td>3</td><td>13.494</td><td>38.72</td><td>90.47</td><td>-51.75</td><td>17.42</td><td>21.30</td><td>QP</td></tr> <tr><td>4</td><td>13.560</td><td>60.10</td><td>124.00</td><td>-63.90</td><td>38.80</td><td>21.30</td><td>QP</td></tr> <tr><td>5</td><td>13.608</td><td>38.89</td><td>90.47</td><td>-51.58</td><td>17.59</td><td>21.30</td><td>QP</td></tr> <tr><td>6</td><td>13.866</td><td>25.72</td><td>80.50</td><td>-54.78</td><td>4.42</td><td>21.30</td><td>QP</td></tr> <tr><td>7</td><td>14.188</td><td>24.59</td><td>69.50</td><td>-44.91</td><td>3.29</td><td>21.30</td><td>QP</td></tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.</p>	No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark	1	13.010	25.83	69.50	-43.67	4.53	21.30	QP	2	13.218	24.90	80.50	-55.60	3.60	21.30	QP	3	13.494	38.72	90.47	-51.75	17.42	21.30	QP	4	13.560	60.10	124.00	-63.90	38.80	21.30	QP	5	13.608	38.89	90.47	-51.58	17.59	21.30	QP	6	13.866	25.72	80.50	-54.78	4.42	21.30	QP	7	14.188	24.59	69.50	-44.91	3.29	21.30	QP	<p>Site :HY-CB01 Condition :3m ,Vertical Mode :TX_Fundamental_X TEST BY :Caster</p> <p>Date: 2023-08-26</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency MHz</th> <th>Level dBuV/m</th> <th>Limit dBuV/m</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>12.998</td><td>25.40</td><td>69.50</td><td>-44.10</td><td>4.10</td><td>21.30</td><td>QP</td></tr> <tr><td>2</td><td>13.272</td><td>24.60</td><td>80.50</td><td>-55.90</td><td>3.30</td><td>21.30</td><td>QP</td></tr> <tr><td>3</td><td>13.506</td><td>39.08</td><td>90.47</td><td>-51.39</td><td>17.78</td><td>21.30</td><td>QP</td></tr> <tr><td>4</td><td>13.560</td><td>54.60</td><td>124.00</td><td>-69.40</td><td>33.30</td><td>21.30</td><td>QP</td></tr> <tr><td>5</td><td>13.618</td><td>38.79</td><td>90.47</td><td>-51.68</td><td>17.49</td><td>21.30</td><td>QP</td></tr> <tr><td>6</td><td>13.920</td><td>24.00</td><td>80.50</td><td>-56.50</td><td>2.70</td><td>21.30</td><td>QP</td></tr> <tr><td>7</td><td>14.248</td><td>25.24</td><td>69.50</td><td>-44.26</td><td>3.94</td><td>21.30</td><td>QP</td></tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.</p>	No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark	1	12.998	25.40	69.50	-44.10	4.10	21.30	QP	2	13.272	24.60	80.50	-55.90	3.30	21.30	QP	3	13.506	39.08	90.47	-51.39	17.78	21.30	QP	4	13.560	54.60	124.00	-69.40	33.30	21.30	QP	5	13.618	38.79	90.47	-51.68	17.49	21.30	QP	6	13.920	24.00	80.50	-56.50	2.70	21.30	QP	7	14.248	25.24	69.50	-44.26	3.94	21.30	QP
No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark																																																																																																																										
1	13.010	25.83	69.50	-43.67	4.53	21.30	QP																																																																																																																										
2	13.218	24.90	80.50	-55.60	3.60	21.30	QP																																																																																																																										
3	13.494	38.72	90.47	-51.75	17.42	21.30	QP																																																																																																																										
4	13.560	60.10	124.00	-63.90	38.80	21.30	QP																																																																																																																										
5	13.608	38.89	90.47	-51.58	17.59	21.30	QP																																																																																																																										
6	13.866	25.72	80.50	-54.78	4.42	21.30	QP																																																																																																																										
7	14.188	24.59	69.50	-44.91	3.29	21.30	QP																																																																																																																										
No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark																																																																																																																										
1	12.998	25.40	69.50	-44.10	4.10	21.30	QP																																																																																																																										
2	13.272	24.60	80.50	-55.90	3.30	21.30	QP																																																																																																																										
3	13.506	39.08	90.47	-51.39	17.78	21.30	QP																																																																																																																										
4	13.560	54.60	124.00	-69.40	33.30	21.30	QP																																																																																																																										
5	13.618	38.79	90.47	-51.68	17.49	21.30	QP																																																																																																																										
6	13.920	24.00	80.50	-56.50	2.70	21.30	QP																																																																																																																										
7	14.248	25.24	69.50	-44.26	3.94	21.30	QP																																																																																																																										
<p>Site :HY-CB01 Condition :3m ,Horizontal Mode :TX_Fundamental_Y TEST BY :Caster</p> <p>Date: 2023-08-26</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency MHz</th> <th>Level dBuV/m</th> <th>Limit dBuV/m</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>12.972</td><td>26.57</td><td>69.50</td><td>-42.93</td><td>5.26</td><td>21.31</td><td>QP</td></tr> <tr><td>2</td><td>13.238</td><td>24.42</td><td>80.50</td><td>-56.08</td><td>3.12</td><td>21.30</td><td>QP</td></tr> <tr><td>3</td><td>13.500</td><td>39.11</td><td>90.47</td><td>-51.36</td><td>17.81</td><td>21.30</td><td>QP</td></tr> <tr><td>4</td><td>13.560</td><td>64.10</td><td>124.00</td><td>-59.90</td><td>42.80</td><td>21.30</td><td>QP</td></tr> <tr><td>5</td><td>13.602</td><td>40.13</td><td>90.47</td><td>-50.34</td><td>18.83</td><td>21.30</td><td>QP</td></tr> <tr><td>6</td><td>13.888</td><td>25.34</td><td>80.50</td><td>-55.16</td><td>4.04</td><td>21.30</td><td>QP</td></tr> <tr><td>7</td><td>14.208</td><td>25.93</td><td>69.50</td><td>-43.57</td><td>4.63</td><td>21.30</td><td>QP</td></tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.</p>	No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark	1	12.972	26.57	69.50	-42.93	5.26	21.31	QP	2	13.238	24.42	80.50	-56.08	3.12	21.30	QP	3	13.500	39.11	90.47	-51.36	17.81	21.30	QP	4	13.560	64.10	124.00	-59.90	42.80	21.30	QP	5	13.602	40.13	90.47	-50.34	18.83	21.30	QP	6	13.888	25.34	80.50	-55.16	4.04	21.30	QP	7	14.208	25.93	69.50	-43.57	4.63	21.30	QP	<p>Site :HY-CB01 Condition :3m ,Vertical Mode :TX_Fundamental_Y TEST BY :Caster</p> <p>Date: 2023-08-26</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency MHz</th> <th>Level dBuV/m</th> <th>Limit dBuV/m</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>12.964</td><td>25.37</td><td>69.50</td><td>-44.13</td><td>4.06</td><td>21.31</td><td>QP</td></tr> <tr><td>2</td><td>13.286</td><td>26.37</td><td>80.50</td><td>-54.13</td><td>5.07</td><td>21.30</td><td>QP</td></tr> <tr><td>3</td><td>13.502</td><td>40.21</td><td>90.47</td><td>-50.26</td><td>18.91</td><td>21.30</td><td>QP</td></tr> <tr><td>4</td><td>13.560</td><td>62.60</td><td>124.00</td><td>-61.40</td><td>41.30</td><td>21.30</td><td>QP</td></tr> <tr><td>5</td><td>13.608</td><td>41.40</td><td>90.47</td><td>-49.07</td><td>20.10</td><td>21.30</td><td>QP</td></tr> <tr><td>6</td><td>13.850</td><td>24.83</td><td>80.50</td><td>-55.67</td><td>3.53</td><td>21.30</td><td>QP</td></tr> <tr><td>7</td><td>14.136</td><td>25.55</td><td>69.50</td><td>-43.95</td><td>4.25</td><td>21.30</td><td>QP</td></tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.</p>	No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark	1	12.964	25.37	69.50	-44.13	4.06	21.31	QP	2	13.286	26.37	80.50	-54.13	5.07	21.30	QP	3	13.502	40.21	90.47	-50.26	18.91	21.30	QP	4	13.560	62.60	124.00	-61.40	41.30	21.30	QP	5	13.608	41.40	90.47	-49.07	20.10	21.30	QP	6	13.850	24.83	80.50	-55.67	3.53	21.30	QP	7	14.136	25.55	69.50	-43.95	4.25	21.30	QP
No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark																																																																																																																										
1	12.972	26.57	69.50	-42.93	5.26	21.31	QP																																																																																																																										
2	13.238	24.42	80.50	-56.08	3.12	21.30	QP																																																																																																																										
3	13.500	39.11	90.47	-51.36	17.81	21.30	QP																																																																																																																										
4	13.560	64.10	124.00	-59.90	42.80	21.30	QP																																																																																																																										
5	13.602	40.13	90.47	-50.34	18.83	21.30	QP																																																																																																																										
6	13.888	25.34	80.50	-55.16	4.04	21.30	QP																																																																																																																										
7	14.208	25.93	69.50	-43.57	4.63	21.30	QP																																																																																																																										
No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark																																																																																																																										
1	12.964	25.37	69.50	-44.13	4.06	21.31	QP																																																																																																																										
2	13.286	26.37	80.50	-54.13	5.07	21.30	QP																																																																																																																										
3	13.502	40.21	90.47	-50.26	18.91	21.30	QP																																																																																																																										
4	13.560	62.60	124.00	-61.40	41.30	21.30	QP																																																																																																																										
5	13.608	41.40	90.47	-49.07	20.10	21.30	QP																																																																																																																										
6	13.850	24.83	80.50	-55.67	3.53	21.30	QP																																																																																																																										
7	14.136	25.55	69.50	-43.95	4.25	21.30	QP																																																																																																																										

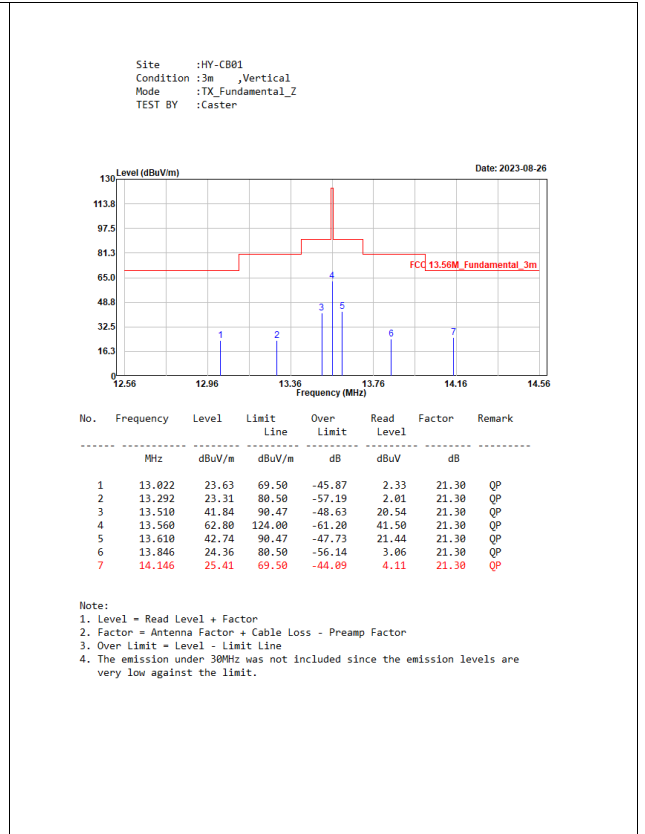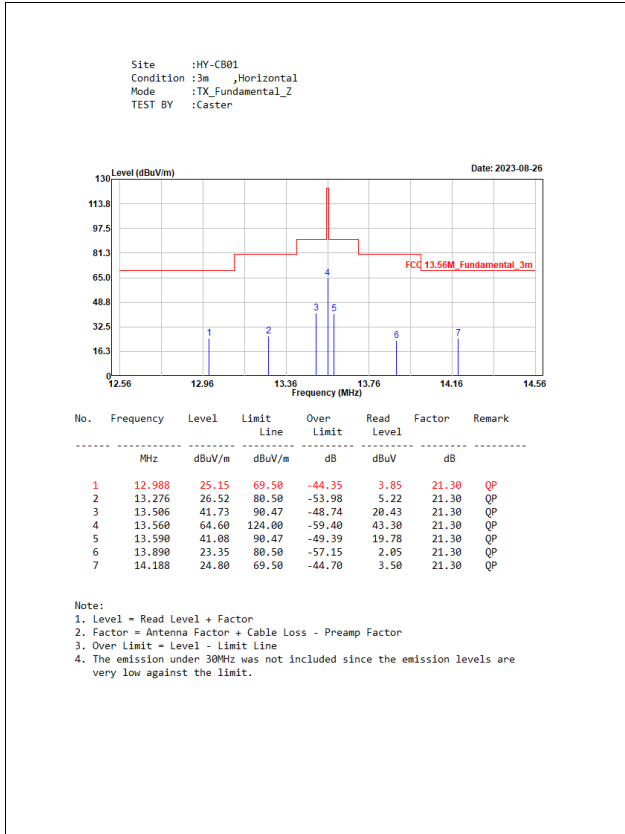


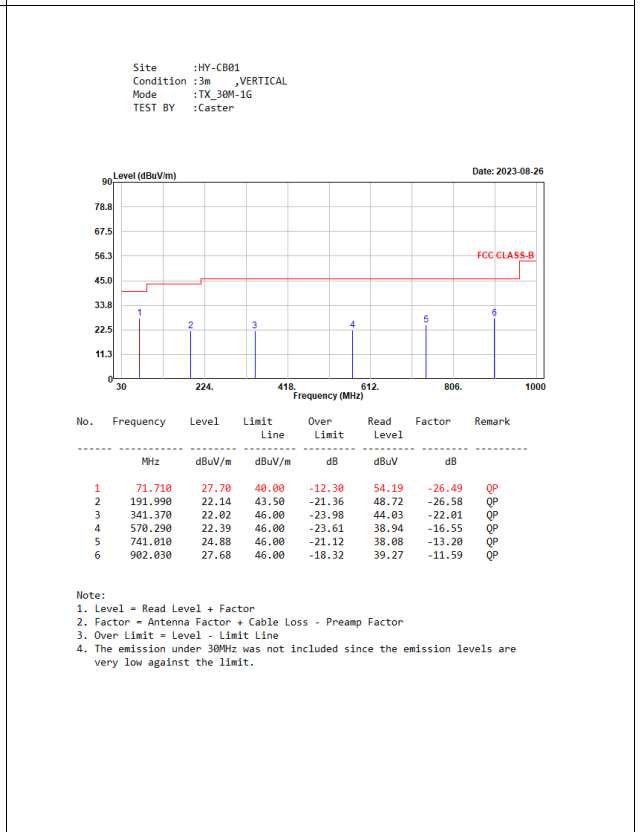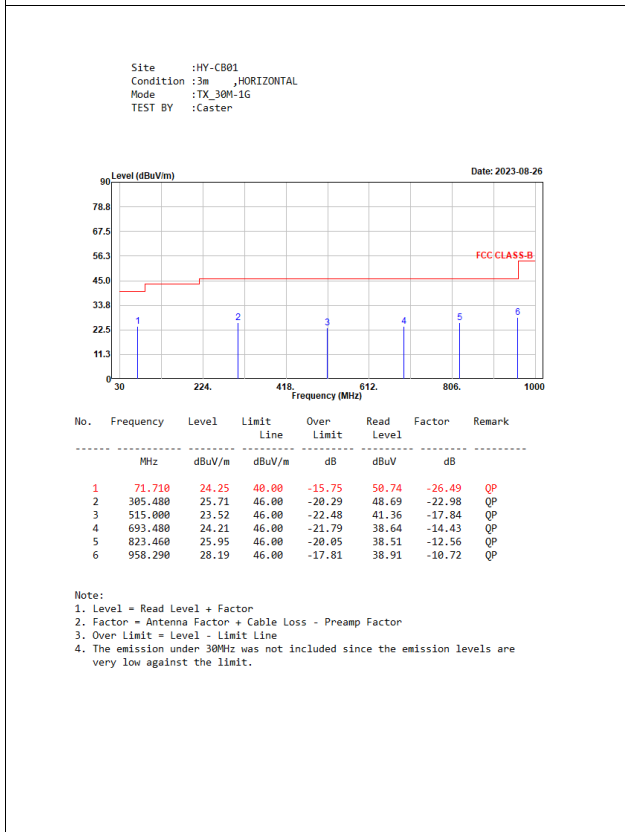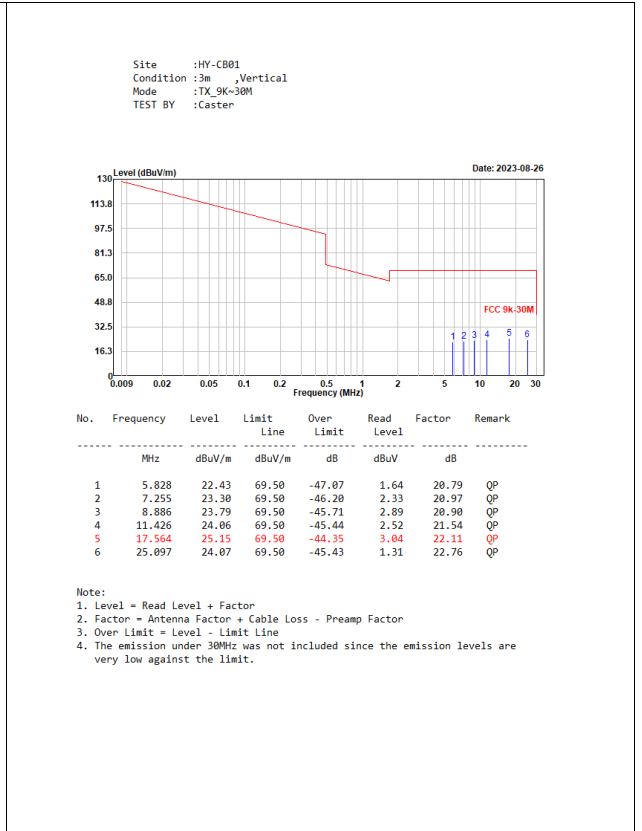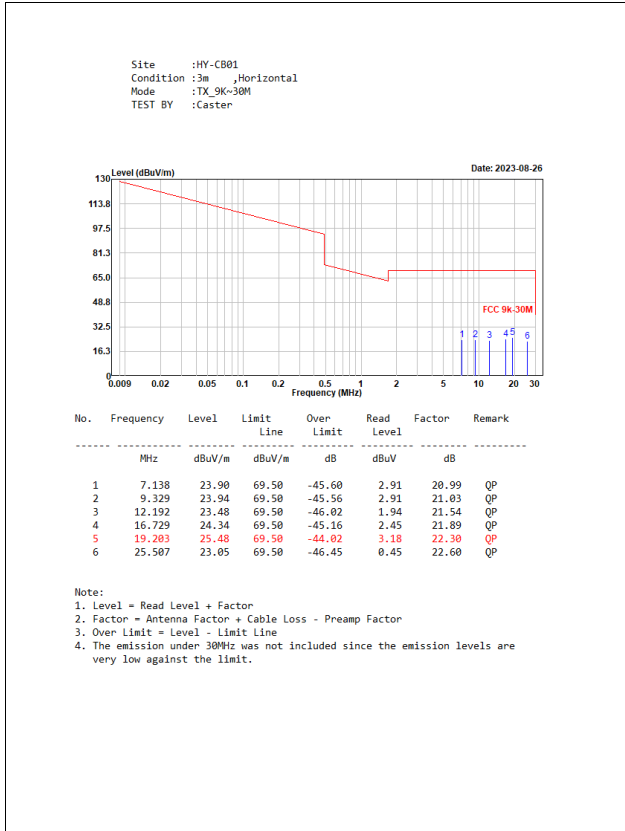

4. Band Edge

4.1. Test Setup

Radiated Emission Under 30 MHz

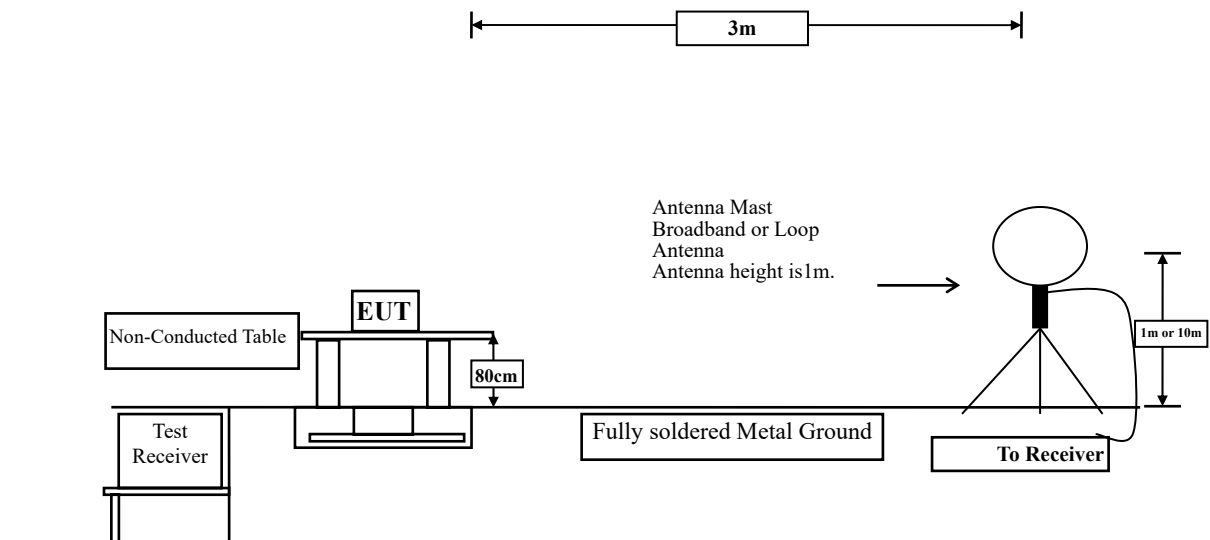

4.2. Limits

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in Section 15.209. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

4.3. Test Procedure


The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.


The bandwidth below 30 MHz setting on the field strength meter is 9 kHz and above 30 MHz is 120 kHz.

4.4. Test Result of Band Edge

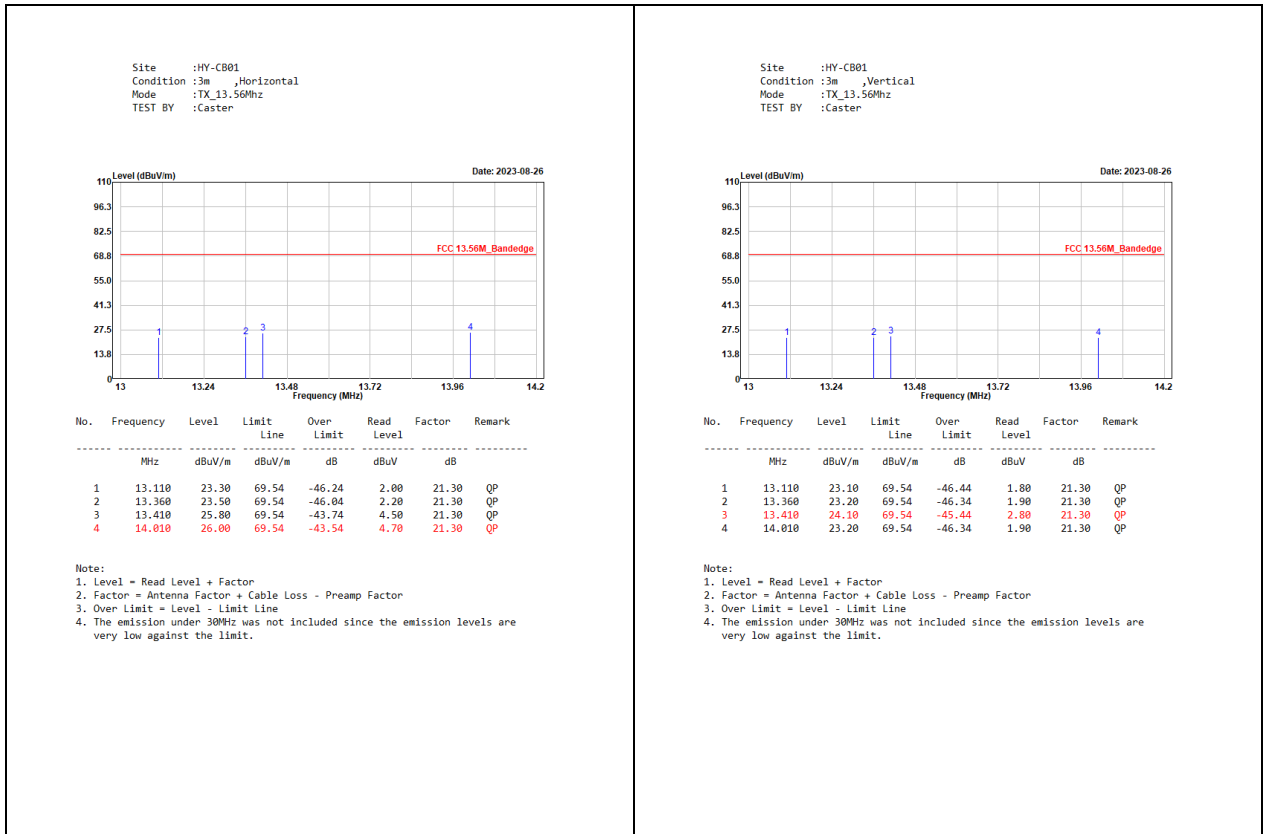

5. Frequency Tolerance

5.1. Test Setup

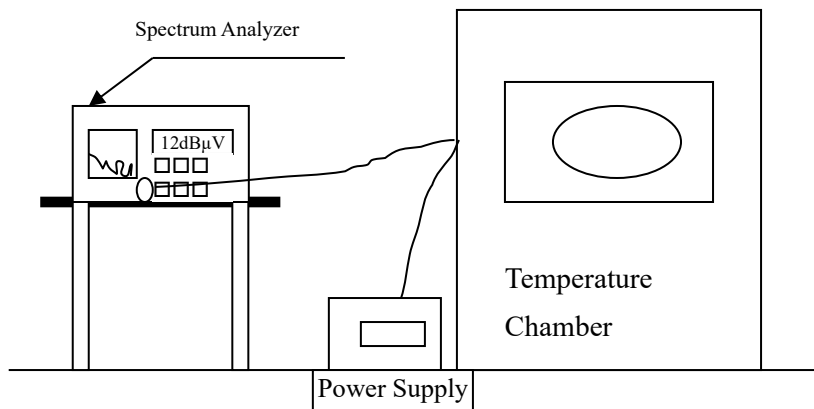

5.2. Limits

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.

5.3. Test Procedure

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+ 50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

5.4. Test Result of Frequency Stability


Product : Mobile Computer
 Test Item : Frequency Tolerance
 Test Mode : Transmit
 Test date : 2023/08/31

Temperature (°C)	Voltage (V)	Observe Time	Declared Frequency (MHz)	Read Frequency (MHz)	Tolerance (%)	Limit (%)
20	5	start	13.56	13.55973	-0.002028	± 0.01 %
		2mins	13.56	13.55971	-0.002139	
		5mins	13.56	13.55971	-0.002139	
		10mins	13.56	13.55971	-0.002139	
20	5.75	start	13.56	13.55973	-0.002028	± 0.01 %
		2mins	13.56	13.55973	-0.002028	
		5mins	13.56	13.55973	-0.002028	
		10mins	13.56	13.55972	-0.002081	
20	4.25	start	13.56	13.55972	-0.002081	± 0.01 %
		2mins	13.56	13.55972	-0.002080	
		5mins	13.56	13.55972	-0.002080	
		10mins	13.56	13.55972	-0.002080	
50	5	start	13.56	13.55962	-0.002817	± 0.01 %
		2mins	13.56	13.55962	-0.002817	
		5mins	13.56	13.55962	-0.002817	
		10mins	13.56	13.55962	-0.002817	
40	5	start	13.56	13.55974	-0.001917	± 0.01 %
		2mins	13.56	13.55974	-0.001917	
		5mins	13.56	13.55974	-0.001917	
		10mins	13.56	13.55974	-0.001917	
30	5	start	13.56	13.55977	-0.001696	± 0.01 %
		2mins	13.56	13.55977	-0.001696	
		5mins	13.56	13.55977	-0.001696	
		10mins	13.56	13.55977	-0.001696	

10	5	start	13.56	13.55972	-0.002065	± 0.01 %
		2mins	13.56	13.55972	-0.002065	
		5mins	13.56	13.55972	-0.002065	
		10mins	13.56	13.55972	-0.002065	
0	5	start	13.56	13.55978	-0.001659	± 0.01 %
		2mins	13.56	13.55978	-0.001659	
		5mins	13.56	13.55978	-0.001659	
		10mins	13.56	13.55978	-0.001659	
-10	5	start	13.56	13.55982	-0.001327	± 0.01 %
		2mins	13.56	13.55982	-0.001327	
		5mins	13.56	13.55982	-0.001327	
		10mins	13.56	13.55982	-0.001327	
-20	5	start	13.56	13.55975	-0.001814	± 0.01 %
		2mins	13.56	13.55975	-0.001814	
		5mins	13.56	13.55975	-0.001814	
		10mins	13.56	13.55975	-0.001814	

6. 20dB Bandwidth

6.1. Test Setup

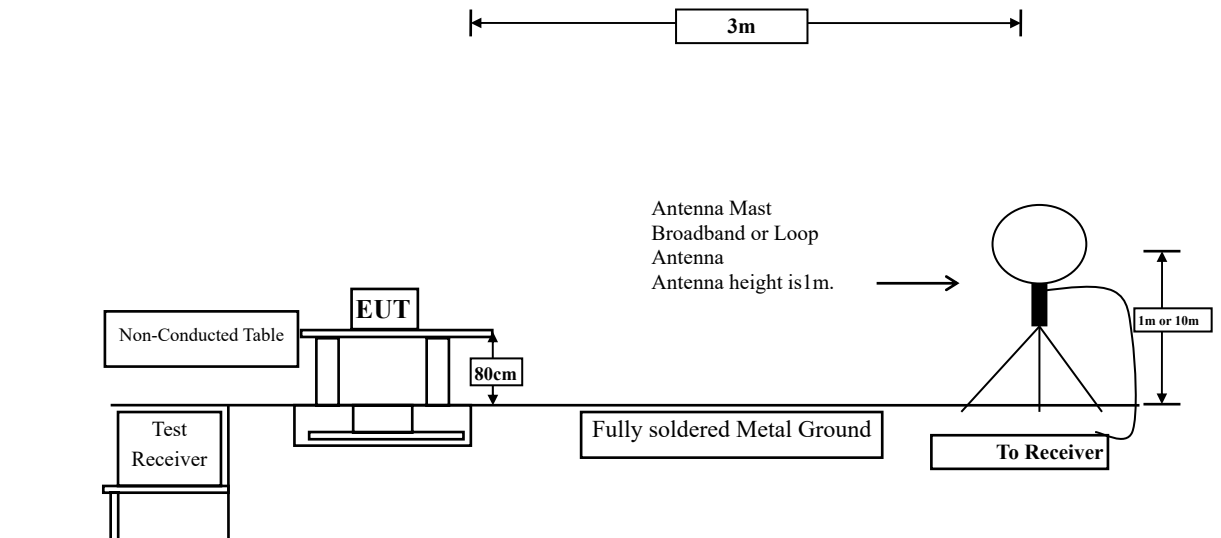

6.2. Limits

The 20dB Bandwidth must be specified in operating frequency band (13.11-14.01 MHz).


6.3. Test Procedure

The EUT was setup according to ANSI C63.4, 2014; tested according to ANSI C63.10 Section 6.9.2 for compliance to FCC 47CFR 15.215 requirements.

6.4. Test Result of 20dB Bandwidth

Product : Mobile Computer
 Test Item : 20dB Bandwidth
 Test Mode : Transmit
 Test date : 2023/08/29

Frequency (MHz)	20dB Bandwidth (Hz)	Measurement Level (MHz)	Required Limit (MHz)	Result
13.56	25.47	13.559	>13.11	Pass
		13.559	<14.01	Pass

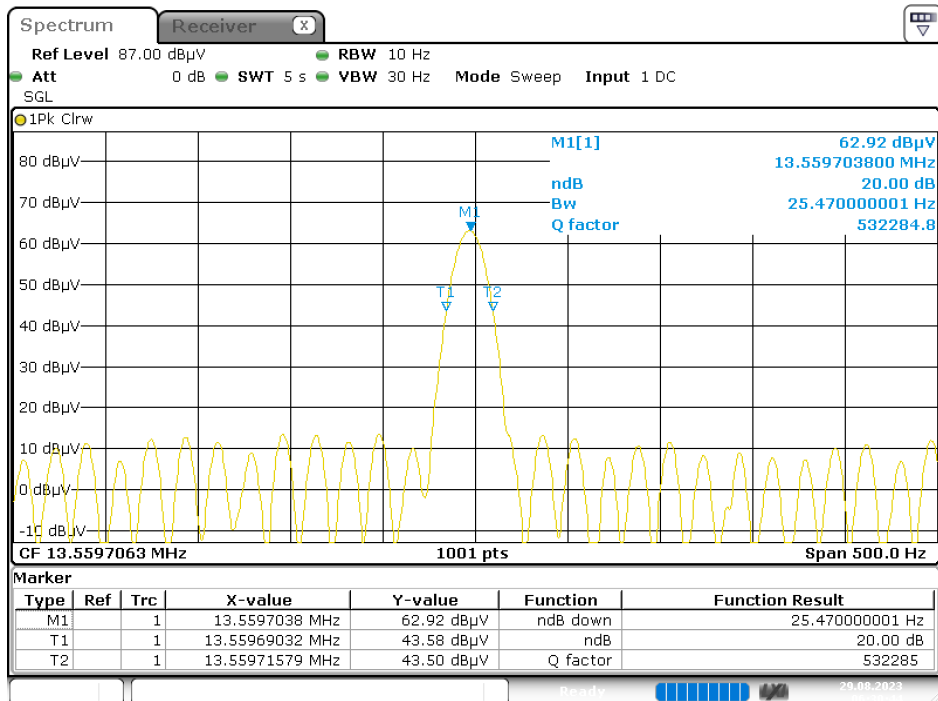

Date: 29.AUG.2023 06:30:44