Test Mode	IEEE 802.11a	Tested Date	2019/11/14
Test Frequency	CH140: 5700 MHz	Polarization	Vertical

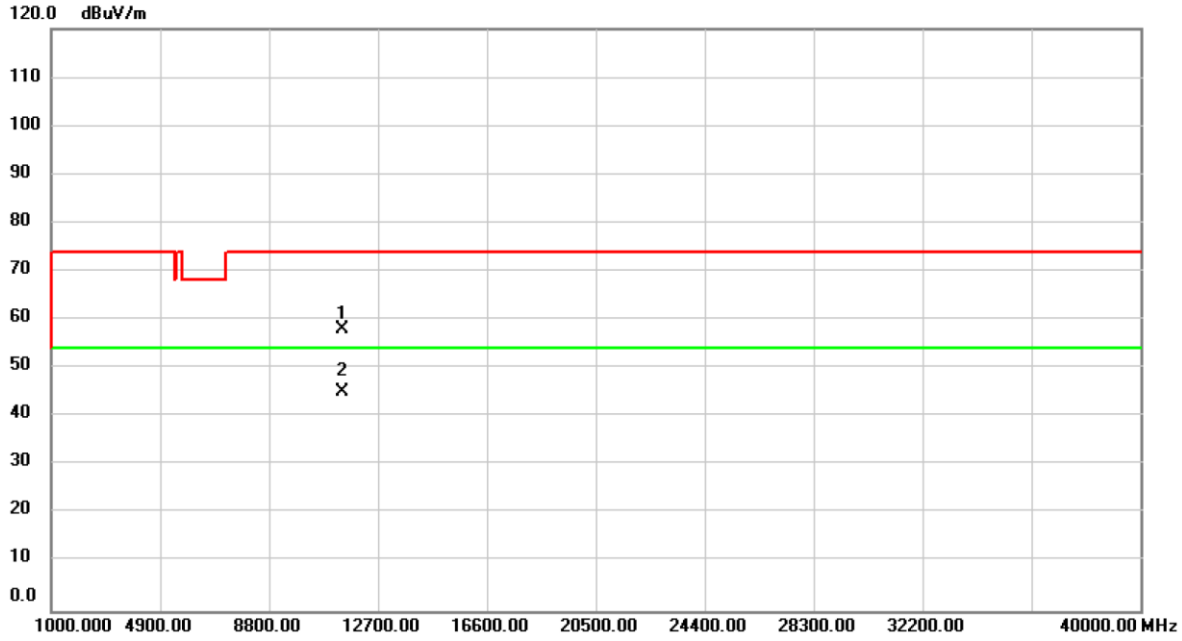

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	54.38	3.65	58.03	74.00	-15.97	peak	
2	*	11400.00	41.55	3.65	45.20	54.00	-8.80	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Tested Date	2019/11/14
Test Frequency	CH140: 5700 MHz	Polarization	Horizontal

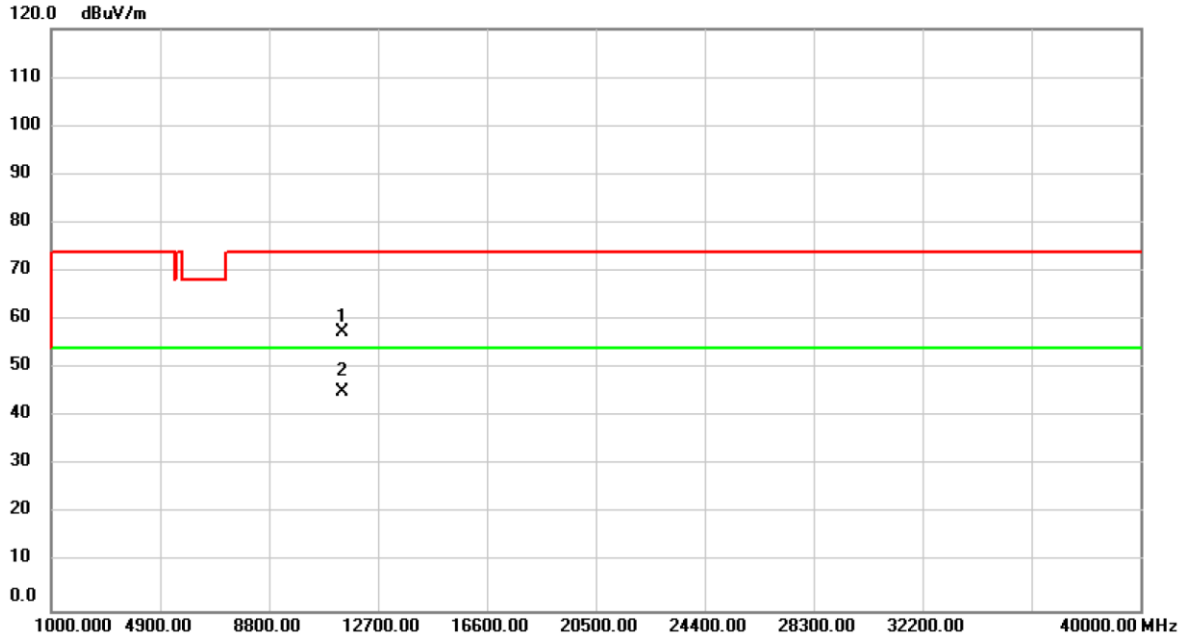

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	53.92	3.65	57.57	74.00	-16.43	peak	
2	*	11400.00	41.54	3.65	45.19	54.00	-8.81	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Tested Date	2019/11/14
Test Frequency	CH149: 5745 MHz	Polarization	Vertical

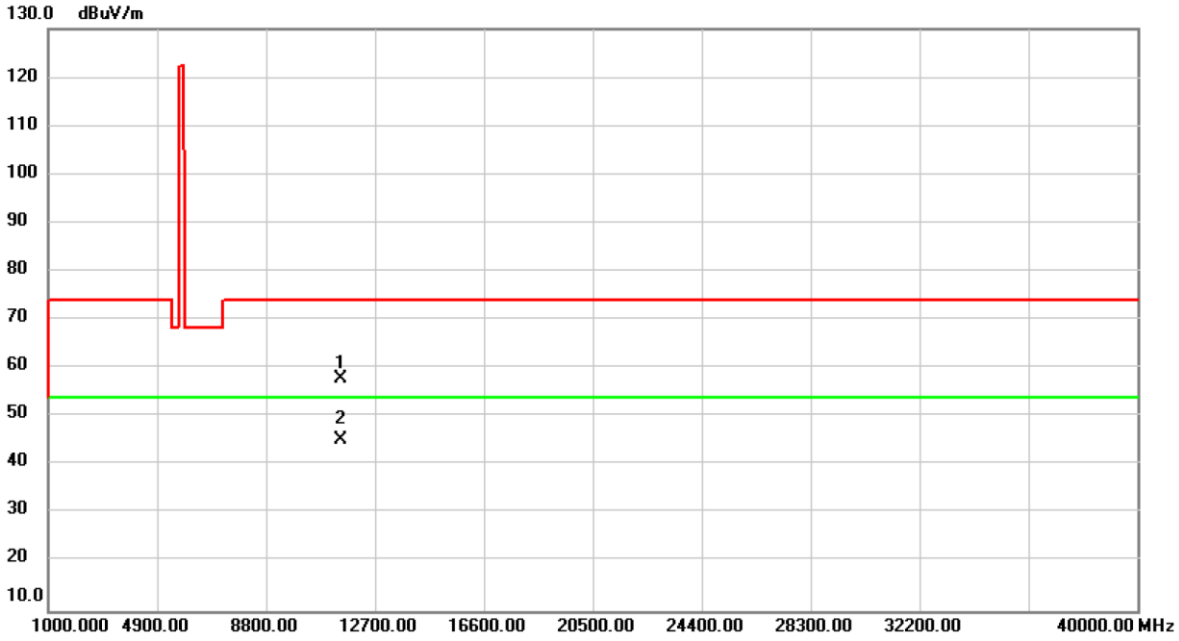

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	54.02	3.89	57.91	74.00	-16.09	peak	
2	*	11490.00	41.45	3.89	45.34	54.00	-8.66	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Tested Date	2019/11/14
Test Frequency	CH149: 5745 MHz	Polarization	Horizontal

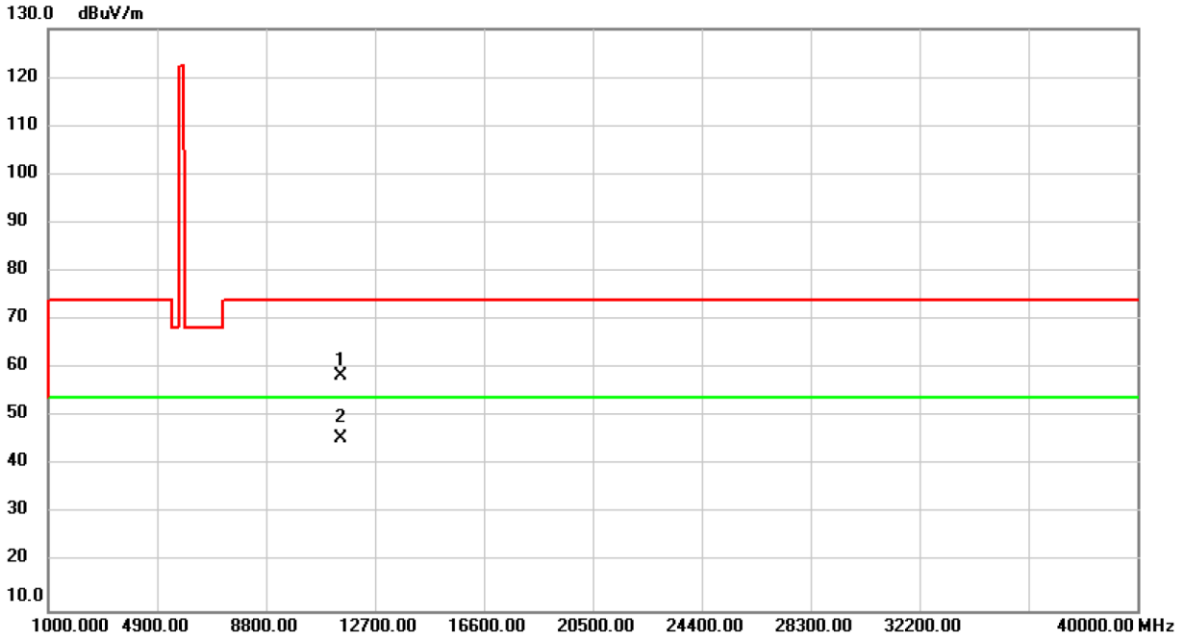

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	54.50	3.89	58.39	74.00	-15.61	peak	
2	*	11490.00	41.52	3.89	45.41	54.00	-8.59	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Tested Date	2019/11/14
Test Frequency	CH157: 5785 MHz	Polarization	Vertical

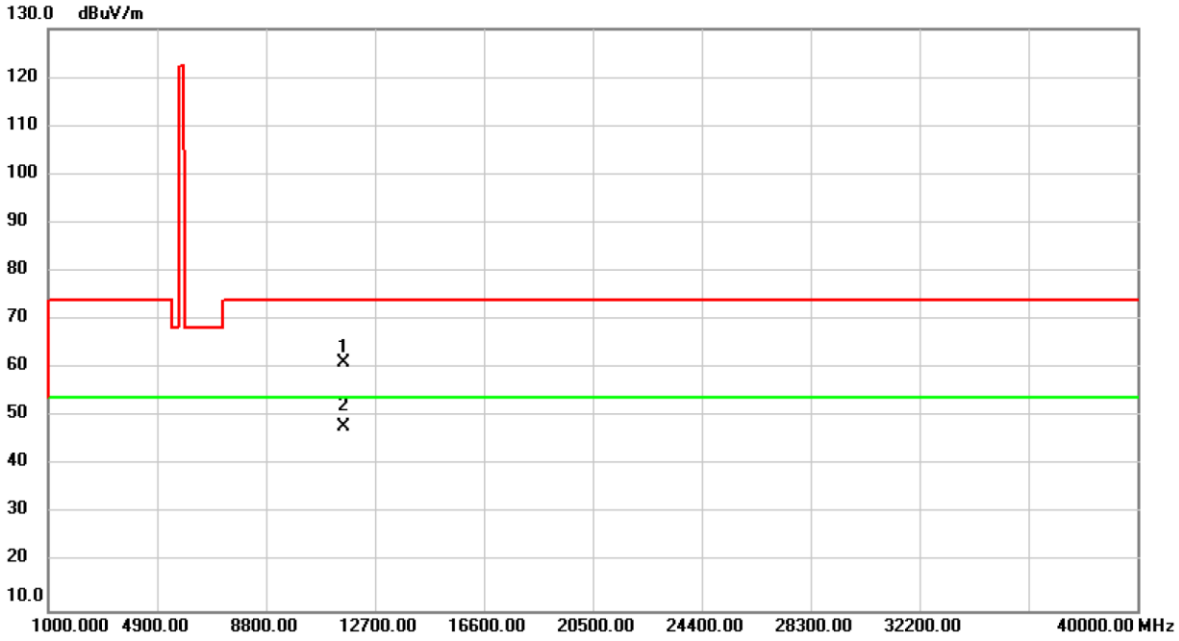

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.00	57.53	3.57	61.10	74.00	-12.90	peak	
2	*	11570.00	44.40	3.57	47.97	54.00	-6.03	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Tested Date	2019/11/14
Test Frequency	CH157: 5785 MHz	Polarization	Horizontal

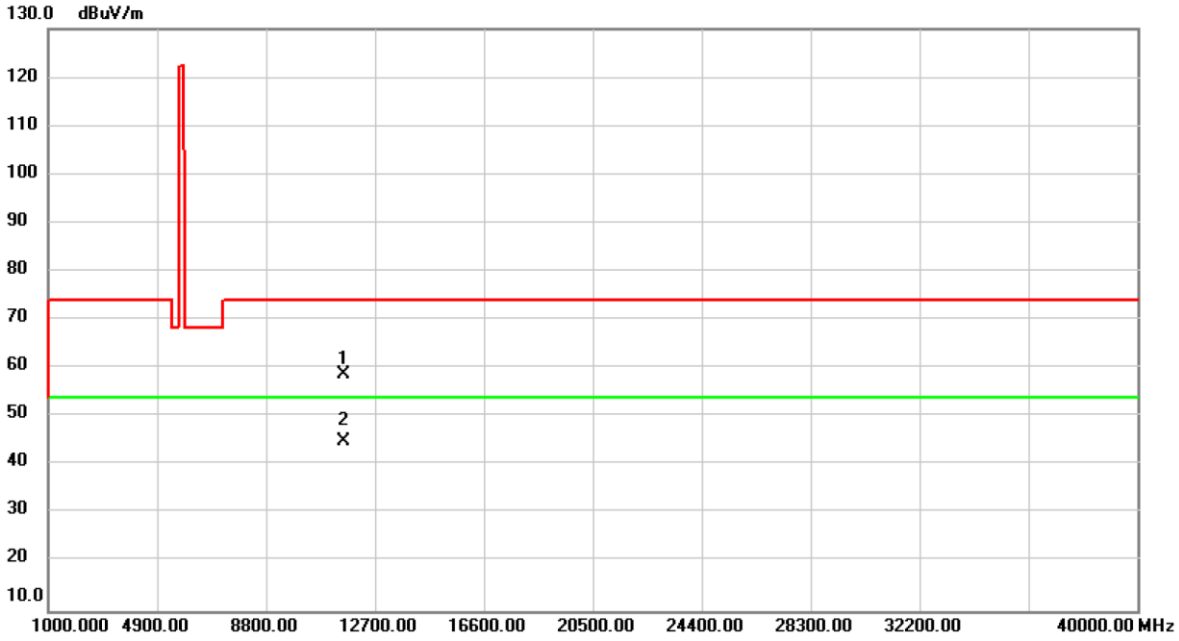

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.00	55.28	3.57	58.85	74.00	-15.15	peak	
2	*	11570.00	41.34	3.57	44.91	54.00	-9.09	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Tested Date	2019/11/14
Test Frequency	CH165: 5825 MHz	Polarization	Vertical

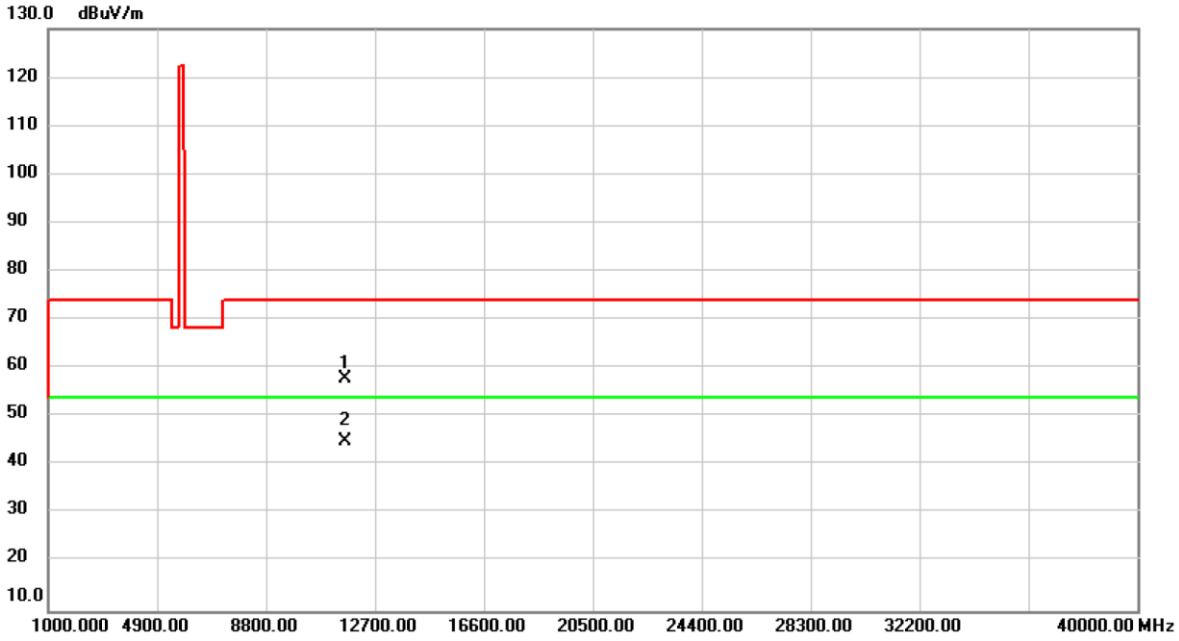

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.00	54.53	3.18	57.71	74.00	-16.29	peak	
2	*	11650.00	41.63	3.18	44.81	54.00	-9.19	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Tested Date	2019/11/14
Test Frequency	CH165: 5825 MHz	Polarization	Horizontal

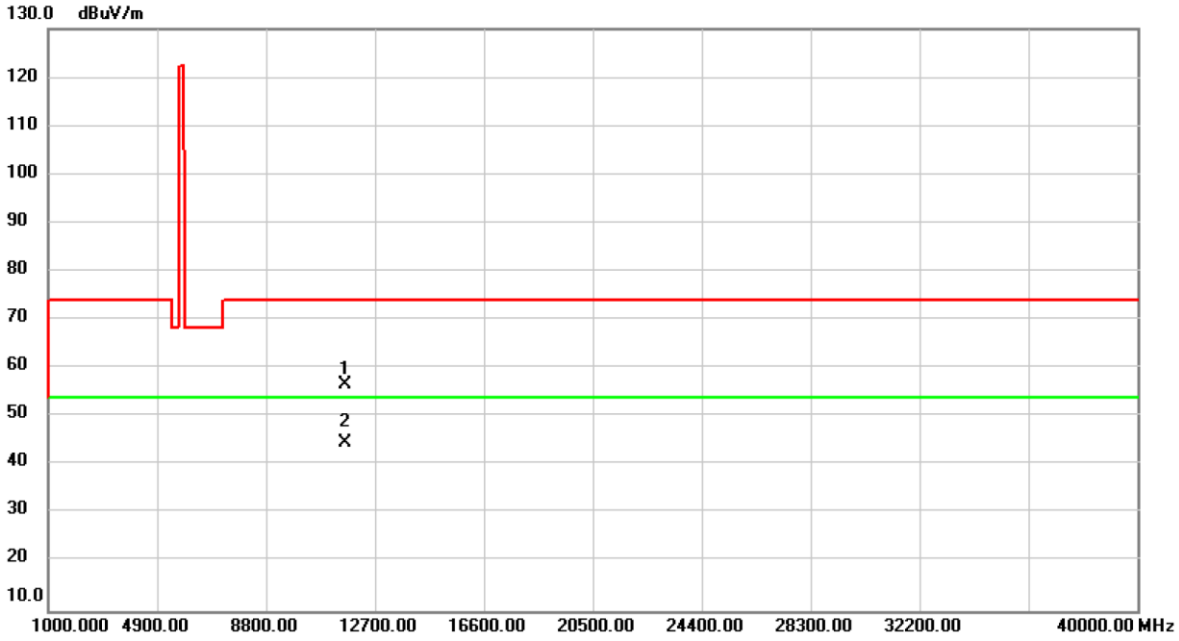

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.00	53.61	3.18	56.79	74.00	-17.21	peak	
2	*	11650.00	41.40	3.18	44.58	54.00	-9.42	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Tested Date	2019/11/12
Test Frequency	CH36: 5180 MHz	Polarization	Vertical

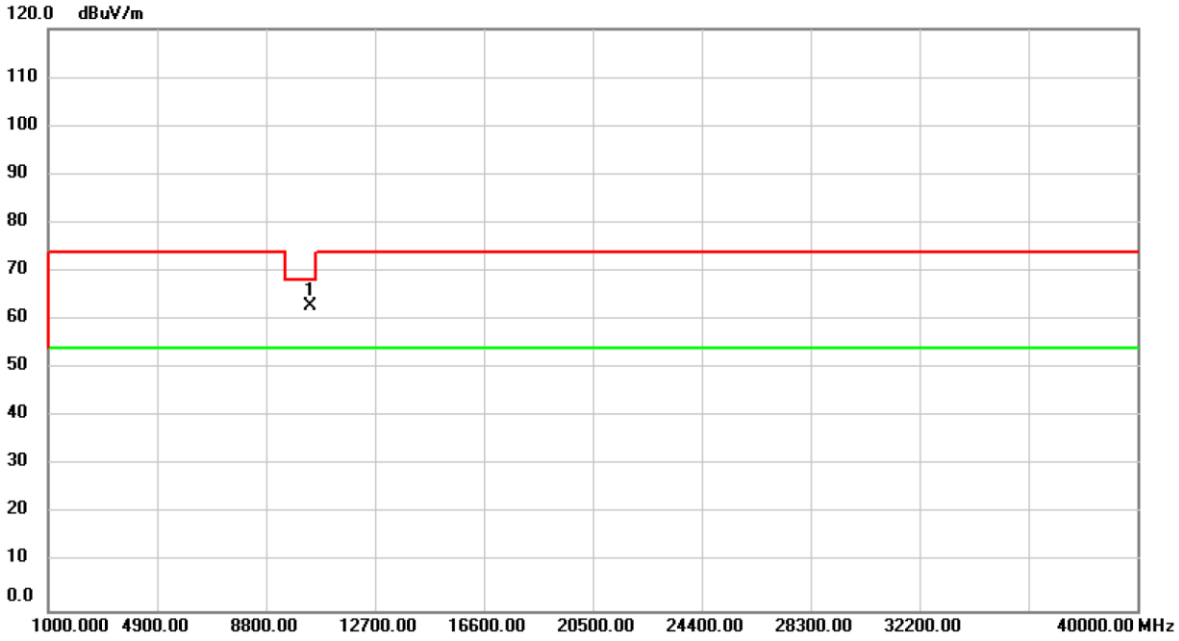

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	60.05	2.83	62.88	68.20	-5.32	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Tested Date	2019/11/12
Test Frequency	CH36: 5180 MHz	Polarization	Horizontal

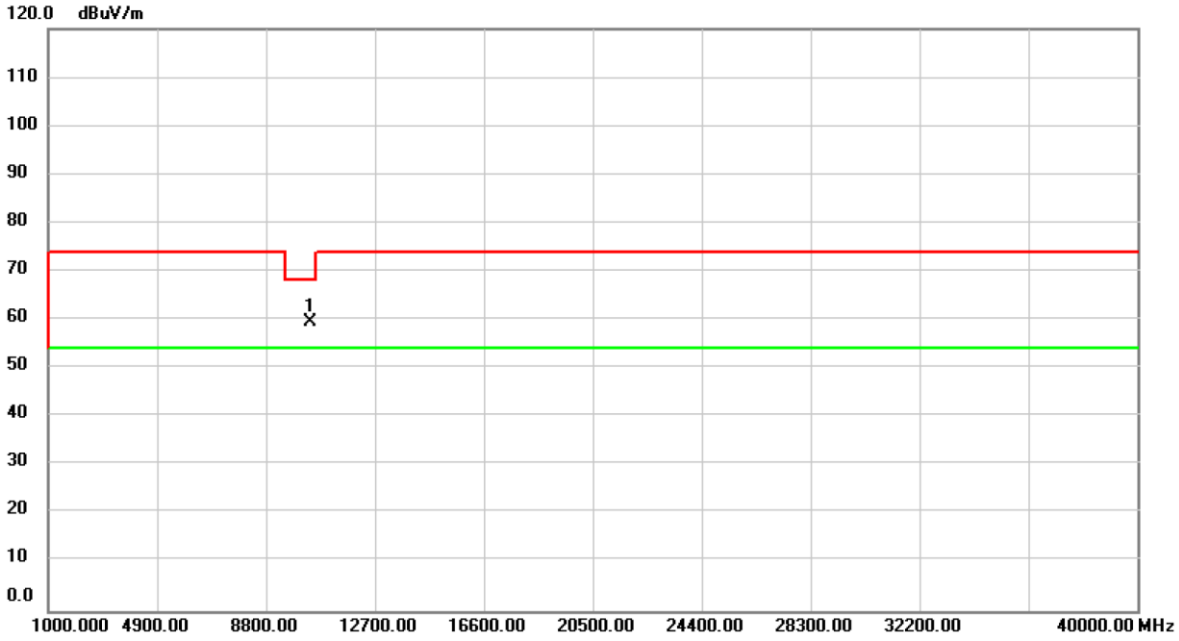

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	56.83	2.83	59.66	68.20	-8.54	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Tested Date	2019/11/14
Test Frequency	CH40: 5200 MHz	Polarization	Vertical

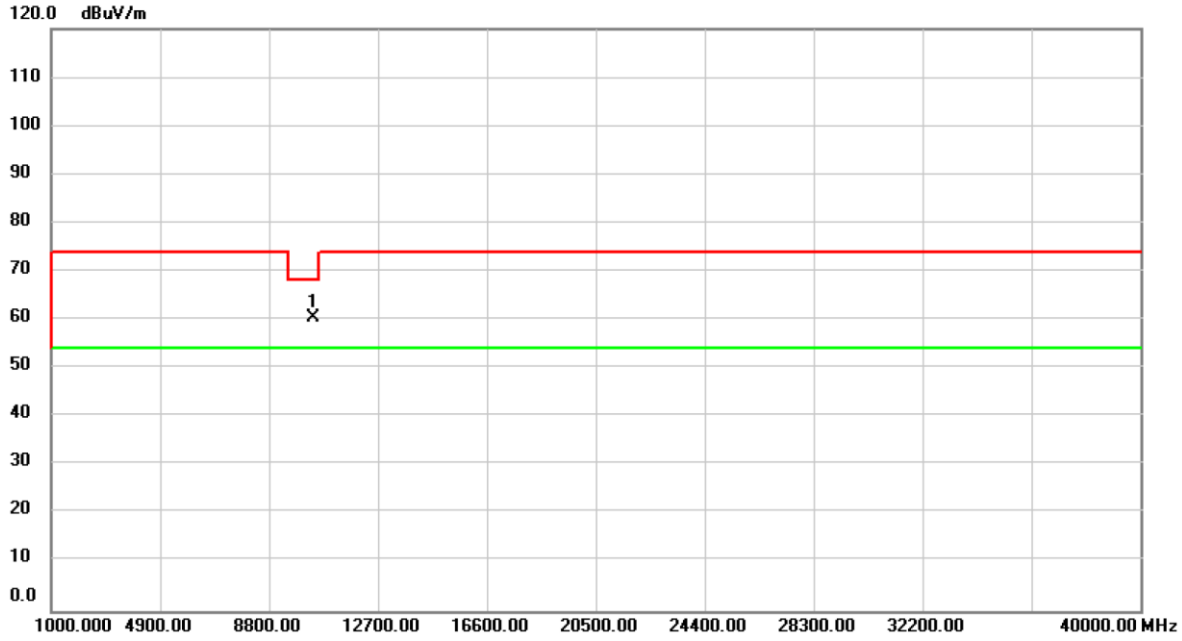

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	57.58	2.89	60.47	68.20	-7.73	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Tested Date	2019/11/14
Test Frequency	CH40: 5200 MHz	Polarization	Horizontal

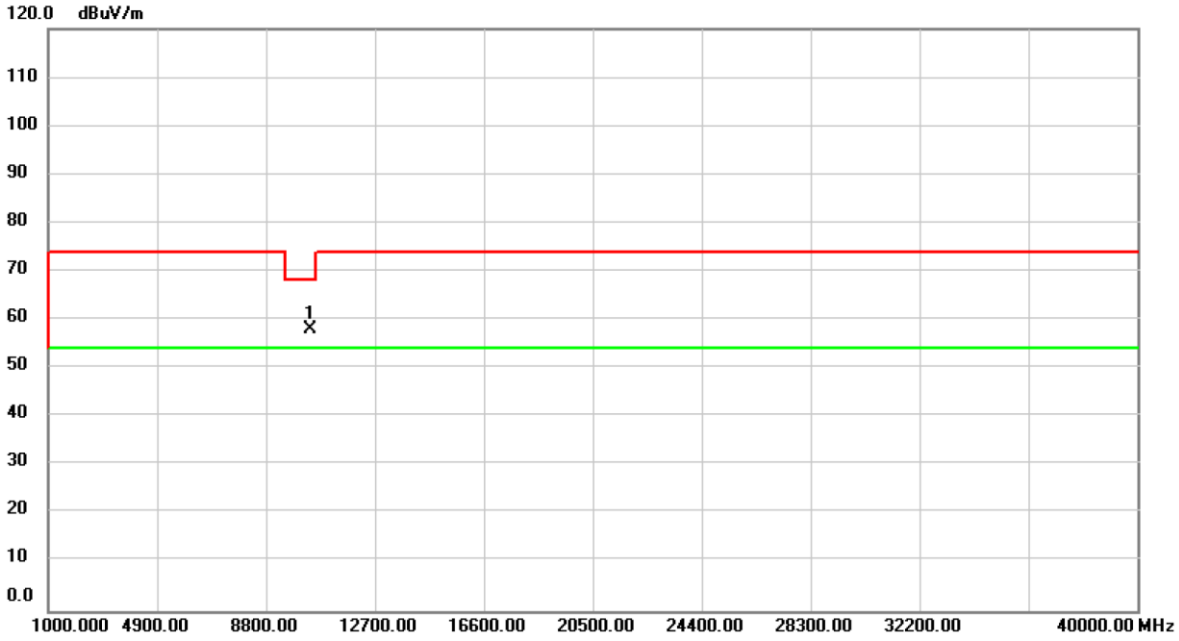

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	55.19	2.89	58.08	68.20	-10.12	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Tested Date	2019/11/14
Test Frequency	CH48: 5240 MHz	Polarization	Vertical

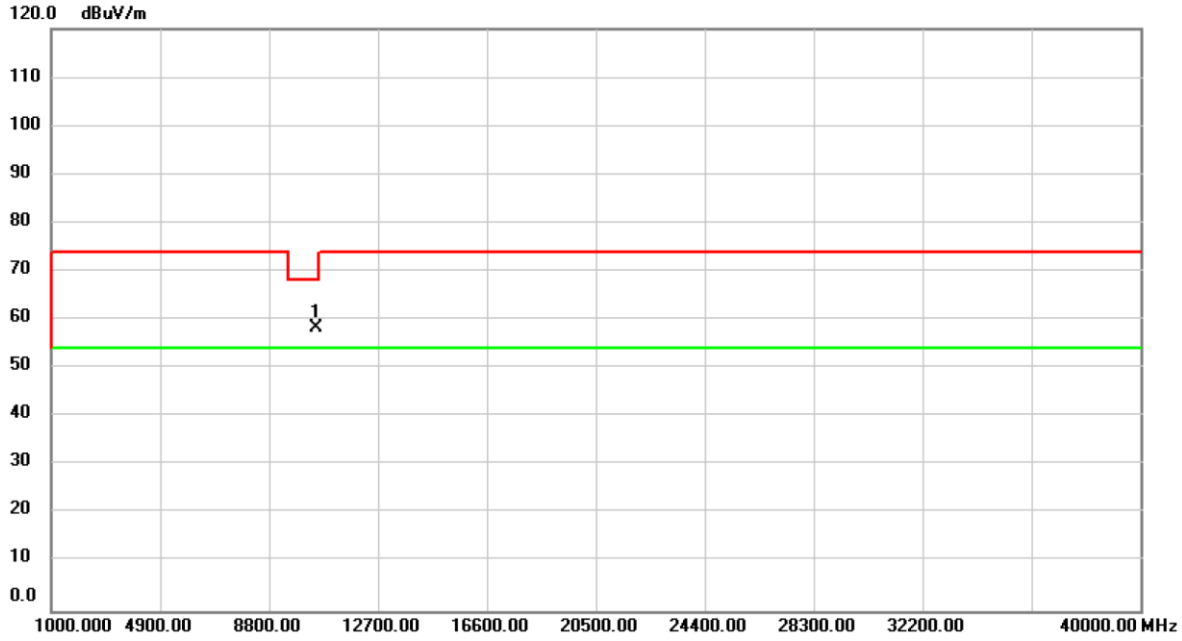

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	55.48	3.00	58.48	68.20	-9.72	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Tested Date	2019/11/14
Test Frequency	CH48: 5240 MHz	Polarization	Horizontal

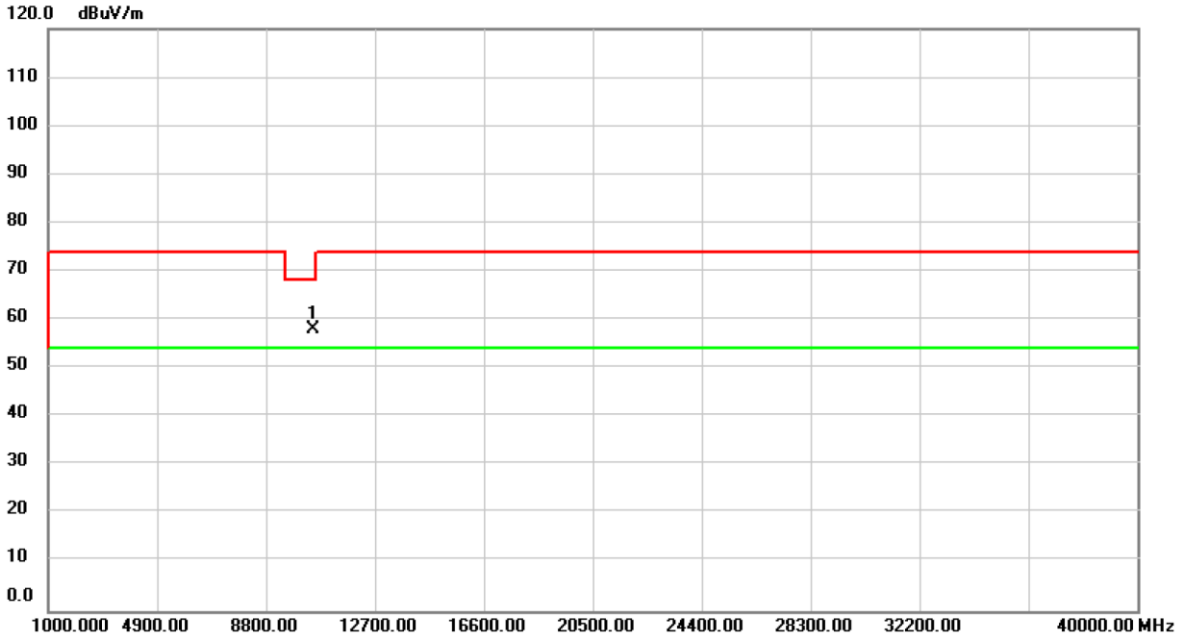

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	55.05	3.00	58.05	68.20	-10.15	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Tested Date	2019/11/14
Test Frequency	CH52: 5260 MHz	Polarization	Vertical

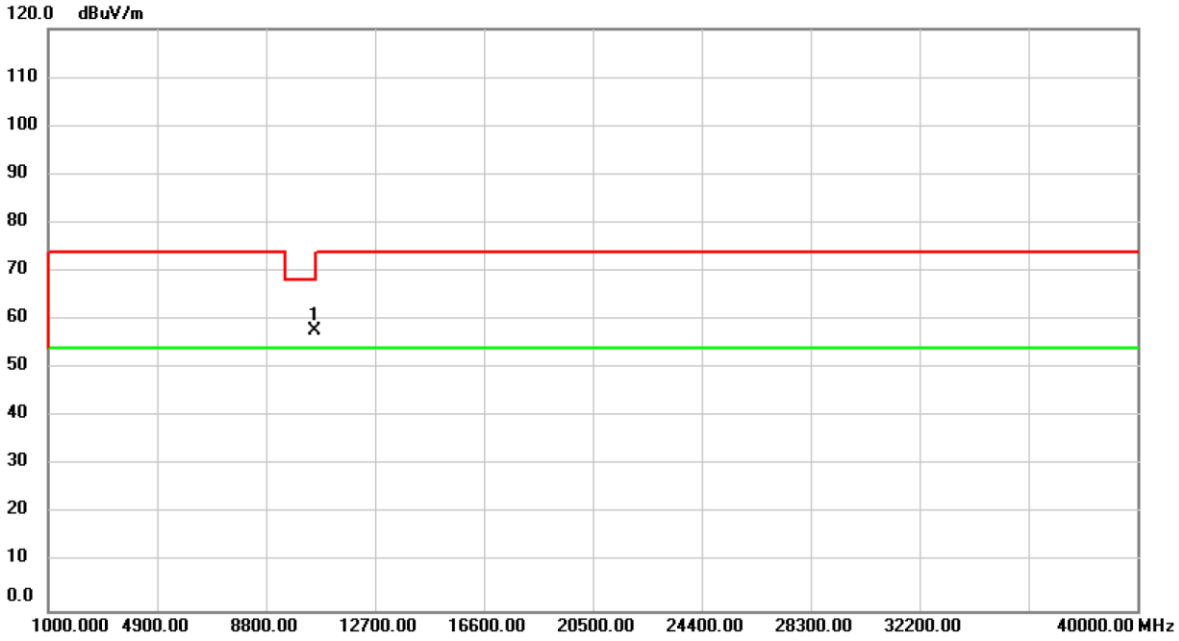

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	54.87	3.02	57.89	68.20	-10.31	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Tested Date	2019/11/14
Test Frequency	CH52: 5260 MHz	Polarization	Horizontal

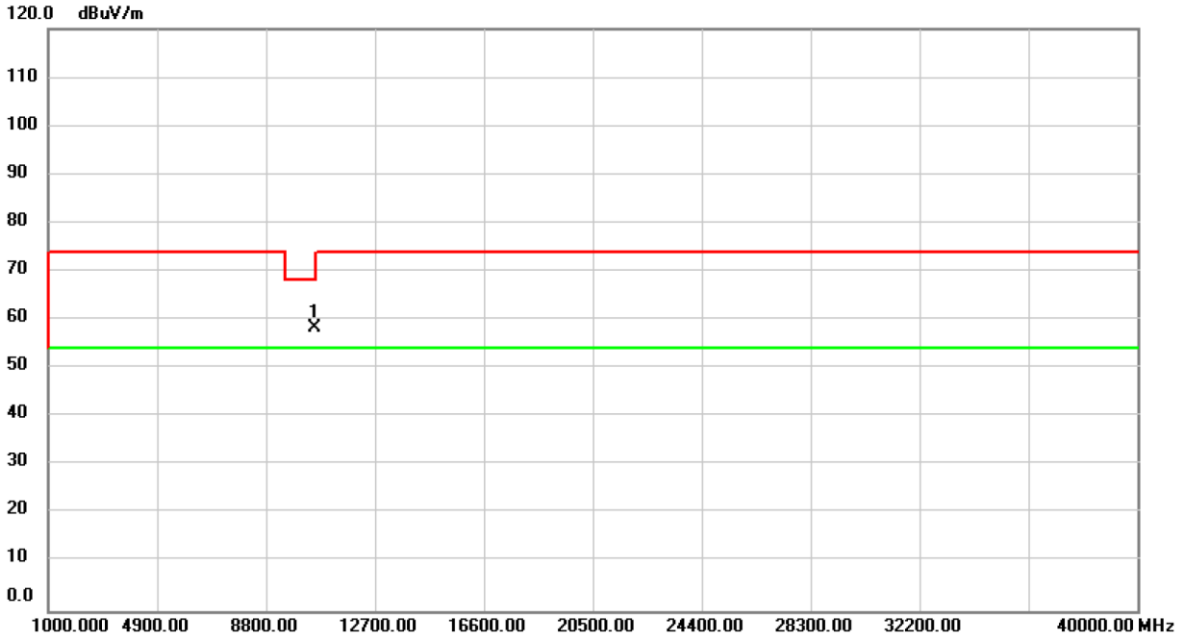

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	55.28	3.02	58.30	68.20	-9.90	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Tested Date	2019/11/14
Test Frequency	CH60: 5300 MHz	Polarization	Vertical

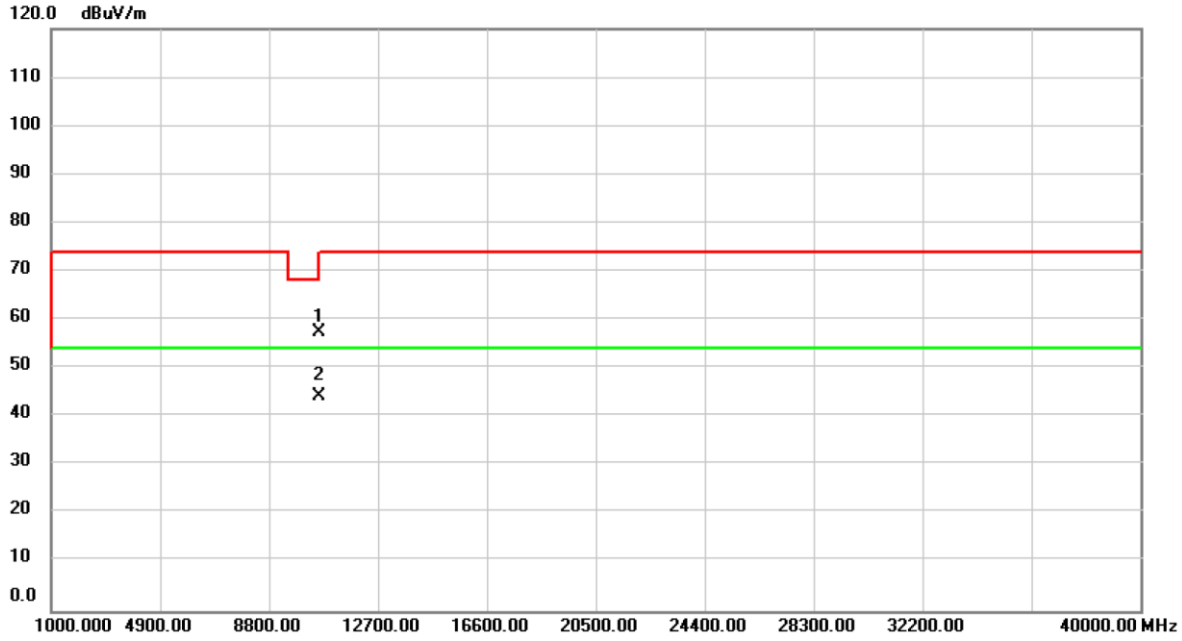

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10600.00	54.51	2.96	57.47	68.20	-10.73	peak	
2	*	10600.00	41.43	2.96	44.39	54.00	-9.61	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Tested Date	2019/11/14
Test Frequency	CH60: 5300 MHz	Polarization	Horizontal

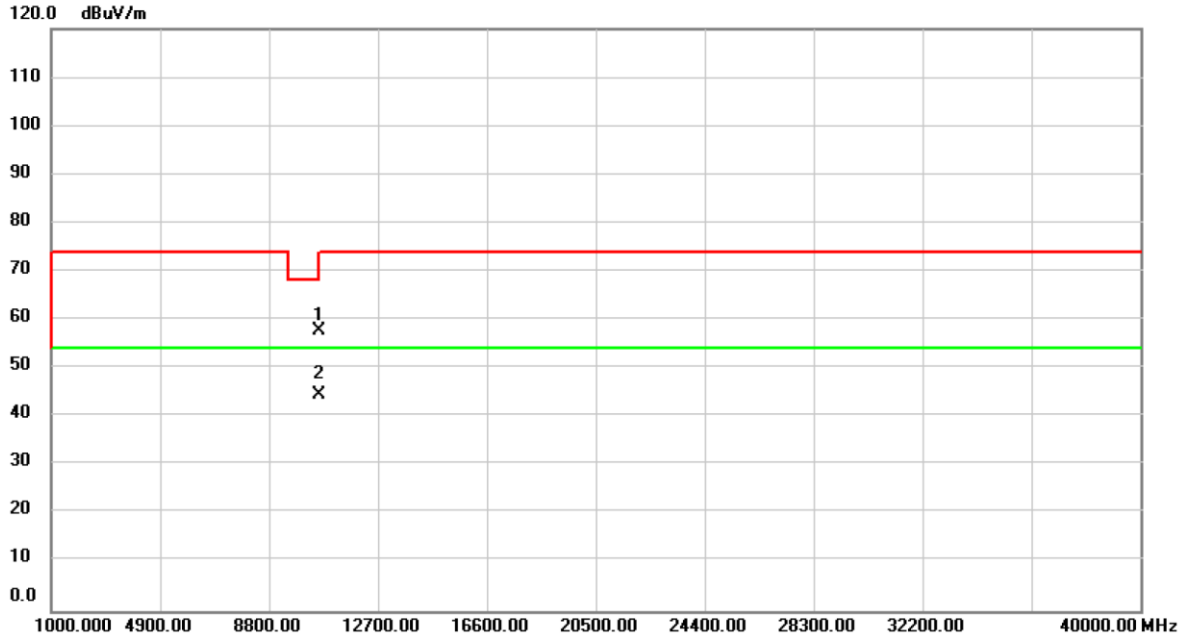

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10600.00	54.73	2.96	57.69	68.20	-10.51	peak	
2	*	10600.00	41.56	2.96	44.52	54.00	-9.48	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Tested Date	2019/11/14
Test Frequency	CH64: 5320 MHz	Polarization	Vertical

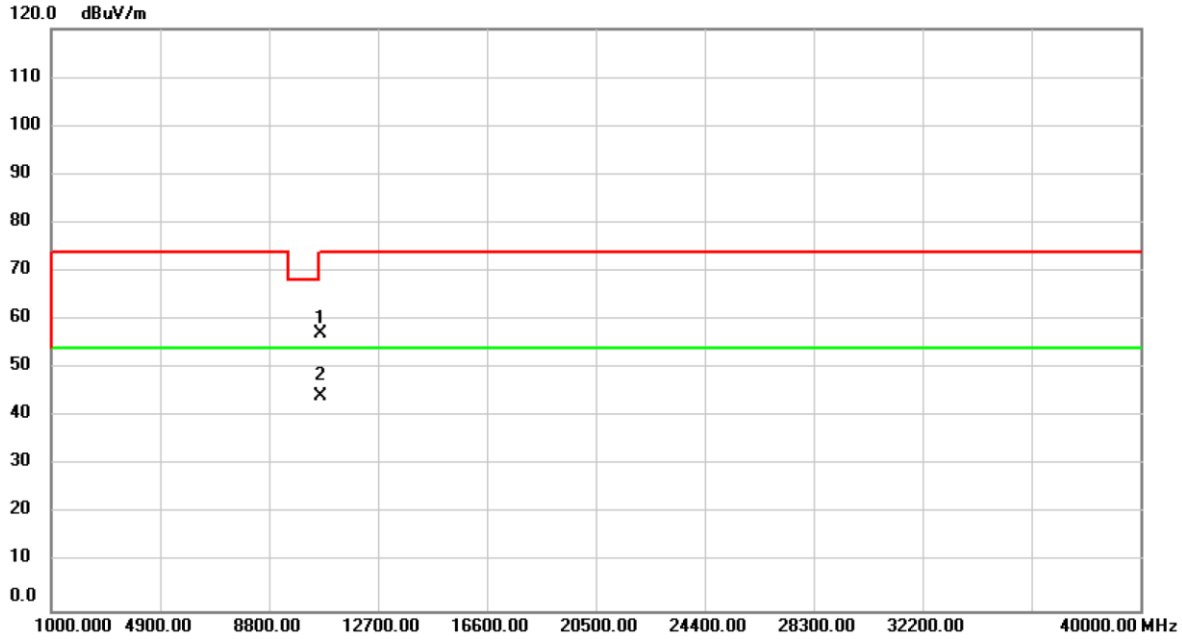

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	54.37	2.93	57.30	74.00	-16.70	peak	
2	*	10640.00	41.46	2.93	44.39	54.00	-9.61	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Tested Date	2019/11/14
Test Frequency	CH64: 5320 MHz	Polarization	Horizontal

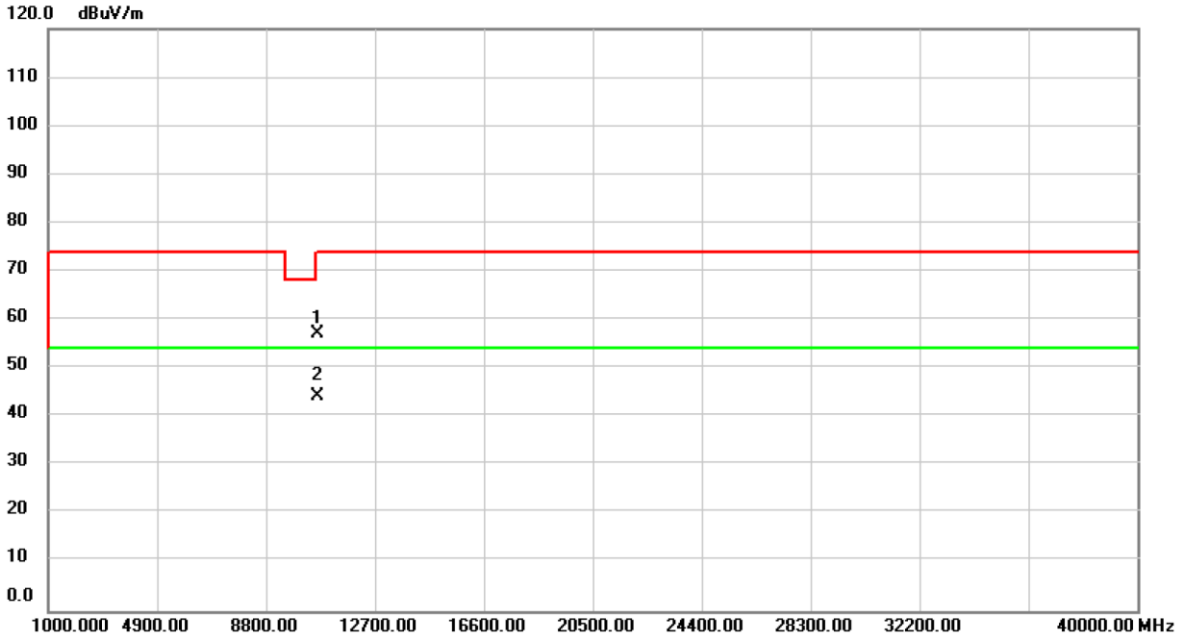

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	54.18	2.93	57.11	74.00	-16.89	peak	
2	*	10640.00	41.19	2.93	44.12	54.00	-9.88	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Tested Date	2019/11/14
Test Frequency	CH100: 5500 MHz	Polarization	Vertical

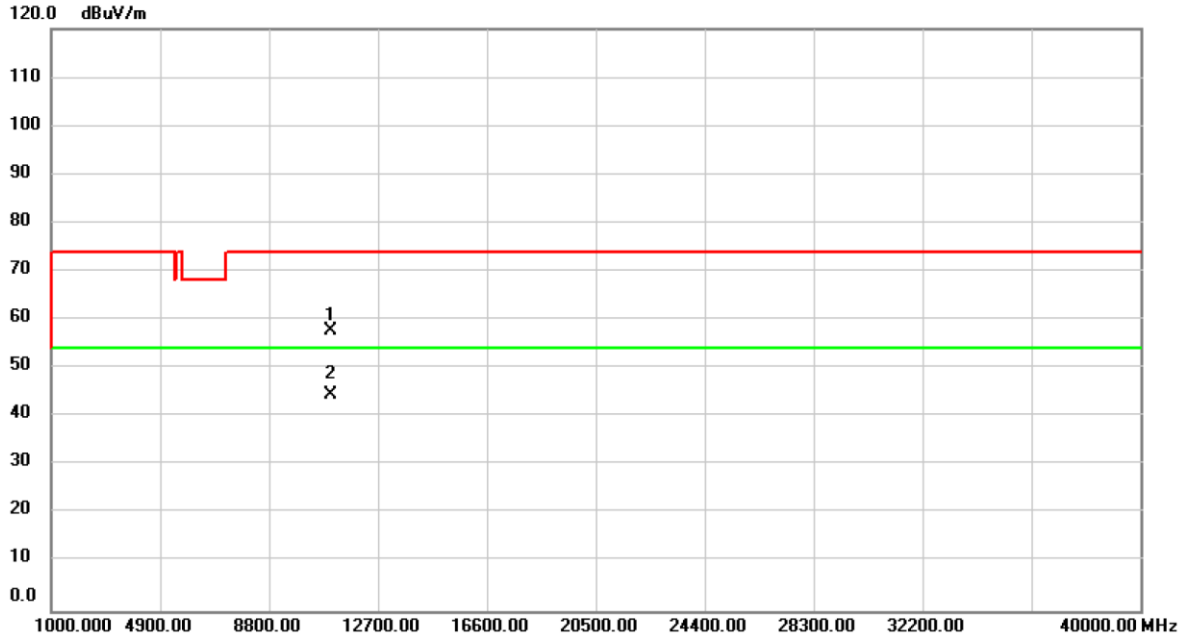

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11000.00	55.22	2.62	57.84	74.00	-16.16	peak	
2	*	11000.00	42.05	2.62	44.67	54.00	-9.33	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Tested Date	2019/11/14
Test Frequency	CH100: 5500 MHz	Polarization	Horizontal

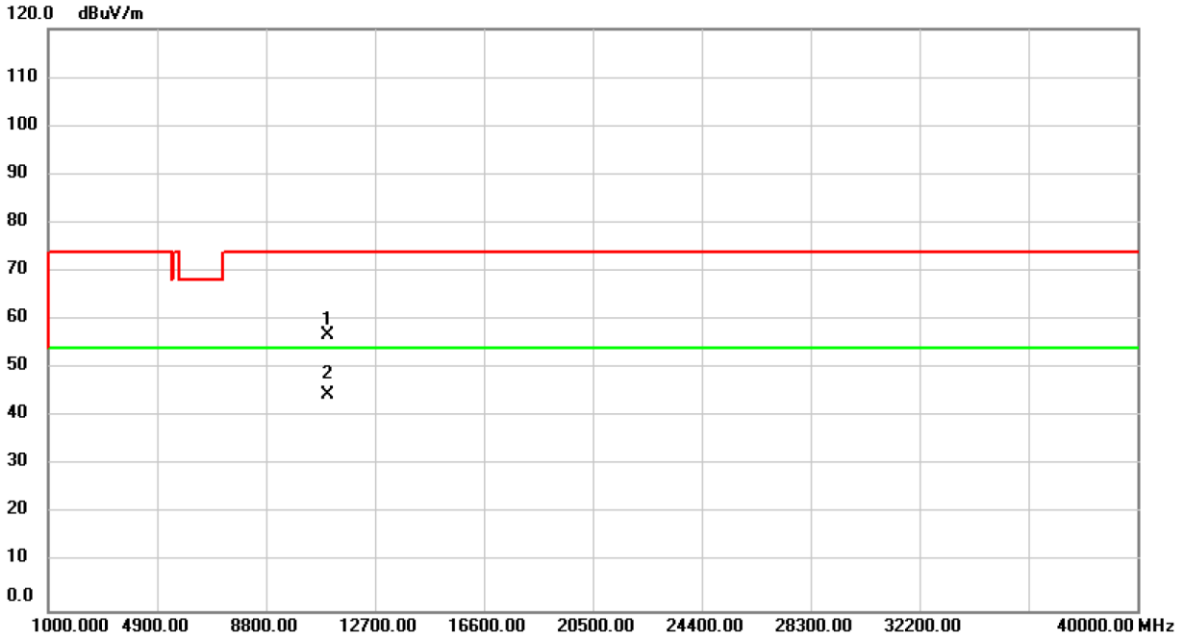

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11000.00	54.35	2.62	56.97	74.00	-17.03	peak	
2	*	11000.00	41.85	2.62	44.47	54.00	-9.53	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Tested Date	2019/11/14
Test Frequency	CH116: 5580 MHz	Polarization	Vertical

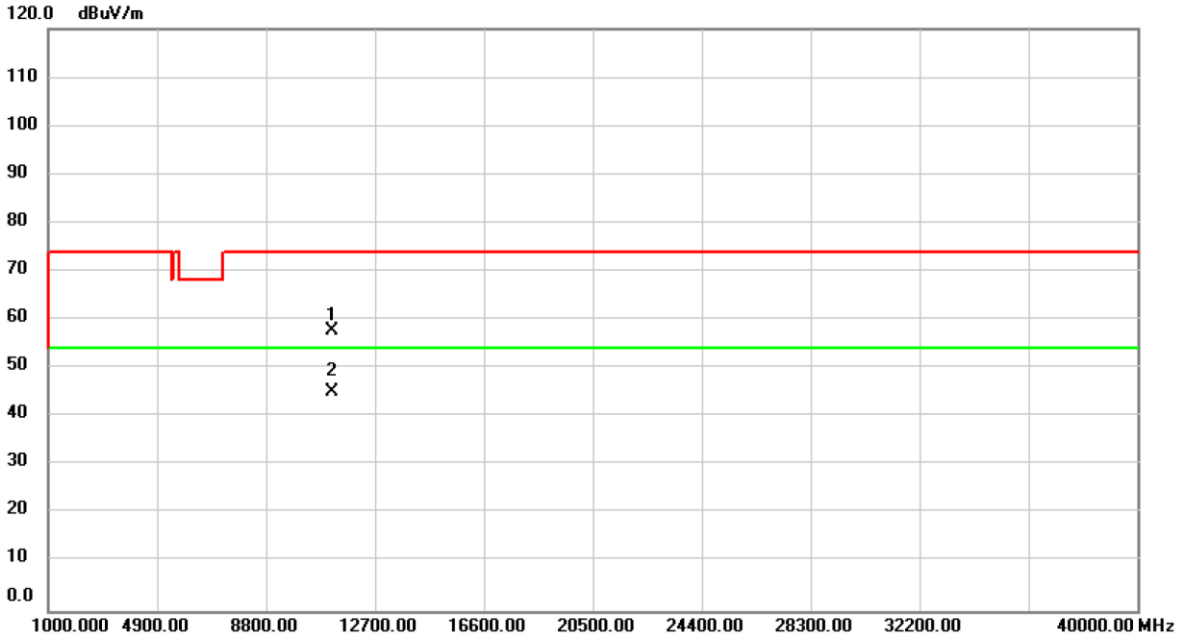

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11160.00	54.86	3.03	57.89	74.00	-16.11	peak	
2	*	11160.00	42.07	3.03	45.10	54.00	-8.90	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Tested Date	2019/11/14
Test Frequency	CH116: 5580 MHz	Polarization	Horizontal

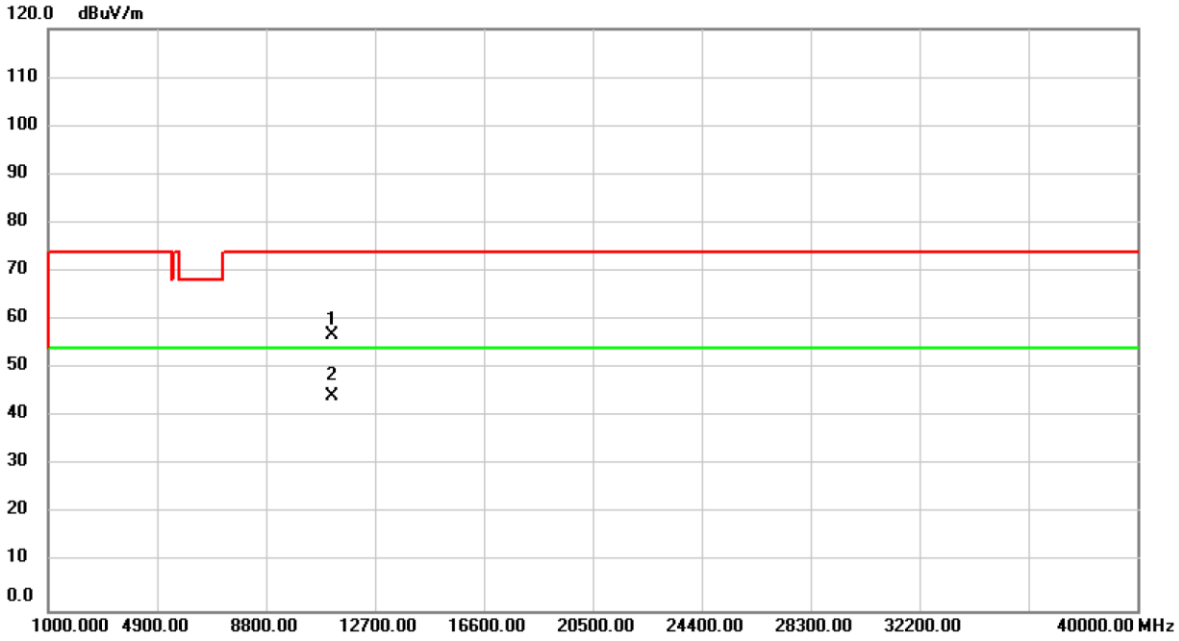

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11160.00	53.71	3.03	56.74	74.00	-17.26	peak	
2	*	11160.00	41.35	3.03	44.38	54.00	-9.62	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Tested Date	2019/11/14
Test Frequency	CH140: 5700 MHz	Polarization	Vertical

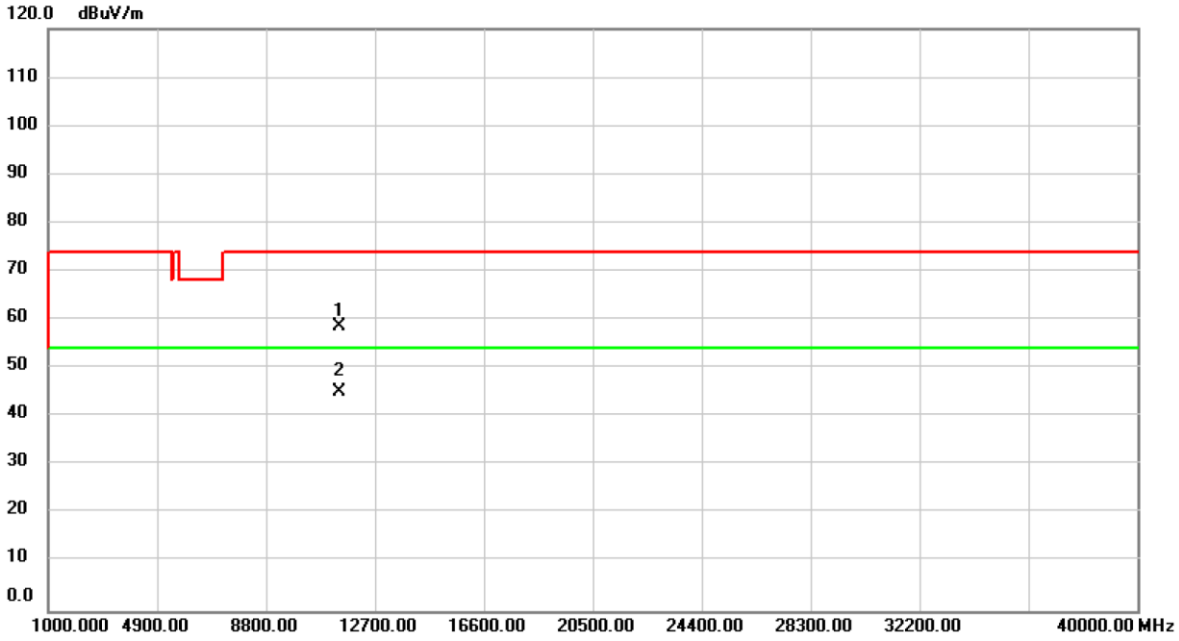

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	55.03	3.65	58.68	74.00	-15.32	peak	
2	*	11400.00	41.46	3.65	45.11	54.00	-8.89	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Tested Date	2019/11/14
Test Frequency	CH140: 5700 MHz	Polarization	Horizontal

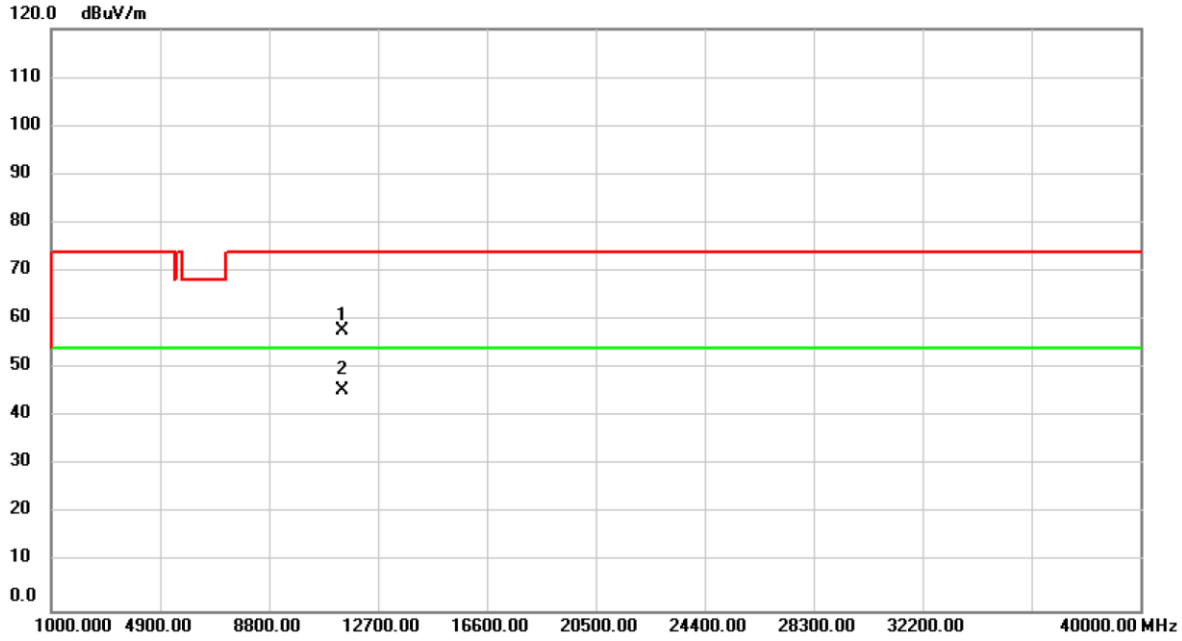

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	54.02	3.65	57.67	74.00	-16.33	peak	
2	*	11400.00	41.66	3.65	45.31	54.00	-8.69	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Tested Date	2019/11/14
Test Frequency	CH149: 5745 MHz	Polarization	Vertical

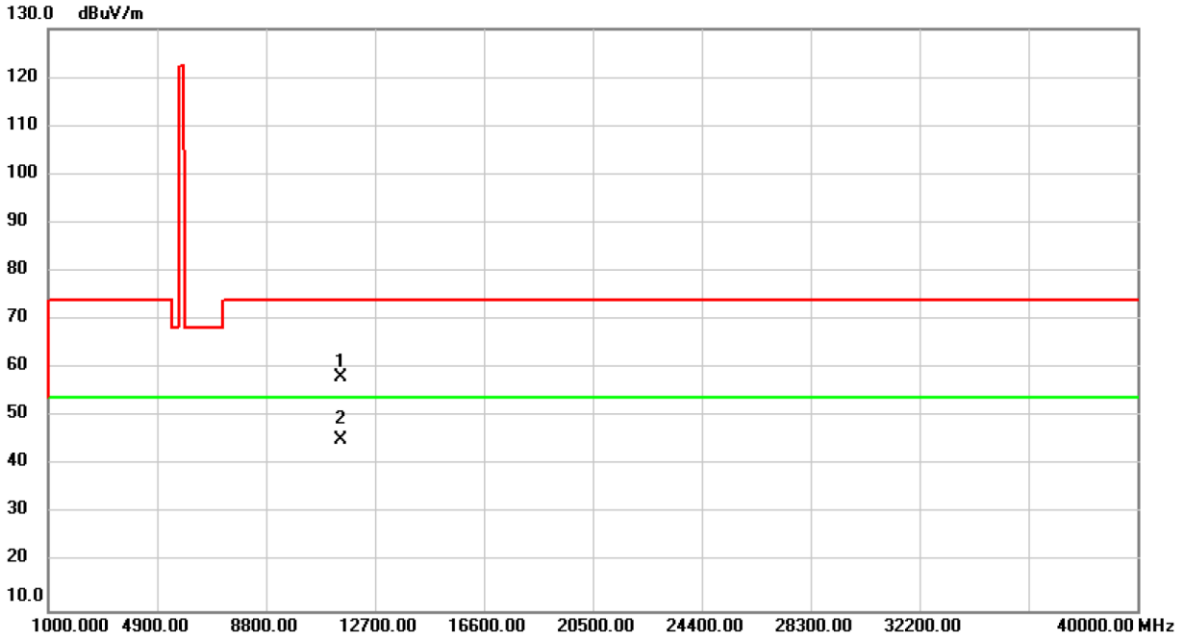

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	54.26	3.89	58.15	74.00	-15.85	peak	
2	*	11490.00	41.48	3.89	45.37	54.00	-8.63	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Tested Date	2019/11/14
Test Frequency	CH149: 5745 MHz	Polarization	Horizontal

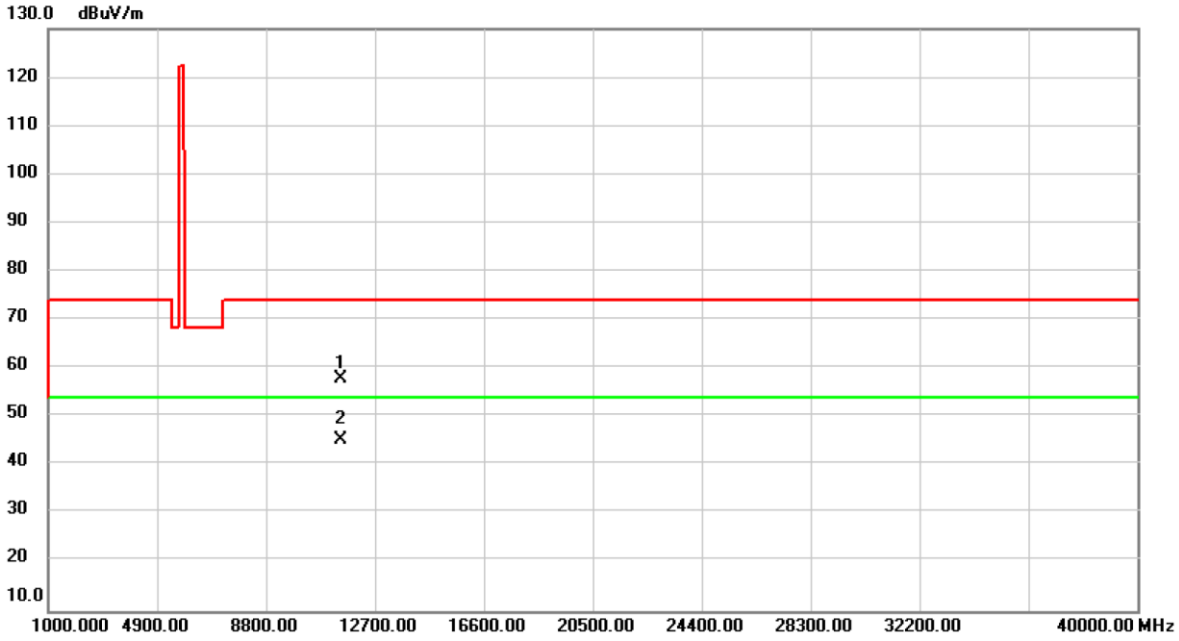

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	54.09	3.89	57.98	74.00	-16.02	peak	
2	*	11490.00	41.40	3.89	45.29	54.00	-8.71	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Tested Date	2019/11/14
Test Frequency	CH157: 5785 MHz	Polarization	Vertical

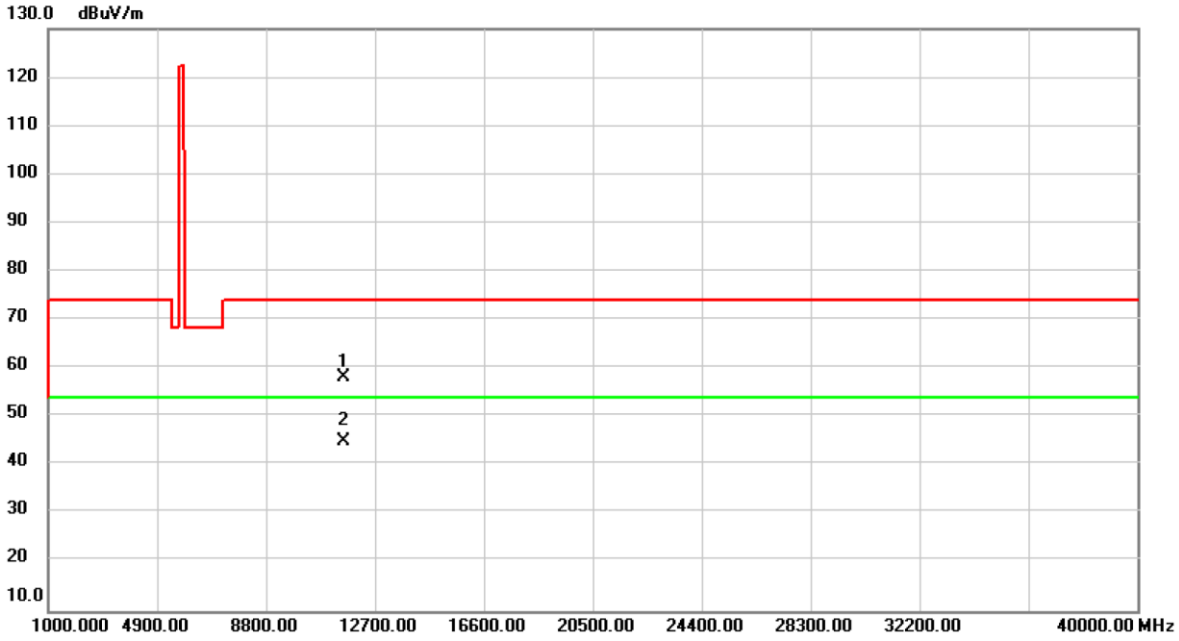

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.00	54.49	3.57	58.06	74.00	-15.94	peak	
2	*	11570.00	41.34	3.57	44.91	54.00	-9.09	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Tested Date	2019/11/14
Test Frequency	CH157: 5785 MHz	Polarization	Horizontal

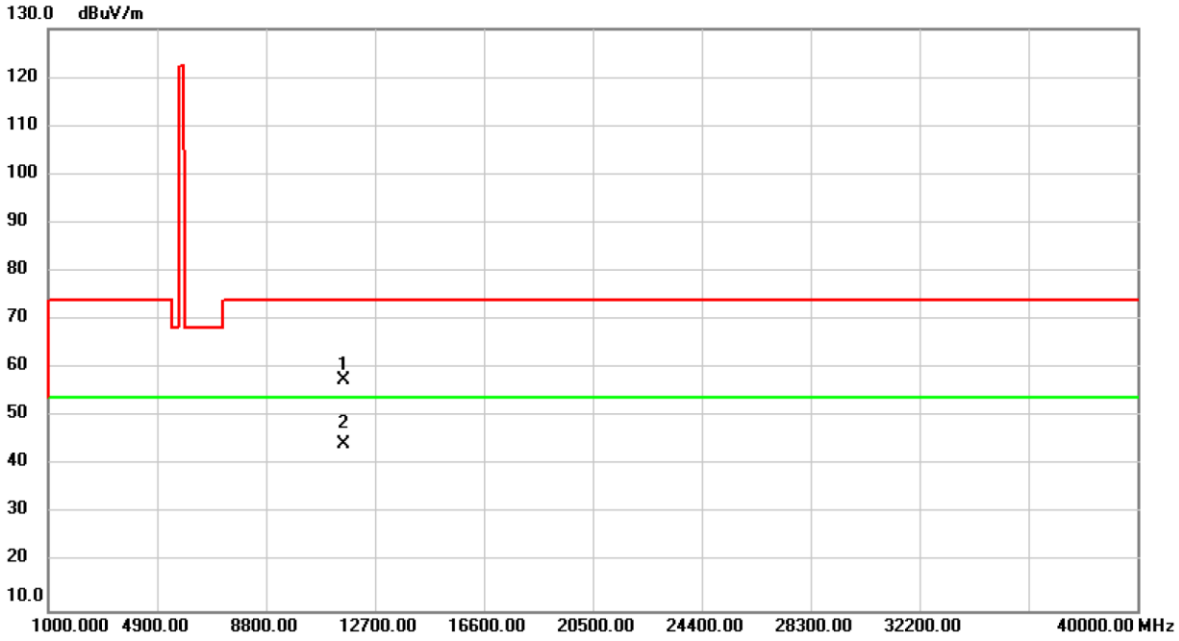

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.00	54.02	3.57	57.59	74.00	-16.41	peak	
2	*	11570.00	40.84	3.57	44.41	54.00	-9.59	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Tested Date	2019/11/14
Test Frequency	CH165: 5825 MHz	Polarization	Vertical

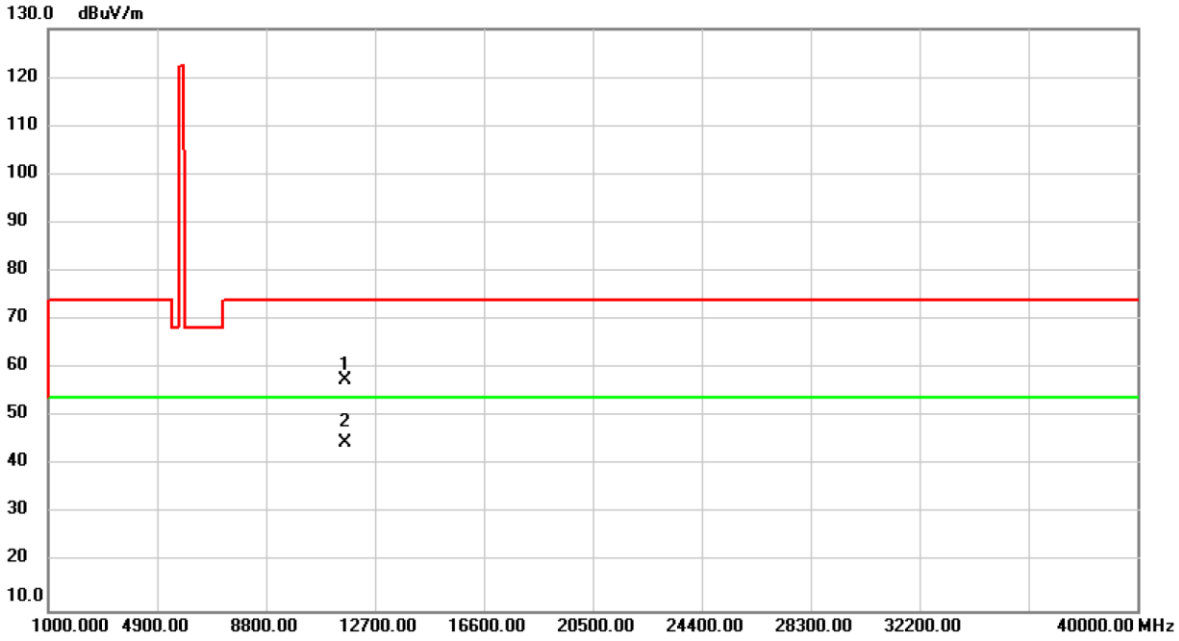

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.00	54.27	3.18	57.45	74.00	-16.55	peak	
2	*	11650.00	41.54	3.18	44.72	54.00	-9.28	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Tested Date	2019/11/14
Test Frequency	CH165: 5825 MHz	Polarization	Horizontal

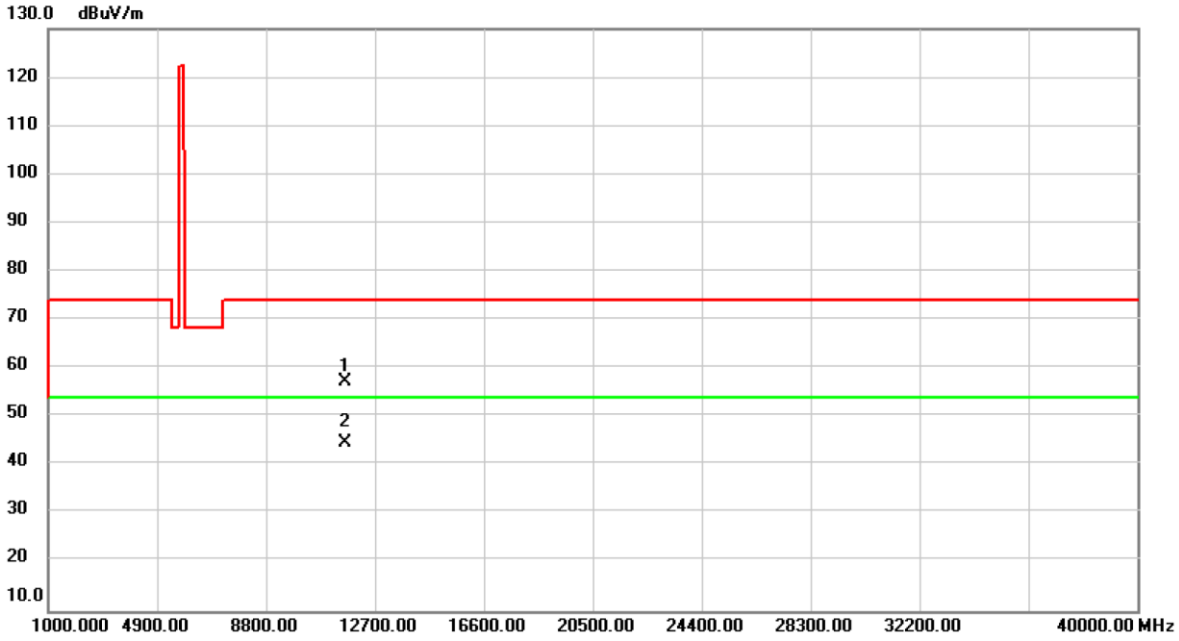

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.00	53.97	3.18	57.15	74.00	-16.85	peak	
2	*	11650.00	41.48	3.18	44.66	54.00	-9.34	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Tested Date	2019/11/12
Test Frequency	CH38: 5190 MHz	Polarization	Vertical

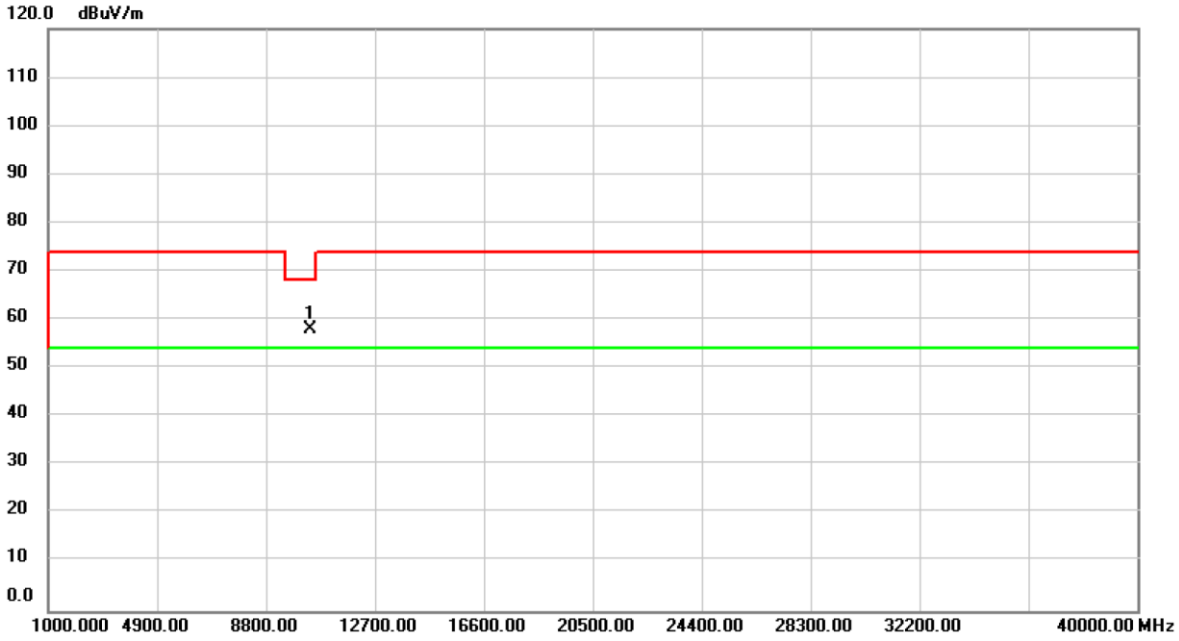

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	55.29	2.85	58.14	68.20	-10.06	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Tested Date	2019/11/12
Test Frequency	CH38: 5190 MHz	Polarization	Horizontal

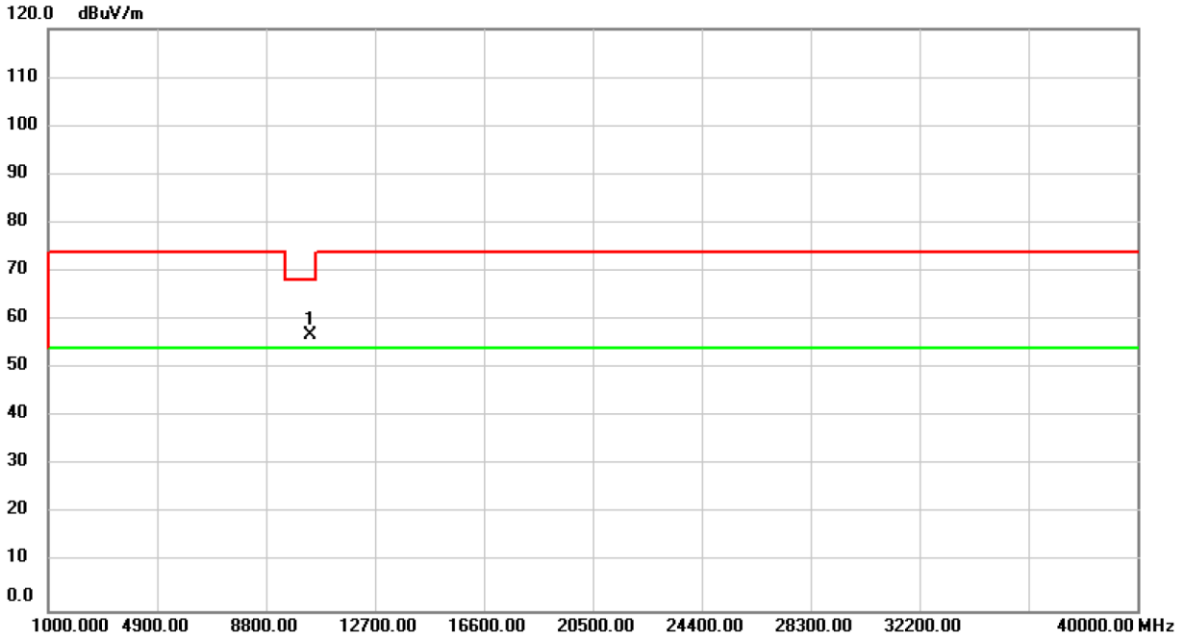

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	54.05	2.85	56.90	68.20	-11.30	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Tested Date	2019/11/12
Test Frequency	CH46: 5230 MHz	Polarization	Vertical

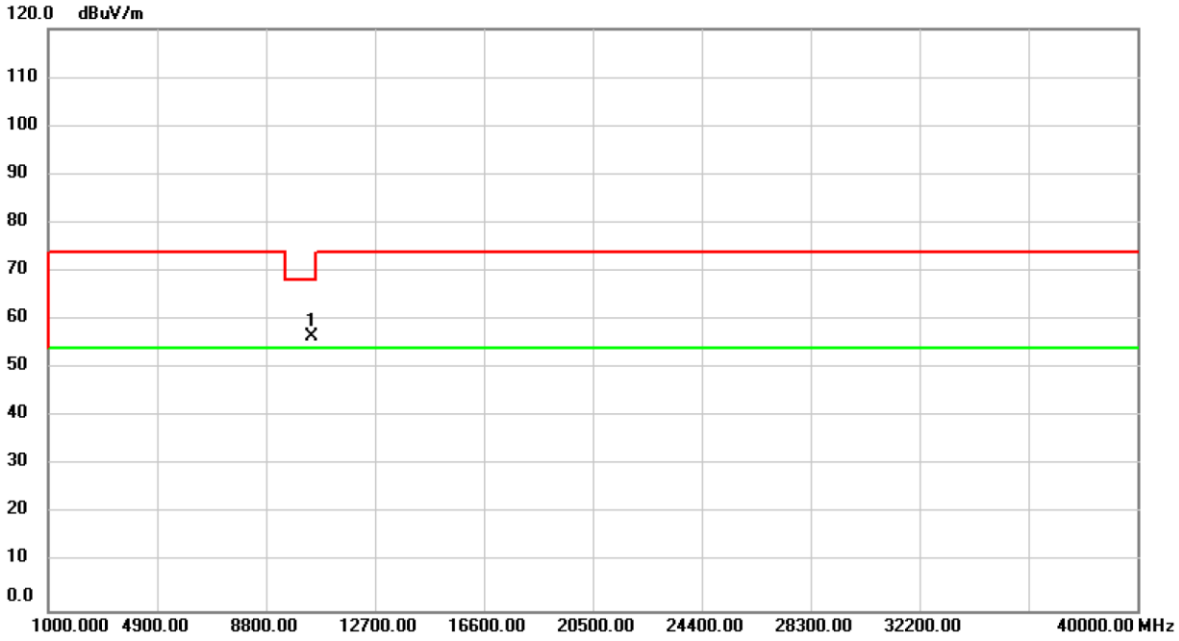

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	53.63	2.98	56.61	68.20	-11.59	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Tested Date	2019/11/12
Test Frequency	CH46: 5230 MHz	Polarization	Horizontal

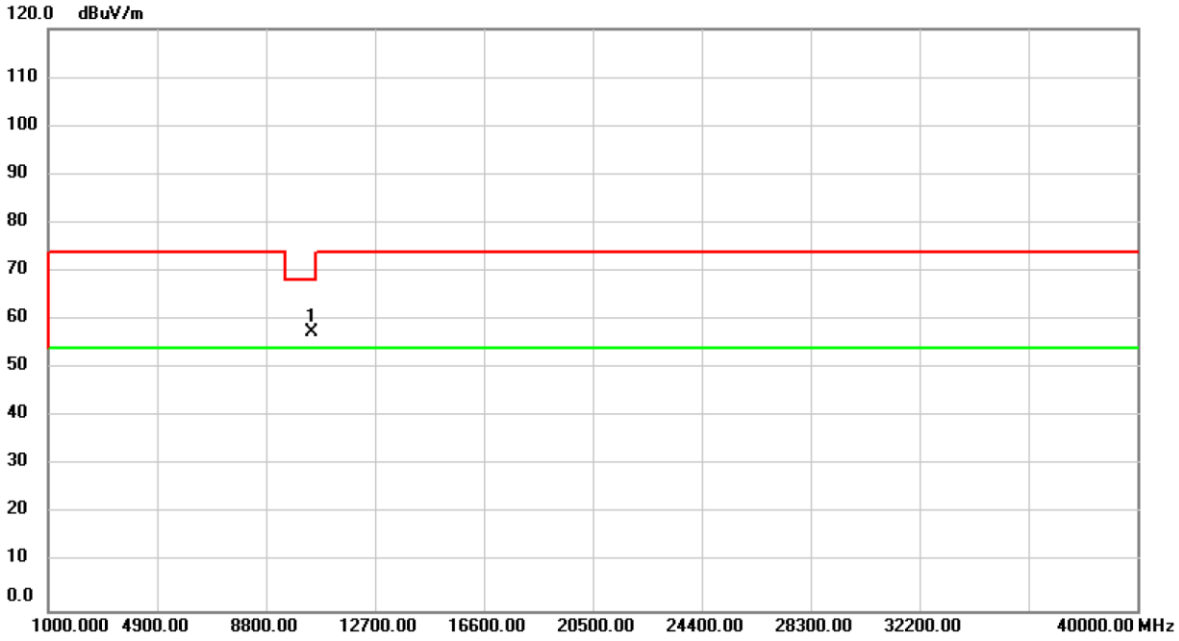

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	54.60	2.98	57.58	68.20	-10.62	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Tested Date	2019/11/12
Test Frequency	CH54: 5270 MHz	Polarization	Vertical

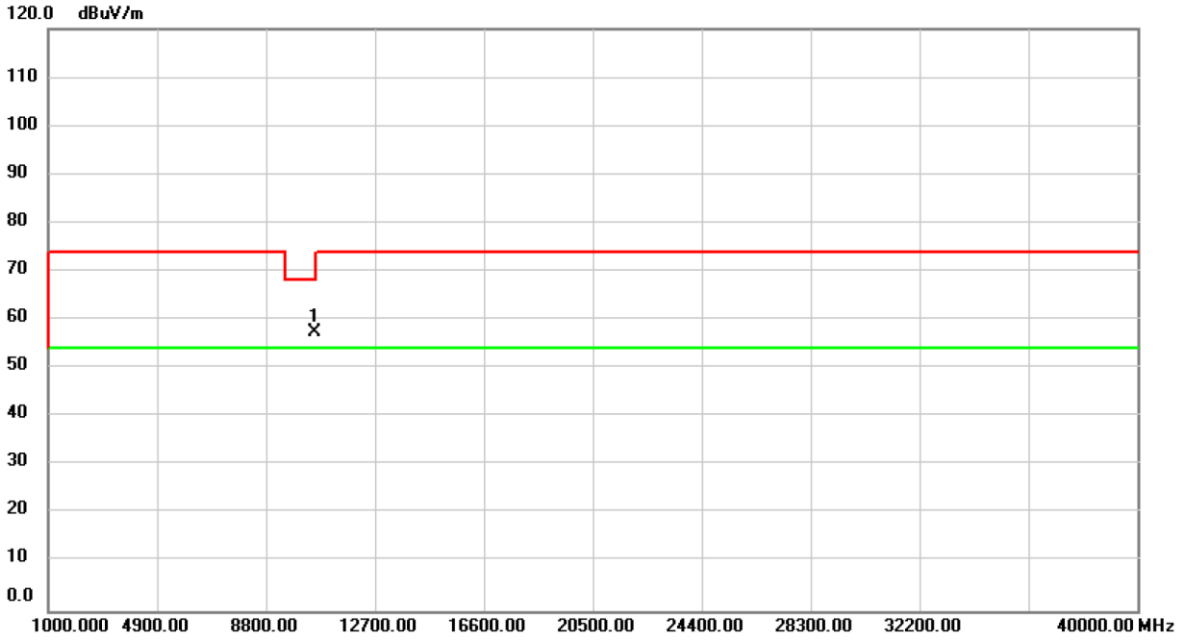

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	54.40	3.01	57.41	68.20	-10.79	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Tested Date	2019/11/12
Test Frequency	CH54: 5270 MHz	Polarization	Horizontal

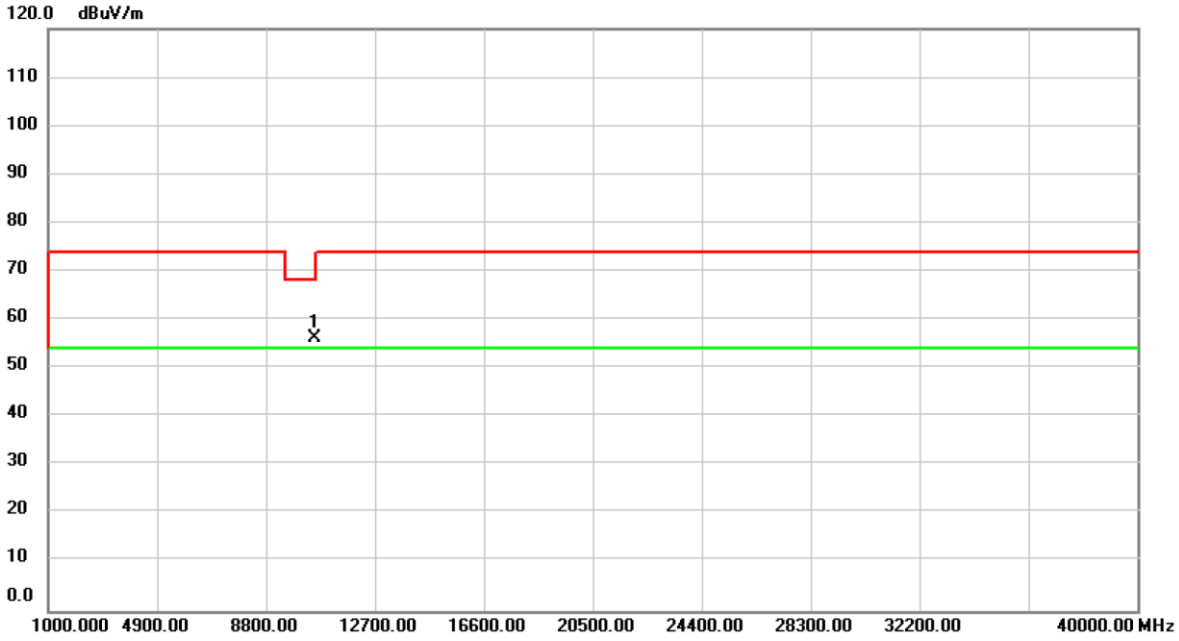

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	53.27	3.01	56.28	68.20	-11.92	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Tested Date	2019/11/12
Test Frequency	CH62: 5310 MHz	Polarization	Vertical

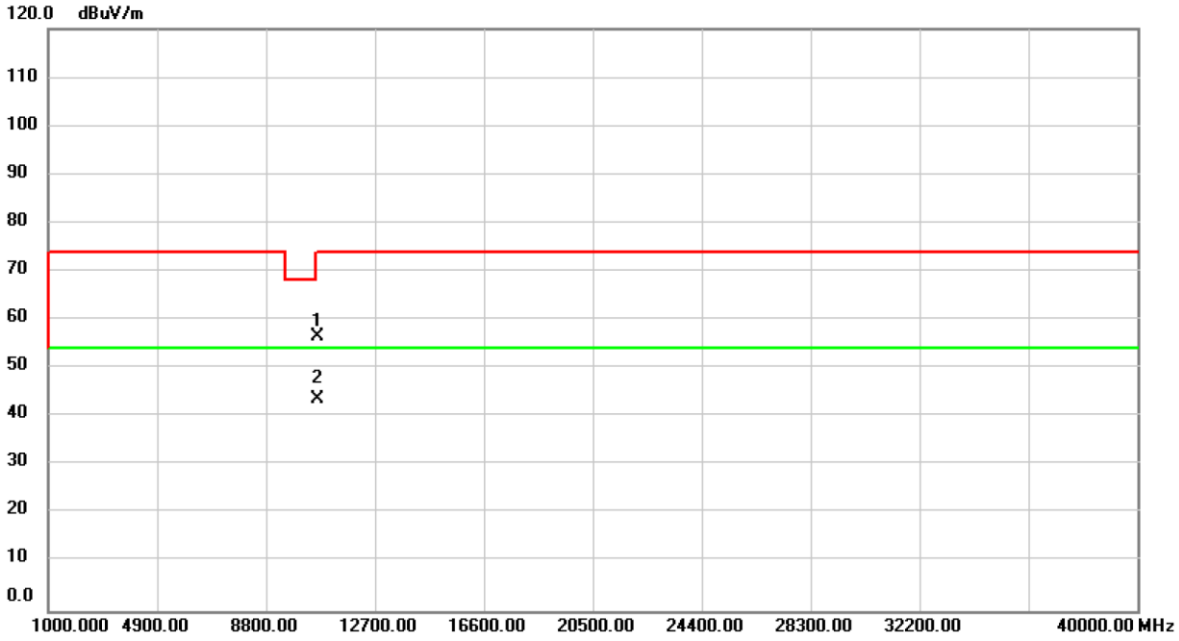

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10620.00	53.69	2.94	56.63	74.00	-17.37	peak	
2	*	10620.00	40.79	2.94	43.73	54.00	-10.27	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Tested Date	2019/11/12
Test Frequency	CH62: 5310 MHz	Polarization	Horizontal

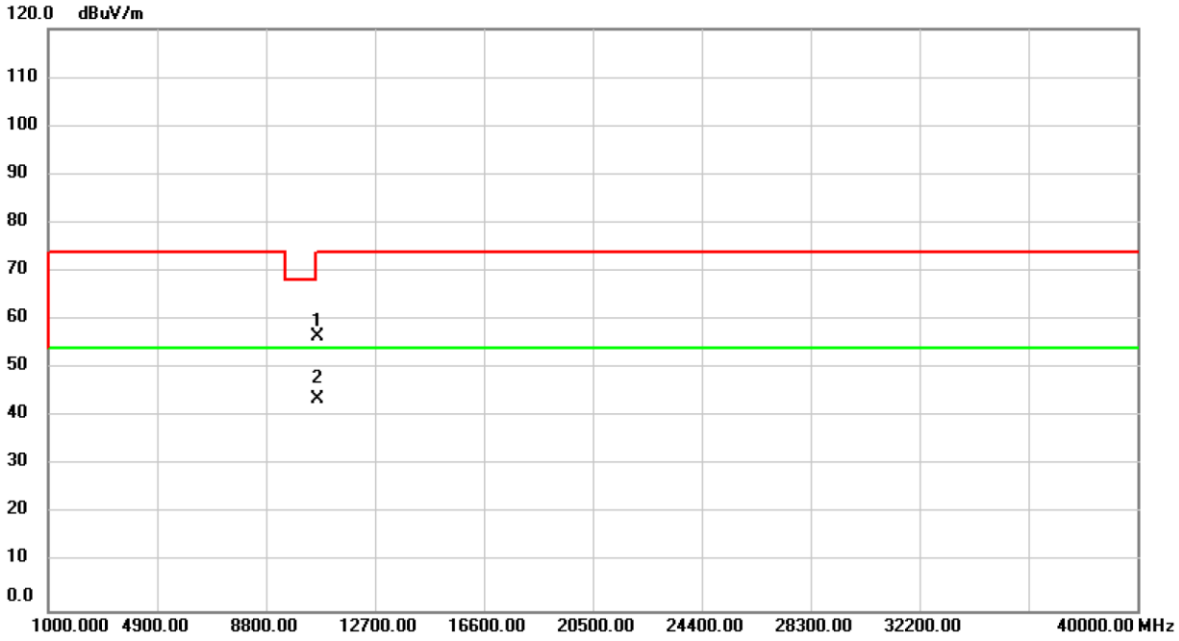

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10620.00	53.66	2.94	56.60	74.00	-17.40	peak	
2	*	10620.00	40.73	2.94	43.67	54.00	-10.33	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Tested Date	2019/11/12
Test Frequency	CH102: 5510 MHz	Polarization	Vertical

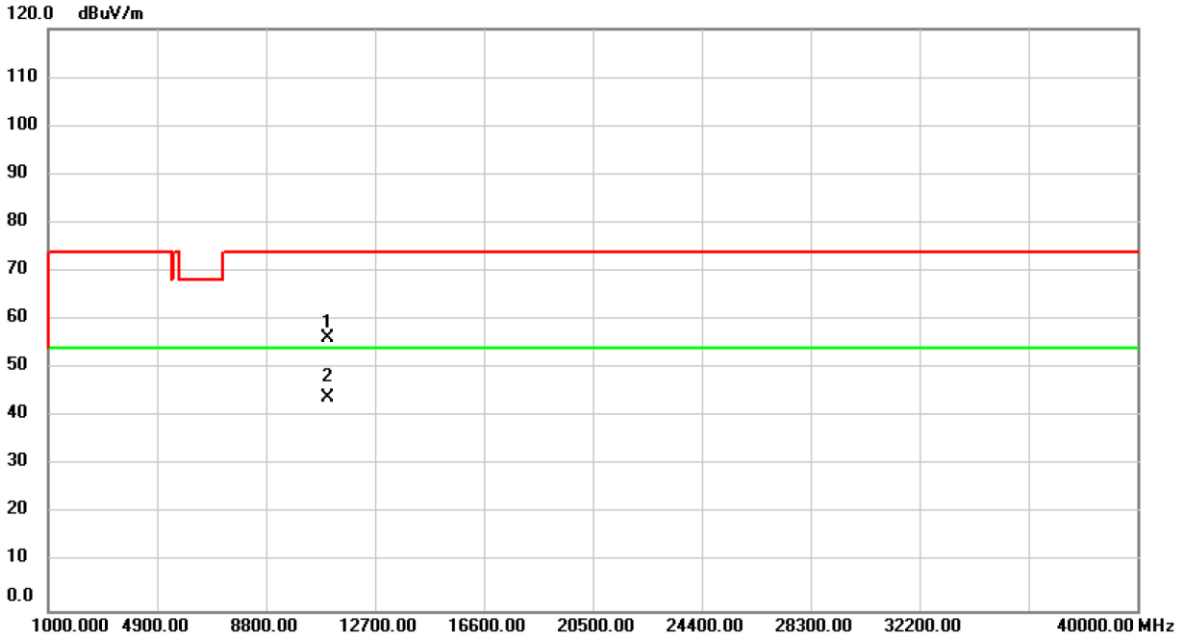

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11020.00	53.63	2.67	56.30	74.00	-17.70	peak	
2	*	11020.00	41.20	2.67	43.87	54.00	-10.13	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Tested Date	2019/11/12
Test Frequency	CH102: 5510 MHz	Polarization	Horizontal

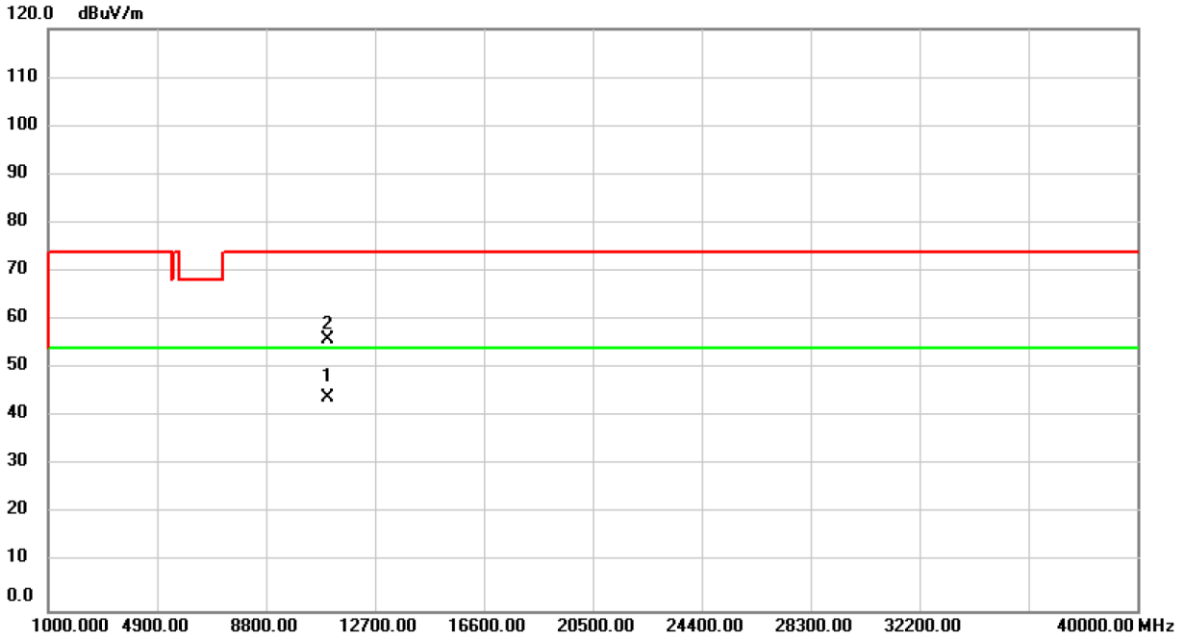

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11020.00	41.32	2.67	43.99	54.00	-10.01	AVG	
2		11020.00	53.20	2.67	55.87	74.00	-18.13	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Tested Date	2019/11/12
Test Frequency	CH110: 5550 MHz	Polarization	Vertical

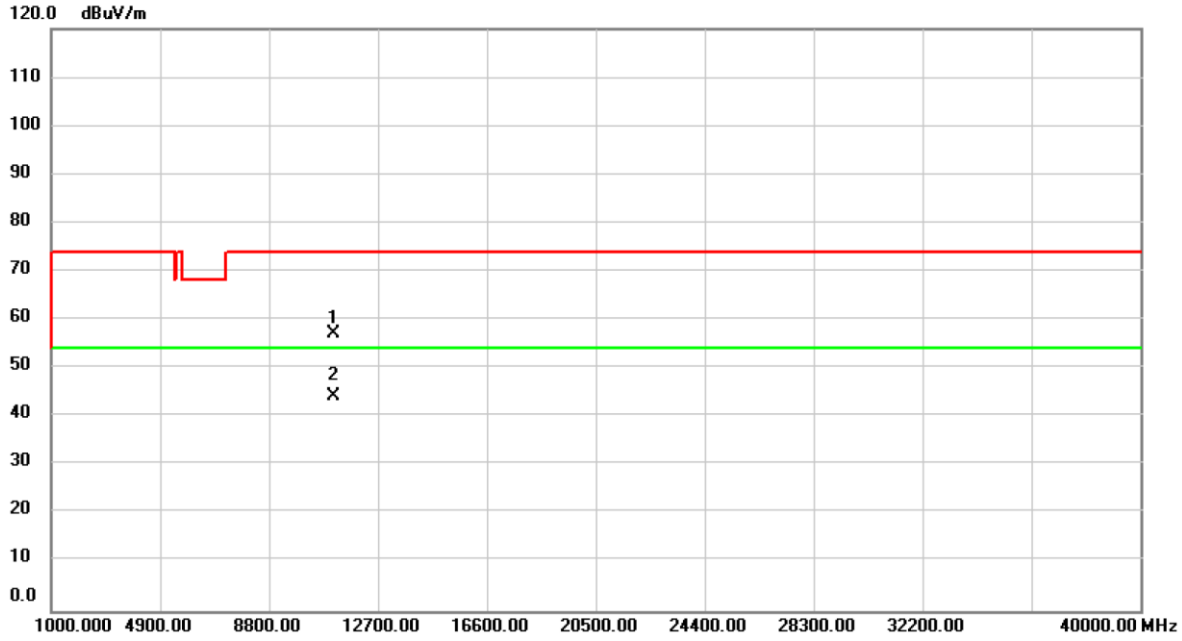

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11100.00	54.14	2.88	57.02	74.00	-16.98	peak	
2	*	11100.00	41.46	2.88	44.34	54.00	-9.66	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Tested Date	2019/11/12
Test Frequency	CH110: 5550 MHz	Polarization	Horizontal

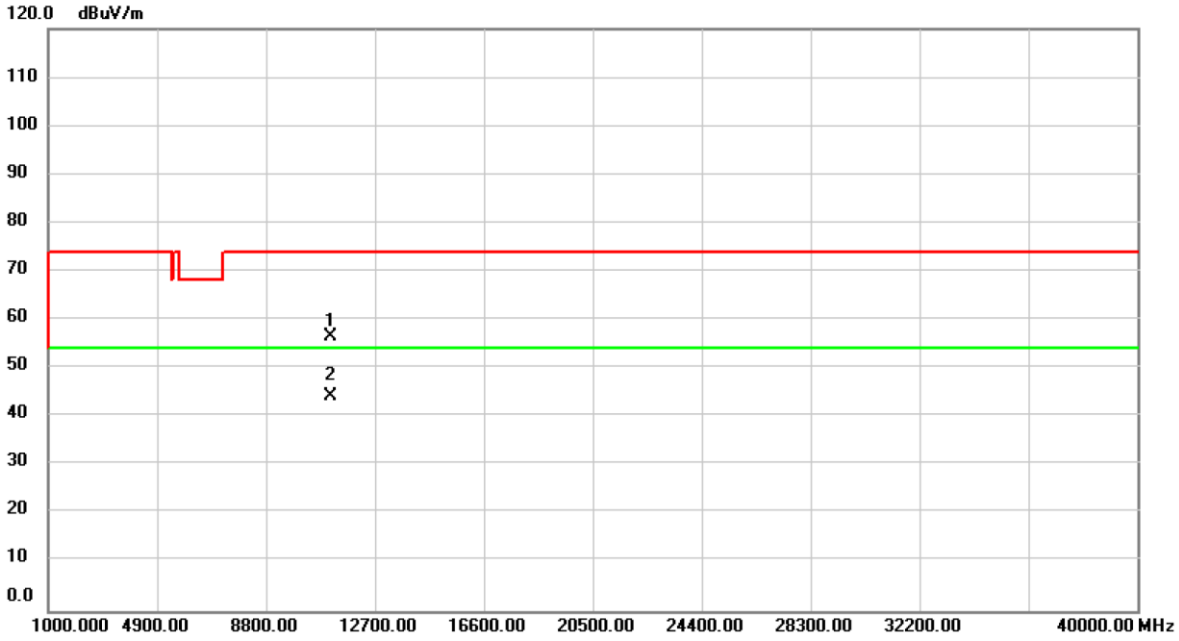

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11100.00	53.76	2.88	56.64	74.00	-17.36	peak	
2	*	11100.00	41.23	2.88	44.11	54.00	-9.89	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Tested Date	2019/11/12
Test Frequency	CH134: 5670 MHz	Polarization	Vertical

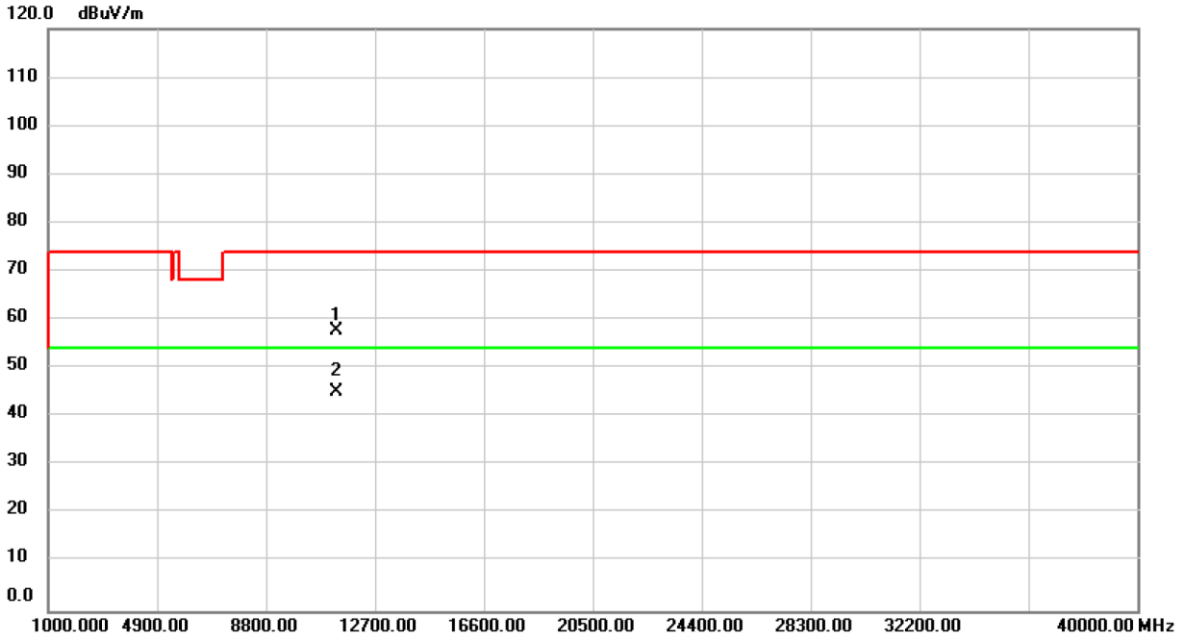

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11340.00	54.28	3.50	57.78	74.00	-16.22	peak	
2	*	11340.00	41.58	3.50	45.08	54.00	-8.92	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Tested Date	2019/11/12
Test Frequency	CH134: 5670 MHz	Polarization	Horizontal

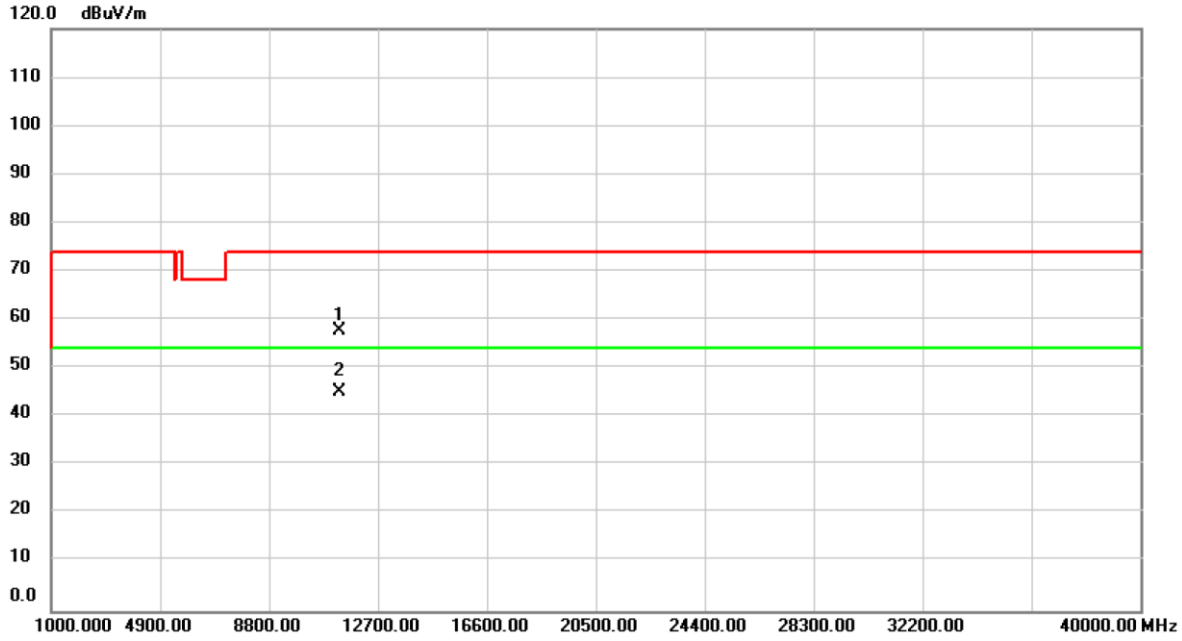

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11340.00	54.29	3.50	57.79	74.00	-16.21	peak	
2	*	11340.00	41.70	3.50	45.20	54.00	-8.80	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Tested Date	2019/11/12
Test Frequency	CH151: 5755 MHz	Polarization	Vertical

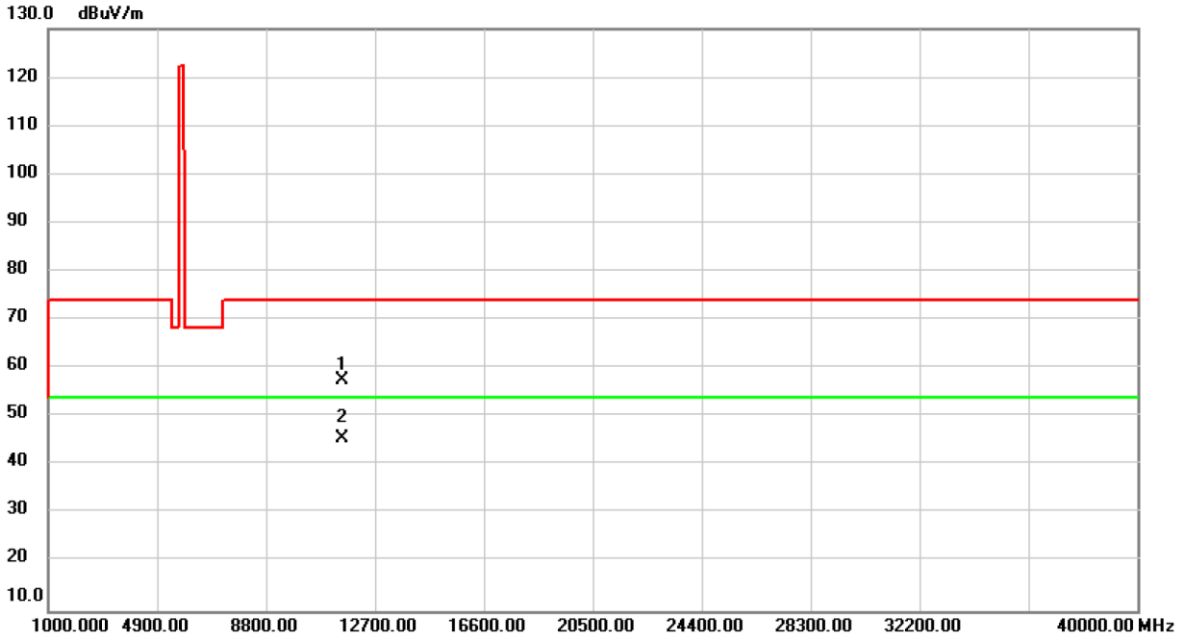

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11510.00	53.83	3.86	57.69	74.00	-16.31	peak	
2	*	11510.00	41.63	3.86	45.49	54.00	-8.51	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Tested Date	2019/11/12
Test Frequency	CH151: 5755 MHz	Polarization	Horizontal

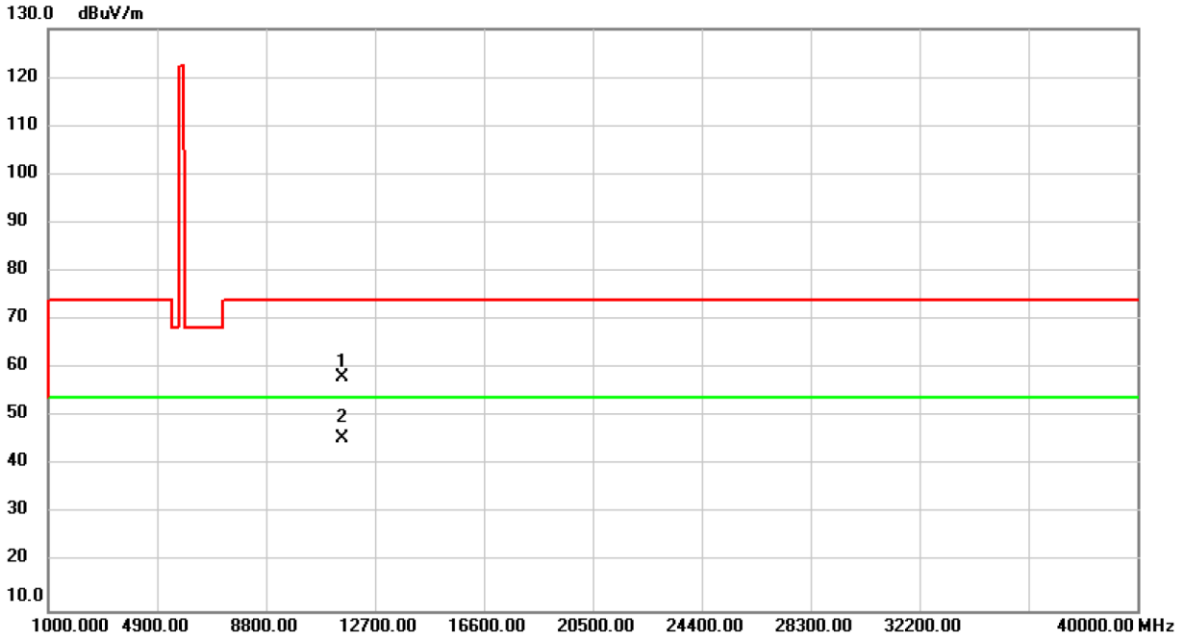

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11510.00	54.24	3.86	58.10	74.00	-15.90	peak	
2	*	11510.00	41.73	3.86	45.59	54.00	-8.41	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Tested Date	2019/11/12
Test Frequency	CH159: 5795 MHz	Polarization	Vertical

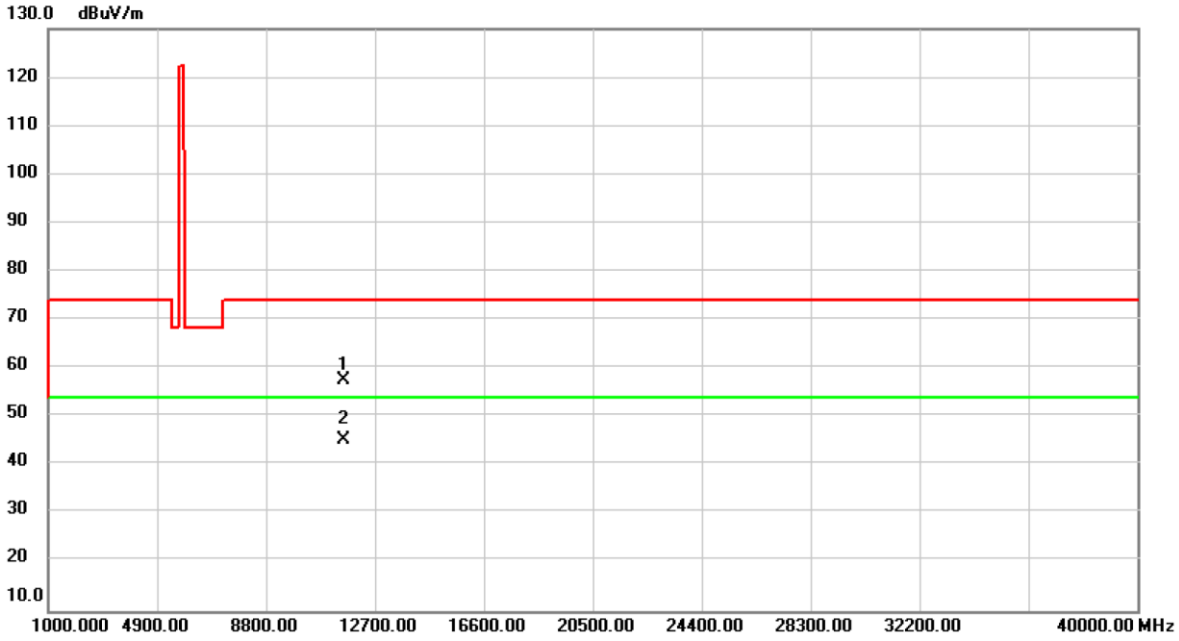

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11590.00	54.01	3.47	57.48	74.00	-16.52	peak	
2	*	11590.00	41.64	3.47	45.11	54.00	-8.89	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Tested Date	2019/11/12
Test Frequency	CH159: 5795 MHz	Polarization	Horizontal

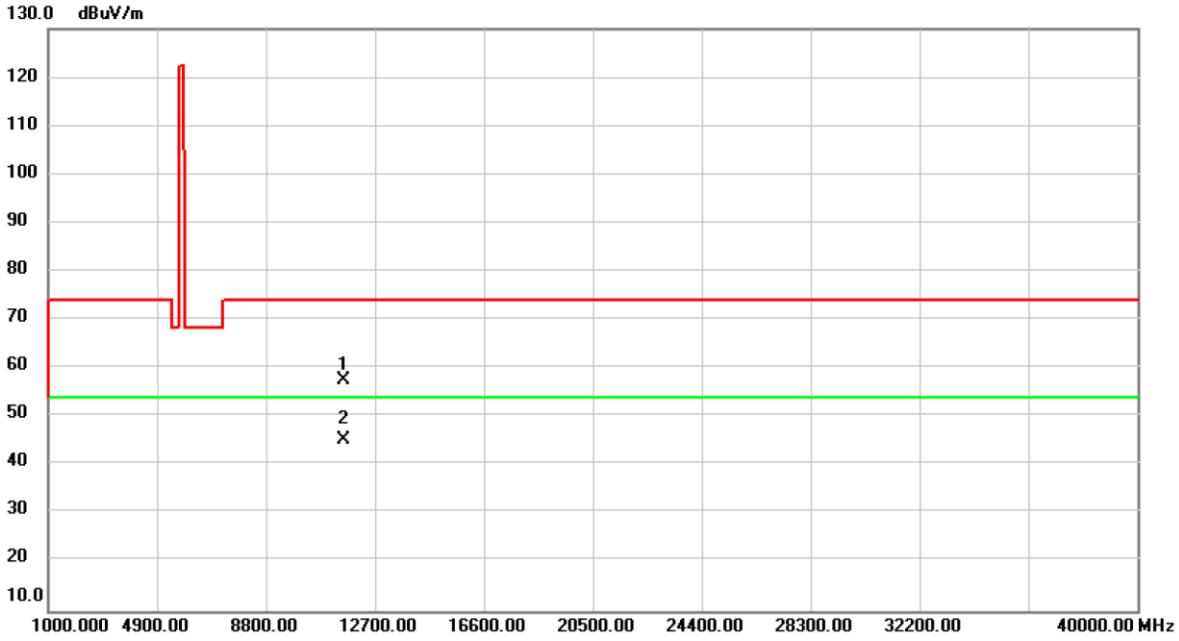

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11590.00	53.95	3.47	57.42	74.00	-16.58	peak	
2	*	11590.00	41.63	3.47	45.10	54.00	-8.90	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Tested Date	2019/11/12
Test Frequency	CH42: 5210 MHz	Polarization	Vertical

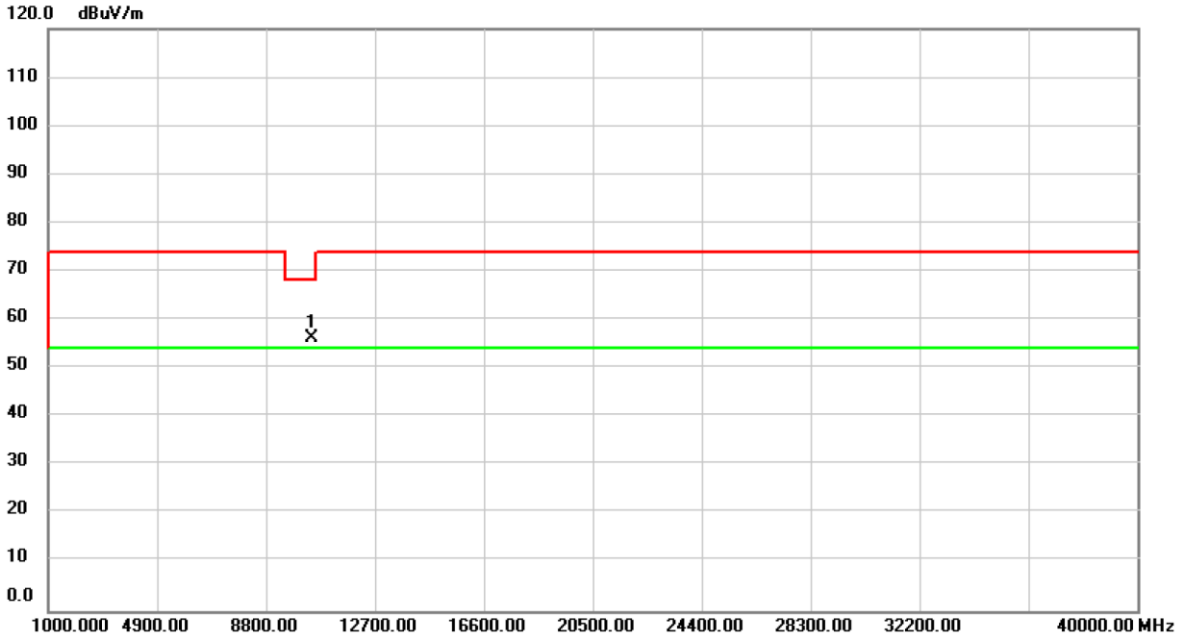

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	53.44	2.91	56.35	68.20	-11.85	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Tested Date	2019/11/12
Test Frequency	CH42: 5210 MHz	Polarization	Horizontal

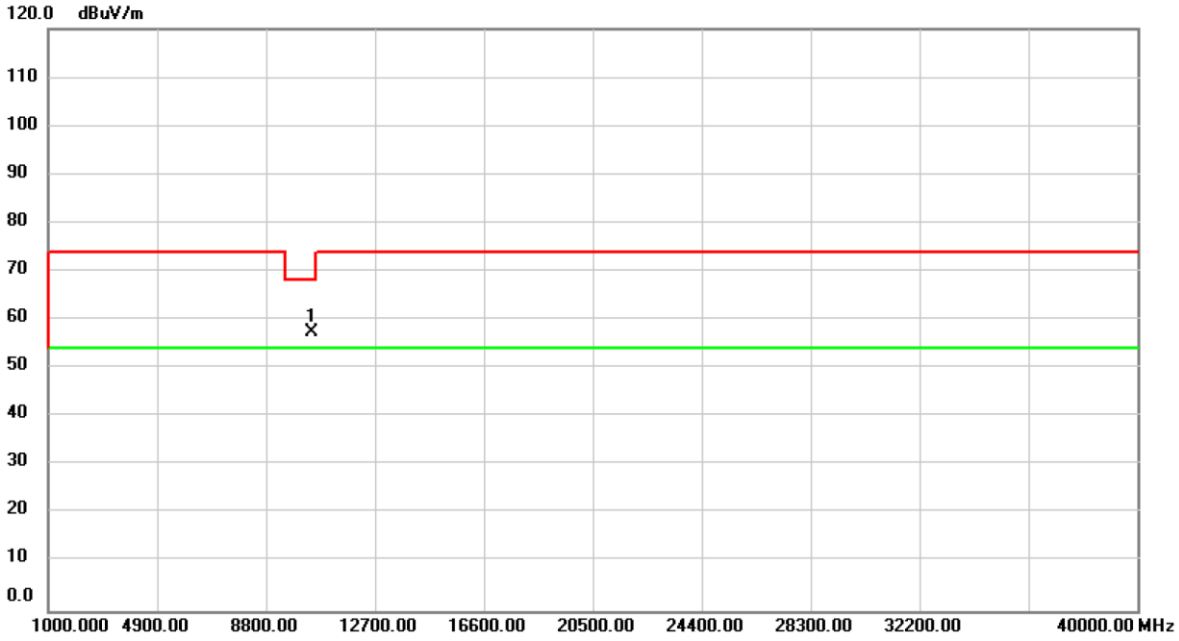

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.84	54.65	2.91	57.56	68.20	-10.64	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Tested Date	2019/11/12
Test Frequency	CH58: 5290 MHz	Polarization	Vertical

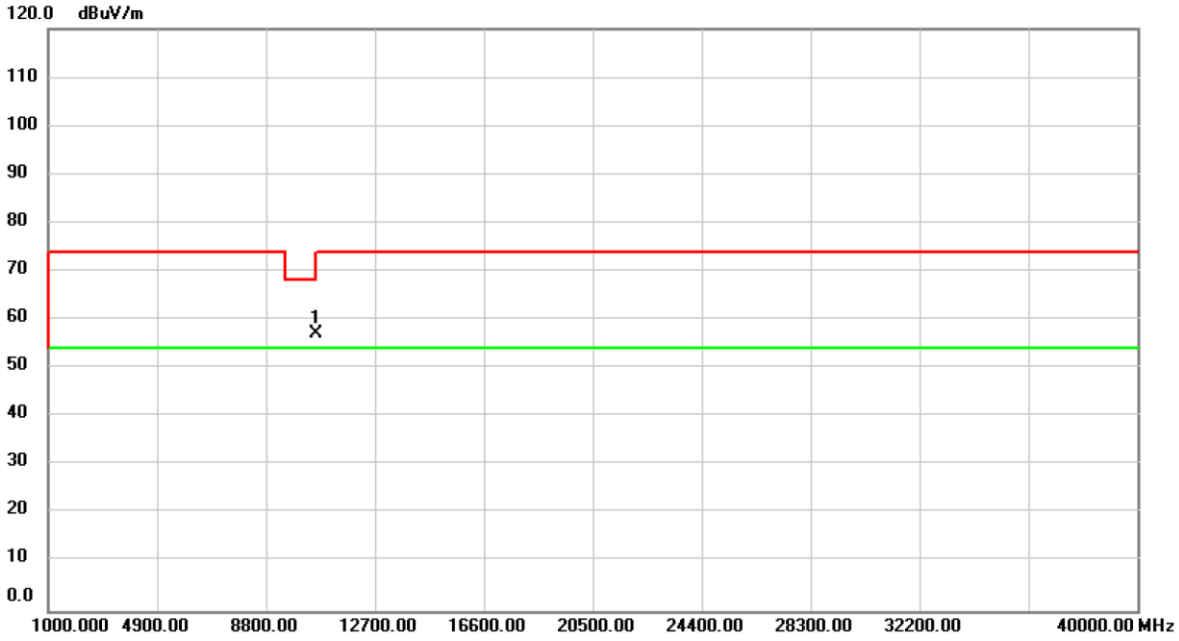

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	54.05	2.97	57.02	68.20	-11.18	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Tested Date	2019/11/12
Test Frequency	CH58: 5290 MHz	Polarization	Horizontal

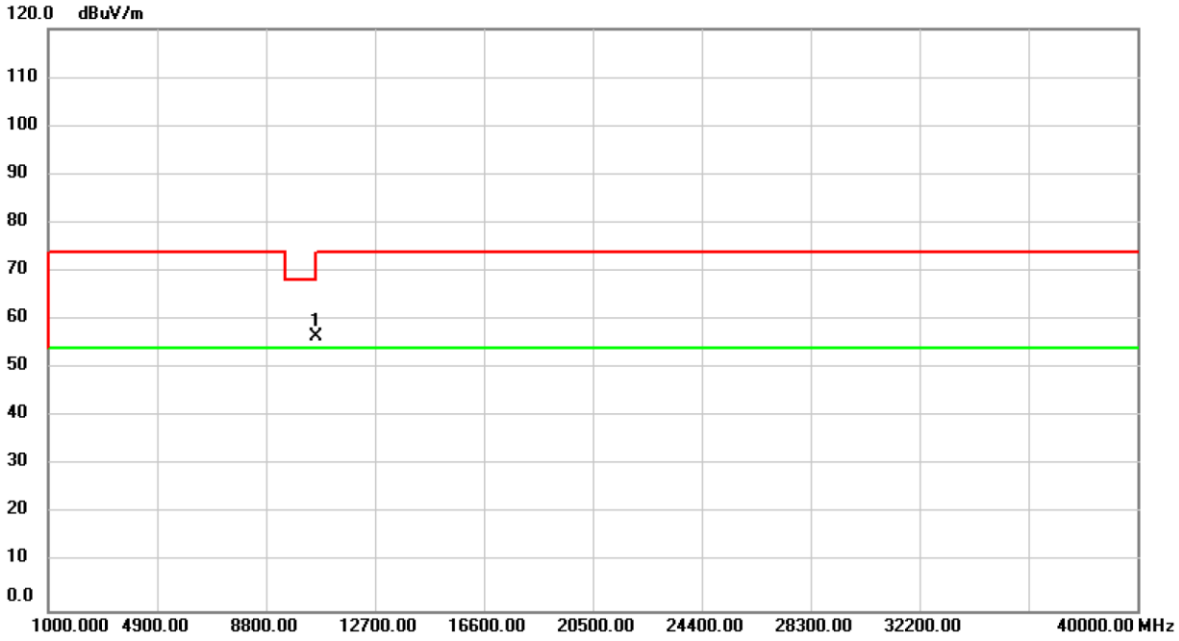

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	53.46	2.97	56.43	68.20	-11.77	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Tested Date	2019/11/12
Test Frequency	CH106: 5530 MHz	Polarization	Vertical

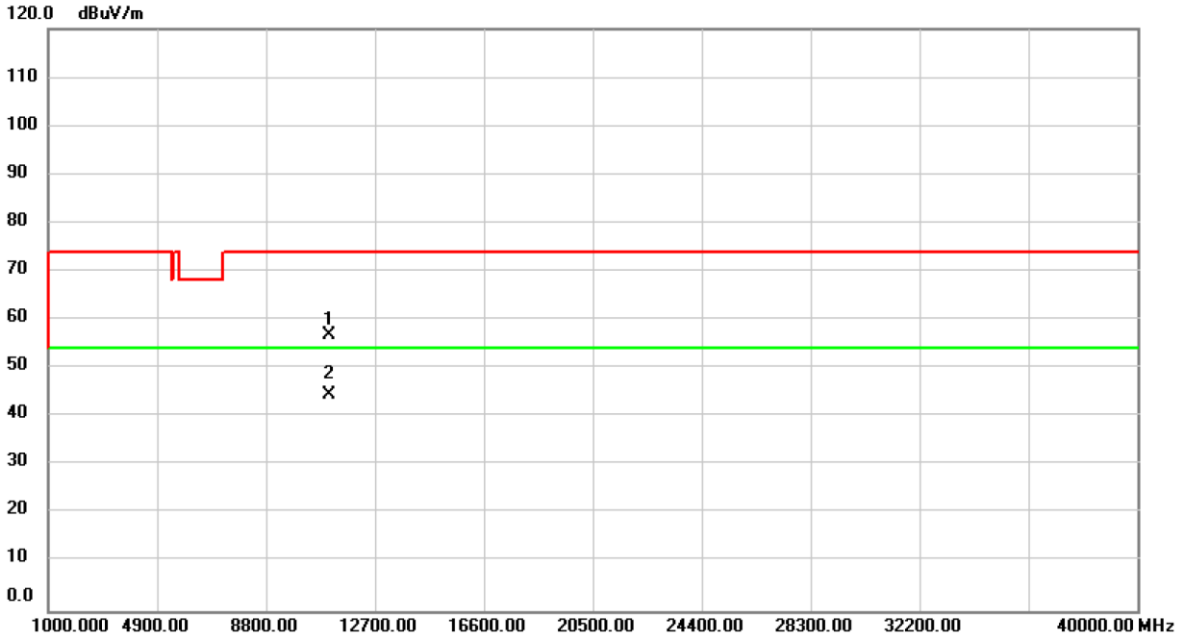

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11060.00	53.99	2.78	56.77	74.00	-17.23	peak	
2	*	11060.00	41.86	2.78	44.64	54.00	-9.36	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Tested Date	2019/11/12
Test Frequency	CH106: 5530 MHz	Polarization	Horizontal

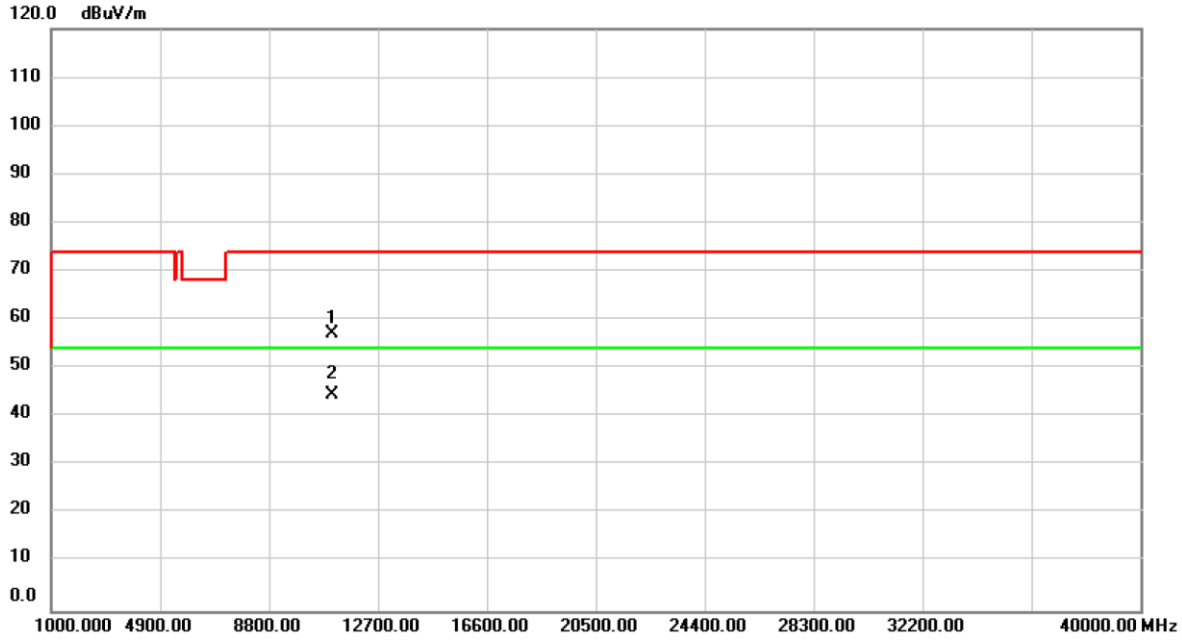

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11060.00	54.50	2.78	57.28	74.00	-16.72	peak	
2	*	11060.00	41.77	2.78	44.55	54.00	-9.45	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Tested Date	2019/11/12
Test Frequency	CH122: 5610 MHz	Polarization	Vertical

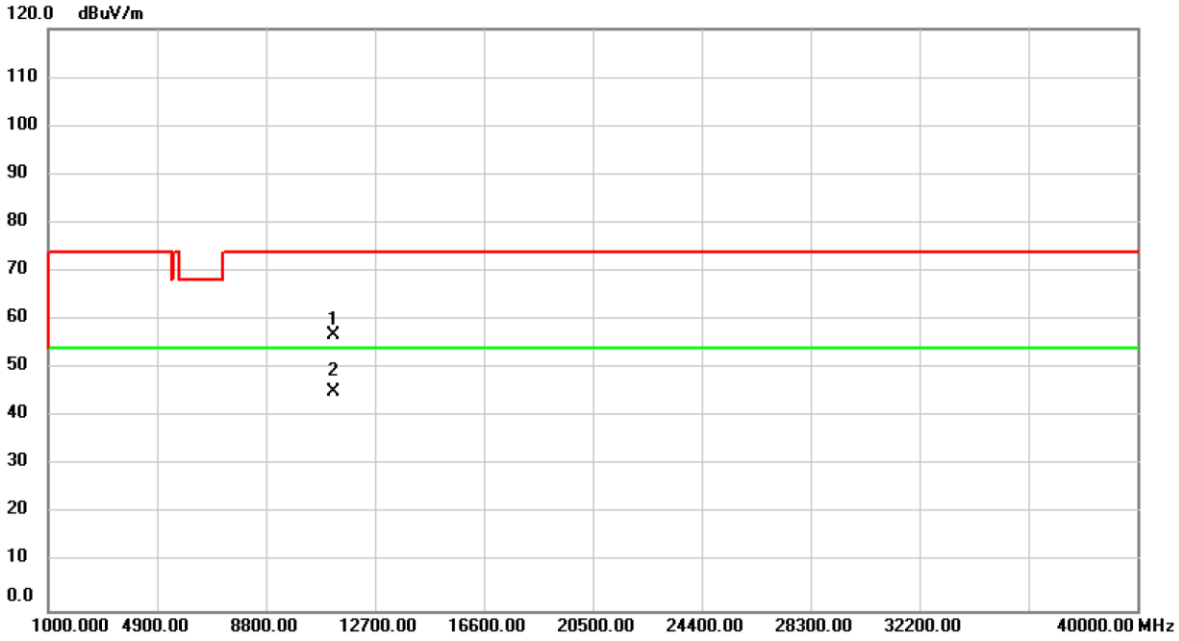

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11220.00	53.74	3.18	56.92	74.00	-17.08	peak	
2	*	11220.00	42.01	3.18	45.19	54.00	-8.81	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Tested Date	2019/11/12
Test Frequency	CH122: 5610 MHz	Polarization	Horizontal

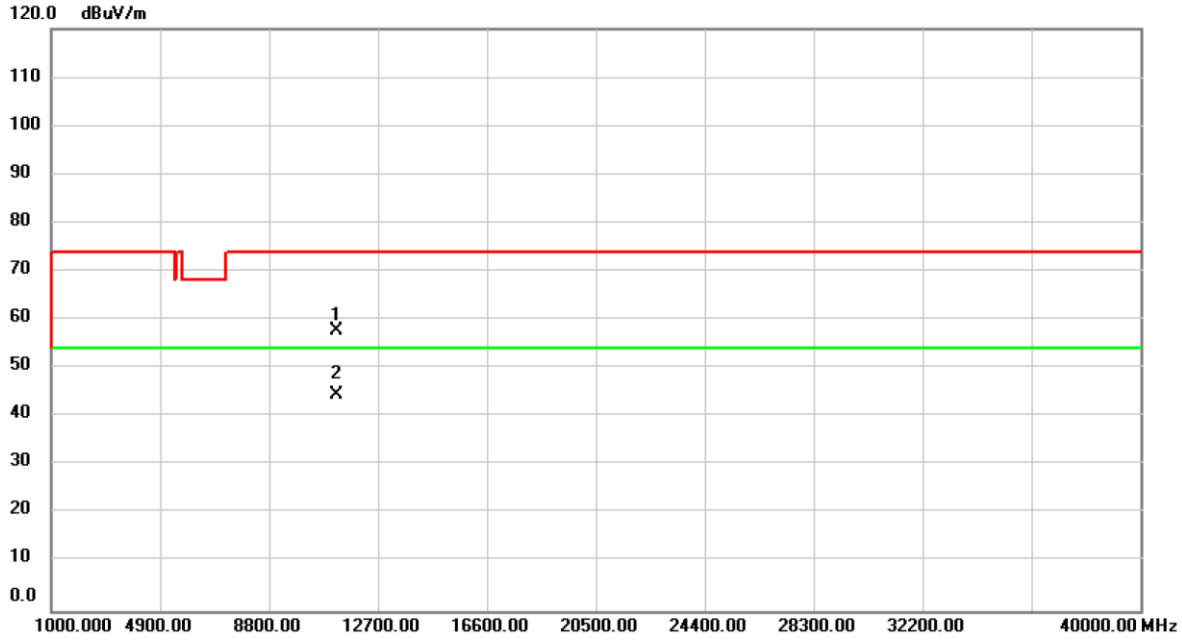

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11220.00	54.57	3.18	57.75	74.00	-16.25	peak	
2	*	11220.00	41.40	3.18	44.58	54.00	-9.42	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Tested Date	2019/11/12
Test Frequency	CH155: 5755 MHz	Polarization	Vertical

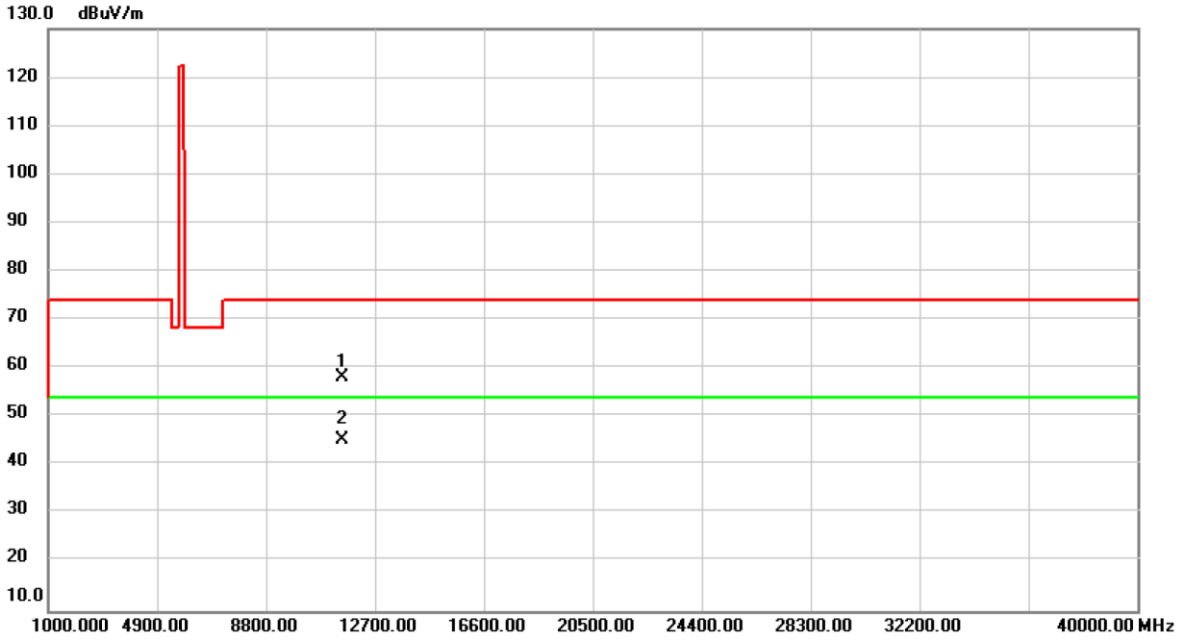

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11550.00	54.62	3.67	58.29	74.00	-15.71	peak	
2	*	11550.00	41.71	3.67	45.38	54.00	-8.62	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Tested Date	2019/11/12
Test Frequency	CH155: 5755 MHz	Polarization	Horizontal

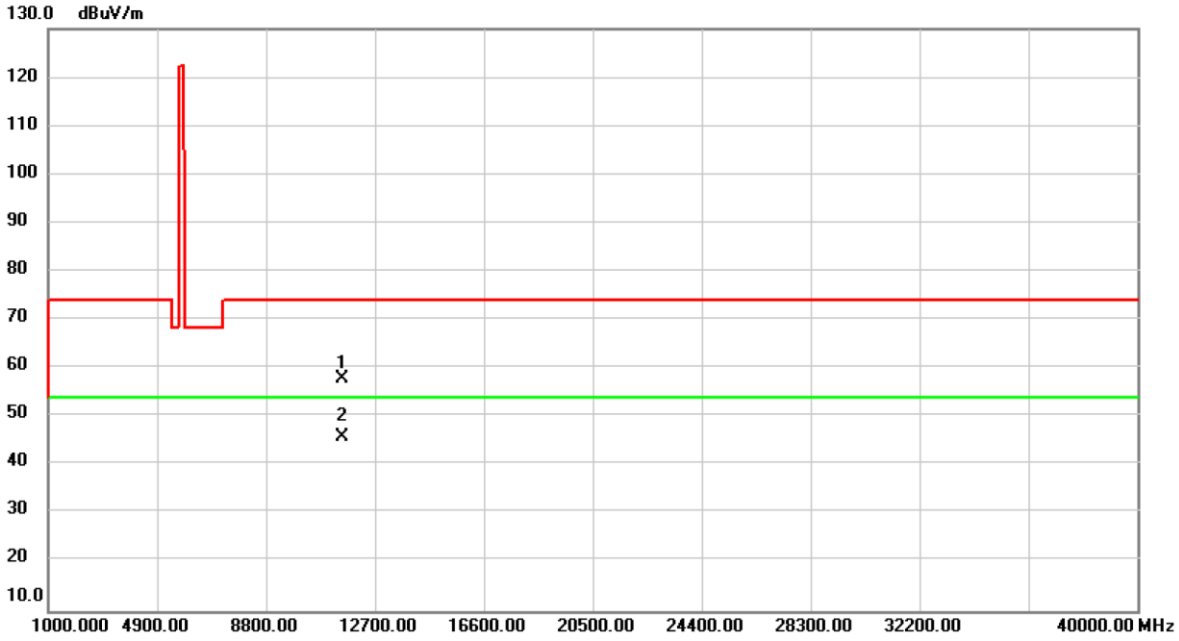

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11550.00	54.18	3.67	57.85	74.00	-16.15	peak	
2	*	11550.00	42.13	3.67	45.80	54.00	-8.20	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D BANDWIDTH

Test Mode	IEEE 802.11a

Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5180	24.25	16.90
5200	23.69	16.90
5240	23.69	16.90

5180 MHz	5200 MHz	5240 MHz
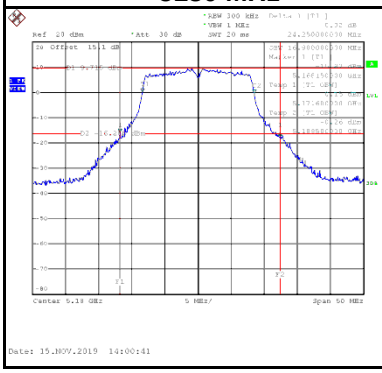	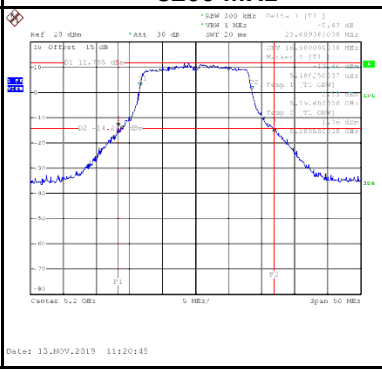	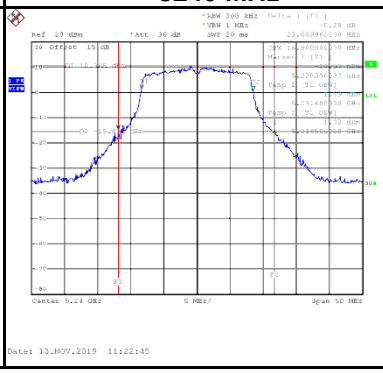

Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5260	23.85	16.90
5300	23.79	16.90
5320	23.69	16.90

5260 MHz	5300 MHz	5320 MHz
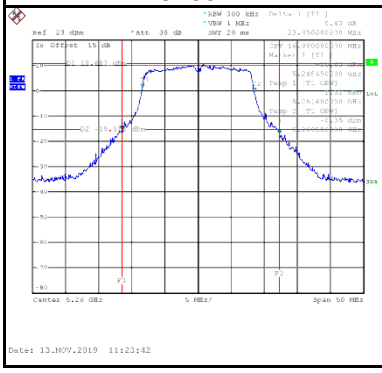	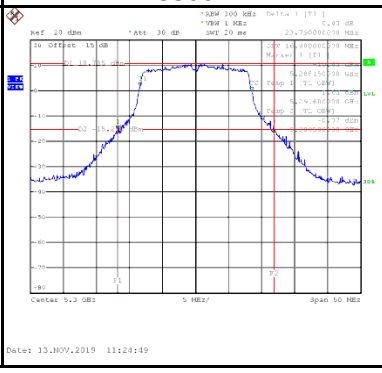	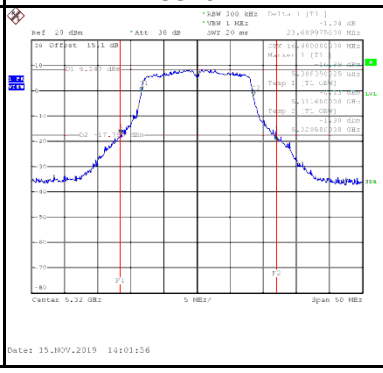

Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5500	23.49	17.00
5580	23.79	17.00
5700	23.59	17.00

5500 MHz	5580 MHz	5700 MHz
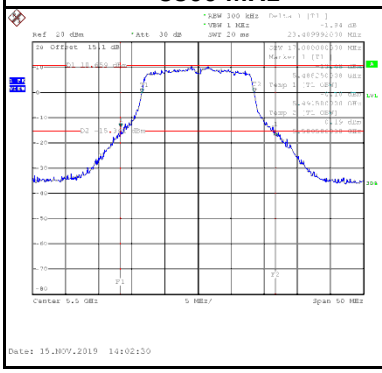	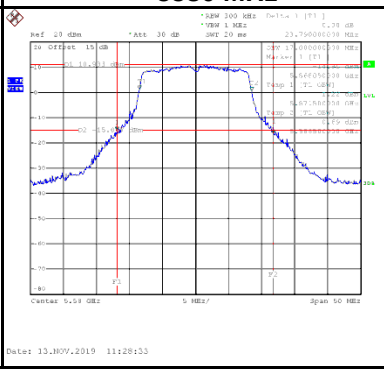	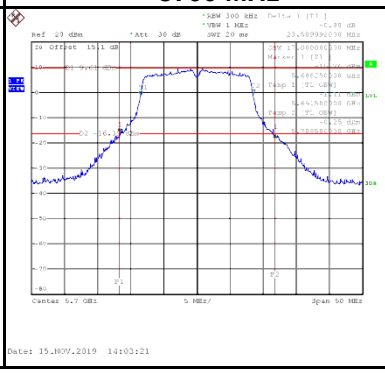

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5745	15.59	16.60
5785	15.99	16.60
5825	15.49	16.60

5745 MHz	5785 MHz	5825 MHz
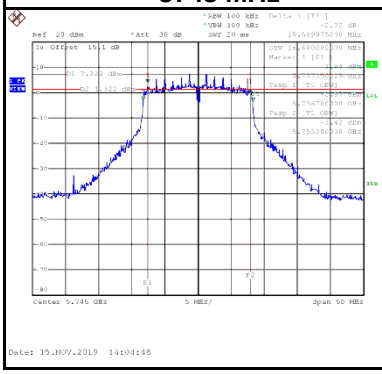	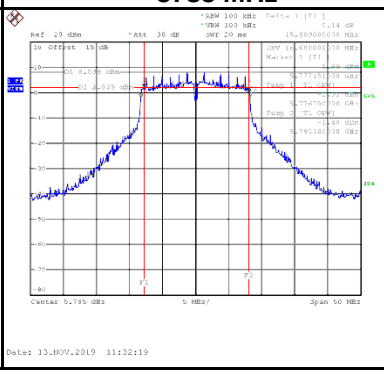	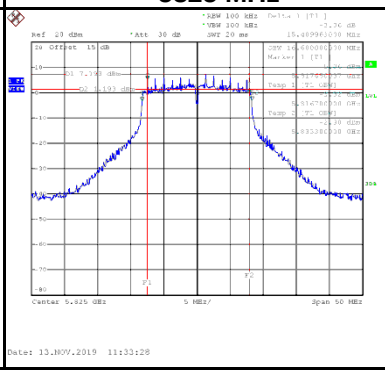

Test Mode	IEEE 802.11n (HT20)

Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5180	24.48	18.00
5200	24.56	18.00
5240	25.29	18.10

5180 MHz	5200 MHz	5240 MHz
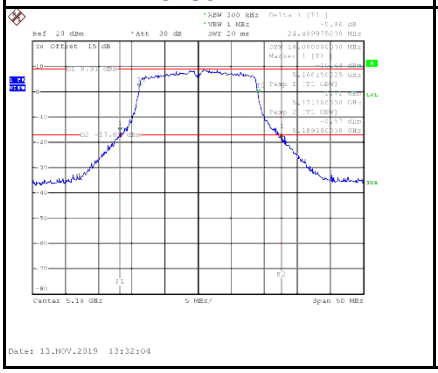	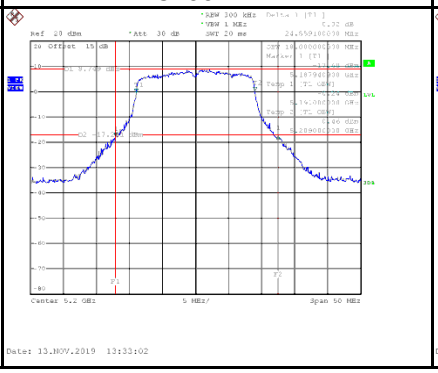	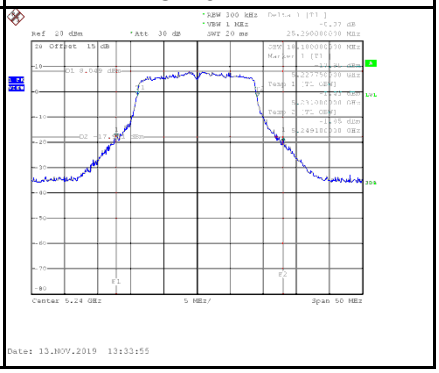

Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5260	24.50	18.10
5300	24.85	18.00
5320	25.55	18.10

5260 MHz	5300 MHz	5320 MHz
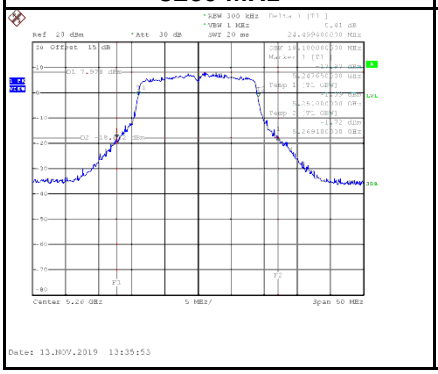	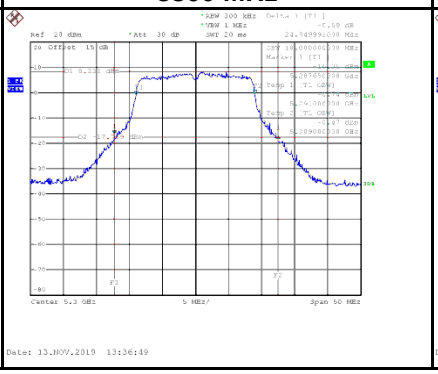	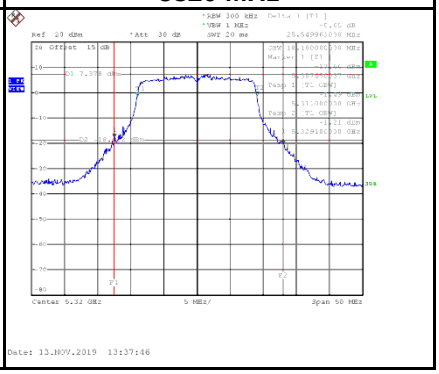

Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5500	25.20	18.00
5580	24.75	18.00
5700	23.29	18.00

5500 MHz	5580 MHz	5700 MHz
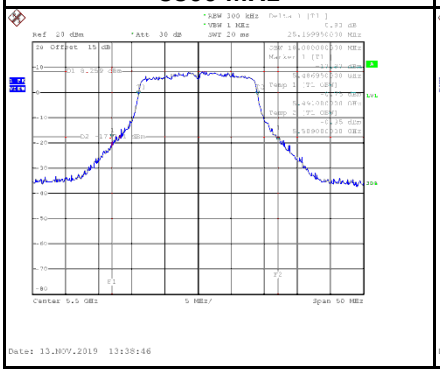	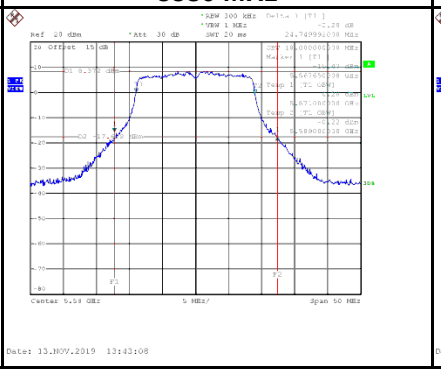	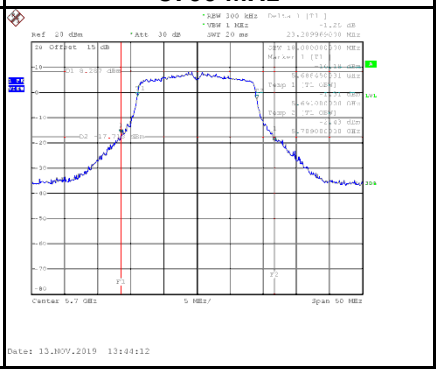

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5745	15.21	17.80
5785	16.40	17.80
5825	15.90	17.70

5745 MHz	5785 MHz	5825 MHz
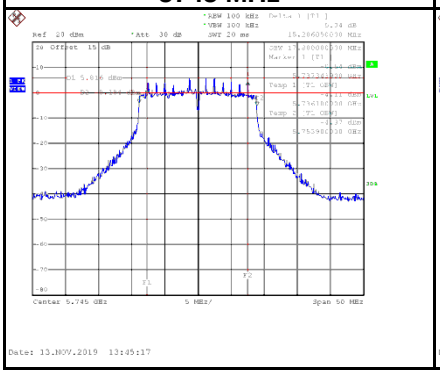	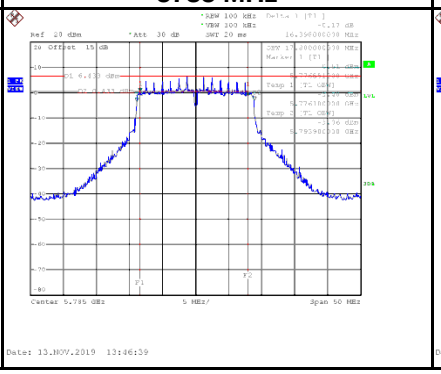	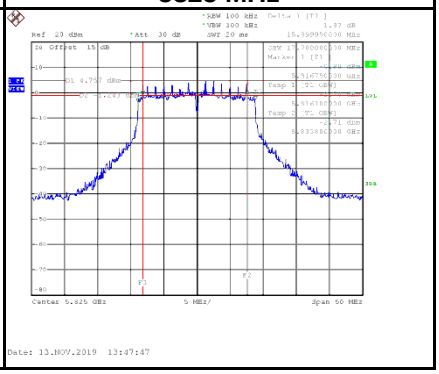

Test Mode	IEEE 802.11n (HT40)

Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5190	42.01	36.80
5230	42.70	36.80

5190 MHz

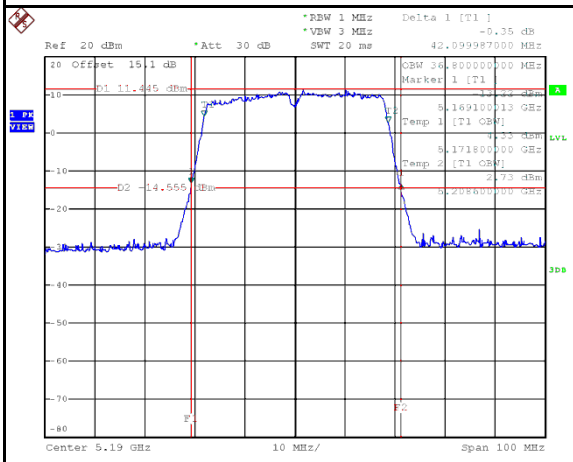

5230 MHz

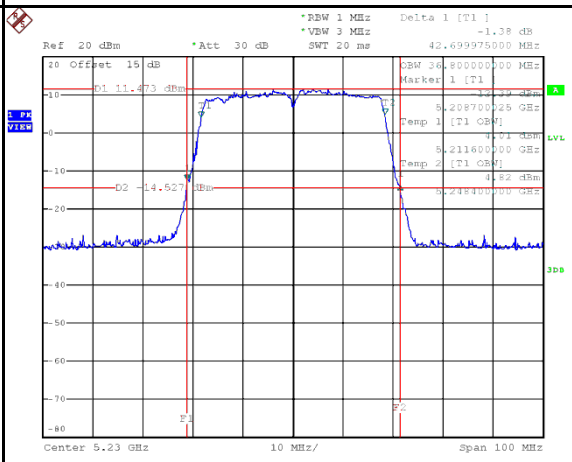

Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5270	42.10	36.60
5310	42.30	36.80

5270 MHz

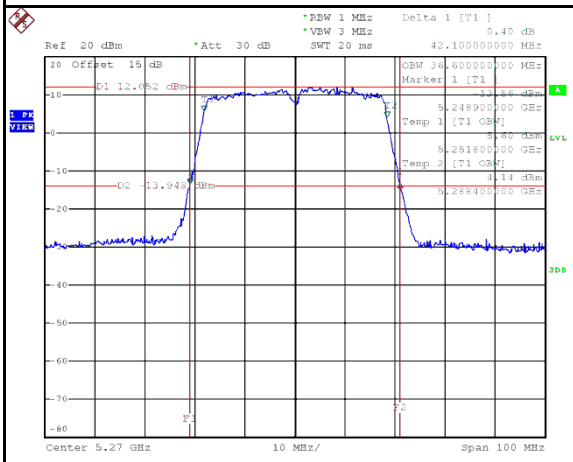

5310 MHz

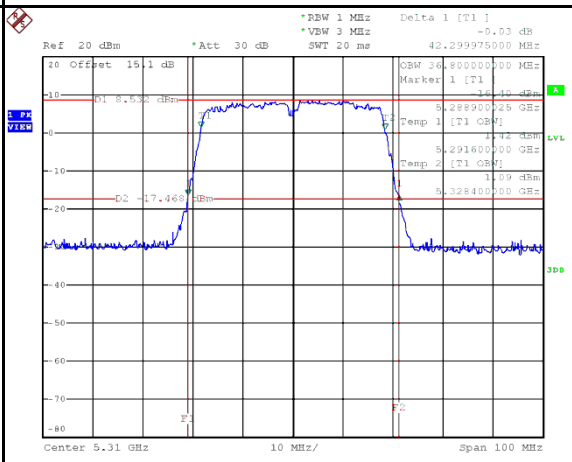

Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5510	42.99	36.80
5550	42.30	36.80
5670	42.40	36.80

5510 MHz	5550 MHz	5670 MHz
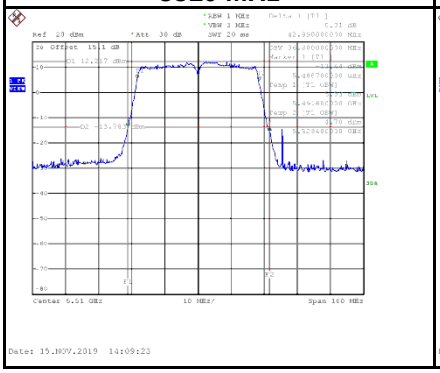	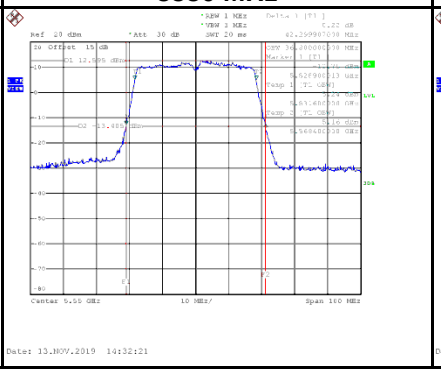	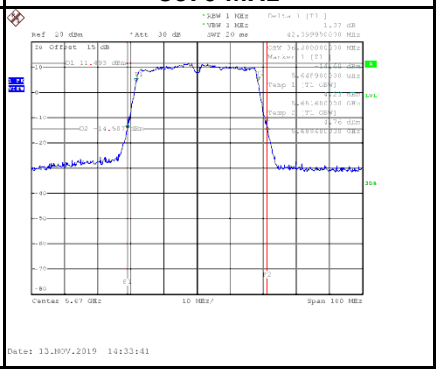

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5755	35.41	36.40
5795	35.39	36.40

5755 MHz	5795 MHz
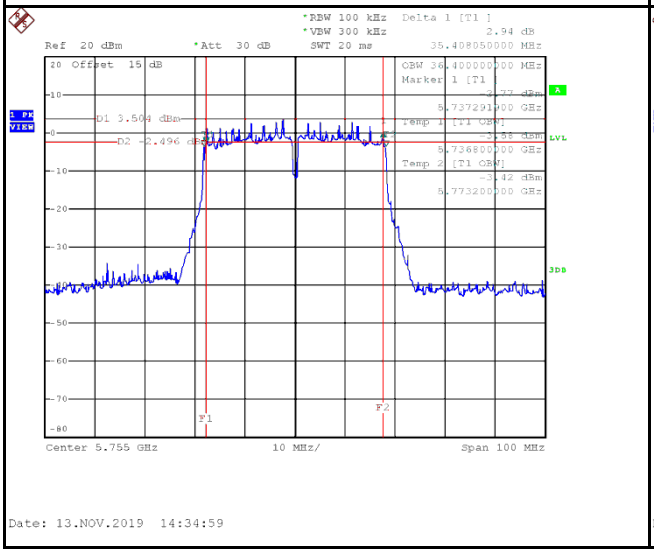	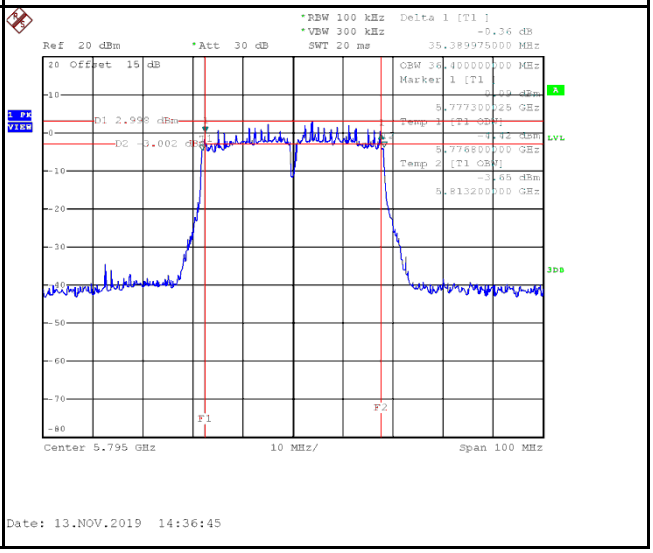

Test Mode	IEEE 802.11ac (VHT80)

Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5210	84.60	76.00

5210 MHz

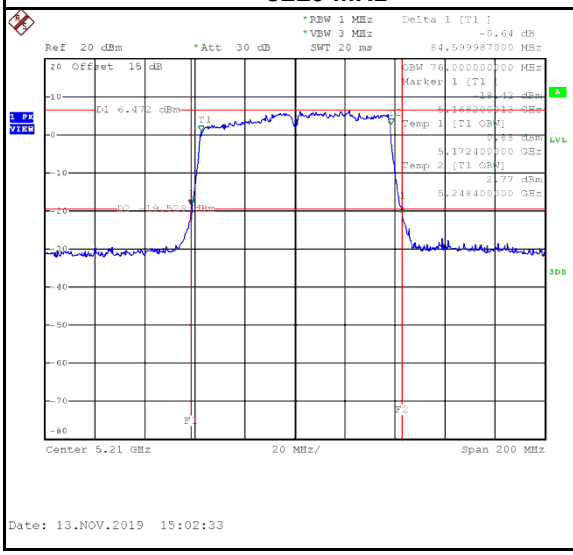

Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5290	84.80	76.00

5270 MHz

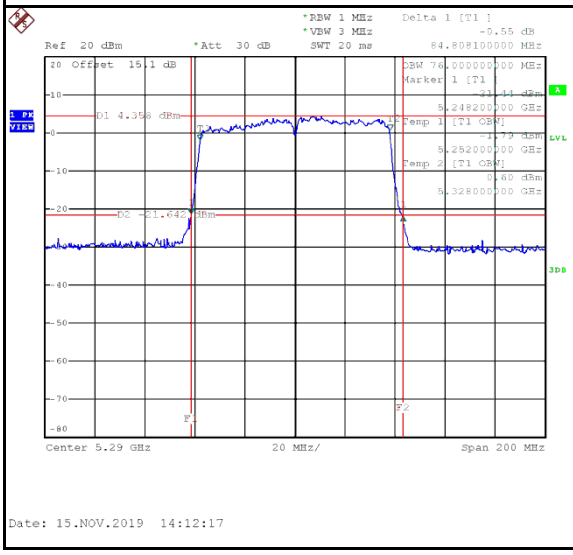

Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5530	85.19	76.00
5610	83.99	76.00

5530 MHz

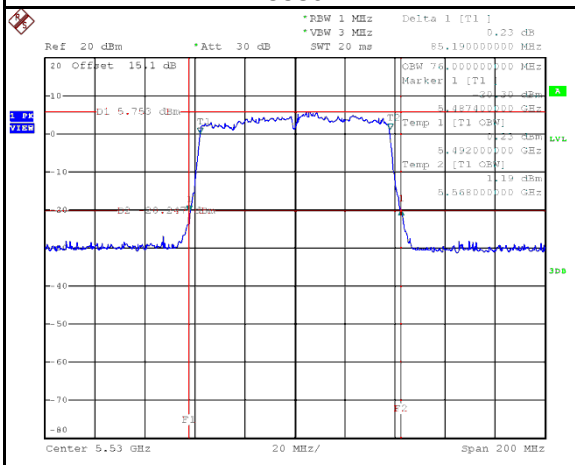

5610 MHz

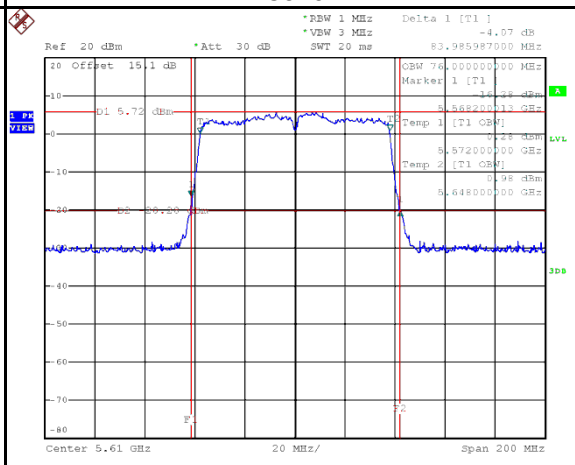

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5775	75.59	76.00

5755 MHz

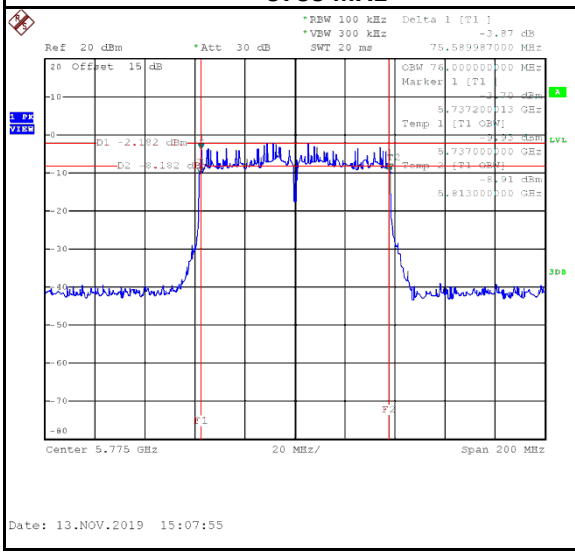

APPENDIX E CONDUCTED OUTPUT POWER

Test Mode	IEEE 802.11a_ANT 1	Tested Date	2019/11/12

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	16.99	0.0500	24.00	0.2512	Complies
5200	17.36	0.0545	24.00	0.2512	Complies
5240	17.38	0.0547	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5260	18.02	0.0634	24.00	0.2512	Complies
5300	18.33	0.0681	24.00	0.2512	Complies
5320	17.01	0.0502	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5500	17.75	0.0596	24.00	0.2512	Complies
5580	17.95	0.0624	24.00	0.2512	Complies
5700	17.26	0.0532	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5745	17.06	0.0508	30.00	1.0000	Complies
5785	17.44	0.0555	30.00	1.0000	Complies
5825	16.74	0.0472	30.00	1.0000	Complies

Test Mode	IEEE 802.11a_ANT 2	Tested Date	2019/11/12

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	17.36	0.0545	24.00	0.2512	Complies
5200	18.46	0.0701	24.00	0.2512	Complies
5240	17.85	0.0610	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5260	18.25	0.0668	24.00	0.2512	Complies
5300	18.59	0.0723	24.00	0.2512	Complies
5320	17.34	0.0542	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5500	17.78	0.0600	24.00	0.2512	Complies
5580	18.35	0.0684	24.00	0.2512	Complies
5700	17.76	0.0597	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5745	17.82	0.0605	30.00	1.0000	Complies
5785	18.47	0.0703	30.00	1.0000	Complies
5825	17.99	0.0630	30.00	1.0000	Complies

Test Mode	IEEE 802.11n (HT20)_ANT 1	Tested Date	2019/11/12

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	16.87	0.0486	24.00	0.2512	Complies
5200	16.33	0.0430	24.00	0.2512	Complies
5240	16.16	0.0413	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5260	16.23	0.0420	24.00	0.2512	Complies
5300	17.03	0.0505	24.00	0.2512	Complies
5320	16.74	0.0472	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5500	16.98	0.0499	24.00	0.2512	Complies
5580	17.15	0.0519	24.00	0.2512	Complies
5700	16.34	0.0431	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5745	17.51	0.0564	30.00	1.0000	Complies
5785	17.78	0.0600	30.00	1.0000	Complies
5825	16.26	0.0423	30.00	1.0000	Complies

Test Mode	IEEE 802.11n (HT20)_ANT 2	Tested Date	2019/11/12

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	17.48	0.0560	24.00	0.2512	Complies
5200	17.22	0.0527	24.00	0.2512	Complies
5240	16.86	0.0485	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5260	17.01	0.0502	24.00	0.2512	Complies
5300	17.57	0.0571	24.00	0.2512	Complies
5320	17.02	0.0504	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5500	17.14	0.0518	24.00	0.2512	Complies
5580	17.56	0.0570	24.00	0.2512	Complies
5700	17.09	0.0512	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5745	17.33	0.0541	30.00	1.0000	Complies
5785	17.51	0.0564	30.00	1.0000	Complies
5825	15.82	0.0382	30.00	1.0000	Complies

Test Mode	IEEE 802.11n (HT20)_ Total	Tested Date	2019/11/12

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	20.20	0.1046	24.00	0.2512	Complies
5200	19.81	0.0957	24.00	0.2512	Complies
5240	19.53	0.0898	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5260	19.65	0.0922	24.00	0.2512	Complies
5300	20.32	0.1076	24.00	0.2512	Complies
5320	19.89	0.0976	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5500	20.07	0.1016	24.00	0.2512	Complies
5580	20.37	0.1089	24.00	0.2512	Complies
5700	19.74	0.0942	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5745	20.43	0.1104	30.00	1.0000	Complies
5785	20.66	0.1163	30.00	1.0000	Complies
5825	19.06	0.0805	30.00	1.0000	Complies

Test Mode	IEEE 802.11n (HT40)_ANT 1	Tested Date	2019/11/12

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	15.88	0.0387	24.00	0.2512	Complies
5230	16.56	0.0453	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5270	17.06	0.0508	24.00	0.2512	0.2512
5310	13.98	0.0250	24.00	0.2512	0.2512

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5510	15.88	0.0387	24.00	0.2512	Complies
5550	17.49	0.0561	24.00	0.2512	Complies
5670	16.78	0.0476	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5755	17.61	0.0577	30.00	1.0000	Complies
5795	17.17	0.0521	30.00	1.0000	Complies

Test Mode	IEEE 802.11n (HT40)_ANT 2	Tested Date	2019/11/12

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	15.97	0.0395	24.00	0.2512	Complies
5230	17.17	0.0521	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5270	17.77	0.0598	24.00	0.2512	0.2512
5310	14.27	0.0267	24.00	0.2512	0.2512

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5510	17.06	0.0508	24.00	0.2512	Complies
5550	17.84	0.0608	24.00	0.2512	Complies
5670	17.21	0.0526	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5755	17.26	0.0532	30.00	1.0000	Complies
5795	17.03	0.0505	30.00	1.0000	Complies

Test Mode	IEEE 802.11n (HT40)_ Total	Tested Date	2019/11/12

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	18.94	0.0783	24.00	0.2512	Complies
5230	19.89	0.0974	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5270	20.44	0.1107	24.00	0.2512	0.2512
5310	17.14	0.0517	24.00	0.2512	0.2512

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5510	19.52	0.0895	24.00	0.2512	Complies
5550	20.68	0.1169	24.00	0.2512	Complies
5670	20.01	0.1002	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5755	20.45	0.1109	30.00	1.0000	Complies
5795	20.11	0.1026	30.00	1.0000	Complies

Test Mode	IEEE 802.11ac (VHT20)_ANT 1	Tested Date	2019/11/12

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	16.92	0.0492	24.00	0.2512	Complies
5200	16.59	0.0456	24.00	0.2512	Complies
5240	16.37	0.0434	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5260	16.12	0.0409	24.00	0.2512	Complies
5300	17.15	0.0519	24.00	0.2512	Complies
5320	16.53	0.0450	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5500	17.08	0.0511	24.00	0.2512	Complies
5580	17.53	0.0566	24.00	0.2512	Complies
5700	16.62	0.0459	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5745	17.48	0.0560	30.00	1.0000	Complies
5785	17.72	0.0592	30.00	1.0000	Complies
5825	16.19	0.0416	30.00	1.0000	Complies

Test Mode	IEEE 802.11ac (VHT20)_ANT 2	Tested Date	2019/11/12

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	17.48	0.0560	24.00	0.2512	Complies
5200	16.98	0.0499	24.00	0.2512	Complies
5240	16.78	0.0476	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5260	16.79	0.0478	24.00	0.2512	Complies
5300	17.48	0.0560	24.00	0.2512	Complies
5320	16.98	0.0499	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5500	17.12	0.0515	24.00	0.2512	Complies
5580	17.36	0.0545	24.00	0.2512	Complies
5700	17.05	0.0507	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5745	17.22	0.0527	30.00	1.0000	Complies
5785	17.47	0.0558	30.00	1.0000	Complies
5825	15.88	0.0387	30.00	1.0000	Complies

Test Mode	IEEE 802.11ac (VHT20)_ Total	Tested Date	2019/11/12

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	20.22	0.1052	24.00	0.2512	Complies
5200	19.80	0.0955	24.00	0.2512	Complies
5240	19.59	0.0910	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5260	19.48	0.0887	24.00	0.2512	Complies
5300	20.33	0.1079	24.00	0.2512	Complies
5320	19.77	0.0949	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5500	20.11	0.1026	24.00	0.2512	Complies
5580	20.46	0.1111	24.00	0.2512	Complies
5700	19.85	0.0966	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5745	20.36	0.1087	30.00	1.0000	Complies
5785	20.61	0.1150	30.00	1.0000	Complies
5825	19.05	0.0803	30.00	1.0000	Complies

Test Mode	IEEE 802.11ac (VHT40)_ANT 1	Tested Date	2019/11/12

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	14.86	0.0306	24.00	0.2512	Complies
5230	14.31	0.0270	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5270	14.53	0.0284	24.00	0.2512	0.2512
5310	14.64	0.0291	24.00	0.2512	0.2512

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5510	15.35	0.0343	24.00	0.2512	Complies
5550	15.22	0.0333	24.00	0.2512	Complies
5670	14.78	0.0301	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5755	15.72	0.0373	30.00	1.0000	Complies
5795	15.02	0.0318	30.00	1.0000	Complies

Test Mode	IEEE 802.11ac (VHT40)_ANT 2	Tested Date	2019/11/12

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	15.43	0.0349	24.00	0.2512	Complies
5230	15.05	0.0320	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5270	15.61	0.0364	24.00	0.2512	0.2512
5310	15.13	0.0326	24.00	0.2512	0.2512

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5510	15.21	0.0332	24.00	0.2512	Complies
5550	15.51	0.0356	24.00	0.2512	Complies
5670	15.22	0.0333	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5755	15.47	0.0352	30.00	1.0000	Complies
5795	14.61	0.0289	30.00	1.0000	Complies

Test Mode	IEEE 802.11ac (VHT40)_ Total	Tested Date	2019/11/12

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	18.16	0.0655	24.00	0.2512	Complies
5230	17.71	0.0590	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5270	18.11	0.0648	24.00	0.2512	0.2512
5310	17.90	0.0617	24.00	0.2512	0.2512

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5510	18.29	0.0675	24.00	0.2512	Complies
5550	18.38	0.0688	24.00	0.2512	Complies
5670	18.02	0.0633	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5755	18.61	0.0726	30.00	1.0000	Complies
5795	17.83	0.0607	30.00	1.0000	Complies

Test Mode	IEEE 802.11ac (VHT80)_ANT 1	Tested Date	2019/11/12

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	13.97	0.0249	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5290	12.05	0.0160	24.00	0.2512	0.2512

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5530	12.99	0.0199	24.00	0.2512	Complies
5610	13.13	0.0206	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5775	15.19	0.0330	30.00	1.0000	Complies

Test Mode	IEEE 802.11ac (VHT80)_ANT 2	Tested Date	2019/11/12

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	14.83	0.0304	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5290	12.54	0.0179	24.00	0.2512	0.2512

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5530	13.37	0.0217	24.00	0.2512	Complies
5610	13.24	0.0211	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5775	15.02	0.0318	30.00	1.0000	Complies

Test Mode	IEEE 802.11ac (VHT80)_ Total	Tested Date	2019/11/12

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	17.59	0.0574	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5290	15.56	0.0360	24.00	0.2512	0.2512

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5530	16.40	0.0436	24.00	0.2512	Complies
5610	16.40	0.0436	24.00	0.2512	Complies

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5775	18.25	0.0668	30.00	1.0000	Complies

APPENDIX F POWER SPECTRAL DENSITY

Test Mode	IEEE 802.11a_ANT 1

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5180	4.68	0.15	4.83	10.17	Complies
5200	5.69	0.15	5.84	10.17	Complies
5240	5.15	0.15	5.30	10.17	Complies

5180 MHz	5200 MHz	5240 MHz
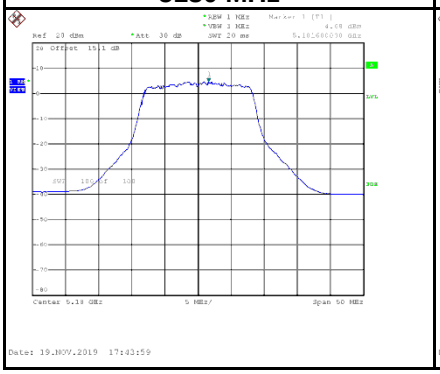	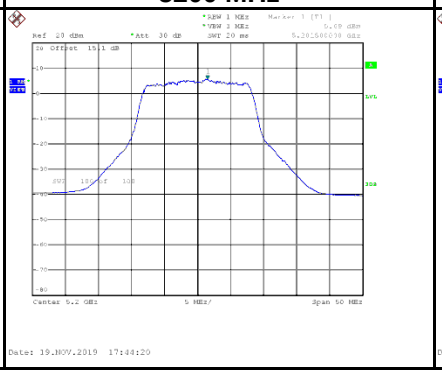	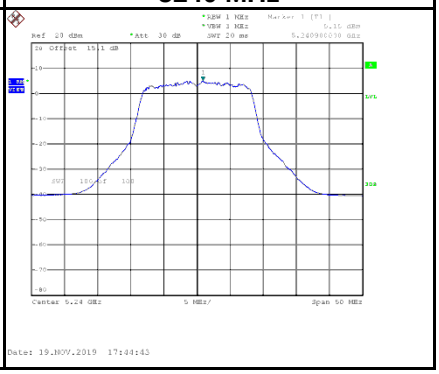

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5260	5.44	0.15	5.59	10.17	Complies
5300	6.15	0.15	6.30	10.17	Complies
5320	4.51	0.15	4.66	10.17	Complies

5260 MHz	5300 MHz	5320 MHz
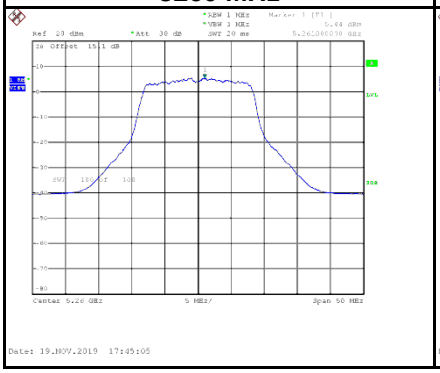	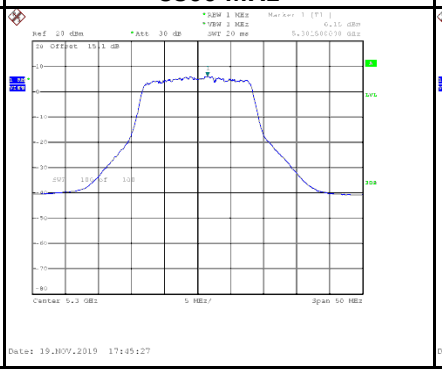	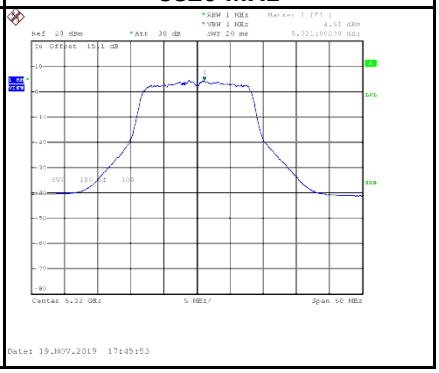

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5500	5.99	0.15	6.14	10.17	Complies
5580	6.14	0.15	6.29	10.17	Complies
5700	4.52	0.15	4.67	10.17	Complies

5500 MHz	5580 MHz	5700 MHz
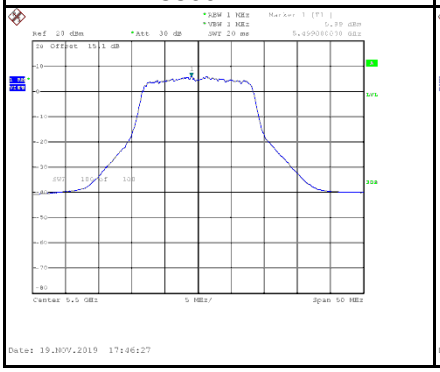	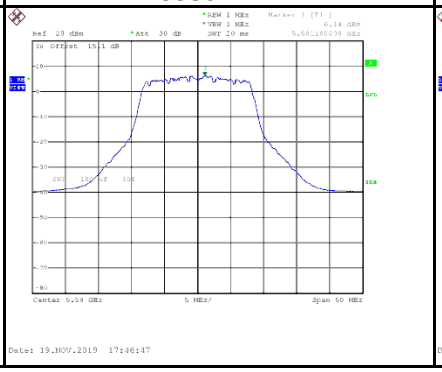	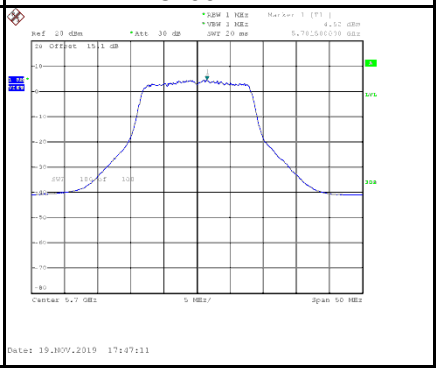

Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Result
5745	2.89	0.15	3.04	29.17	Complies
5785	3.89	0.15	4.04	29.17	Complies
5825	2.88	0.15	3.03	29.17	Complies

5745 MHz	5785 MHz	5825 MHz
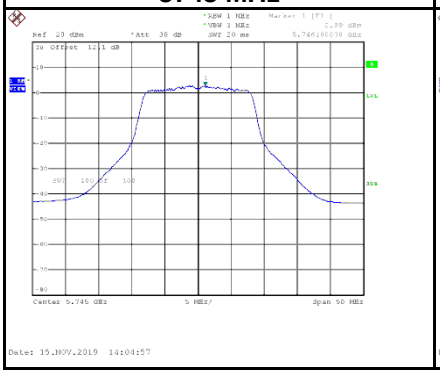	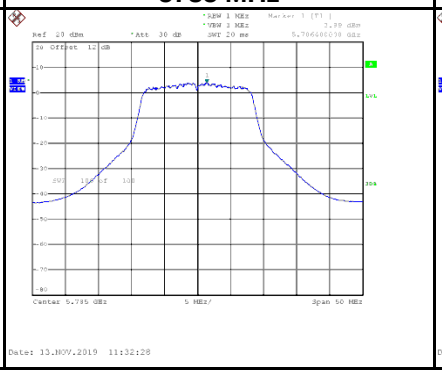	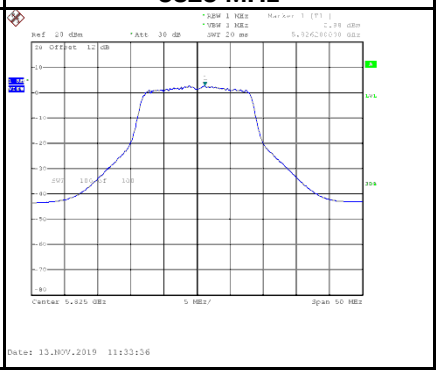

Test Mode	IEEE 802.11a_ANT 2

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5180	4.85	0.15	5.00	10.17	Complies
5200	5.88	0.15	6.03	10.17	Complies
5240	4.73	0.15	4.88	10.17	Complies

5180 MHz	5200 MHz	5240 MHz
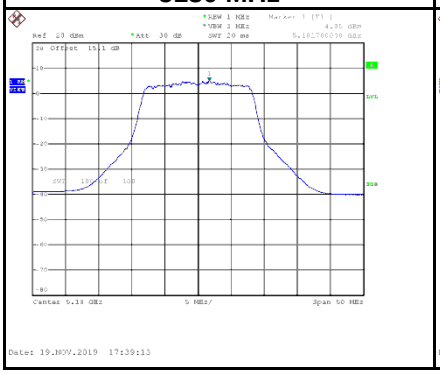	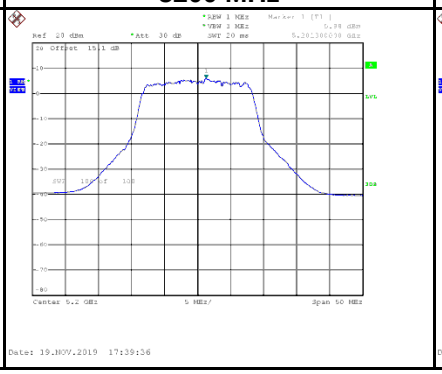	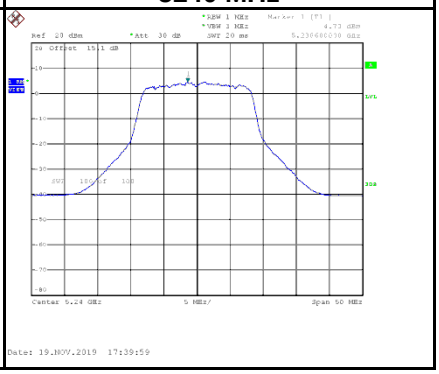

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5260	4.98	0.15	5.13	10.17	Complies
5300	5.88	0.15	6.03	10.17	Complies
5320	4.22	0.15	4.37	10.17	Complies

5260 MHz	5300 MHz	5320 MHz
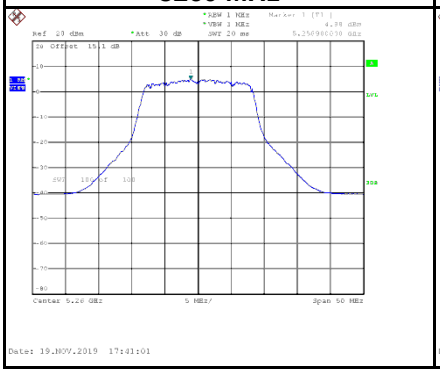	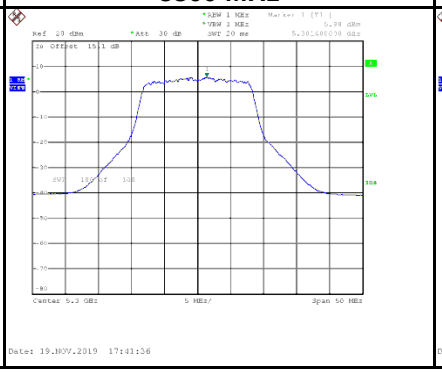	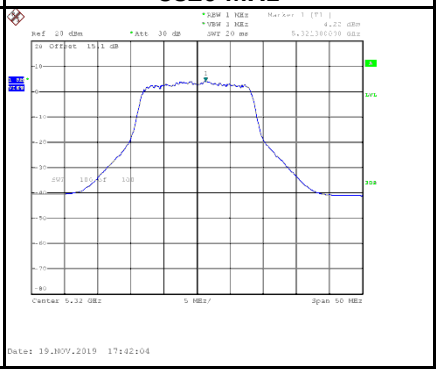

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5500	5.90	0.15	6.05	10.17	Complies
5580	6.27	0.15	6.42	10.17	Complies
5700	4.66	0.15	4.81	10.17	Complies

5500 MHz	5580 MHz	5700 MHz
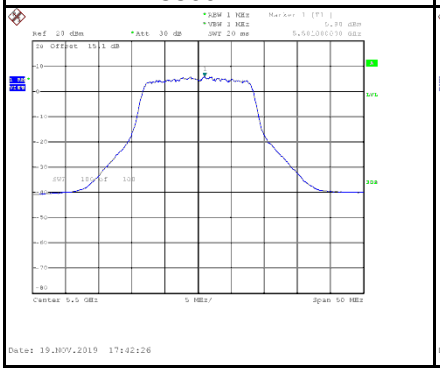	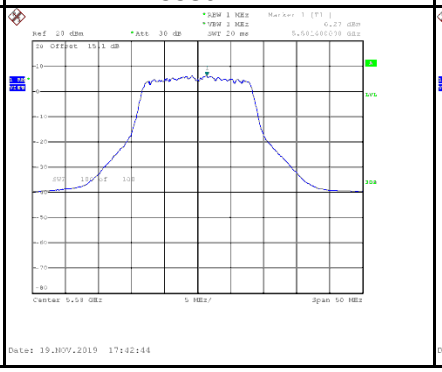	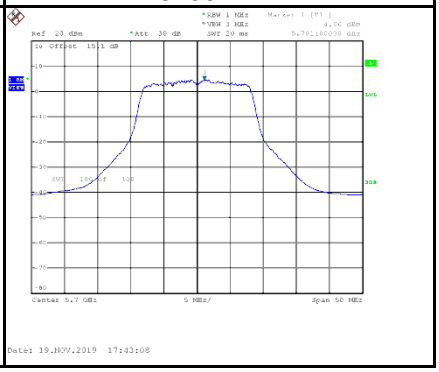

Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Result
5745	2.82	0.15	2.97	29.17	Complies
5785	3.37	0.15	3.52	29.17	Complies
5825	2.85	0.15	3.00	29.17	Complies

5745 MHz	5785 MHz	5825 MHz
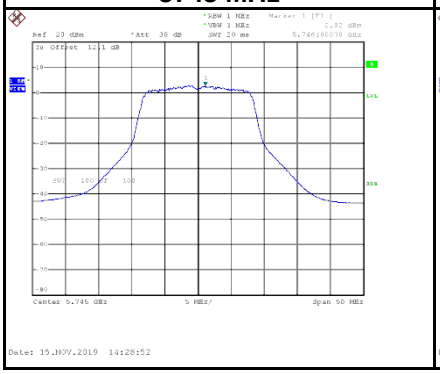	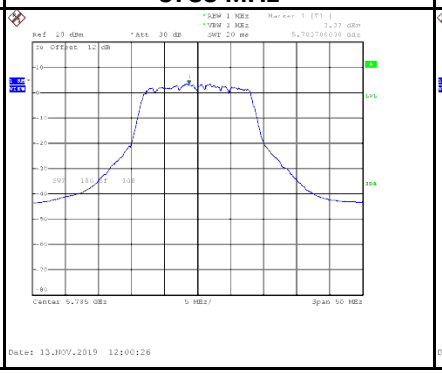	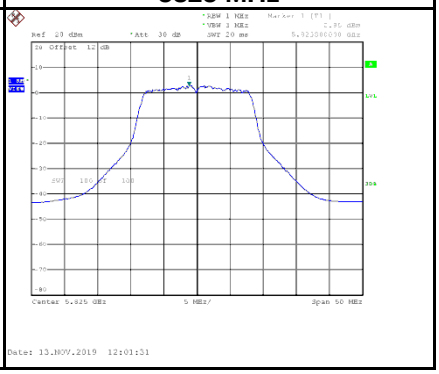

Test Mode	IEEE 802.11n (HT20)_ANT 1

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5180	5.24	0.16	5.40	10.17	Complies
5200	5.11	0.16	5.27	10.17	Complies
5240	4.72	0.16	4.88	10.17	Complies

5180 MHz	5200 MHz	5240 MHz
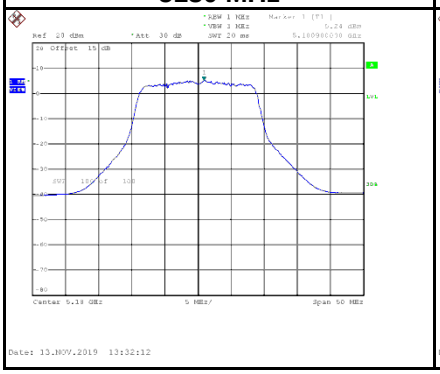	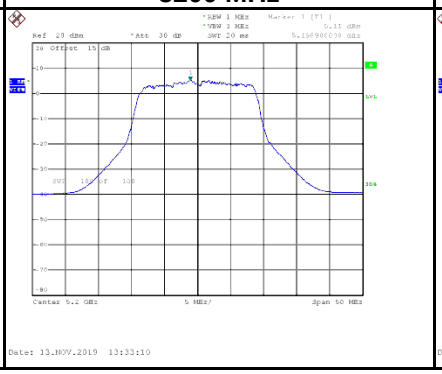	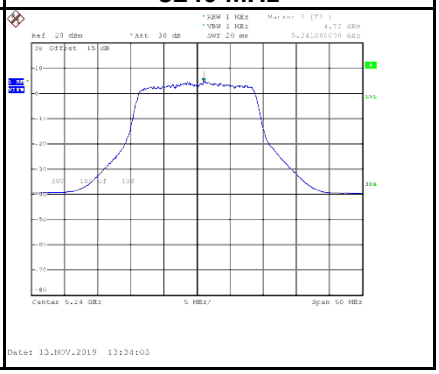

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5260	4.34	0.16	4.50	10.17	Complies
5300	4.63	0.16	4.79	10.17	Complies
5320	3.47	0.16	3.63	10.17	Complies

5260 MHz	5300 MHz	5320 MHz
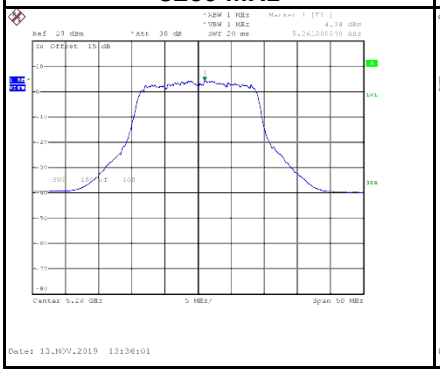	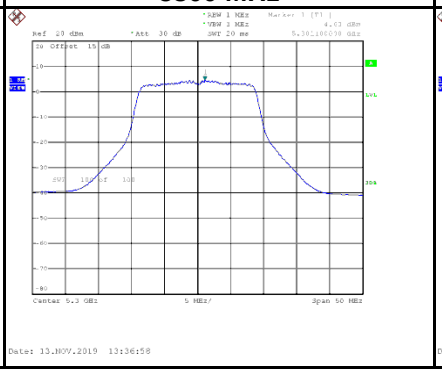	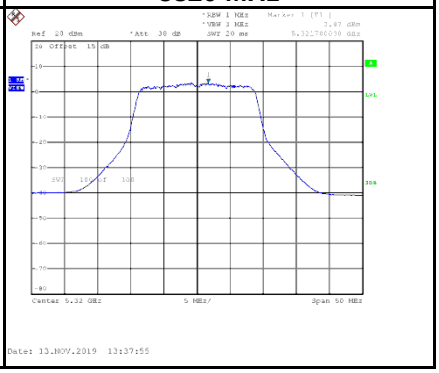

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5500	5.00	0.16	5.16	10.17	Complies
5580	5.01	0.16	5.17	10.17	Complies
5700	4.32	0.16	4.48	10.17	Complies

5500 MHz	5580 MHz	5700 MHz
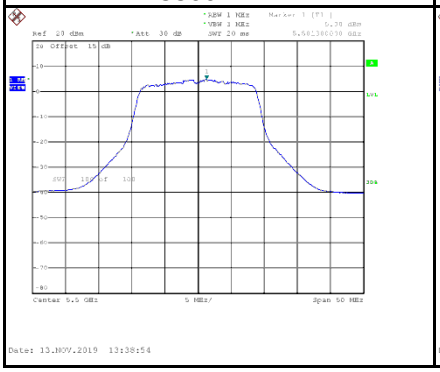	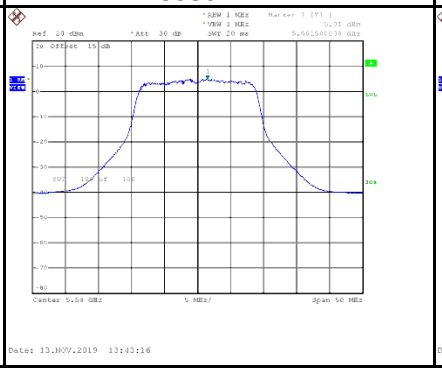	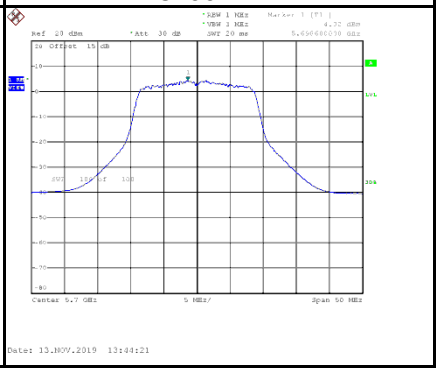

Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Result
5745	0.37	0.16	0.53	29.17	Complies
5785	1.05	0.16	1.21	29.17	Complies
5825	-0.36	0.16	-0.20	29.17	Complies

5745 MHz	5785 MHz	5825 MHz
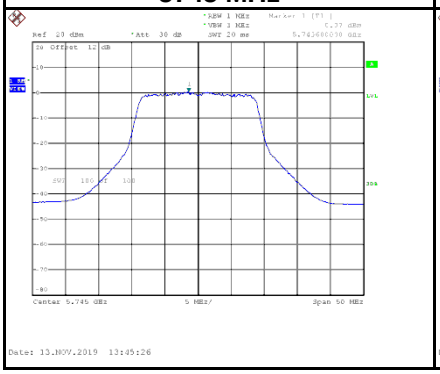	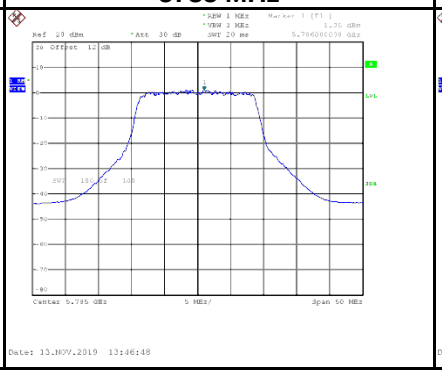	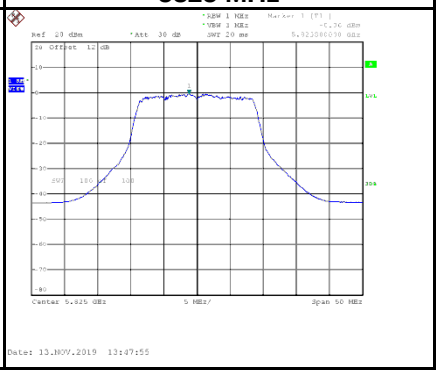

Test Mode	IEEE 802.11n (HT20)_ANT 2

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5180	5.47	0.16	5.63	10.17	Complies
5200	5.64	0.16	5.80	10.17	Complies
5240	4.46	0.16	4.62	10.17	Complies

5180 MHz	5200 MHz	5240 MHz
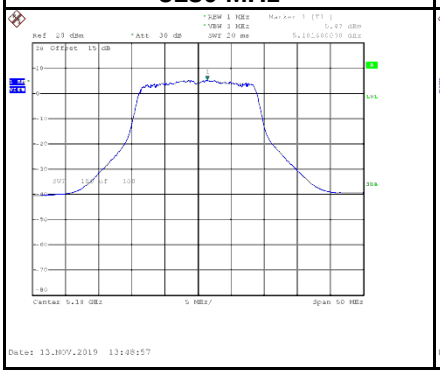	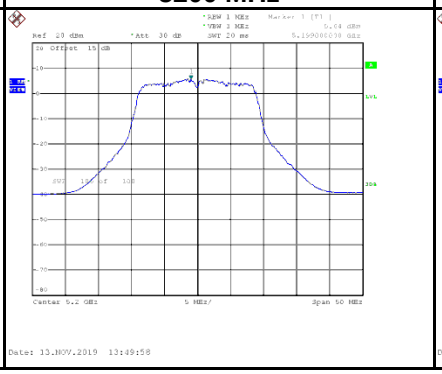	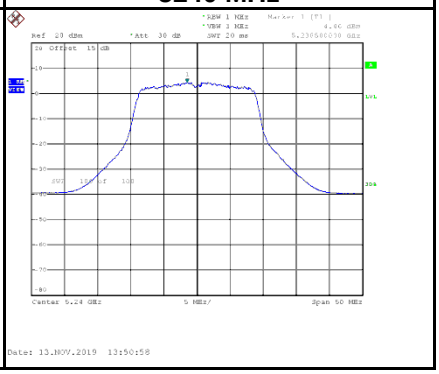

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5260	4.30	0.16	4.46	10.17	Complies
5300	4.89	0.16	5.05	10.17	Complies
5320	4.07	0.16	4.23	10.17	Complies

5260 MHz	5300 MHz	5320 MHz
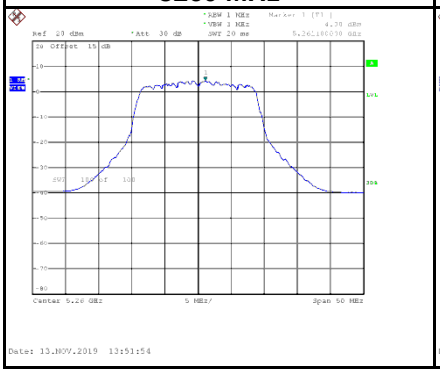	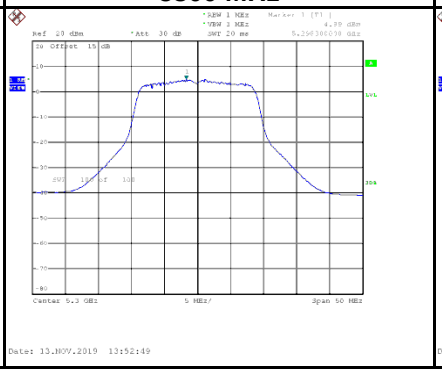	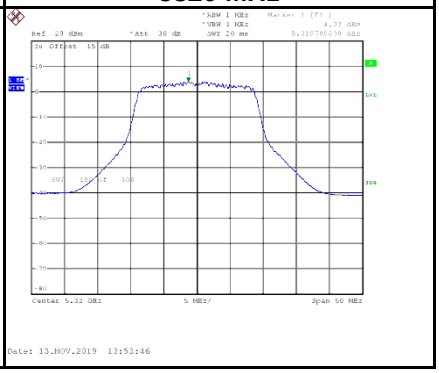

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5500	4.79	0.16	4.95	10.17	Complies
5580	5.63	0.16	5.79	10.17	Complies
5700	4.35	0.16	4.51	10.17	Complies

5500 MHz	5580 MHz	5700 MHz
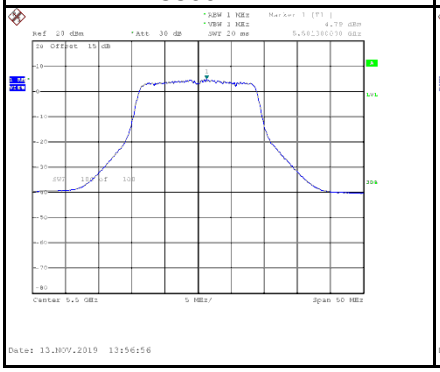	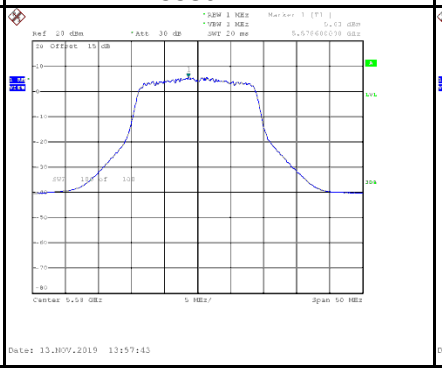	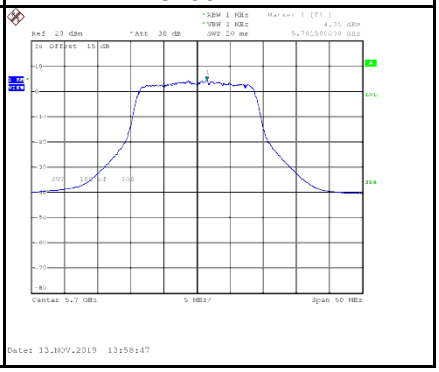

Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Result
5745	2.38	0.16	2.54	29.17	Complies
5785	2.09	0.16	2.25	29.17	Complies
5825	0.44	0.16	0.60	29.17	Complies

5745 MHz	5785 MHz	5825 MHz
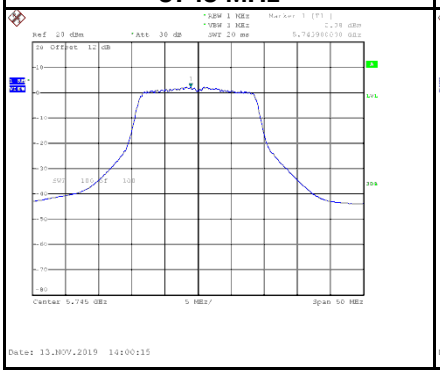	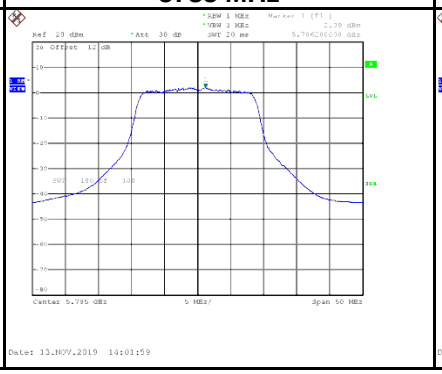	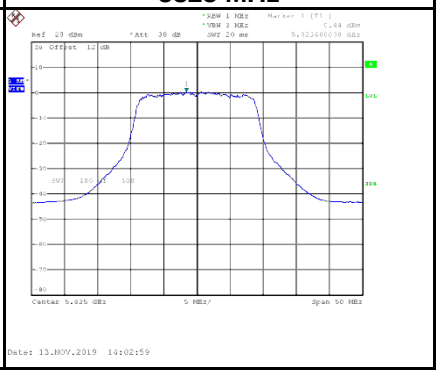

Test Mode	IEEE 802.11n (HT20)_Total

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5180	8.37	0.16	8.53	10.17	Complies
5200	8.39	0.16	8.55	10.17	Complies
5240	7.60	0.16	7.76	10.17	Complies

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5260	7.33	0.16	7.49	10.17	Complies
5300	7.77	0.16	7.93	10.17	Complies
5320	6.79	0.16	6.95	10.17	Complies

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5500	7.91	0.16	8.07	10.17	Complies
5580	8.34	0.16	8.50	10.17	Complies
5700	7.35	0.16	7.51	10.17	Complies

Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Result
5745	4.50	0.16	4.66	29.17	Complies
5785	4.61	0.16	4.77	29.17	Complies
5825	3.07	0.16	3.23	29.17	Complies

Test Mode	IEEE 802.11n (HT40)_ANT 1

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5190	1.60	0.47	2.07	10.17	Complies
5230	2.24	0.47	2.71	10.17	Complies

5190 MHz

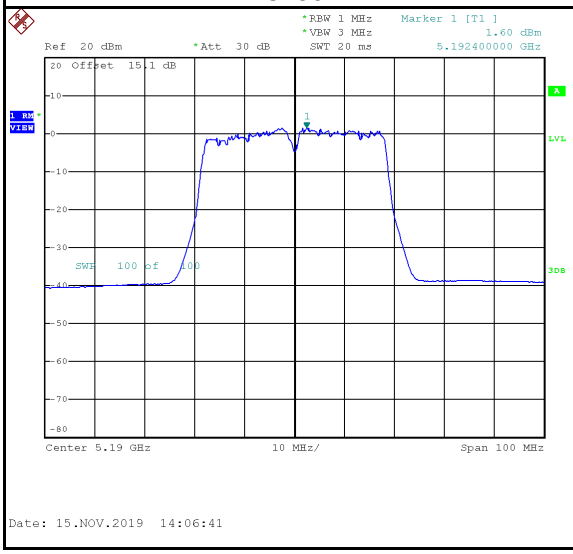

5230 MHz

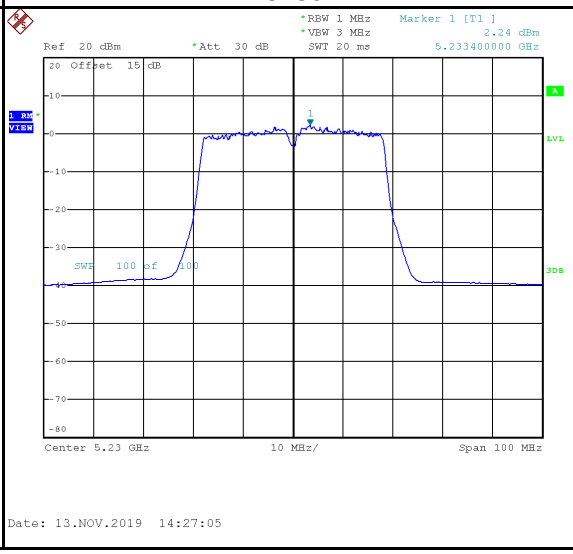

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5270	2.21	0.47	2.68	10.17	Complies
5310	-0.85	0.47	-0.38	10.17	Complies

5270 MHz

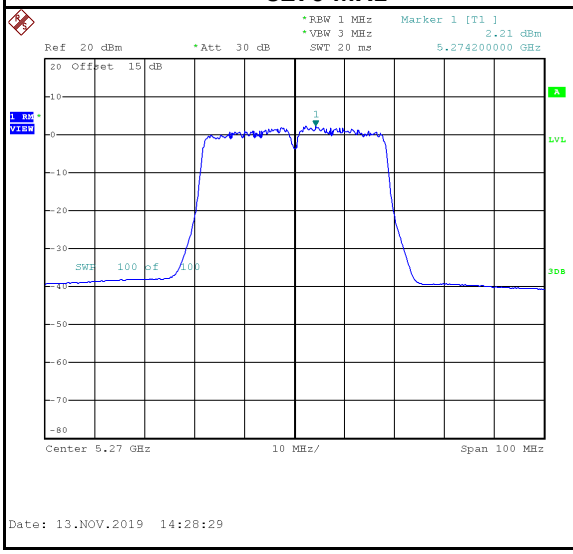

5310 MHz

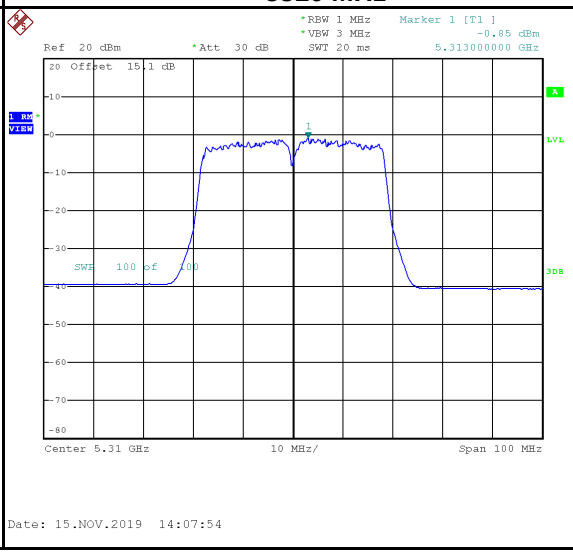

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5510	3.05	0.47	3.52	10.17	Complies
5550	2.81	0.47	3.28	10.17	Complies
5670	2.18	0.47	2.65	10.17	Complies

5510 MHz

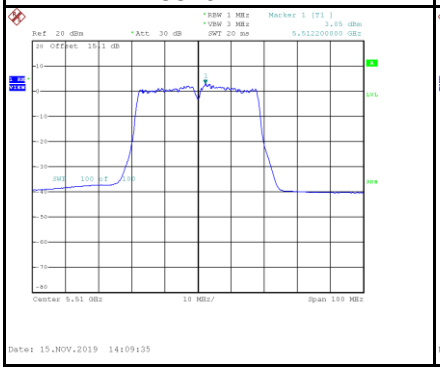

5550 MHz

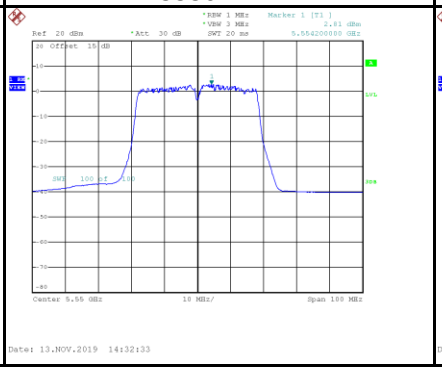

5670 MHz

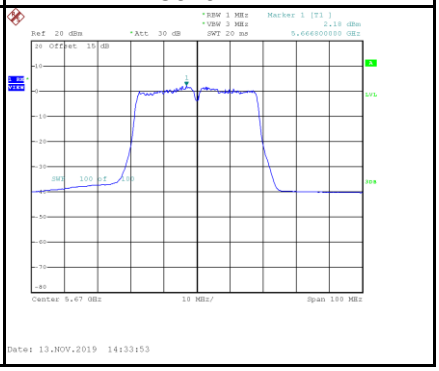

Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Result
5755	-0.70	0.47	-0.23	29.17	Complies
5795	-1.24	0.47	-0.77	29.17	Complies

5755 MHz

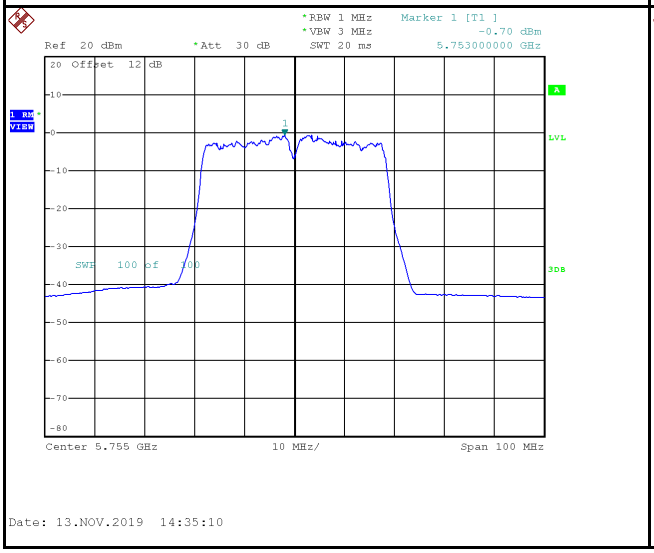

5795 MHz

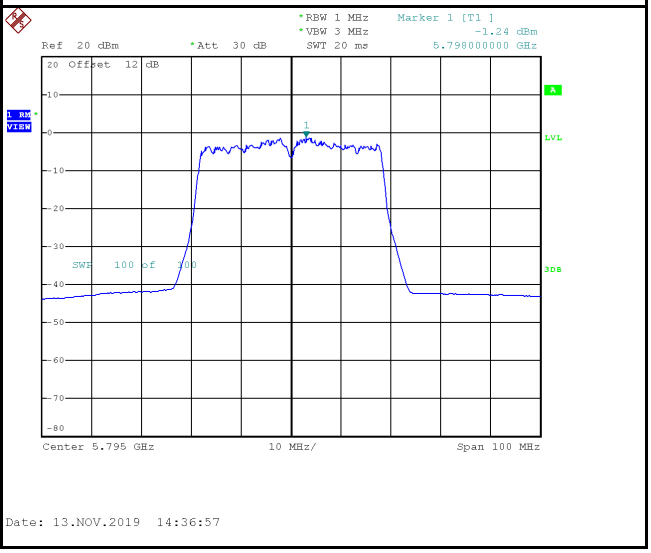

Test Mode	IEEE 802.11n (HT40)_ANT 2

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5190	1.48	0.47	1.95	10.17	Complies
5230	2.12	0.47	2.59	10.17	Complies

5190 MHz

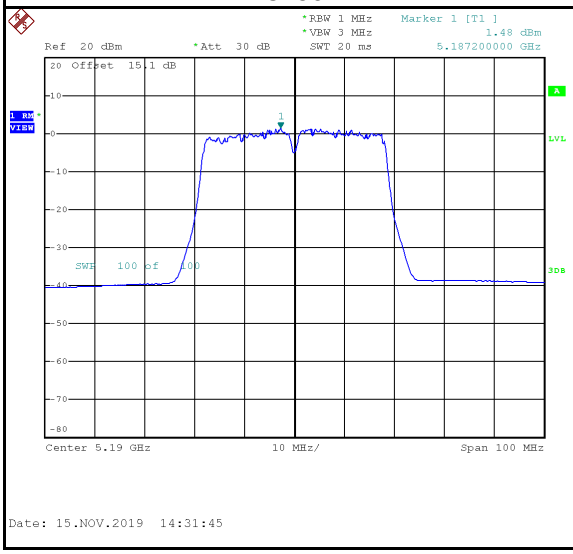

5230 MHz

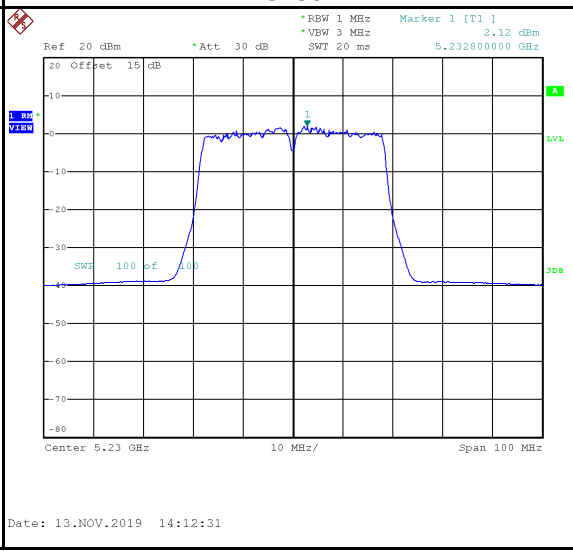

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5270	1.98	0.47	2.45	10.17	Complies
5310	-0.85	0.47	-0.38	10.17	Complies

5270 MHz

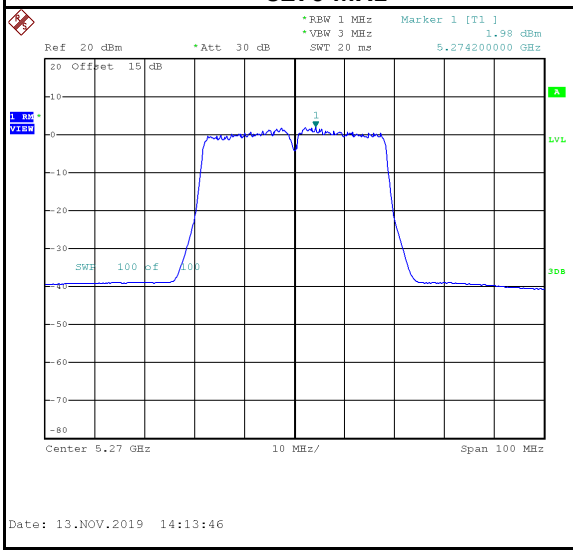

5310 MHz

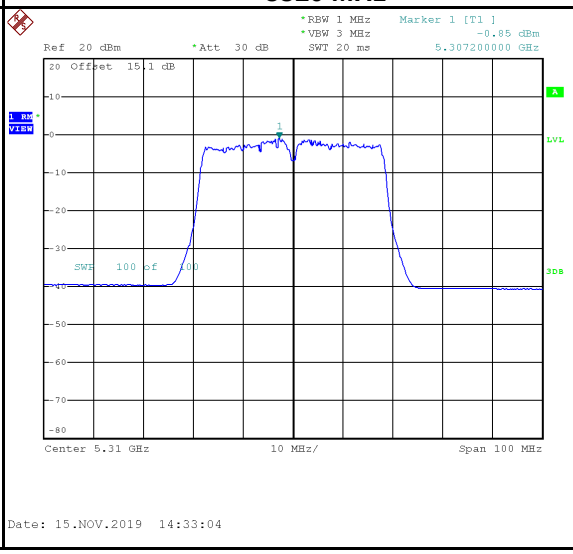

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5510	2.36	0.47	2.83	10.17	Complies
5550	3.28	0.47	3.75	10.17	Complies
5670	1.80	0.47	2.27	10.17	Complies

5510 MHz

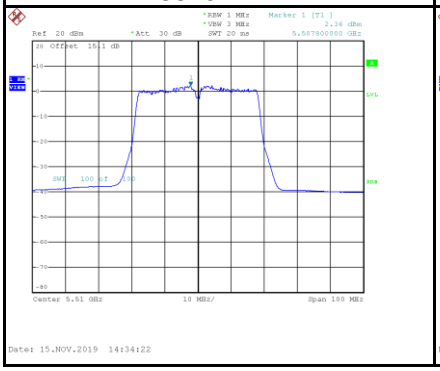

5550 MHz

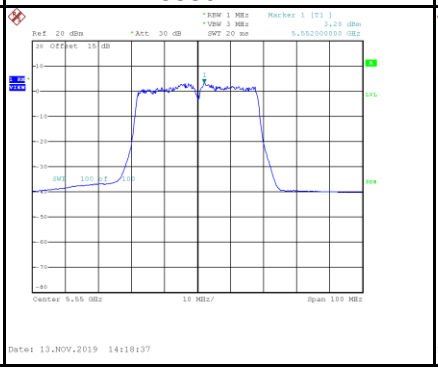

5670 MHz

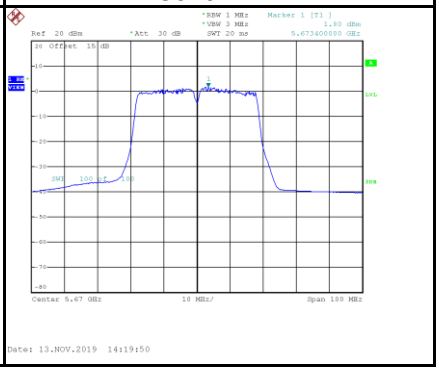

Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Result
5755	-0.15	0.47	0.32	29.17	Complies
5795	-1.26	0.47	-0.79	29.17	Complies

5755 MHz

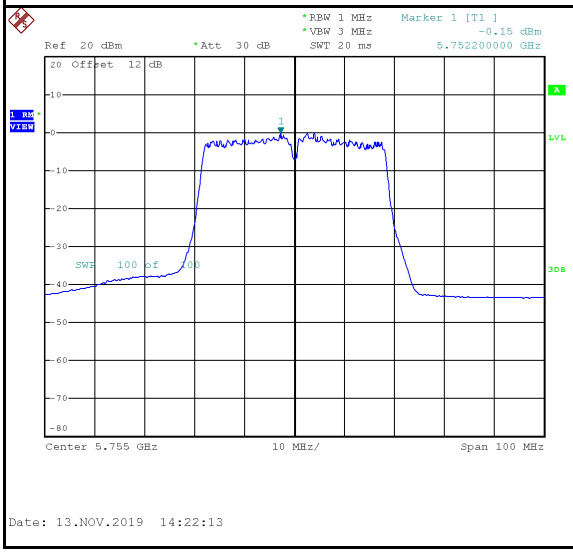

5795 MHz

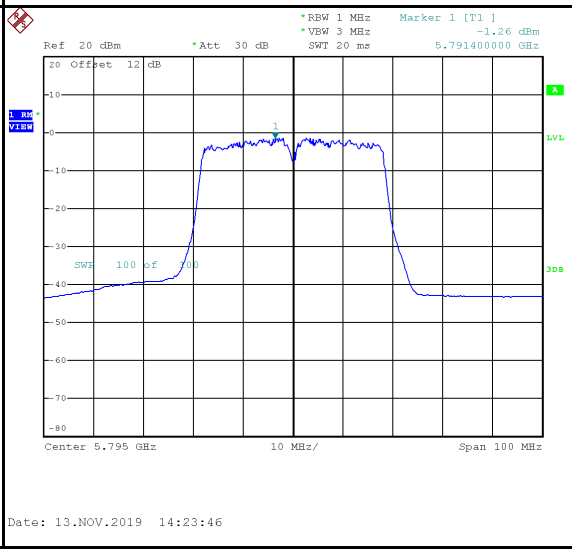

Test Mode	IEEE 802.11n (HT40)_Total

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5190	6.86	0.47	7.33	10.17	Complies
5230	7.25	0.47	7.71	10.17	Complies

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5270	7.19	0.47	7.66	10.17	Complies
5310	5.62	0.47	6.08	10.17	Complies

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5510	7.59	0.47	8.06	10.17	Complies
5550	7.81	0.47	8.28	10.17	Complies
5670	7.13	0.47	7.60	10.17	Complies

Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Result
5755	5.82	0.47	6.29	29.17	Complies
5795	5.44	0.47	5.91	29.17	Complies

Test Mode	IEEE 802.11ac (VHT80)_ANT 1

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5210	-3.82	0.44	-3.38	10.17	Complies

5210 MHz

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5290	-6.00	0.44	-5.56	10.17	Complies

5290 MHz

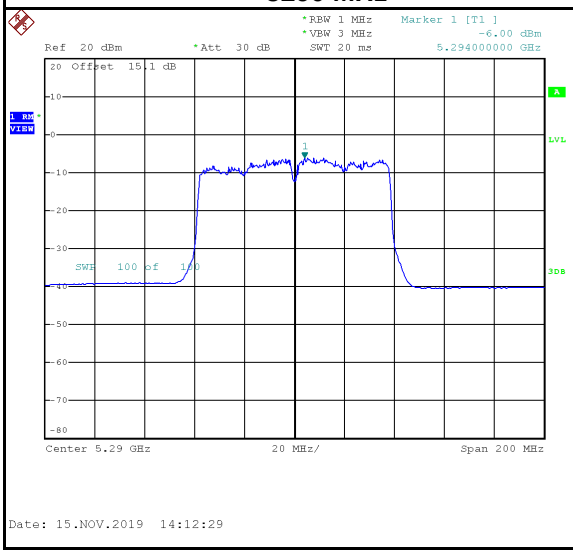

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5530	-4.31	0.44	-3.87	10.17	Complies
5610	-4.40	0.44	-3.96	10.17	Complies

5530 MHz

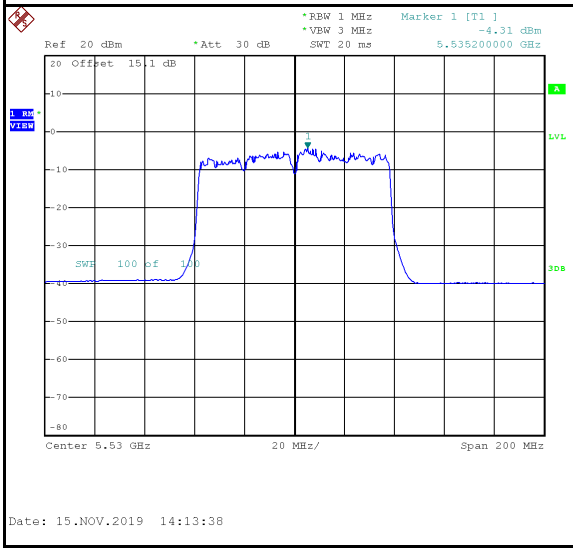

5610 MHz

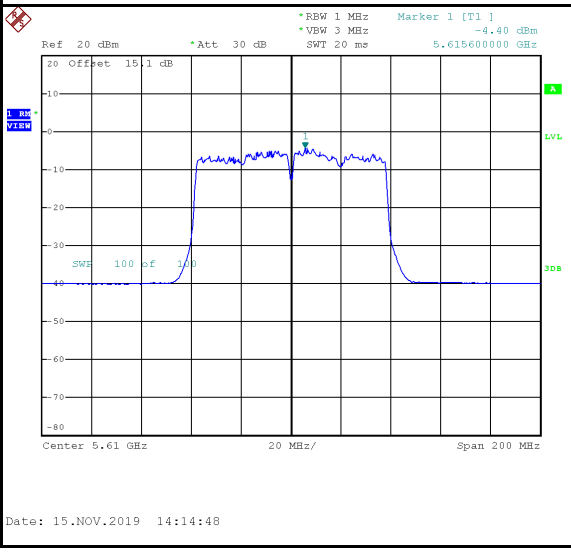

Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Result
5775	-6.53	0.44	-6.09	29.17	Complies

5775 MHz

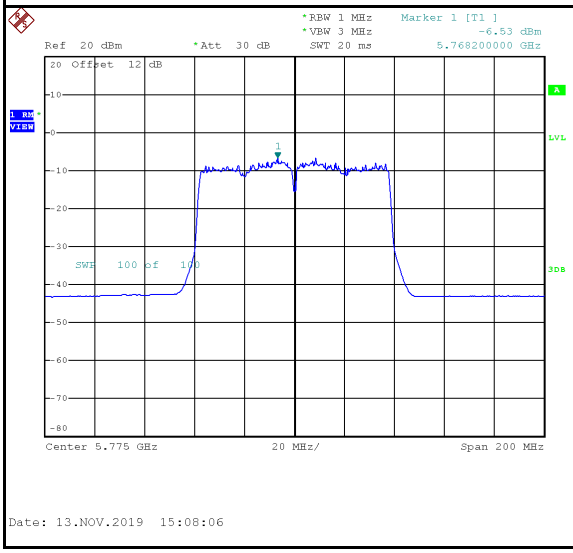

Test Mode	IEEE 802.11ac (VHT80)_ANT 2

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5210	-4.19	0.44	-3.75	10.17	Complies

5210 MHz

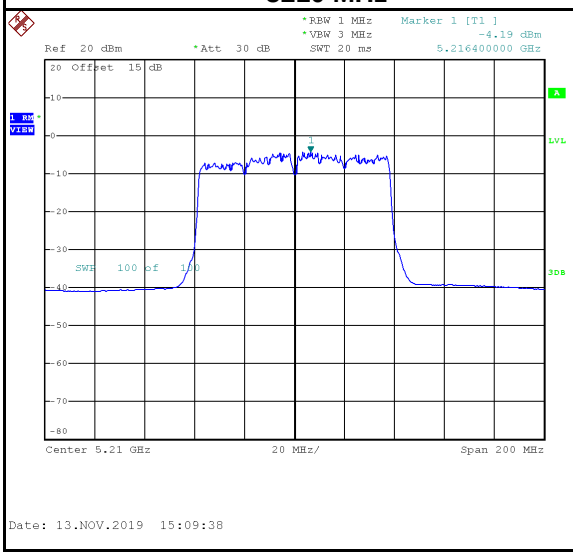

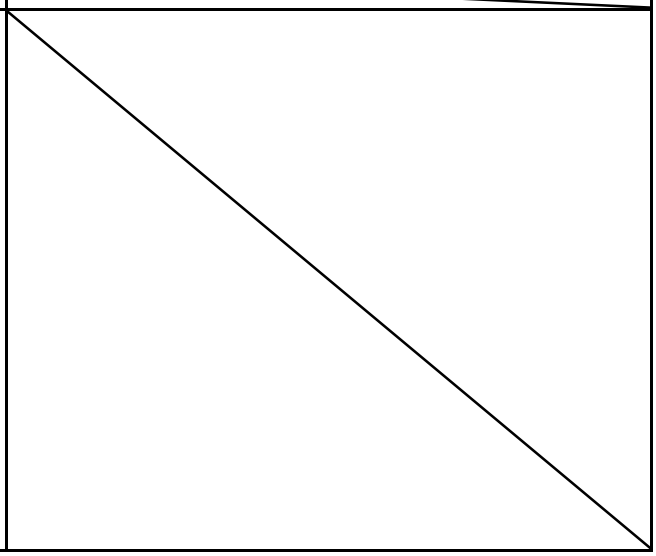

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5290	-6.60	0.44	-6.16	10.17	Complies

5290 MHz

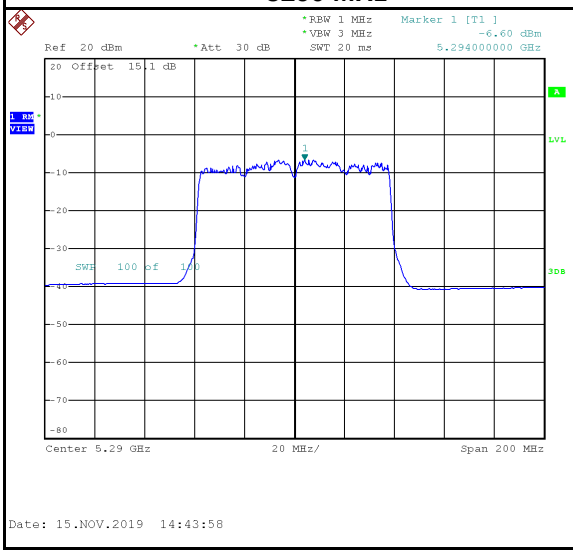

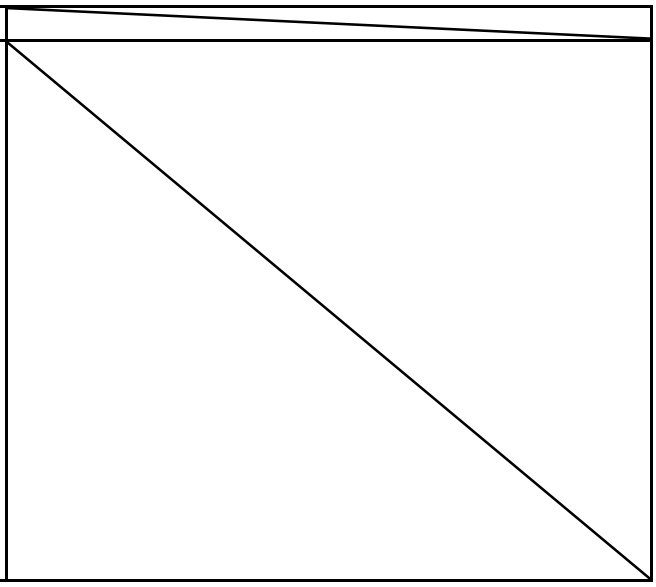

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5530	-5.42	0.44	-4.98	10.17	Complies
5610	-4.39	0.44	-3.95	10.17	Complies

5530 MHz

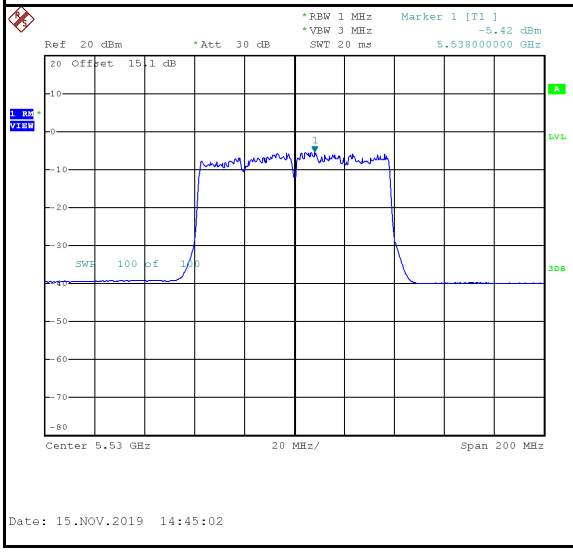

5610 MHz

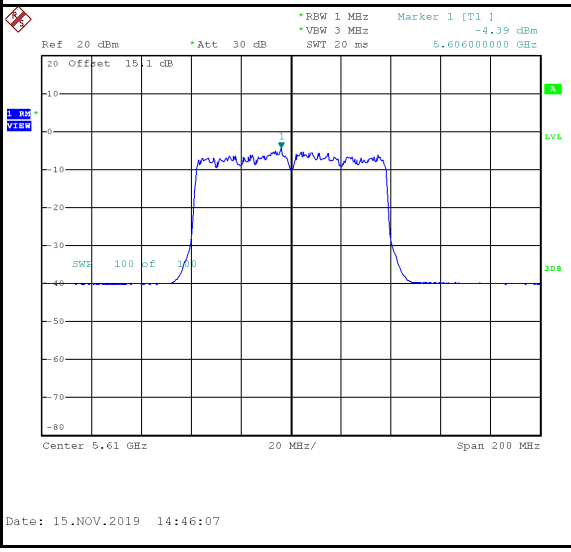

Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Result
5775	-6.16	0.44	-5.72	29.17	Complies

5775 MHz

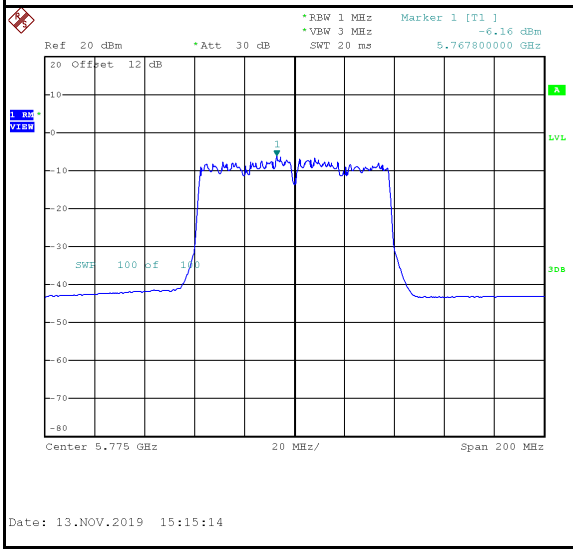

Test Mode	IEEE 802.11ac (VHT80)_Total

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5210	-0.99	0.44	-0.55	10.17	Complies

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5290	-3.28	0.44	-2.83	10.17	Complies

Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/MHz)	Limit (dBm/MHz)	Result
5530	-1.82	0.44	-1.37	10.17	Complies
5610	-1.38	0.44	-0.94	10.17	Complies

Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dB)	Power Density+ Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Result
5775	-3.33	0.44	-2.89	29.17	Complies

End of Test Report