


Product : Mobile Computer
 Test Item : General Radiated Emission
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5310MHz)
 Test Date : 2020/06/17

Horizontal

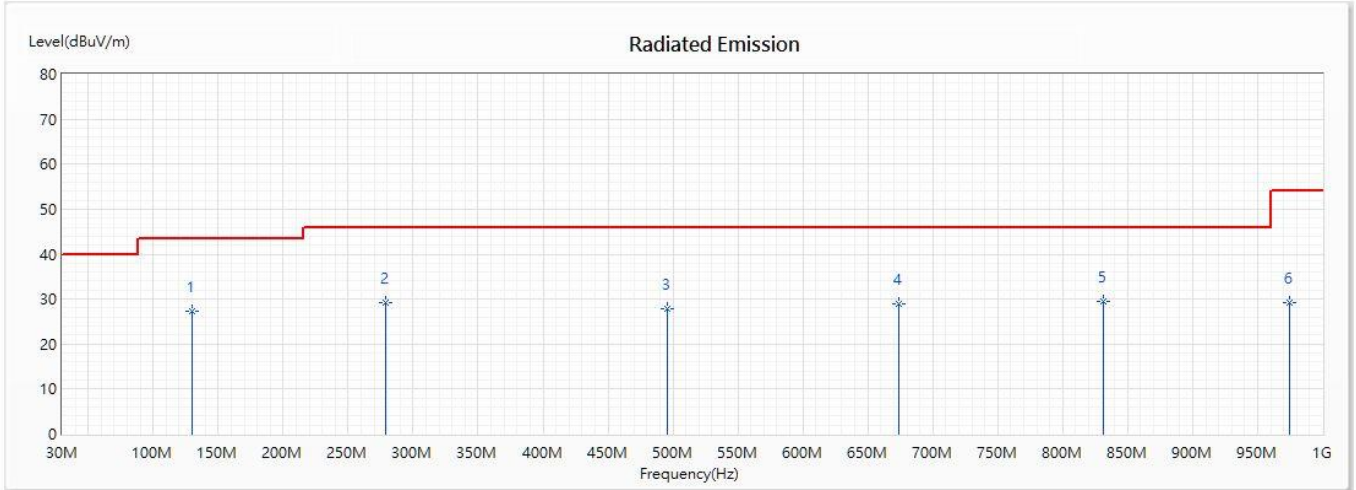


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	129.812	27.18	43.50	-16.32	36.55	-9.37	QP
2	278.826	29.23	46.00	-16.77	41.04	-11.81	QP
3	495.319	27.79	46.00	-18.21	32.56	-4.77	QP
4	673.855	29.02	46.00	-16.98	32.34	-3.32	QP
5	831.304	29.48	46.00	-16.52	31.97	-2.49	QP
6	974.696	29.34	54.00	-24.66	31.07	-1.73	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Mobile Computer
 Test Item : General Radiated Emission
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5310MHz)
 Test Date : 2020/06/17

Vertical

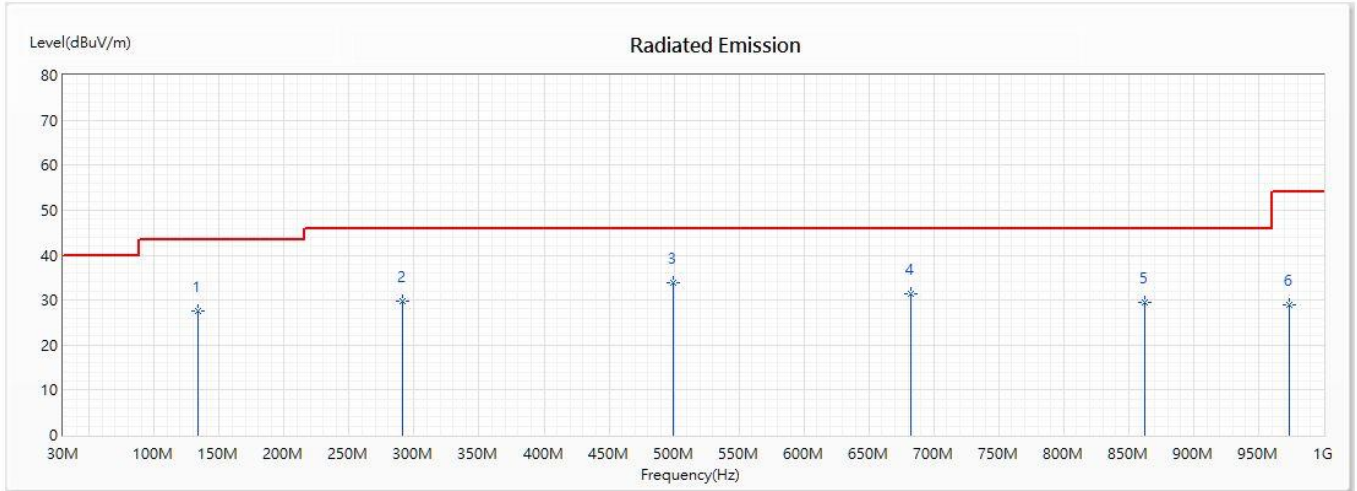


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	134.029	27.69	43.50	-15.81	37.62	-9.93	QP
2	291.478	29.84	46.00	-16.16	40.20	-10.36	QP
* 3	499.536	33.77	46.00	-12.23	38.26	-4.49	QP
4	682.29	31.45	46.00	-14.55	34.52	-3.07	QP
5	862.232	29.43	46.00	-16.57	31.54	-2.11	QP
6	973.29	29.01	54.00	-24.99	30.78	-1.77	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Mobile Computer
 Test Item : General Radiated Emission
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5550MHz)
 Test Date : 2020/06/17

Horizontal

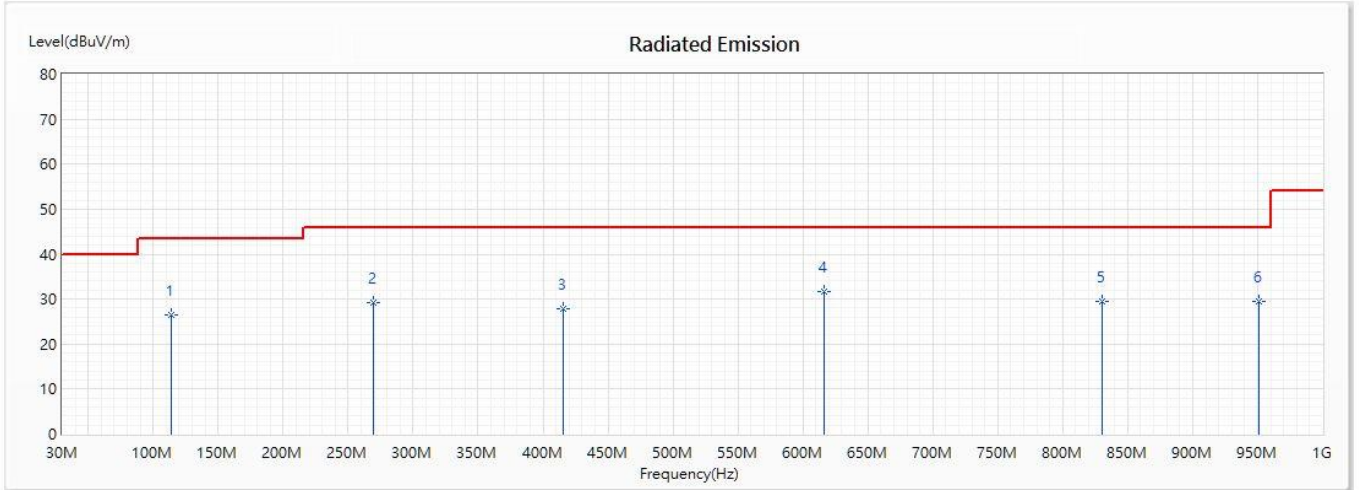


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	114.348	26.39	43.50	-17.11	36.15	-9.76	QP
2	268.986	29.15	46.00	-16.85	41.54	-12.39	QP
3	415.188	27.88	46.00	-18.12	33.74	-5.86	QP
* 4	616.217	31.67	46.00	-14.33	33.10	-1.43	QP
5	829.899	29.44	46.00	-16.56	31.96	-2.52	QP
6	950.797	29.52	46.00	-16.48	31.70	-2.18	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Mobile Computer
 Test Item : General Radiated Emission
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5550MHz)
 Test Date : 2020/06/17

Vertical

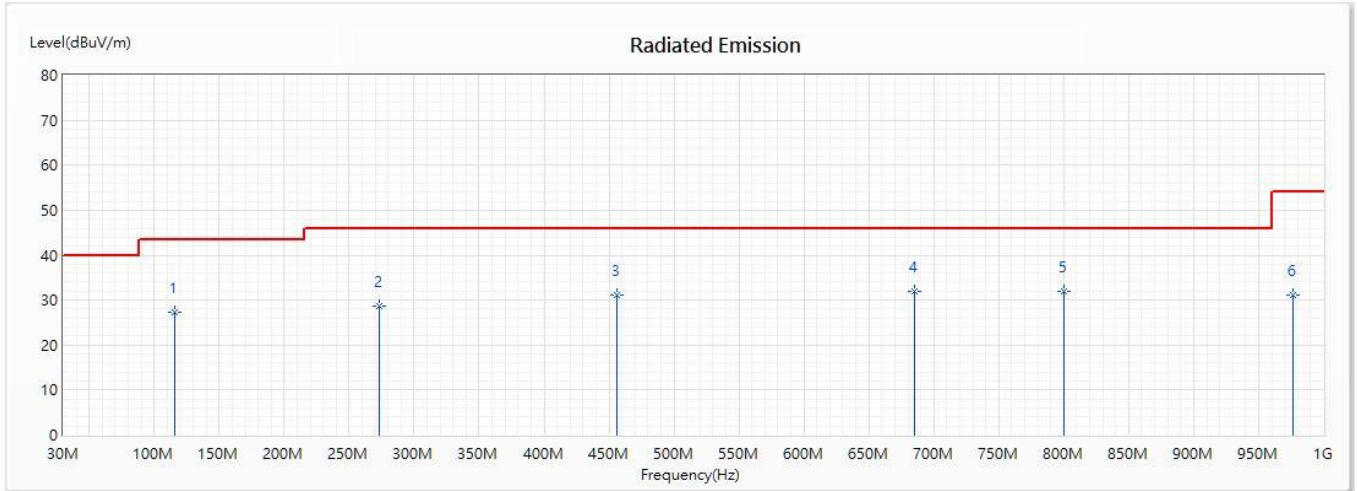


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	115.754	27.41	43.50	-16.09	37.21	-9.80	QP
2	273.203	28.60	46.00	-17.40	40.81	-12.21	QP
3	455.957	31.09	46.00	-14.91	35.09	-4.00	QP
4	685.101	31.81	46.00	-14.19	34.88	-3.07	QP
* 5	800.377	31.83	46.00	-14.17	34.53	-2.70	QP
6	976.101	31.25	54.00	-22.75	32.94	-1.69	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Mobile Computer
 Test Item : General Radiated Emission
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5710MHz)
 Test Date : 2020/06/17

Horizontal

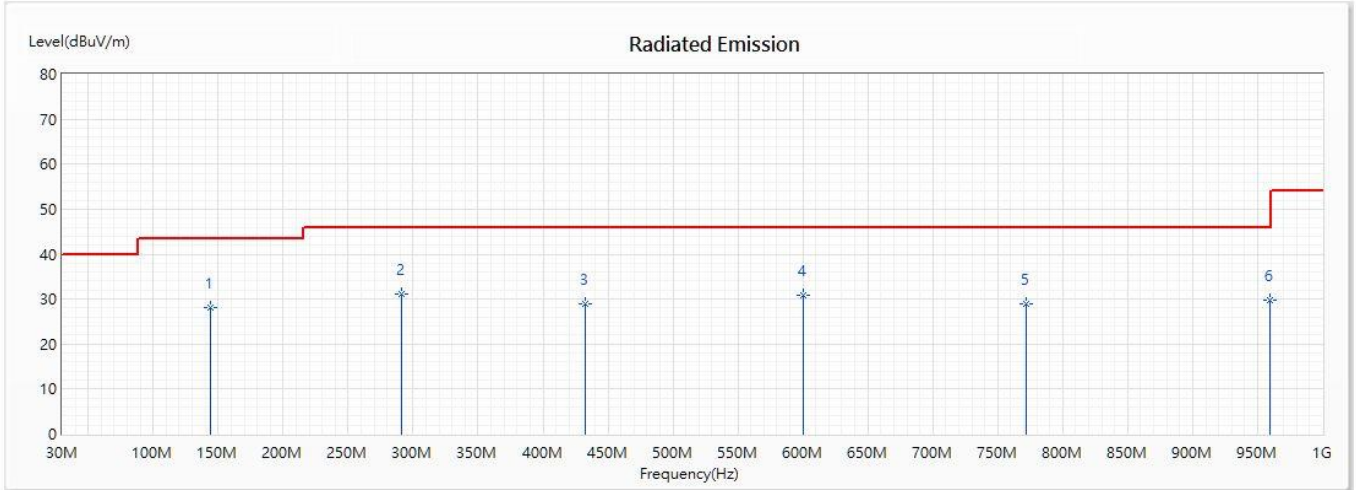


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	143.87	28.12	43.50	-15.38	39.79	-11.67	QP
* 2	291.478	31.08	46.00	-14.92	41.44	-10.36	QP
3	432.058	28.93	46.00	-17.07	33.13	-4.20	QP
4	600.754	30.91	46.00	-15.09	31.12	-0.21	QP
5	772.261	28.82	46.00	-17.18	30.87	-2.05	QP
6	959.232	29.81	46.00	-16.19	31.96	-2.15	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Mobile Computer
 Test Item : General Radiated Emission
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (57100MHz)
 Test Date : 2020/06/17

Vertical

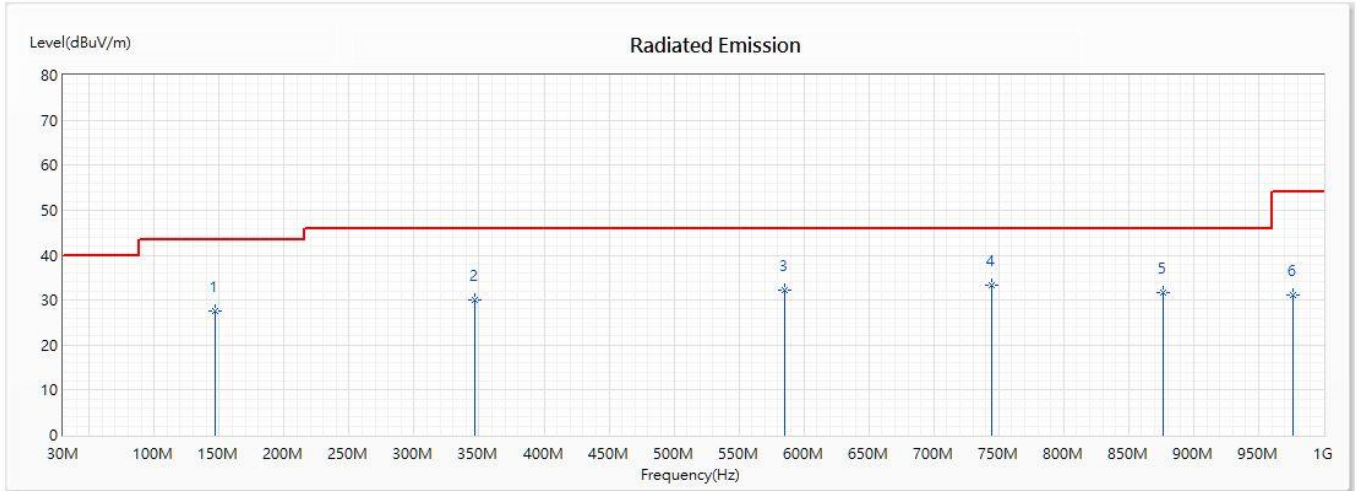


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	146.681	27.66	43.50	-15.84	39.99	-12.33	QP
2	346.304	29.95	46.00	-16.05	37.15	-7.20	QP
3	585.29	32.13	46.00	-13.87	32.94	-0.81	QP
* 4	744.145	33.18	46.00	-12.82	32.97	0.21	QP
5	876.29	31.68	46.00	-14.32	33.79	-2.11	QP
6	976.101	31.25	54.00	-22.75	32.94	-1.69	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Mobile Computer
 Test Item : General Radiated Emission
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5795MHz)
 Test Date : 2020/06/17

Horizontal

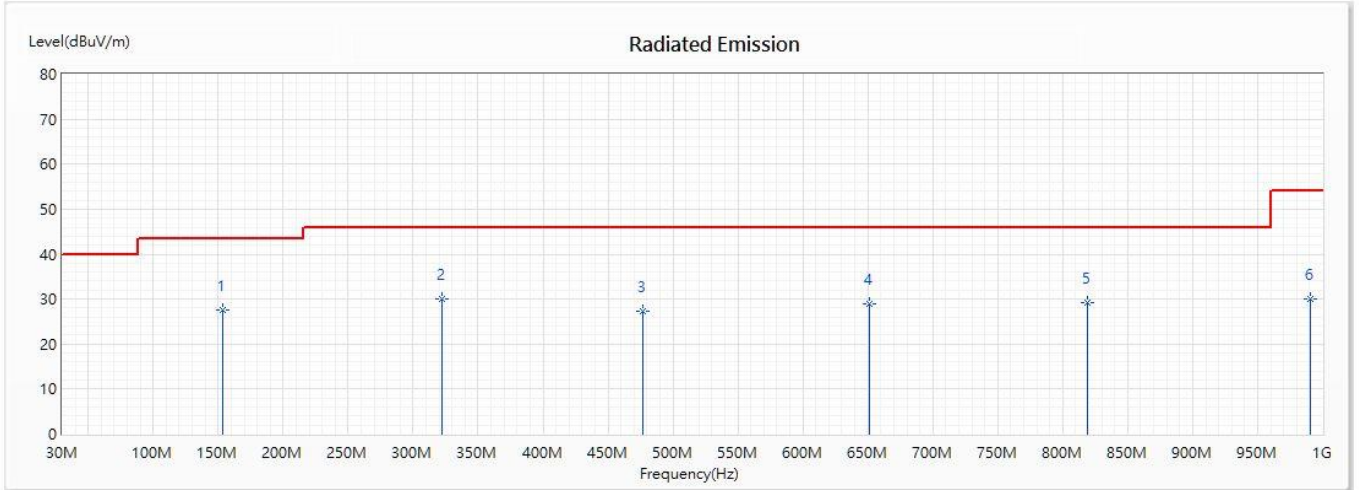


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	153.71	27.48	43.50	-16.02	40.88	-13.40	QP
* 2	322.406	30.04	46.00	-15.96	37.78	-7.74	QP
3	477.043	27.32	46.00	-18.68	32.80	-5.48	QP
4	651.362	28.92	46.00	-17.08	32.24	-3.32	QP
5	818.652	29.16	46.00	-16.84	32.01	-2.85	QP
6	990.159	29.91	54.00	-24.09	31.62	-1.71	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Mobile Computer
 Test Item : General Radiated Emission
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5795MHz)
 Test Date : 2020/06/17

Vertical

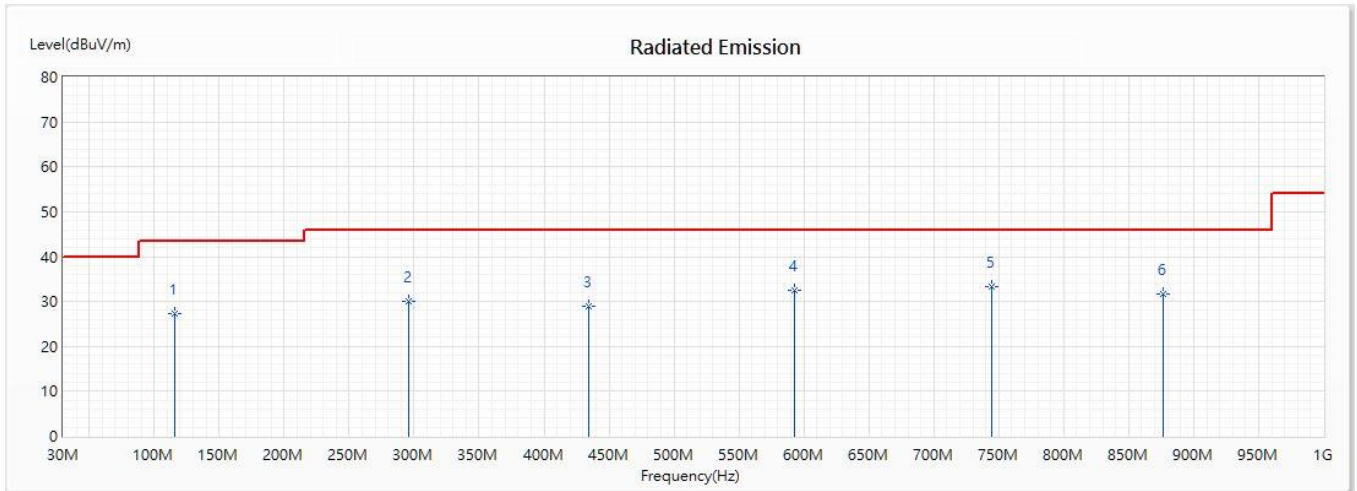


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	115.754	27.41	43.50	-16.09	37.21	-9.80	QP
2	295.696	29.91	46.00	-16.09	39.20	-9.29	QP
3	434.87	28.81	46.00	-17.19	32.74	-3.93	QP
4	592.319	32.43	46.00	-13.57	32.92	-0.49	QP
* 5	744.145	33.18	46.00	-12.82	32.97	0.21	QP
6	876.29	31.68	46.00	-14.32	33.79	-2.11	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Mobile Computer
 Test Item : General Radiated Emission
 Test Mode : Mode 4: Transmit (802.11ac-80BW 32.5Mbps) (5210MHz)
 Test Date : 2020/06/17

Horizontal

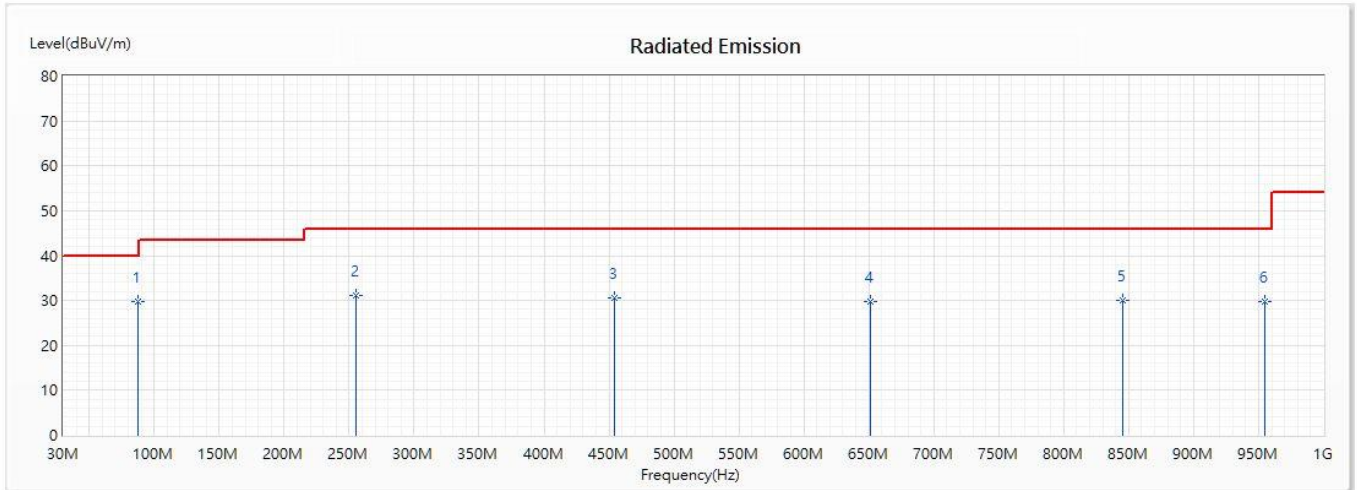


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	87.638	29.78	40.00	-10.22	39.72	-9.94	QP
2	254.928	31.04	46.00	-14.96	42.66	-11.62	QP
3	454.551	30.52	46.00	-15.48	34.47	-3.95	QP
4	651.362	29.73	46.00	-16.27	33.05	-3.32	QP
5	845.362	30.00	46.00	-16.00	32.10	-2.10	QP
6	955.014	29.71	46.00	-16.29	31.88	-2.17	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Mobile Computer
 Test Item : General Radiated Emission
 Test Mode : Mode 4: Transmit (802.11ac-80BW 32.5Mbps) (5210MHz)
 Test Date : 2020/06/17

Vertical

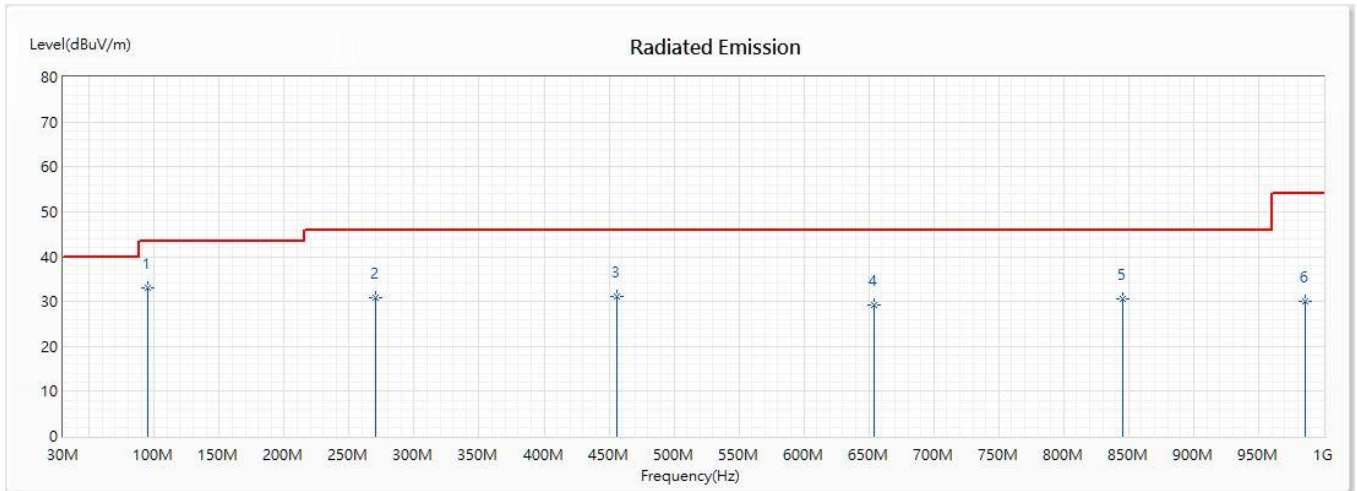


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	94.667	32.99	43.50	-10.51	42.35	-9.36	QP
2	270.391	30.76	46.00	-15.24	43.17	-12.41	QP
3	455.957	31.21	46.00	-14.79	35.21	-4.00	QP
4	654.174	29.25	46.00	-16.75	32.76	-3.51	QP
5	845.362	30.62	46.00	-15.38	32.72	-2.10	QP
6	985.942	30.00	54.00	-24.00	31.66	-1.66	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Mobile Computer
 Test Item : General Radiated Emission
 Test Mode : Mode 4: Transmit (802.11ac-80BW 32.5Mbps) (5290MHz)
 Test Date : 2020/06/17

Horizontal

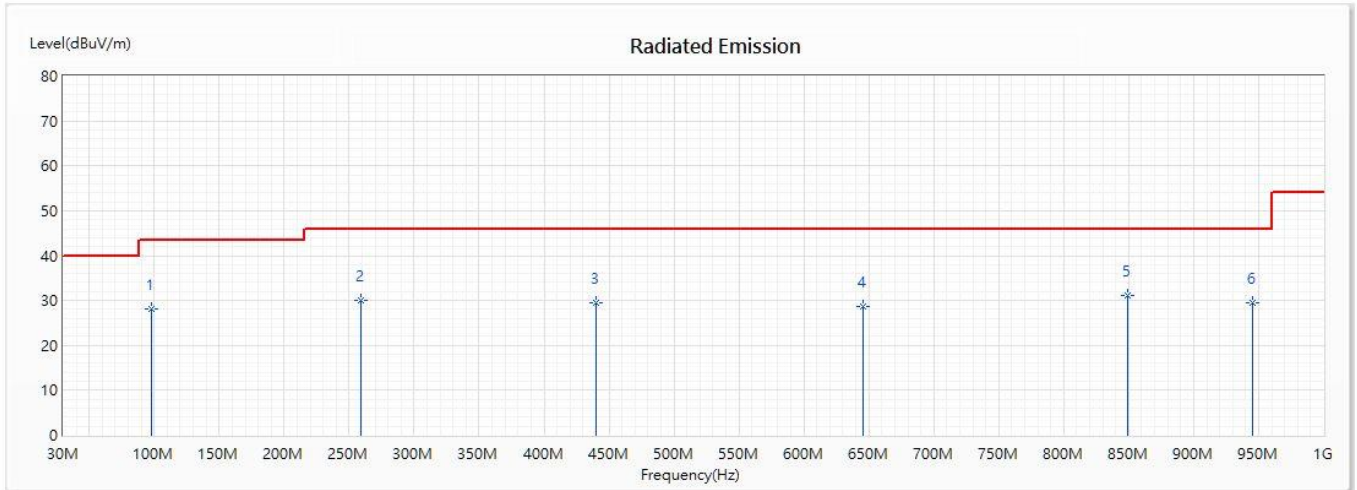


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	97.478	28.06	43.50	-15.44	36.97	-8.91	QP
2	259.145	29.97	46.00	-16.03	41.77	-11.80	QP
3	440.493	29.38	46.00	-16.62	32.83	-3.45	QP
4	645.739	28.56	46.00	-17.44	31.51	-2.95	QP
* 5	849.58	31.17	46.00	-14.83	33.29	-2.12	QP
6	945.174	29.53	46.00	-16.47	31.71	-2.18	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Mobile Computer
 Test Item : General Radiated Emission
 Test Mode : Mode 4: Transmit (802.11ac-80BW 32.5Mbps) (5290MHz)
 Test Date : 2020/06/17

Vertical

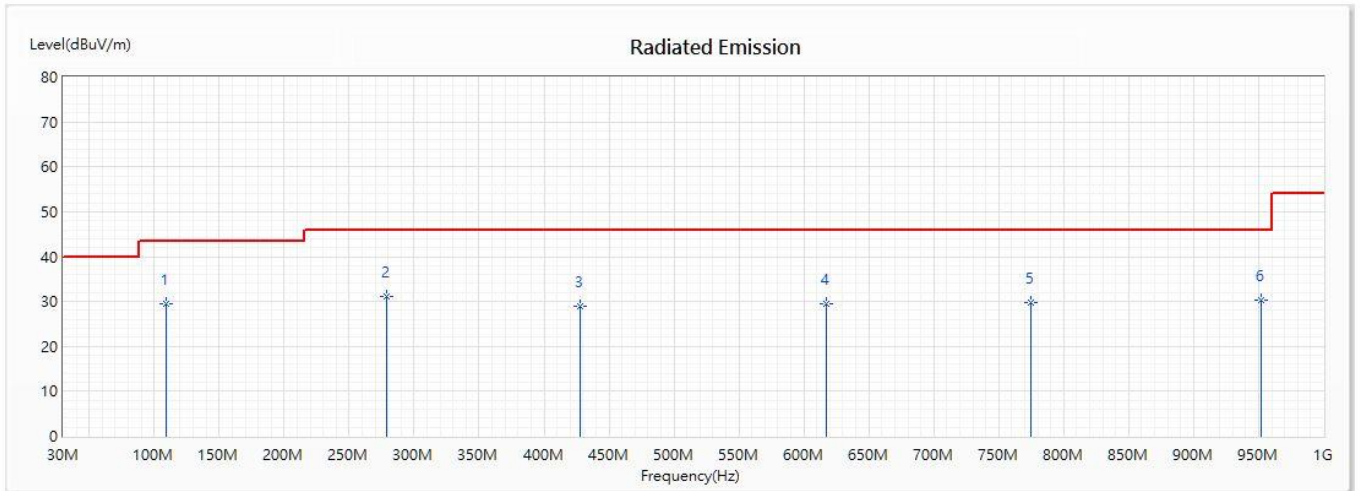


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	108.725	29.62	43.50	-13.88	39.12	-9.50	QP
2	278.826	31.03	46.00	-14.97	42.84	-11.81	QP
3	427.841	28.94	46.00	-17.06	33.55	-4.61	QP
4	617.623	29.44	46.00	-16.56	30.98	-1.54	QP
5	775.072	29.74	46.00	-16.26	31.90	-2.16	QP
6	952.203	30.42	46.00	-15.58	32.60	-2.18	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Mobile Computer
 Test Item : General Radiated Emission
 Test Mode : Mode 4: Transmit (802.11ac-80BW 32.5Mbps) (5530MHz)
 Test Date : 2020/06/17

Horizontal

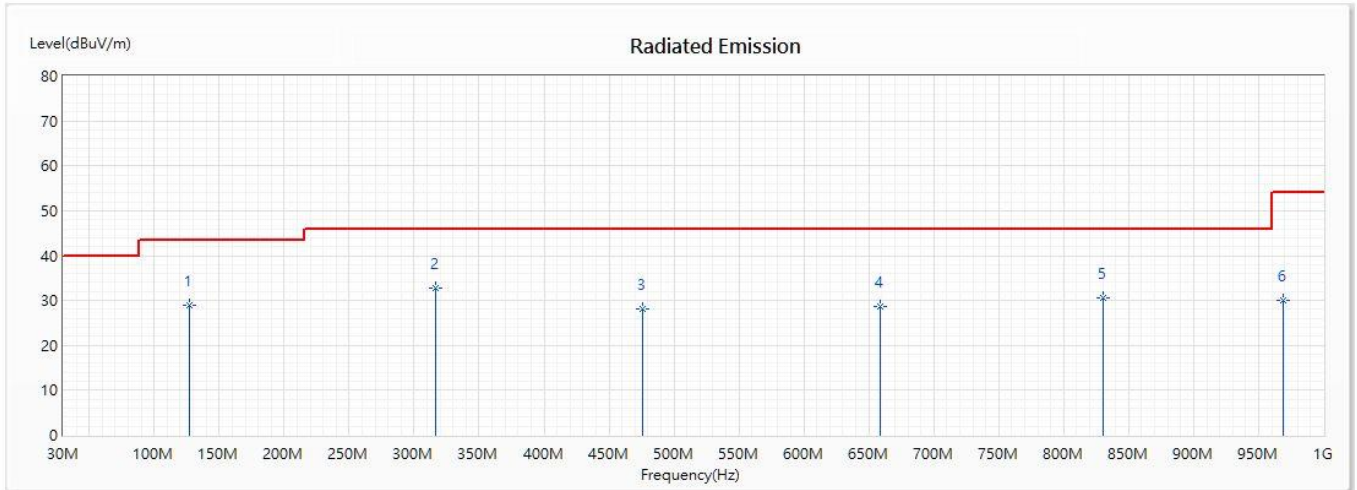


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	127	28.88	43.50	-14.62	38.40	-9.52	QP
* 2	316.783	32.80	46.00	-13.20	40.61	-7.81	QP
3	475.638	28.06	46.00	-17.94	33.43	-5.37	QP
4	658.391	28.60	46.00	-17.40	32.39	-3.79	QP
5	829.899	30.56	46.00	-15.44	33.08	-2.52	QP
6	969.072	29.90	54.00	-24.10	31.79	-1.89	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Mobile Computer
 Test Item : General Radiated Emission
 Test Mode : Mode 4: Transmit (802.11ac-80BW 32.5Mbps) (5530MHz)
 Test Date : 2020/06/17

Vertical

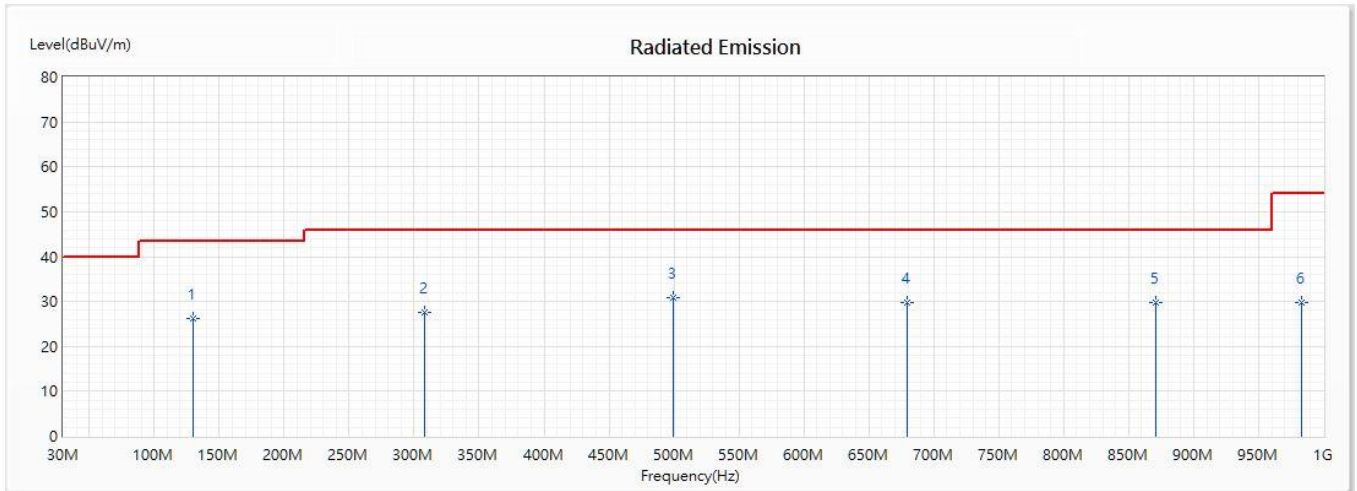


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	129.812	26.33	43.50	-17.17	35.70	-9.37	QP
2	308.348	27.61	46.00	-18.39	35.61	-8.00	QP
* 3	499.536	30.78	46.00	-15.22	35.27	-4.49	QP
4	679.478	29.65	46.00	-16.35	32.74	-3.09	QP
5	870.667	29.86	46.00	-16.14	31.97	-2.11	QP
6	983.13	29.70	54.00	-24.30	31.32	-1.62	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Mobile Computer
 Test Item : General Radiated Emission
 Test Mode : Mode 4: Transmit (802.11ac-80BW 32.5Mbps) (5775MHz)
 Test Date : 2020/06/17

Horizontal

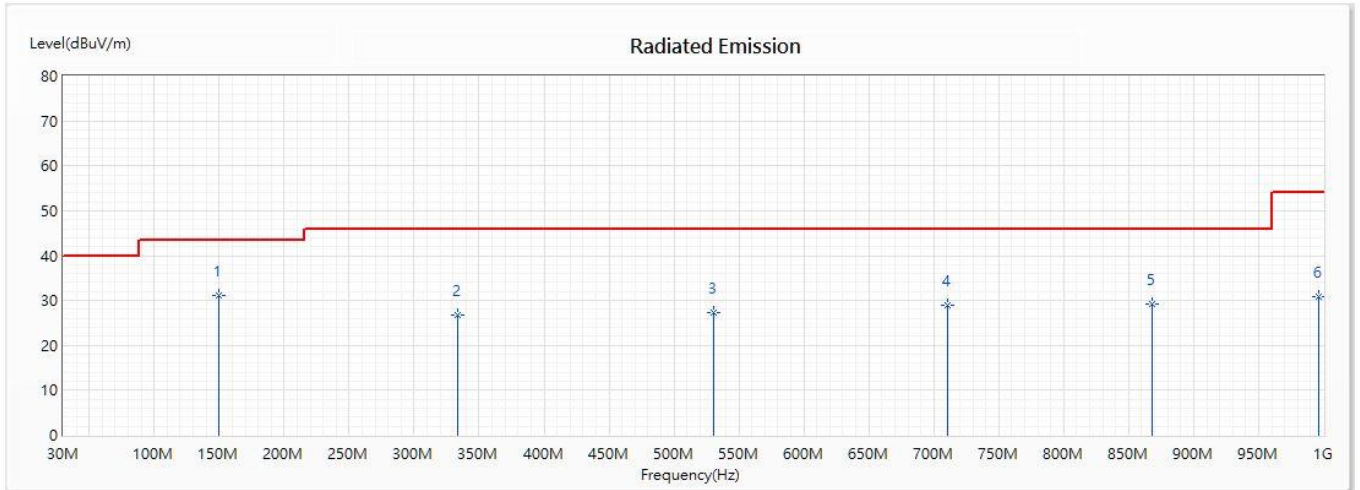


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	149.493	31.11	43.50	-12.39	44.11	-13.00	QP
2	333.652	26.67	46.00	-19.33	34.36	-7.69	QP
3	530.464	27.17	46.00	-18.83	32.04	-4.87	QP
4	710.406	28.82	46.00	-17.18	31.78	-2.96	QP
5	867.855	29.29	46.00	-16.71	31.40	-2.11	QP
6	995.783	30.82	54.00	-23.18	32.60	-1.78	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Mobile Computer
 Test Item : General Radiated Emission
 Test Mode : Mode 4: Transmit (802.11ac-80BW 32.5Mbps) (5775MHz)
 Test Date : 2020/06/17

Vertical

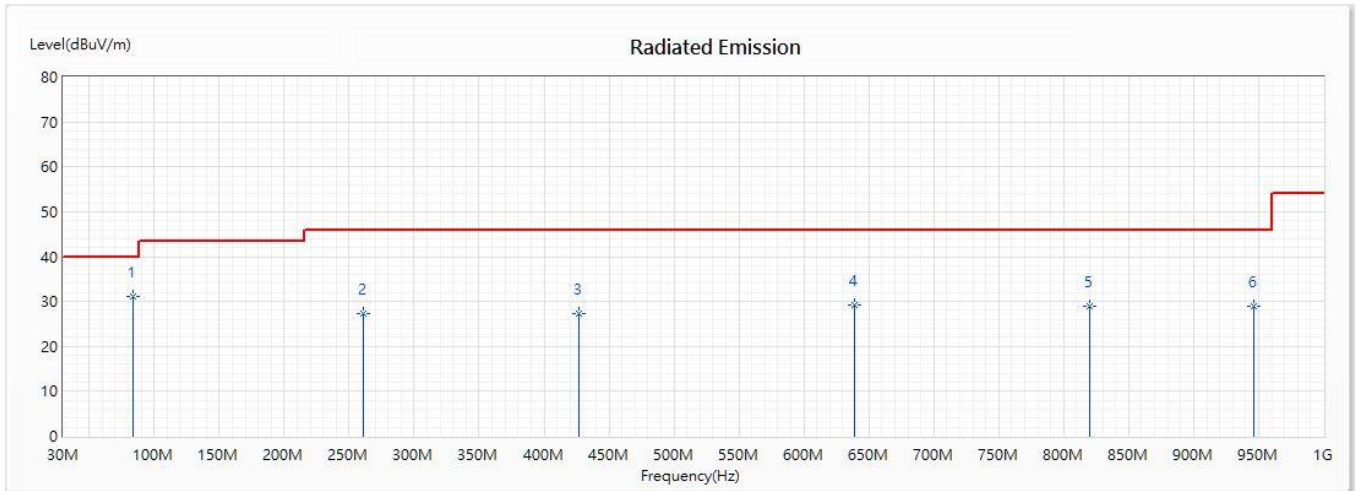

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	83.42	31.18	40.00	-8.82	42.41	-11.23	QP
2	260.551	27.41	46.00	-18.59	39.28	-11.87	QP
3	426.435	27.29	46.00	-18.71	32.04	-4.75	QP
4	638.71	29.20	46.00	-16.80	31.73	-2.53	QP
5	820.058	28.96	46.00	-17.04	31.82	-2.86	QP
6	946.58	28.98	46.00	-17.02	31.16	-2.18	QP


Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.


6. Band Edge

6.1. Test Setup

RF Conducted Measurement:

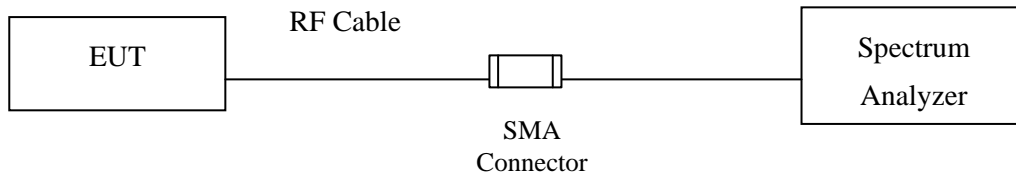

RF Radiated Measurement:

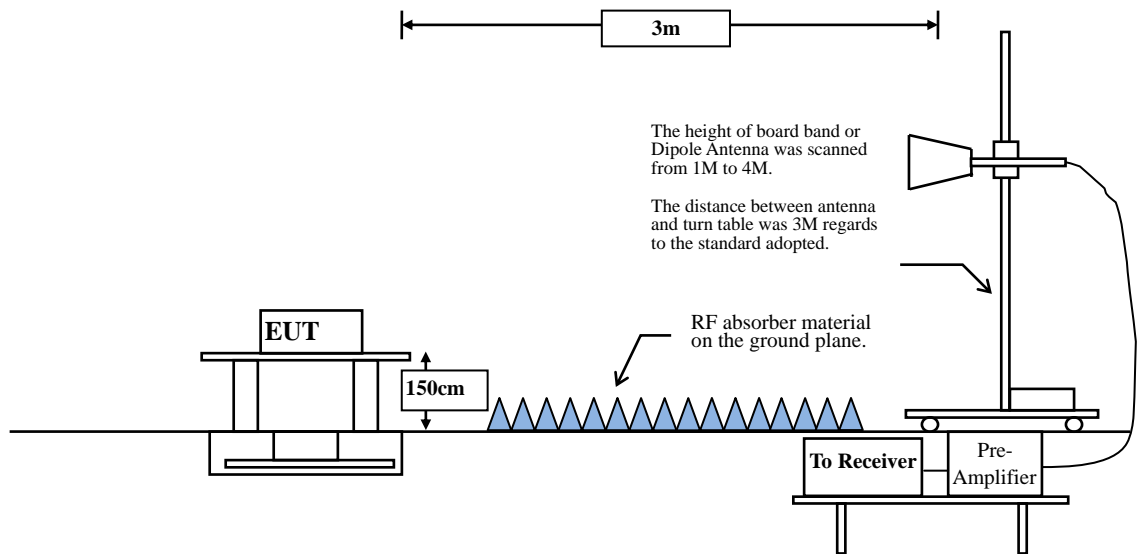

6.2. Limits

The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209:

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBµV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks :

1. RF Voltage (dBµV) = 20 log RF Voltage (uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

6.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10:2013 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz. The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

RBW and VBW Parameter setting:

According to KDB 789033 section II.G.5 Procedure for Unwanted Maximum Emissions Measurements above 1000 MHz.

RBW = 1MHz.

VBW \geq 3MHz.

According to KDB 789033 section II.G.6 Procedures for Average Unwanted Emissions Measurements above 1000 MHz.

RBW = 1MHz.

VBW = 10Hz, when duty cycle \geq 98 %

VBW \geq 1/T, when duty cycle < 98 %

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)


5GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11a	90.32	2.0290	493	500
802.11n20	89.58	1.8696	535	1000
802.11n40	78.49	0.8986	1113	2000
802.11ac80	55.84	0.2493	4012	5000

Note: Duty Cycle Refer to Section 8

6.4. Test Result of Band Edge

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5180MHz)
 Test Date : 2020/06/11

Horizontal

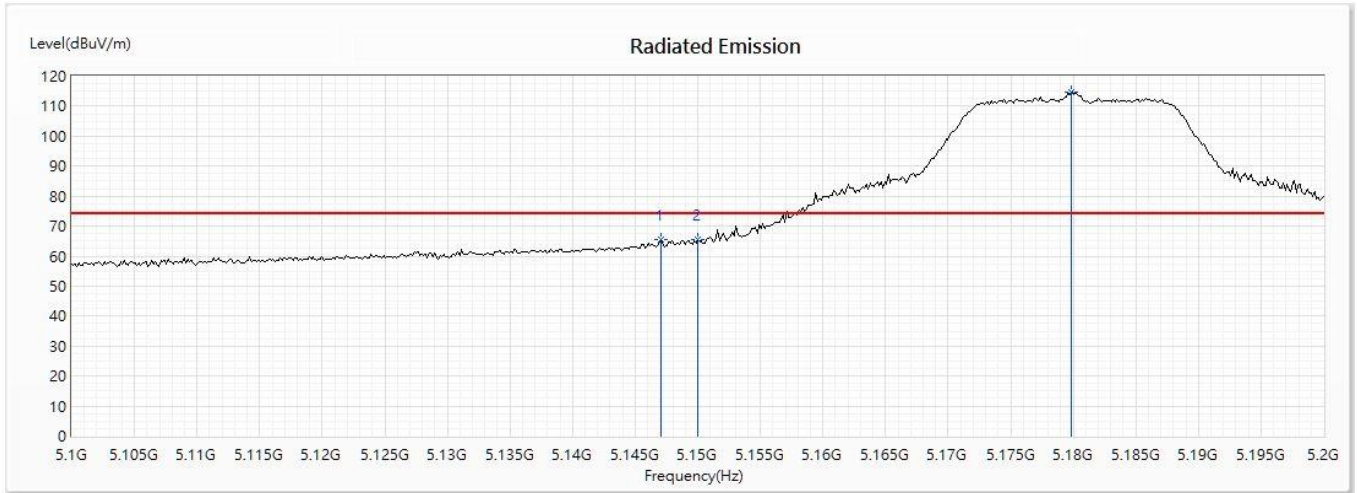


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5147.101	65.63	74.00	-8.37	47.25	18.38	PK
2	5150	65.37	74.00	-8.63	47.00	18.37	PK
! 3	5179.855	114.49	--	--	96.22	18.27	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5180MHz)
 Test Date : 2020/06/11

Horizontal

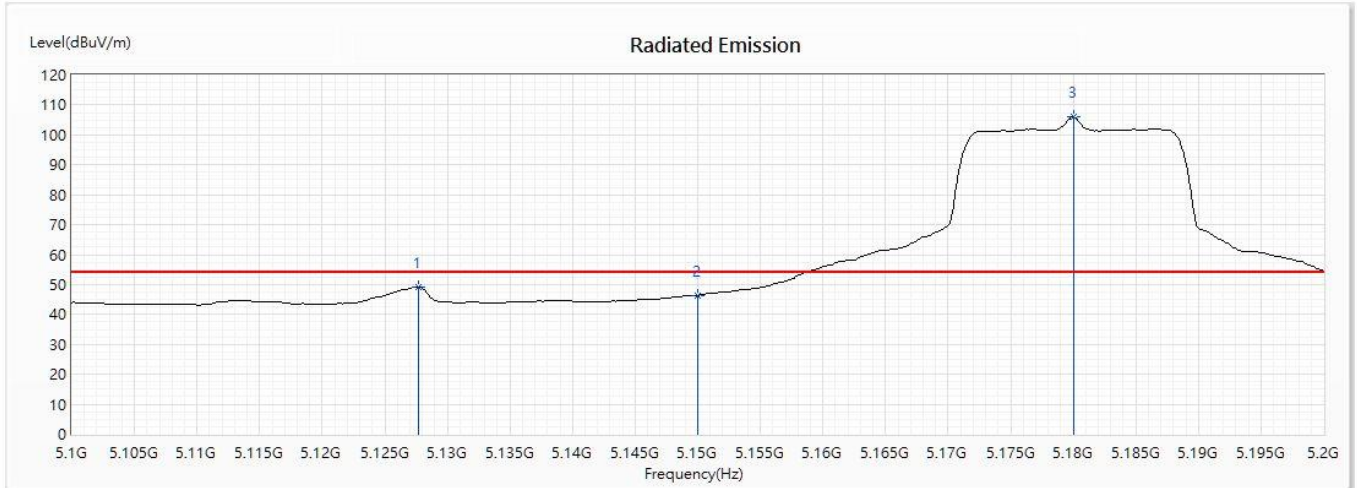


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5127.681	49.20	54.00	-4.80	30.75	18.45	AV
2	5150	46.37	54.00	-7.63	28.00	18.37	AV
! 3	5180	105.97	--	--	87.70	18.27	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5180MHz)
 Test Date : 2020/06/11

Vertical

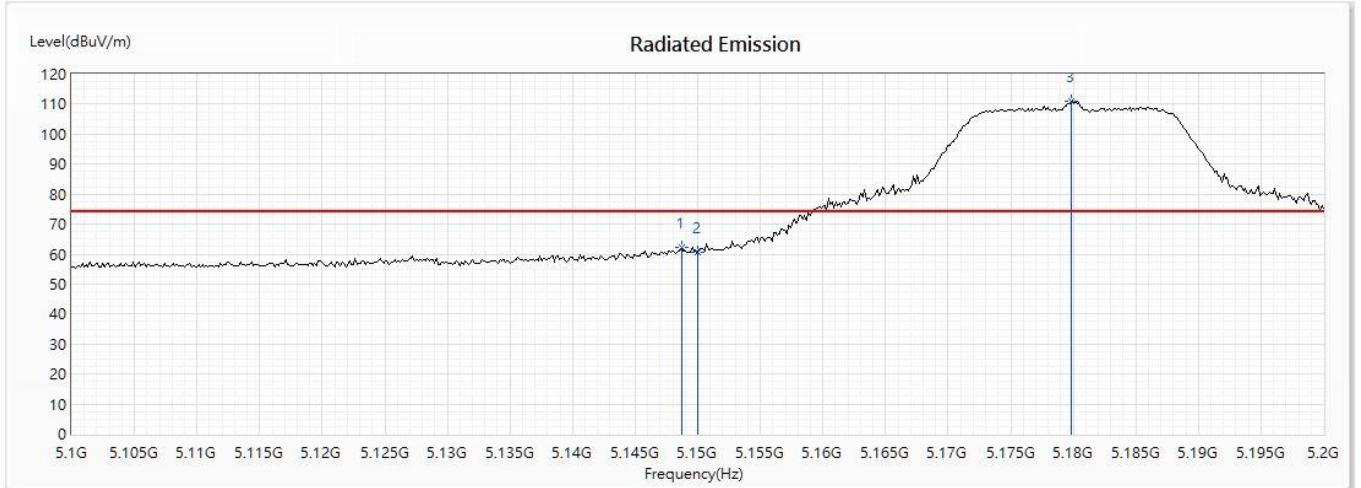


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5148.696	62.37	74.00	-11.63	44.00	18.37	PK
2	5150	60.66	74.00	-13.34	42.29	18.37	PK
! 3	5179.855	110.90	--	--	92.63	18.27	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5180MHz)
 Test Date : 2020/06/11

Vertical

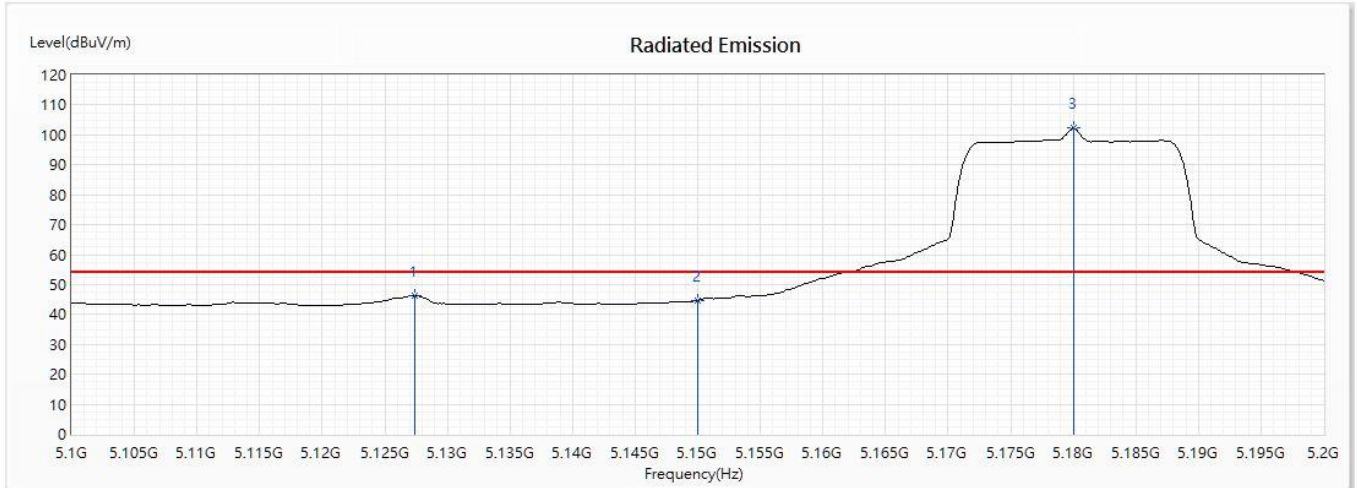


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5127.391	46.18	54.00	-7.82	27.73	18.45	AV
2	5150	44.61	54.00	-9.39	26.24	18.37	AV
! 3	5180	102.20	--	--	83.93	18.27	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5320MHz)
 Test Date : 2020/06/11

Horizontal

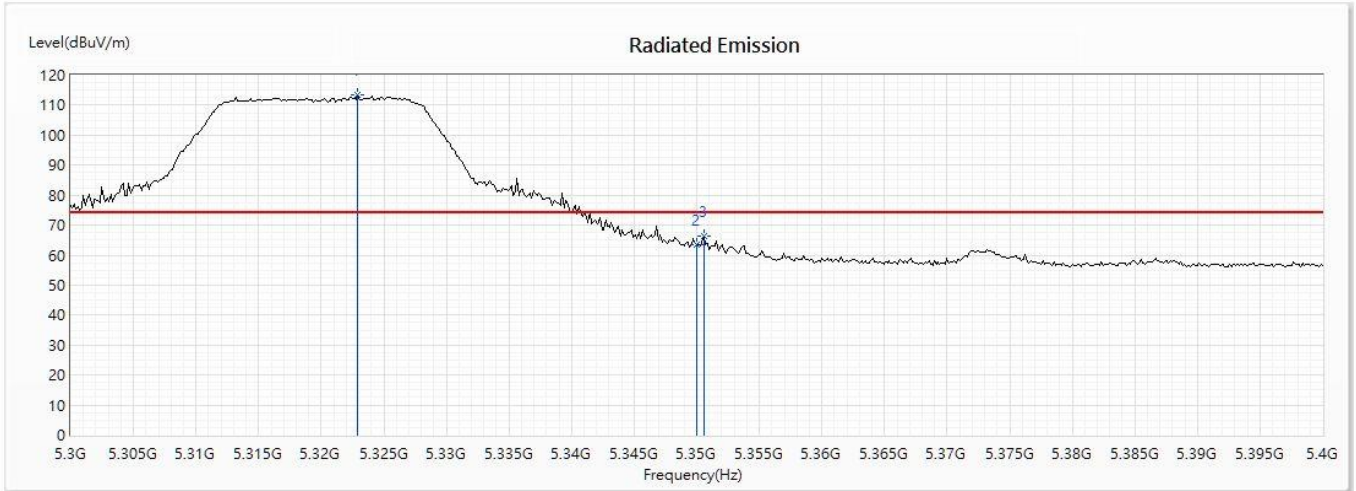


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
! 1	5322.899	113.44	--	--	94.95	18.49	PK
2	5350	63.33	74.00	-10.67	44.70	18.63	PK
3	5350.58	66.21	74.00	-7.79	47.58	18.63	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5320MHz)
 Test Date : 2020/06/11

Horizontal

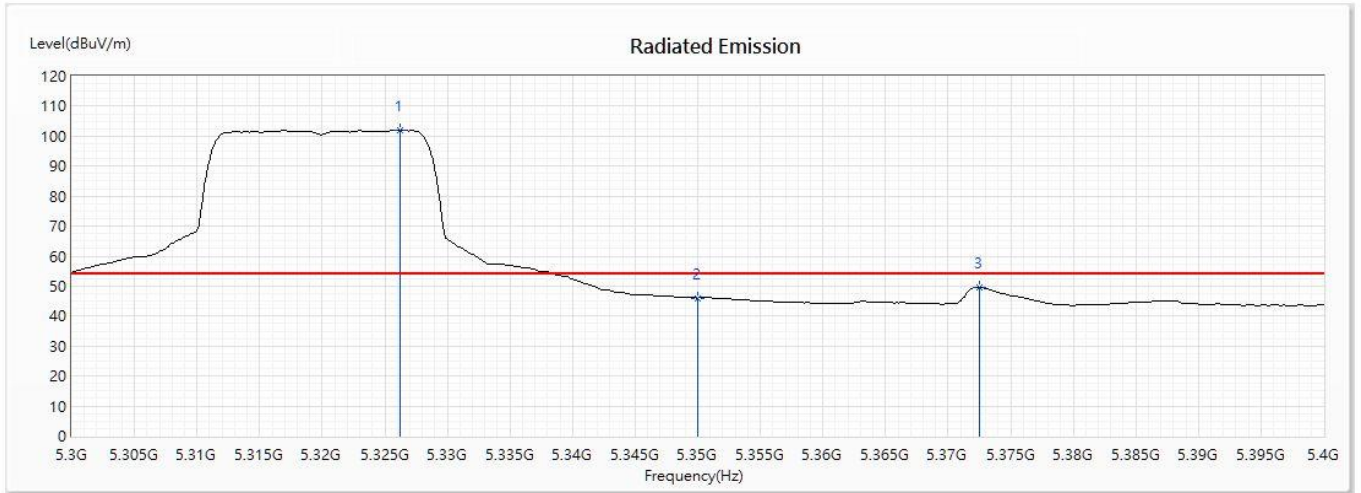


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
! 1	5326.232	101.94	--	--	83.43	18.51	AV
2	5350	46.01	54.00	-7.99	27.38	18.63	AV
3	5372.464	49.72	54.00	-4.28	30.94	18.78	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5320MHz)
 Test Date : 2020/06/11

Vertical

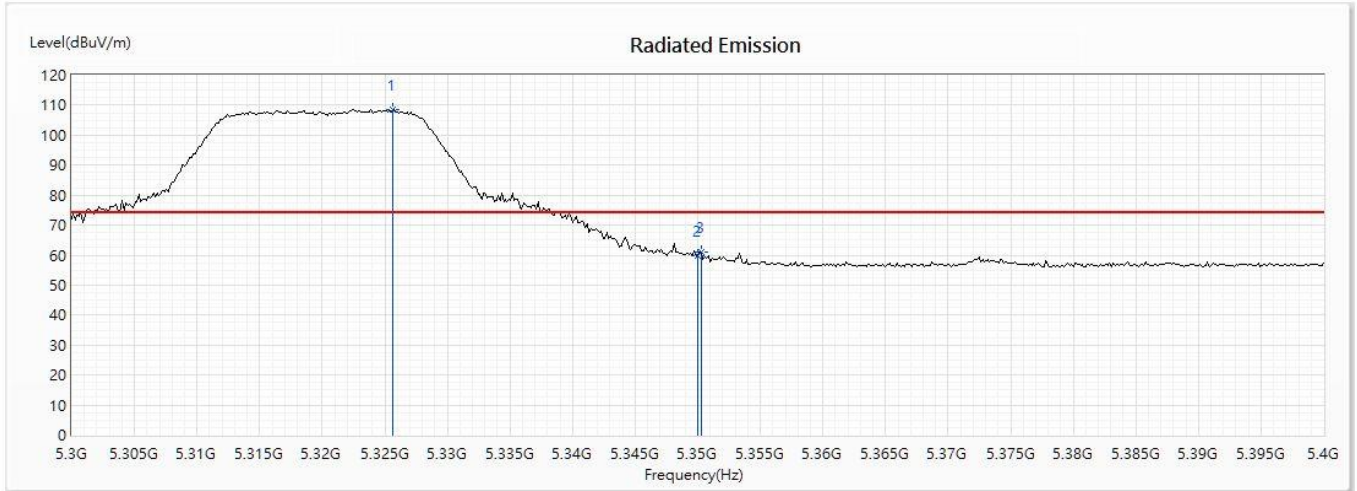


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
! 1	5325.652	108.71	--	--	90.20	18.51	PK
2	5350	59.80	74.00	-14.20	41.17	18.63	PK
3	5350.29	60.82	74.00	-13.18	42.19	18.63	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5320MHz)
 Test Date : 2020/06/11

Vertical

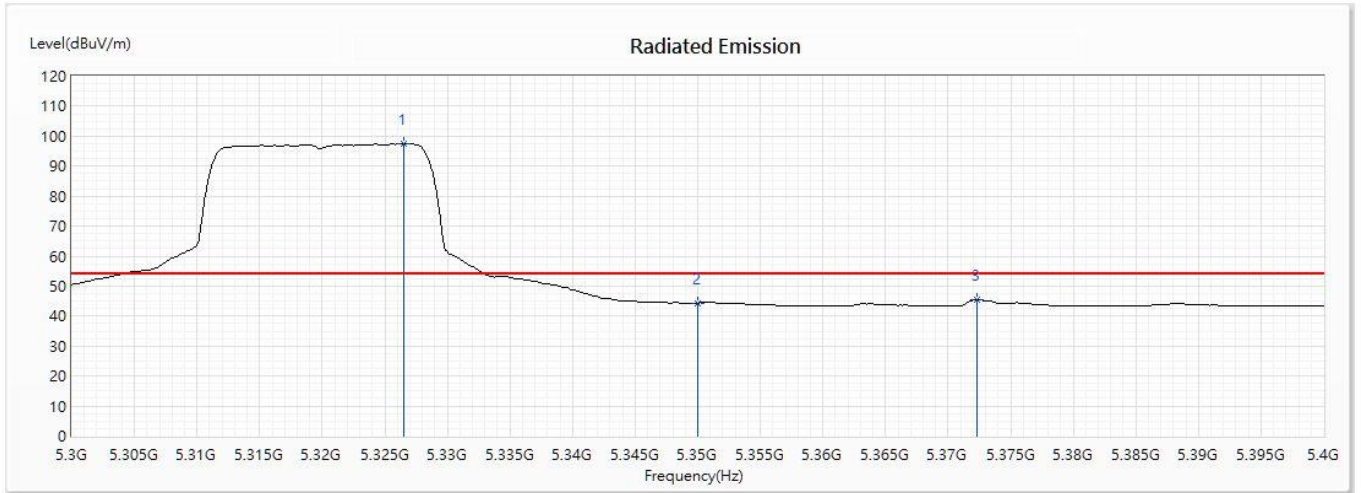


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
! 1	5326.522	97.48	--	--	78.97	18.51	AV
2	5350	44.22	54.00	-9.78	25.59	18.63	AV
3	5372.319	45.49	54.00	-8.51	26.71	18.78	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5500MHz)
 Test Date : 2020/06/11

Horizontal

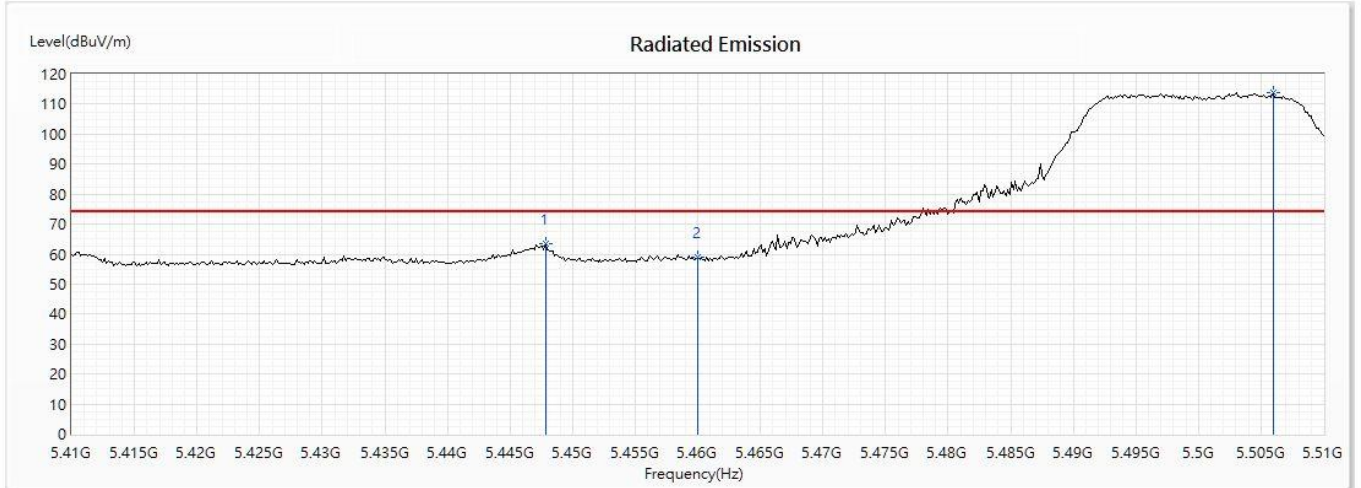


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5447.826	63.28	74.00	-10.72	43.99	19.29	PK
2	5460	58.79	74.00	-15.21	39.41	19.38	PK
! 3	5505.942	113.66	--	--	94.03	19.63	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5500MHz)
 Test Date : 2020/06/11

Horizontal

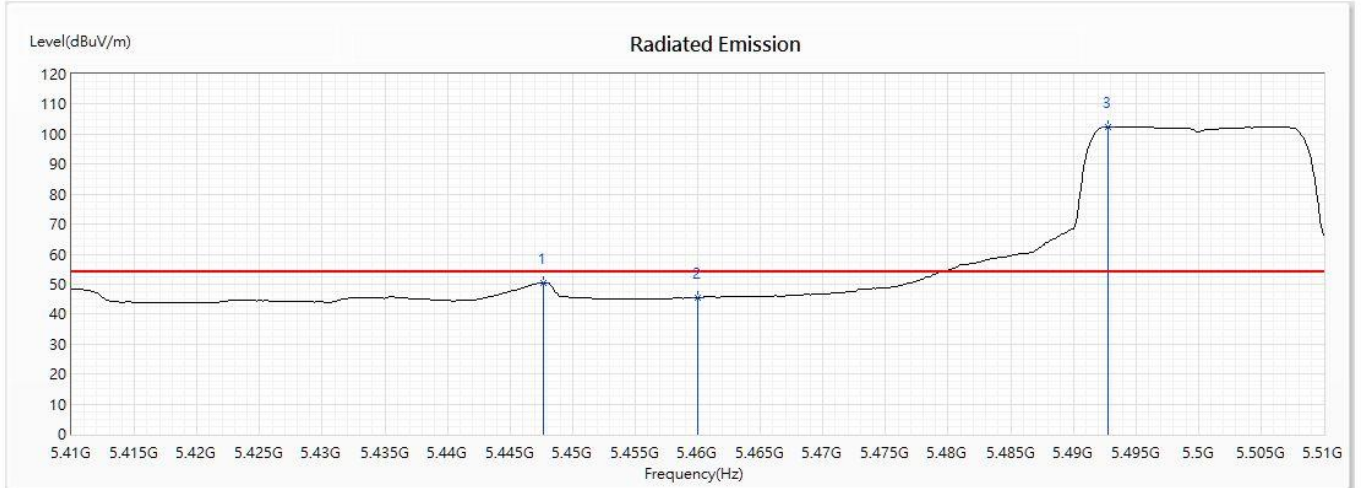


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5447.681	50.48	54.00	-3.52	31.19	19.29	AV
2	5460	45.47	54.00	-8.53	26.09	19.38	AV
! 3	5492.754	102.50	--	--	82.90	19.60	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5500MHz)
 Test Date : 2020/06/11

Vertical

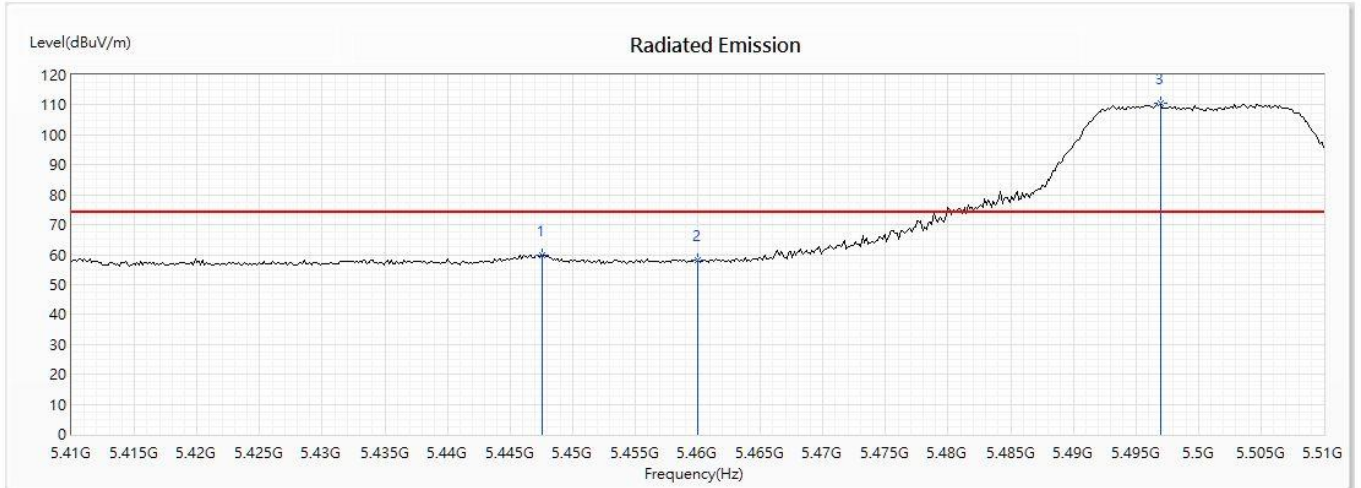


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5447.536	59.90	74.00	-14.10	40.61	19.29	PK
2	5460	58.31	74.00	-15.69	38.93	19.38	PK
! 3	5496.957	110.69	--	--	91.06	19.63	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5500MHz)
 Test Date : 2020/06/11

Vertical

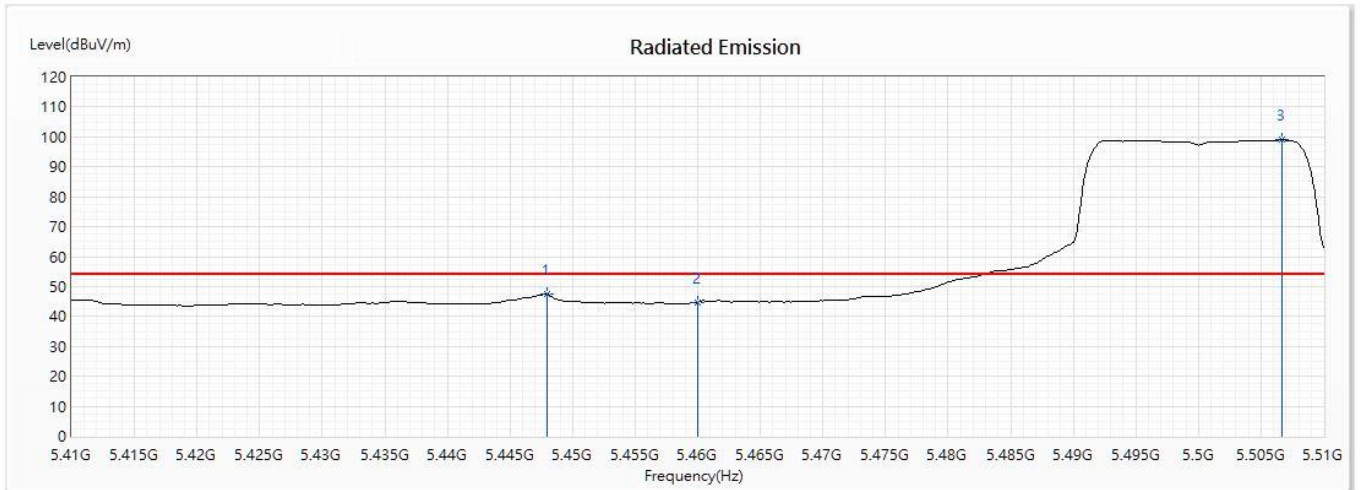


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5447.971	47.38	54.00	-6.62	28.08	19.30	AV
2	5460	44.71	54.00	-9.29	25.33	19.38	AV
! 3	5506.667	98.96	--	--	79.33	19.63	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11 a-6Mbps) (5500MHz)
 Test Date : 2020/06/11

Horizontal

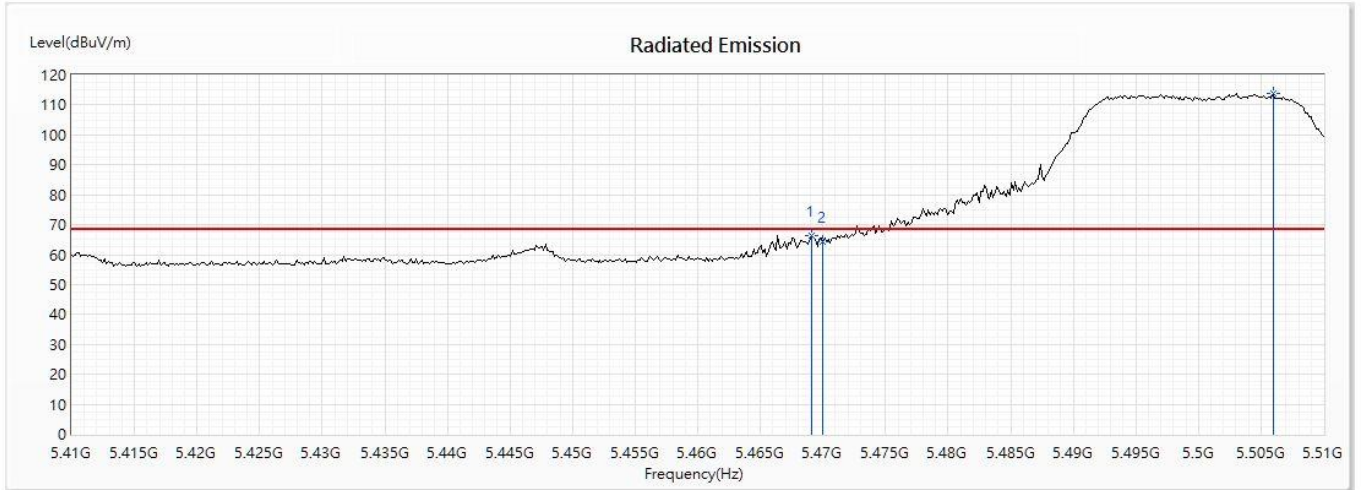


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5469.13	66.42	68.22	-1.80	46.98	19.44	PK
2	5470	64.34	68.22	-3.88	44.90	19.44	PK
! 3	5505.942	113.66	--	--	94.03	19.63	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5500MHz)
 Test Date : 2020/06/11

Vertical

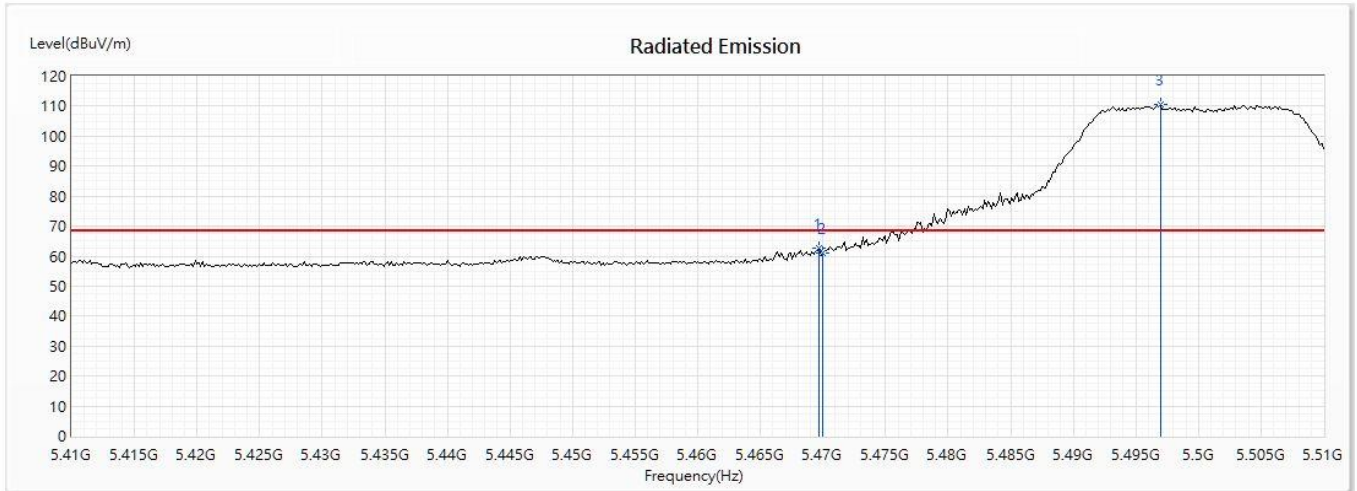


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5469.71	62.60	68.22	-5.62	43.16	19.44	PK
2	5470	61.17	68.22	-7.05	41.73	19.44	PK
! 3	5496.957	110.69	--	--	91.06	19.63	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5700MHz)
 Test Date : 2020/06/11

Horizontal

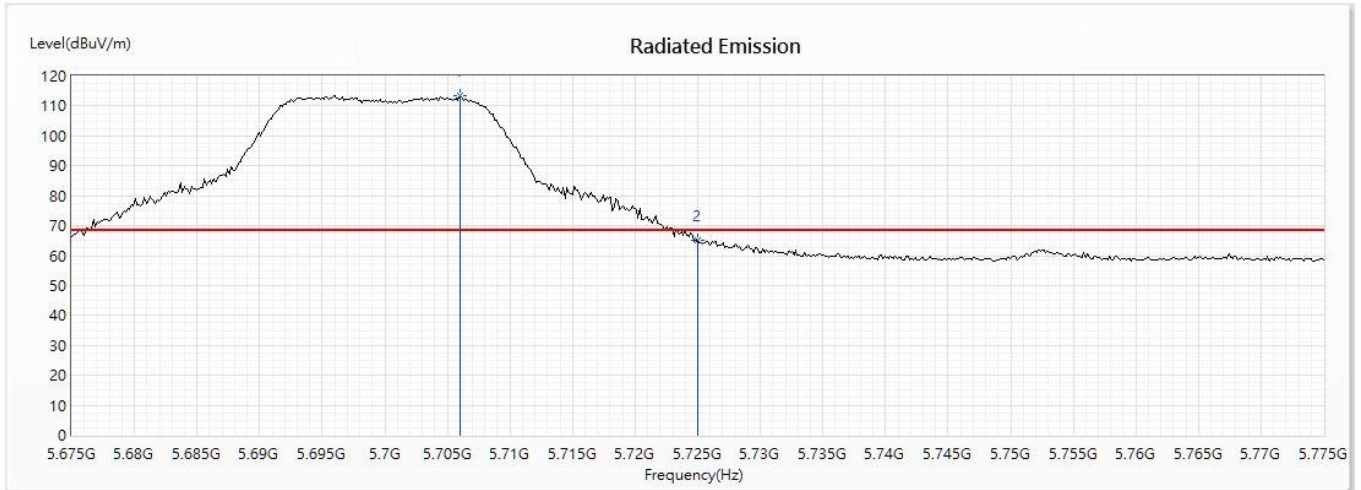


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
! 1	5706.014	113.60	--	--	94.34	19.26	PK
2	5725	65.13	68.22	-3.09	45.88	19.25	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5700MHz)
 Test Date : 2020/06/11

Vertical

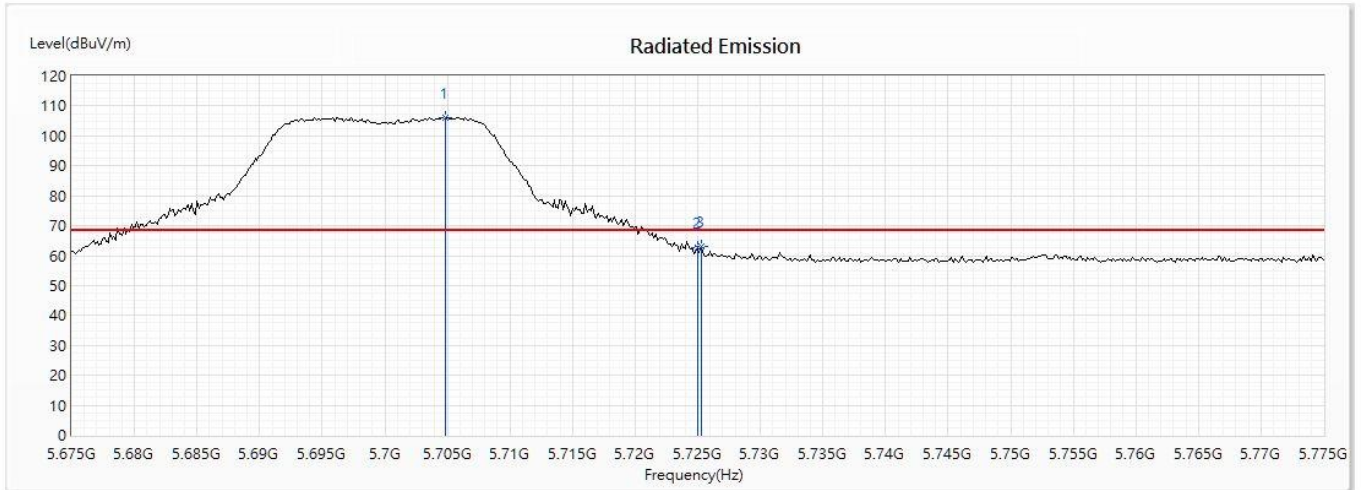


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
! 1	5704.855	106.20	--	--	86.93	19.27	PK
2	5725	62.62	68.22	-5.60	43.37	19.25	PK
3	5725.29	63.05	68.22	-5.17	43.81	19.24	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5745MHz)
 Test Date : 2020/06/11

Horizontal

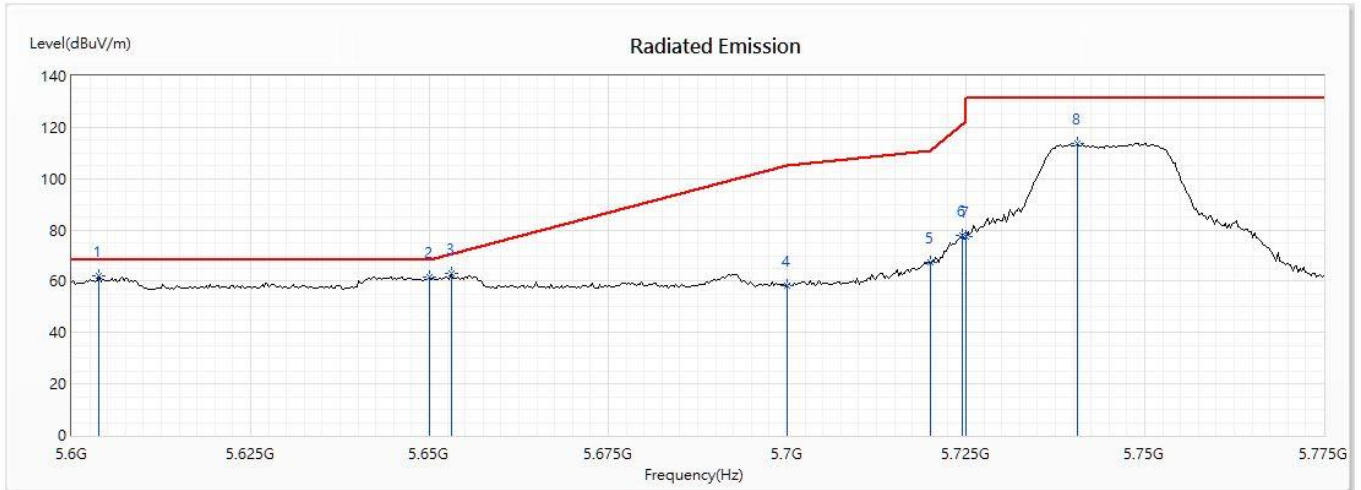


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	5603.804	61.91	68.22	-6.31	42.46	19.45	PK
2	5650	61.53	68.22	-6.69	42.22	19.31	PK
3	5653.007	62.99	70.45	-7.46	43.67	19.32	PK
4	5700	58.50	105.20	-46.70	39.23	19.27	PK
5	5720	67.57	110.80	-43.23	48.32	19.25	PK
6	5724.529	78.12	121.13	-43.00	58.87	19.25	PK
7	5725	77.45	122.20	-44.75	58.20	19.25	PK
8	5740.507	113.93	131.20	-17.27	94.70	19.23	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11 a-6Mbps) (5745MHz)
 Test Date : 2020/06/11

Vertical

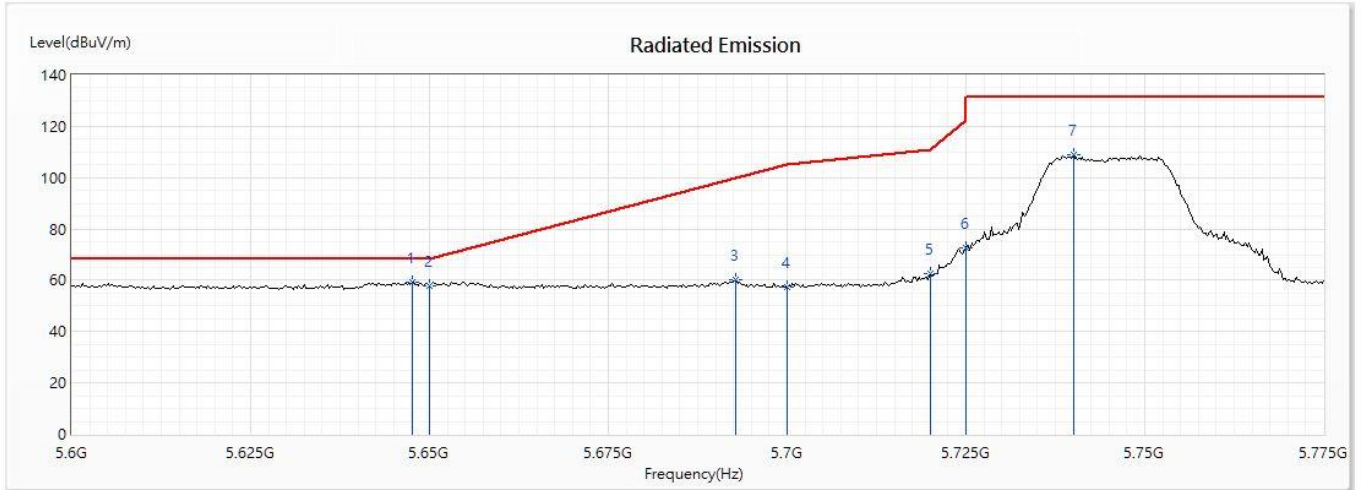


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	5647.681	59.25	68.22	-8.97	39.93	19.32	PK
2	5650	58.03	68.22	-10.19	38.72	19.31	PK
3	5692.826	60.09	99.91	-39.82	40.81	19.28	PK
4	5700	57.41	105.20	-47.79	38.14	19.27	PK
5	5720	62.67	110.80	-48.13	43.42	19.25	PK
6	5725	72.86	122.20	-49.34	53.61	19.25	PK
7	5740	108.85	131.20	-22.35	89.62	19.23	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5825MHz)
 Test Date : 2020/06/11

Horizontal

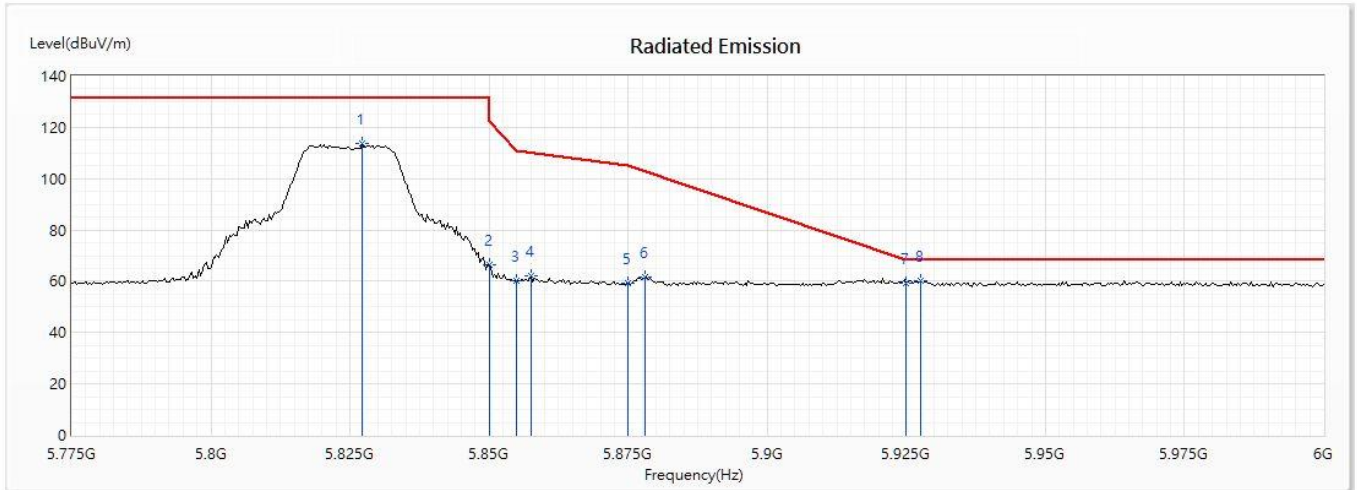


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5827.174	113.61	131.20	-17.59	94.05	19.56	PK
2	5850	66.23	122.20	-55.97	46.59	19.64	PK
3	5855	60.26	110.80	-50.54	40.61	19.65	PK
4	5857.5	62.02	110.10	-48.08	42.35	19.67	PK
5	5875	59.04	105.20	-46.16	39.32	19.72	PK
6	5878.043	61.49	102.94	-41.45	41.76	19.73	PK
7	5925	59.48	68.20	-8.72	39.56	19.92	PK
* 8	5927.609	60.24	68.20	-7.96	40.31	19.93	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11 a-6Mbps) (5825MHz)
 Test Date : 2020/06/11

Vertical

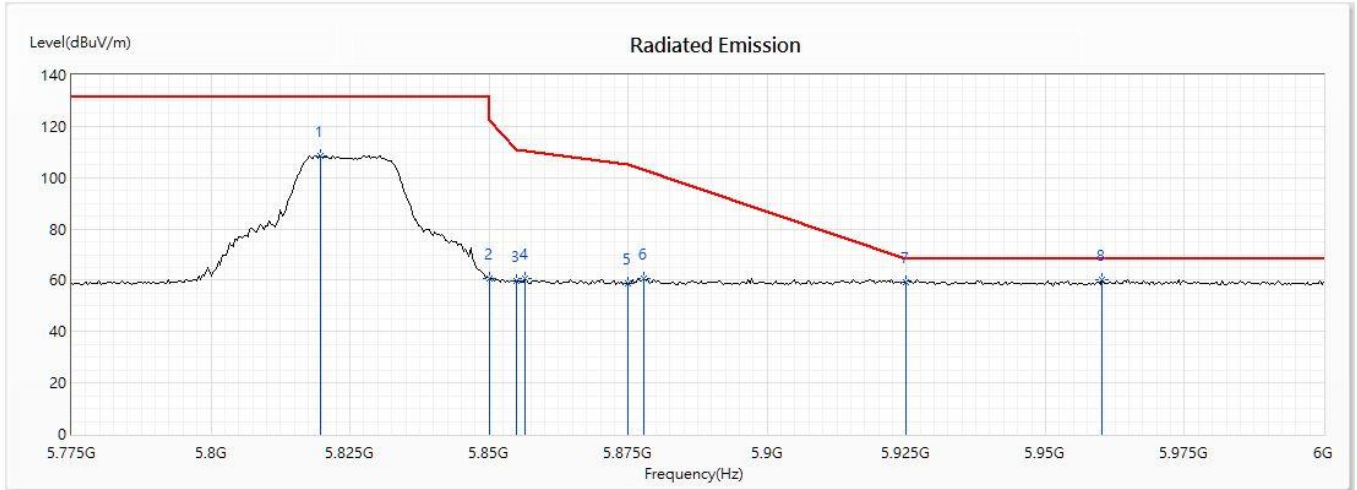


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5819.674	108.66	131.20	-22.54	89.12	19.54	PK
2	5850	60.56	122.20	-61.64	40.92	19.64	PK
3	5855	59.66	110.80	-51.14	40.01	19.65	PK
4	5856.522	60.67	110.37	-49.70	41.01	19.66	PK
5	5875	58.96	105.20	-46.24	39.24	19.72	PK
6	5877.717	60.56	103.18	-42.63	40.83	19.73	PK
7	5925	59.35	68.20	-8.85	39.43	19.92	PK
* 8	5960.217	60.19	68.20	-8.01	40.12	20.07	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5180MHz)
 Test Date : 2020/06/11

Horizontal

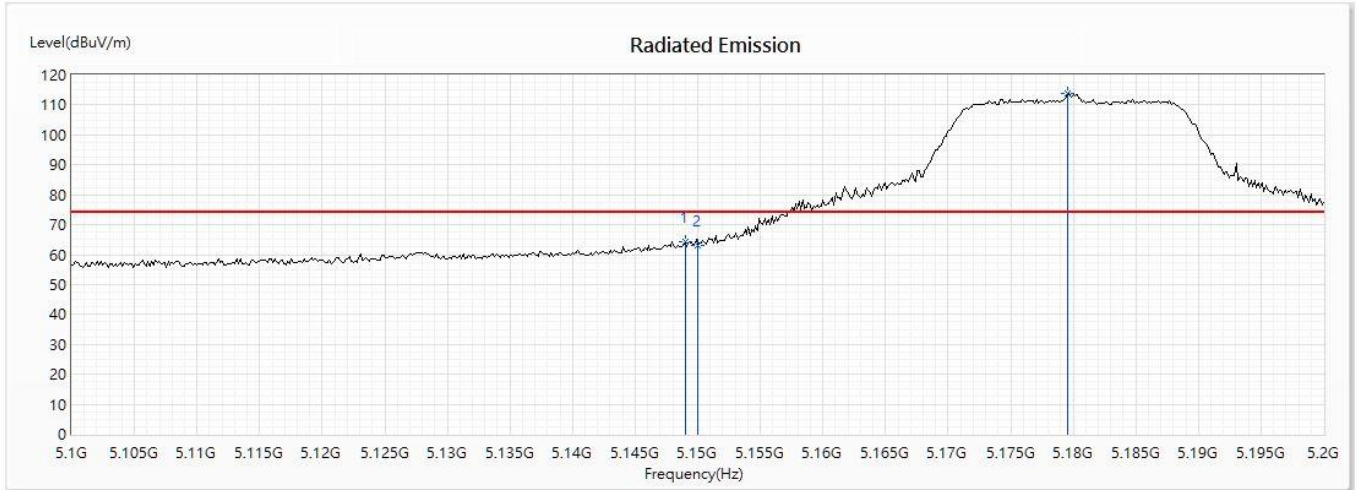


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5148.986	64.30	74.00	-9.70	45.92	18.38	PK
2	5150	63.11	74.00	-10.89	44.74	18.37	PK
!3	5179.565	113.69	--	--	95.41	18.28	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5180MHz)
 Test Date : 2020/06/11

Horizontal

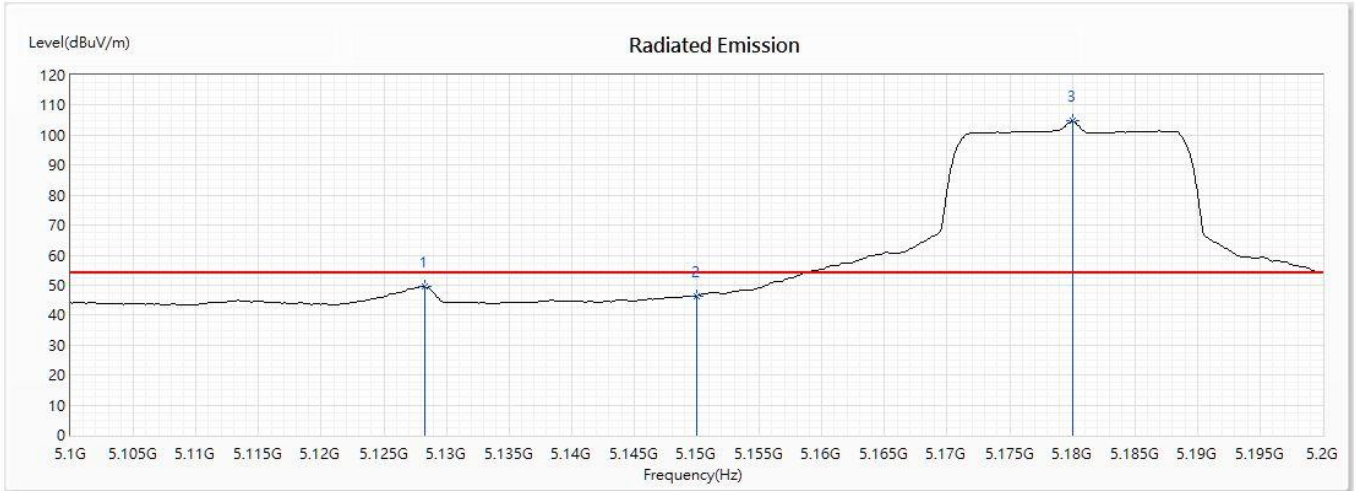


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5128.261	49.61	54.00	-4.39	31.17	18.44	AV
2	5150	46.29	54.00	-7.71	27.92	18.37	AV
! 3	5180	104.65	--	--	86.38	18.27	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5180MHz)
 Test Date : 2020/06/11

Vertical

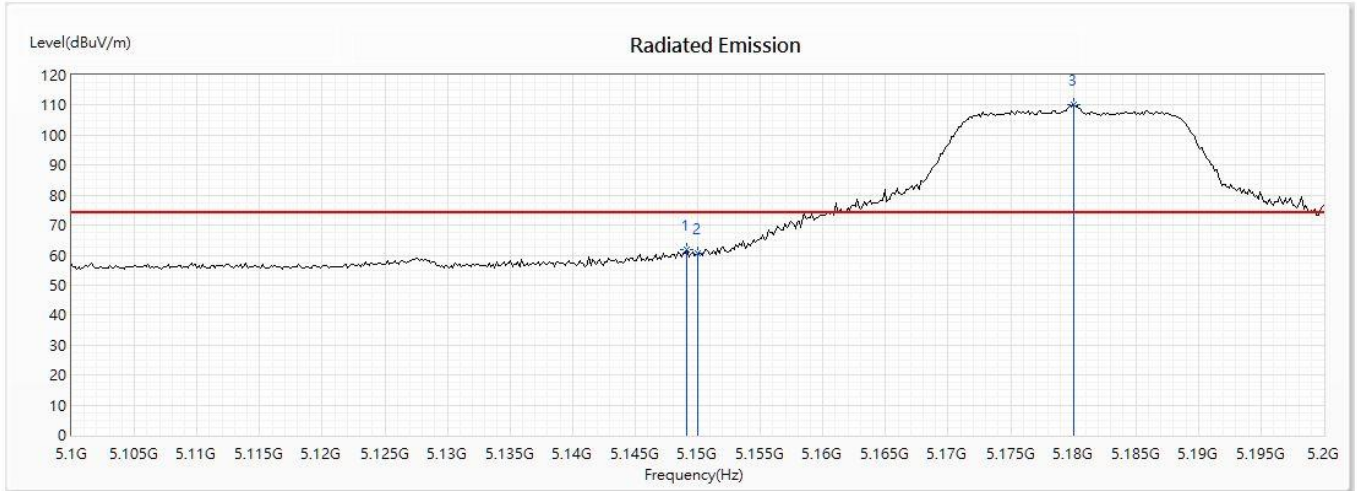


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5149.13	62.01	74.00	-11.99	43.63	18.38	PK
2	5150	60.55	74.00	-13.45	42.18	18.37	PK
! 3	5180	109.99	--	--	91.72	18.27	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5180MHz)
 Test Date : 2020/06/11

Vertical

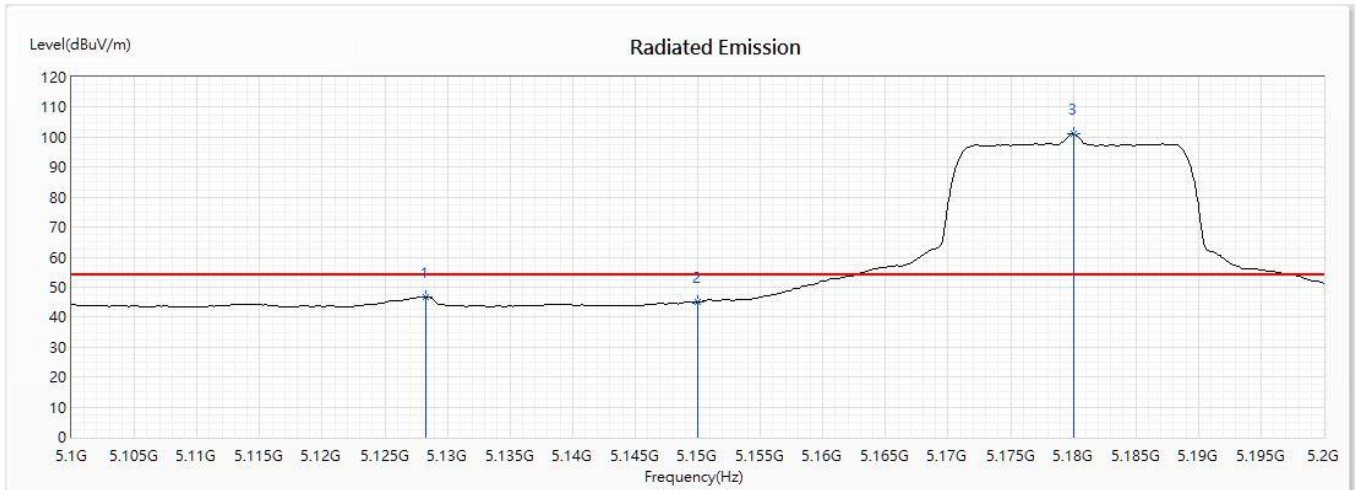


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5128.261	46.73	54.00	-7.27	28.29	18.44	AV
2	5150	44.97	54.00	-9.03	26.60	18.37	AV
! 3	5180	101.01	--	--	82.74	18.27	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5320MHz)
 Test Date : 2020/06/11

Horizontal

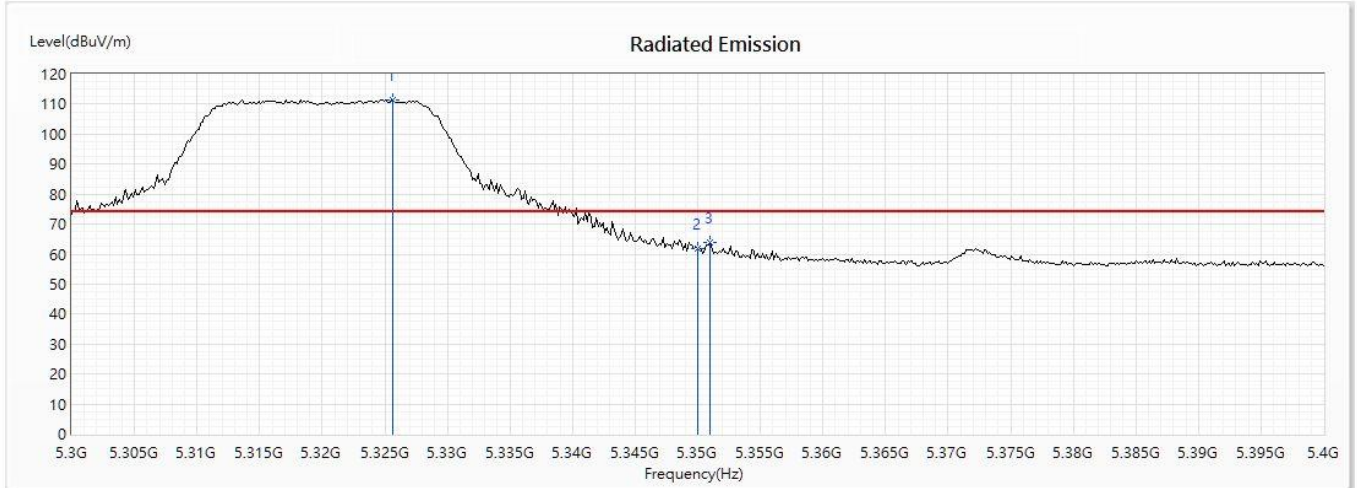


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
! 1	5325.652	111.57	--	--	93.06	18.51	PK
2	5350	61.95	74.00	-12.05	43.32	18.63	PK
3	5351.014	63.90	74.00	-10.10	45.27	18.63	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5320MHz)
 Test Date : 2020/06/11

Horizontal

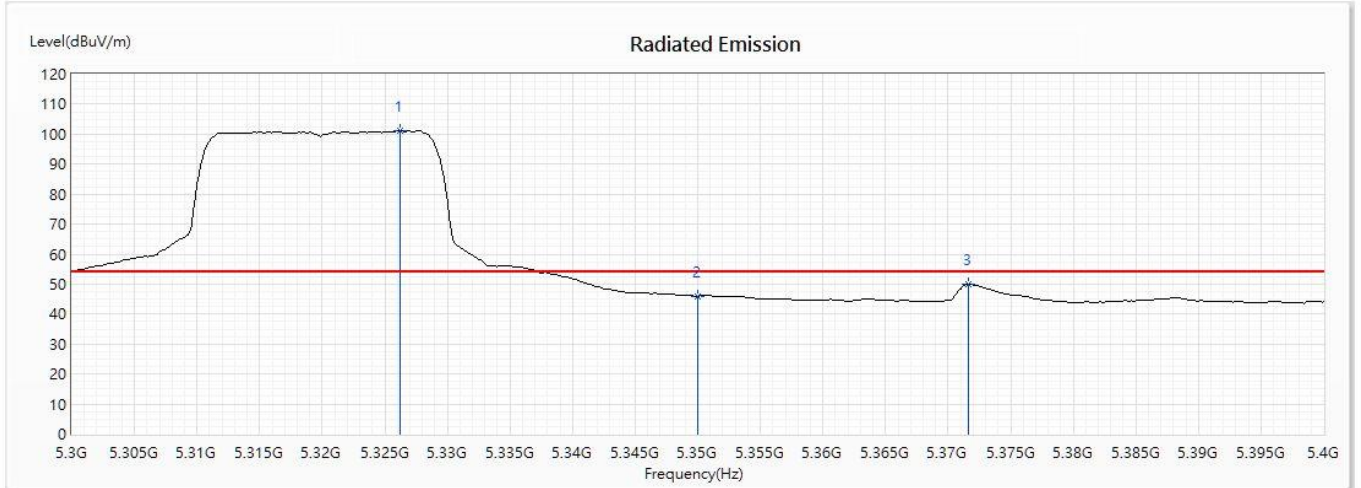


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
! 1	5326.232	101.09	--	--	82.58	18.51	AV
2	5350	46.03	54.00	-7.97	27.40	18.63	AV
3	5371.594	50.02	54.00	-3.98	31.25	18.77	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5320MHz)
 Test Date : 2020/06/11

Vertical

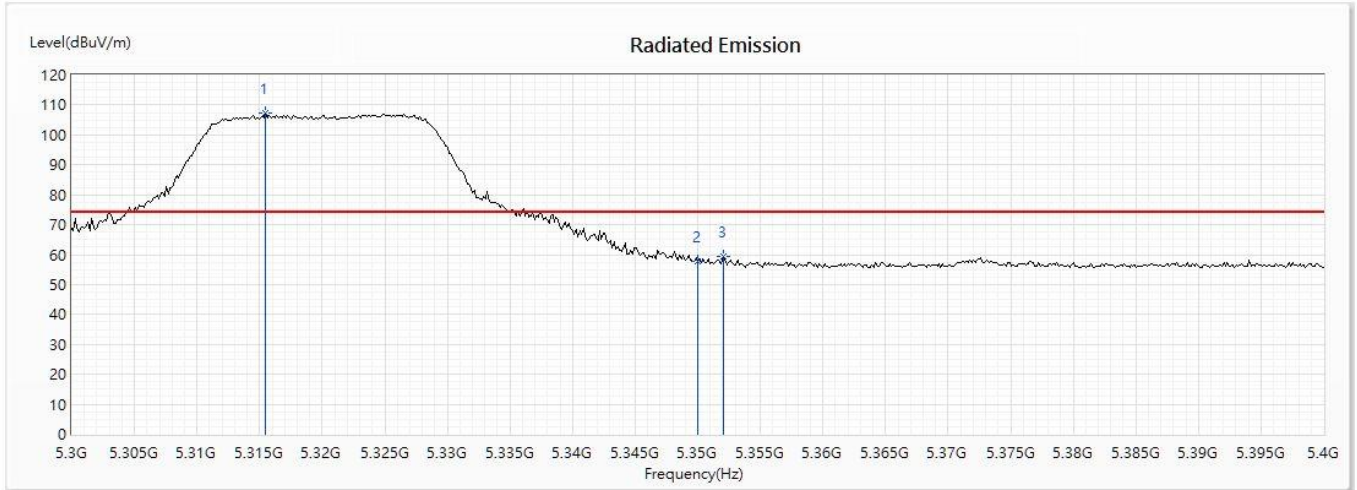


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
! 1	5315.507	107.43	--	--	88.97	18.46	PK
2	5350	57.83	74.00	-16.17	39.20	18.63	PK
3	5352.029	59.22	74.00	-14.78	40.58	18.64	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5320MHz)
 Test Date : 2020/06/11

Vertical

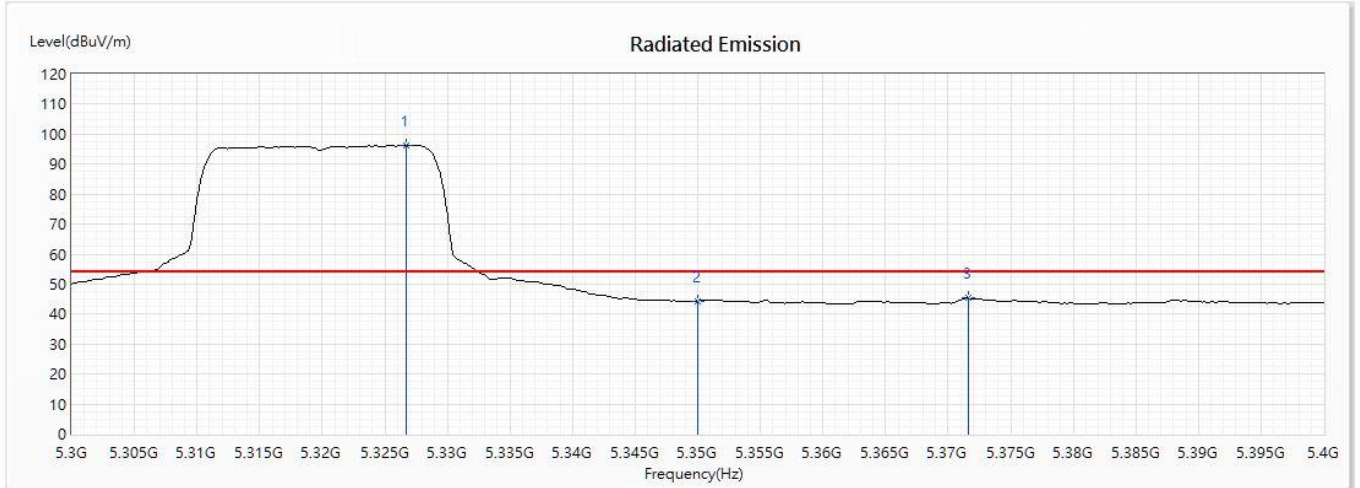


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
! 1	5326.667	96.38	--	--	77.87	18.51	AV
2	5350	44.43	54.00	-9.57	25.80	18.63	AV
3	5371.594	45.32	54.00	-8.68	26.55	18.77	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5500MHz)
 Test Date : 2020/06/11

Horizontal

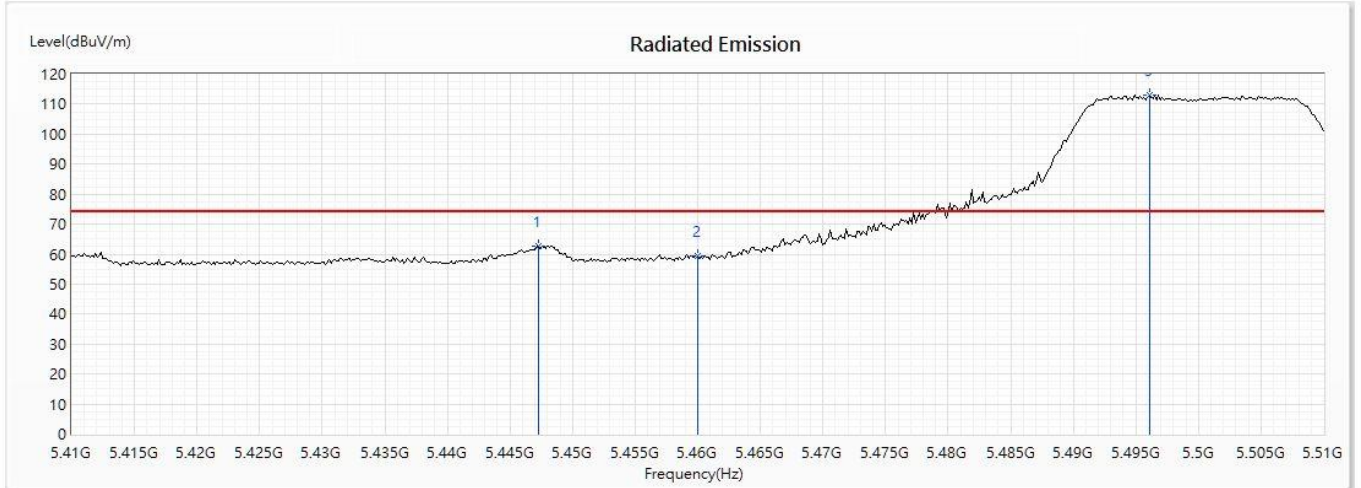


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5447.246	62.78	74.00	-11.22	43.49	19.29	PK
2	5460	59.52	74.00	-14.48	40.14	19.38	PK
! 3	5496.087	112.95	--	--	93.33	19.62	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5500MHz)
 Test Date : 2020/06/11

Horizontal

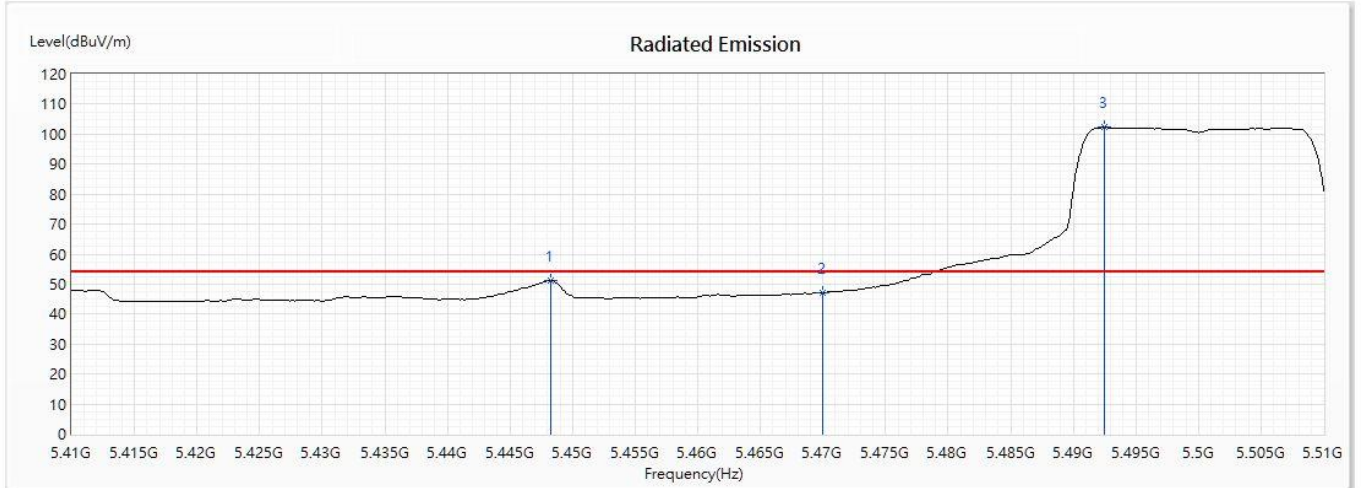


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5448.261	51.23	54.00	-2.77	31.93	19.30	AV
2	5470	47.19	54.00	-6.81	27.75	19.44	AV
! 3	5492.464	102.30	--	--	82.70	19.60	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5500MHz)
 Test Date : 2020/06/11

Vertical

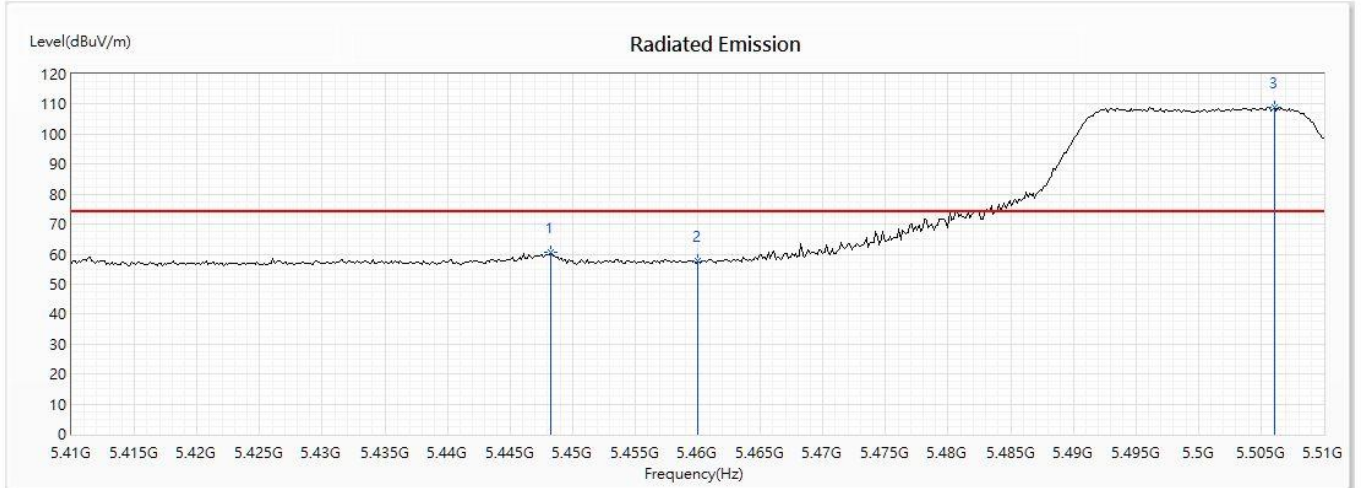


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5448.261	60.67	74.00	-13.33	41.37	19.30	PK
2	5460	57.74	74.00	-16.26	38.36	19.38	PK
! 3	5506.087	109.10	--	--	89.47	19.63	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5500MHz)
 Test Date : 2020/06/11

Vertical

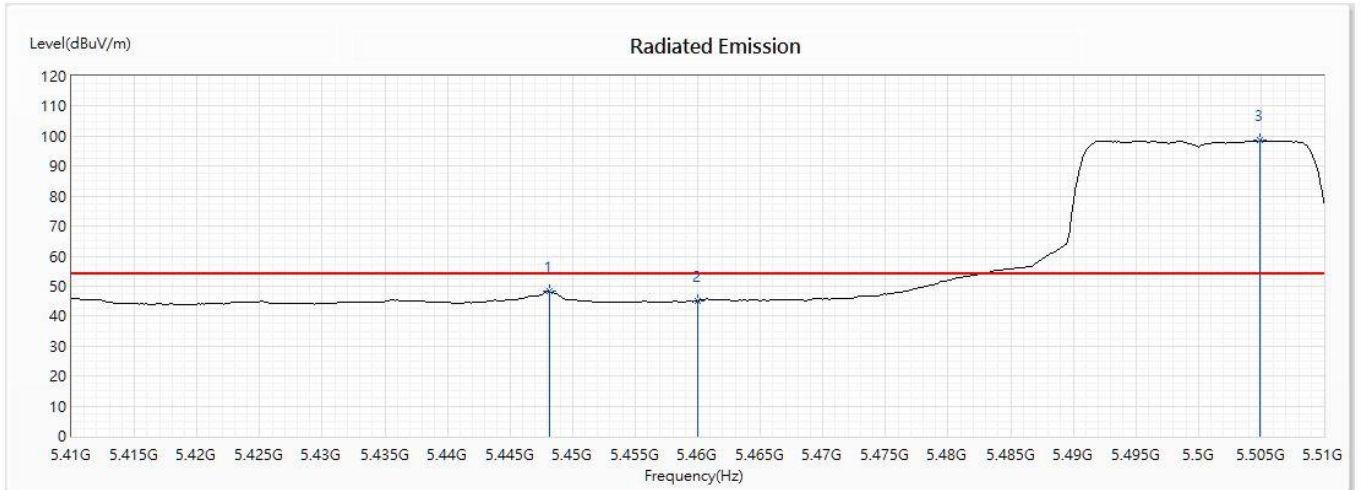


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5448.116	48.24	54.00	-5.76	28.94	19.30	AV
2	5460	44.94	54.00	-9.06	25.56	19.38	AV
! 3	5504.928	98.50	--	--	78.87	19.63	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5500MHz)
 Test Date : 2020/06/11

Horizontal

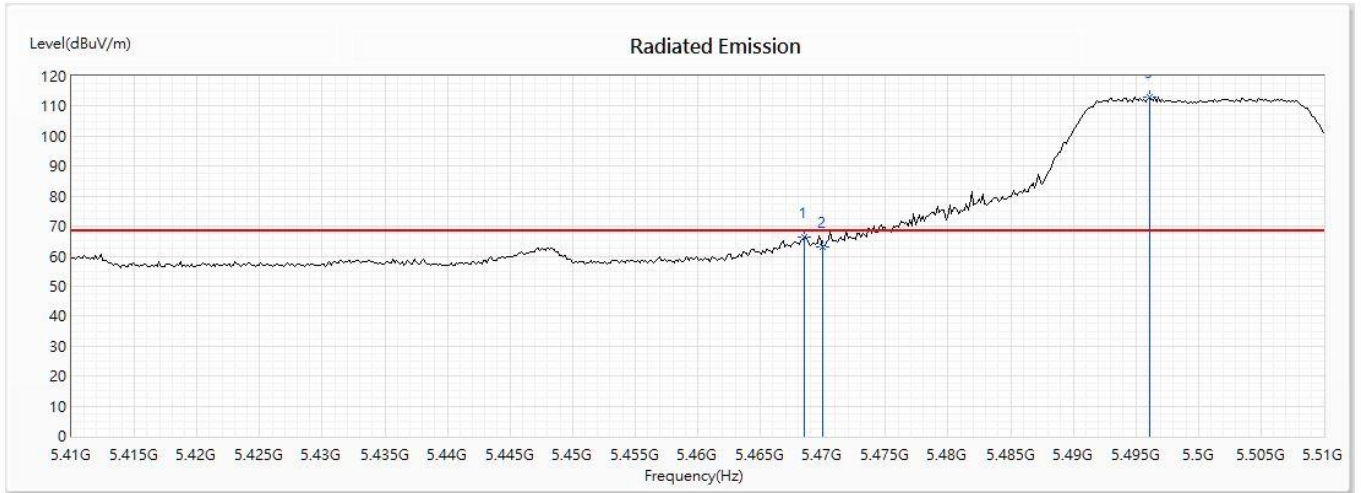


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5468.551	66.19	68.22	-2.03	46.76	19.43	PK
2	5470	63.00	68.22	-5.22	43.56	19.44	PK
! 3	5496.087	112.95	--	--	93.33	19.62	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5500MHz)
 Test Date : 2020/06/11

Vertical

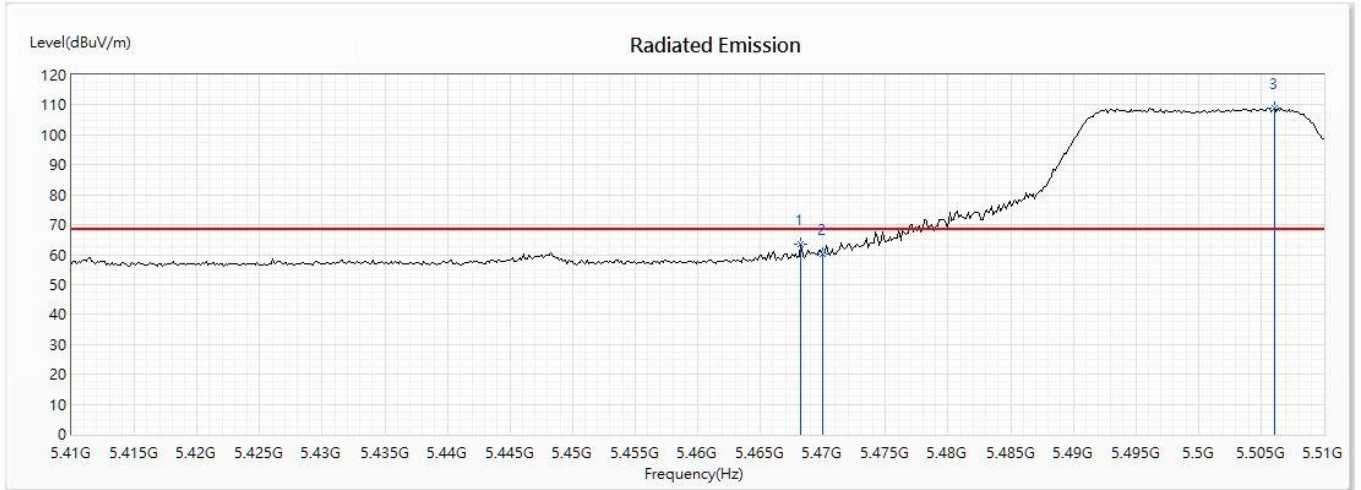


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5468.261	63.44	68.22	-4.78	44.01	19.43	PK
2	5470	60.04	68.22	-8.18	40.60	19.44	PK
! 3	5506.087	109.10	--	--	89.47	19.63	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5700MHz)
 Test Date : 2020/06/12

Horizontal

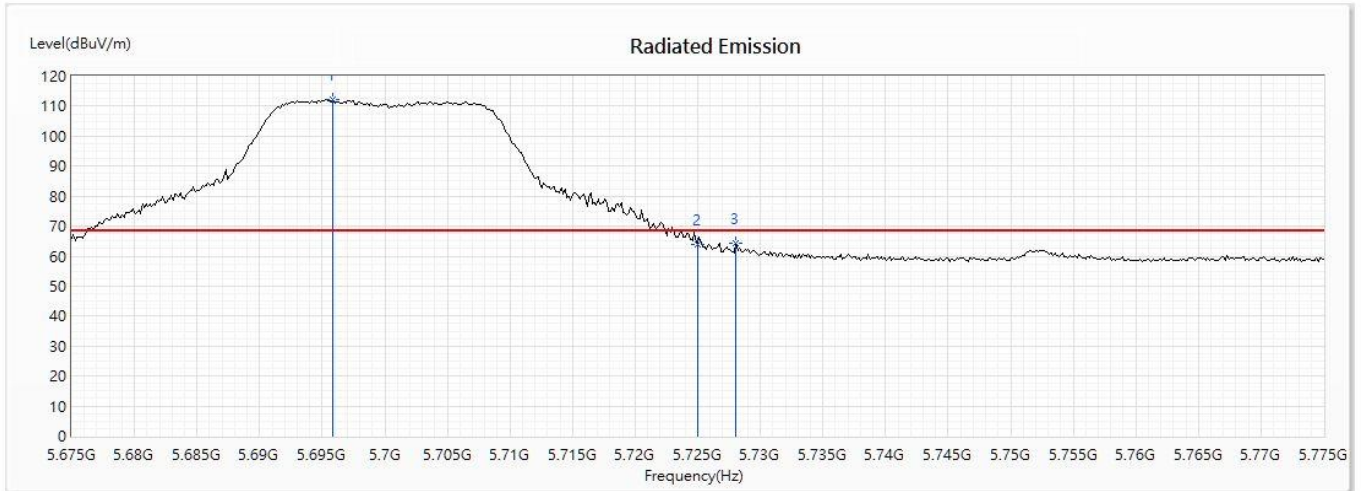


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
! 1	5695.87	112.39	--	--	93.12	19.27	PK
2	5725	64.03	68.22	-4.19	44.78	19.25	PK
3	5728.043	64.47	68.22	-3.75	45.23	19.24	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5700MHz)
 Test Date : 2020/06/12

Vertical

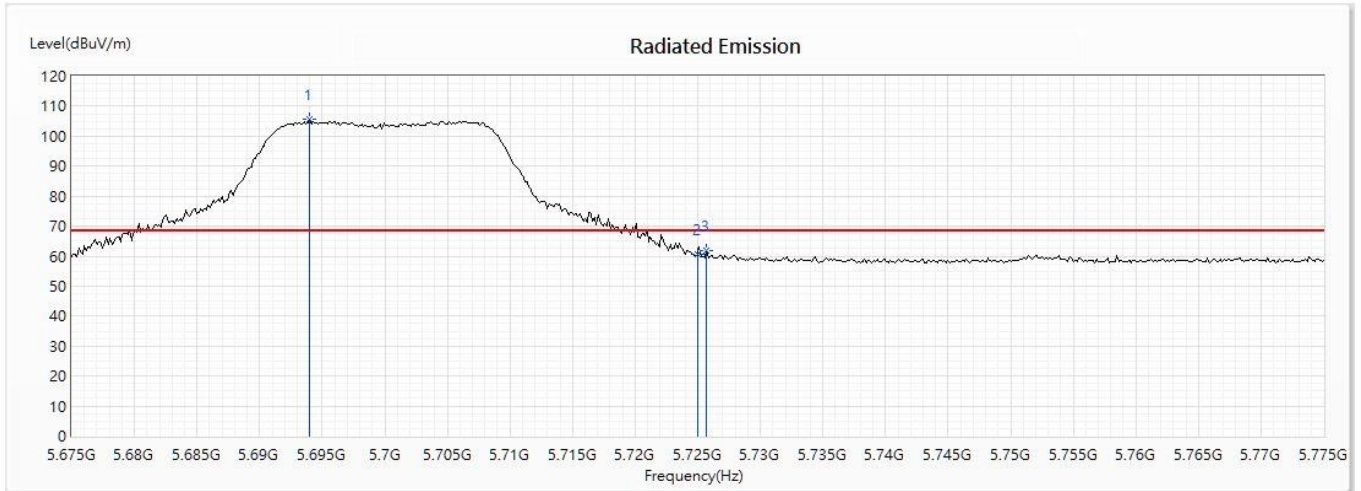


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
! 1	5693.986	105.51	--	--	86.23	19.28	PK
2	5725	60.61	68.22	-7.61	41.36	19.25	PK
3	5725.725	61.88	68.22	-6.34	42.64	19.24	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5745MHz)
 Test Date : 2020/06/12

Horizontal

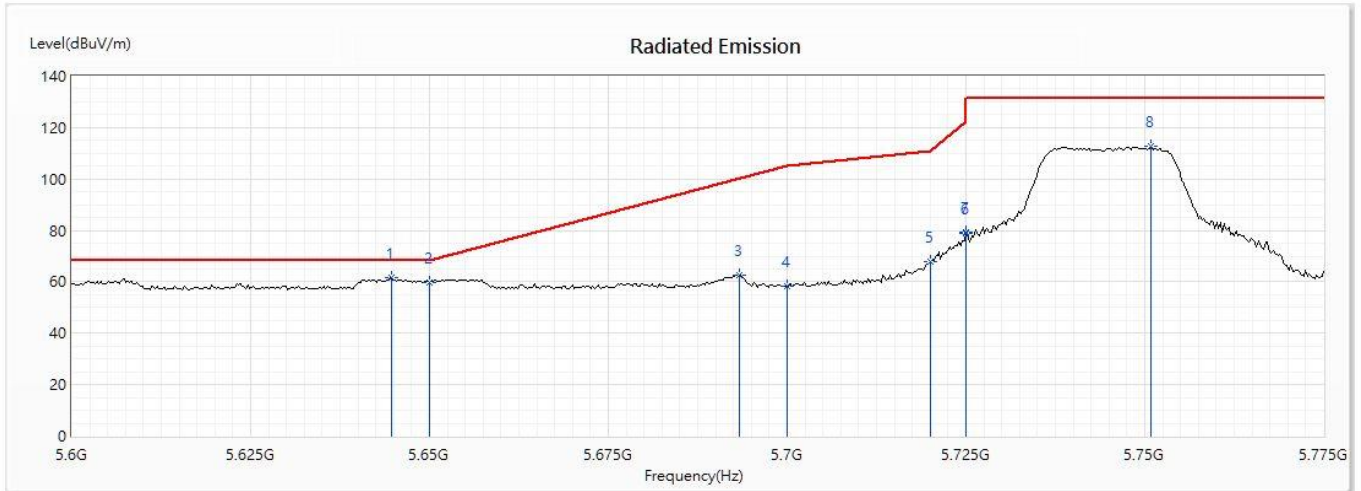


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	5644.638	61.51	68.22	-6.71	42.18	19.33	PK
2	5650	59.76	68.22	-8.46	40.45	19.31	PK
3	5693.333	62.74	100.29	-37.54	43.46	19.28	PK
4	5700	58.21	105.20	-46.99	38.94	19.27	PK
5	5720	68.04	110.80	-42.76	48.79	19.25	PK
6	5725	78.94	122.20	-43.26	59.69	19.25	PK
7	5725.036	79.44	131.20	-51.76	60.19	19.25	PK
8	5750.906	112.76	131.20	-18.44	93.54	19.22	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5745MHz)
 Test Date : 2020/06/12

Vertical

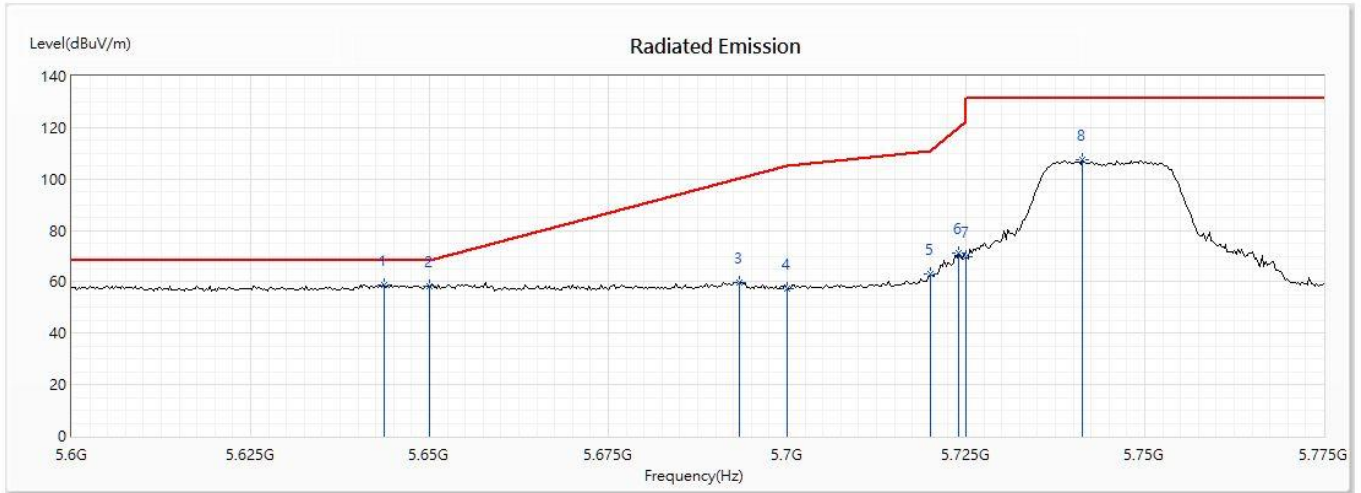


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	5643.623	59.01	68.22	-9.21	39.68	19.33	PK
2	5650	58.45	68.22	-9.77	39.14	19.31	PK
3	5693.333	59.71	100.29	-40.58	40.43	19.28	PK
4	5700	57.50	105.20	-47.70	38.23	19.27	PK
5	5720	63.00	110.80	-47.80	43.75	19.25	PK
6	5724.022	71.15	119.97	-48.82	51.90	19.25	PK
7	5725	69.67	122.20	-52.53	50.42	19.25	PK
8	5741.268	107.63	131.20	-23.57	88.40	19.23	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5825MHz)
 Test Date : 2020/06/12

Horizontal

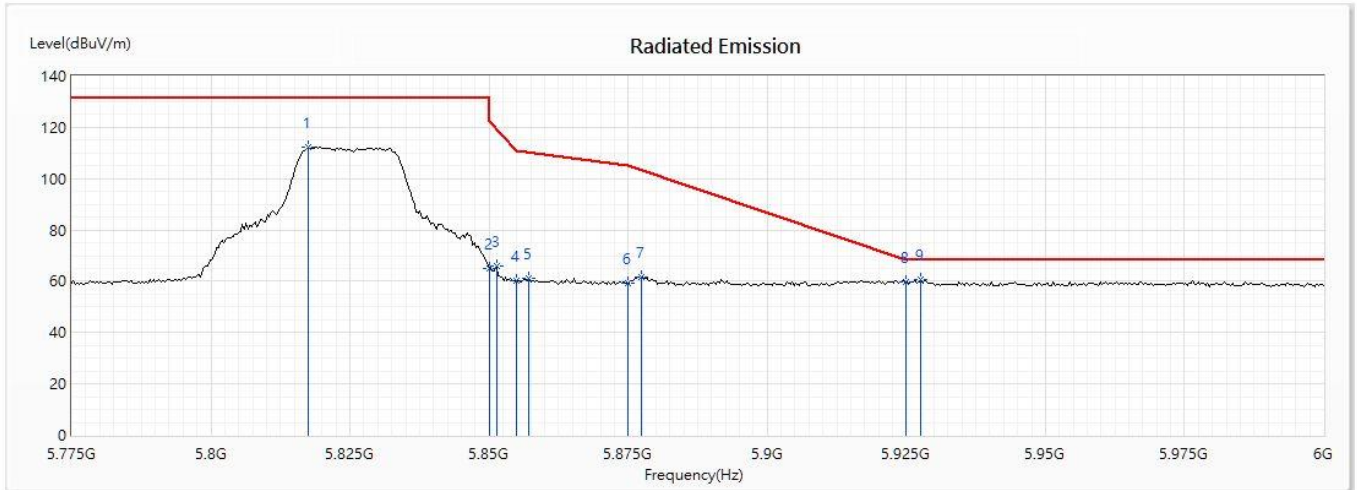


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5817.391	112.42	131.20	-18.78	92.89	19.53	PK
2	5850	65.18	122.20	-57.02	45.54	19.64	PK
3	5851.304	65.84	119.23	-53.39	46.20	19.64	PK
4	5855	60.30	110.80	-50.50	40.65	19.65	PK
5	5857.174	61.17	110.19	-49.02	41.51	19.66	PK
6	5875	59.16	105.20	-46.04	39.44	19.72	PK
7	5877.391	61.42	103.42	-42.00	41.70	19.72	PK
8	5925	59.52	68.20	-8.68	39.60	19.92	PK
* 9	5927.609	60.50	68.20	-7.70	40.57	19.93	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5825MHz)
 Test Date : 2020/06/12

Vertical

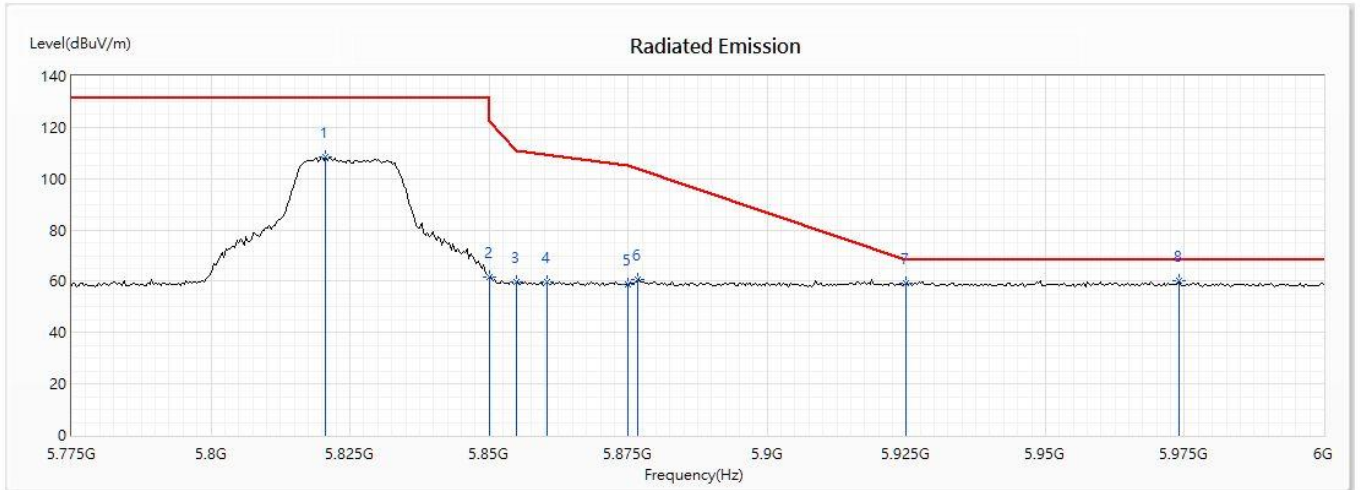


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5820.652	108.28	131.20	-22.92	88.74	19.54	PK
2	5850	61.81	122.20	-60.39	42.17	19.64	PK
3	5855	59.76	110.80	-51.04	40.11	19.65	PK
4	5860.435	59.96	109.28	-49.32	40.29	19.67	PK
5	5875	58.96	105.20	-46.24	39.24	19.72	PK
6	5876.739	60.68	103.91	-43.23	40.96	19.72	PK
7	5925	59.46	68.20	-8.74	39.54	19.92	PK
* 8	5973.913	60.02	68.20	-8.18	39.94	20.08	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5190MHz)
 Test Date : 2020/06/11

Horizontal

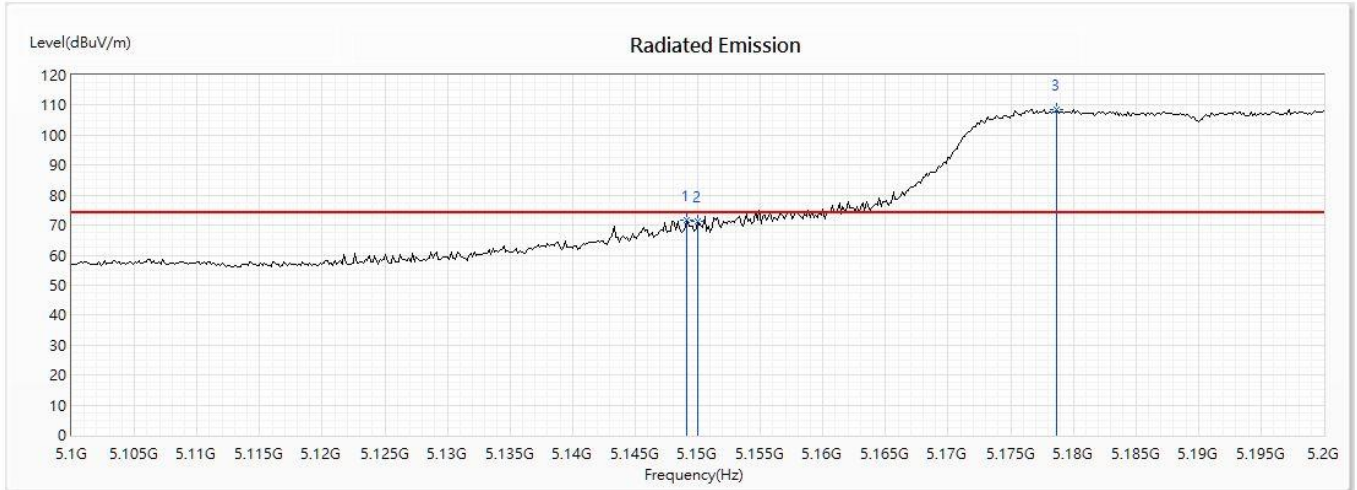


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5149.13	71.60	74.00	-2.40	53.22	18.38	PK
2	5150	71.31	74.00	-2.69	52.94	18.37	PK
! 3	5178.696	108.72	--	--	90.45	18.27	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5190MHz)
 Test Date : 2020/06/11

Horizontal

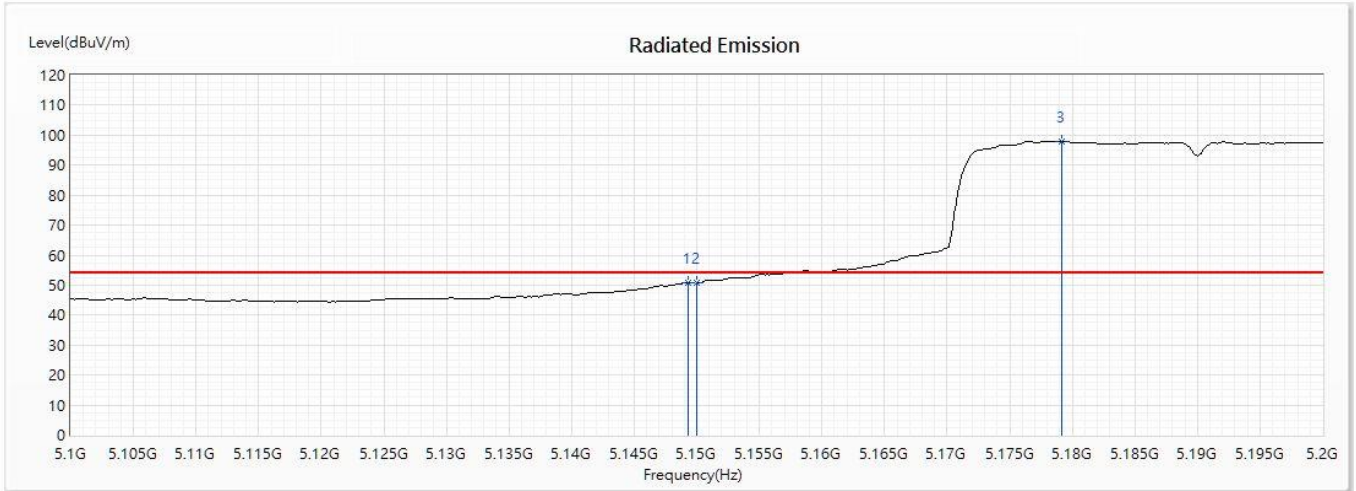


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5149.275	50.74	54.00	-3.26	32.36	18.38	AV
2	5150	50.62	54.00	-3.38	32.25	18.37	AV
! 3	5179.13	98.06	--	--	79.78	18.28	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5190MHz)
 Test Date : 2020/06/11

Vertical

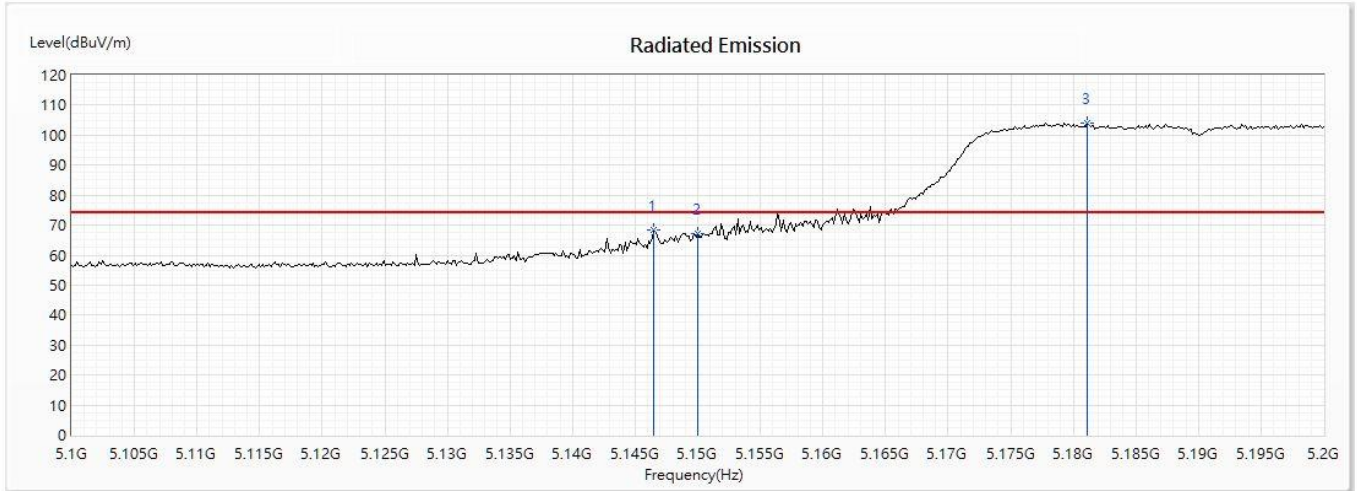


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5146.522	68.36	74.00	-5.64	49.97	18.39	PK
2	5150	67.25	74.00	-6.75	48.88	18.37	PK
! 3	5181.159	104.12	--	--	85.86	18.26	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5190MHz)
 Test Date : 2020/06/11

Vertical

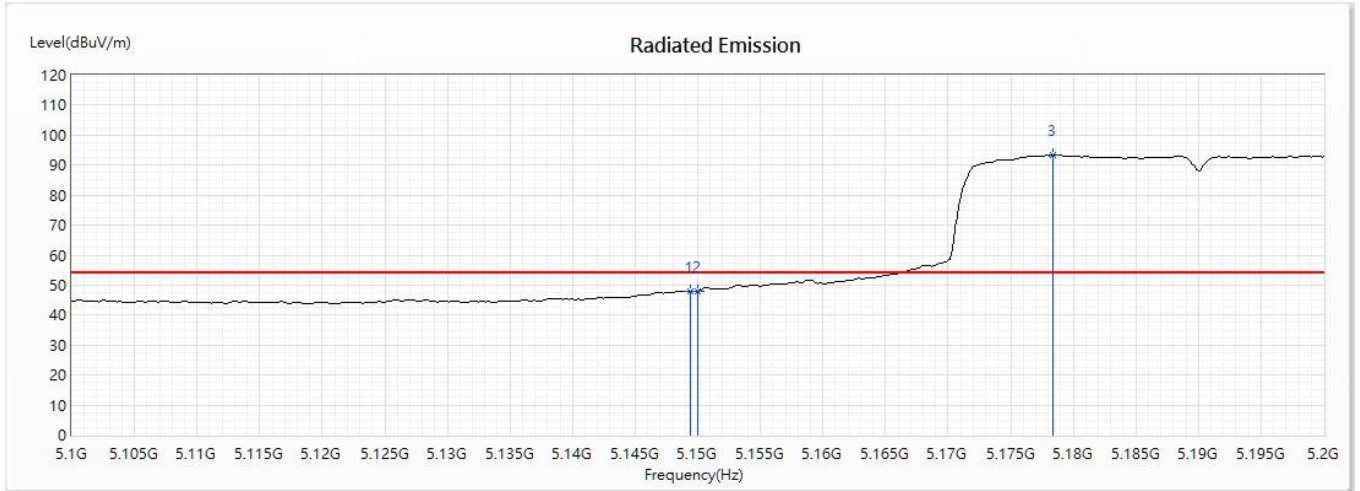


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5149.42	48.11	54.00	-5.89	29.73	18.38	AV
2	5150	47.86	54.00	-6.14	29.49	18.37	AV
! 3	5178.406	93.30	--	--	75.02	18.28	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5310MHz)
 Test Date : 2020/06/11

Horizontal

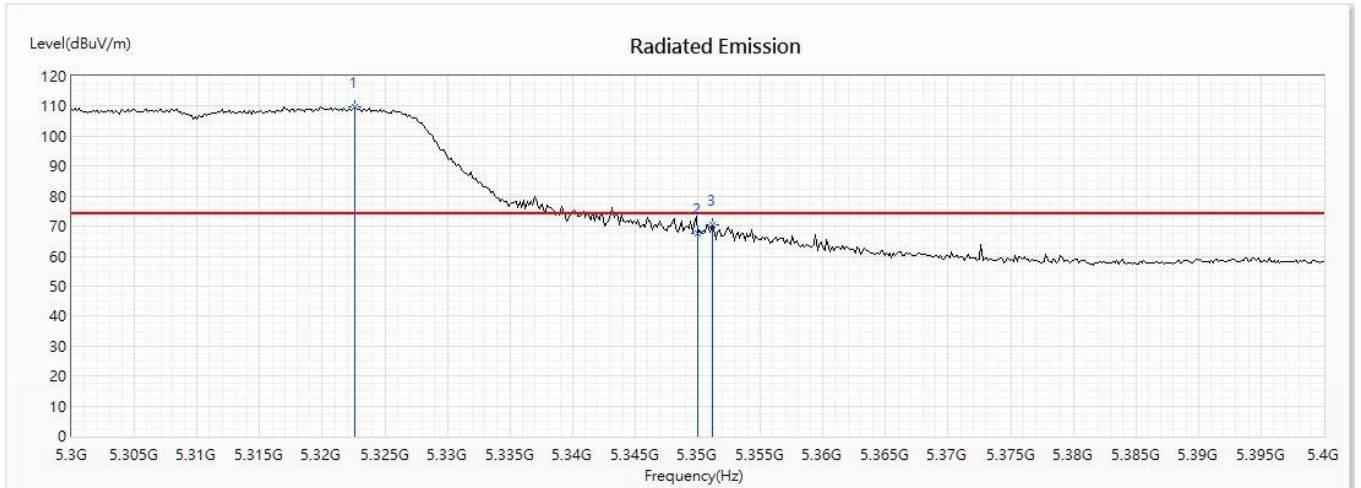


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
! 1	5322.609	109.89	--	--	91.40	18.49	PK
2	5350	67.49	74.00	-6.51	48.86	18.63	PK
3	5351.159	70.38	74.00	-3.62	51.74	18.64	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5310MHz)
 Test Date : 2020/06/11

Horizontal

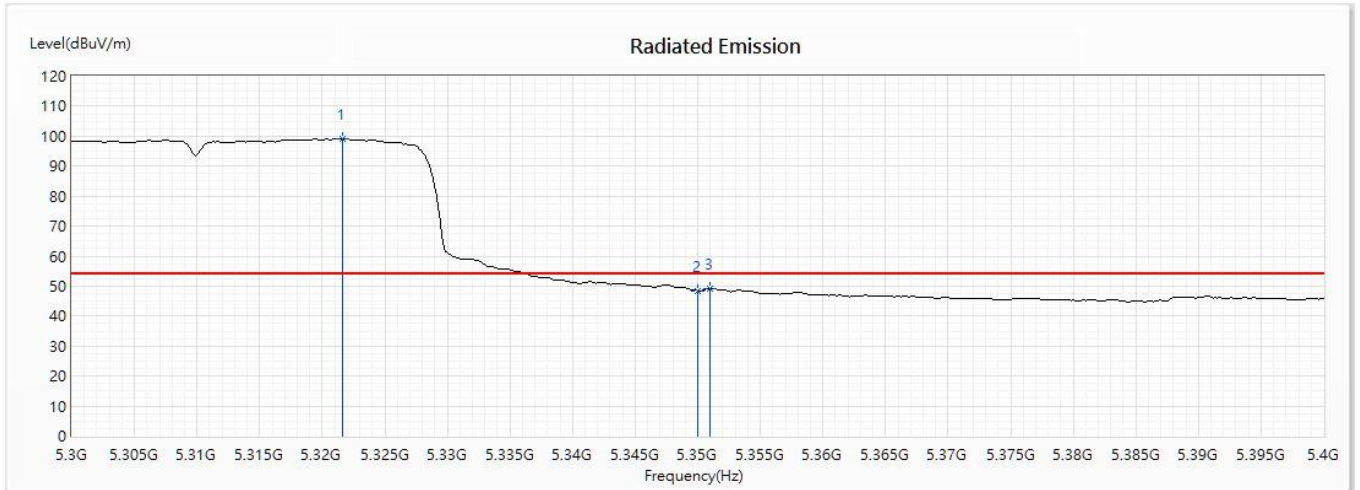


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
! 1	5321.594	99.14	--	--	80.65	18.49	AV
2	5350	48.35	54.00	-5.65	29.72	18.63	AV
3	5351.014	49.15	54.00	-4.85	30.52	18.63	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5310MHz)
 Test Date : 2020/06/11

Vertical

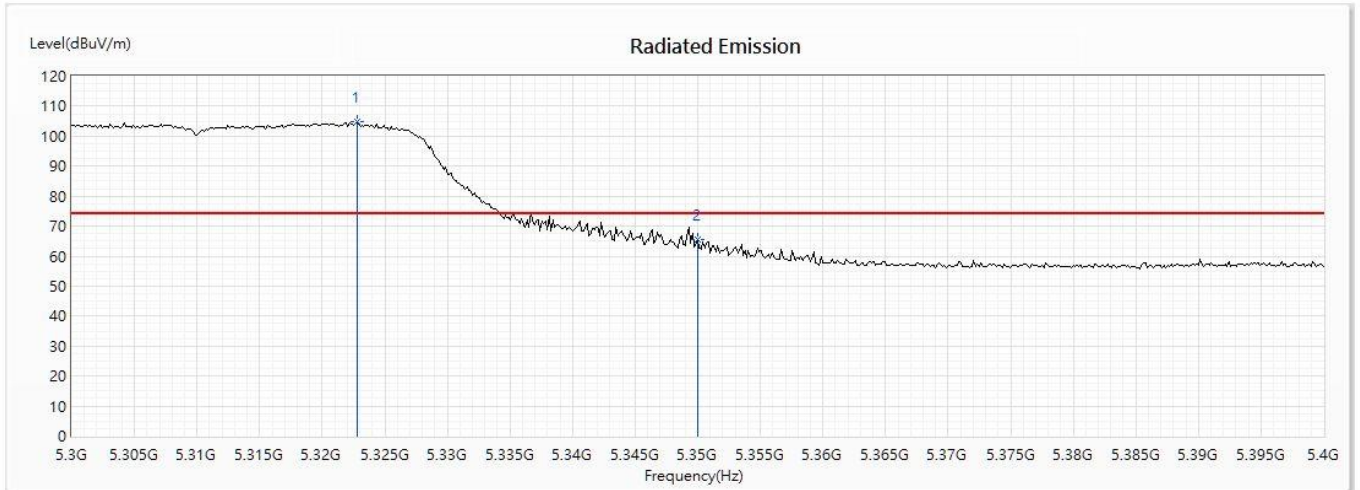


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
! 1	5322.754	104.80	--	--	86.31	18.49	PK
2	5350	65.38	74.00	-8.62	46.75	18.63	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5310MHz)
 Test Date : 2020/06/11

Vertical

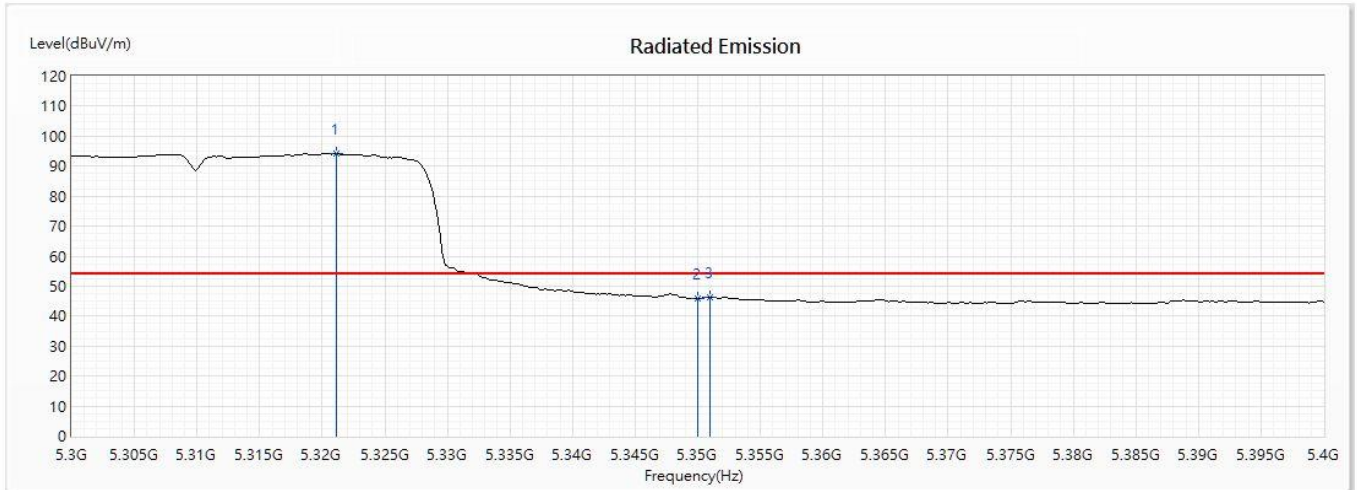


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
! 1	5321.159	94.16	--	--	75.67	18.49	AV
2	5350	45.86	54.00	-8.14	27.23	18.63	AV
3	5351.014	46.46	54.00	-7.54	27.83	18.63	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5510MHz)
 Test Date : 2020/06/11

Horizontal

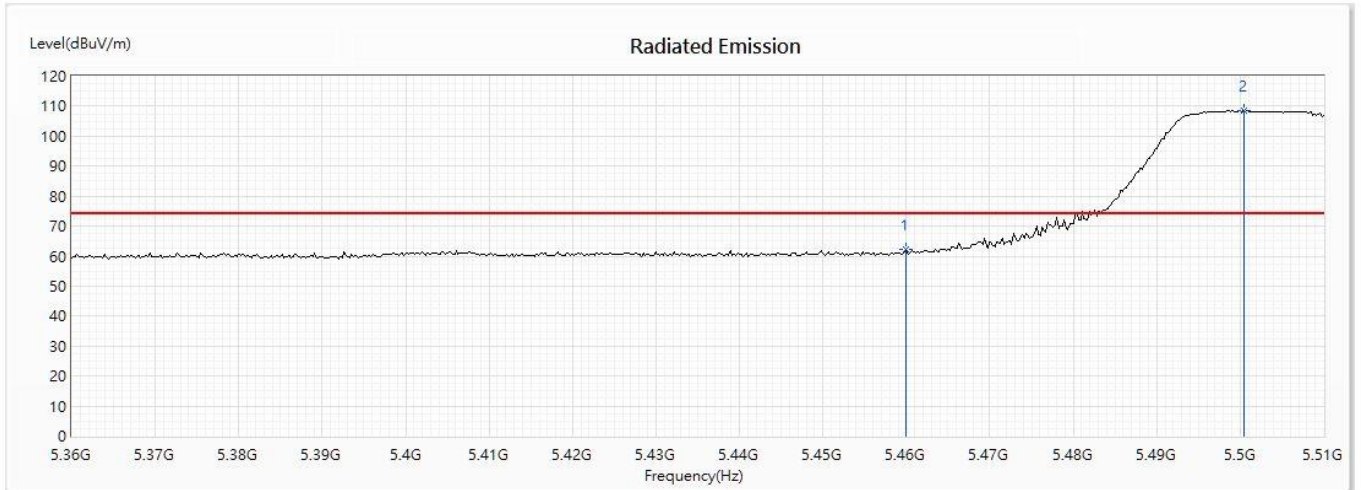


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5460	62.31	74.00	-11.69	42.93	19.38	PK
! 2	5500.435	108.61	--	--	88.96	19.65	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5510MHz)
 Test Date : 2020/06/11

Horizontal

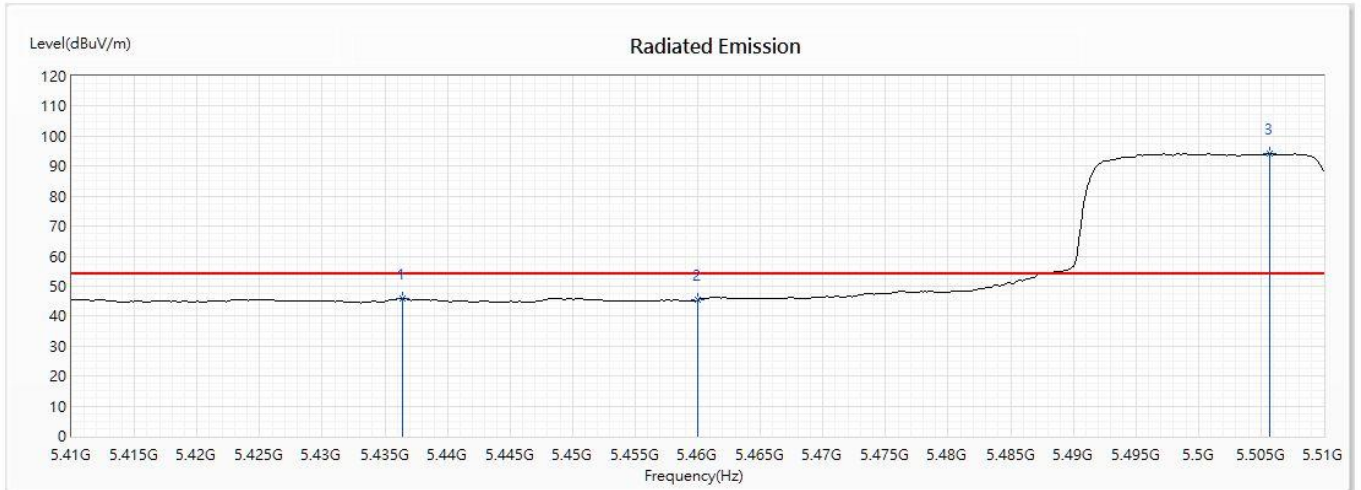


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5436.377	45.93	54.00	-8.07	26.72	19.21	AV
2	5460	45.38	54.00	-8.62	26.00	19.38	AV
! 3	5505.652	94.08	--	--	74.45	19.63	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5510MHz)
 Test Date : 2020/06/11

Vertical

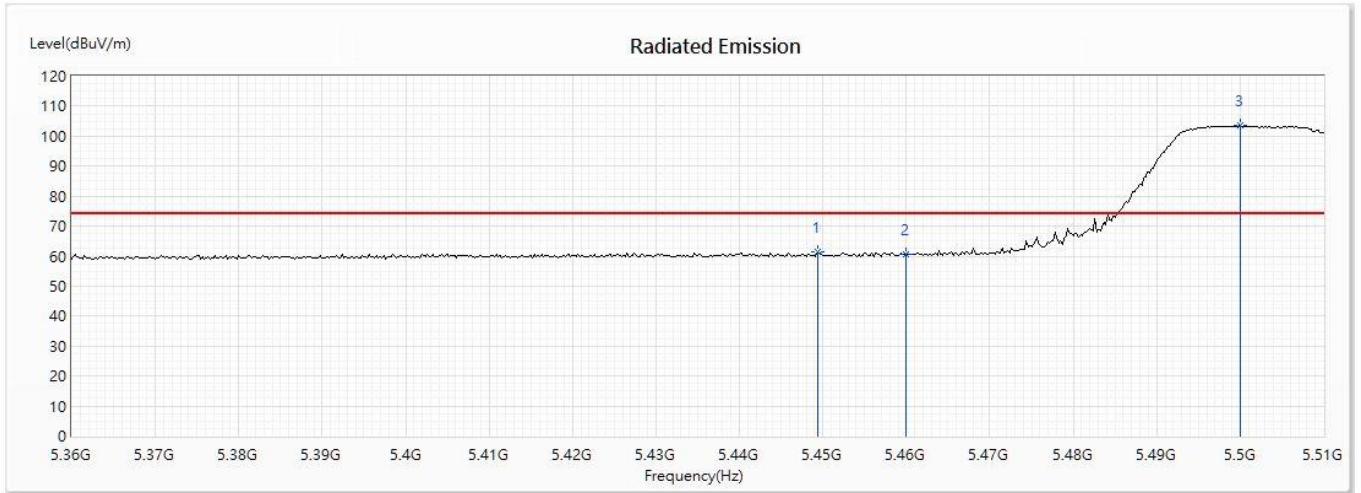


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5449.348	61.58	74.00	-12.42	42.28	19.30	PK
2	5460	60.72	74.00	-13.28	41.34	19.38	PK
! 3	5500	103.74	--	--	84.09	19.65	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Mobile Computer
 Test Item : Band Edge Data
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5510MHz)
 Test Date : 2020/06/11

Vertical

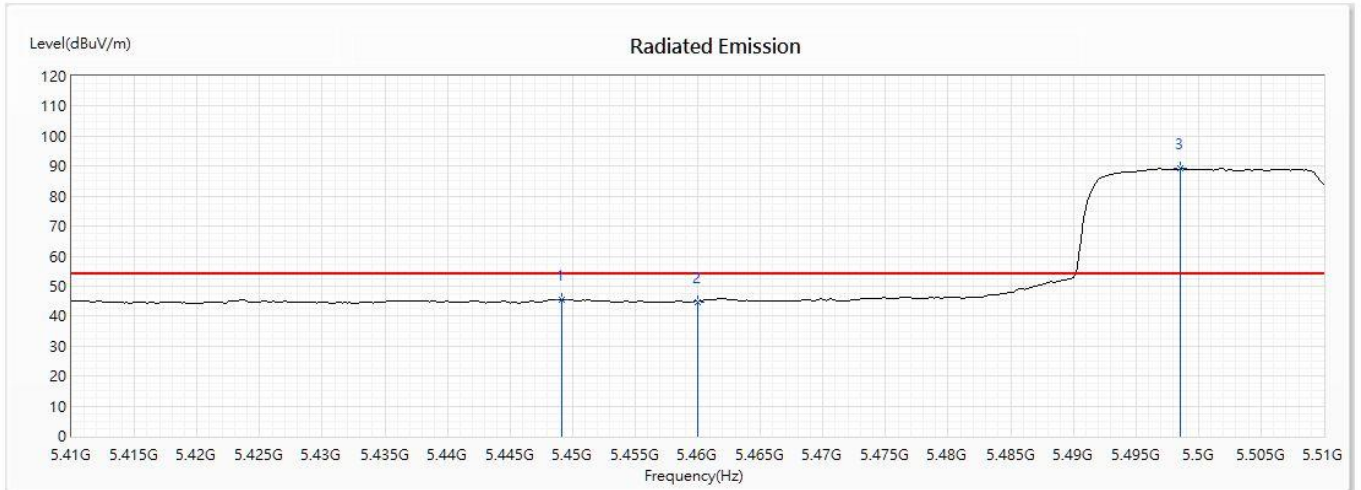

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5449.13	45.55	54.00	-8.45	26.25	19.30	AV
2	5460	44.84	54.00	-9.16	25.46	19.38	AV
! 3	5498.551	89.20	--	--	69.56	19.64	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.