


Test Report

Product Name	Mobile Computer
Model No	RS36
FCC ID	Q3N-RS36

Applicant	CipherLab Co., Ltd.
Address	12F, 333, Dunhua S.Rd., Sec.2, Taipei, Taiwan

Date of Receipt	Oct. 13, 2022
Issue Date	Mar. 28, 2023
Report No.	22A0299R-RFUSWL2V01-A
Report Version	V1.0

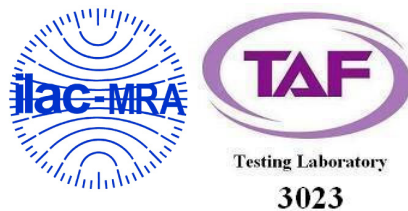

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Report



Product Name	Mobile Computer
Applicant	CipherLab Co., Ltd.
Address	12F, 333, Dunhua S.Rd., Sec.2, Taipei, Taiwan
Manufacturer	CIPHERLAB CO. LTD.
Model No.	RS36
FCC ID	Q3N-RS36
EUT Rated Voltage	AC 100-240V, 50-60Hz (Power by Adapter) or DC 3.85V (Power by Battery)
EUT Test Voltage	AC 120V, 60Hz
Trade Name	CIPHERLAB
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By

:

April Chen

(Senior Project Specialist / April Chen)

Tested By

:

Ivan Chuang

(Senior Engineer / Ivan Chuang)

Approved By

:

Jack Hsu

(Senior Engineer / Jack Hsu)

TABLE OF CONTENTS

1. General Information.....	6
1.1. EUT Description.....	6
1.2. Tested System Details.....	8
1.3. Configuration of Tested System	8
1.4. EUT Exercise Software	8
1.5. Test Facility	9
1.6. List of Test Item and Equipment	10
1.7. Uncertainty	11
2. Conducted Emission	12
2.1. Test Setup	12
2.2. Limits.....	12
2.3. Test Procedure	12
2.4. Test Result of Conducted Emission.....	13
3. Maximum Power Output	14
3.1. Test Setup	14
3.2. Limits.....	14
3.3. Test Procedure	14
3.4. Test Result of Peak Power Output.....	15
4. Radiated Emission	19
4.1. Test Setup	19
4.2. Limits.....	20
4.3. Test Procedure	21
4.4. Test Result of Radiated Emission.....	22
5. RF Antenna Conducted Test	29
5.1. Test Setup	29
5.2. Limits.....	29
5.3. Test Procedure	29
5.4. Test Result of RF Antenna Conducted Test.....	30
6. Band Edge	34
6.1. Test Setup	34
6.2. Limits.....	35
6.3. Test Procedure	35

6.4.	Test Result of Band Edge	36
7.	6dB Bandwidth	48
7.1.	Test Setup	48
7.2.	Limits.....	48
7.3.	Test Procedure	48
7.4.	Test Result of 6dB Bandwidth.....	49
8.	Power Density.....	53
8.1.	Test Setup	53
8.2.	Limits.....	53
8.3.	Test Procedure	53
8.4.	Test Result of Power Density	54
9.	Duty Cycle	58
9.1.	Test Setup	58
9.2.	Test Procedure	58
9.3.	Test Result of Duty Cycle.....	59

Appendix 1: EUT Test Photographs

Appendix 2: Product Photos-Please refer to the file: 22A0299R-Product Photos

Revision History

Report No.	Version	Description	Issued Date
22A0299R-RFUSWL2V01-A	V1.0	Initial issue of report.	Mar. 28, 2023

1. General Information

1.1. EUT Description

Product Name	Mobile Computer
Trade Name	CIPHERLAB
Model No.	RS36
FCC ID	Q3N-RS36
Frequency Range	802.11b/g/n/ac-20 MHz: 2412-2462 MHz 802.11n/ac-40 MHz: 2422-2452 MHz
Number of Channels	802.11b/g/n/ac-20 MHz: 11 802.11n/ac-40 MHz: 7
Data Speed	802.11b: 1-11 Mbps, 802.11g: 6-54 Mbps, 802.11n: up to 150Mbps, 802.11ac: up to 200Mbps
Channel separation	802.11b/g/n/ac: 5 MHz
Type of Modulation	802.11b: DSSS, DBPSK, DQPSK, CCK 802.11g/n/ac: OFDM, BPSK, QPSK, 16QAM, 64QAM, 256QAM
Channel Control	Auto
Power Cable (Optional)	Trade Name: CIPHERLAB, M/N: RS35 SNAP ON, Non-shielded, 1.5m
Adapter #1 (Optional)	Trade Name: Sunny, M/N: SYS1561-1005 Input: AC 100-240V~, 1.0A MAX, 50-60Hz Output: +5.0V=2.0A
Adapter #2 (Optional)	Trade Name: CWT, M/N: 2AEA010BC3D Input: AC 100-240V~ 50/60Hz 0.35A Output: 5.0V=2.0A 10.0W

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	auden	BRS36ANT00001	PIFA	1.8 dBi for 2400 MHz

Note: The antenna of EUT is conforming to FCC 15.203.

802.11b/g/n/ac-20 MHz Center Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	02	2417	03	2422	04	2427
05	2432	06	2437	07	2442	08	2447
09	2452	10	2457	11	2462	--	--

802.11n/ac-40 MHz Center Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	04	2427	05	2432	06	2437
07	2442	08	2447	09	2452	--	--

Note:

1. The EUT is a Mobile Computer with a built-in WLAN and Bluetooth transceiver, this report for 2.4GHz WLAN.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test. The other channels are for reference only.
3. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report.
4. These tests are conducted on a sample for the purpose of demonstrating compliance of transmitter with Part 15 Subpart C Paragraph 15.247 of spread spectrum devices.

Test Mode	Mode 1	Transmit (802.11b)
		Transmit (802.11g)
		Transmit (802.11ac-20 MHz)
		Transmit (802.11ac-40 MHz)


1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Adapter	Sunny	SYS1561-1005	N/A	N/A
2 Notebook PC	ASUS	P2438U	H1NXCV11U083025	N/A

Cable Type	Cable Description
A Power Cable	Non-shielded, 1.5m
B Type C Cable	Shielded, 1m

1.3. Configuration of Tested System

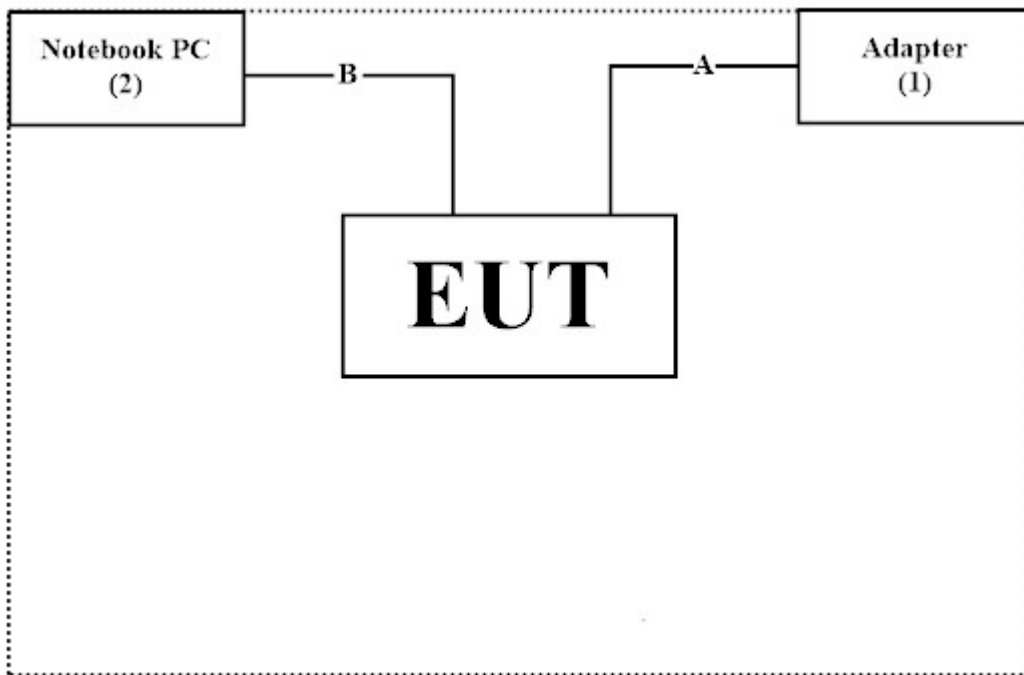

1.4. EUT Exercise Software

1. Setup the EUT as shown in Section 1.3.
2. Execute software ‘QRCT Ver.3.0.271.0’ on the Notebook PC.
3. Configure the test mode, the test channel, and the data rate.
4. Press “OK” to start the continuous Transmit.
5. Verify that the EUT works properly.

1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	10~40 °C	23.4 °C
	Humidity (%RH)	10~90 %	55.2 %
Radiated Emission	Temperature (°C)	10~40 °C	23.5 °C
	Humidity (%RH)	10~90 %	65.3 %
Conductive	Temperature (°C)	10~40 °C	25.1 °C
	Humidity (%RH)	10~90 %	60.0 %

USA : FCC Registration Number: TW0033

Canada : CAB Identifier Number: TW3023 / Company Number: 26930

Site Description : Accredited by TAF
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd

Address : No. 5-22, Ruishukeng Linkou District, New Taipei City, 24451, Taiwan

Performed Location : No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan, R.O.C.

Phone Number : +886-3-275-7255

Fax Number : +886-3-327-8031

Email Address : info.tw@dekra.comWebsite : <http://www.dekra.com.tw>

1.6. List of Test Item and Equipment

For Conduction Measurements /HY-SR01

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	EMI Test Receiver	R&S	ESR7	101601	2022/06/23	2023/06/22
V	Two-Line V-Network	R&S	ENV216	101306	2022/05/23	2023/05/22
V	Two-Line V-Network	R&S	ENV216	101307	2022/07/04	2023/07/03
V	Coaxial Cable	SUHNER	RG400 BNC	RF001	2022/05/24	2023/05/23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version : E3 210616 dekra V9.

For Conducted Measurements /HY-SR02

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Spectrum Analyzer	R&S	FSV30	103466	2021/12/27	2022/12/26
V	Peak Power Analyzer	KEYSIGHT	8990B	MY51000539	2022/05/27	2023/05/26
V	Power Sensor	KEYSIGHT	N1923A	MY59240002	2022/05/19	2023/05/18
V	Power Sensor	KEYSIGHT	N1923A	MY59240003	2022/05/19	2023/05/18

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version : RF Conducted Test Tools R3 V3.0.1.14.

For Radiated Measurements /HY-CB03

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
	Loop Antenna	AMETEK	HLA6121	56736	2022/05/14	2023/05/13
V	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-675	2021/08/11	2023/08/10
V	Horn Antenna	RF SPIN	DRH18-E	210508A18ES	2022/06/08	2023/06/07
V	Horn Antenna	Com-Power	AH-840	101100	2021/10/04	2023/10/03
V	Pre-Amplifier	SGH	SGH0301-9	20211007-10	2022/02/22	2023/02/21
V	Pre-Amplifier	SGH	PRAMP118	20200701	2022/07/28	2023/07/27
V	Pre-Amplifier	EMCI	EMC05820SE	980310	2022/07/28	2023/07/27
V	Pre-Amplifier	EMCI	EMC184045SE	980369	2022/05/12	2023/05/11
	Coaxial Cable	EMCI	EMC102-KM-KM-600	1160314		
	Coaxial Cable	EMCI	EMC102-KM-KM-7000	170242		
V	Filter	MICRO TRONICS	BRM50702	G251	2022/07/27	2023/07/26
	Filter	MICRO TRONICS	BRM50716	G188	2022/07/27	2023/07/26
V	EMI Test Receiver	R&S	ESR3	102793	2021/12/15	2022/12/14
V	Spectrum Analyzer	R&S	FSV3044	101113	2022/01/25	2023/02/24
V	Coaxial Cable	SGH	SGH18	2021005-1	2022/03/18	2023/03/17
	Coaxial Cable	SGH	SGH18	202108-4		
	Coaxial Cable	SGH	SGH18	GD20110223-1		
	Coaxial Cable	SGH	HA800	GD20110222-3		

Note:

1. Bi-Log Antenna and Horn Antenna(AH-840) is calibrated every two years, the other equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version : E3 210616 dekra V9.

1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document.


The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Item	Uncertainty	
Conducted Emission	±3.42 dB	
Peak Power Output	±0.89 dB	
Radiated Emission	Under 1 GHz ±4.05 dB	Above 1 GHz ±3.73 dB
RF Antenna Conducted Test	±2.06 dB	
Band Edge	Under 1 GHz ±4.05 dB	Above 1 GHz ±3.73 dB
6dB Bandwidth	±1544.74 Hz	
Power Density	±2.06 dB	
Duty Cycle	±2.31 ms	

2. Conducted Emission

2.1. Test Setup

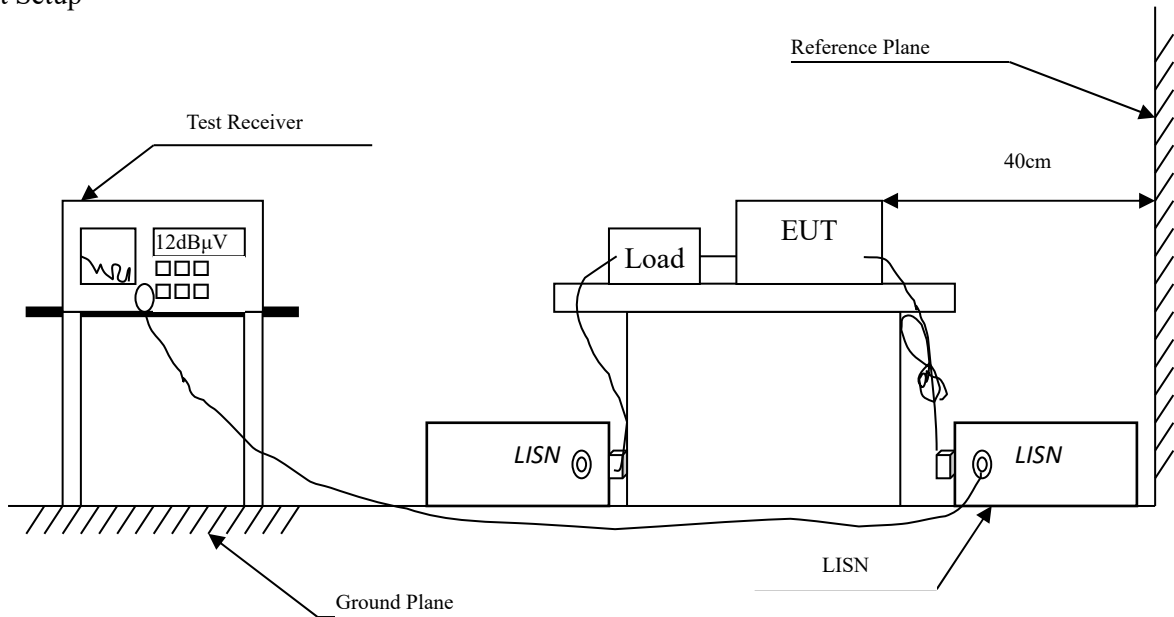

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit		
Frequency MHz	Limits	
	QP	AVG
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50


2.3. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.


Conducted emissions were invested over the frequency range from 0.15 MHz to 30 MHz using a receiver bandwidth of 9 kHz.

2.4. Test Result of Conducted Emission

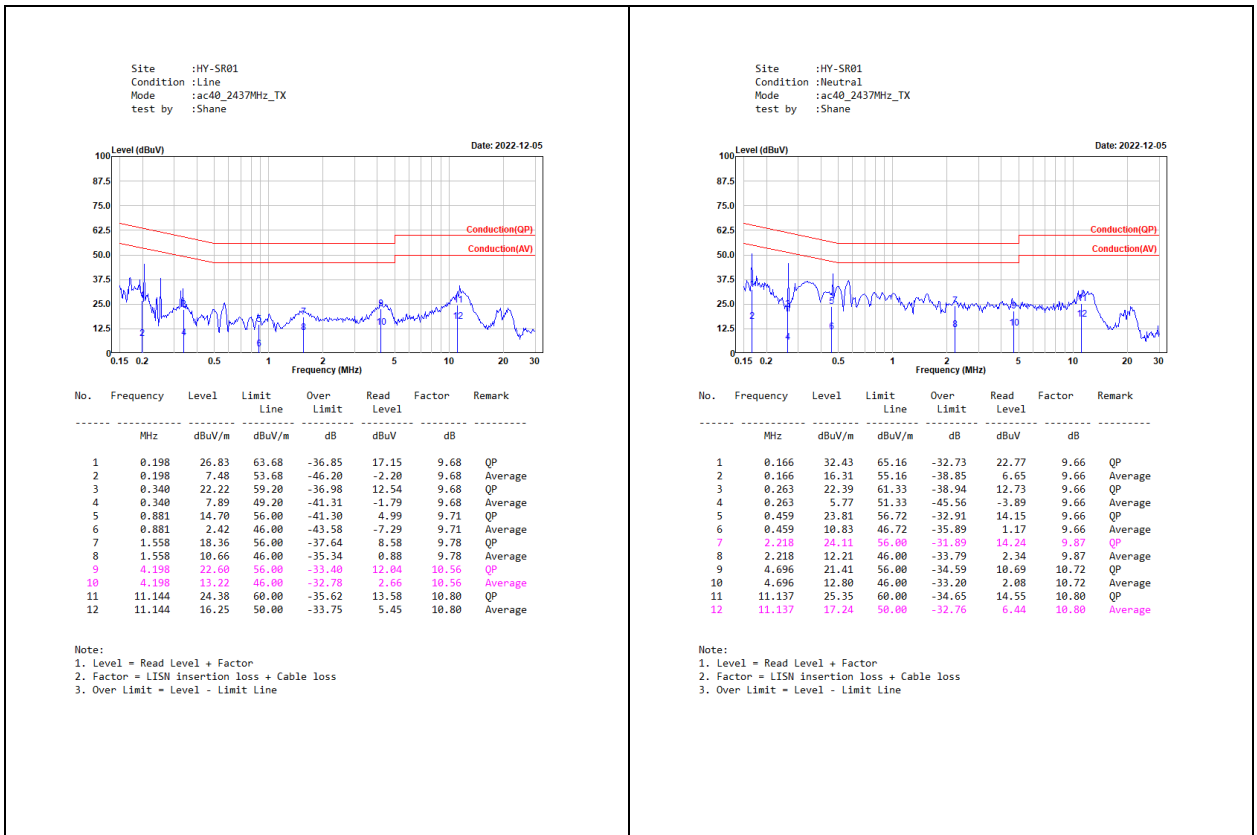

3. Maximum Power Output

3.1. Test Setup

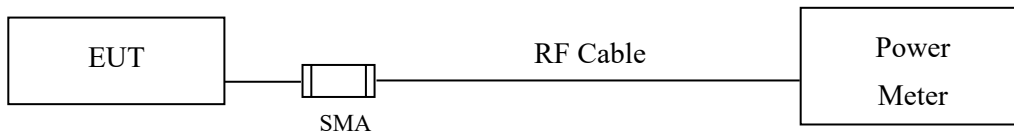

3.2. Limits

The maximum peak power shall be less 1 Watt.

3.3. Test Procedure

The EUT was tested according to C63.10:2013 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using C63.10:2013 Section 11.9.1.3 PKPM1 Peak power meter method. The maximum average conducted output power using C63.10:2013 Section 11.9.2.3 Measurement using a power meter (PM). (Measurement using a gated RF average-reading power meter).

3.4. Test Result of Peak Power Output

Product : Mobile Computer
Test Item : Maximum Power Output Data
Test Mode : Transmit (802.11b)
Test Date : 2022/11/23

Channel No.	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Limit (dBm)	Result
01	2412	1	17.88	<30	Pass
06	2437	1	17.85	<30	Pass
11	2462	1	17.92	<30	Pass

Channel No.	Frequency (MHz)	Data Rate (Mbps)	Peak Power (dBm)	Limit (dBm)	Result
01	2412	1	20.21	<30	Pass
06	2437	1	20.16	<30	Pass
11	2462	1	20.37	<30	Pass

Product : Mobile Computer
Test Item : Maximum Power Output Data
Test Mode : Transmit (802.11g)
Test Date : 2022/11/23

Channel No.	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Limit (dBm)	Result
01	2412	6	17.85	<30	Pass
06	2437	6	17.89	<30	Pass
11	2462	6	17.82	<30	Pass

Channel No.	Frequency (MHz)	Data Rate (Mbps)	Peak Power (dBm)	Limit (dBm)	Result
01	2412	6	22.32	<30	Pass
06	2437	6	22.25	<30	Pass
11	2462	6	22.34	<30	Pass

Product : Mobile Computer
Test Item : Maximum Power Output Data
Test Mode : Transmit (802.11ac-20 MHz)
Test Date : 2022/11/23

Channel No.	Frequency (MHz)	Data Rate	Average Power (dBm)	Limit (dBm)	Result
01	2412	VHT0	17.83	<30	Pass
06	2437	VHT0	17.87	<30	Pass
11	2462	VHT0	17.79	<30	Pass

Channel No.	Frequency (MHz)	Data Rate	Peak Power (dBm)	Limit (dBm)	Result
01	2412	VHT0	22.26	<30	Pass
06	2437	VHT0	22.21	<30	Pass
11	2462	VHT0	22.35	<30	Pass

Product : Mobile Computer
Test Item : Maximum Power Output Data
Test Mode : Transmit (802.11ac-40 MHz)
Test Date : 2022/11/23


Channel No.	Frequency (MHz)	Data Rate	Average Power (dBm)	Limit (dBm)	Result
03	2422	VHT0	15.66	<30	Pass
04	2427	VHT0	16.91	<30	Pass
05	2432	VHT0	17.83	<30	Pass
06	2437	VHT0	17.96	<30	Pass
08	2447	VHT0	17.35	<30	Pass
09	2452	VHT0	16.16	<30	Pass

Channel No.	Frequency (MHz)	Data Rate	Peak Power (dBm)	Limit (dBm)	Result
03	2422	VHT0	21.89	<30	Pass
04	2427	VHT0	22.89	<30	Pass
05	2432	VHT0	23.46	<30	Pass
06	2437	VHT0	23.51	<30	Pass
08	2447	VHT0	23.21	<30	Pass
09	2452	VHT0	22.09	<30	Pass


4. Radiated Emission

4.1. Test Setup


Radiated Emission Under 30 MHz

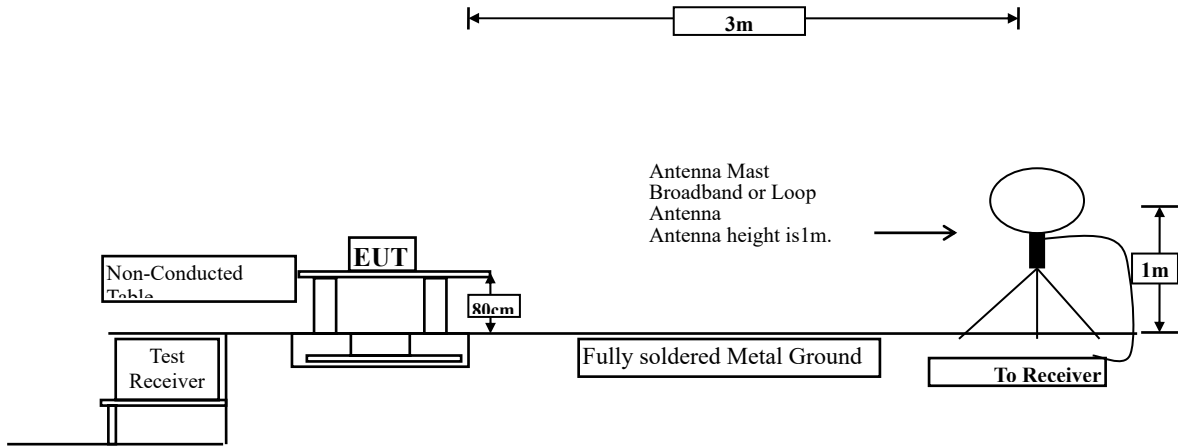

Radiated Emission Below 1 GHz

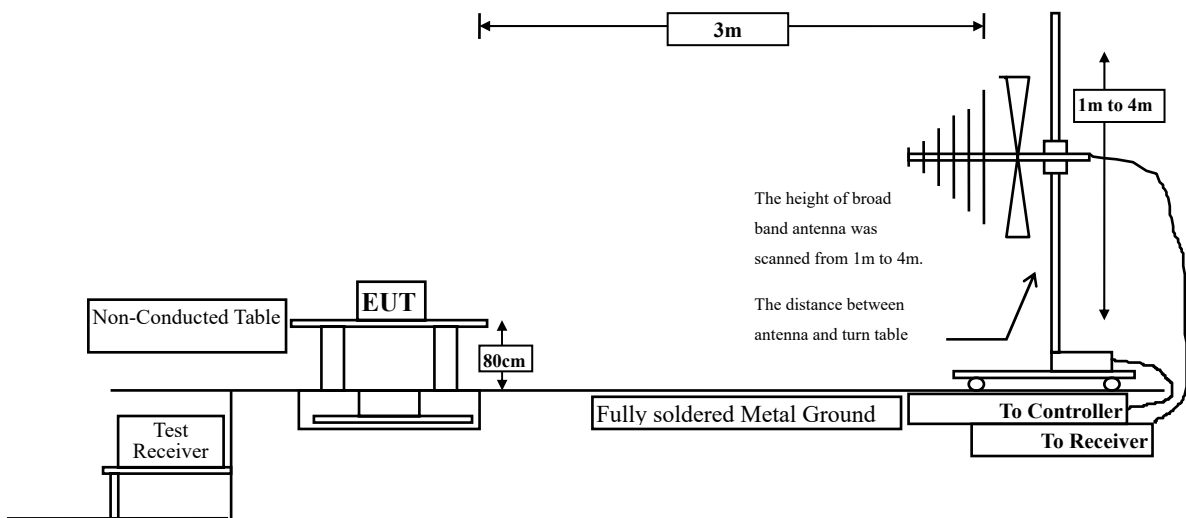

Radiated Emission Above 1 GHz

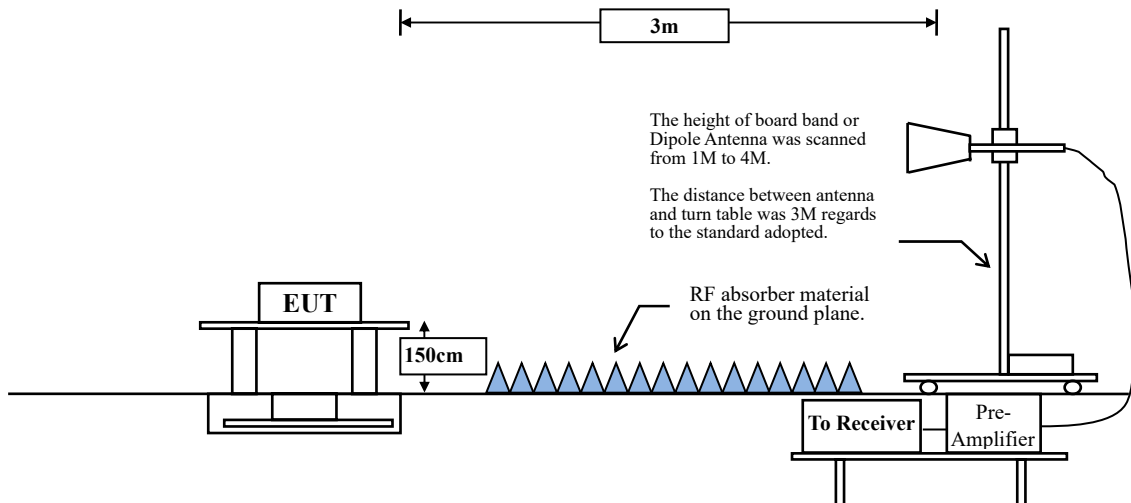

4.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20 dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dB μ V) = 20 log RF Voltage (μ V)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to C63.10:2013 Section 11.12.1 for compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1 GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30 MHz setting on the field strength meter is 9 kHz and 30 MHz~1 GHz is 120 kHz and above 1 GHz is 1 MHz.

Radiated emission measurements below 30 MHz are made using Loop Antenna and 30 MHz~1 GHz are made using broadband Bilog antenna and above 1 GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The measurement frequency range form 9 kHz - 10th Harmonic of fundamental was investigated.

RBW and VBW Parameter setting:

According to C63.10 Section 11.12.2.4 Peak measurement procedure.

RBW = as specified in Table 1.

VBW \geq 3 x RBW.

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure.

RBW = 1MHz.

VBW = 10Hz, when duty cycle \geq 98 %

VBW \geq 1/T, when duty cycle < 98 %





(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)





2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11 b	99.02	12.1600	82	10
802.11 g	97.81	2.0280	493	500
802.11 ac20	97.65	1.8915	529	1000
802.11 ac40	94.08	0.9295	1076	2000





Note: Duty Cycle Refer to Section 9





4.4. Test Result of Radiated Emission







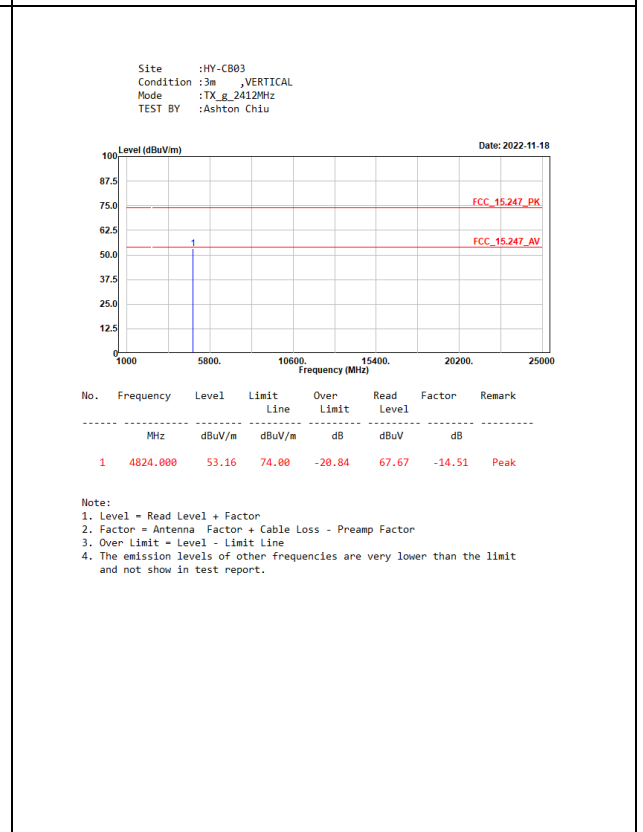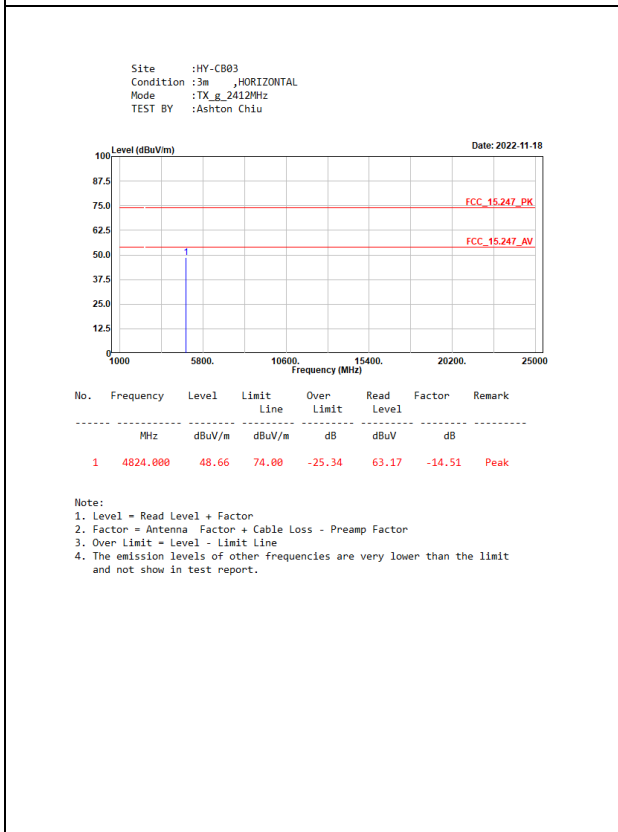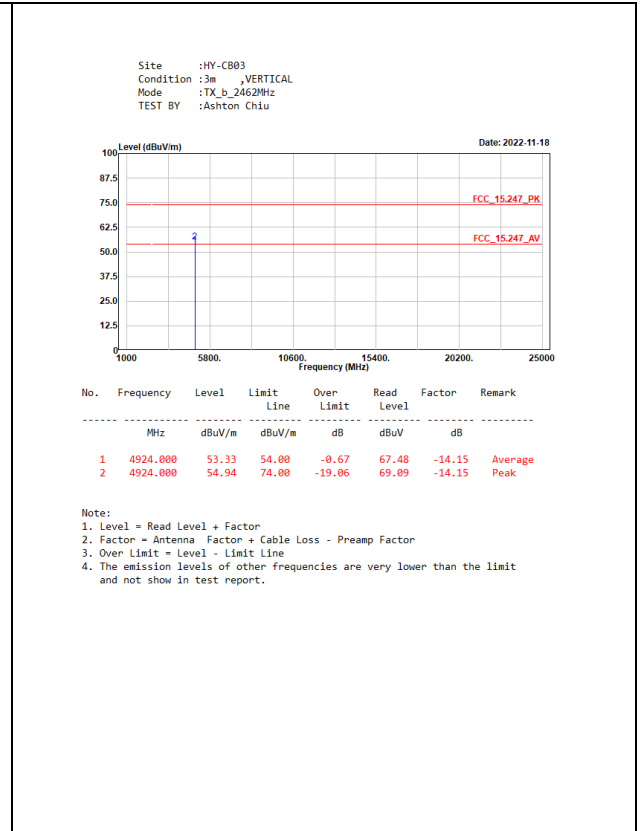
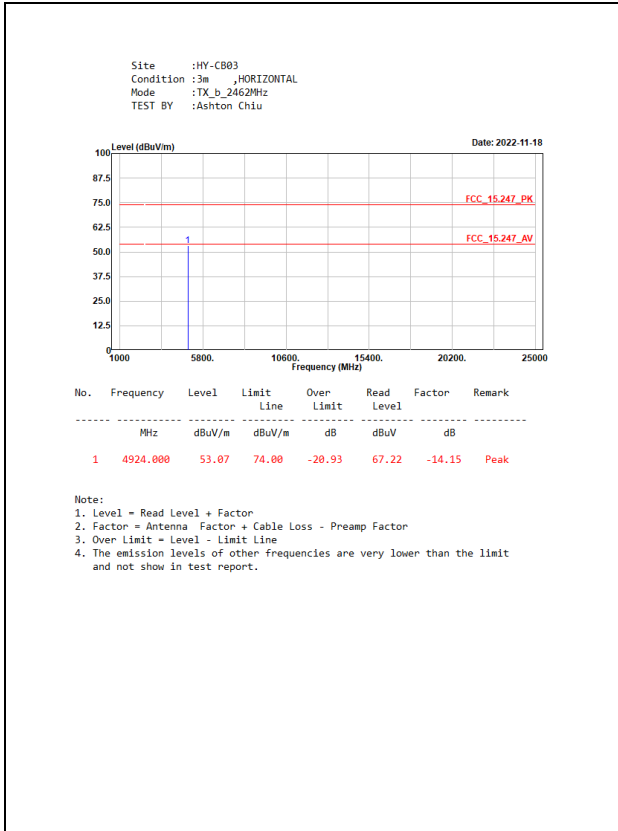


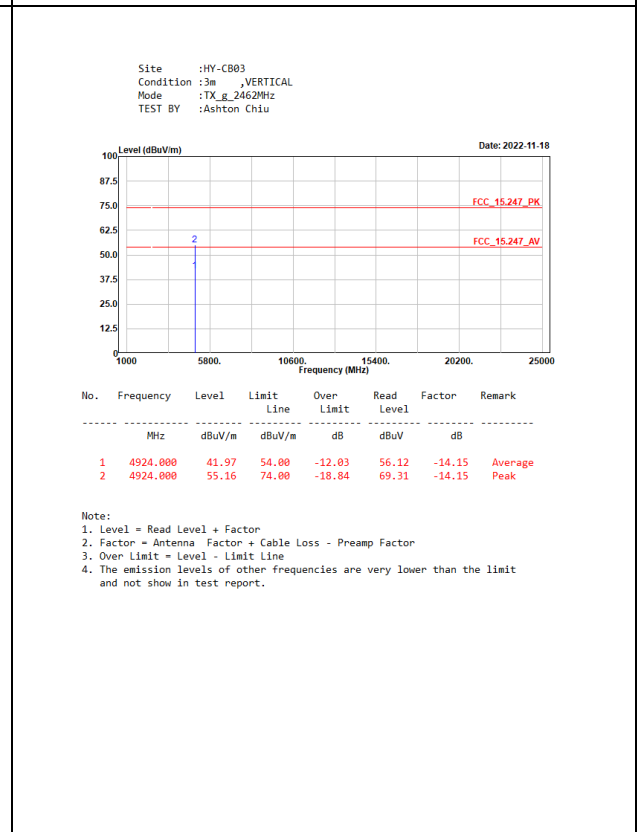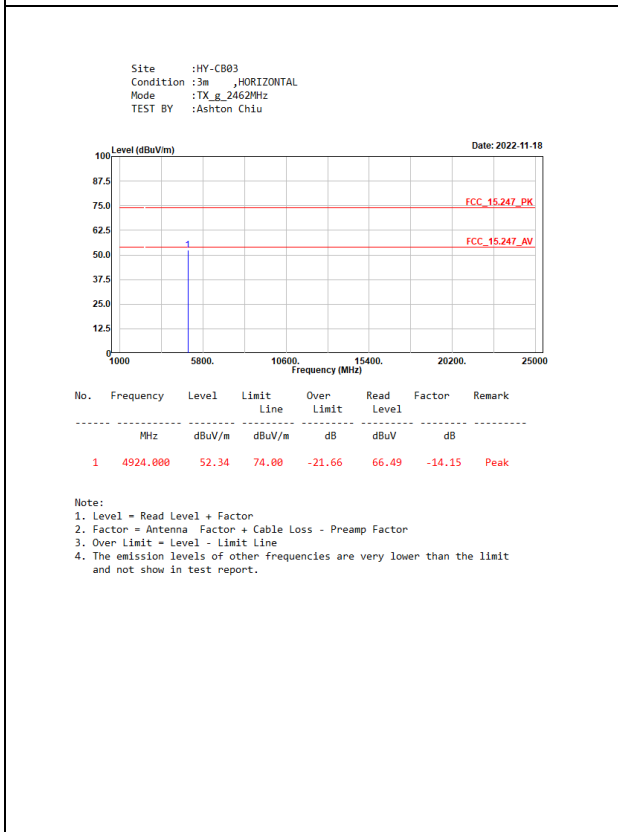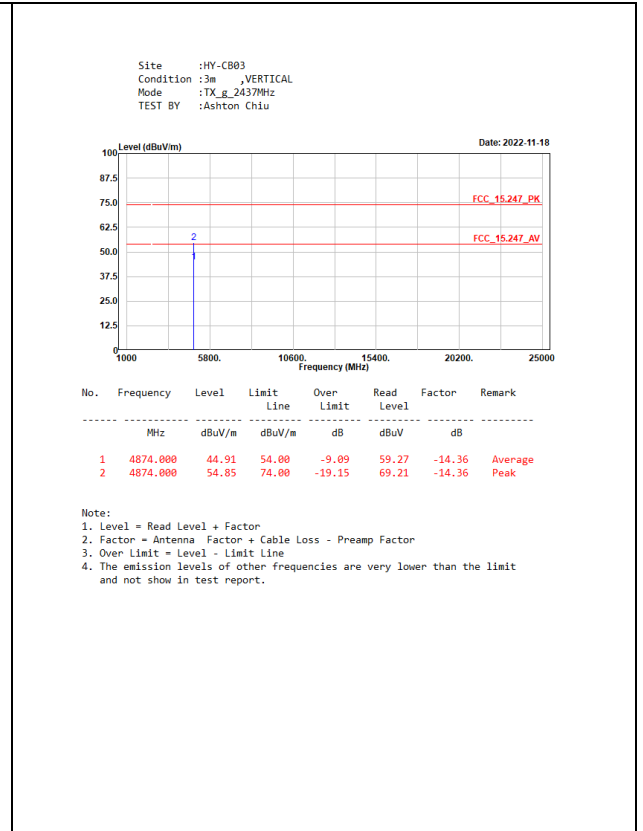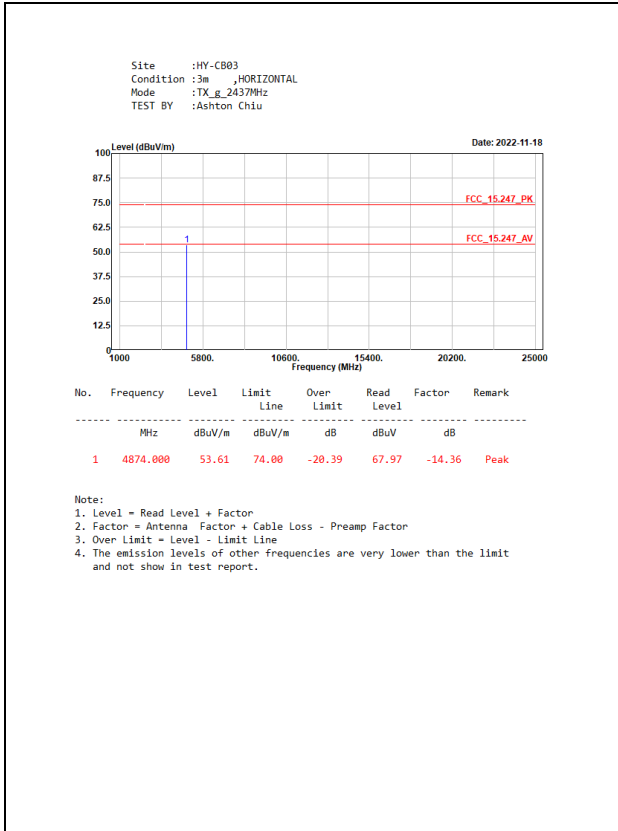

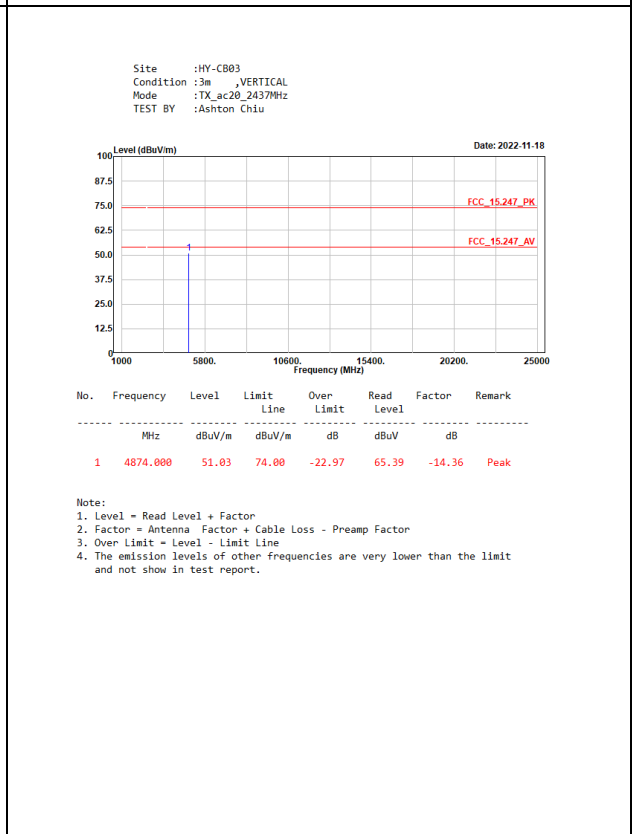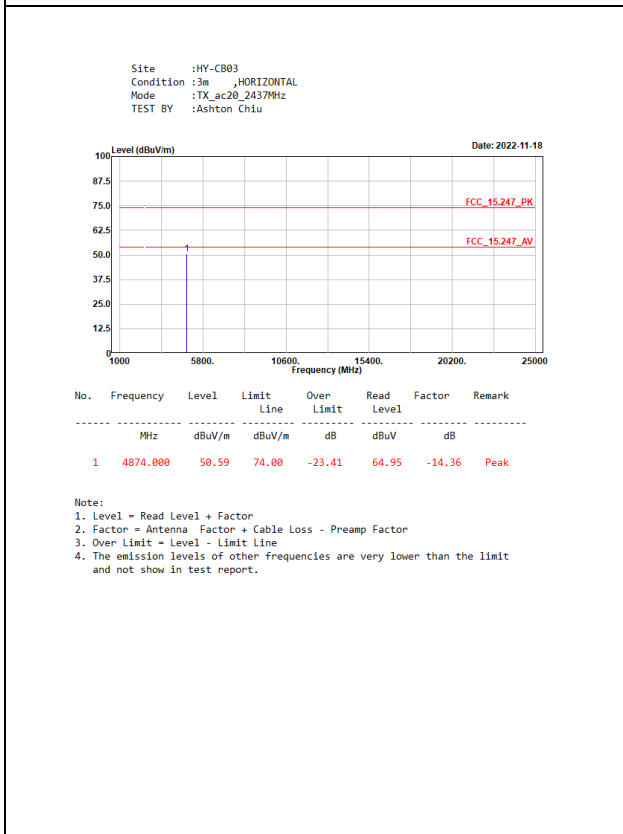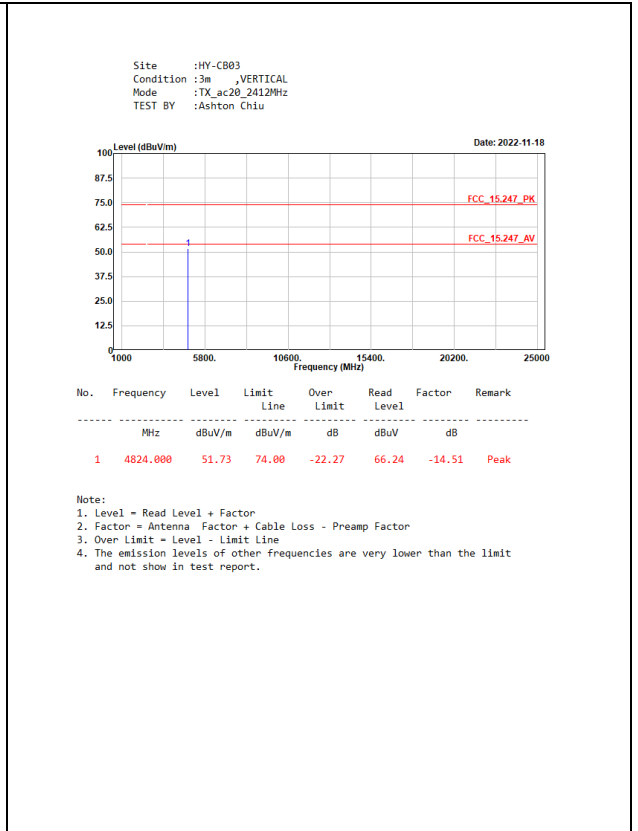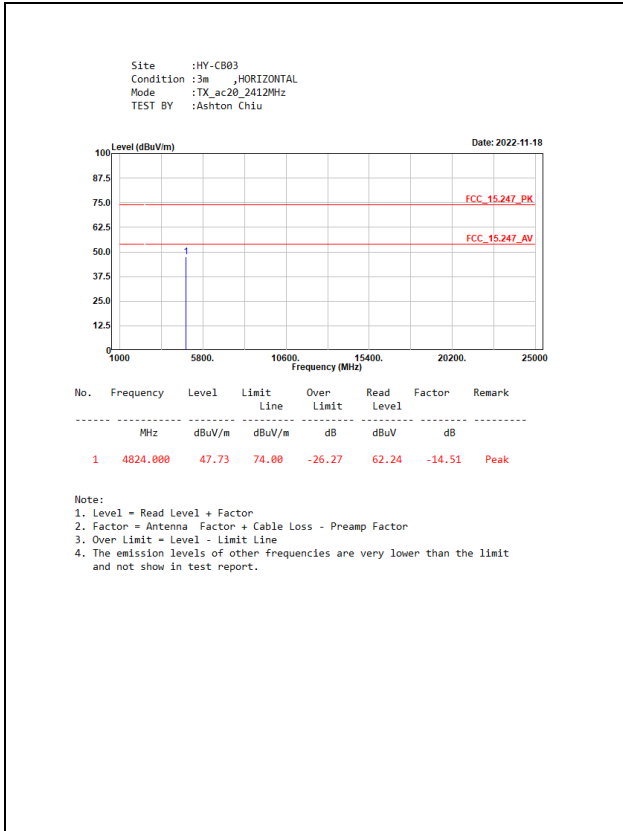

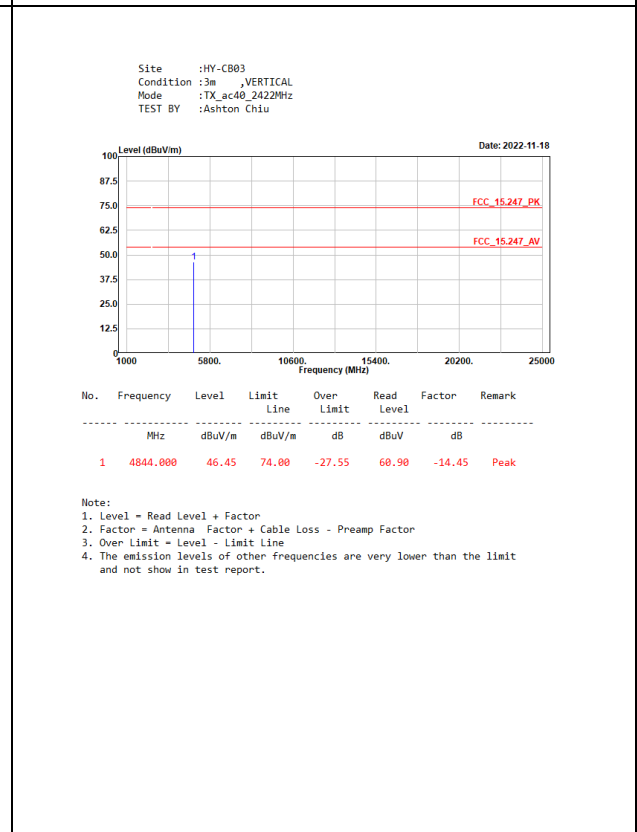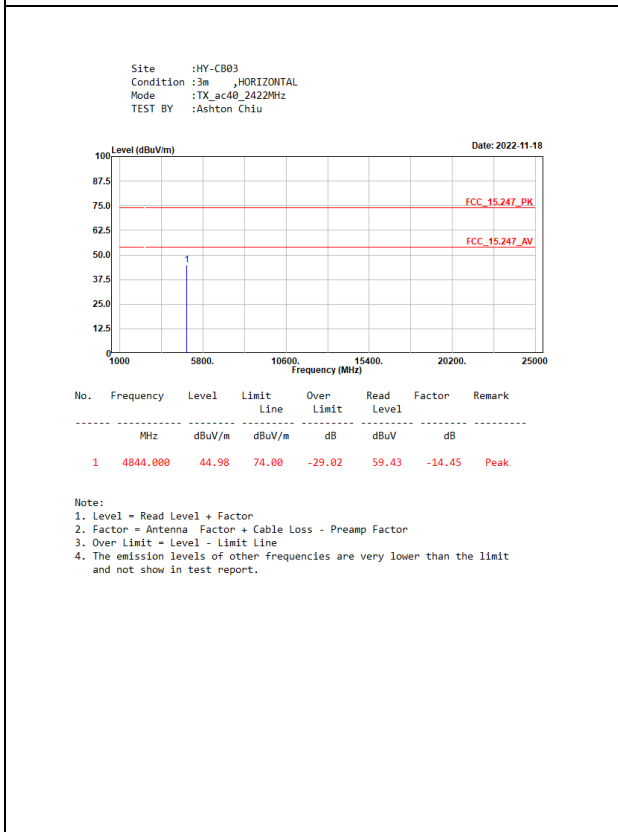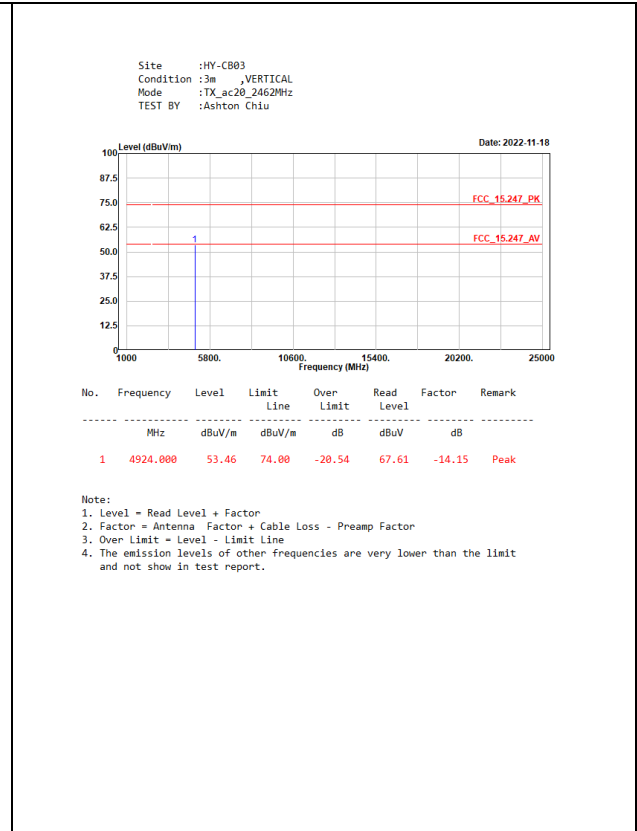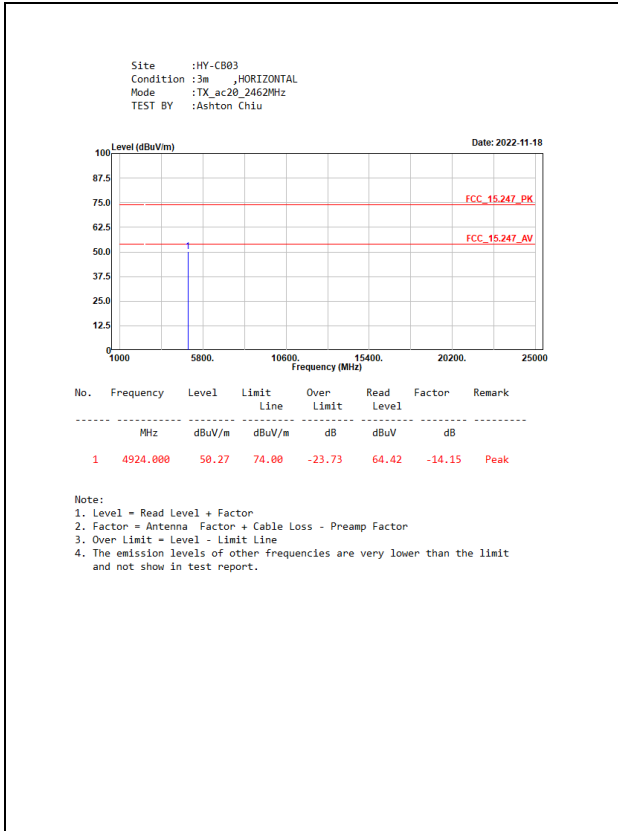

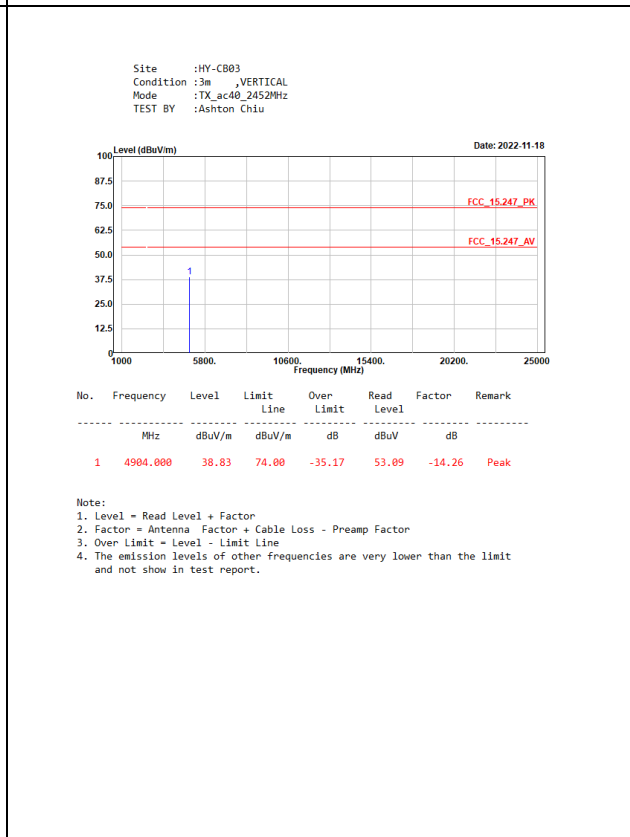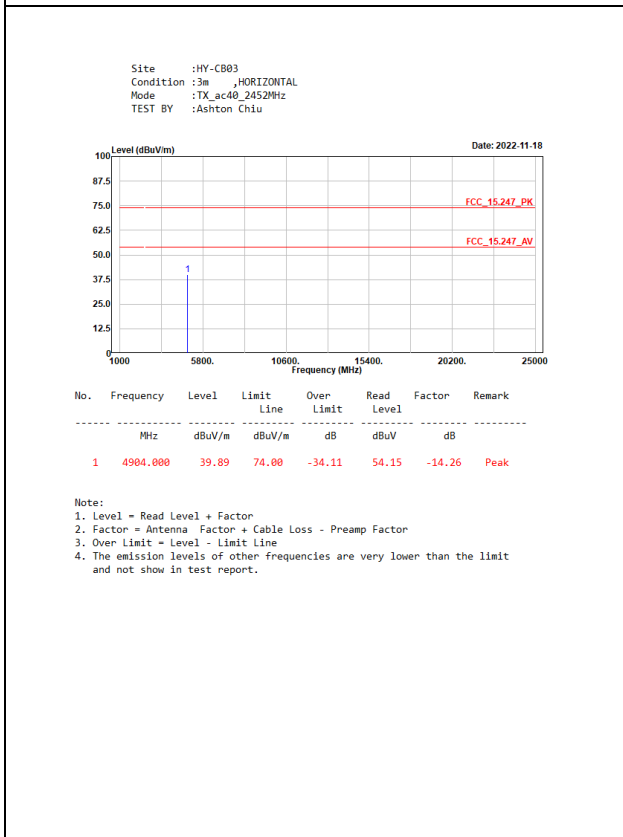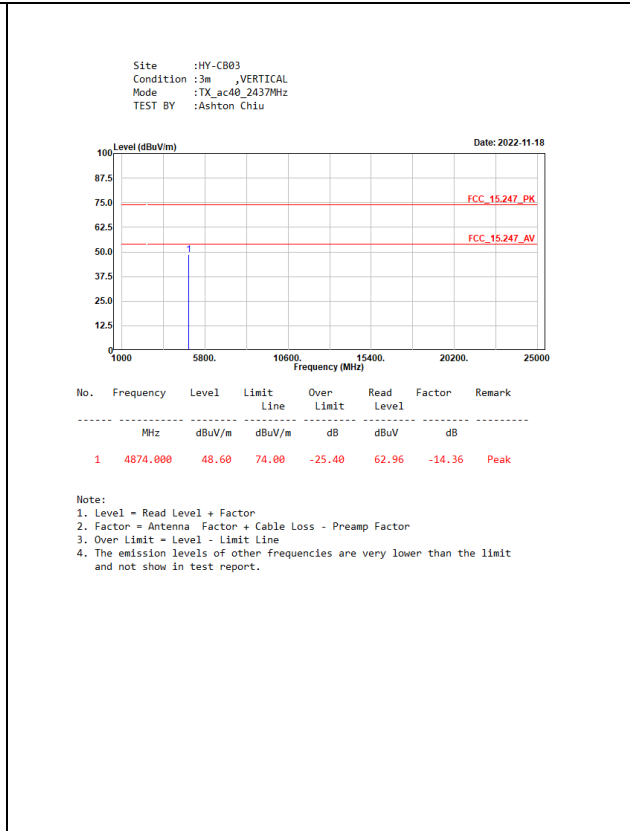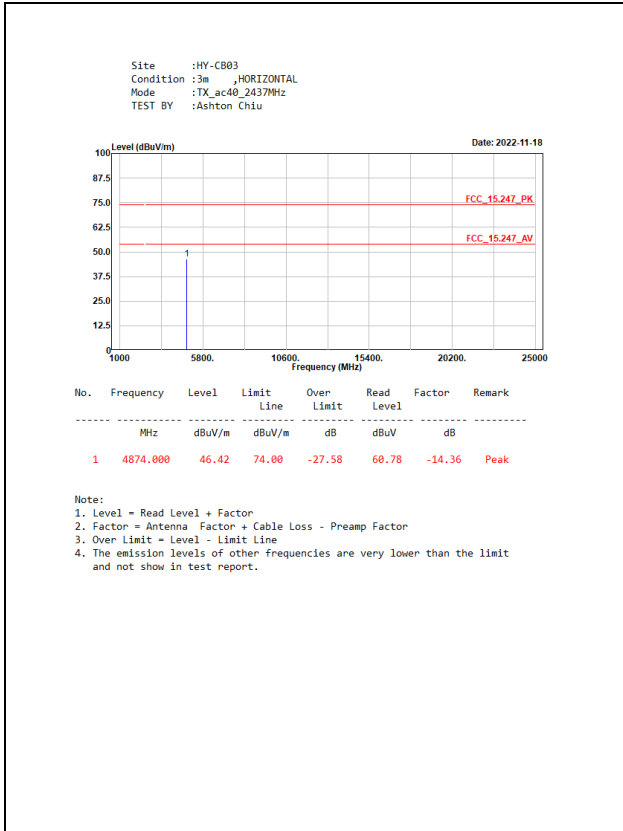


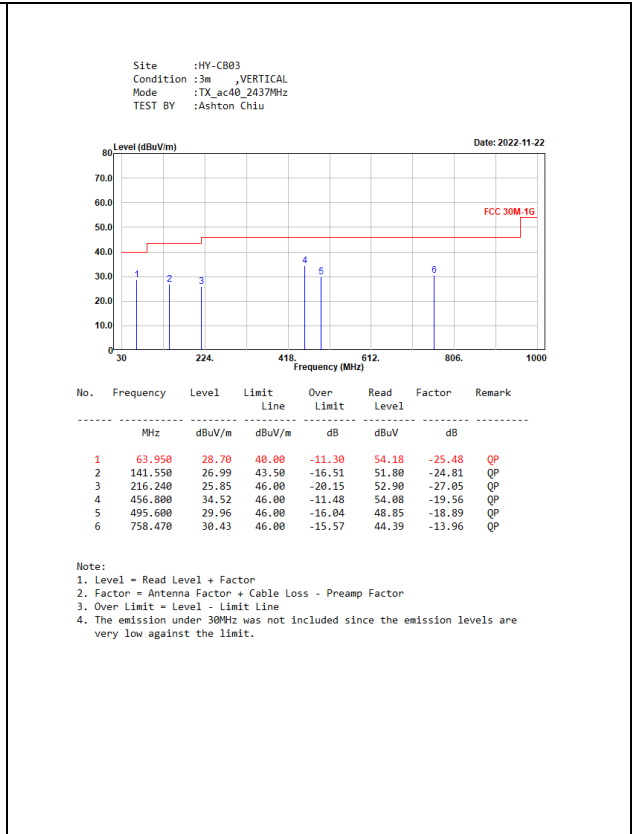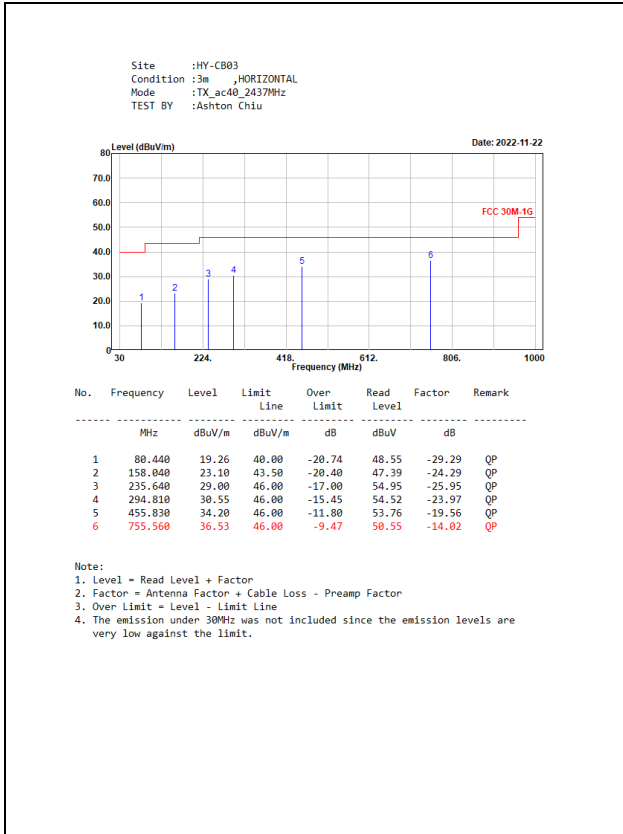

5. RF Antenna Conducted Test

5.1. Test Setup

RF antenna Conducted Measurement:

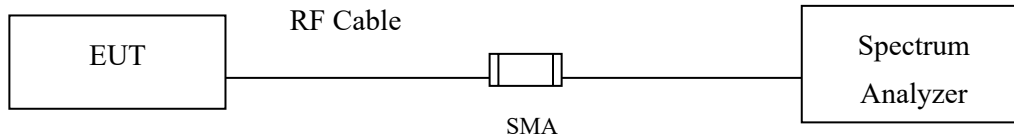

5.2. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.3. Test Procedure


The EUT was tested according to C63.10:2013 Section 11.11 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

5.4. Test Result of RF Antenna Conducted Test

Product : Mobile Computer
 Test Item : RF antenna conducted test
 Test Mode : Transmit (802.11b)
 Test Date : 2022/11/22


Channel 01 (2412 MHz)

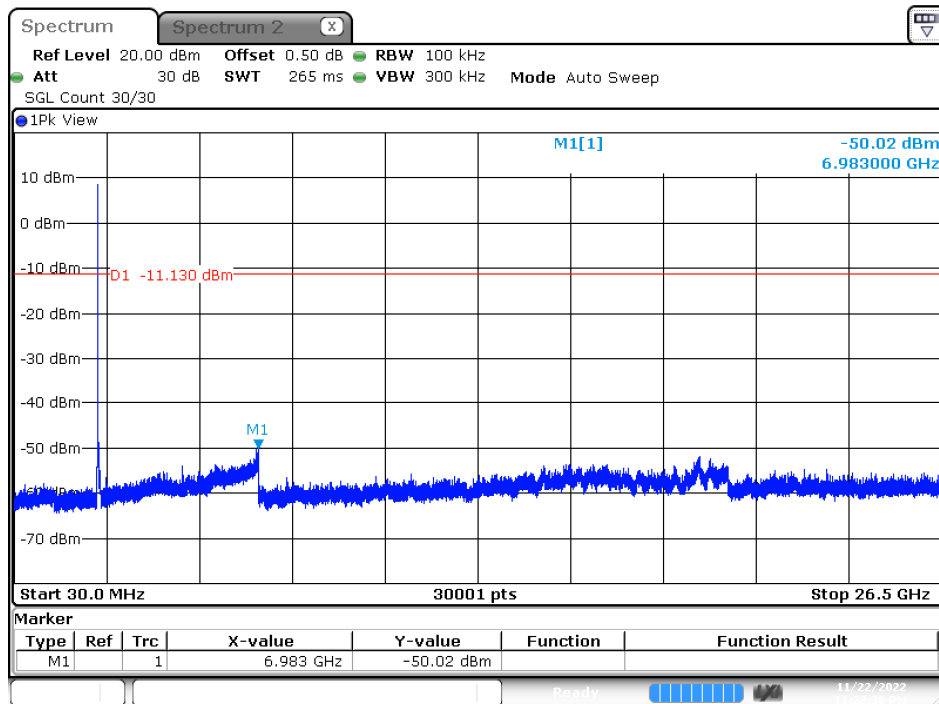

Date: 22.NOV.2022 23:22:36

Product : Mobile Computer
 Test Item : RF Antenna Conducted Spurious
 Test Mode : Transmit (802.11g)
 Test Date : 2022/11/22


Channel 06 (2437 MHz)

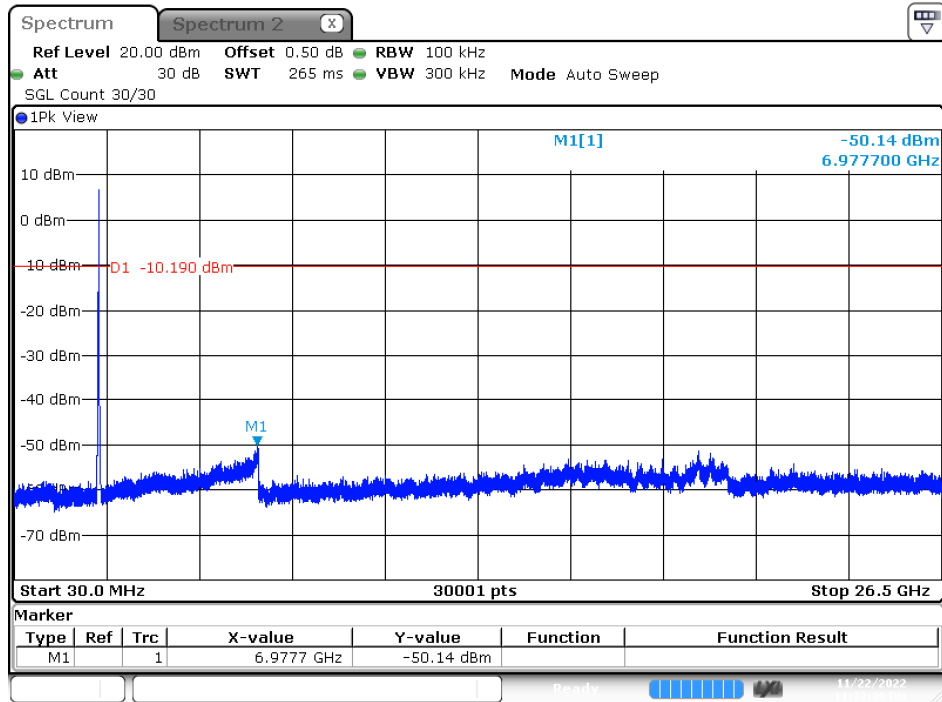

Date: 22.NOV.2022 23:33:30

Product : Mobile Computer
 Test Item : RF Antenna Conducted Spurious
 Test Mode : Transmit (802.11ac-20 MHz)
 Test Date : 2022/11/22


Channel 06 (2437 MHz)

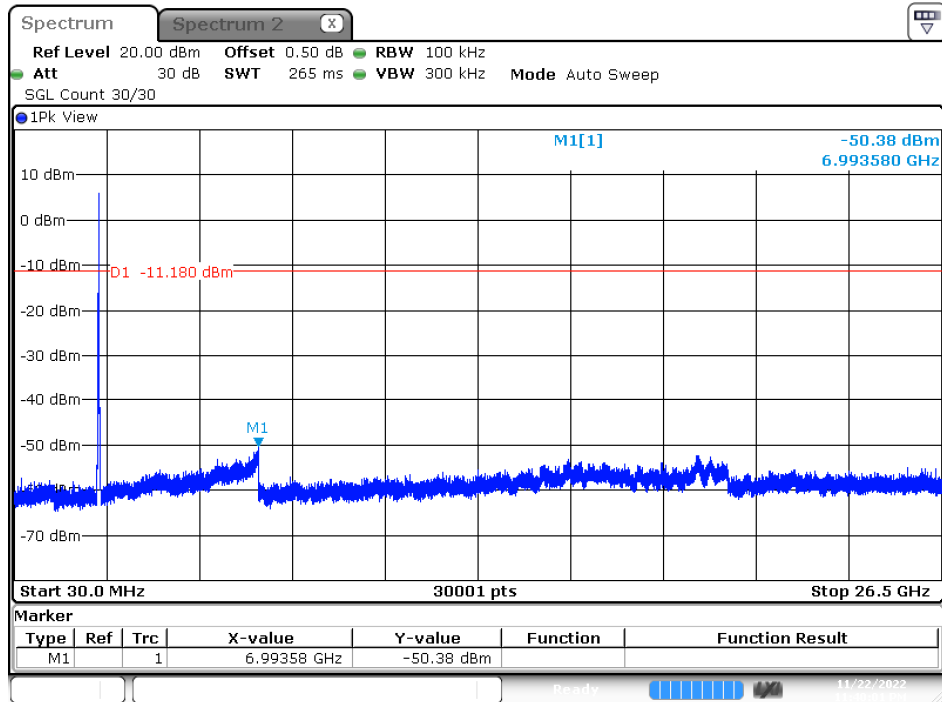

Date: 22.NOV.2022 23:40:02

Product : Mobile Computer
 Test Item : RF Antenna Conducted Spurious
 Test Mode : Transmit (802.11ac-40 MHz)
 Test Date : 2022/11/22

Channel 06 (2437 MHz)

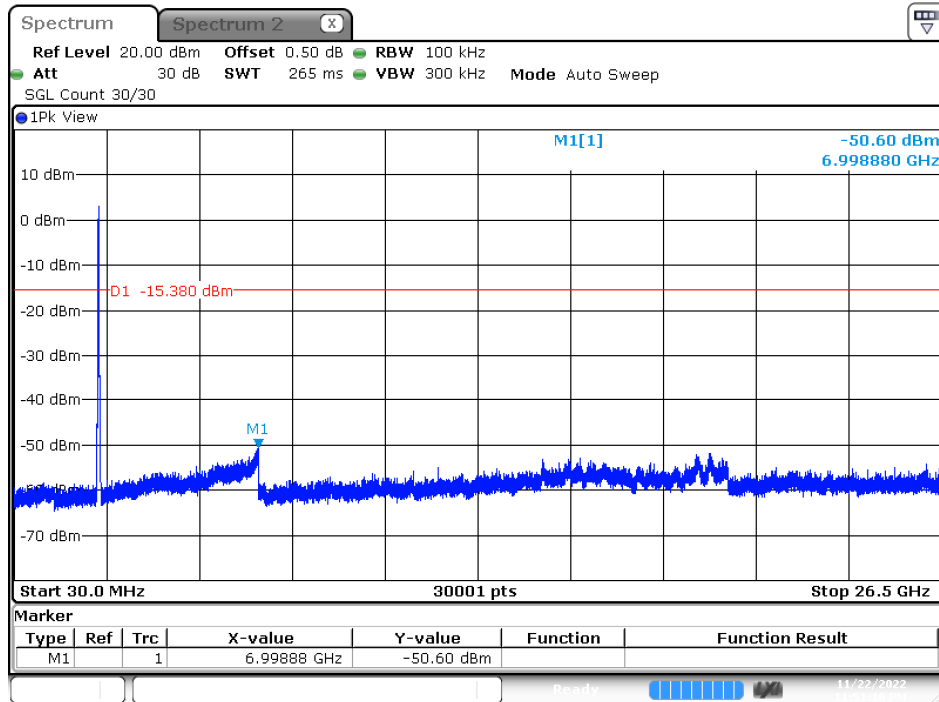


Date: 22.NOV.2022 23:51:11

6. Band Edge


6.1. Test Setup

RF Conducted Measurement

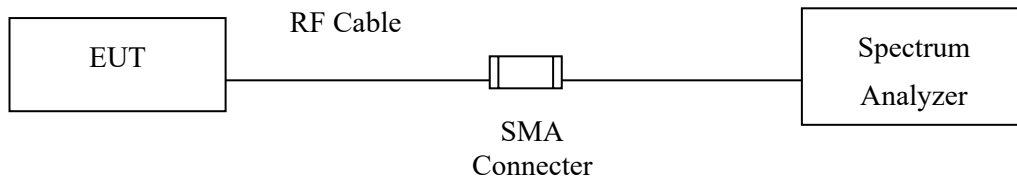

RF Radiated Measurement:

Above 1 GHz

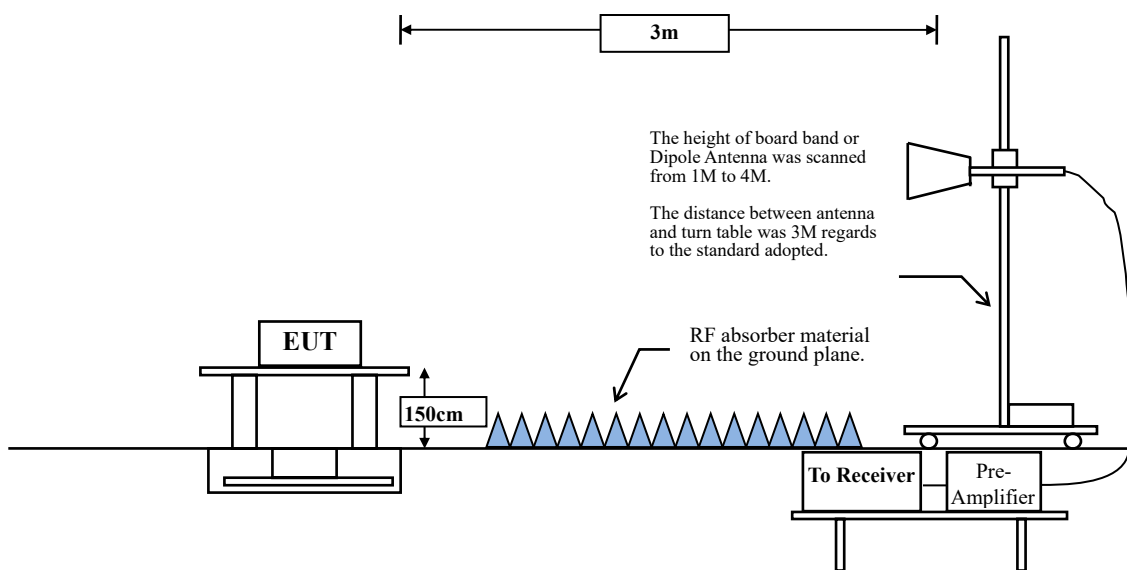

6.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to C63.10:2013 Section 11.12.1 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

RBW and VBW Parameter setting:

According to C63.10 Section 11.12.2.4 Peak measurement procedure.

RBW = as specified in Table 1.

VBW $\geq 3 \times$ RBW.

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure.

RBW = 1 MHz.

VBW = 10 Hz, when duty cycle $\geq 98 \%$





VBW $\geq 1/T$, when duty cycle $< 98 \%$





(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)





2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11 b	99.02	12.1600	82	10
802.11 g	97.81	2.0280	493	500
802.11 ac20	97.65	1.8915	529	1000
802.11 ac40	94.08	0.9295	1076	2000





Note: Duty Cycle Refer to Section 9





6.4. Test Result of Band Edge

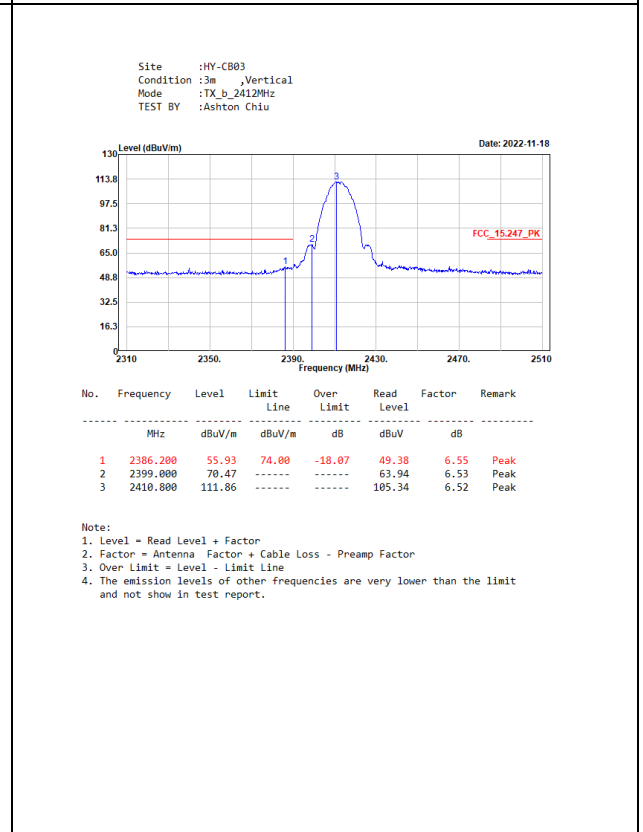
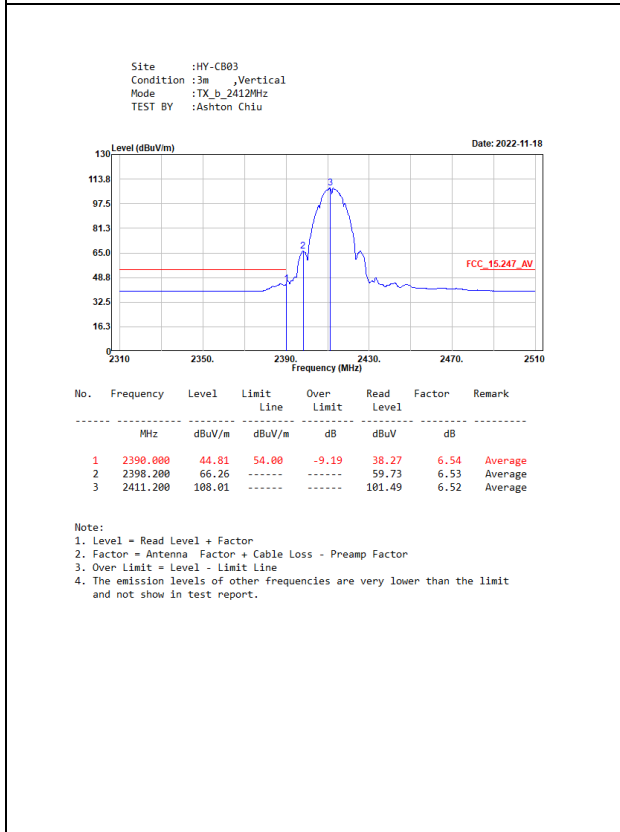
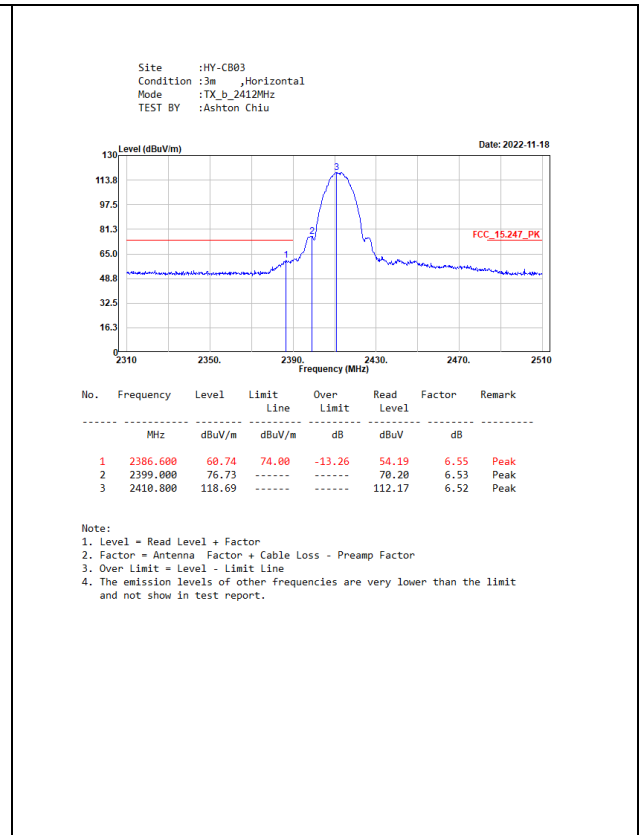
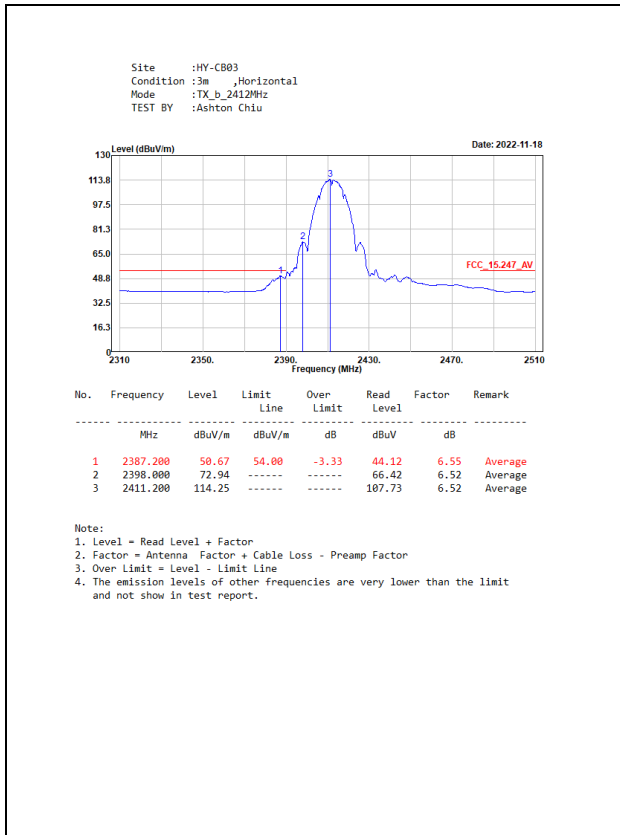


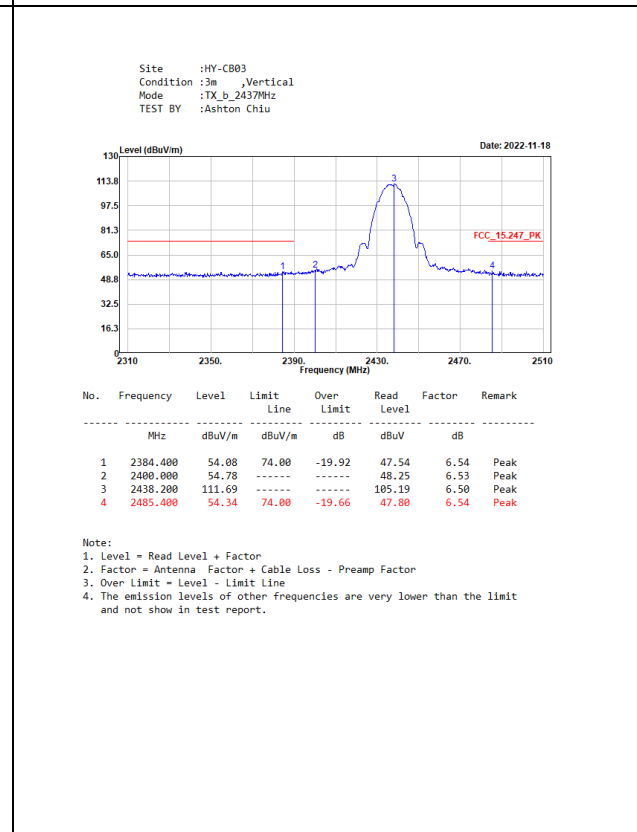
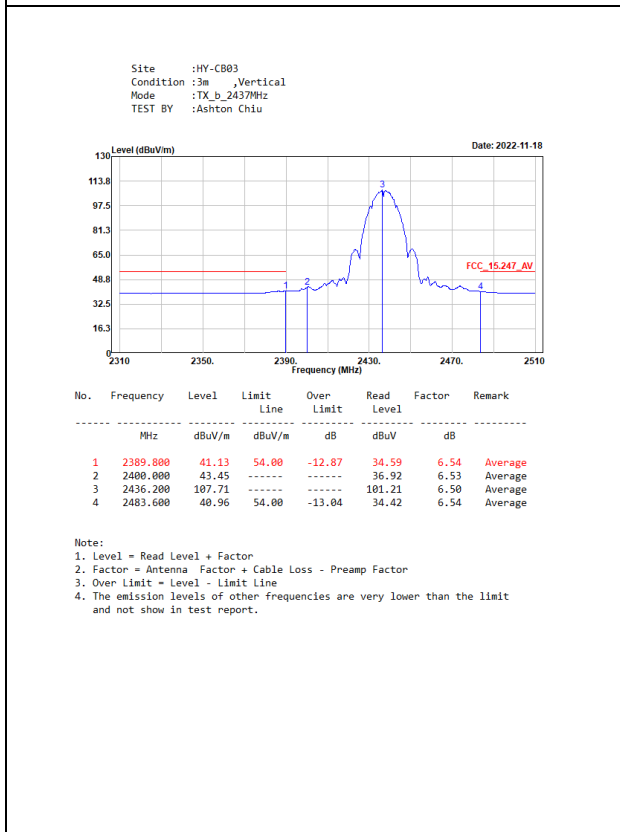
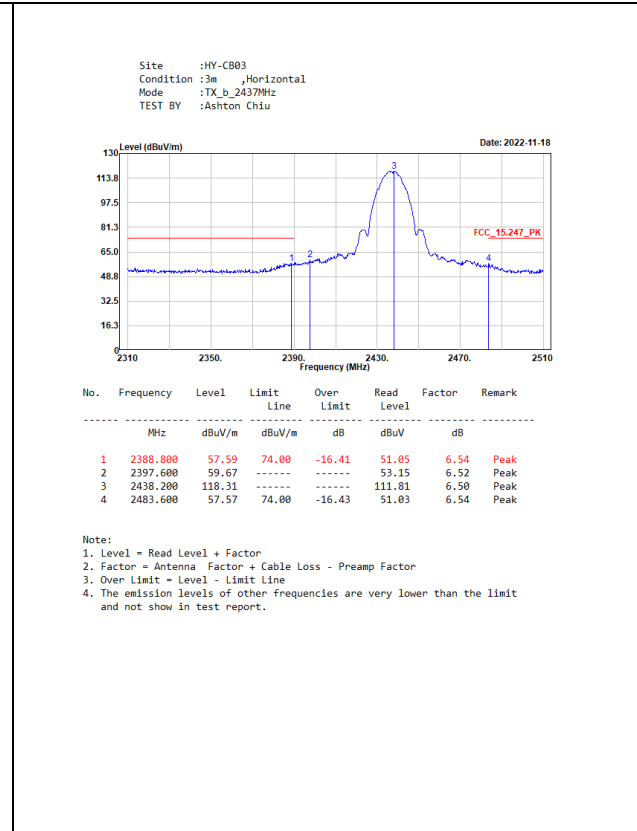
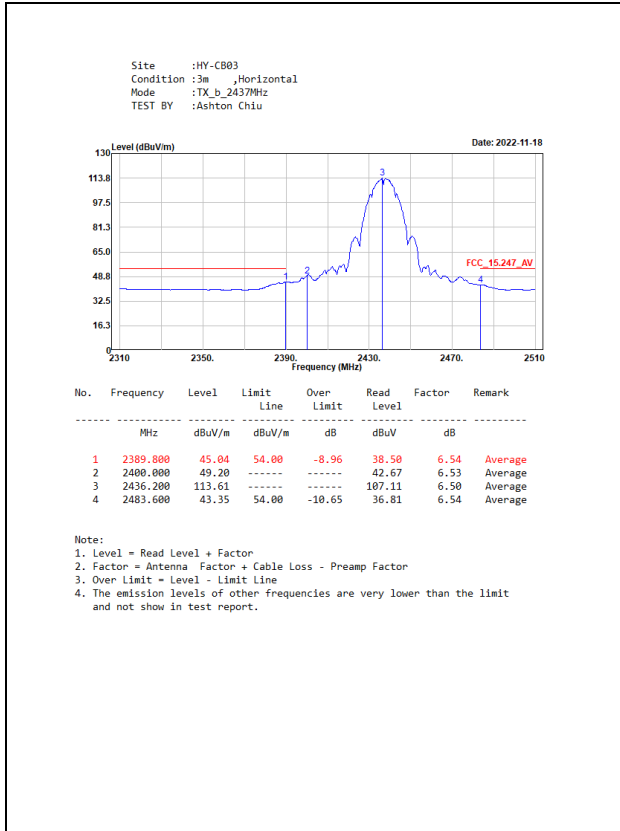


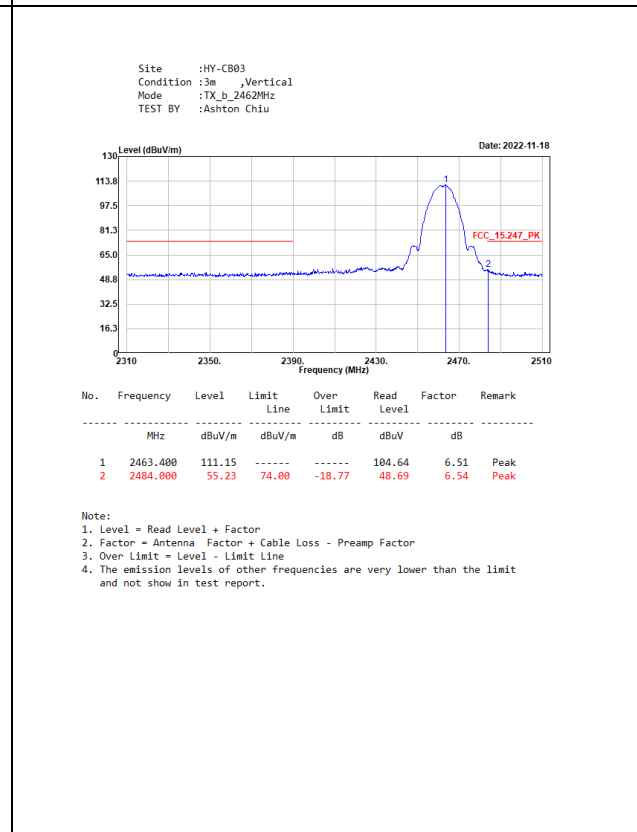
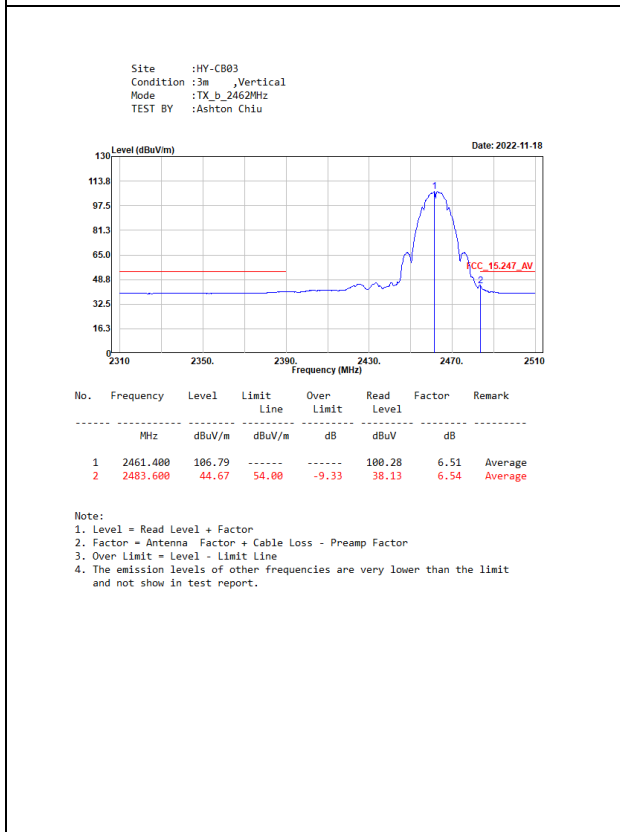
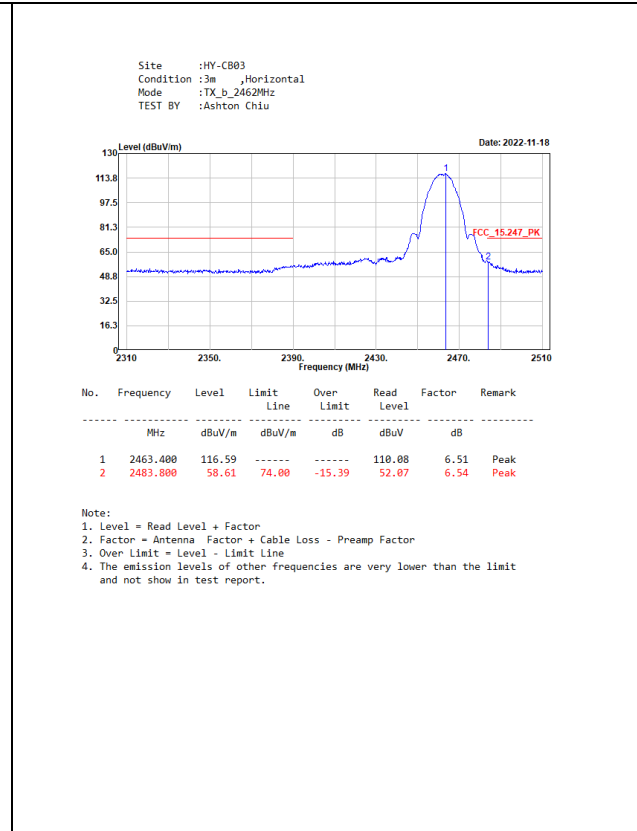
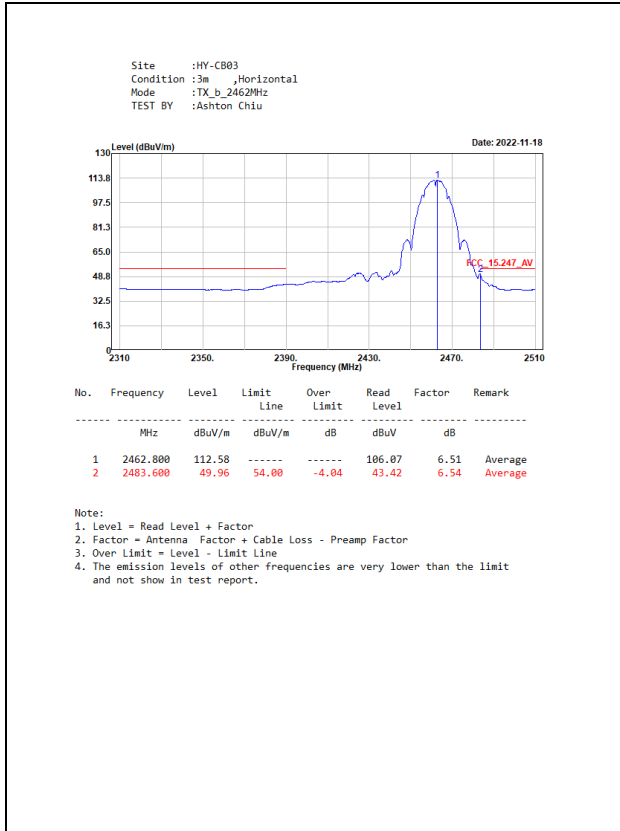


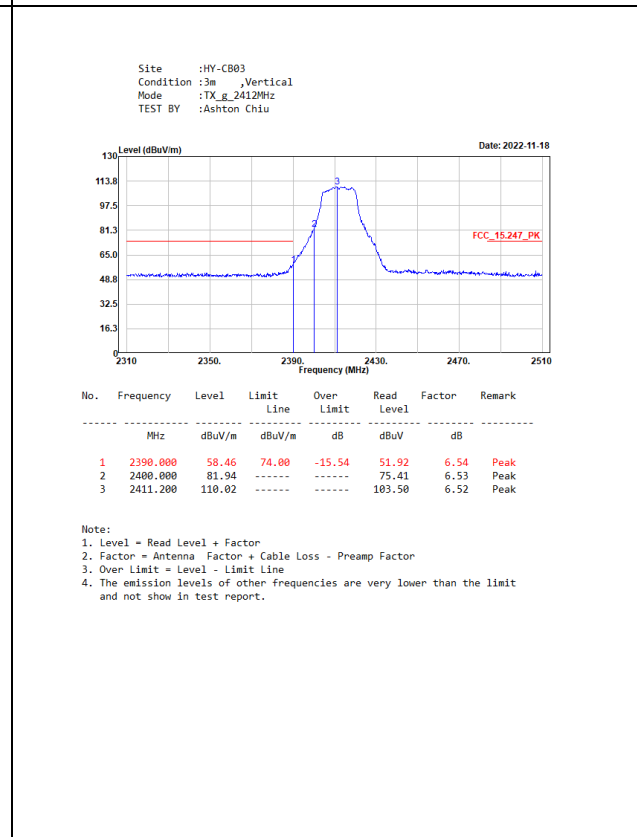
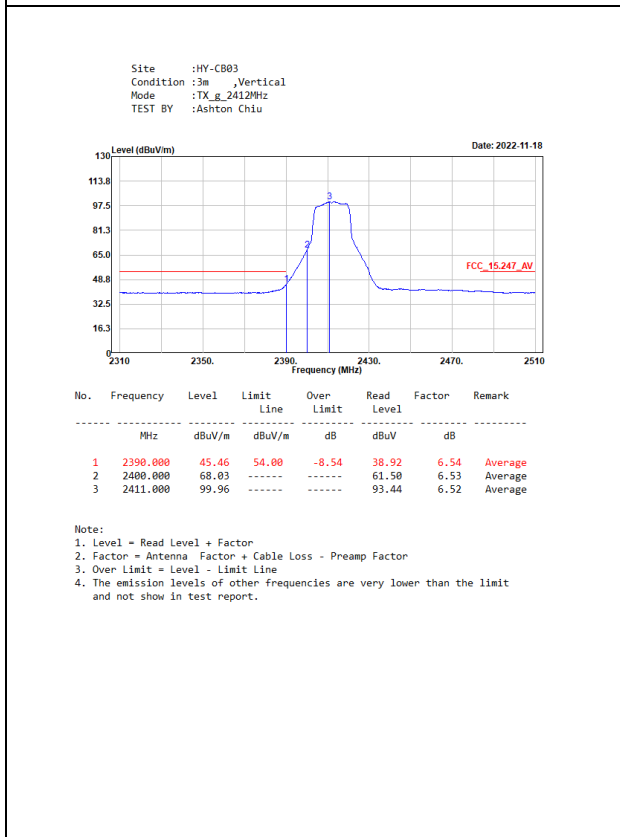
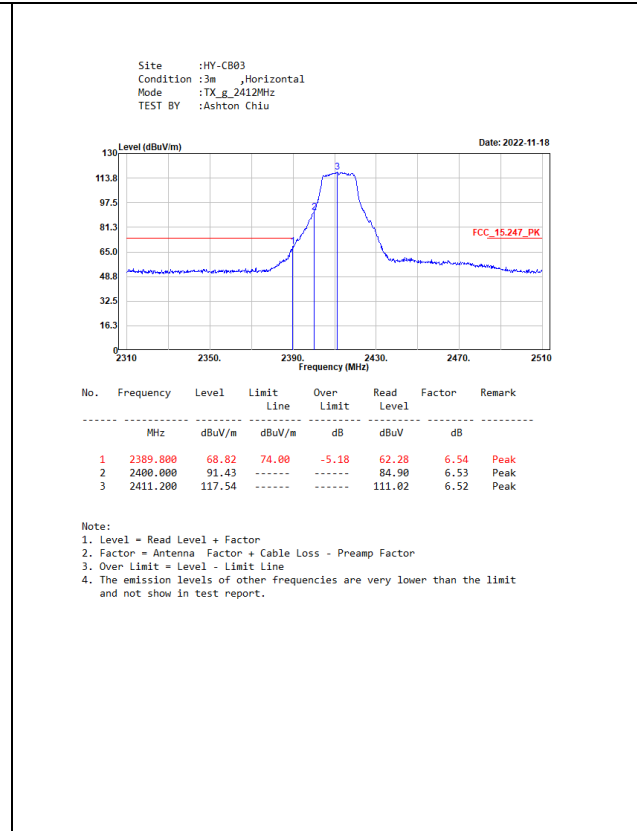
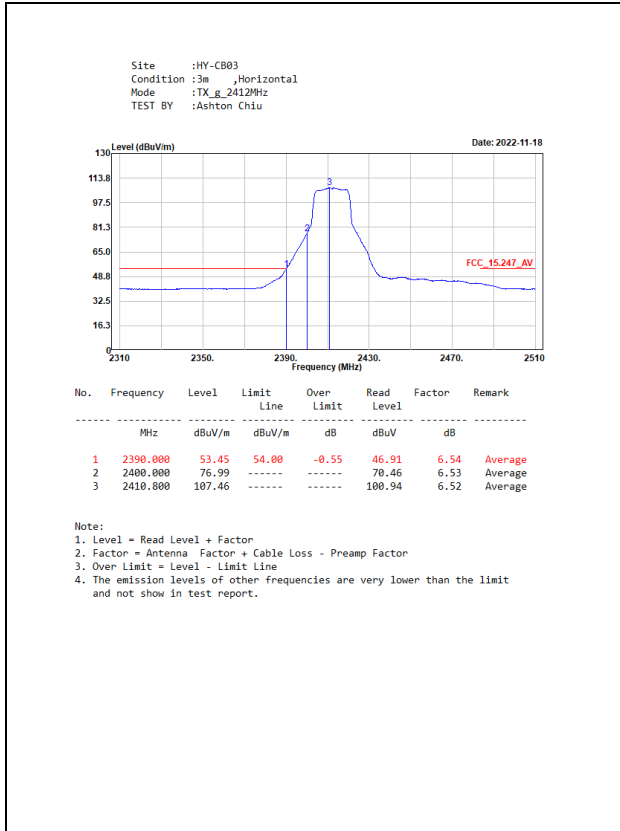


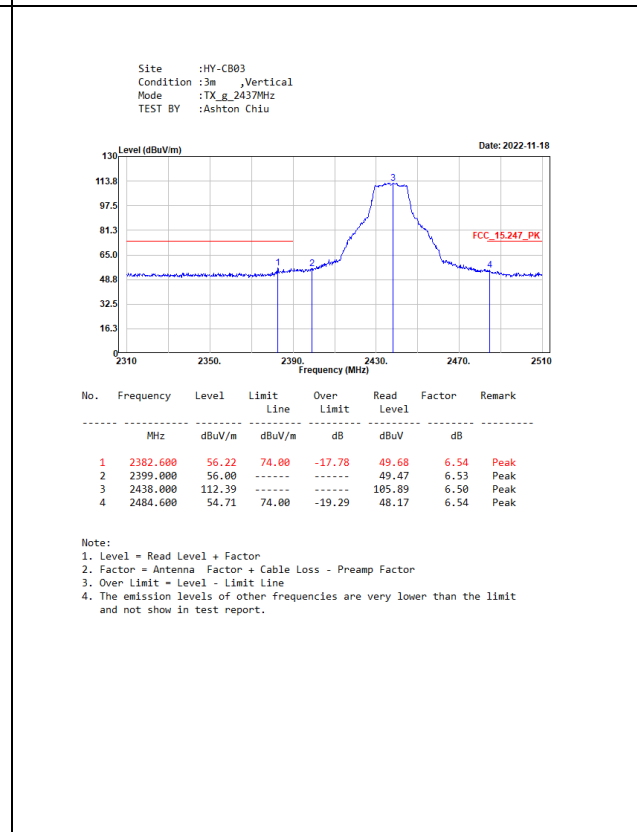
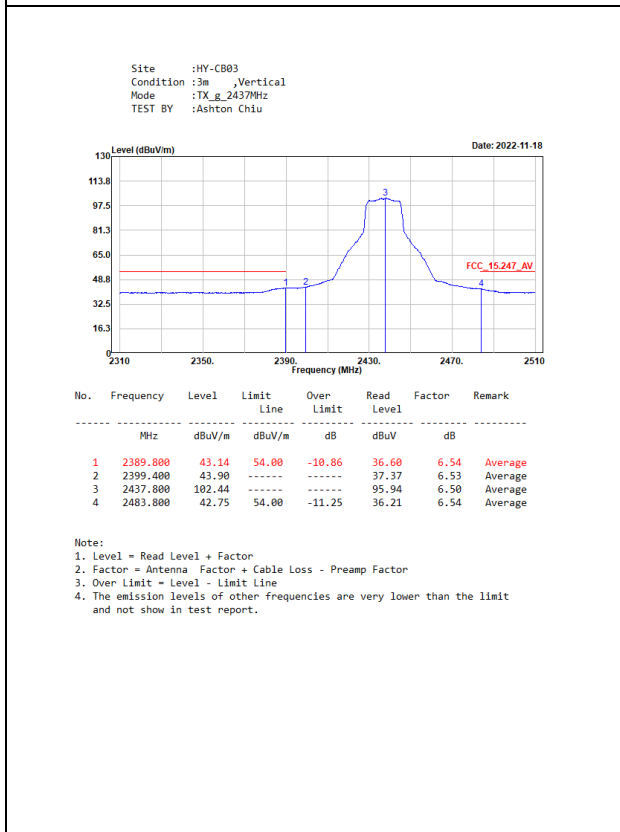
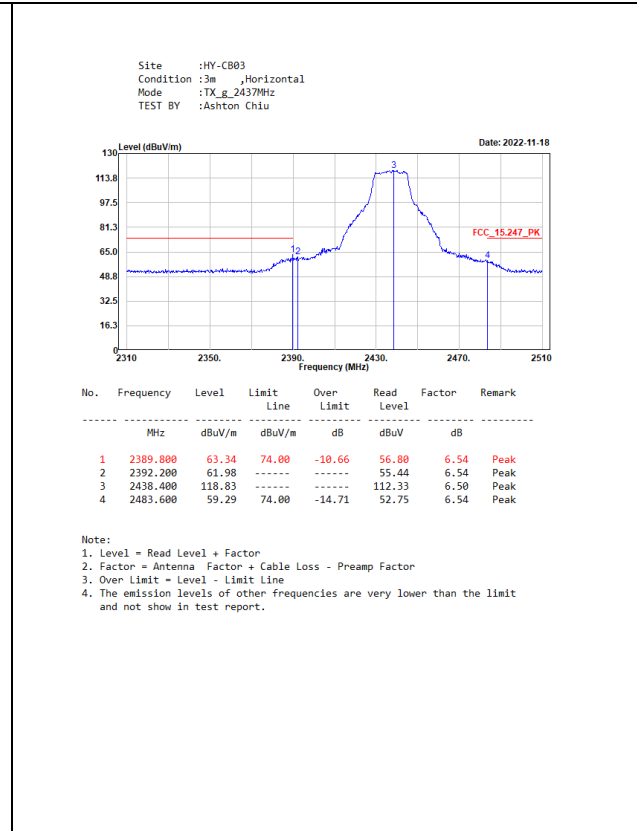
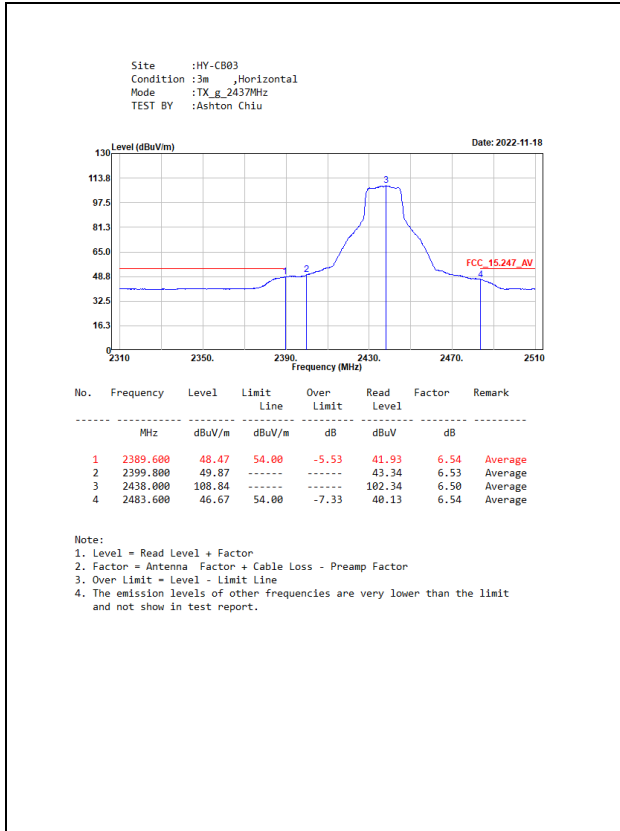


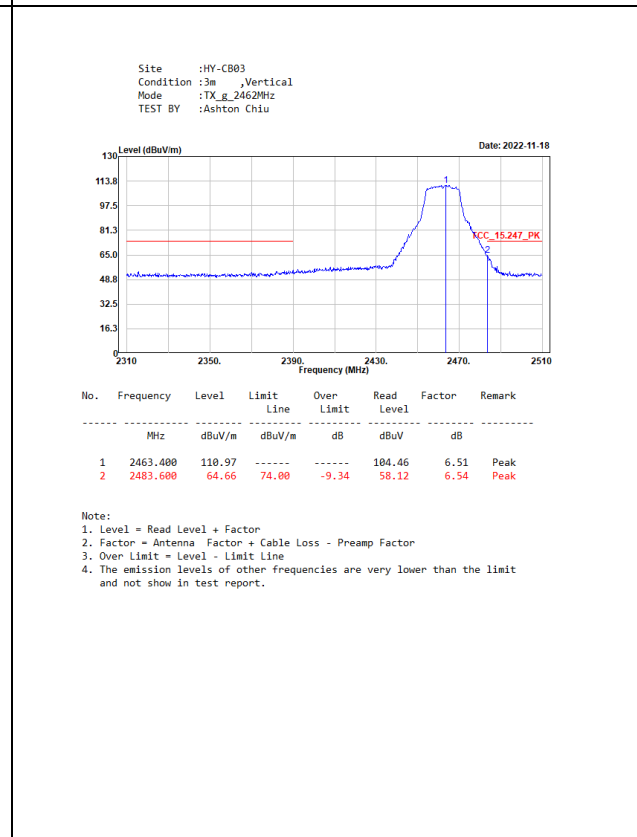
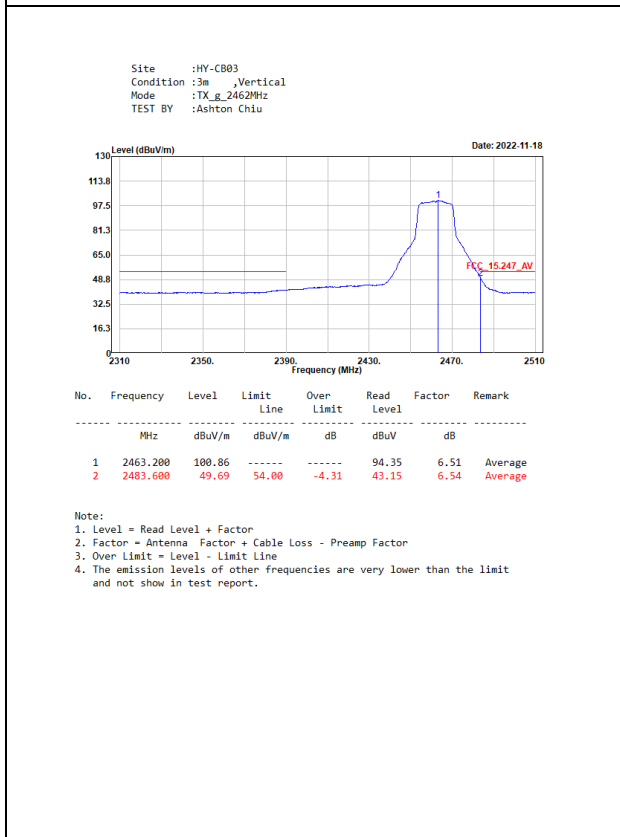
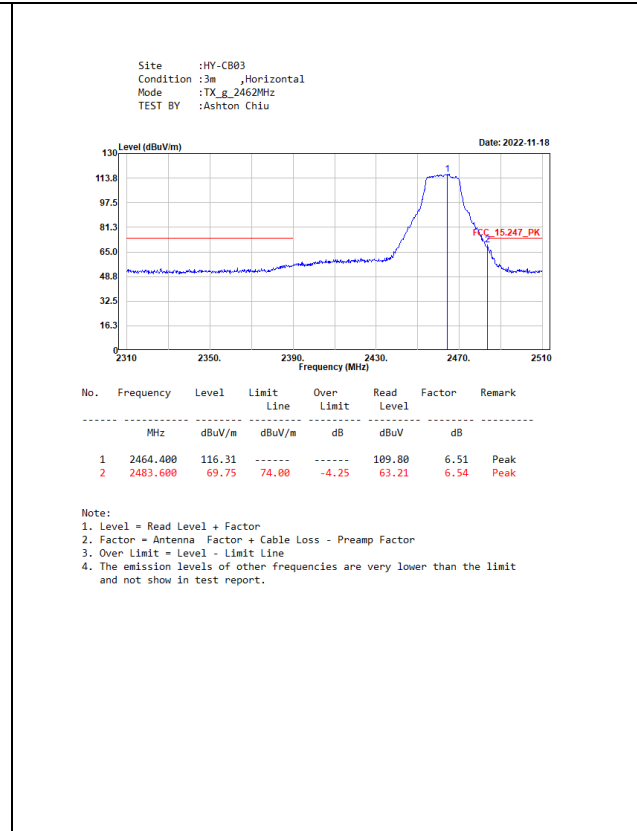
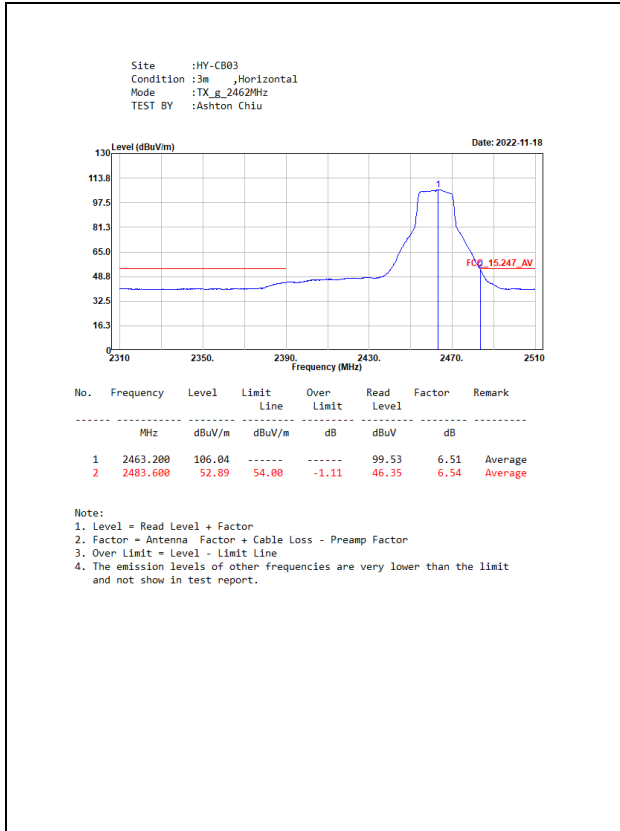


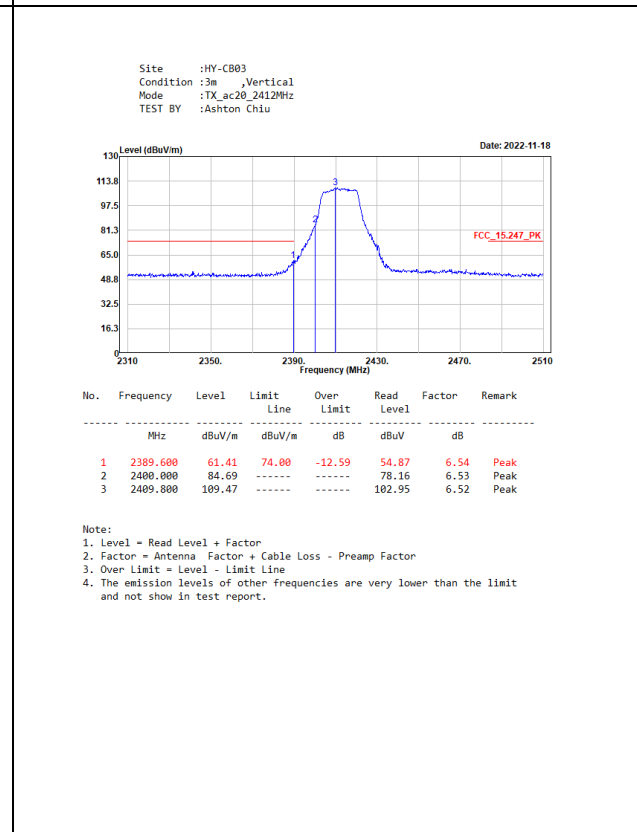
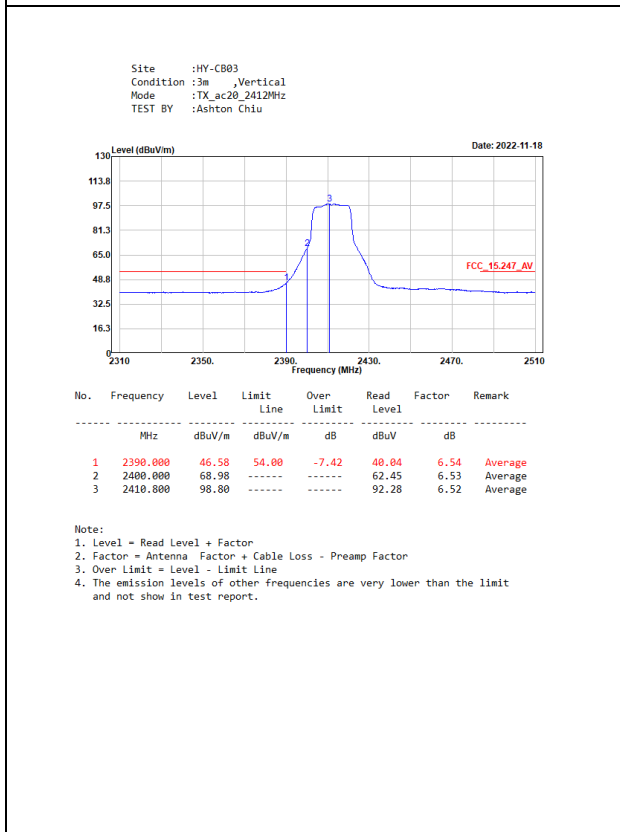
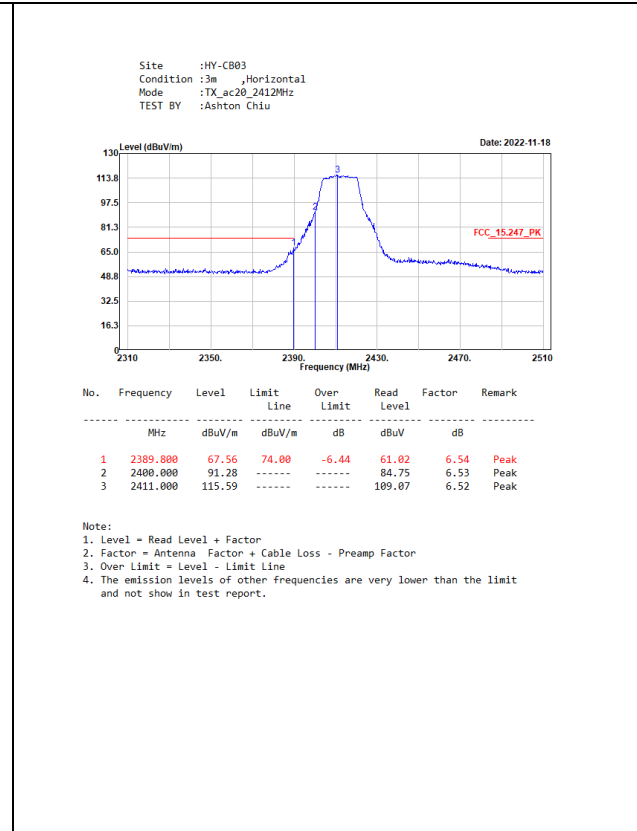
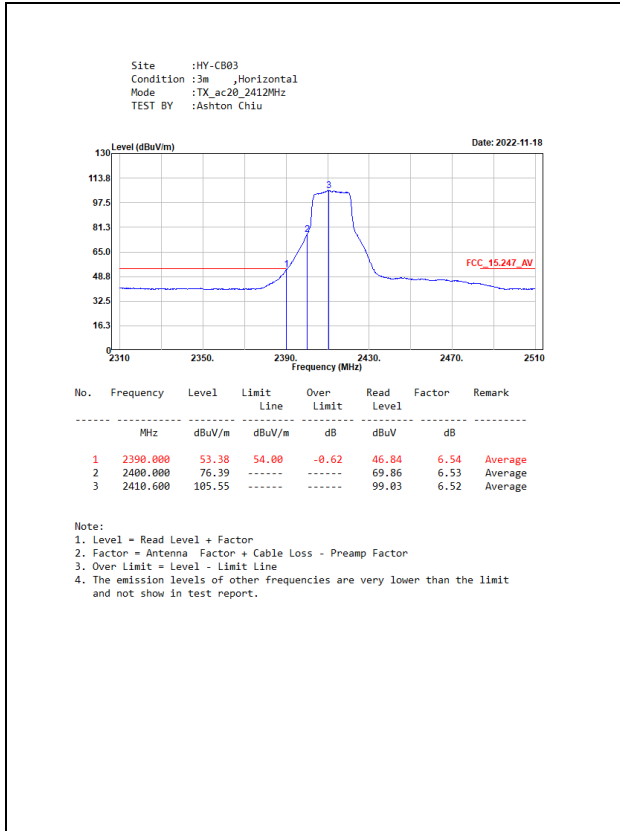


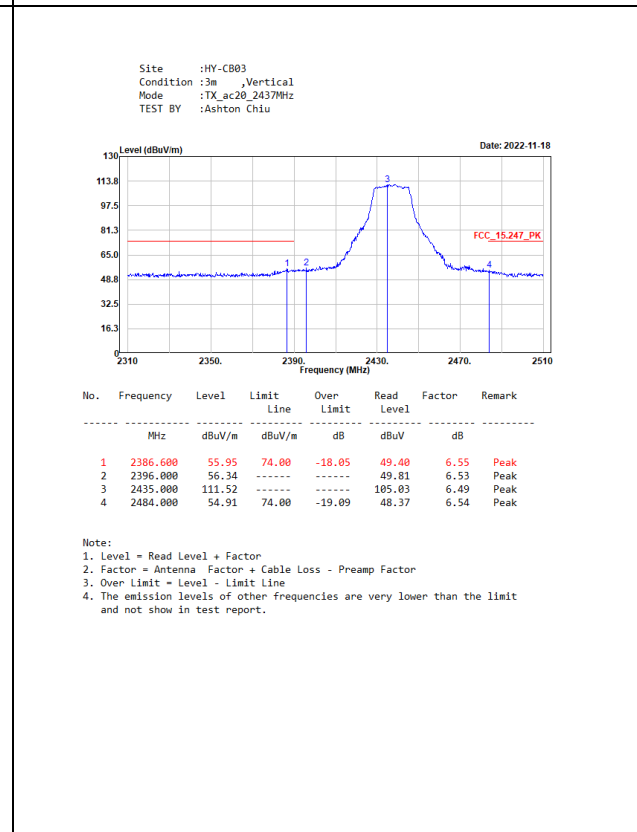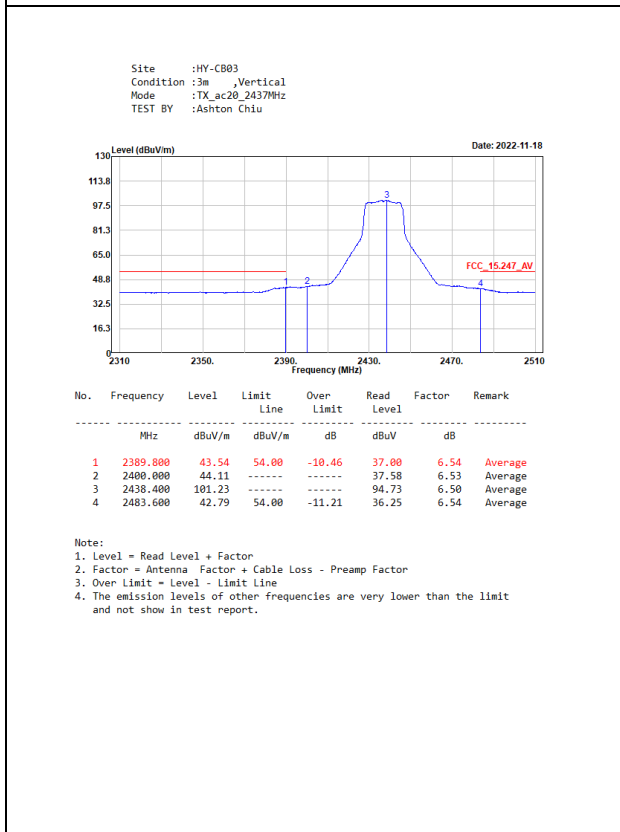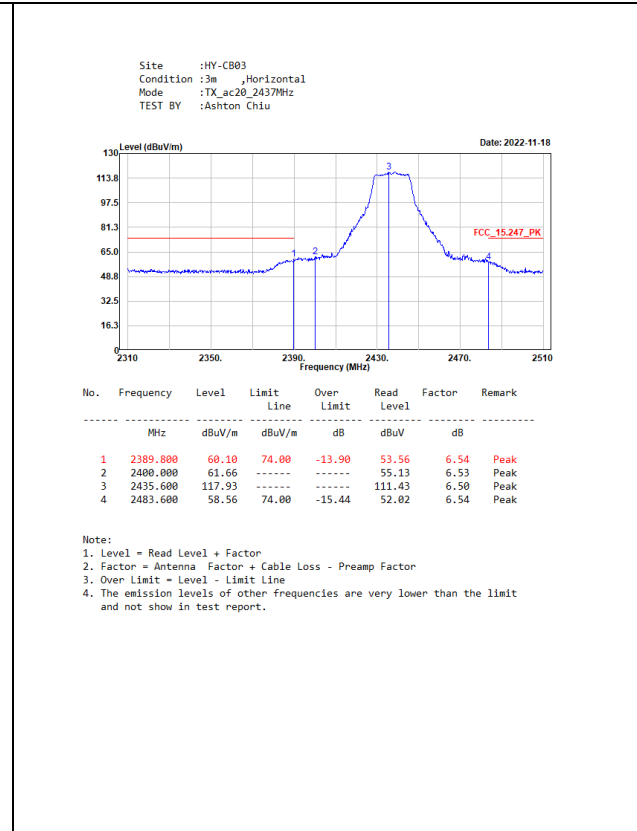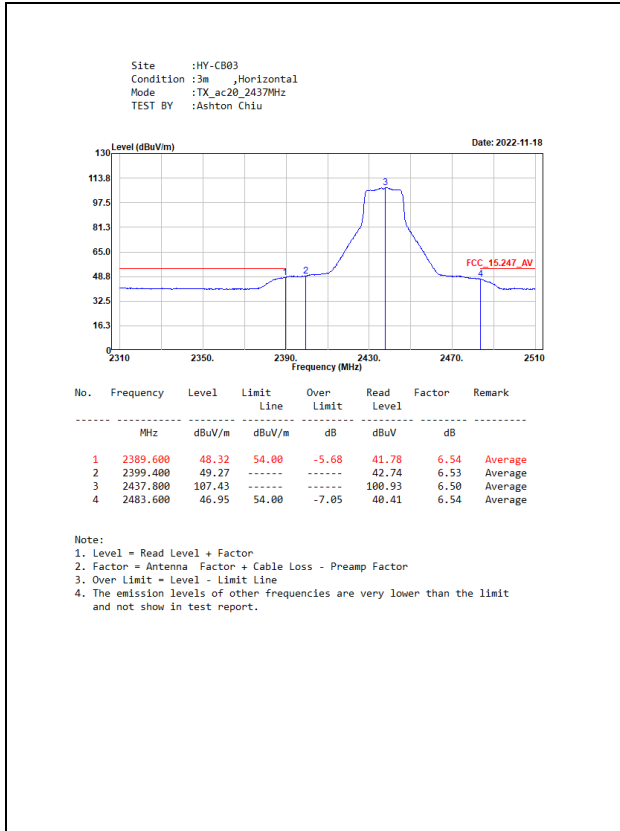

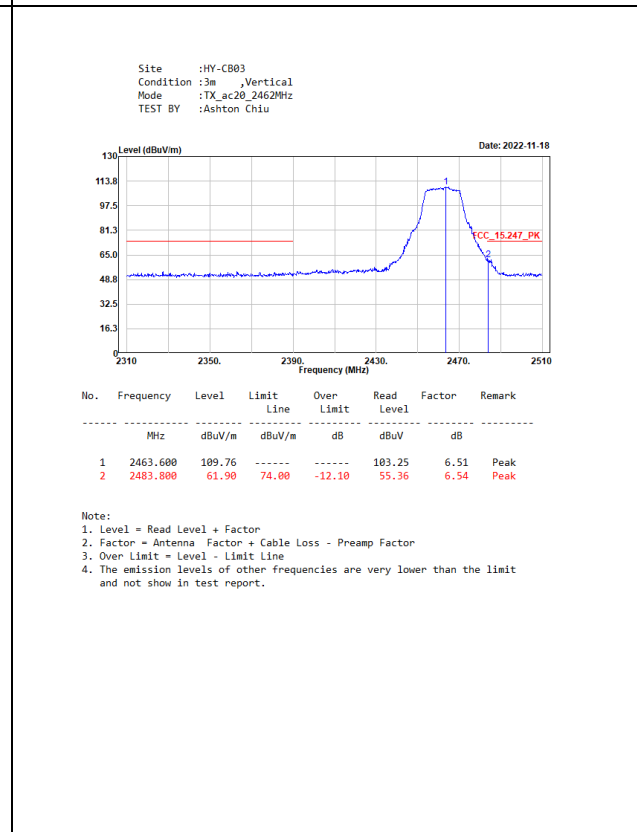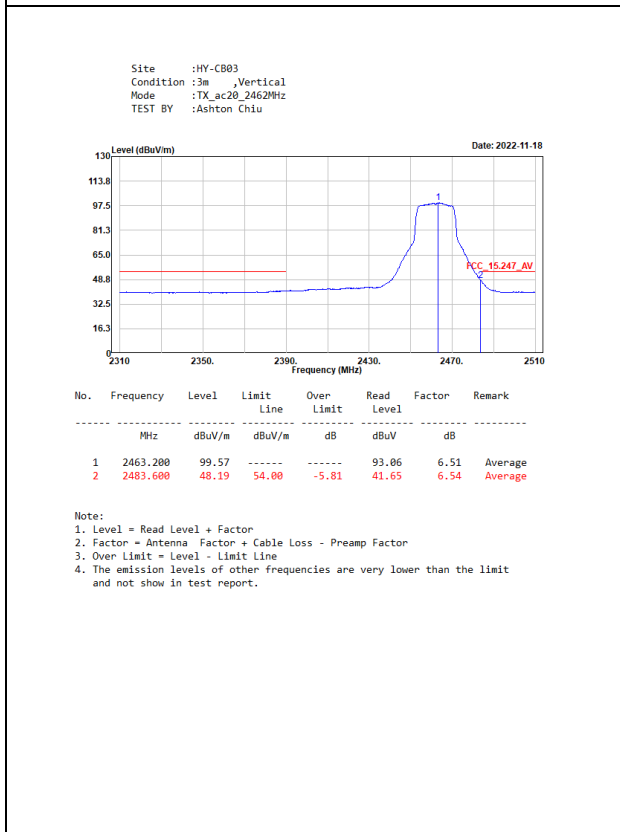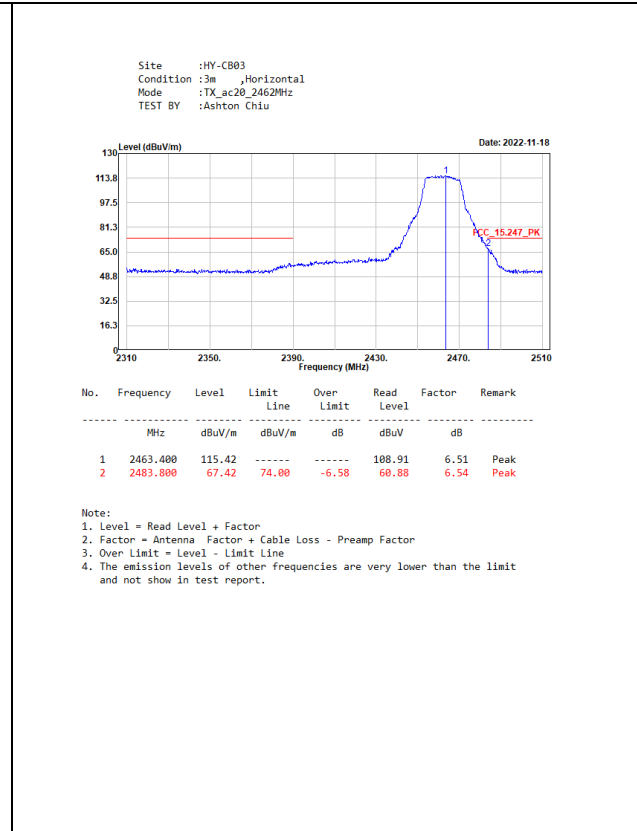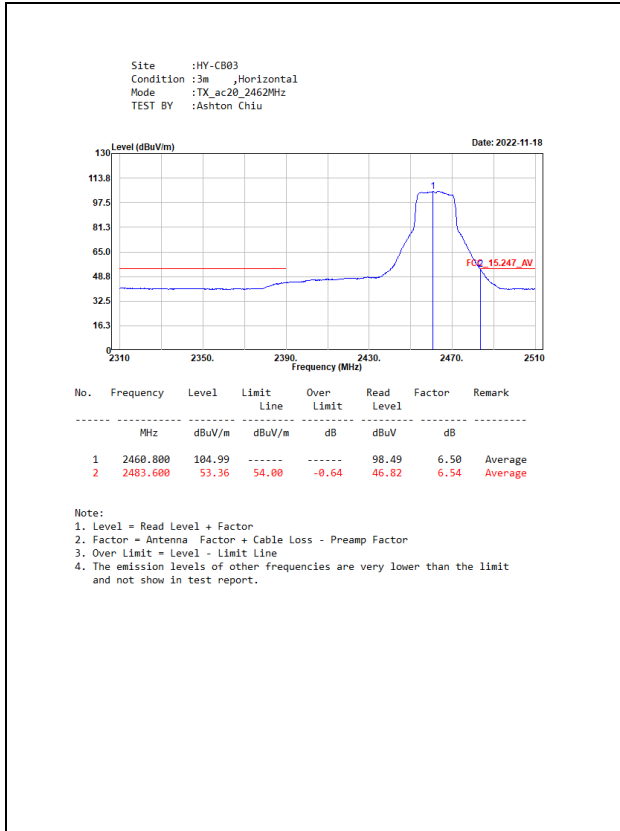

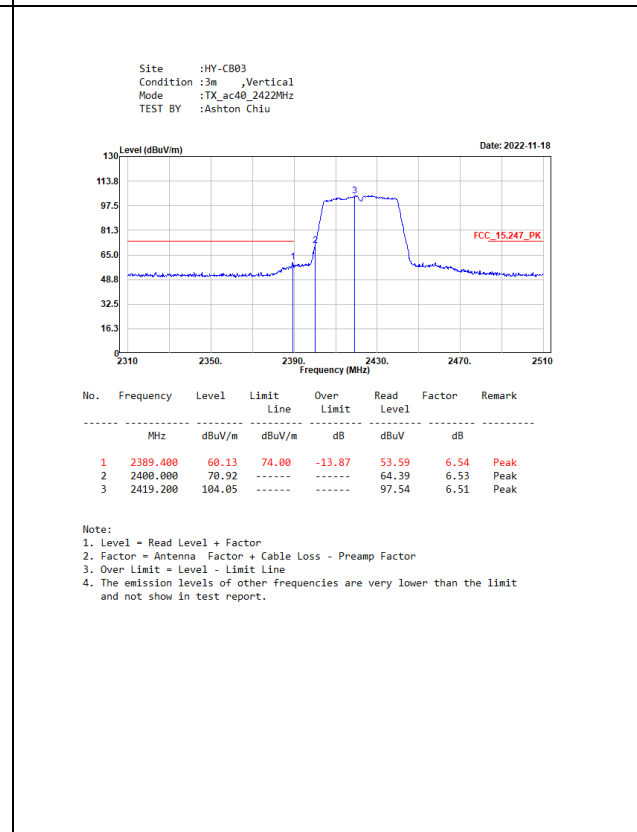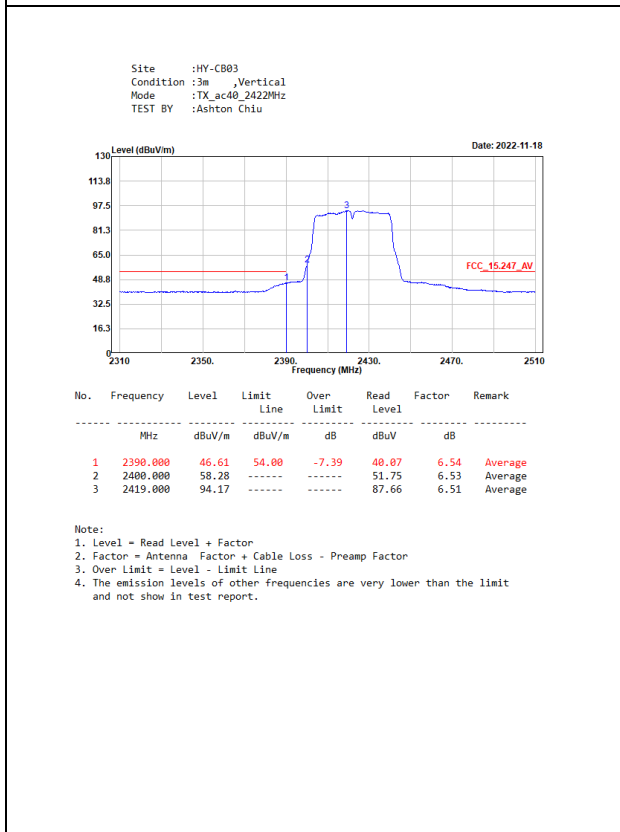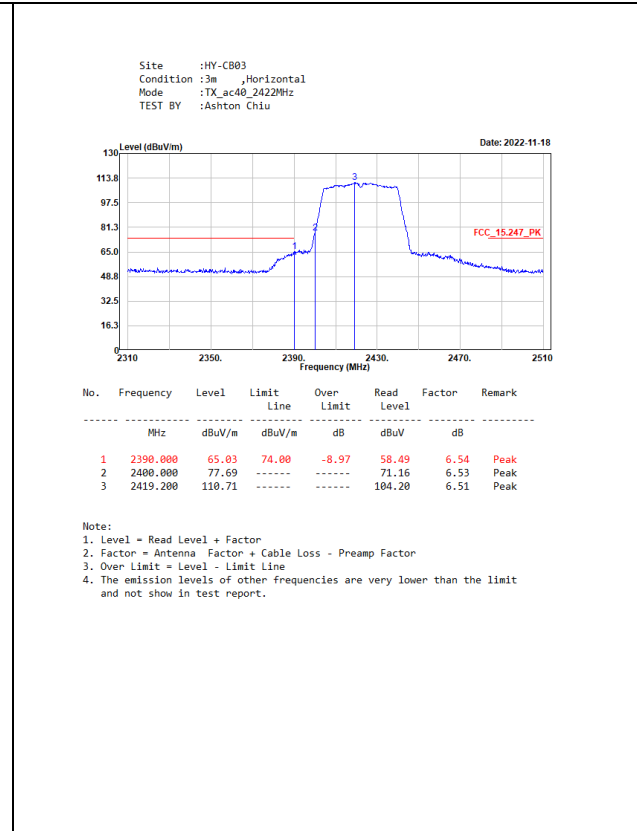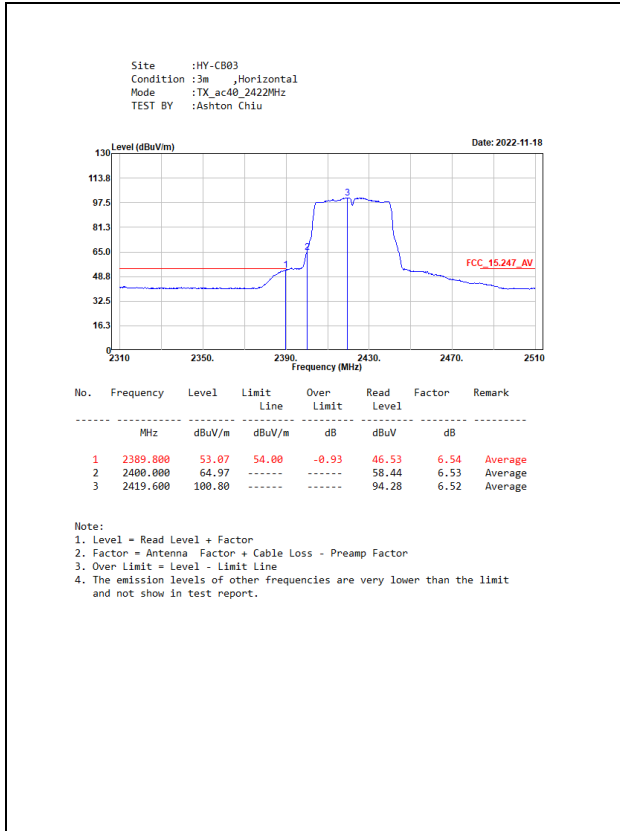


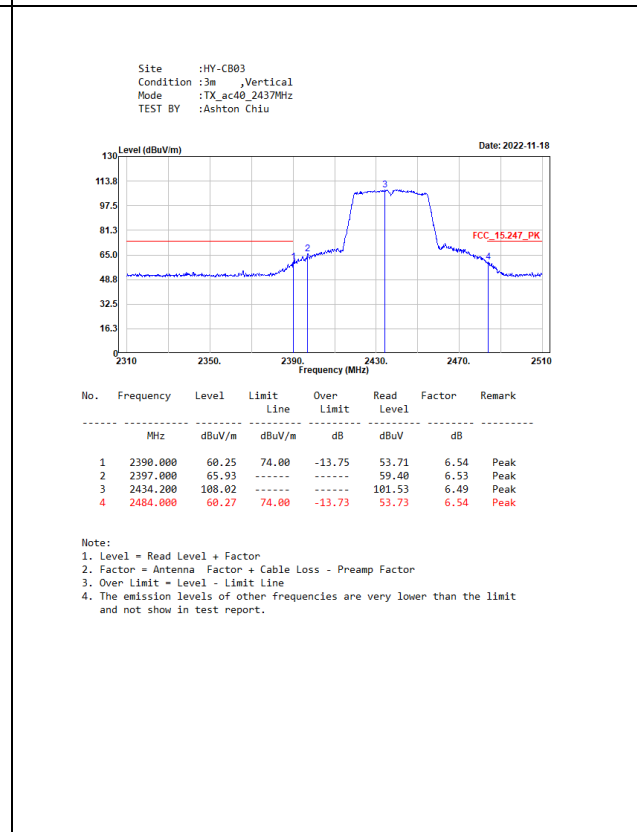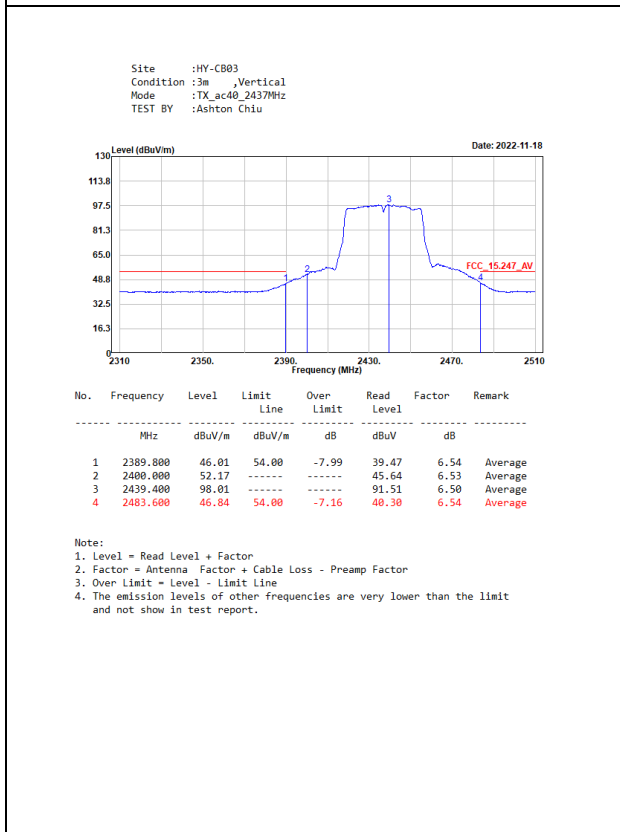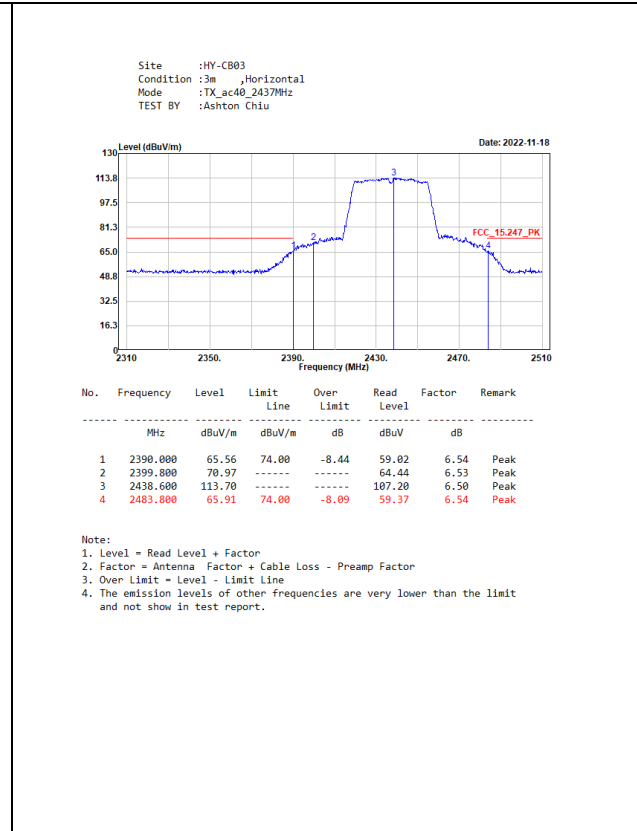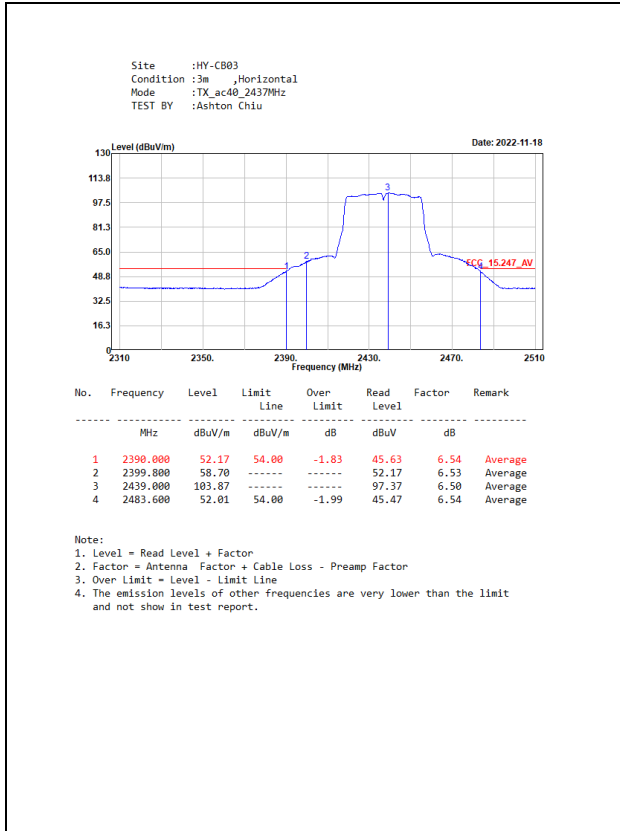

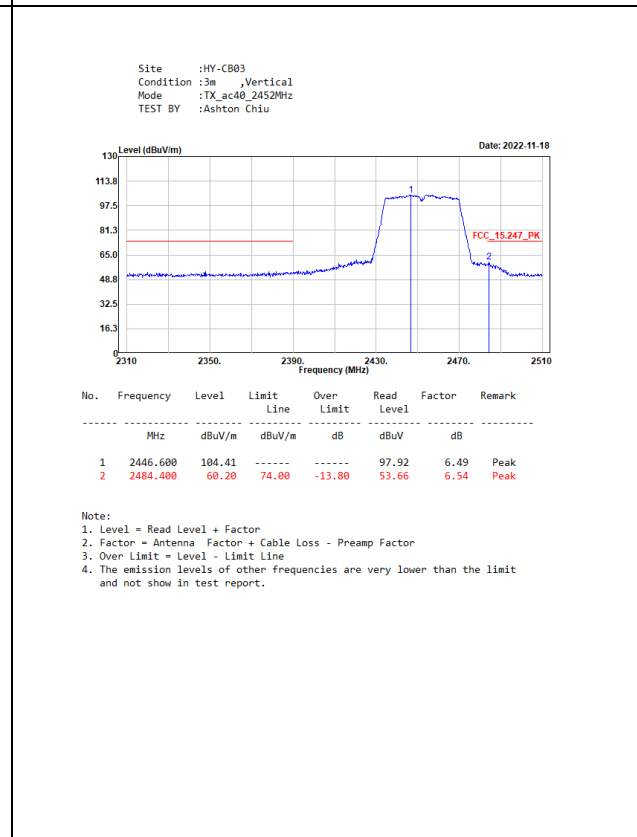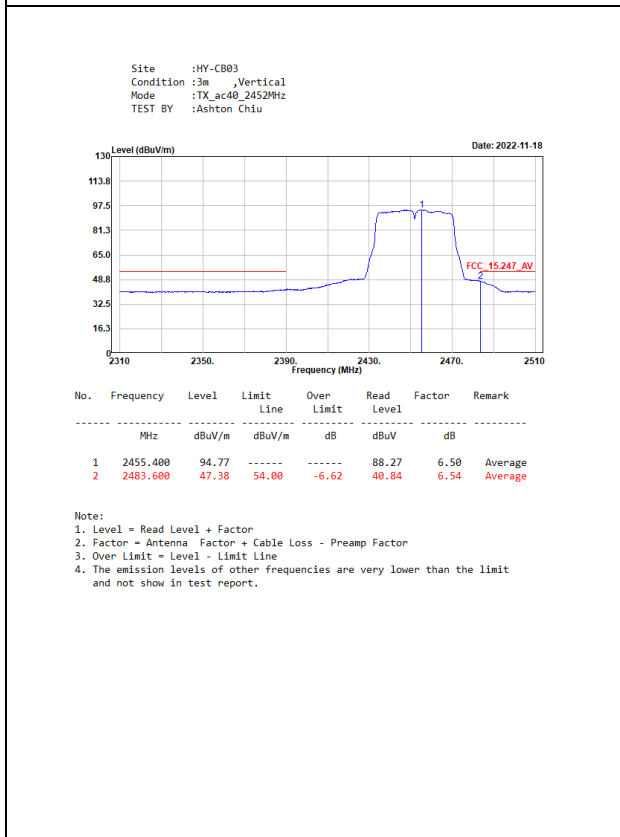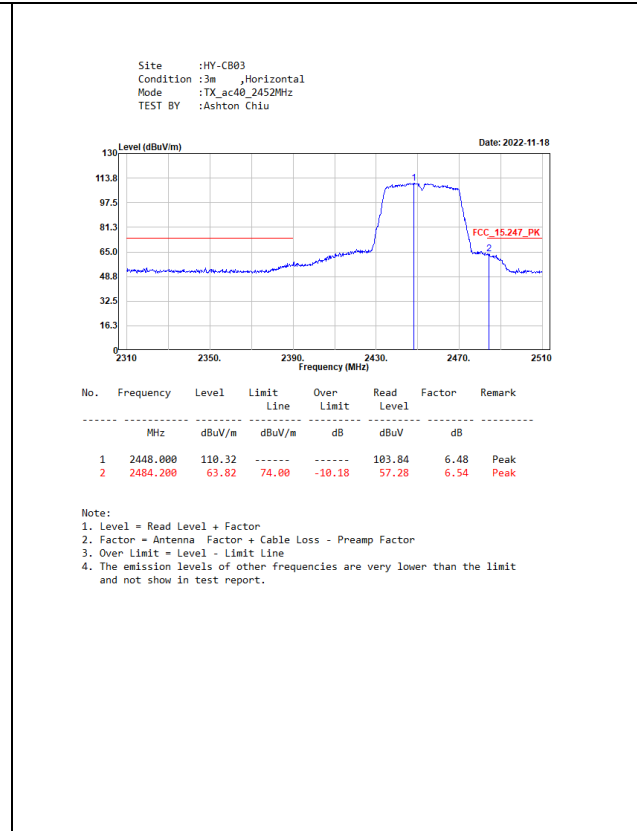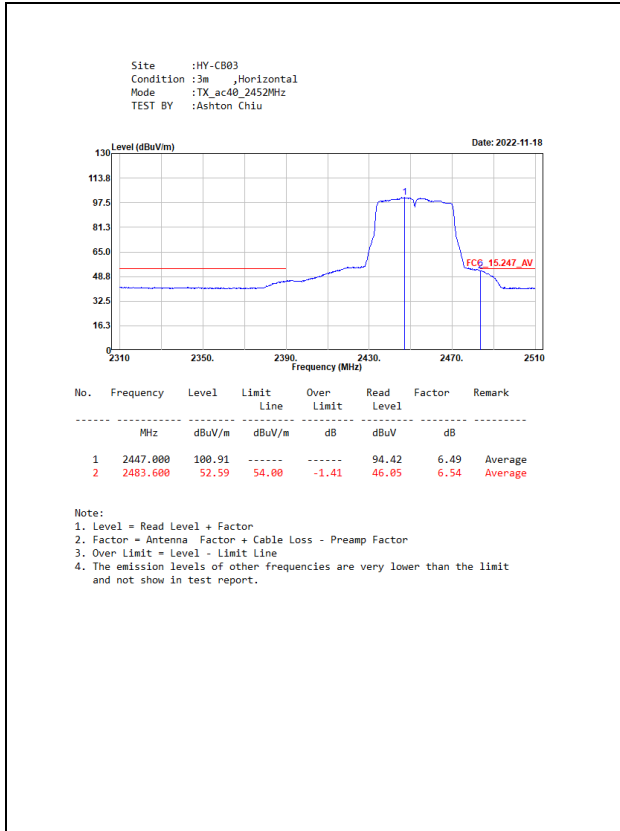

7. 6dB Bandwidth

7.1. Test Setup

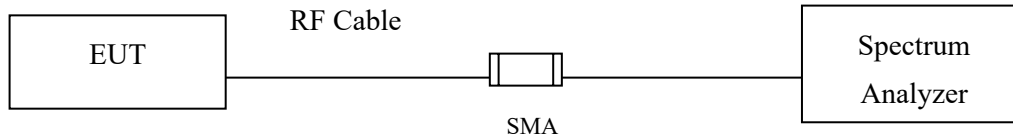

7.2. Limits

The minimum bandwidth shall be at least 500 kHz.

7.3. Test Procedure


The EUT was setup according to ANSI C63.4, 2014; tested according to ANSI C63.10 Section 11.8 for compliance to FCC 47CFR 15.247 requirements.

7.4. Test Result of 6dB Bandwidth

Product : Mobile Computer
 Test Item : 6dB Bandwidth Data
 Test Mode : Transmit (802.11b)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2412	9031	>500	Pass
06	2437	8072	>500	Pass
11	2462	9031	>500	Pass

Figure Channel 01

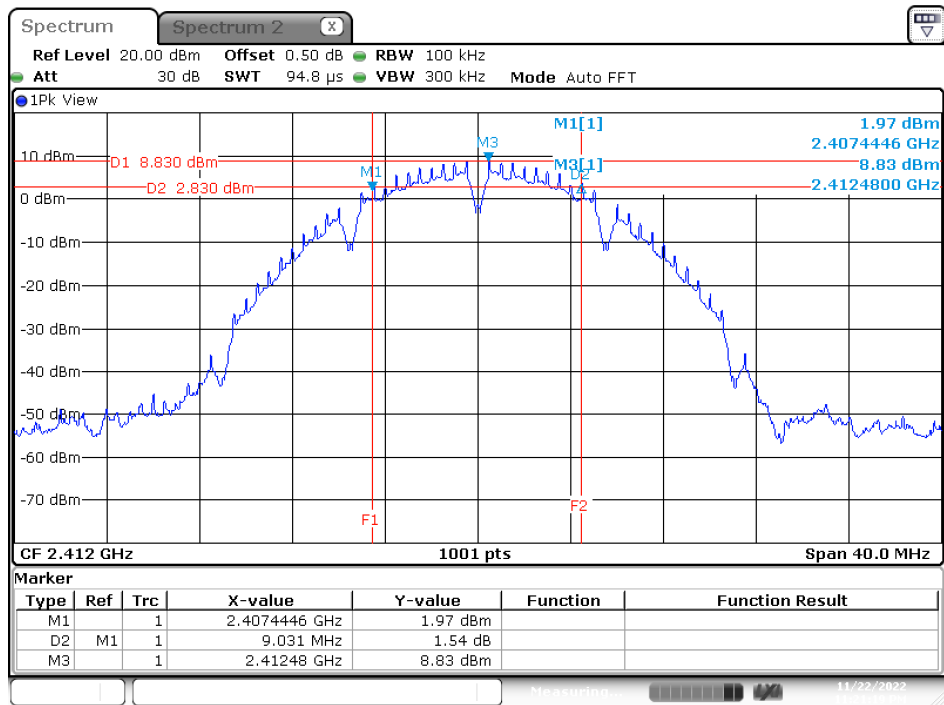


Date: 22.NOV.2022 23:21:19

Product : Mobile Computer
 Test Item : 6dB Bandwidth Data
 Test Mode : Transmit (802.11g)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2412	15784	>500	Pass
06	2437	16304	>500	Pass
11	2462	16344	>500	Pass

Figure Channel 06

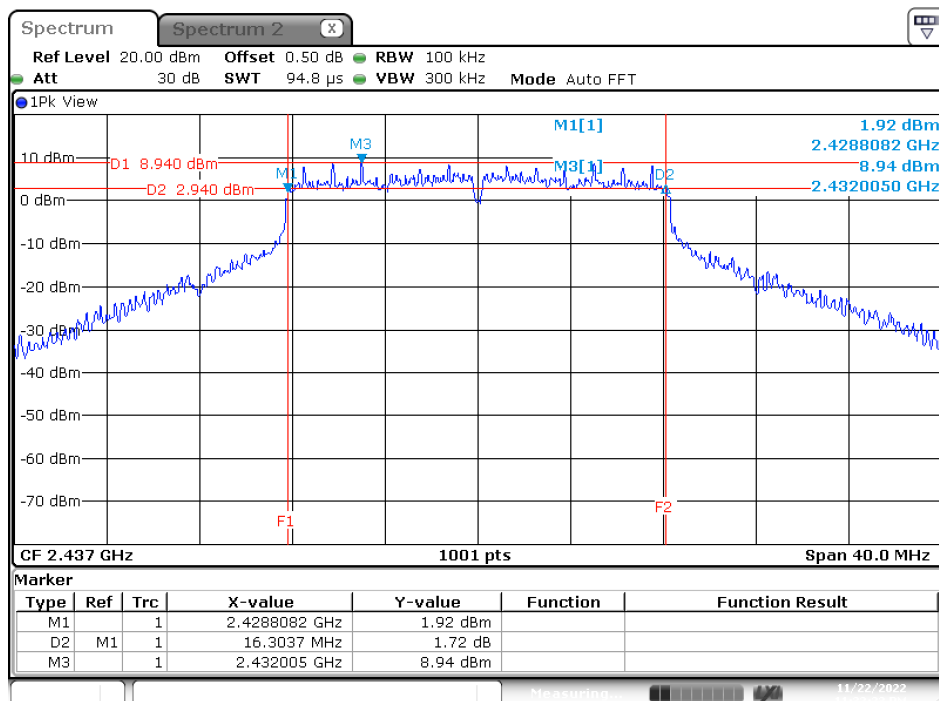


Date: 22.NOV.2022 23:32:23

Product : Mobile Computer
 Test Item : 6dB Bandwidth Data
 Test Mode : Transmit (802.11ac-20 MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2412	16863	>500	Pass
06	2437	16783	>500	Pass
11	2462	16024	>500	Pass

Figure Channel 06

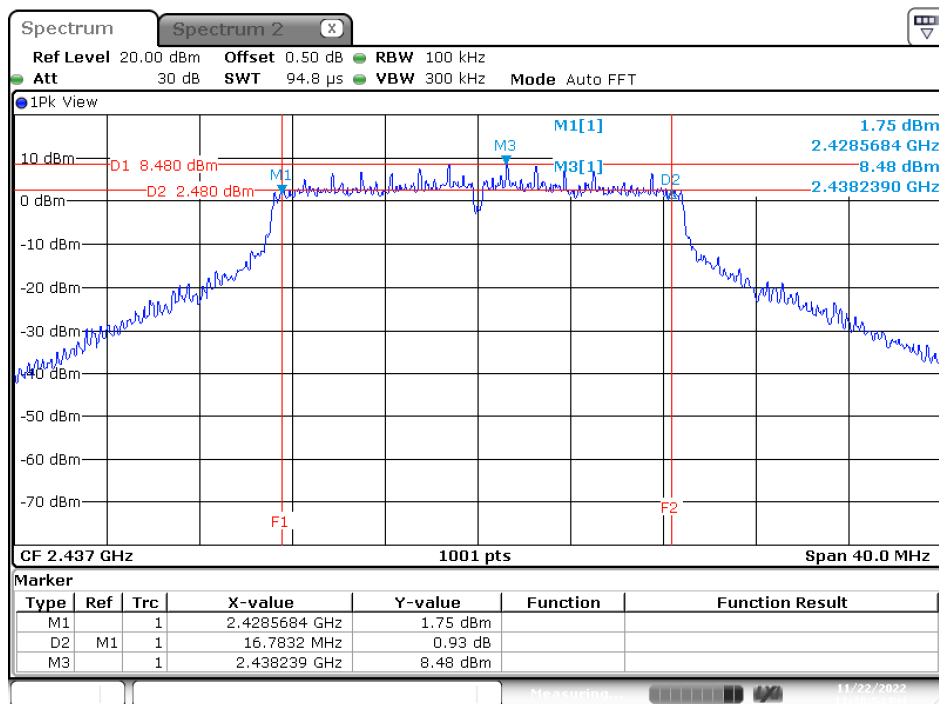


Date: 22.NOV.2022 23:38:55

Product : Mobile Computer
 Test Item : 6dB Bandwidth Data
 Test Mode : Transmit (802.11ac-40 MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
03	2422	35405	>500	Pass
06	2437	35884	>500	Pass
09	2452	35325	>500	Pass


Figure Channel 06

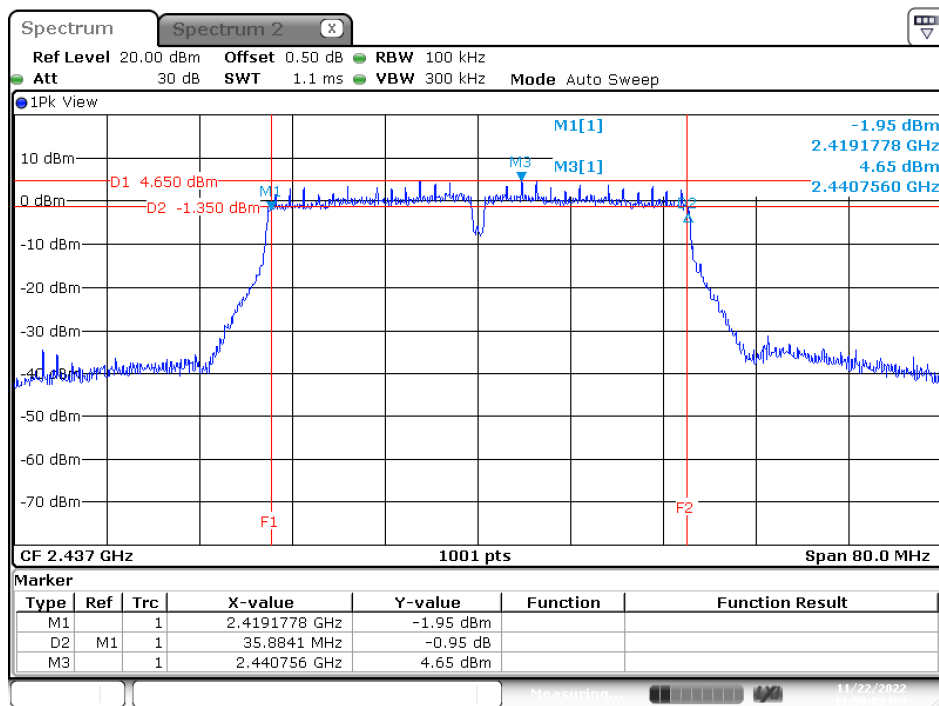

Date: 22.NOV.2022 23:50:04

8. Power Density

8.1. Test Setup

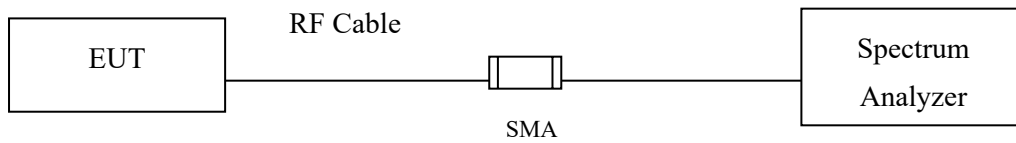

8.2. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3 kHz bandwidth.

8.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013; tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.


The maximum power spectral density using C63.10 Section 11.10.2 Method PKPSD (peak PSD)

8.4. Test Result of Power Density

Product : Mobile Computer
 Test Item : Power Density Data
 Test Mode : Transmit (802.11b)

Channel No.	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
01	2412	-4.350	≤8	Pass
06	2437	-5.320	≤8	Pass
11	2462	-6.200	≤8	Pass

Figure Channel 01

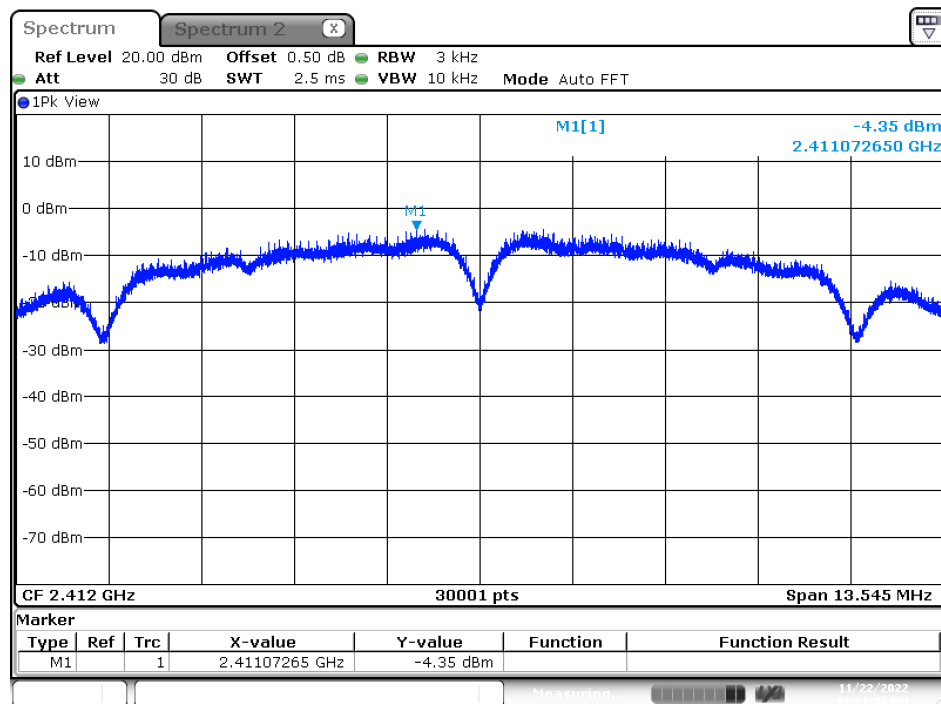


Date: 22.NOV.2022 23:21:38

Product : Mobile Computer
 Test Item : Power Density Data
 Test Mode : Transmit (802.11g)

Channel No.	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
01	2412	-5.320	≤ 8	Pass
06	2437	-3.550	≤ 8	Pass
11	2462	-5.210	≤ 8	Pass

Figure Channel 06

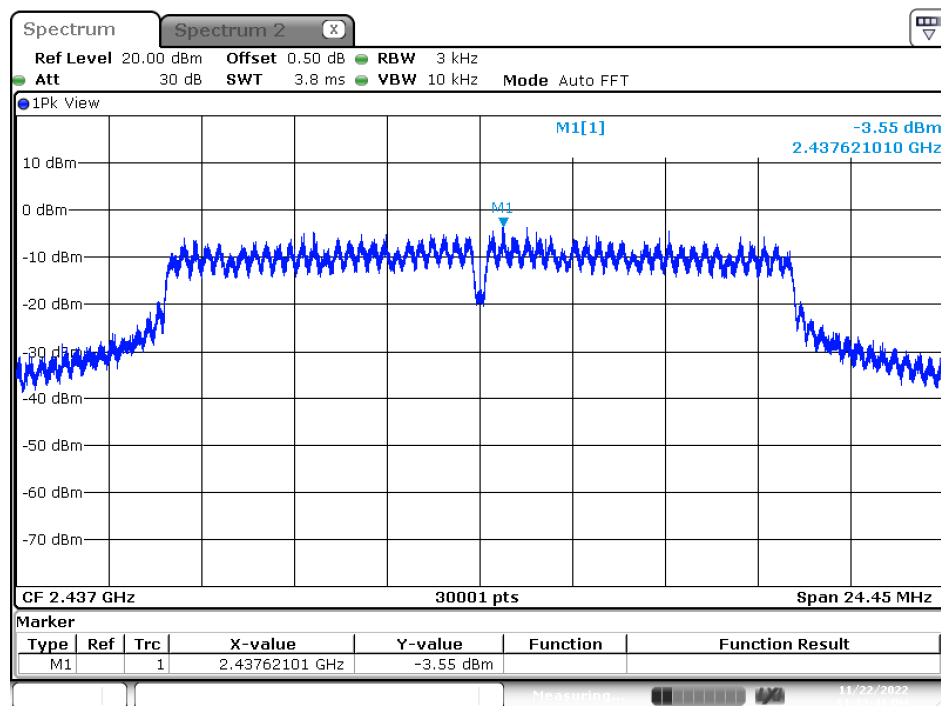


Date: 22.NOV.2022 23:32:41

Product : Mobile Computer
 Test Item : Power Density Data
 Test Mode : Transmit (802.11ac-20 MHz)

Channel No.	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
01	2412	-7.130	≤ 8	Pass
06	2437	-5.760	≤ 8	Pass
11	2462	-6.350	≤ 8	Pass

Figure Channel 06

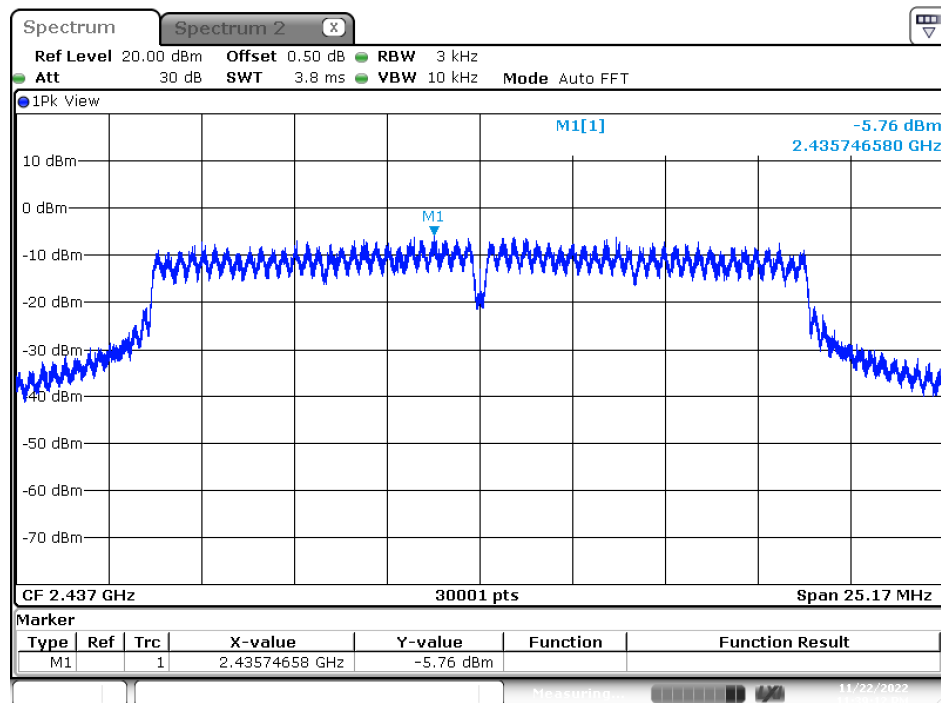


Date: 22.NOV.2022 23:39:13

Product : Mobile Computer
 Test Item : Power Density Data
 Test Mode : Transmit (802.11ac-40 MHz)

Channel No.	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
03	2422	-12.920	≤ 8	Pass
06	2437	-9.350	≤ 8	Pass
09	2452	-12.820	≤ 8	Pass


Figure Channel 06

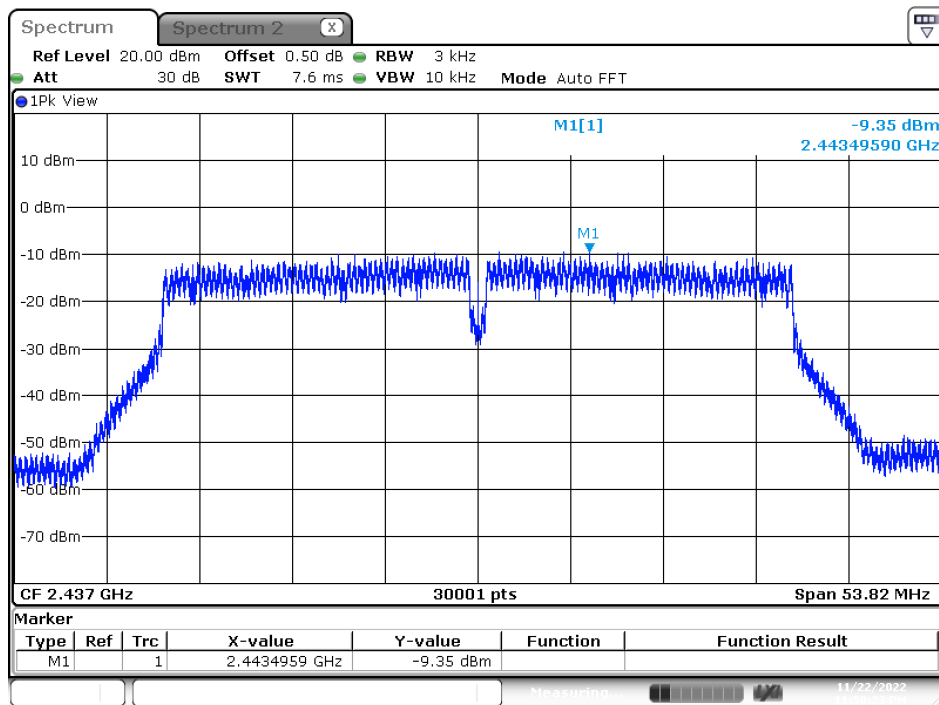

Date: 22.NOV.2022 23:50:23

9. Duty Cycle

9.1. Test Setup

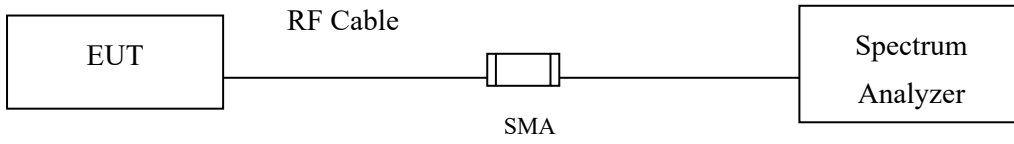

9.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to ANSI C63.10 2013 for compliance to FCC 47CFR 15.247 requirements.

9.3. Test Result of Duty Cycle

Product : Mobile Computer
Test Item : Duty Cycle
Test Mode : Transmit

Duty Cycle Formula:


Duty Cycle = $Ton / (Ton + Toff)$

Duty Factor = $10 \text{ Log } (1/\text{Duty Cycle})$

Results:


2.4 GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11 b	12.1600	12.2800	99.02	0.04
802.11 g	2.0280	2.0735	97.81	0.10
802.11 ac20	1.8915	1.9370	97.65	0.10
802.11 ac40	0.9295	0.9880	94.08	0.27

802.11b

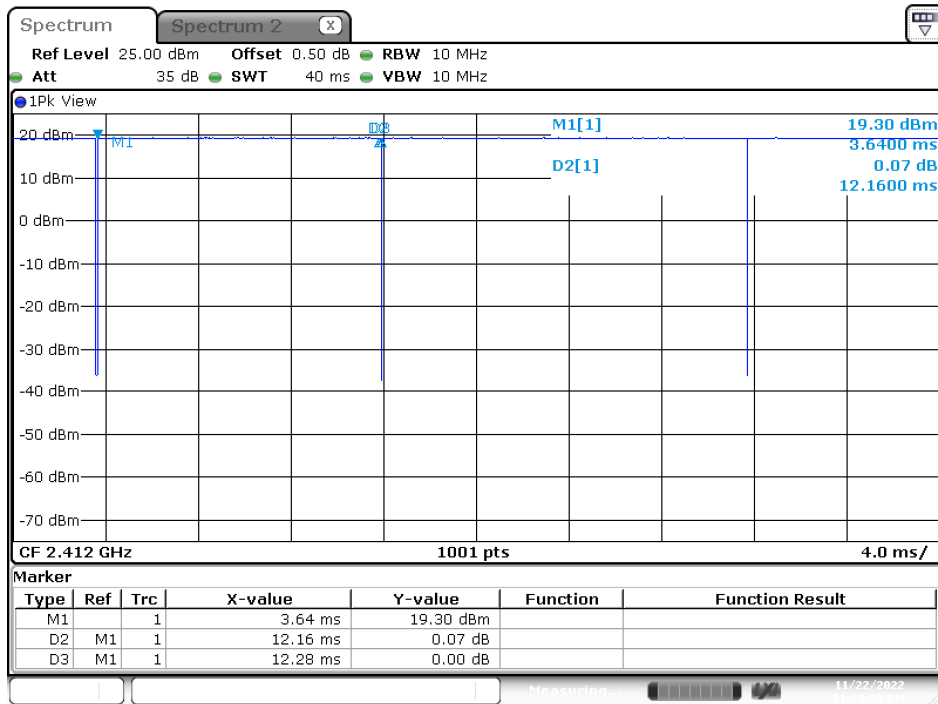


Date: 22.NOV.2022 23:20:54

802.11g

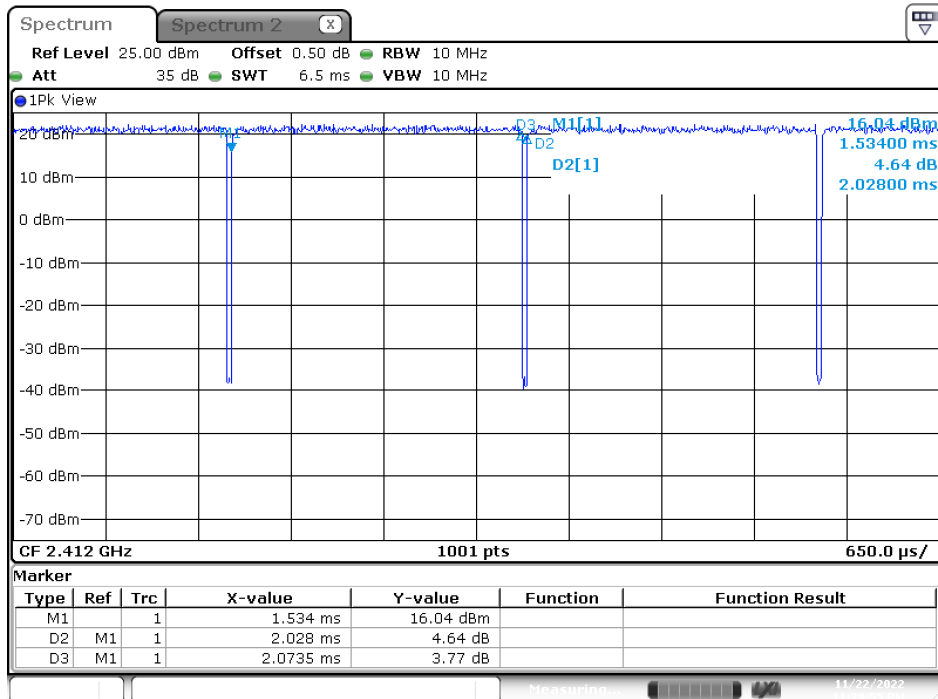


Date: 22.NOV.2022 23:29:55

802.11ac20

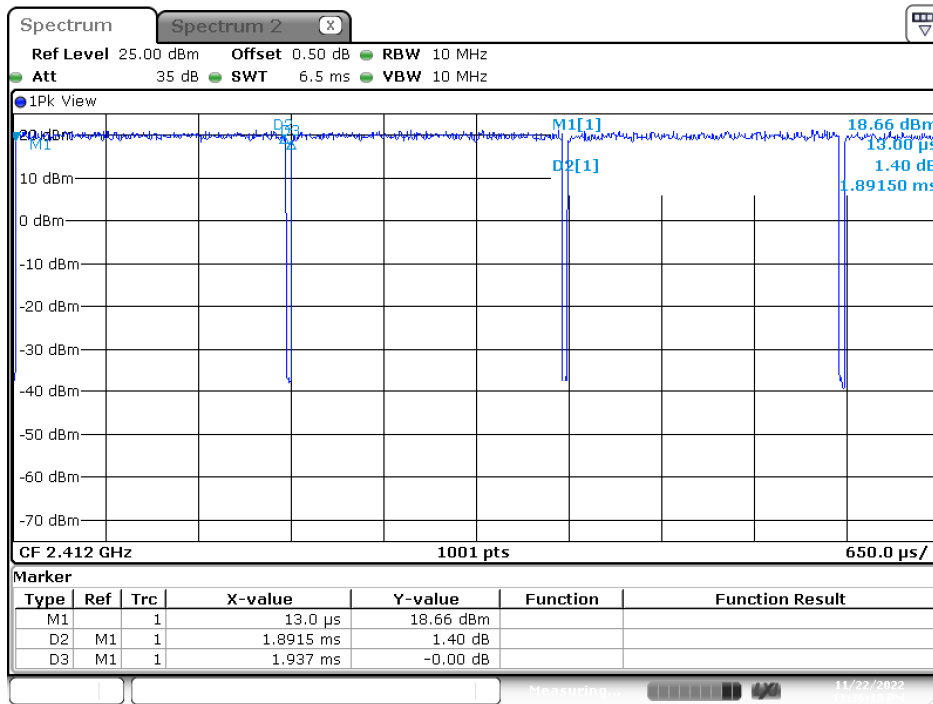

Date: 22.NOV.2022 23:36:13

802.11ac40

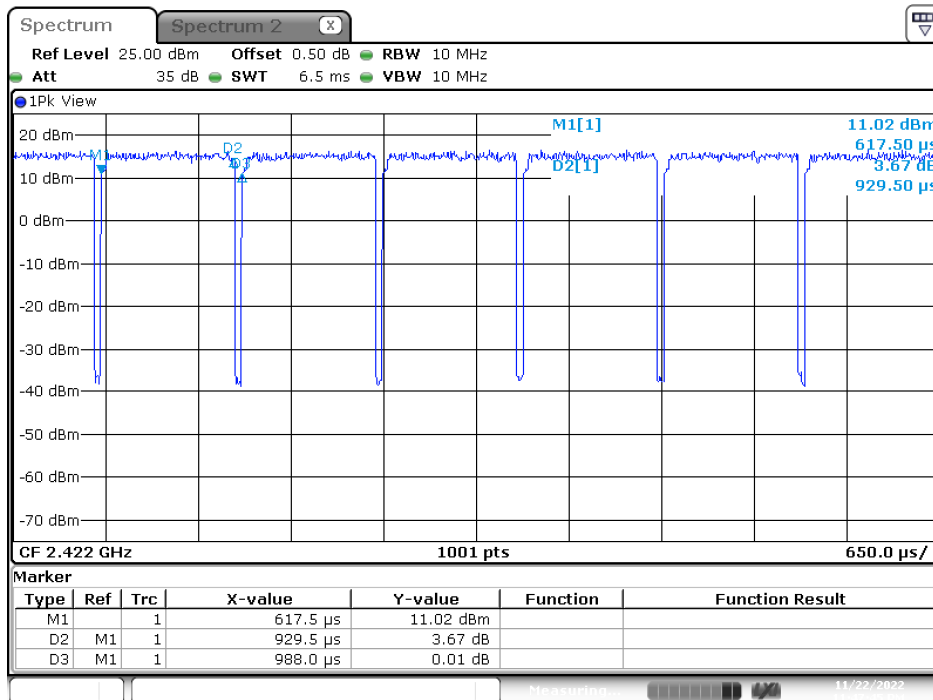

Date: 22.NOV.2022 23:47:45