



Test report No.: 2330285R-SAUSV01S-A

# SAR Test Report

Product Name	Mobile Computer
Trademark	CIPHERLAB
Model and /or type reference	RS36W6O
Applicant’s name / address	CipherLab Co., Ltd. 12F, 333, Dunhua S.Rd., Sec.2, Taipei, Taiwan
Manufacturer’s name	CIPHERLAB CO. LTD.
FCC ID	Q3N-RS36W6O
Applicable Standard	IEEE 1528-2013 KDB 447498 D01 v06 KDB 865664 D01 v01r04
Test Result	Max. SAR Measurement (1g) 2.4 GHz: <b>1.141</b> W/kg 5 GHz: <b>0.994</b> W/kg
Verdict Summary	IN COMPLIANCE
Documented By (Senior Project Specialist / Ida Tung)	<i>Ida Tung</i>
Tested By (Senior Engineer / Luke Cheng)	<i>luke cheng</i>
Approved By (Assistant Manager / San Lin)	<i>San Lin</i>
Date of Receipt	2023/03/07
Date of Issue	2023/05/25
Report Version	V1.0

**INDEX**

<b>Description</b>	<b>Page</b>
<b>1. General Information</b> .....	<b>5</b>
1.1 EUT Description .....	5
1.2 Antenna List .....	5
1.3 SAR Test Exclusion Calculation .....	6
1.4 Test Environment.....	7
1.5 Measurement procedures.....	8
<b>2. SAR Measurement System</b> .....	<b>9</b>
2.1 DASY System Description .....	9
2.2 Area Scans.....	10
2.3 DASY E-Field Probe.....	11
2.4 DATA Acquisition Electronics (DAE) and Measurement Server .....	12
2.5 Robot.....	13
2.6 Device Holder .....	13
2.7 Phantom .....	14
<b>3. Tissue Simulating Liquid</b> .....	<b>15</b>
3.1 The composition of the tissue simulating liquid .....	15
3.2 Tissue Calibration Result.....	15
3.3 Tissue Dielectric Parameters for Head and Head Phantoms .....	17
<b>4. Measurement Procedure</b> .....	<b>18</b>
4.1 SAR System Check.....	18
4.2 SAR Measurement Procedure.....	20
<b>5. RF Exposure Limits</b> .....	<b>21</b>
<b>6. Test Equipment List</b> .....	<b>22</b>
<b>7. Measurement Uncertainty</b> .....	<b>25</b>
<b>8. Conducted Power Measurement (Including tolerance allowed for production unit)</b> .....	<b>27</b>
<b>9. Test Results</b> .....	<b>30</b>
9.1 Test Results Summary .....	30
9.2 Simultaneous Transmission.....	36
<b>10. SAR measurement variability</b> .....	<b>39</b>
Appendix A. System Check Data	
Appendix B. Highest measurement Data	
Appendix C. Test Setup Photographs	
Appendix D. Probe Calibration Data	
Appendix E. Dipole & Source Calibration	
Appendix F. Product Photos-Please refer to the file: 2330285R-Product Photos	

---

## Competences and Guarantees

---

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

---

## General conditions

---

1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

## Revision History

---

Report No.	Version	Description	Issued Date
2330285R-SAUSV01S-A	V1.0	Initial issue of report.	2023/05/25

## 1. General Information

### 1.1 EUT Description

Product Name	Mobile Computer		
Trademark	CIPHERLAB		
Model and /or type reference	RS36W6O		
FCC ID	Q3N-RS36W6O		
Frequency Range	WLAN 2.4 GHz: 2412-2462MHz WLAN 5 GHz: 5180-5240MHz, 5260-5320MHz, 5500-5720MHz, 5745-5825MHz BT: 2402-2480MHz		
Type of Modulation	802.11b: DSSS 802.11a/g/n/ac/ax: OFDM, OFDMA GFSK(1Mbps) / $\pi$ /4DQPSK(2Mbps) / 8DPSK(3Mbps)		
Antenna Type	PIFA		
Device Category	Portable		
RF Exposure Environment	Uncontrolled		
Summary of test result – Reported Head/Body 1g SAR (W/kg)			
Test configuration	DTS	NII	DSS(BT)
Head	1.141	0.994	0.049
Body	0.358	0.369	0.013
Simultaneous	1.427		
Summary of test result – Reported Product Specific 10g SAR (W/kg)			
Test configuration	DTS	NII	DSS(BT)
Product Specific	0.782	0.533	0.041
Simultaneous	1.077		

### 1.2 Antenna List

No.	Manufacturer	Part No.	Antenna Type
1	auden	RS36W6O (Main)	PIFA
		RS36W6O (Aux)	PIFA

Note: The above EUT information by manufacturer.

### 1.3 SAR Test Exclusion Calculation

Referring to KDB 941225 D06, when the distance from the antenna to the edge is > 25mm, SAR is not required.

Antenna	Distance from the antenna to the edge					
	Front	Back	Left-side	Right-side	Top	Bottom
Main	< 25mm	< 25mm	> 25mm	< 25mm	< 25mm	> 25mm
	Yes	Yes	No	Yes	Yes	No
Aux	< 25mm	< 25mm	< 25mm	> 25mm	< 25mm	> 25mm
	Yes	Yes	Yes	No	Yes	No

## 1.4 Test Environment

Ambient conditions in the laboratory:

Test Date: 2023/04/17 - 2023/05/04

Items	Required	Actual
Temperature (°C)	18-25	23 ± 2
Humidity (%RH)	30-70	50 ± 20

USA	FCC Registration Number: TW0033
Canada	CAB Identifier Number: TW3023 / Company Number: 26930

Site Description	Accredited by TAF
	Accredited Number: 3023

Test Laboratory	DEKRA Testing and Certification Co., Ltd.
	Linkou Laboratory
Address	No.5-22, Ruishukeng Linkou District, New Taipei City, 24451, Taiwan, R.O.C
Performed Location	No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan, R.O.C.
Phone Number	+886-3-275-7255
Fax Number	+886-3-327-8031

---

## 1.5 Measurement procedures

IEEE 1528-2013

47CFR § 2.1093

KDB 248227 D01 v02r02

KDB 447498 D01 v06

KDB 648474 D04 v01r03

KDB 865664 D01 v01r04


KDB 941225 D06 v02r01



## 2. SAR Measurement System

### 2.1 DASY System Description

SAR Configurations is shown below:

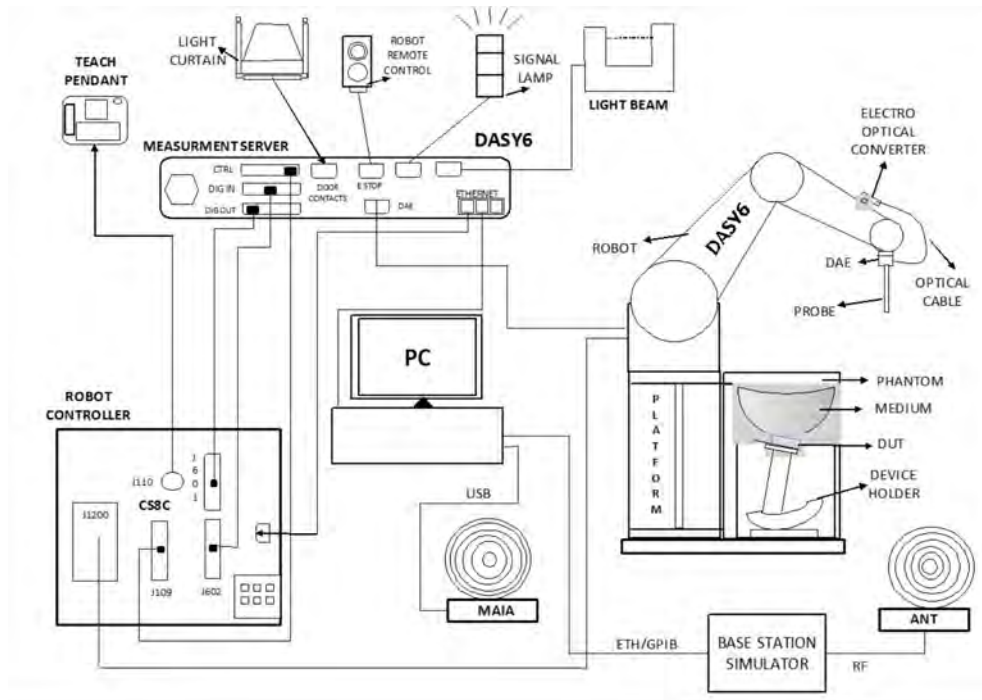

The DASY system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7/8/10 and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## 2.2 Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for utilize a 10mm<sup>2</sup> step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

When an Area Scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing.

### 2.2.1 Zoom Scan (Cube Scan Averaging)

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. A density of 1000 kg/m<sup>3</sup> is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications utilize a physical step of 5x5x7 (8mmx8mmx5mm) providing a volume of 32mm in the X & Y axis, and 30mm in the Z axis.

### 2.2.2 SAR measurement drifts

Before an area scan and after the zoom scan, single point SAR measurements are performed at defined locations to estimate the SAR measurement drift due to device output power variations. If a device is known to drift randomly, additional single point drift reference measurements should be performed at regular intervals throughout the area and zoom scan test durations. The SAR drift shall be kept within  $\pm 5\%$ , whether there are substantial drifts or not. The field difference will be calculated in dB units in the DASY software.

### 2.2.3 Uncertainty of Inter-/Extrapolation and Averaging


In order to evaluate the uncertainty of the interpolation, extrapolation and averaged SAR calculation algorithms of the Postprocessor, DASY allows the generation of measurement grids which are artificially predefined by analytically based test functions. Therefore, the grids of area scans and zoom scans can be filled with uncertainty test data, according to the SAR benchmark functions.

### 2.3 DASY E-Field Probe


The SAR measurement is conducted with the dosimetric probe manufactured by SPEAG. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.

SPEAG conducts the probe calibration in compliance with international and national standards under ISO 17025. The calibration data are in Appendix D.

#### Isotropic E-Field Probe Specification

<b>Model</b>	Ex3DV4	
<b>Construction</b>	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	4 MHz – 10 GHz Linearity: $\pm 0.2$ dB (30 MHz to 10 GHz)	
<b>Directivity</b>	$\pm 0.1$ dB in TSL (rotation around probe axis) $\pm 0.3$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 $\mu$ W/g to 100 mW/g Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)	
<b>Dimensions</b>	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	
<b>Application</b>	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.	

### E-Field mm-Wave Probe Specification

<b>Model</b>	EUmmWVx	
<b>Construction</b>	Two dipoles optimally arranged to obtain pseudo-vector information Minimum three measurements/point, 120° rotated around probe axis Sensors (0.8 mm length) printed on glass substrate protected by high density foam	
<b>Frequency</b>	750 MHz to 110 GHz	
<b>Dynamic Range</b>	< 20 V/m to 10000 V/m with PRE-10 (min < 20 V/m to 2000 V/m)	
<b>Position Precision</b>	< 0.2 mm	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: encapsulation 8 mm (internal sensor < 1mm) Distance from probe tip to dipole centers: < 2 mm Sensor displacement to probe's calibration point: < 0.3 mm	
<b>Application</b>	E-field measurements of 5G devices and other mm-wave transmitters operating above 10GHz in < 2 mm distance from device (free-space) Power density, H-field, and far-field analysis using total field reconstruction	

## 2.4 DATA Acquisition Electronics (DAE) and Measurement Server

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit.

Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE4 is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.



## 2.5 Robot

The DASY system uses the high precision robots TX90 XL type out of the newer series from Stäubli SA (France). For the 6-axis controller DASY system, the CS8C robot controller version from Stäubli is used.

The XL robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller



## 2.6 Device Holder

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR).

Thus the device needs no repositioning when changing the angles.

The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon_r = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.




## 2.7 Phantom

### 2.7.1 SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm).

It has three measurement areas:

- Left head
- Right head
- Flat phantom

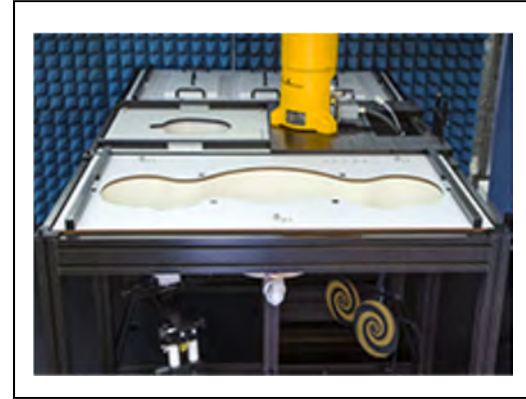

The device holder positions are adjusted to the standard measurement positions in the three sections. A cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

### 2.7.2 mmWave Phantom

The mmWave Phantom approximates free-space conditions, allowing to evaluate not only the antenna side of the device but also the front (screen) side or any opposite-radiating side of wireless devices operating above 10 GHz without distorting the RF field. It consists of a 40 mm thick Rohacell plate used as a test bed, which has a loss tangent ( $\tan \delta$ )  $\leq 0.05$  and a relative permittivity ( $\epsilon_r$ )  $\leq 1.2$ . High-performance RF absorbers are placed below the foam.



### 3. Tissue Simulating Liquid

#### 3.1 The composition of the tissue simulating liquid

**Description:** Aqueous solution with surfactants and inhibitors

**Declarable, or hazardous components:**

CAS: 107-21-1 EINECS: 203-473-3 Reg.nr.: 01-2119456816-28-0000	<b>Ethenediol</b> STOT RE 2, H373; Acute Tox. 4, H302	< 5.2%
CAS: 68608-26-4 EINECS: 271-781-5 Reg.nr.: 01-2119527859-22-0000	<b>Sodium petroleum sulfonate</b> Eye Irrit. 2, H319	< 2.9%
CAS: 107-41-5 EINECS: 203-489-0 Reg.nr.: 01-2119539582-35-0000	<b>Hexylene Glycol / 2-Methyl-pentane-2,4-diol</b> Skin Irrit. 2, H315; Eye Irrit. 2, H319	< 2.9%
CAS: 68920-66-1 NLP: 500-236-9 Reg.nr.: 01-2119489407-26-0000	<b>Alkoxylated alcohol, &gt; C<sub>16</sub></b> Aquatic Chronic 2, H411; Skin Irrit. 2, H315; Eye Irrit. 2, H319	< 2.0%

#### 3.2 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using Dielectric Probe Kit and Vector Network Analyzer.

Date	Tissue Type	Frequency (MHz)	Relative Permittivity ( $\epsilon_r$ )			Conductivity ( $\sigma$ )			Tissue Temp. (°C)
			Measured	Target	Delta (%)	Measured	Target	Delta (%)	
2023/5/4	Head	2450	40.04	39.20	2.14	1.78	1.80	-1.11	21.6
	Head	2412	40.18	39.28	2.29	1.73	1.77	-2.26	
	Head	2437	40.09	39.23	2.19	1.76	1.79	-1.68	
	Head	2441	40.07	39.22	2.17	1.76	1.79	-1.68	
	Head	2462	39.99	39.18	2.07	1.79	1.81	-1.10	
2023/4/17	Head	5250	35.99	35.95	0.11	4.61	4.71	-2.12	21.8
	Head	5210	36.11	35.99	0.33	4.55	4.67	-2.57	
	Head	5290	35.88	35.91	-0.08	4.66	4.75	-1.89	
	Head	5600	35.02	35.50	-1.35	5.08	5.07	0.20	
	Head	5530	35.21	35.61	-1.12	4.98	5.00	-0.40	
	Head	5610	35.01	35.49	-1.35	5.09	5.08	0.20	
	Head	5690	34.78	35.41	-1.78	5.19	5.16	0.58	
	Head	5800	34.47	35.30	-2.35	5.34	5.27	1.33	
	Head	5775	34.54	35.33	-2.24	5.31	5.25	1.14	

Date	Tissue Type	Frequency (MHz)	Relative Permittivity ( $\epsilon_r$ )			Conductivity ( $\sigma$ )			Tissue Temp. (°C)
			Measured	Target	Delta (%)	Measured	Target	Delta (%)	
2023/4/21	Head	5250	36.07	35.95	0.33	4.69	4.71	-0.42	21.9
	Head	5210	36.19	35.99	0.56	4.63	4.67	-0.86	
	Head	5290	35.96	35.91	0.14	4.74	4.75	-0.21	
	Head	5600	35.11	35.50	-1.10	5.16	5.07	1.78	
	Head	5530	35.29	35.61	-0.90	5.07	5.00	1.40	
	Head	5610	35.08	35.49	-1.16	5.18	5.08	1.97	
	Head	5690	34.87	35.41	-1.52	5.28	5.16	2.33	
	Head	5800	34.56	35.30	-2.10	5.42	5.27	2.85	
	Head	5775	34.63	35.33	-1.98	5.42	5.25	3.24	



### 3.3 Tissue Dielectric Parameters for Head and Head Phantoms

The head tissue dielectric parameters recommended by the IEC/IEEE 62209-1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head tissue parameters that have not been specified are interpolated according to the head parameters specified in IEC/IEEE 62209-1528.

Target Frequency (MHz)	Head	
	$\epsilon_r$	$\sigma$ (S/m)
450	43.5	0.87
750	41.9	0.89
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1640	40.2	1.31
1750	40.1	1.37
1800 – 2000	40.0	1.40
2450	39.2	1.80
3000	38.5	2.40
5000	36.2	4.45
5200	36.0	4.66
5400	35.8	4.86
5600	35.3	5.27
5800	35.3	5.27
6000	35.1	5.48
6500	34.5	6.07
7000	33.9	6.65
7500	33.3	7.24

## 4. Measurement Procedure

### 4.1 SAR System Check

#### 4.1.1 Dipoles



The SAR dipoles are optimized symmetrical dipole with  $\lambda/4$  balun matched to a Flat phantom section filled with tissue simulating liquids. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC signals. They are available for the variety of frequencies between 300MHz and 10 GHz. The provided tripod is used to hold the dipole below the phantom. As the distance between the dipole center and the TSL is critical, a spacer is placed between the dipole and the phantom. The spacing distance is frequency dependent.

#### 4.1.2 SAR System Check Result

1. Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %.
2. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Delta 1g ±10 (%)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Delta 10g ±10 (%)	Tissue Temp. (°C)
2023/5/4	2450	250	13.50	52.40	54	3.05	6.24	24.60	24.96	1.46	21.6
2023/4/17	5250	100	7.66	81.60	76.6	-6.13	2.17	23.20	21.7	-6.47	21.8
2023/4/17	5600	100	8.08	85.90	80.8	-5.94	2.26	24.20	22.6	-6.61	21.8
2023/4/17	5800	100	7.52	82.00	75.2	-8.29	2.11	22.80	21.1	-7.46	21.8
2023/4/21	5250	100	7.93	81.60	79.3	-2.82	2.24	23.20	22.4	-3.45	21.9
2023/4/21	5600	100	8.62	85.90	86.2	0.35	2.49	24.20	24.9	2.89	21.9
2023/4/21	5800	100	8.36	82.00	83.6	1.95	2.32	22.80	23.2	1.75	21.9

## 4.2 SAR Measurement Procedure

The Dasy calculates SAR using the following equation,

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where :

$\sigma$ : represents the simulated tissue conductivity

$\rho$ : represents the tissue density

E :RMS electric field strength (V/m)

The SAR / APD measurements for the EUT should be performed on the channel that produces the highest rated output power of each transmitting antenna.

Pre-scans are made on the device to establish the location for the transmitting antenna, using a large area scan in either air or tissue simulation fluid.

The EUT is placed against the Universal Phantom where the maximum area scan dimensions are larger than the physical size of the resonating antenna. When the scan size is not large enough to cover the peak SAR / APD distribution, it is modified by either extending the area scan size in both the X and Y directions, or the device is shifted within the predefined area.

The area scan is then run to establish the peak SAR / APD location (interpolated resolution set at 1mm<sup>2</sup>) which is then used to orient the center of the zoom scan. The zoom scan is then executed and the 1g and 10g averages are derived from the zoom scan volume (interpolated resolution set at 1mm<sup>3</sup>).

## 5. RF Exposure Limits

SAR assessments have been made in line with the requirements of IEEE-1528, RSS-102 Issue 5, and comply with ANSI/IEEE C95.1-1992 “Uncontrolled Environments” limits. These limits apply to a location which is deemed as “Uncontrolled Environment” which can be described as a situation where the general public may be exposed to an RF source with no prior knowledge or control over their exposure.

### Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit
Spatial Peak SAR (1g cube tissue for brain or body)	<b>1.60 W/kg</b>
Spatial Average SAR (whole body)	<b>0.08 W/kg</b>
Spatial Peak SAR (10g for hands, feet, ankles and wrist)	<b>4.00 W/kg</b>
Power density <sup>1</sup>	<b>1 mW/cm<sup>2</sup></b>

Note:  $1 \text{ mW/cm}^2 = 10 \text{ W/m}^2$

## 6. Test Equipment List

Instrument	Manufacturer	Model No.	Serial No.	Last Calibration	Next Calibration
Reference Dipole 2450MHz	Speag	D2450V2	930	2022/11/21	2025/11/20
Reference Dipole 5GHz	Speag	D5GHzV2	1041	2020/05/25	2023/05/24
Device Holder	Speag	N/A	N/A	N/A	N/A
Data Acquisition Electronic	Speag	DAE4	1425	2022/11/23	2023/11/22
E-Field Probe	Speag	EX3DV4	3979	2022/11/23	2023/11/22
SAR Software	Speag	DASY52	V52.10.0.1446	N/A	N/A
Power Amplifier	Mini-Circuit	ZHL-42	D051404-20	N/A	N/A
Power Amplifier	Mini-Circuit	ZVE-8G+	447202211	N/A	N/A
Directional Coupler	Agilent	87300C	MY44300353	N/A	N/A <sup>1</sup>
Attenuator	Woken	WATT-218FS-10	N/A	N/A	N/A <sup>1</sup>
Attenuator	Mini-Circuit	BW-S20W2+	N/A	N/A	N/A <sup>1</sup>
Vector Network Analyzer	Agilent	E5071C	MY46108013	2023/03/09	2024/03/07
Signal Generator	Anritsu	MG3694A	041902	2022/08/30	2023/08/29
Power Meter	Anritsu	ML2487A	6K00001447	2022/10/31	2023/10/30
Power Sensor	Anritsu	MA2411B	1339194	2022/10/31	2023/10/30

Note: 1. System Check, the path loss measured by the network analyzer, includes the signal generator, amplifier, cable, attenuator and directional coupler.

## Note:

Per KDB 865664 D01 requirements for dipole calibration, the following are recommended FCC procedures for SAR dipole calibration.

1. After a dipole is damaged and properly repaired to meet required specifications.
2. When the measured SAR deviates from the calibrated SAR value by more than 10% due to changes in physical, mechanical, electrical or other relevant dipole conditions.
3. When the most recent return-loss, measured at least annually, deviates by more than 20% from the previous measurement (i.e. 0.2 of the dB value) or not meeting the required -20 dB return-loss specification.

	Frequency	Tissue	Return loss (dB)	Limit	Verified Date
Calibration	5250 MHz	Head	-26.9	Within 20%	2020/5/25
Measurement	5250 MHz	Head	-24.16		2021/5/18
Measurement	5250 MHz	Head	-25.46		2022/5/17

	Frequency	Tissue	Return loss (dB)	Limit	Verified Date
Calibration	5600 MHz	Head	-24.4	Within 20%	2020/5/25
Measurement	5600 MHz	Head	-27.05		2021/5/18
Measurement	5600 MHz	Head	-24.46		2022/5/17

	Frequency	Tissue	Return loss (dB)	Limit	Verified Date
Calibration	5800 MHz	Head	-26.8	Within 20%	2020/5/25
Measurement	5800 MHz	Head	-25.64		2021/5/18
Measurement	5800 MHz	Head	-24.88		2022/5/17

4. When the most recent measurement of the real or imaginary parts of the impedance, measured at least annually, deviates by more than 5 Ω from the previous measurement.

	Frequency	Tissue	Impedance	Limit	Verified Date
Calibration	5250 MHz	Head	49.0	Within 5Ω	2020/5/25
Measurement	5250 MHz	Head	45.54		2021/5/18
Measurement	5250 MHz	Head	50.45		2022/5/17

	Frequency	Tissue	Impedance	Limit	Verified Date
Calibration	5600 MHz	Head	56.3	Within 5Ω	2020/5/25
Measurement	5600 MHz	Head	52.24		2021/5/18
Measurement	5600 MHz	Head	55.41		2022/5/17

	Frequency	Tissue	Impedance	Limit	Verified Date
Calibration	5800 MHz	Head	54.3	Within 5Ω	2020/5/25
Measurement	5800 MHz	Head	49.85		2021/5/18
Measurement	5800 MHz	Head	56.96		2022/5/17



## 7. Measurement Uncertainty

Measurement uncertainty for 300 MHz to 3 GHz							
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)
<b>Measurement System Errors</b>							
Probe Calibration	±12.0%	N	2	1	1	±6.0%	±6.0%
Probe Calibration Drift	±1.7%	R	$\sqrt{3}$	1	1	±1.0%	±1.0%
Probe Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%
Broadband Signal	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
Probe Isotropy	±7.6%	R	$\sqrt{3}$	1	1	±4.4%	±4.4%
Data Acquisition	±0.7%	N	1	1	1	±0.7%	±0.7%
RF Ambient	±1.8%	N	1	1	1	±1.8%	±1.8%
Probe Positioning	±0.006 mm	N	1	0.14	0.14	±0.10%	±0.10%
Data Processing	±1.2%	N	1	1	1	±1.2%	±1.2%
<b>Phantom and Device Errors</b>							
Conductivity (meas.)	±2.5%	N	1	0.78	0.71	±2.0%	±1.8%
Conductivity (temp.)	±3.3%	R	$\sqrt{3}$	0.78	0.71	±1.5%	±1.4%
Phantom Permittivity	±14.0%	R	$\sqrt{3}$	0	0	±0%	±0%
Distance DUT - TSL	±2.0%	N	1	2	2	±4.0%	±4.0%
Device Positioning	±1.0%	N	1	1	1	±1.0%	±1.0%
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%
DUT Modulation	±2.4%	R	$\sqrt{3}$	1	1	±1.4%	±1.4%
Time-average SAR	±1.7%	R	$\sqrt{3}$	1	1	±1.0%	±1.0%
DUT drift	±2.5%	N	1	1	1	±2.5%	±2.5%
Val Antenna Unc.	±0.0%	N	1	1	1	±0%	±0%
Unc. Input Power	±0.0%	N	1	1	1	±0%	±0%
<b>Correction to the SAR results</b>							
Deviation to Target	±1.9%	N	1	1	0.84	±1.9%	±1.6%
SAR scaling	±0%	R	$\sqrt{3}$	1	1	±0%	±0%
<b>Combined Uncertainty</b>						±10.9%	±10.9%
<b>Expanded Uncertainty</b>						±21.9%	±21.8%

Measurement uncertainty for 3 GHz to 6 GHz							
Error Description	Uncert. value	Prob. Dist.	Div.	(c) 1g	(c) 10g	Std. Unc. (1g)	Std. Unc. (10g)
<b>Measurement System Errors</b>							
Probe Calibration	±13.1%	N	2	1	1	±6.55%	±6.55%
Probe Calibration Drift	±1.7%	R	$\sqrt{3}$	1	1	±1.0%	±1.0%
Probe Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%
Broadband Signal	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%
Probe Isotropy	±7.6%	R	$\sqrt{3}$	1	1	±4.4%	±4.4%
Data Acquisition	±1.2%	N	1	1	1	±1.2%	±1.2%
RF Ambient	±1.8%	N	1	1	1	±1.8%	±1.8%
Probe Positioning	±0.005 mm	N	1	0.29	0.29	±0.15%	±0.15%
Data Processing	±2.3%	N	1	1	1	±2.3%	±2.3%
<b>Phantom and Device Errors</b>							
Conductivity (meas.)	±2.5%	N	1	0.78	0.71	±2.0%	±1.8%
Conductivity (temp.)	±3.4%	R	$\sqrt{3}$	0.78	0.71	±1.5%	±1.4%
Phantom Permittivity	±14.0%	R	$\sqrt{3}$	0.25	0.25	±2.0%	±2.0%
Distance DUT - TSL	±2.0%	N	1	2	2	±4.0%	±4.0%
Device Positioning	±1.0%	N	1	1	1	±1.0%	±1.0%
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%
DUT Modulation	±2.4%	R	$\sqrt{3}$	1	1	±1.4%	±1.4%
Time-average SAR	±1.7%	R	$\sqrt{3}$	1	1	±1.0%	±1.0%
DUT drift	±2.5%	N	1	1	1	±2.5%	±2.5%
Val Antenna Unc.	±0.0%	N	1	1	1	±0%	±0%
Unc. Input Power	±0.0%	N	1	1	1	±0%	±0%
<b>Correction to the SAR results</b>							
Deviation to Target	±1.9%	N	1	1	0.84	±1.9%	±1.6%
SAR scaling	±0%	R	$\sqrt{3}$	1	1	±0%	±0%
<b>Combined Uncertainty</b>						±11.6%	±11.5%
<b>Expanded Uncertainty</b>						±23.3%	±23.0%

### 8. Conducted Power Measurement (Including tolerance allowed for production unit)

WLAN 2.4G 2TX SISO									
DSSS/OFDM mode specified maximum output power at an antenna port	Frequency	Mode	BW	SISO-Main(TX1)			SISO-Aux(TX2)		
				CH	AV Power	AV Target	CH	AV Power	AV Target
				WLAN 2.4GHz	b	20	1	16.86	17
6	16.92	17	6				16.87	17	
11	16.75	17	11				16.78	17	
g	20	1	16.07		17	1	16.14	17	
		6	16.05		17	6	16.10	17	
		11	16.02		17	11	16.07	17	
n (HT)	20	1	16.22		17	1	16.22	17	
		6	16.13		17	6	16.04	17	
		11	16.14		17	11	16.03	17	
ax (HE)	20	1	16.03		17	1	16.21	17	
		6	16.17		17	6	16.07	17	
		11	16.19		17	11	16.02	17	

WLAN 5G 2TX SISO																					
OFDM mode specified maximum output power at an antenna port	Frequency	Mode	BW	SISO-Main(TX1)			SISO-Aux(TX2)			Frequency	Mode	BW	SISO-Main(TX1)			SISO-Aux(TX2)					
				CH	AV Power	AV Target	CH	AV Power	AV Target				CH	AV Power	AV Target	CH	AV Power	AV Target			
OFDM mode specified maximum output power at an antenna port	U-NII-1 (5150~5250MHz)	a	20	36	12.19	12.5	36	12.01	12.5	U-NII-2C (5470~5725MHz)	a	20	100	12.19	12.5	100	12.07	12.5			
				40	12.09	12.5	40	12.02	12.5				112	12.05	12.5	112	12.02	12.5			
				44	12.17	12.5	44	12.05	12.5				116	12.19	12.5	116	12.03	12.5			
				48	12.18	12.5	48	12.09	12.5				128	12.20	12.5	128	12.05	12.5			
		n (HT)	20	36	12.08	12.5	36	12.02	12.5		n (HT)	20	100	12.13	12.5	100	12.01	12.5			
				40	12.09	12.5	40	12.03	12.5				112	12.22	12.5	112	11.93	12.5			
				44	12.16	12.5	44	12.06	12.5				116	12.15	12.5	116	11.97	12.5			
				48	12.06	12.5	48	12.09	12.5				128	12.03	12.5	128	12.01	12.5			
		40	38	12.01	12.5	38	11.93	12.5	40		132	12.13	12.5	132	11.82	12.5					
			46	12.03	12.5	46	11.87	12.5			102	11.93	12.5	102	11.92	12.5					
		ac(VHT)	80	42	12.31	12.5	42	12.12	12.5		ac (VHT)	80	20	144	11.91	12.5	144	11.96	12.5		
		ax (HE)	20	36	12.06	12.5	36	11.96	12.5				40	142	12.03	12.5	142	12.04	12.5		
				40	12.03	12.5	40	12.03	12.5				138	12.27	12.5	138	12.17	12.5			
				44	11.93	12.5	44	12.04	12.5				106	12.32	12.5	106	12.11	12.5			
				48	12.06	12.5	48	11.96	12.5		122	12.35	12.5	122	12.23	12.5					
		40	38	12.07	12.5	38	11.97	12.5	160		114	N/A	N/A	114	N/A	N/A					
			46	11.86	12.5	46	11.92	12.5			ax (HE)	20	100	12.11	12.5	100	11.88	12.5			
		80	42	11.96	12.5	42	11.85	12.5	112				12.08	12.5	112	12.03	12.5				
		U-NII-2A (5250~5350MHz)	a	20	52	12.16	12.5	52	12.07				12.5	ax (HE)	40	102	11.89	12.5	102	11.98	12.5
					56	12.06	12.5	56	12.03				12.5			110	12.01	12.5	110	11.86	12.5
					60	12.07	12.5	60	12.08		12.5	118	12.02			12.5	118	11.83	12.5		
					64	12.08	12.5	64	12.03		12.5	126	12.09			12.5	126	11.84	12.5		
		n (HT)	20	52	12.07	12.5	52	12.05	12.5		80	106	12.06	12.5	106	12.09	12.5				
				56	12.17	12.5	56	12.04	12.5			122	11.88	12.5	122	12.07	12.5				
	60			12.14	12.5	60	11.99	12.5	160	114		N/A	N/A	114	N/A	N/A					
	64			12.09	12.5	64	12.03	12.5		a		20	149	12.11	12.5	149	12.09	12.5			
	54	12.06	12.5	54	12.08	12.5	157	12.19	12.5		157		12.02	12.5							
	62	12.04	12.5	62	11.96	12.5	165	12.18	12.5		165		12.09	12.5							
	80	58	12.47	12.5	58	12.26	12.5	n (HT)	20		149		12.01	12.5	149	11.81	12.5				
	ax (VHT)	160	50	N/A	N/A	50	N/A			N/A	157	12.06	12.5	157	11.92	12.5					
			ax (HE)	20	52	11.91	12.5			52	12.09	12.5	165	12.16	12.5	165	12.04	12.5			
					56	12.11	12.5			56	12.04	12.5	40	151	12.04	12.5	151	12.05	12.5		
					60	11.98	12.5	60	11.98	12.5	159	11.94		12.5	159	11.96	12.5				
	64	12.01			12.5	64	12.06	12.5	ac(VHT)	80	155	12.33	12.5	155	12.19	12.5					
	40	54	11.99	12.5	54	11.89	12.5	ax (HE)	20	149	11.95	12.5	149	11.85	12.5						
		62	11.81	12.5	62	11.94	12.5			157	11.92	12.5	157	11.96	12.5						
	80	54	11.99	12.5	54	11.89	12.5			40	151	11.99	12.5	151	12.08	12.5					
		62	11.81	12.5	62	11.94	12.5				159	11.91	12.5	159	11.85	12.5					
	80	58	11.97	12.5	58	11.89	12.5	80	138	11.95	12.5	138	12.04	12.5							
	160	50	N/A	N/A	50	N/A	N/A		155	12.09	12.5	155	11.98	12.5							
	U-NII-3 (5725~5850MHz)	a	20	149	12.11	12.5	149	12.09	12.5	ax (HE)	20	149	11.95	12.5	149	11.85	12.5				
				157	12.19	12.5	157	12.02	12.5			157	11.92	12.5	157	11.96	12.5				
				165	12.18	12.5	165	12.09	12.5			40	151	11.99	12.5	151	12.08	12.5			
				149	12.01	12.5	149	11.81	12.5				159	11.91	12.5	159	11.85	12.5			
				157	12.06	12.5	157	11.92	12.5			80	138	11.95	12.5	138	12.04	12.5			
				165	12.16	12.5	165	12.04	12.5				155	12.09	12.5	155	11.98	12.5			
		n (HT)	20	151	12.04	12.5	151	12.05	12.5	ax (HE)	40	151	11.99	12.5	151	12.08	12.5				
				159	11.94	12.5	159	11.96	12.5			159	11.91	12.5	159	11.85	12.5				
ac(VHT)				80	155	12.33	12.5	155	12.19			12.5	80	138	11.95	12.5	138	12.04	12.5		
ax (HE)				20	149	11.95	12.5	149	11.85			12.5		155	12.09	12.5	155	11.98	12.5		
					157	11.92	12.5	157	11.96			12.5	40	151	11.99	12.5	151	12.08	12.5		
165				12.09	12.5	165	12.04	12.5	159			11.91		12.5	159	11.85	12.5				

BT						
Bluetooth mode maximum output power	Frequency	Mode	Modulation	SISO-Main(TX1)		
				CH	AV Power	AV Target
	BT 2.4GHz	BR	GFSK	0	3.54	4.0
				39	4.10	4.5
				78	2.29	2.5
		EDR	8DPSK	0	3.26	3.5
				39	-1.33	-1.0
				78	2.93	3.0
		BLE	GFSK	0	3.42	3.5
				19	3.96	4.0
				39	2.83	3.0

## 9. Test Results

### 9.1 Test Results Summary

WLAN 2.4 GHz Head SAR								
SAR MEASUREMENT								
Ambient Temperature (°C): 22.7 ±2					Relative Humidity (%): 52 %			
Liquid Temperature (°C): 21.6 ±2					Depth of Liquid (cm): >15			
Test Position	Dist. (mm)	Frequency		Conducted Power (dBm)		SAR (W/kg)		Plot No.
		Ch.	MHz	Meas.	Tune-Up Limit	Meas-1g	Scaled-1g	
Test Mode: 802.11b_Main								
Left-Cheek	0	1	2412	16.86	17	0.994	<b>1.141</b>	1
Left-Cheek	0	6	2437	16.92	17	0.975	1.103	
Left-Cheek	0	11	2462	16.75	17	0.789	0.929	
Left-Tilt	0	6	2437	16.92	17	0.702	0.794	
Right-Cheek	0	6	2437	16.92	17	0.407	0.461	
Right-Tilt	0	6	2437	16.92	17	0.287	0.325	
Test Mode: 802.11b_Aux								
Left-Cheek	0	6	2437	16.87	17	0.207	0.237	
Left-Tilt	0	6	2437	16.87	17	0.228	0.261	
Right-Cheek	0	6	2437	16.87	17	0.661	0.757	
Right-Tilt	0	6	2437	16.87	17	0.358	0.410	
Test Mode: BT-1M_Main								
Left-Cheek	0	39	2441	4.10	4.5	0.034	0.049	2
Left-Tilt	0	39	2441	4.10	4.5	0.018	0.026	
Right-Cheek	0	39	2441	4.10	4.5	0.015	0.021	
Right-Tilt	0	39	2441	4.10	4.5	0.013	0.018	
Note: 1. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required. 2. When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.								

WLAN 2.4 GHz Body SAR								
SAR MEASUREMENT								
Ambient Temperature (°C): 22.7 ±2					Relative Humidity (%): 52 %			
Liquid Temperature (°C): 21.6 ±2					Depth of Liquid (cm): >15			
Test Position	Dist. (mm)	Frequency		Conducted Power (dBm)		SAR (W/kg)		Plot No.
		Ch.	MHz	Meas.	Tune-Up Limit	Meas-1g	Scaled-1g	
Test Mode: 802.11b_Main_10mm								
Front	10	6	2437	16.92	17	0.150	0.170	
Back	10	6	2437	16.92	17	0.157	0.178	
Right-side	10	6	2437	16.92	17	0.161	0.182	
Top	10	6	2437	16.92	17	0.058	0.066	
Test Mode: 802.11b_Aux_10mm								
Front	10	6	2437	16.87	17	0.109	0.125	
Back	10	1	2412	16.52	17	0.225	0.279	
Back	10	6	2437	16.87	17	0.275	0.315	
Back	10	11	2462	16.78	17	0.306	<b>0.358</b>	3
Left-side	10	6	2437	16.87	17	0.015	0.017	
Top	10	6	2437	16.87	17	0.274	0.314	
Test Mode: BT-1M_Main_10mm								
Front	10	39	2441	4.10	4.5	0.0091	0.013	4
Back	10	39	2441	4.10	4.5	0.00637	0.009	
Right-side	10	39	2441	4.10	4.5	0.00451	0.006	
Top	10	39	2441	4.10	4.5	0.000754	0.001	
Note: 1. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2$ W/kg, SAR is not required. 2. When the reported SAR of the highest measured maximum output power channel for the exposure configuration is $\leq 0.8$ W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.								

WLAN 2.4 GHz Product Specific 10g (Extremity) SAR								
SAR MEASUREMENT								
Ambient Temperature (°C): 22.7 ±2					Relative Humidity (%): 52 %			
Liquid Temperature (°C): 21.6 ±2					Depth of Liquid (cm): >15			
Test Position	Dist. (mm)	Frequency		Conducted Power (dBm)		SAR (W/kg)		Plot No.
		Ch.	MHz	Meas.	Tune-Up Limit	Meas-10g	Scaled-10g	
Test Mode: 802.11b_Main_0mm								
Front	0	6	2437	16.92	17	0.646	0.731	
Back	0	6	2437	16.92	17	0.447	0.506	
Right-side	0	6	2437	16.92	17	0.441	0.499	
Top	0	6	2437	16.92	17	0.229	0.259	
Test Mode: 802.11b_Aux_0mm								
Front	0	6	2437	16.87	17	0.266	0.305	
Back	0	6	2437	16.87	17	0.472	0.540	
Left-side	0	6	2437	16.87	17	0.395	0.452	
Top	0	1	2412	16.52	17	0.538	0.668	
Top	0	6	2437	16.87	17	0.649	0.743	
Top	0	11	2462	16.78	17	0.669	<b>0.782</b>	5
Test Mode: BT-1M_Main_0mm								
Front	0	39	2441	4.10	4.5	0.029	0.041	6
Back	0	39	2441	4.10	4.5	0.017	0.024	
Right-side	0	39	2441	4.10	4.5	0.012	0.017	
Top	0	39	2441	4.10	4.5	0.00849	0.012	
Note: 1. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 3 W/kg, SAR is not required. 2. When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 2 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.								



WLAN 5 GHz Head SAR								
SAR MEASUREMENT								
Ambient Temperature (°C): 22.8 ±2					Relative Humidity (%): 53 %			
Liquid Temperature (°C): 21.9 ±2					Depth of Liquid (cm): >15			
Test Position	Dist. (mm)	Frequency		Conducted Power (dBm)		SAR (W/kg)		Plot No.
		Ch.	MHz	Meas.	Tune-Up Limit	Meas-1g	Scaled-1g	
Test Mode: 802.11ac80M_Main								
Left-Cheek	0	58	5290	12.47	12.5	0.659	0.729	
Left-Cheek	0	122	5610	12.35	12.5	0.564	0.642	
Left-Cheek	0	155	5775	12.33	12.5	0.727	0.831	
Left-Tilt	0	58	5290	12.47	12.5	0.738	0.817	7
Left-Tilt	0	106	5530	12.32	12.5	0.556	0.637	
Left-Tilt	0	122	5610	12.35	12.5	0.627	0.713	
Left-Tilt	0	138	5690	12.27	12.5	0.685	0.794	8
Left-Tilt	0	155	5775	12.33	12.5	0.870	<b>0.994</b>	9
Right-Cheek	0	58	5290	12.47	12.5	0.612	0.677	
Right-Cheek	0	122	5610	12.35	12.5	0.474	0.539	
Right-Cheek	0	155	5775	12.33	12.5	0.653	0.746	
Right-Tilt	0	58	5290	12.47	12.5	0.703	0.778	
Right-Tilt	0	122	5610	12.35	12.5	0.522	0.594	
Right-Tilt	0	155	5775	12.33	12.5	0.704	0.805	
Test Mode: 802.11ac80M_Aux								
Left-Cheek	0	58	5290	12.26	12.5	0.054	0.062	
Left-Cheek	0	122	5610	12.23	12.5	0.175	0.205	
Left-Cheek	0	155	5775	12.19	12.5	0.163	0.192	
Left-Tilt	0	58	5290	12.26	12.5	0.055	0.064	
Left-Tilt	0	122	5610	12.23	12.5	0.166	0.194	
Left-Tilt	0	155	5775	12.19	12.5	0.192	0.227	
Right-Cheek	0	58	5290	12.26	12.5	0.129	0.150	
Right-Cheek	0	122	5610	12.23	12.5	0.235	0.275	
Right-Cheek	0	155	5775	12.19	12.5	0.260	0.307	
Right-Tilt	0	58	5290	12.26	12.5	0.042	0.049	
Right-Tilt	0	122	5610	12.23	12.5	0.171	0.200	
Right-Tilt	0	155	5775	12.19	12.5	0.202	0.238	
Note : 1. When multiple transmission modes have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected 2. When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required in that exposure configuration. 3. When the reported SAR of the highest measured maximum U-NII-2A for the exposure configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.								

WLAN 5 GHz Body SAR								
SAR MEASUREMENT								
Ambient Temperature (°C): 22.7 ±2					Relative Humidity (%): 51 %			
Liquid Temperature (°C): 21.8 ±2					Depth of Liquid (cm): >15			
Test Position	Dist. (mm)	Frequency		Conducted Power (dBm)		SAR (W/kg)		Plot No.
		Ch.	MHz	Meas.	Tune-Up Limit	Meas-1g	Scaled-1g	
Test Mode: 802.11ac80M_Main_10mm								
Front	10	42	5210	12.31	12.5	0.189	0.217	
Front	10	58	5290	12.47	12.5	0.198	0.219	10
Front	10	122	5610	12.35	12.5	0.180	0.205	
Front	10	155	5775	12.33	12.5	0.257	0.294	11
Back	10	42	5210	12.31	12.5	0.102	0.117	
Back	10	58	5290	12.47	12.5	0.109	0.121	
Back	10	122	5610	12.35	12.5	0.146	0.166	
Back	10	155	5775	12.33	12.5	0.219	0.250	
Right-side	10	42	5210	12.31	12.5	0.058	0.067	
Right-side	10	155	5775	12.33	12.5	0.070	0.079	
Top	10	42	5210	12.31	12.5	0.190	0.218	12
Top	10	155	5775	12.33	12.5	0.199	0.227	
Test Mode: 802.11ac80M_Aux_10mm								
Front	10	42	5210	12.12	12.5	0.015	0.018	
Front	10	58	5290	12.26	12.5	0.022	0.026	
Front	10	122	5610	12.23	12.5	0.045	0.052	
Front	10	155	5775	12.19	12.5	0.062	0.074	
Back	10	42	5210	12.12	12.5	0.067	0.080	
Back	10	58	5290	12.26	12.5	0.091	0.106	
Back	10	106	5530	12.11	12.5	0.179	0.215	
Back	10	122	5610	12.23	12.5	0.235	0.275	13
Back	10	138	5690	12.17	12.5	0.229	0.272	
Back	10	155	5775	12.19	12.5	0.244	0.288	
Left-side	10	42	5210	12.12	12.5	0.075	0.090	
Left-side	10	155	5775	12.19	12.5	0.313	<b>0.369</b>	14
Top	10	42	5210	12.12	12.5	0.051	0.061	
Top	10	155	5775	12.19	12.5	0.056	0.066	
Note : 1. When multiple transmission modes have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected 2. When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required in that exposure configuration. 3. When the reported SAR of the highest measured maximum U-NII-2A for the exposure configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.								

WLAN 5 GHz Product Specific 10g (Extremity) SAR								
SAR MEASUREMENT								
Ambient Temperature (°C): 22.7 ±2					Relative Humidity (%): 51 %			
Liquid Temperature (°C): 21.8 ±2					Depth of Liquid (cm): >15			
Test Position	Dist. (mm)	Frequency		Conducted Power (dBm)		SAR (W/kg)		Plot No.
		Ch.	MHz	Meas.	Tune-Up Limit	Meas-10g	Scaled-10g	
Test Mode: 802.11ac80M_Main_0mm								
Front	0	58	5290	12.47	12.5	0.232	0.257	
Front	0	122	5610	12.35	12.5	0.192	0.218	
Front	0	155	5775	12.33	12.5	0.281	0.321	
Back	0	58	5290	12.47	12.5	0.183	0.203	
Back	0	122	5610	12.35	12.5	0.183	0.208	
Back	0	155	5775	12.33	12.5	0.267	0.305	
Right-side	0	58	5290	12.47	12.5	0.076	0.084	
Right-side	0	122	5610	12.35	12.5	0.055	0.062	
Right-side	0	155	5775	12.33	12.5	0.080	0.092	
Top	0	58	5290	12.47	12.5	0.468	0.518	15
Top	0	106	5530	12.32	12.5	0.367	0.420	
Top	0	122	5610	12.35	12.5	0.349	0.397	
Top	0	138	5690	12.27	12.5	0.410	0.475	16
Top	0	155	5775	12.33	12.5	0.466	<b>0.533</b>	17
Test Mode: 802.11ac80M_Aux_0mm								
Front	0	58	5290	12.26	12.5	0.064	0.074	
Front	0	122	5610	12.23	12.5	0.096	0.112	
Front	0	155	5775	12.19	12.5	0.106	0.125	
Back	0	58	5290	12.26	12.5	0.135	0.157	
Back	0	122	5610	12.23	12.5	0.182	0.213	
Back	0	155	5775	12.19	12.5	0.185	0.218	
Left-side	0	58	5290	12.26	12.5	0.176	0.204	
Left-side	0	122	5610	12.23	12.5	0.284	0.332	
Left-side	0	155	5775	12.19	12.5	0.438	0.517	
Top	0	58	5290	12.26	12.5	0.078	0.091	
Top	0	122	5610	12.23	12.5	0.056	0.066	
Top	0	155	5775	12.19	12.5	0.063	0.074	
Note : 1. When multiple transmission modes have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected 2. When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 2 W/kg, no further SAR testing is required in that exposure configuration. 3. When the reported SAR of the highest measured maximum U-NII-2A for the exposure configuration is ≤ 3 W/kg, SAR is not required for U-NII-1 band.								

## 9.2 Simultaneous Transmission

Simultaneous Transmission Configurations	
1	WLAN 2.4GHz Main + WLAN 2.4GHz Aux + BT
2	WLAN 5GHz Main + WLAN 5GHz Aux

### Worst Case SAR\_Head Exposure Conditions

WLAN (Main)	Left-Cheek	Left-Tilt	Right-Cheek	Right-Tilt
WLAN 2.4G	1.141	0.794	0.461	0.325
WLAN 5G	0.831	0.994	0.746	0.805
BT	0.049	0.026	0.021	0.018
WLAN (Aux)	Left-Cheek	Left-Tilt	Right-Cheek	Right-Tilt
WLAN 2.4G	0.237	0.261	0.757	0.410
WLAN 5G	0.205	0.227	0.307	0.238

### Worst Case SAR\_Hotspot & Body-worn Exposure Conditions

WLAN (Main)	Front	Back	Left-side	Right-side	Top	Bottom
WLAN 2.4G	0.170	0.178	--	0.182	0.066	--
WLAN 5G	0.294	0.250	--	0.079	0.227	--
BT	0.013	0.009	--	0.006	0.001	--
WLAN (Aux)	Front	Back	Left-side	Right-side	Top	Bottom
WLAN 2.4G	0.125	0.358	0.017	--	0.314	--
WLAN 5G	0.074	0.288	0.369	--	0.066	--

### Worst Case SAR\_Product Specific 10g (Extremity) Exposure Conditions

WLAN (Main)	Front	Back	Left-side	Right-side	Top	Bottom
WLAN 2.4G	0.731	0.506	--	0.499	0.259	--
WLAN 5G	0.321	0.305	--	0.092	0.533	--
BT	0.041	0.024	--	0.017	0.012	--
WLAN (Aux)	Front	Back	Left-side	Right-side	Top	Bottom
WLAN 2.4G	0.305	0.540	0.452	--	0.782	--
WLAN 5G	0.125	0.218	0.517	--	0.091	--

## 9.2.1 Simultaneous transmission of Wi-Fi and other wireless technologies

### Head Exposure Conditions

#### Simultaneous Transmission Summation Scenario

Test Position	1	2	3	4	5	1+2+5	3+4
	WLAN 2.4 GHz ANT Main (W/kg)	WLAN 2.4 GHz ANT Aux (W/kg)	WLAN 5 GHz ANT Main (W/kg)	WLAN 5 GHz ANT Aux (W/kg)	BT (W/kg)	$\Sigma$ 1-g SAR	$\Sigma$ 1-g SAR
Left-Cheek	1.141	0.237	0.831	0.205	0.049	1.427	1.036
Left-Tilt	0.794	0.261	0.994	0.227	0.026	1.081	1.221
Right-Cheek	0.461	0.757	0.746	0.307	0.021	1.239	1.053
Right-Tilt	0.325	0.410	0.805	0.238	0.018	0.753	1.043

Note: The sum of value is less than 1.6 W/kg, thus simultaneous SAR testing is not need.

### Hotspot & Body-worn Exposure Conditions

#### Simultaneous Transmission Summation Scenario

Test Position	1	2	3	4	5	1+2+5	3+4
	WLAN 2.4 GHz ANT Main (W/kg)	WLAN 2.4 GHz ANT Aux (W/kg)	WLAN 5 GHz ANT Main (W/kg)	WLAN 5 GHz ANT Aux (W/kg)	BT (W/kg)	$\Sigma$ 1-g SAR	$\Sigma$ 1-g SAR
Front	0.170	0.125	0.294	0.074	0.013	0.308	0.368
Back	0.178	0.358	0.250	0.288	0.009	0.545	0.538
Left-side	--	0.017	--	0.369	--	0.017	0.369
Right-side	0.182	--	0.079	--	0.006	0.188	0.079
Top	0.066	0.314	0.227	0.066	0.001	0.381	0.293

Note: The sum of value is less than 1.6 W/kg, thus simultaneous SAR testing is not need.

### Product Specific 10g (Extremity) Exposure Conditions

#### Simultaneous Transmission Summation Scenario

Test Position	1	2	3	4	5	1+2+5	3+4
	WLAN 2.4 GHz ANT Main (W/kg)	WLAN 2.4 GHz ANT Aux (W/kg)	WLAN 5 GHz ANT Main (W/kg)	WLAN 5 GHz ANT Aux (W/kg)	BT (W/kg)	$\Sigma$ 10-g SAR	$\Sigma$ 10-g SAR
Front	0.731	0.305	0.321	0.125	0.041	1.077	0.446
Back	0.506	0.540	0.305	0.218	0.024	1.070	0.523
Left-side	--	0.452	--	0.517	--	0.452	0.517
Right-side	0.499	--	0.092	--	0.017	0.516	0.092
Top	0.259	0.782	0.533	0.091	0.012	1.053	0.624

Note: The sum of value is less than 4 W/kg, thus simultaneous SAR testing is not need.

## 10. SAR measurement variability

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

Frequency		SAR 1g (W/kg)						
Channel	MHz	Original	First Repeated		Second Repeated		Third Repeated	
			Value	Ratio	Value	Ratio	Value	Ratio
1	2412	0.994	0.958	1.038	N/A	N/A	N/A	N/A
155	5775	0.870	0.869	1.001	N/A	N/A	N/A	N/A

---

**Appendix**

**Appendix A. System Check Data**

**Appendix B. Highest measurement Data**

**Appendix C. Test Setup Photographs**

**Appendix D. Probe Calibration Data**

**Appendix E. Dipole Calibration Data**

**Appendix F. Product Photos-Please refer to the file: 2330285R-Product Photos**



---

## Appendix A. System Check Data

Test Laboratory: DEKRA

Date: 2023/05/04

## System Performance Check\_2450MHz-Head

**DUT: Dipole 2450 MHz; Type: D2450V2**

Communication System: UID 10000, CW; Frequency: 2450 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.78$  S/m;  $\epsilon_r = 40.04$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(7.58, 7.58, 7.58); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/2450MHz-Head/Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 19.0 W/kg


**Configuration/2450MHz-Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 116.3 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 26.5 W/kg

**SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.24 W/kg**

Maximum value of SAR (measured) = 22.2 W/kg

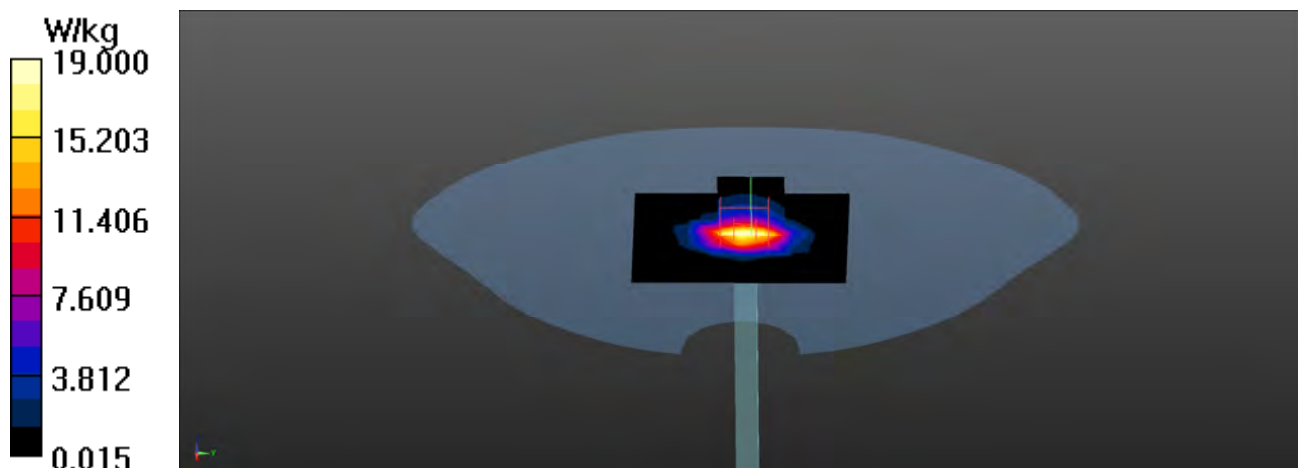

Test Laboratory: DEKRA

Date: 2023/04/17

## System Performance Check\_5250MHz-Head

**DUT: Dipole 5GHz; Type: D5GHzV2**


Communication System: UID 0, CW; Frequency: 5250 MHz; Communication System PAR: 0 dB  
Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.61$  S/m;  $\epsilon_r = 35.99$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.8, 4.8, 4.8); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASYS2, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/5250MHz-Head/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 11.1 W/kg

**Configuration/5250MHz-Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 72.43 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 26.1 W/kg  
**SAR(1 g) = 7.66 W/kg; SAR(10 g) = 2.17 W/kg**  
Maximum value of SAR (measured) = 19.5 W/kg

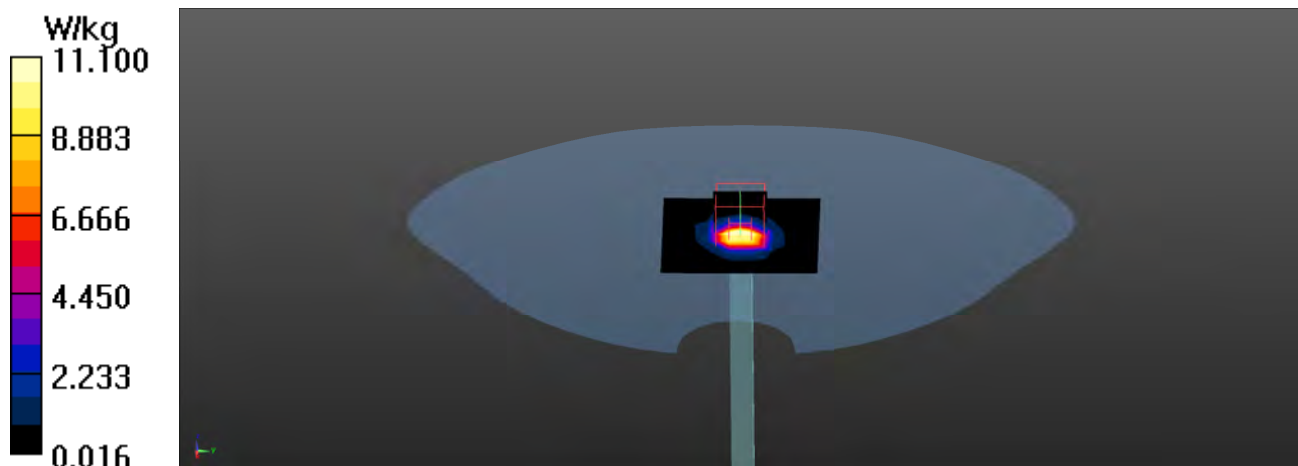

Test Laboratory: DEKRA

Date: 2023/04/17

## System Performance Check\_5600MHz-Head

**DUT: Dipole 5GHz; Type: D5GHzV2**


Communication System: UID 0, CW; Frequency: 5600 MHz; Communication System PAR: 0 dB  
Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.08$  S/m;  $\epsilon_r = 35.02$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.42, 4.42, 4.42); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASYS2, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/5600MHz-Head/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 15.3 W/kg

**Configuration/5600MHz-Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 65.66 V/m; Power Drift = 0.15 dB  
Peak SAR (extrapolated) = 30.6 W/kg  
**SAR(1 g) = 8.08 W/kg; SAR(10 g) = 2.26 W/kg**  
Maximum value of SAR (measured) = 21.2 W/kg

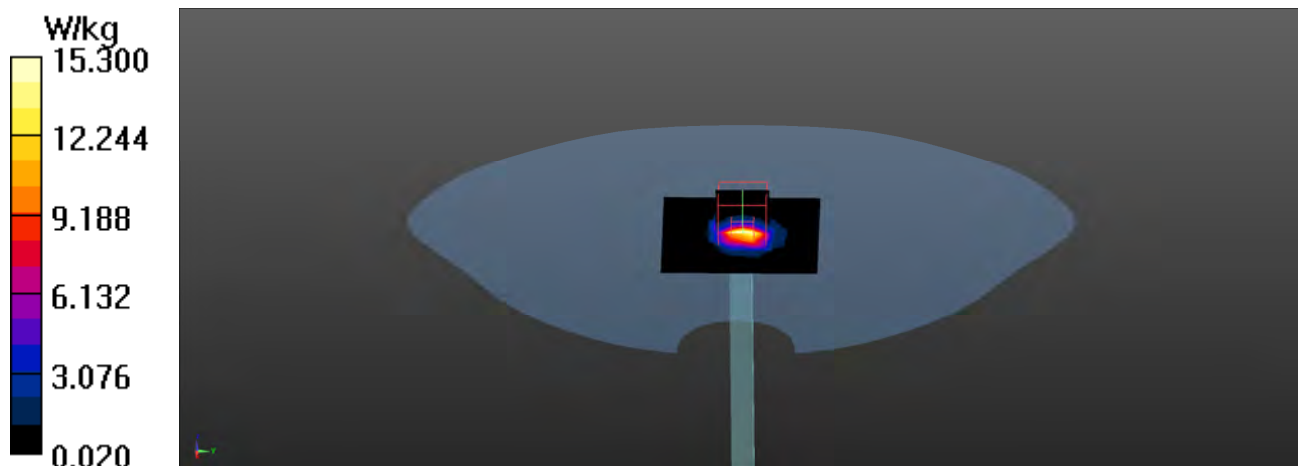

Test Laboratory: DEKRA

Date: 2023/04/17

## System Performance Check\_5800MHz-Head

**DUT: Dipole 5GHz; Type: D5GHzV2**


Communication System: UID 0, CW; Frequency: 5800 MHz; Communication System PAR: 0 dB  
Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.34$  S/m;  $\epsilon_r = 34.47$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.4, 4.4, 4.4); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASYS2, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/5800MHz-Head/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 13.1 W/kg

**Configuration/5800MHz-Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 67.91 V/m; Power Drift = 0.12 dB  
Peak SAR (extrapolated) = 30.7 W/kg  
**SAR(1 g) = 7.52 W/kg; SAR(10 g) = 2.11 W/kg**  
Maximum value of SAR (measured) = 20.4 W/kg

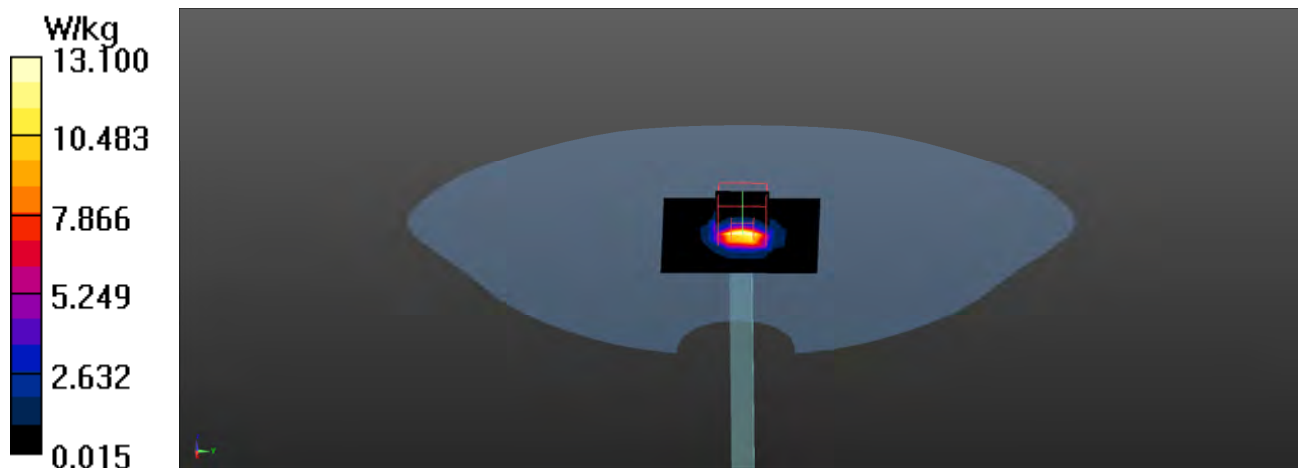

Test Laboratory: DEKRA

Date: 2023/04/21

## System Performance Check\_5250MHz-Head

**DUT: Dipole 5GHz; Type: D5GHzV2**


Communication System: UID 0, CW; Frequency: 5250 MHz; Communication System PAR: 0 dB  
Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.69$  S/m;  $\epsilon_r = 36.07$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.8, 4.8, 4.8); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/5250MHz-Head/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 11.5 W/kg

**Configuration/5250MHz-Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 75.53 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 27.9 W/kg  
**SAR(1 g) = 7.93 W/kg; SAR(10 g) = 2.24 W/kg**  
Maximum value of SAR (measured) = 20.4 W/kg

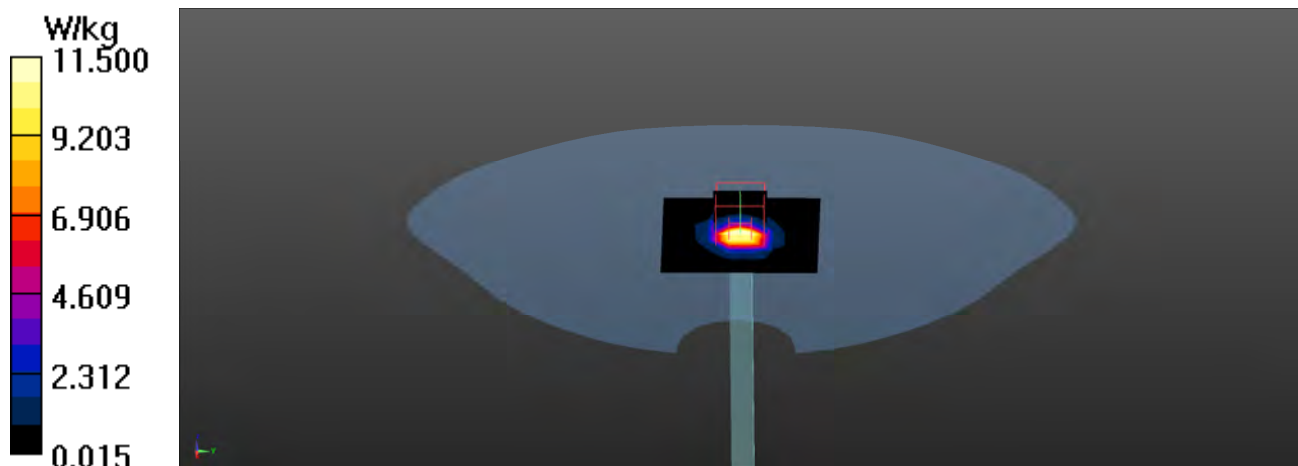

Test Laboratory: DEKRA

Date: 2023/04/21

## System Performance Check\_5600MHz-Head

**DUT: Dipole 5GHz; Type: D5GHzV2**


Communication System: UID 0, CW; Frequency: 5600 MHz; Communication System PAR: 0 dB  
Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.16$  S/m;  $\epsilon_r = 35.11$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.42, 4.42, 4.42); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASYS2, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/5600MHz-Head/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 18.8 W/kg

**Configuration/5600MHz-Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 69.76 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 32.9 W/kg  
**SAR(1 g) = 8.62 W/kg; SAR(10 g) = 2.49 W/kg**  
Maximum value of SAR (measured) = 25.7 W/kg

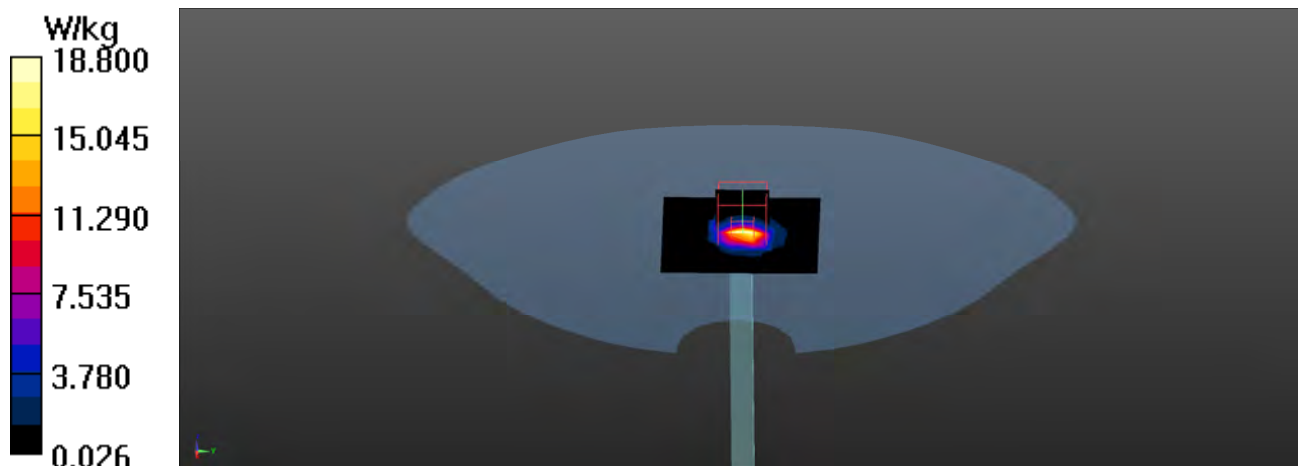

Test Laboratory: DEKRA

Date: 2023/04/21

## System Performance Check\_5800MHz-Head

**DUT: Dipole 5GHz; Type: D5GHzV2**


Communication System: UID 0, CW; Frequency: 5800 MHz; Communication System PAR: 0 dB  
Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.42$  S/m;  $\epsilon_r = 34.56$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.4, 4.4, 4.4); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASYS2, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/5800MHz-Head/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 15.5 W/kg

**Configuration/5800MHz-Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 72.35 V/m; Power Drift = 0.07 dB  
Peak SAR (extrapolated) = 34.1 W/kg  
**SAR(1 g) = 8.36 W/kg; SAR(10 g) = 2.32 W/kg**  
Maximum value of SAR (measured) = 23.4 W/kg

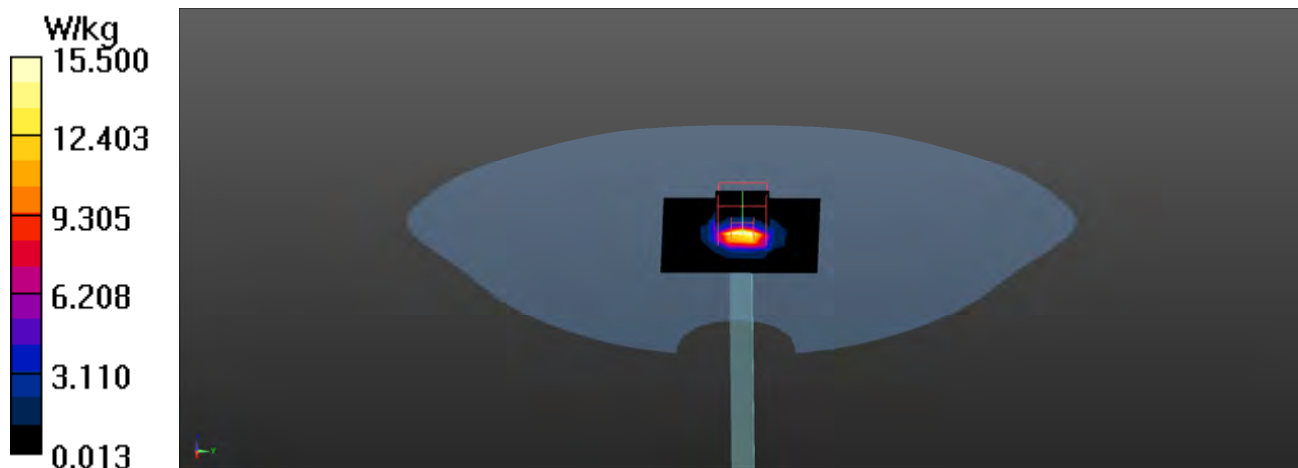



---

## Appendix B. Highest Measurement Data

Test Laboratory: DEKRA

Date: 2023/05/04

## 1\_802.11b\_1\_Left-Cheek Main

### DUT: Mobile Computer; Type: RS36W60

Communication System: UID 0, WLAN 2.4G; Frequency: 2412 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.73$  S/m;  $\epsilon_r = 40.18$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(7.58, 7.58, 7.58); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASYS2, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/Head/Area Scan (9x16x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 1.53 W/kg


**Configuration/Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.51 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.98 W/kg

**SAR(1 g) = 0.994 W/kg; SAR(10 g) = 0.482 W/kg**

Maximum value of SAR (measured) = 1.61 W/kg

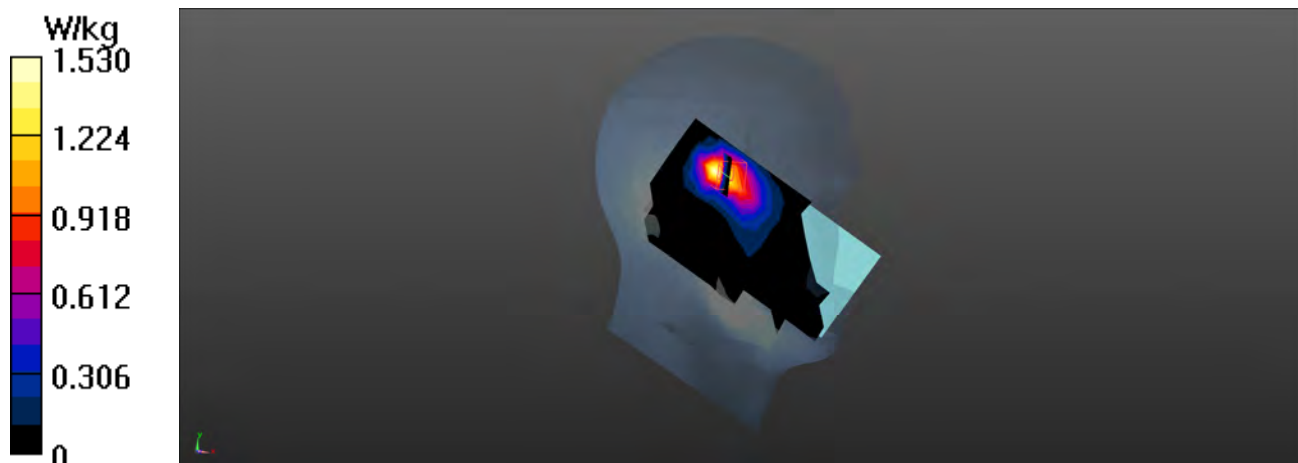

Test Laboratory: DEKRA

Date: 2023/05/04

## 2\_BT-1M\_39\_Left-Cheek Main

### DUT: Mobile Computer; Type: RS36W60

Communication System: UID 0, BT 1M&3M&BLE; Frequency: 2441 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.76$  S/m;  $\epsilon_r = 40.07$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(7.58, 7.58, 7.58); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASYS2, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/Head/Area Scan (9x18x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 0.0513 W/kg



**Configuration/Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.374 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0720 W/kg


**SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.014 W/kg**

Maximum value of SAR (measured) = 0.0569 W/kg

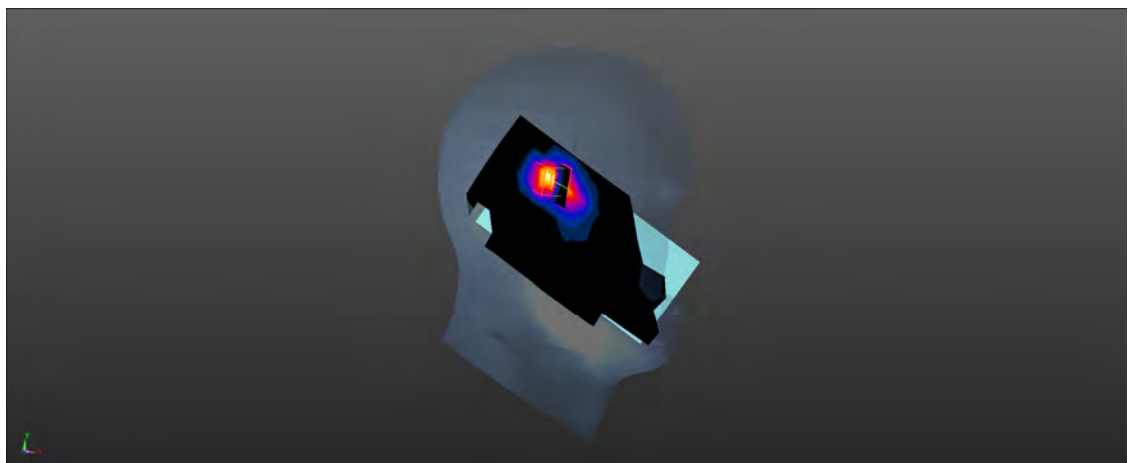

### 802.11b EUT Left-Cheek\_Head (Main Antenna), Z-Axis plot

Channel: 1

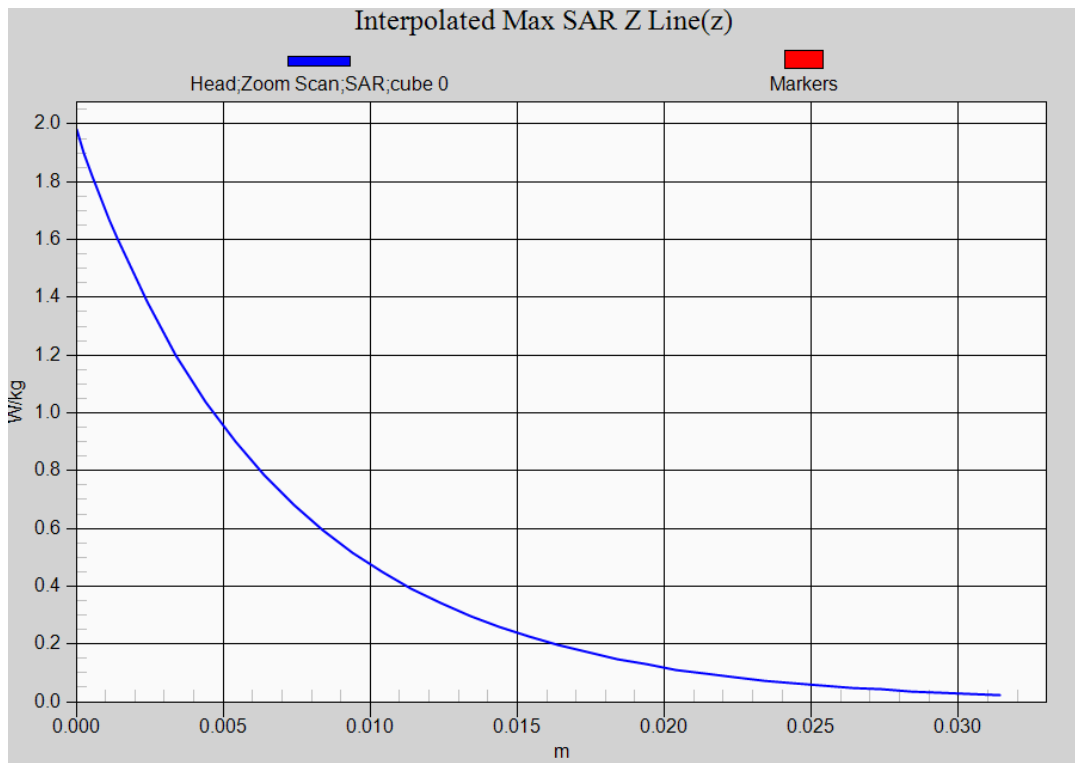

Test Laboratory: DEKRA

Date: 2023/05/04

### 3\_802.11b\_11\_Back Aux\_10mm

#### DUT: Mobile Computer; Type: RS36W60

Communication System: UID 0, WLAN 2.4G; Frequency: 2462 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.79$  S/m;  $\epsilon_r = 39.99$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(7.58, 7.58, 7.58); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASYS2, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/Flat/Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 0.426 W/kg


**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.49 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.579 W/kg

**SAR(1 g) = 0.306 W/kg; SAR(10 g) = 0.162 W/kg**

Maximum value of SAR (measured) = 0.473 W/kg

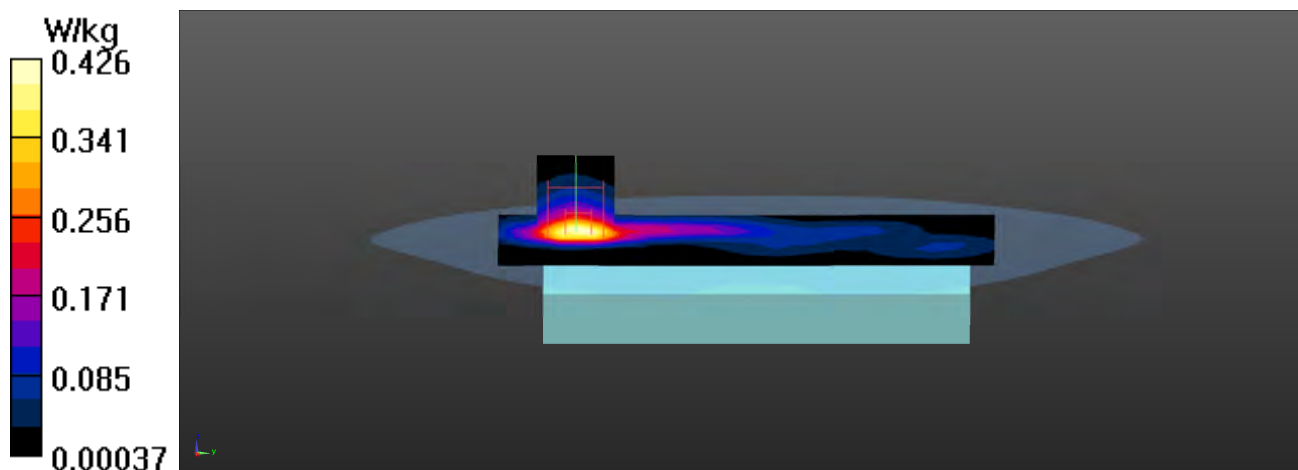

Test Laboratory: DEKRA

Date: 2023/05/04

#### 4\_BT-1M\_39\_Front Main\_10mm

##### DUT: Mobile Computer; Type: RS36W60

Communication System: UID 0, BT 1M&3M&BLE; Frequency: 2441 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.76$  S/m;  $\epsilon_r = 40.07$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

##### DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(7.58, 7.58, 7.58); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASYS2, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/Flat/Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 0.0128 W/kg


**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.469 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0200 W/kg


**SAR(1 g) = 0.0091 W/kg; SAR(10 g) = 0.00296 W/kg**

Maximum value of SAR (measured) = 0.0165 W/kg

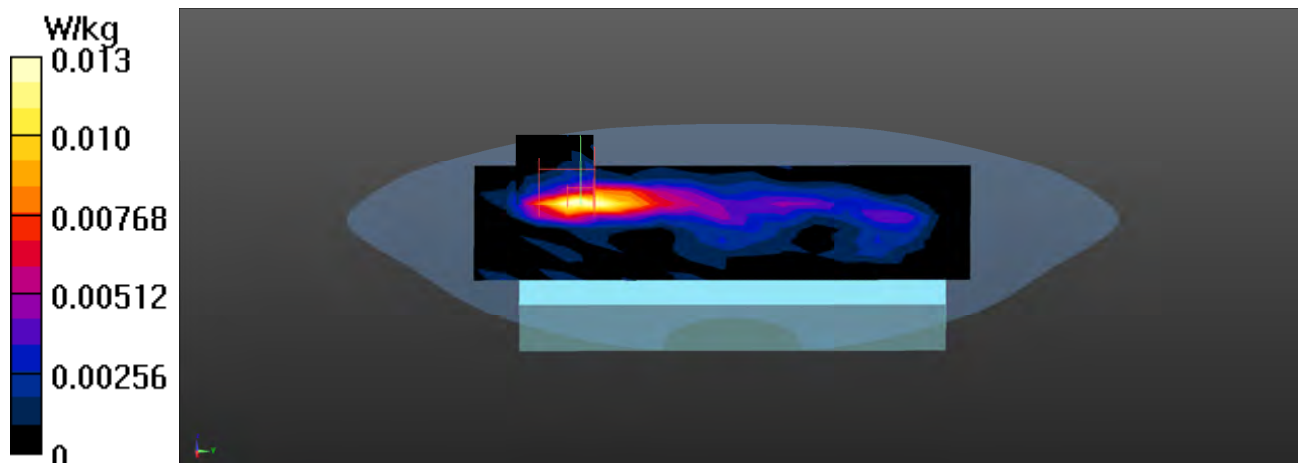

**802.11b EUT Back\_10mm\_Body (Aux Antenna), Z-Axis plot**

**Channel: 11**

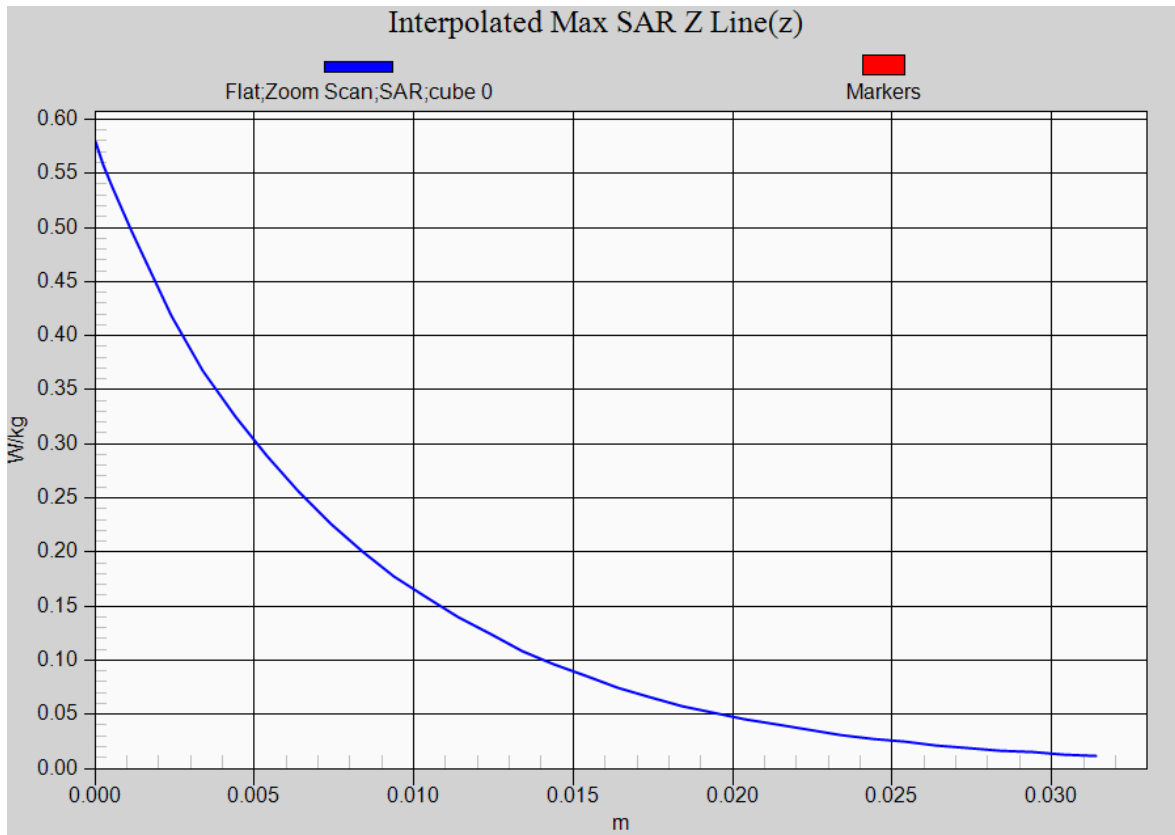

Test Laboratory: DEKRA

Date: 2023/05/04

## 5\_802.11b\_11\_Top Aux\_0mm

### DUT: Mobile Computer; Type: RS36W60

Communication System: UID 0, WLAN 2.4G; Frequency: 2462 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.79$  S/m;  $\epsilon_r = 39.99$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(7.58, 7.58, 7.58); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASYS2, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/Flat/Area Scan (7x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 2.28 W/kg


**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 37.95 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.30 W/kg

**SAR(1 g) = 1.52 W/kg; SAR(10 g) = 0.669 W/kg**

Maximum value of SAR (measured) = 2.67 W/kg

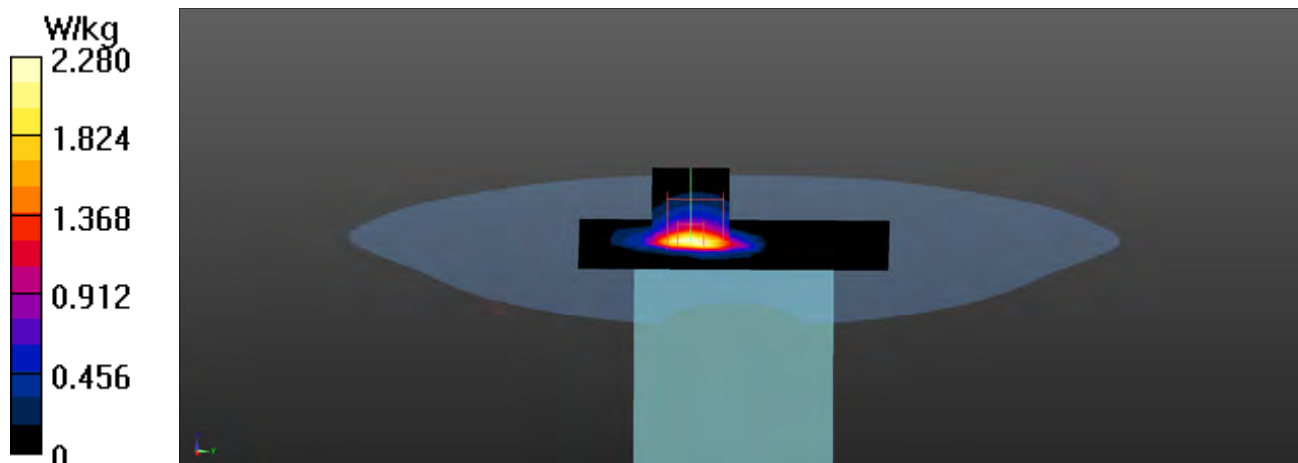



Test Laboratory: DEKRA

Date: 2023/05/04

## 6\_BT-1M\_39\_Front Main\_0mm

### DUT: Mobile Computer; Type: RS36W60

Communication System: UID 0, BT 1M&3M&BLE; Frequency: 2441 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.76$  S/m;  $\epsilon_r = 40.07$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(7.58, 7.58, 7.58); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASYS2, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/Flat/Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 0.108 W/kg


**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.202 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.155 W/kg


**SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.029 W/kg**

Maximum value of SAR (measured) = 0.114 W/kg

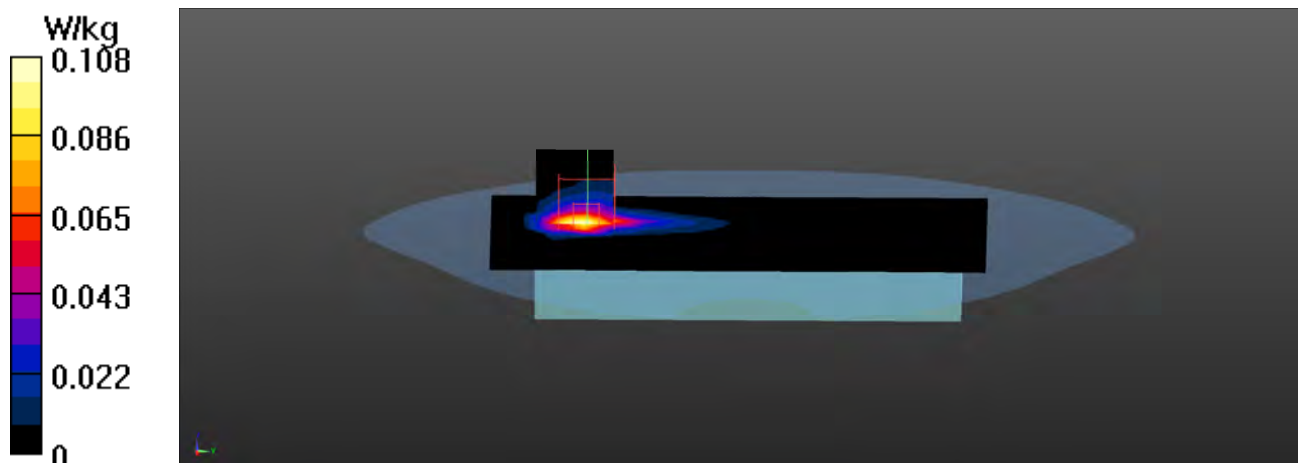

**802.11b EUT Top\_Product Specific 10g(Extremity) (Aux Antenna), Z-Axis plot**

**Channel: 11**

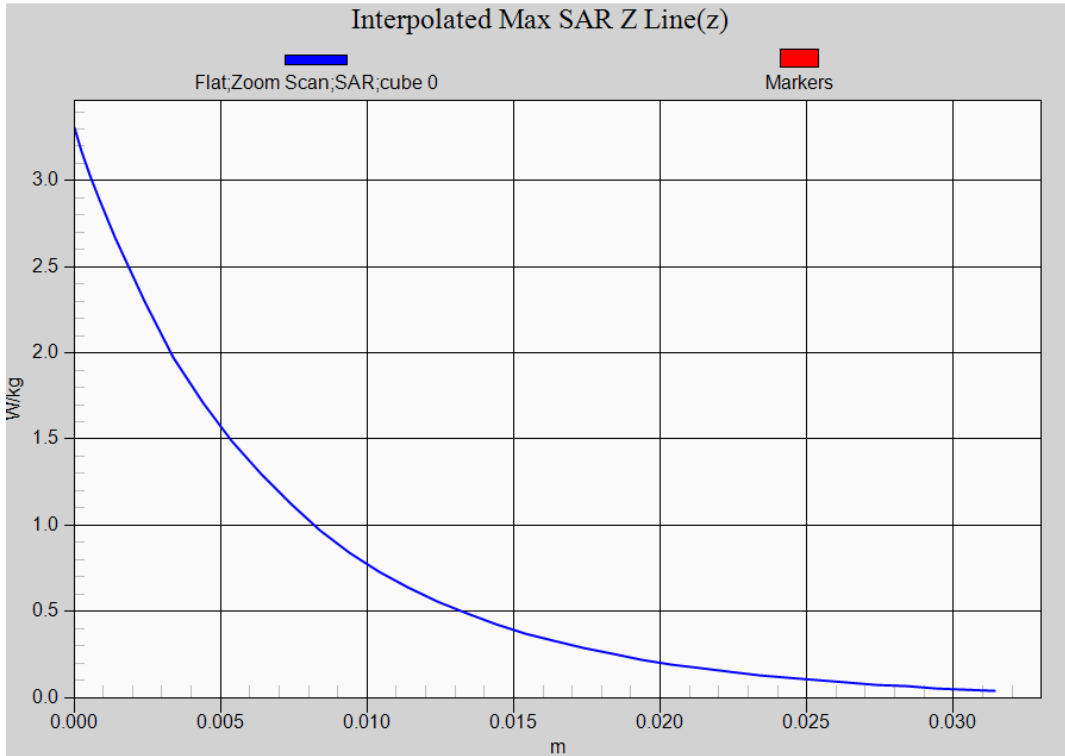

Test Laboratory: DEKRA

Date: 2023/04/21

## 7\_802.11ac80M\_58\_Left-Tilt Main

### DUT: Mobile Computer; Type: RS36W60

Communication System: UID 0, WLAN 5G; Frequency: 5290 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5290$  MHz;  $\sigma = 4.74$  S/m;  $\epsilon_r = 35.96$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.8, 4.8, 4.8); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASYS2, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

#### Configuration/Head/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.56 W/kg



#### Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 21.99 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 2.82 W/kg

**SAR(1 g) = 0.738 W/kg; SAR(10 g) = 0.239 W/kg**

Maximum value of SAR (measured) = 1.76 W/kg

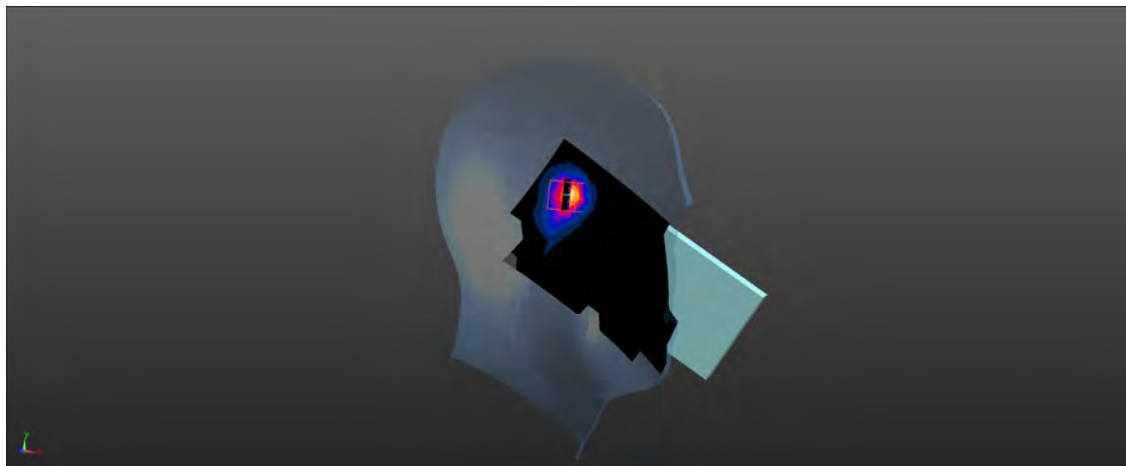

Test Laboratory: DEKRA

Date: 2023/04/21

## 8\_802.11ac80M\_138\_Left-Tilt Main

### DUT: Mobile Computer; Type: RS36W60

Communication System: UID 0, WLAN 5G; Frequency: 5690 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5690$  MHz;  $\sigma = 5.28$  S/m;  $\epsilon_r = 34.87$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.42, 4.42, 4.42); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/Head/Area Scan (11x20x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 1.28 W/kg


**Configuration/Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 19.36 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.98 W/kg

**SAR(1 g) = 0.685 W/kg; SAR(10 g) = 0.220 W/kg**

Maximum value of SAR (measured) = 1.66 W/kg

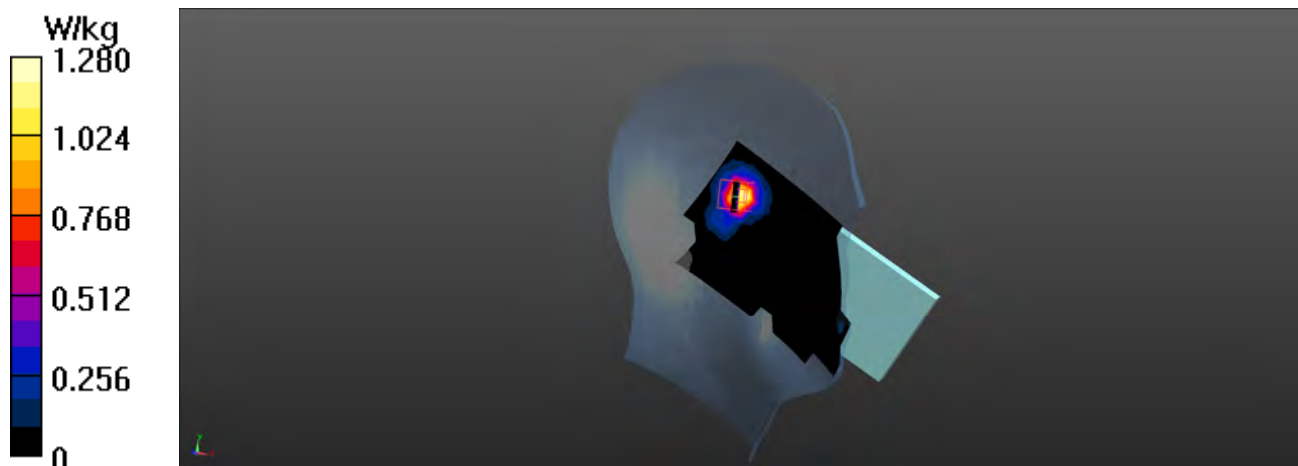

Test Laboratory: DEKRA

Date: 2023/04/21

## 9\_802.11ac80M\_155\_Left-Tilt Main

### DUT: Mobile Computer; Type: RS36W60

Communication System: UID 0, WLAN 5G; Frequency: 5775 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.42$  S/m;  $\epsilon_r = 34.63$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.4, 4.4, 4.4); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASYS2, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/Head/Area Scan (11x20x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 1.81 W/kg



**Configuration/Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 7.780 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 3.62 W/kg


**SAR(1 g) = 0.870 W/kg; SAR(10 g) = 0.279 W/kg**

Maximum value of SAR (measured) = 2.12 W/kg

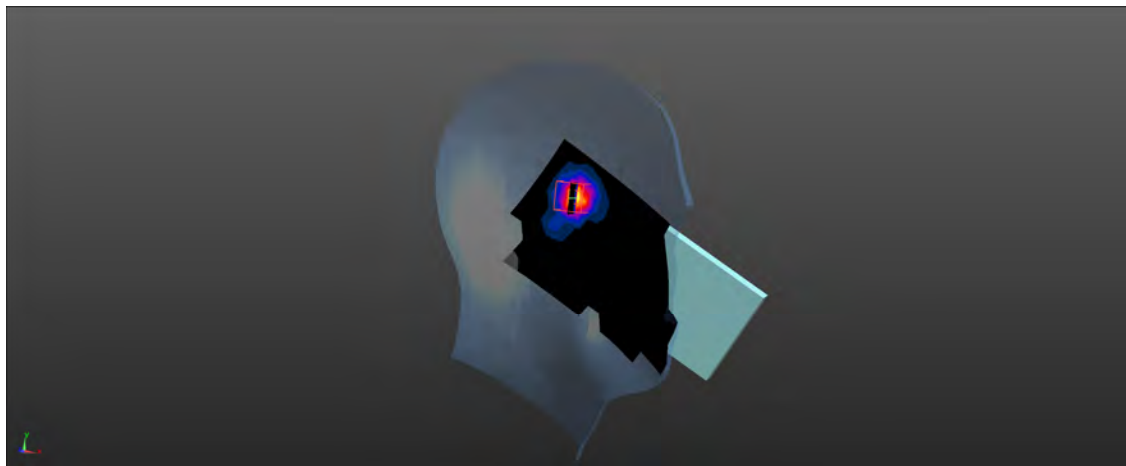

**802.11ac80M EUT Left-Tilt\_Head (Main Antenna), Z-Axis plot**

**Channel: 155**

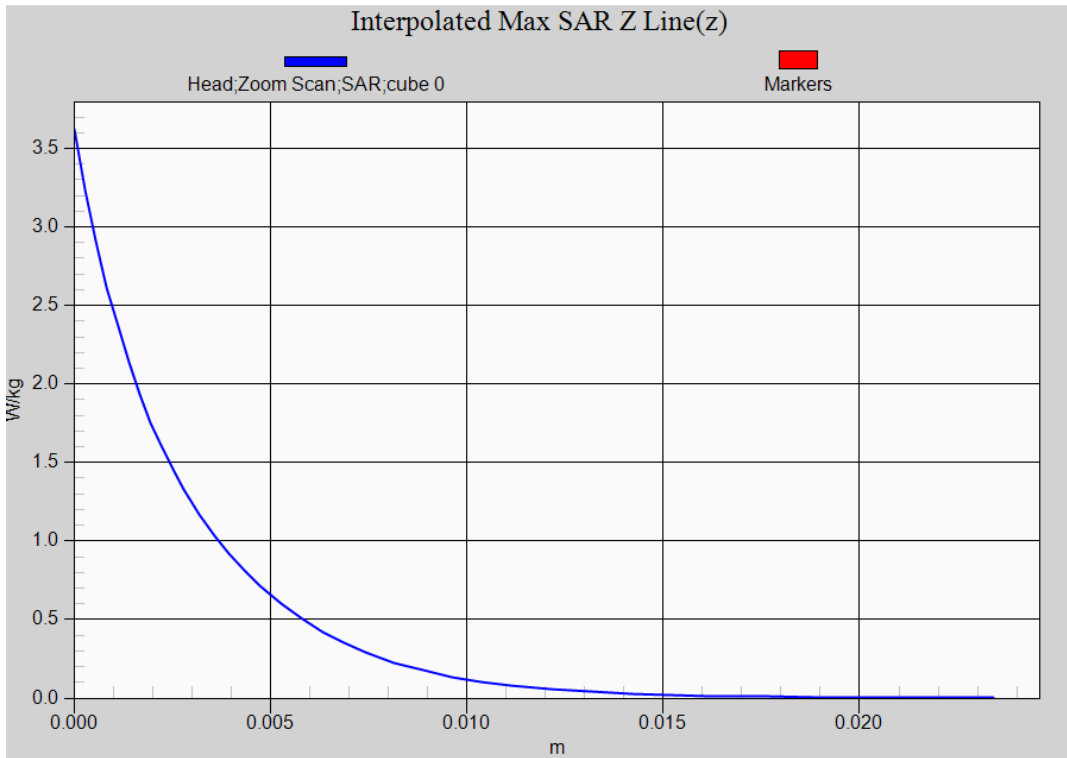

Test Laboratory: DEKRA

Date: 2023/04/17

## 10\_802.11ac80M\_58\_Front Main\_10mm

### DUT: Mobile Computer; Type: RS36W60

Communication System: UID 0, WLAN 5G; Frequency: 5290 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5290$  MHz;  $\sigma = 4.66$  S/m;  $\epsilon_r = 35.88$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.8, 4.8, 4.8); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASYS2, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/Flat/Area Scan (11x21x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.437 W/kg


**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 9.061 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.745 W/kg

**SAR(1 g) = 0.198 W/kg; SAR(10 g) = 0.078 W/kg**

Maximum value of SAR (measured) = 0.449 W/kg

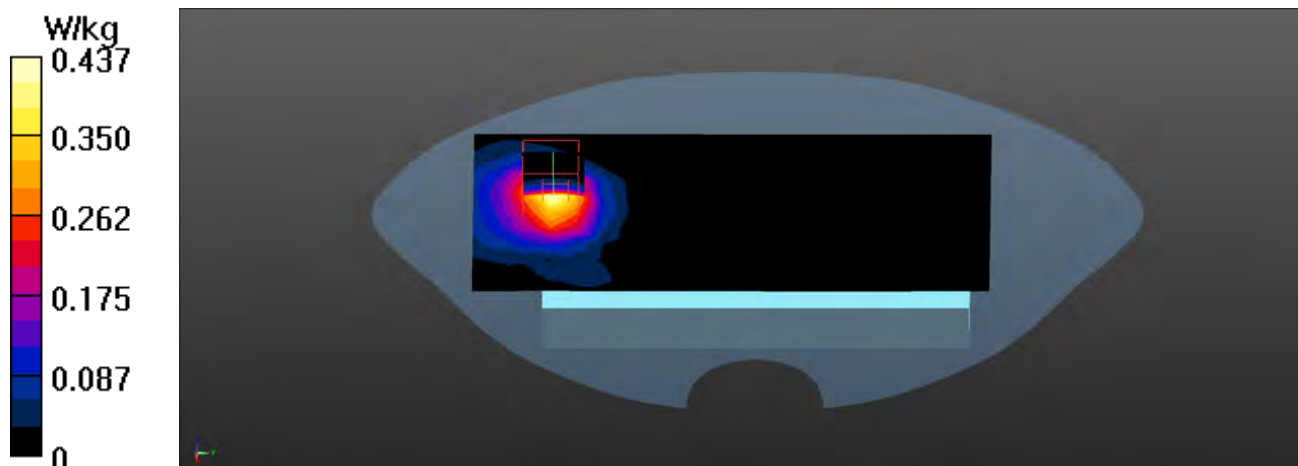

Test Laboratory: DEKRA

Date: 2023/04/17

## 11\_802.11ac80M\_155\_Front Main\_10mm

### DUT: Mobile Computer; Type: RS36W60

Communication System: UID 0, WLAN 5G; Frequency: 5775 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.31$  S/m;  $\epsilon_r = 34.54$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.4, 4.4, 4.4); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASYS2, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/Flat/Area Scan (11x21x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.588 W/kg


**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 11.44 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.095 W/kg**

Maximum value of SAR (measured) = 0.617 W/kg

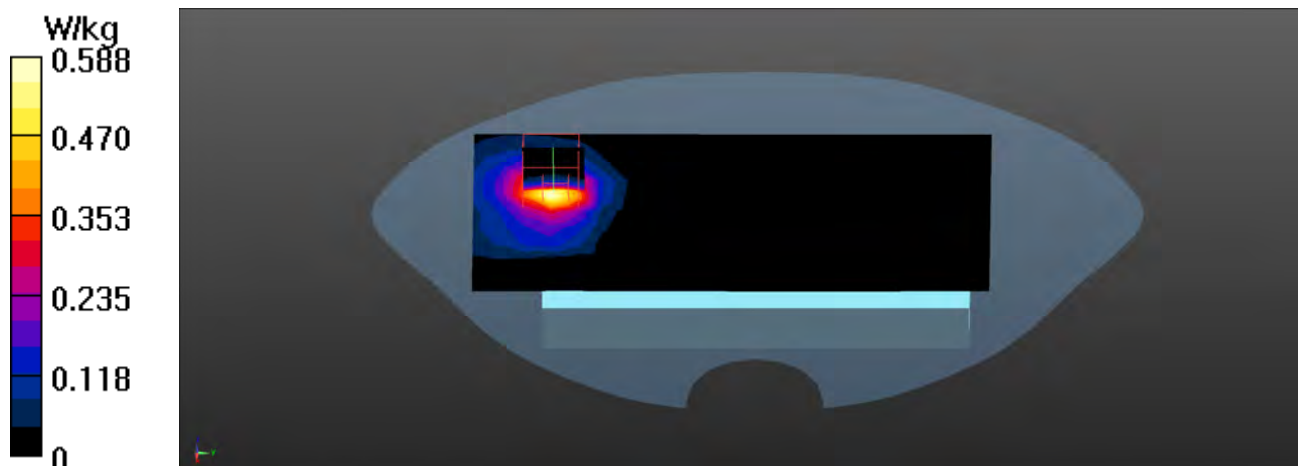



Test Laboratory: DEKRA

Date: 2023/04/17

## 12\_802.11ac80M\_42\_Top Main\_10mm

### DUT: Mobile Computer; Type: RS36W60

Communication System: UID 0, WLAN 5G; Frequency: 5210 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5210$  MHz;  $\sigma = 4.55$  S/m;  $\epsilon_r = 36.11$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.8, 4.8, 4.8); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASYS2, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/Flat/Area Scan (9x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.386 W/kg


**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 10.61 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.691 W/kg

**SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.072 W/kg**

Maximum value of SAR (measured) = 0.424 W/kg

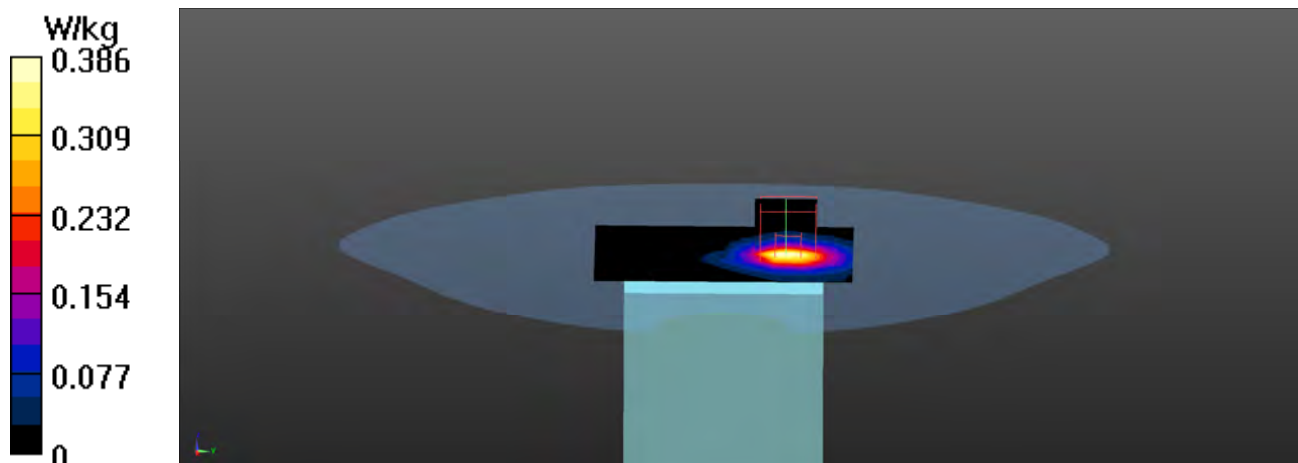

Test Laboratory: DEKRA

Date: 2023/04/17

### 13\_802.11ac80M\_122\_Back Aux\_10mm

#### DUT: Mobile Computer; Type: RS36W60

Communication System: UID 0, WLAN 5G; Frequency: 5610 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5610$  MHz;  $\sigma = 5.09$  S/m;  $\epsilon_r = 35.01$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.42, 4.42, 4.42); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASYS2, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/Flat/Area Scan (12x19x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.546 W/kg


**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.812 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.932 W/kg

**SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.087 W/kg**

Maximum value of SAR (measured) = 0.557 W/kg

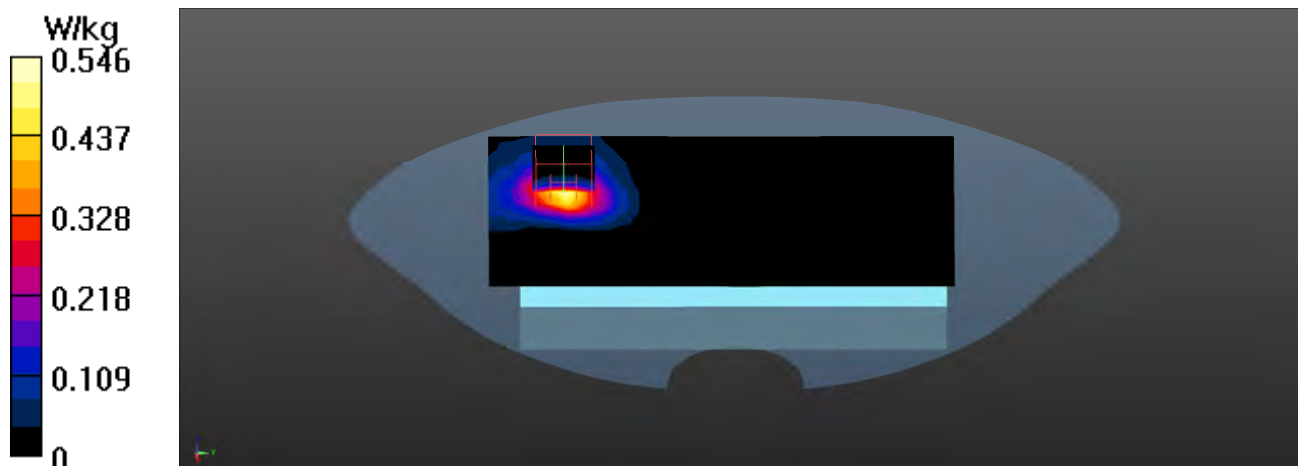

Test Laboratory: DEKRA

Date: 2023/04/17

## 14\_802.11ac80M\_155\_Left-side Aux\_10mm

### DUT: Mobile Computer; Type: RS36W60

Communication System: UID 0, WLAN 5G; Frequency: 5775 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.31$  S/m;  $\epsilon_r = 34.54$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

### DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.4, 4.4, 4.4); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASYS2, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/Flat/Area Scan (7x18x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.739 W/kg


**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 12.77 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.26 W/kg


**SAR(1 g) = 0.313 W/kg; SAR(10 g) = 0.112 W/kg**

Maximum value of SAR (measured) = 0.718 W/kg

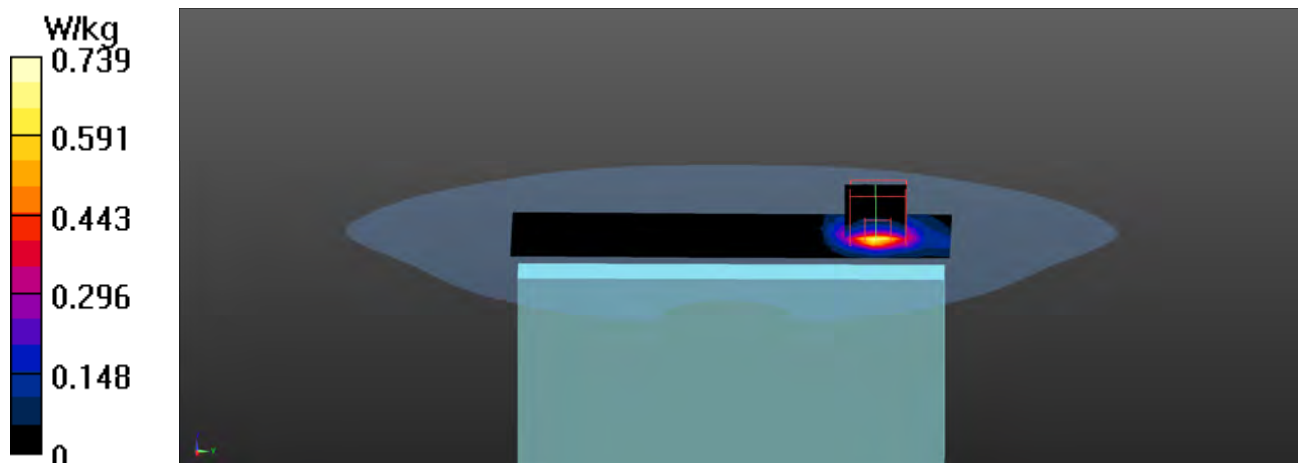

802.11ac80M EUT Left-side\_10mm\_Body (Aux Antenna), Z-Axis plot

Channel: 155

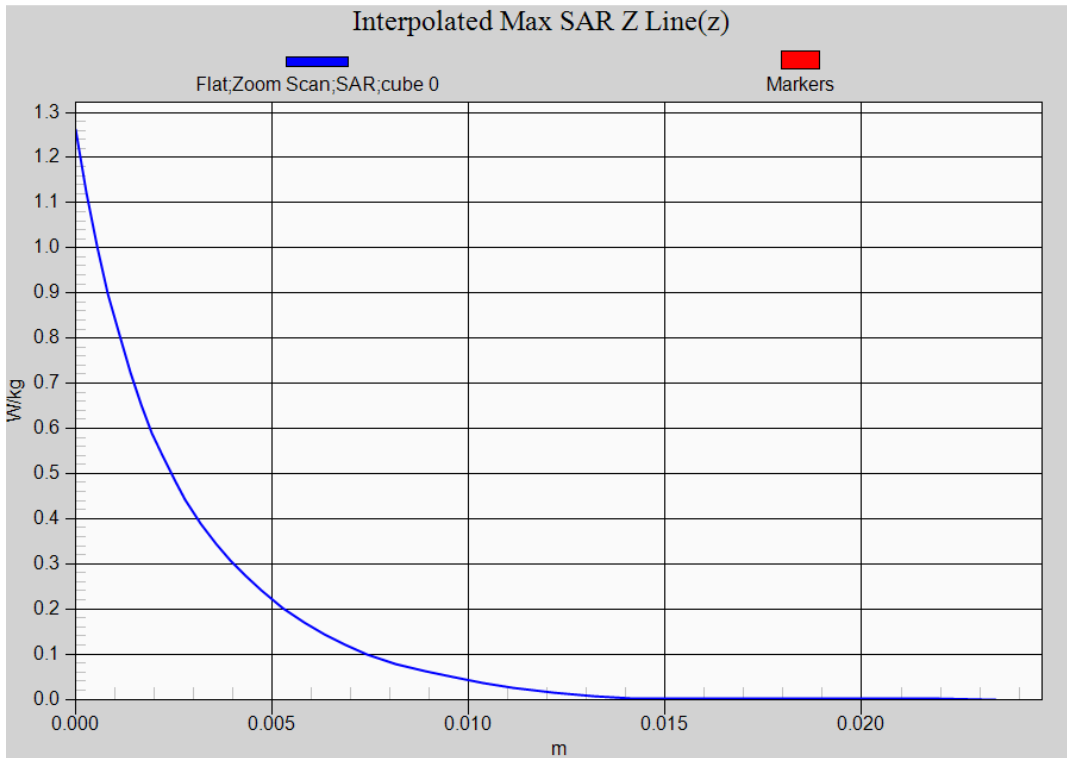

Test Laboratory: DEKRA

Date: 2023/04/17

## 15\_802.11ac80M\_58\_Top Main\_0mm

### DUT: Mobile Computer; Type: RS36W60

Communication System: UID 0, WLAN 5G; Frequency: 5290 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5290$  MHz;  $\sigma = 4.66$  S/m;  $\epsilon_r = 35.88$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.8, 4.8, 4.8); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASYS2, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/Flat/Area Scan (9x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 4.45 W/kg


**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.030 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 9.13 W/kg

**SAR(1 g) = 1.87 W/kg; SAR(10 g) = 0.468 W/kg**

Maximum value of SAR (measured) = 5.11 W/kg

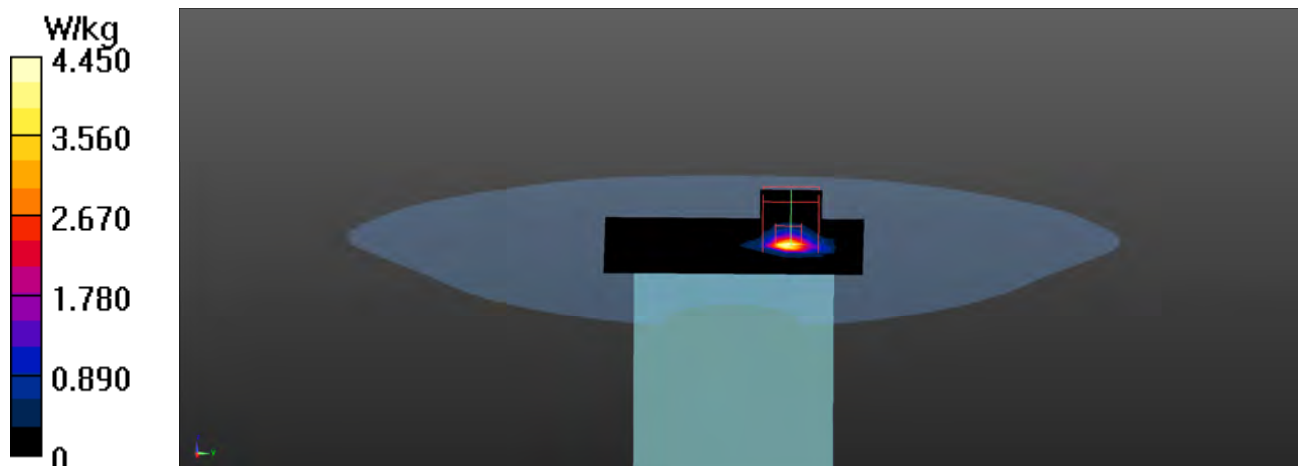

Test Laboratory: DEKRA

Date: 2023/04/17

## 802.11ac80M\_138\_Top Main\_0mm

### DUT: Mobile Computer; Type: RS36W60

Communication System: UID 0, WLAN 5G; Frequency: 5690 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5690$  MHz;  $\sigma = 5.19$  S/m;  $\epsilon_r = 34.78$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.42, 4.42, 4.42); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASYS2, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/Flat/Area Scan (9x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 3.48 W/kg


**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 33.06 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 9.41 W/kg

**SAR(1 g) = 1.62 W/kg; SAR(10 g) = 0.410 W/kg**

Maximum value of SAR (measured) = 4.81 W/kg

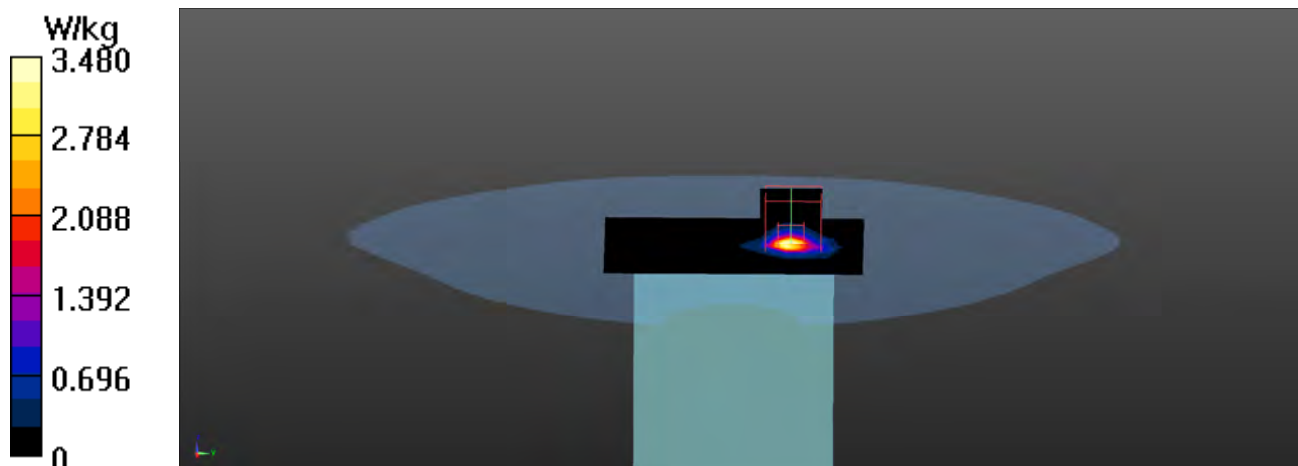

Test Laboratory: DEKRA

Date: 2023/04/17

## 802.11ac80M\_155\_Top Main\_0mm

### DUT: Mobile Computer; Type: RS36W60

Communication System: UID 0, WLAN 5G; Frequency: 5775 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.31$  S/m;  $\epsilon_r = 34.54$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.4, 4.4, 4.4); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/Flat/Area Scan (9x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 4.39 W/kg


**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 33.21 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 10.5 W/kg


**SAR(1 g) = 1.84 W/kg; SAR(10 g) = 0.466 W/kg**

Maximum value of SAR (measured) = 5.38 W/kg

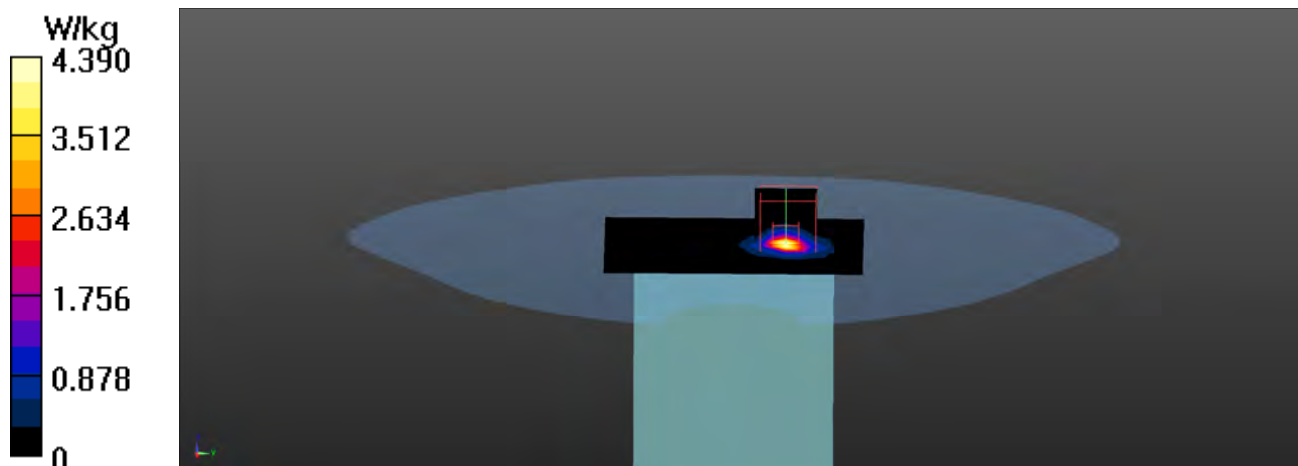

802.11ac80M EUT Top\_Product Specific 10g(Extremity) (Main Antenna), Z-Axis plot

Channel: 58

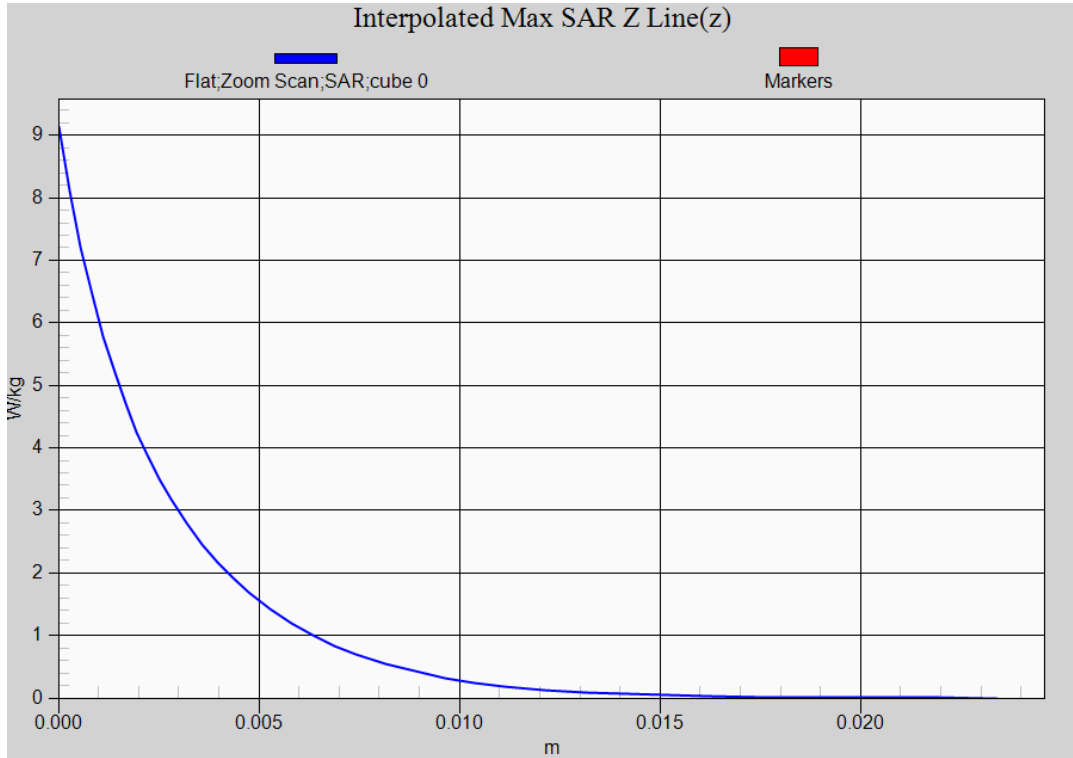



## SAR measurement variability

Test Laboratory: DEKRA

Date: 2023/05/04

### 802.11b\_1\_Left-Cheek Main-Verify

#### DUT: Mobile Computer; Type: RS36W60

Communication System: UID 0, WLAN 2.4G; Frequency: 2412 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.73$  S/m;  $\epsilon_r = 40.18$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(7.58, 7.58, 7.58); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASYS2, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/Head/Area Scan (9x16x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 1.46 W/kg



**Configuration/Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.33 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.90 W/kg

**SAR(1 g) = 0.958 W/kg; SAR(10 g) = 0.461 W/kg**

Maximum value of SAR (measured) = 1.56 W/kg

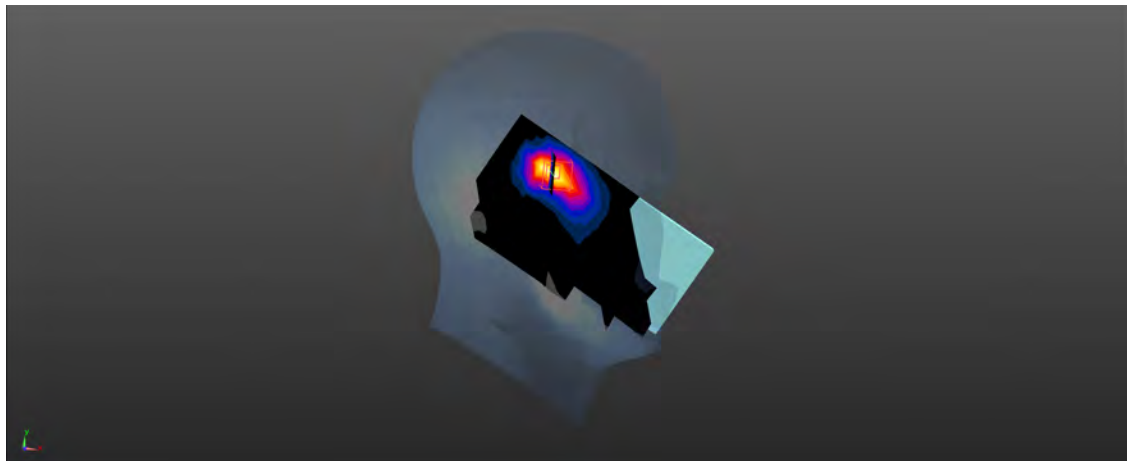

Test Laboratory: DEKRA

Date: 2023/04/21

## 802.11ac80M\_155\_Left-Tilt Main-Verify

### DUT: Mobile Computer; Type: RS36W60

Communication System: UID 0, WLAN 5G; Frequency: 5775 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.42$  S/m;  $\epsilon_r = 34.63$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.4, 4.4, 4.4); Calibrated: 2022/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Configuration/Head/Area Scan (11x20x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 2.07 W/kg


**Configuration/Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.927 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 3.96 W/kg

**SAR(1 g) = 0.869 W/kg; SAR(10 g) = 0.277 W/kg**

Maximum value of SAR (measured) = 2.11 W/kg

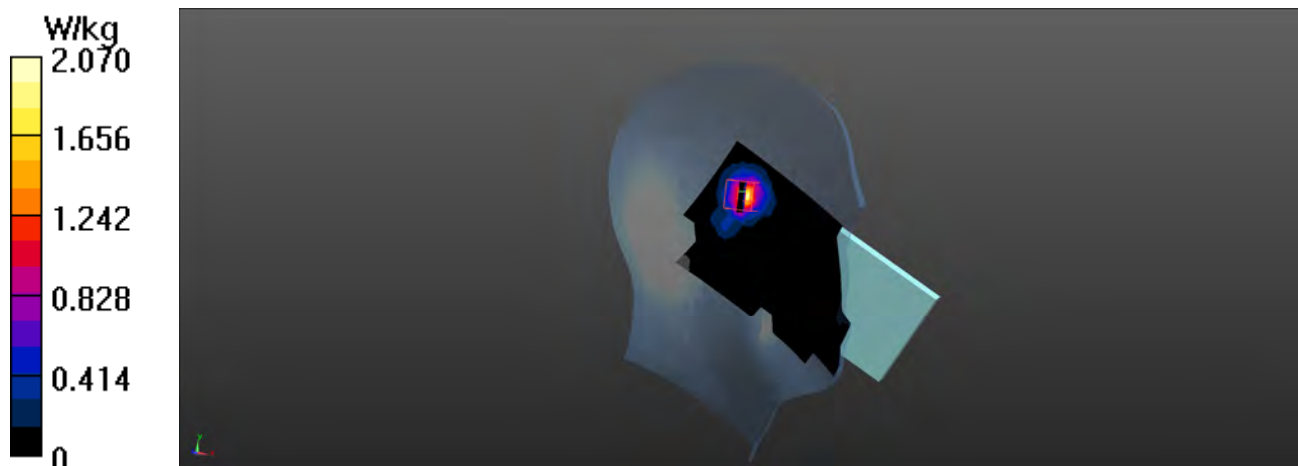

---

## Appendix D. Probe Calibration



Accredited by the Swiss Accreditation Service (SAS)  
**The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates**

Accreditation No.: **SCS 0108**

Client **DEKRA (Auden)**

Certificate No **EX-3979\_Nov22**

**CALIBRATION CERTIFICATE**

Object **EX3DV4 - SN:3979**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v6, QA CAL-23.v5, QA CAL-25.v7  
 Calibration procedure for dosimetric E-field probes**

Calibration date **November 23, 2022**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3) °C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-22 (No. 217-03525/03524)	Apr-23
Power sensor NRP-Z91	SN: 103244	04-Apr-22 (No. 217-03524)	Apr-23
OCP DAK-3.5 (weighted)	SN: 1249	20-Oct-22 (OCP-DAK3.5-1249_Oct22)	Oct-23
OCP DAK-12	SN: 1016	20-Oct-22 (OCP-DAK12-1016_Oct22)	Oct-23
Reference 20 dB Attenuator	SN: CC2552 (20x)	04-Apr-22 (No. 217-03527)	Apr-23
DAE4	SN: 660	10-Oct-22 (No. DAE4-660_Oct22)	Oct-23
Reference Probe ES3DV2	SN: 3013	27-Dec-21 (No. ES3-3013_Dec21)	Dec-22

Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-22)	In house check: Jun-24
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

	Name	Function	Signature
Calibrated by	Jeffrey Katzman	Laboratory Technician	
Approved by	Sven Kühn	Technical Manager	

Issued: November 23, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



## Calibration Laboratory of

Schmid & Partner  
Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

## Glossary

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

## Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices – Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

## Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal. DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

## Parameters of Probe: EX3DV4 - SN:3979

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k = 2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	0.46	0.49	0.47	$\pm 10.1\%$
DCP (mV) <sup>B</sup>	103.0	101.0	103.4	$\pm 4.7\%$

### Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Max dev.	Max Unc <sup>E</sup> k = 2
0	CW	X	0.00	0.00	1.00	0.00	163.8	$\pm 1.7\%$	$\pm 4.7\%$
		Y	0.00	0.00	1.00		165.4		
		Z	0.00	0.00	1.00		158.1		

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 5).

<sup>B</sup> Linearization parameter uncertainty for maximum specified field strength.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

**Parameters of Probe: EX3DV4 - SN:3979****Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle	136.0°
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Note: Measurement distance from surface can be increased to 3–4 mm for an *Area Scan* job.

## Parameters of Probe: EX3DV4 - SN:3979

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity <sup>F</sup> (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unc (k = 2)
450	43.5	0.87	10.79	10.79	10.79	0.16	1.30	±13.3%
750	41.9	0.89	10.47	10.47	10.47	0.54	0.80	±12.0%
835	41.5	0.90	10.05	10.05	10.05	0.53	0.80	±12.0%
900	41.5	0.97	9.73	9.73	9.73	0.49	0.80	±12.0%
1450	40.5	1.20	8.47	8.47	8.47	0.54	0.80	±12.0%
1640	40.2	1.31	8.48	8.48	8.48	0.38	0.86	±12.0%
1750	40.1	1.37	8.34	8.34	8.34	0.35	0.86	±12.0%
1950	40.0	1.40	8.12	8.12	8.12	0.39	0.86	±12.0%
2300	39.5	1.67	7.87	7.87	7.87	0.31	0.90	±12.0%
2450	39.2	1.80	7.58	7.58	7.58	0.34	0.90	±12.0%
2600	39.0	1.96	7.38	7.38	7.38	0.41	0.90	±12.0%
3300	38.2	2.71	6.92	6.92	6.92	0.40	1.30	±13.1%
3500	37.9	2.91	6.85	6.85	6.85	0.40	1.30	±13.1%
3700	37.7	3.12	6.82	6.82	6.82	0.35	1.30	±13.1%
5250	35.9	4.71	4.80	4.80	4.80	0.40	1.80	±13.1%
5600	35.5	5.07	4.42	4.42	4.42	0.40	1.80	±13.1%
5800	35.3	5.27	4.40	4.40	4.40	0.40	1.80	±13.1%


<sup>C</sup> Frequency validity above 300 MHz of ±100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ±50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ±10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4–9 MHz, and ConvF assessed at 13 MHz is 9–19 MHz. Above 5 GHz frequency validity can be extended to ±110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz and below ±2% for frequencies between 3–6 GHz at any distance larger than half the probe tip diameter from the boundary.





### Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide:R22)

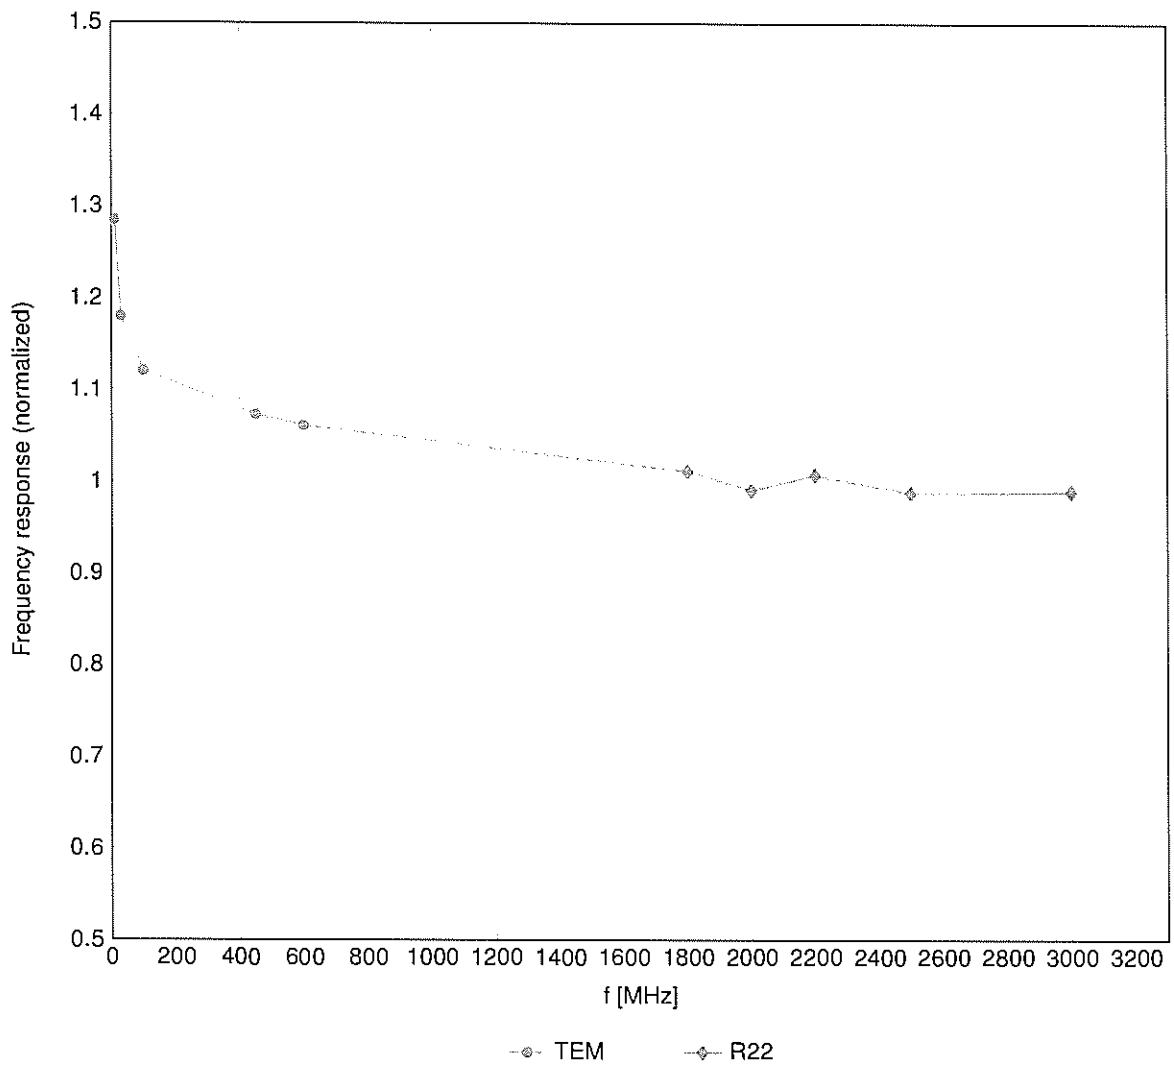

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)



### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

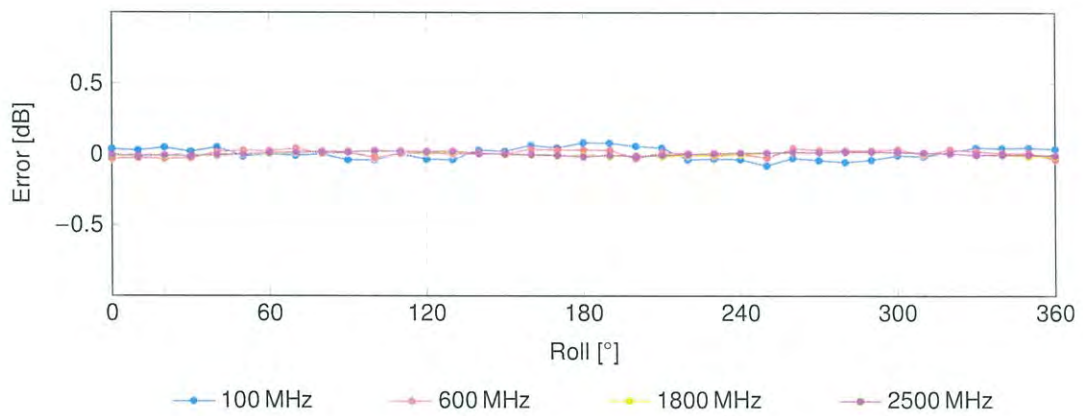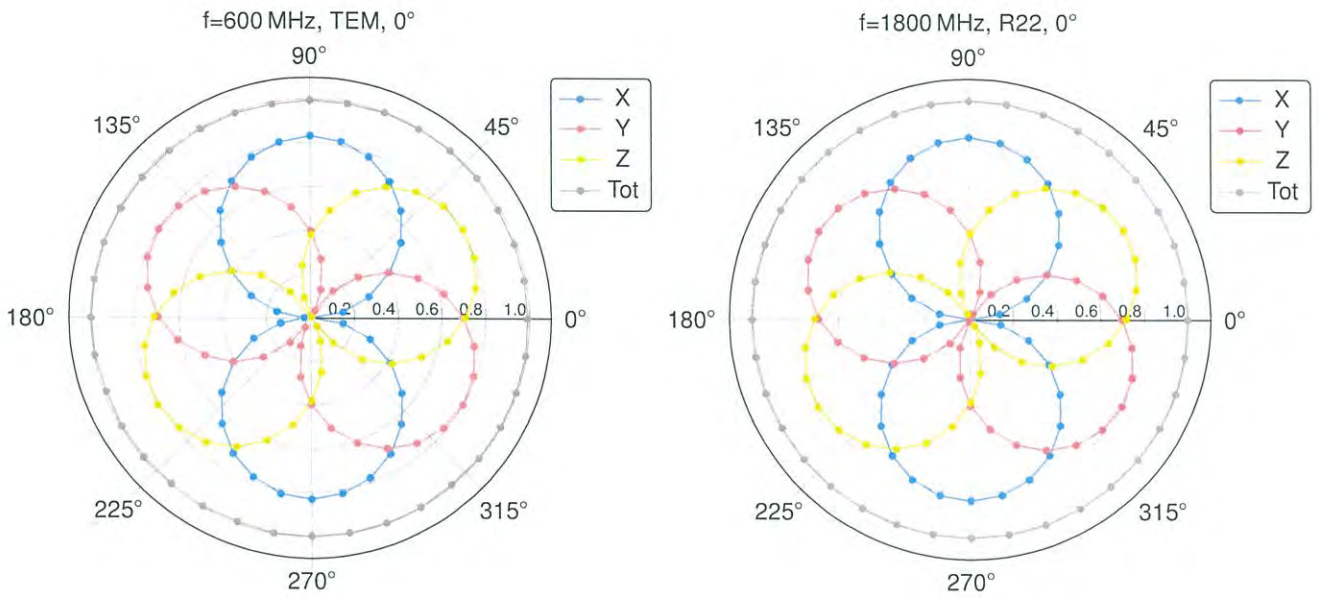

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )


### Dynamic Range f(SAR<sub>head</sub>)

(TEM cell, f<sub>eval</sub> = 1900 MHz)

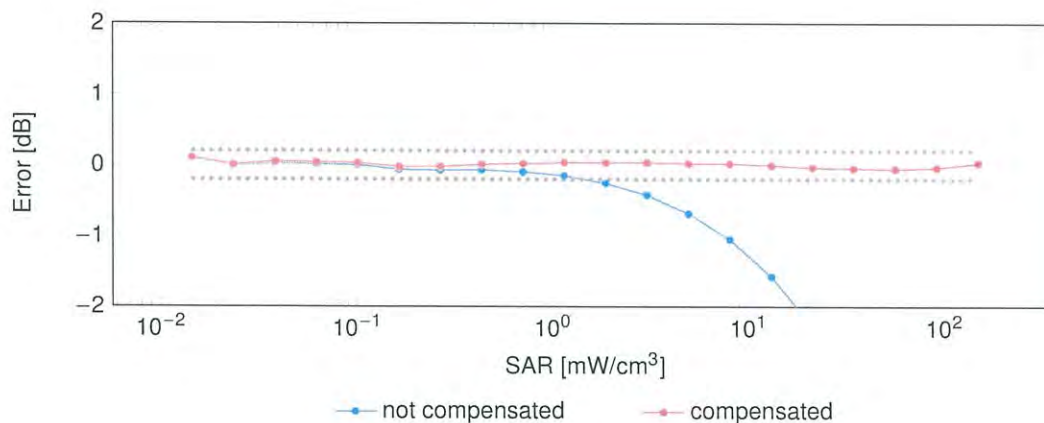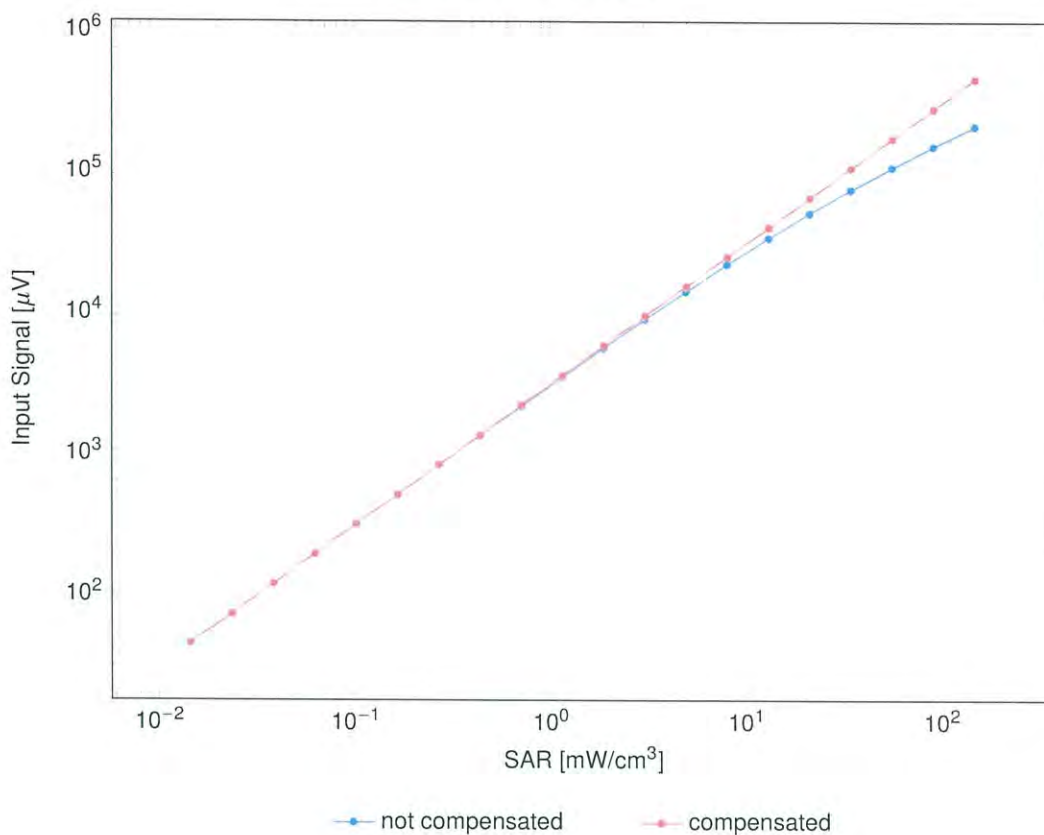


Uncertainty of Linearity Assessment: ±0.6% (k=2)

### Conversion Factor Assessment

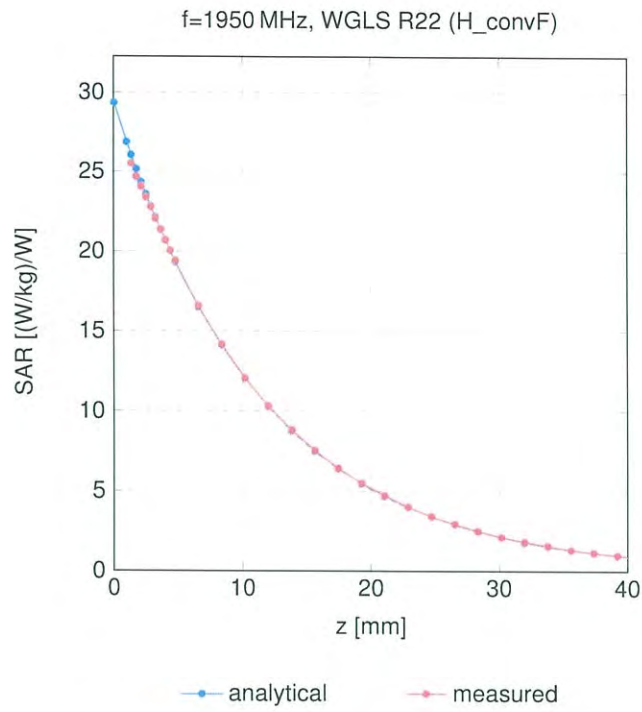

### Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ), f = 900 MHz

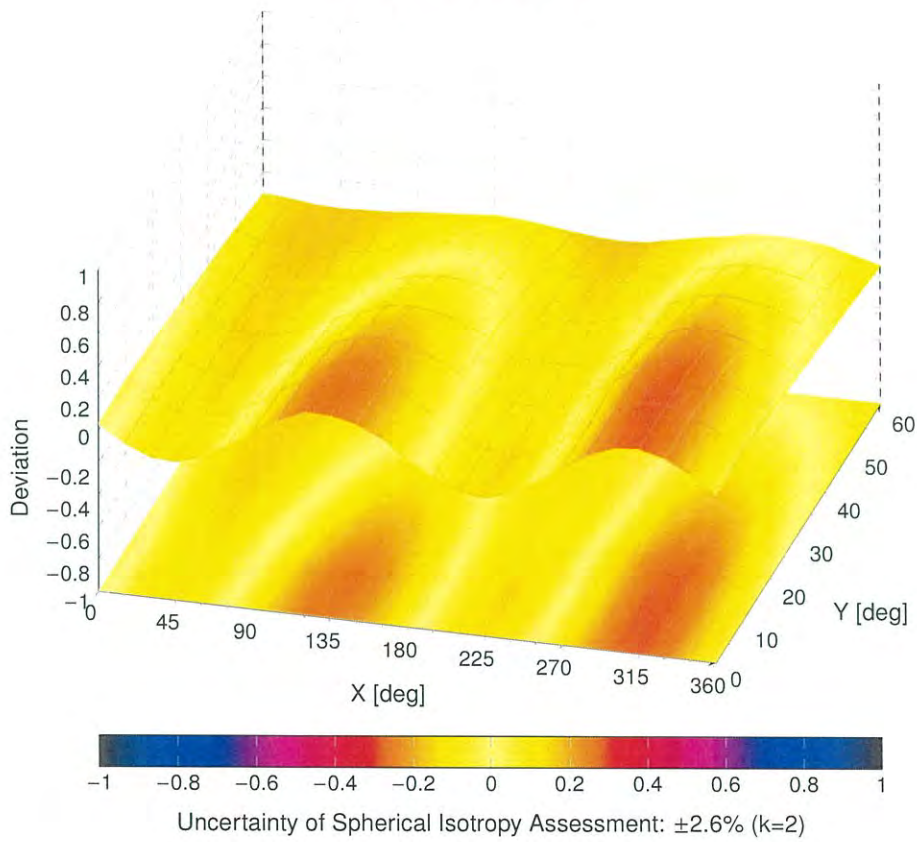

---

## Appendix E. Dipole & Source Calibration





Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **DEKRA (Auden)**

Certificate No: **D2450V2-930\_Nov22**

## CALIBRATION CERTIFICATE

Object **D2450V2 - SN:930**

Calibration procedure(s) **QA CAL-05.v11  
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **November 21, 2022**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-22 (No. 217-03525/03524)	Apr-23
Power sensor NRP-Z91	SN: 103244	04-Apr-22 (No. 217-03524)	Apr-23
Power sensor NRP-Z91	SN: 103245	04-Apr-22 (No. 217-03525)	Apr-23
Reference 20 dB Attenuator	SN: BH9394 (20k)	04-Apr-22 (No. 217-03527)	Apr-23
Type-N mismatch combination	SN: 310982 / 06327	04-Apr-22 (No. 217-03528)	Apr-23
Reference Probe EX3DV4	SN: 7349	31-Dec-21 (No. EX3-7349_Dec21)	Dec-22
DAE4	SN: 601	31-Aug-22 (No. DAE4-601_Aug22)	Aug-23

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-22)	In house check: Oct-24
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-22)	In house check: Oct-24
Power sensor HP 8481A	SN: MY41093315	07-Oct-15 (in house check Oct-22)	In house check: Oct-24
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-22)	In house check: Oct-24
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Sven Kühn	Technical Manager	

Issued: November 22, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The source is mounted in a touch configuration below the center marking of the flat phantom.
- Return Loss:* This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	38.4 $\pm$ 6 %	1.87 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.4 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.4 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.24 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.6 W/kg $\pm$ 16.5 % (k=2)



## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.7 $\Omega$ + 2.9 j $\Omega$
Return Loss	- 26.8 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.157 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

## DASY5 Validation Report for Head TSL

Date: 21.11.2022

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:930**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.87$  S/m;  $\epsilon_r = 38.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.96, 7.96, 7.96) @ 2450 MHz; Calibrated: 31.12.2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 31.08.2022
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 115.6 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 25.9 W/kg

**SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.24 W/kg**


Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 21.8 W/kg

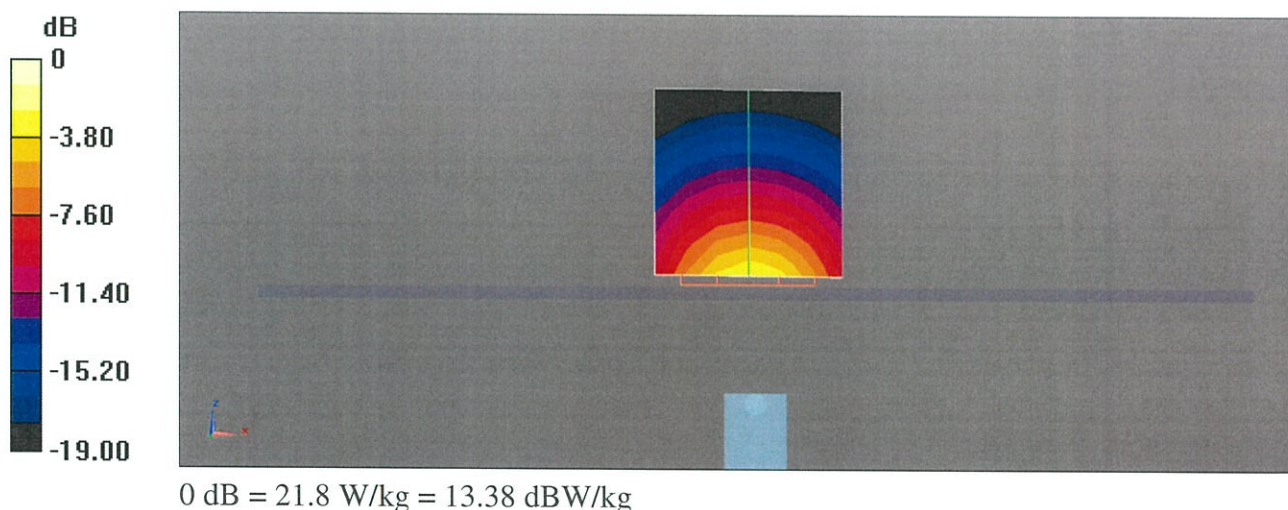

# Impedance Measurement Plot for Head TSL

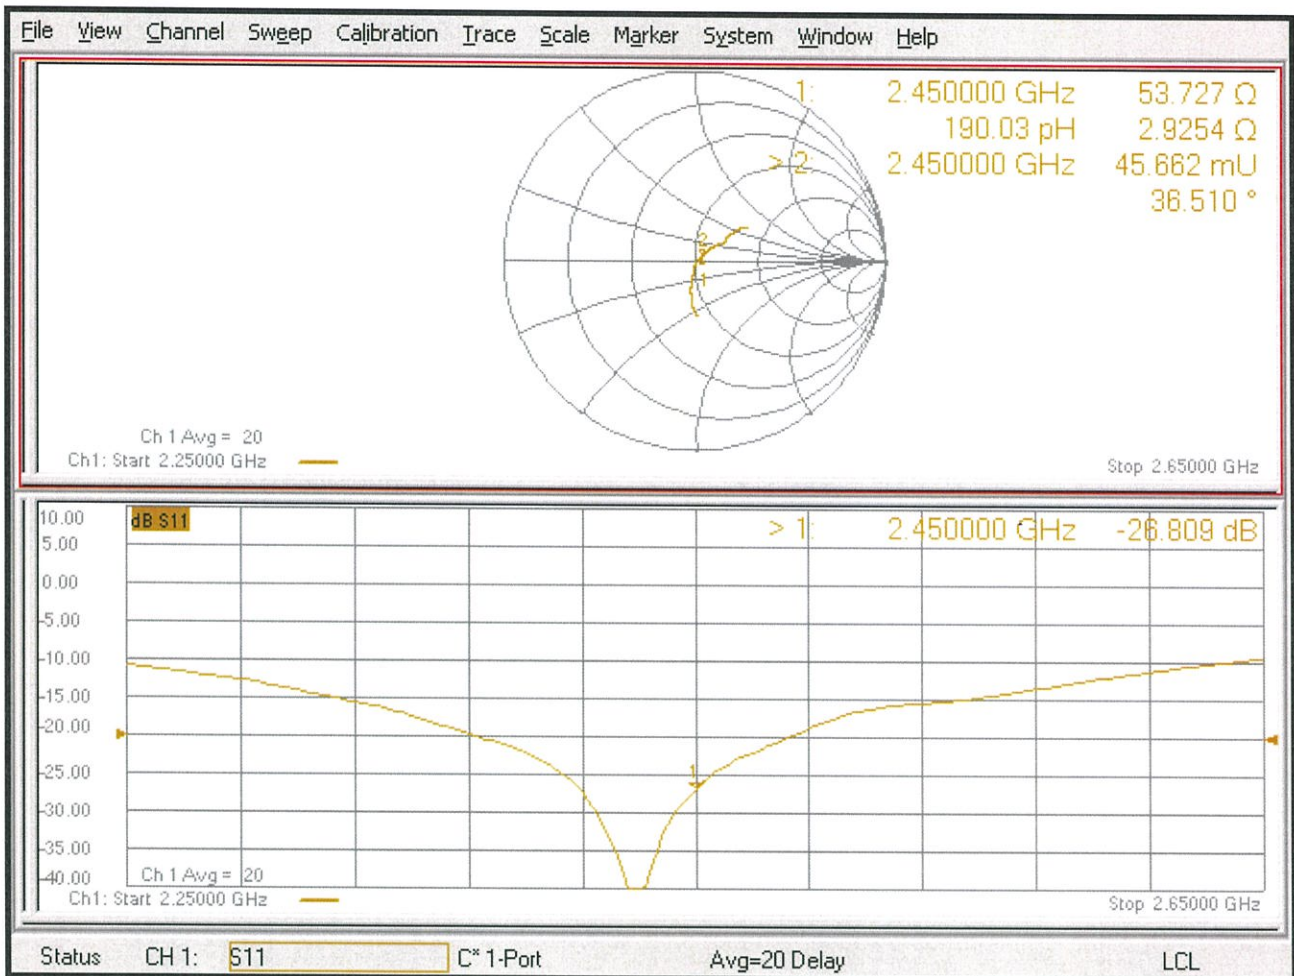





Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **DEKRA (Auden)**

Certificate No: **D5GHzV2-1041\_May20**

## CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1041**

Calibration procedure(s) **QA CAL-22.v4  
Calibration Procedure for SAR Validation Sources between 3-6 GHz**

Calibration date: **May 25, 2020**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	01-Apr-20 (No. 217-03100/03101)	Apr-21
Power sensor NRP-Z91	SN: 103244	01-Apr-20 (No. 217-03100)	Apr-21
Power sensor NRP-Z91	SN: 103245	01-Apr-20 (No. 217-03101)	Apr-21
Reference 20 dB Attenuator	SN: BH9394 (20k)	31-Mar-20 (No. 217-03106)	Apr-21
Type-N mismatch combination	SN: 310982 / 06327	31-Mar-20 (No. 217-03104)	Apr-21
Reference Probe EX3DV4	SN: 3503	31-Dec-19 (No. EX3-3503_Dec19)	Dec-20
DAE4	SN: 601	27-Dec-19 (No. DAE4-601_Dec19)	Dec-20

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Feb-19)	In house check: Oct-20
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-18)	In house check: Oct-20
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-19)	In house check: Oct-20

Calibrated by:	Name <b>Michael Weber</b>	Function Laboratory Technician	Signature 
Approved by:	Name <b>Katja Pokovic</b>	Function Technical Manager	Signature 

Issued: May 26, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.10.4
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom V5.0	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy = 10.0 mm, dz = 10.0 mm	Graded Ratio = 1.4 (Z direction)
<b>Frequency</b>	5250 MHz ± 1 MHz 5600 MHz ± 1 MHz 5800 MHz ± 1 MHz	

## Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	35.9	4.71 mho/m
<b>Measured Head TSL parameters</b>	(22.0 ± 0.2) °C	35.3 ± 6 %	4.55 mho/m ± 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL at 5250 MHz

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	100 mW input power	8.20 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>81.6 W/kg ± 19.9 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	100 mW input power	2.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>23.2 W/kg ± 19.5 % (k=2)</b>

## Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	35.5	5.07 mho/m
<b>Measured Head TSL parameters</b>	(22.0 ± 0.2) °C	34.8 ± 6 %	4.90 mho/m ± 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL at 5600 MHz

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	100 mW input power	8.63 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>85.9 W/kg ± 19.9 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	100 mW input power	2.43 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>24.2 W/kg ± 19.5 % (k=2)</b>

## Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.5 ± 6 %	5.11 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.25 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>82.0 W/kg ± 19.9 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.30 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>22.8 W/kg ± 19.5 % (k=2)</b>

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL at 5250 MHz

Impedance, transformed to feed point	49.0 $\Omega$ - 4.4 j $\Omega$
Return Loss	- 26.9 dB

### Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	56.3 $\Omega$ - 1.2 j $\Omega$
Return Loss	- 24.4 dB

### Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	54.3 $\Omega$ - 2.1 j $\Omega$
Return Loss	- 26.8 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.197 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



## DASY5 Validation Report for Head TSL

Date: 25.05.2020

Test Laboratory: SPEAG, Zurich, Switzerland

### DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1041

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz  
Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.55$  S/m;  $\epsilon_r = 35.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>,  
Medium parameters used:  $f = 5600$  MHz;  $\sigma = 4.9$  S/m;  $\epsilon_r = 34.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>,  
Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.11$  S/m;  $\epsilon_r = 34.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.5, 5.5, 5.5) @ 5250 MHz, ConvF(5.1, 5.1, 5.1) @ 5600 MHz, ConvF(5.01, 5.01, 5.01) @ 5800 MHz; Calibrated: 31.12.2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.12.2019
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 79.63 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 28.8 W/kg

**SAR(1 g) = 8.20 W/kg; SAR(10 g) = 2.33 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 69.4%

Maximum value of SAR (measured) = 18.9 W/kg

### Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 79.80 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 32.6 W/kg

**SAR(1 g) = 8.63 W/kg; SAR(10 g) = 2.43 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 66.8%

Maximum value of SAR (measured) = 20.6 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm**

Reference Value = 77.63 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 33.4 W/kg

**SAR(1 g) = 8.25 W/kg; SAR(10 g) = 2.30 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 64.8%

Maximum value of SAR (measured) = 20.2 W/kg

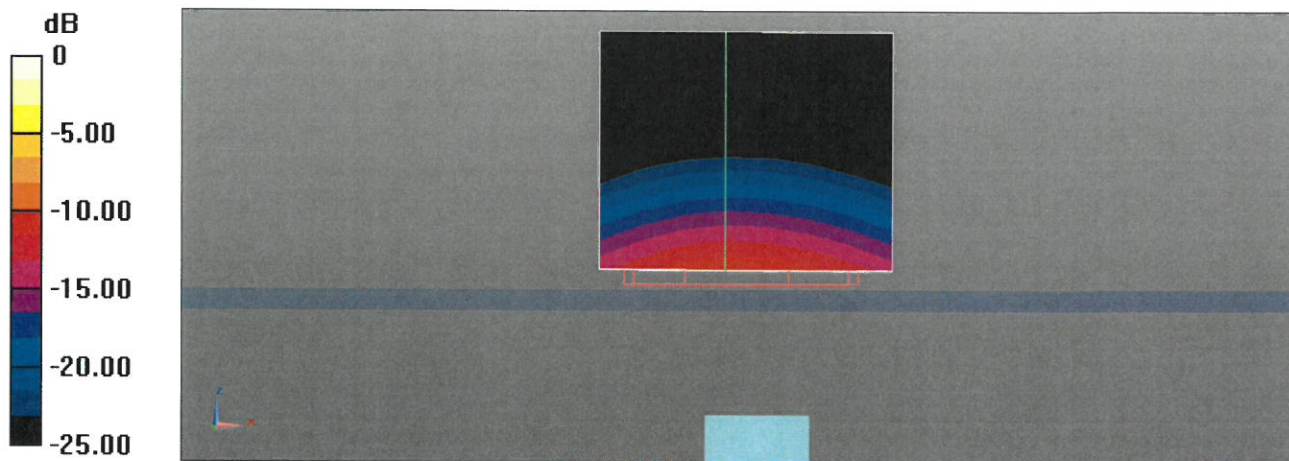

0 dB = 20.6 W/kg = 13.13 dBW/kg

# Impedance Measurement Plot for Head TSL

