





LTE Band 71 - Ant 0, Channel Bandwidth: 5 MHz



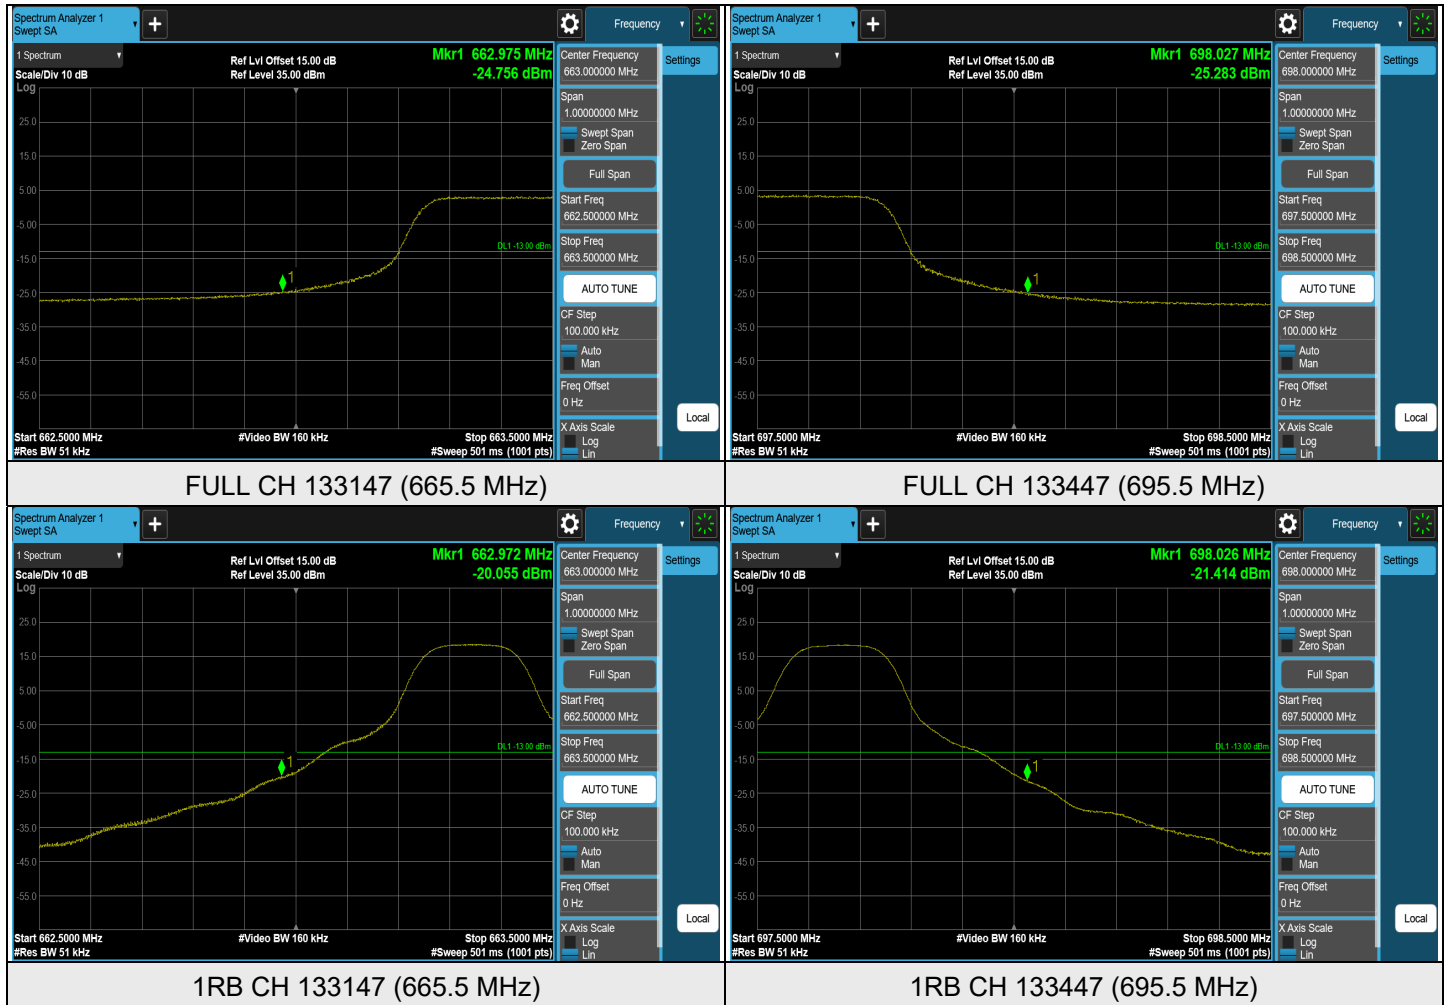


LTE Band 71 - Ant 0, Channel Bandwidth: 10 MHz

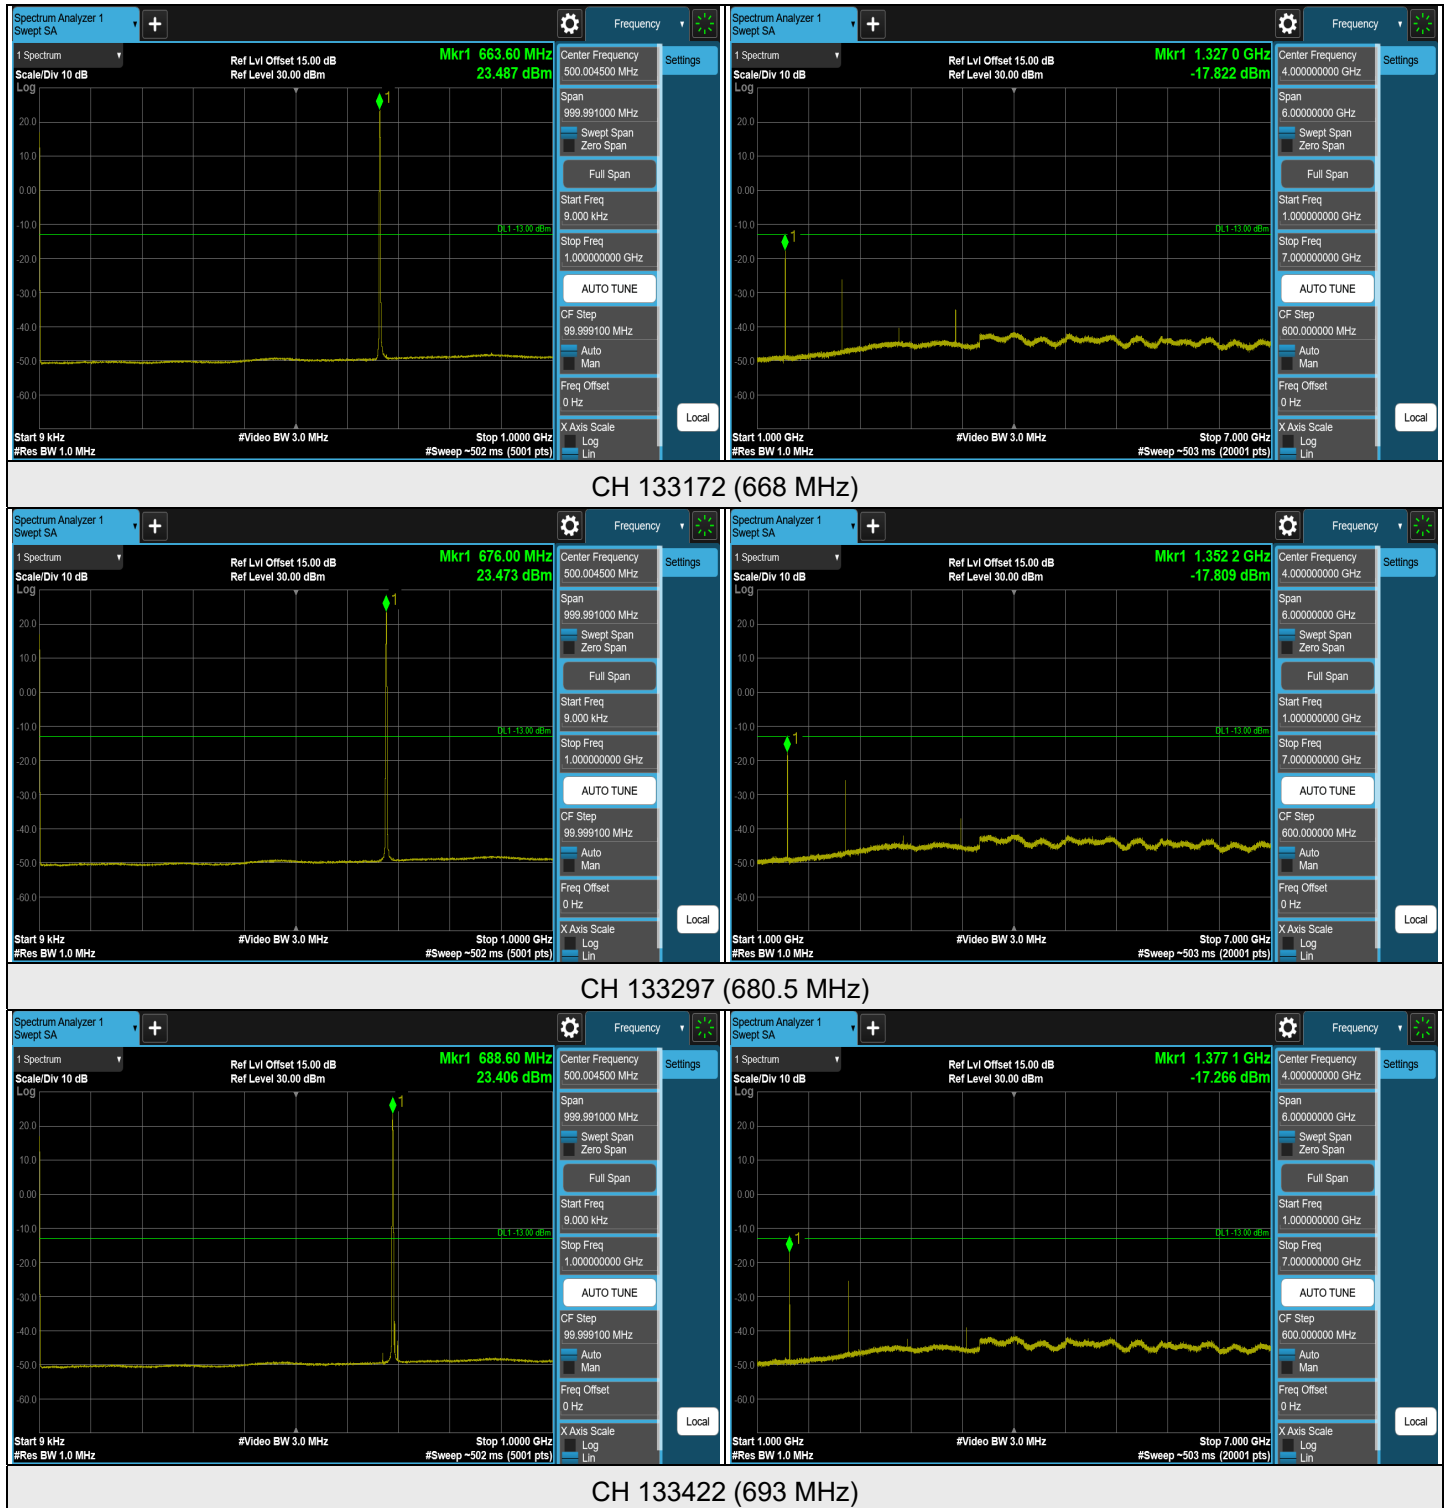

Note: The signal at 9 kHz is IF signal from spectrum analyzer.




LTE Band 71 - Ant 0, Channel Bandwidth: 10 MHz

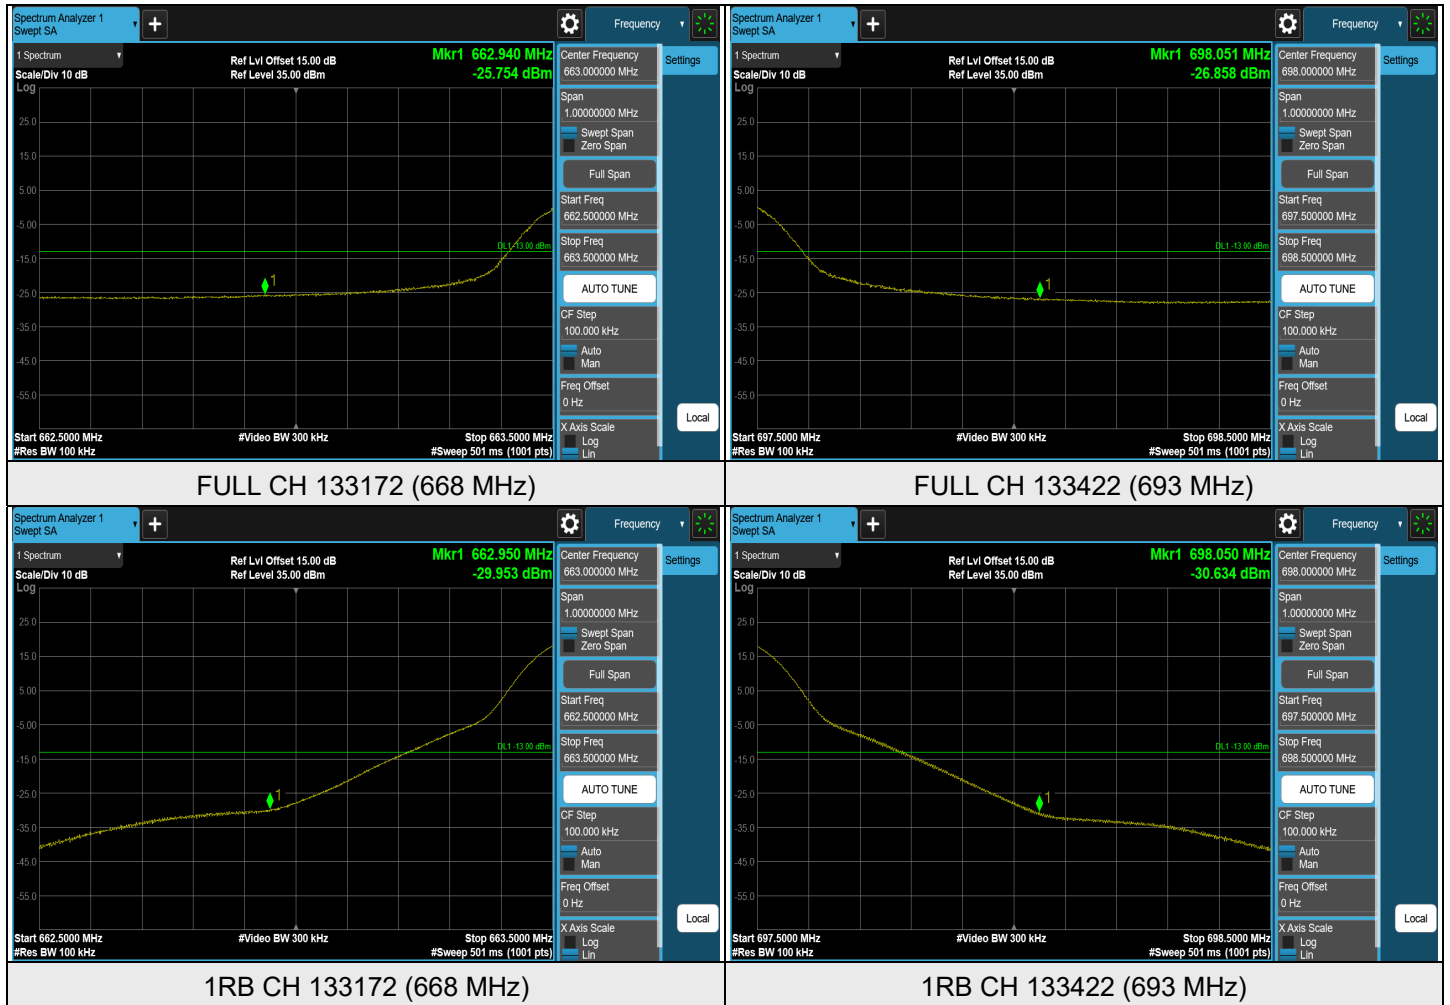




LTE Band 71 - Ant 0, Channel Bandwidth: 15 MHz

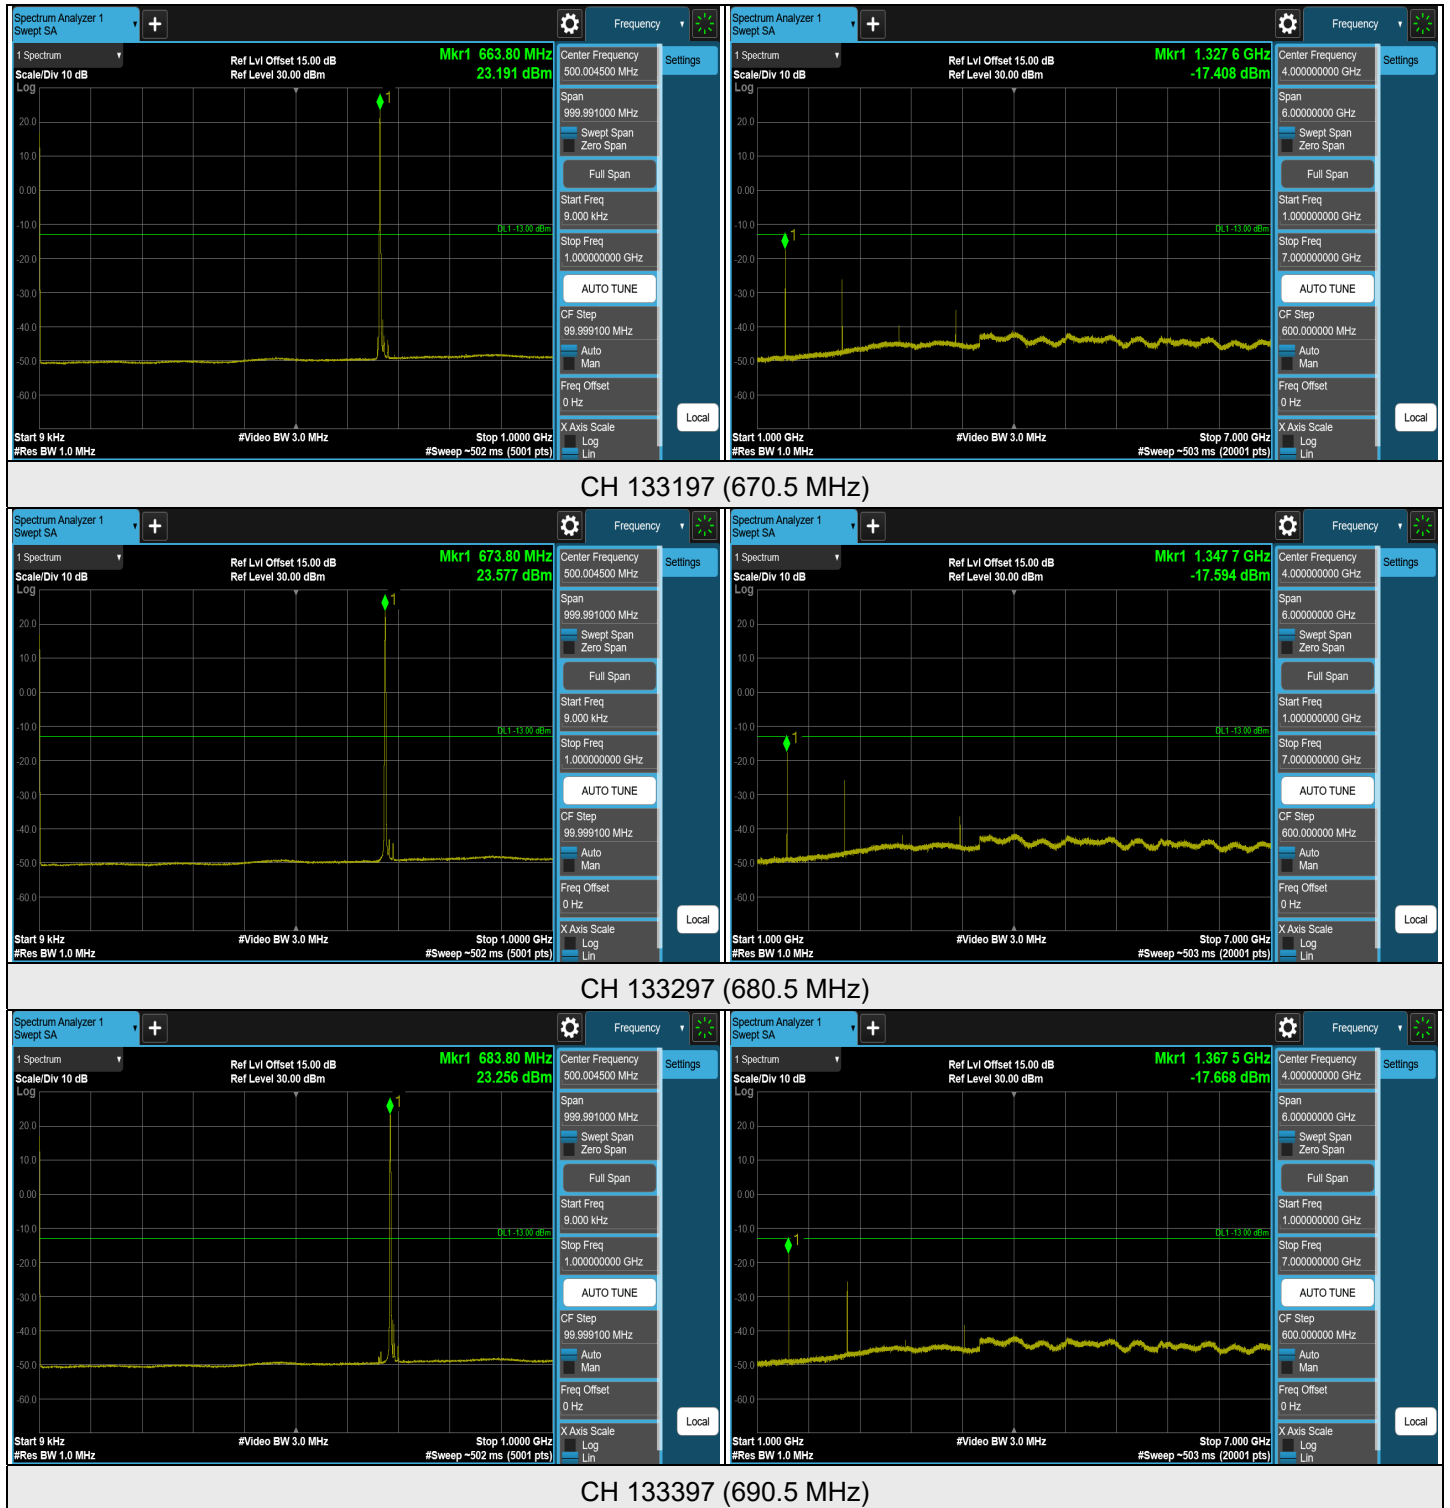

Note: The signal at 9 kHz is IF signal from spectrum analyzer.




LTE Band 71 - Ant 0, Channel Bandwidth: 15 MHz

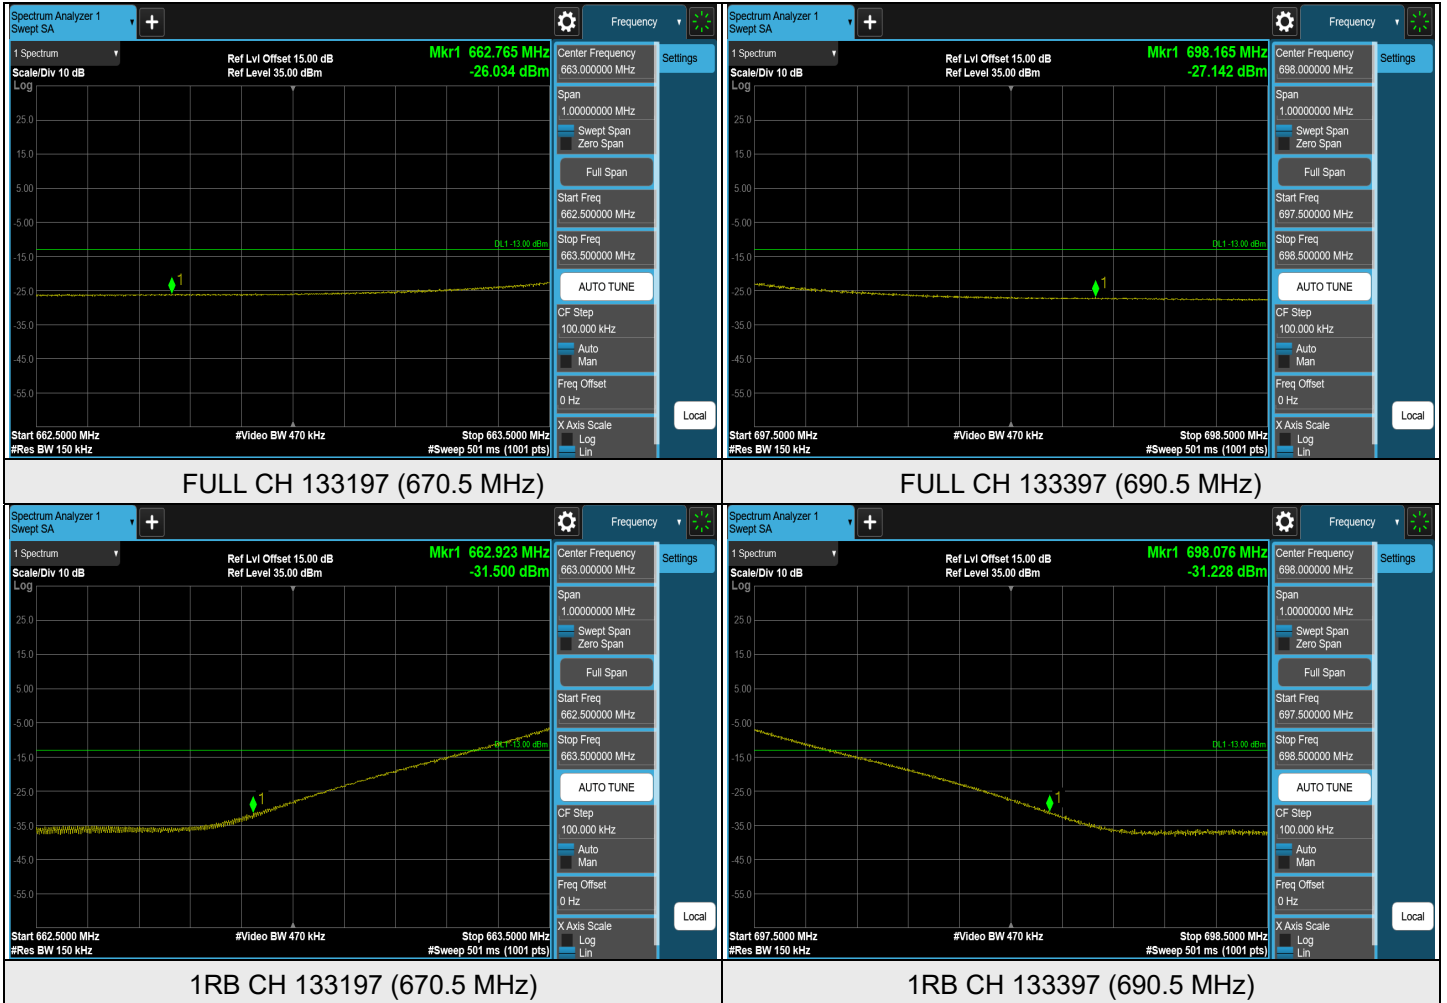





LTE Band 71 - Ant 0, Channel Bandwidth: 20 MHz

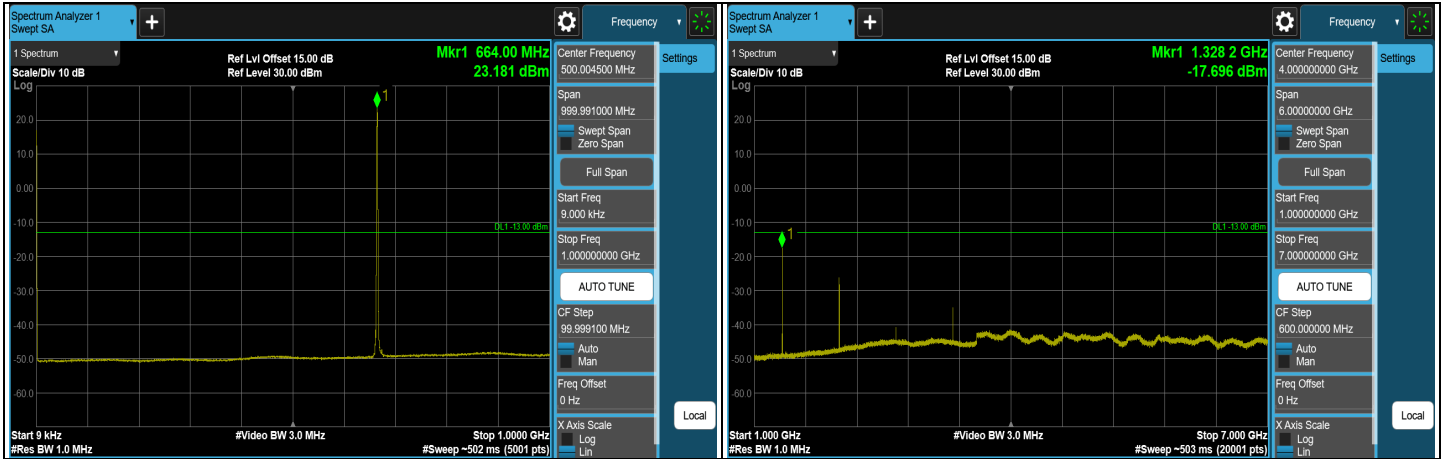

CH 133222 (673 MHz)

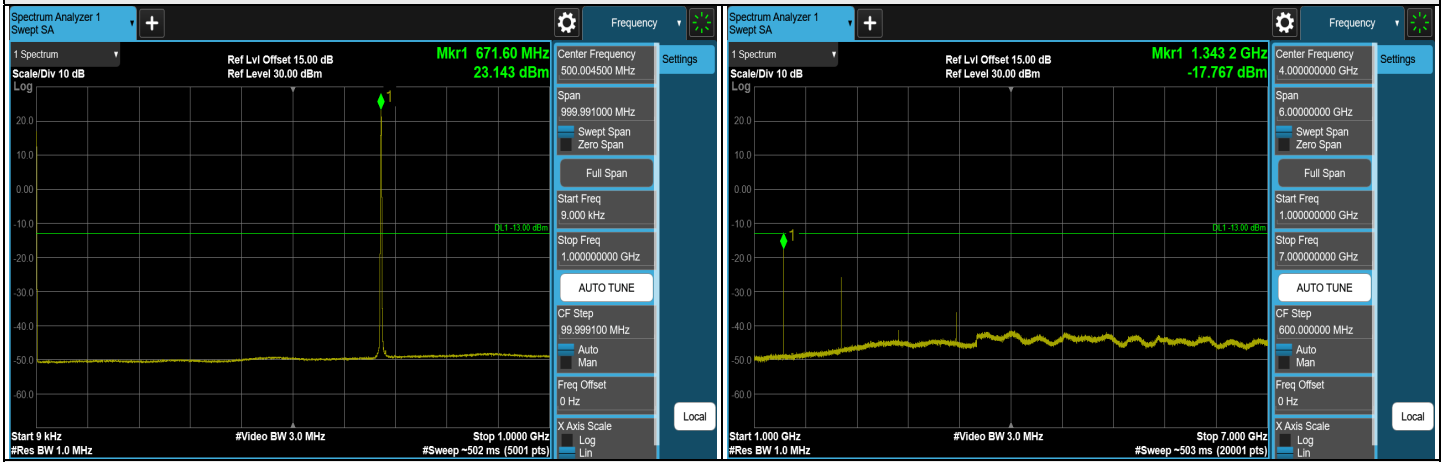

CH 133297 (680.5 MHz)

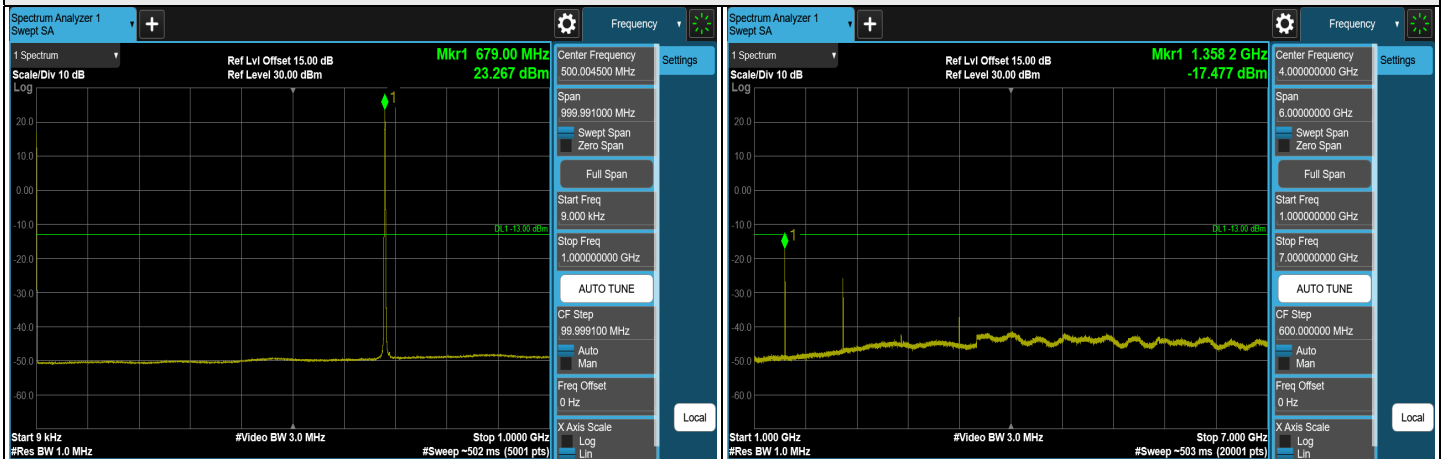


CH 133372 (688 MHz)

Note: The signal at 9 kHz is IF signal from spectrum analyzer.



LTE Band 71 - Ant 0, Channel Bandwidth: 20 MHz

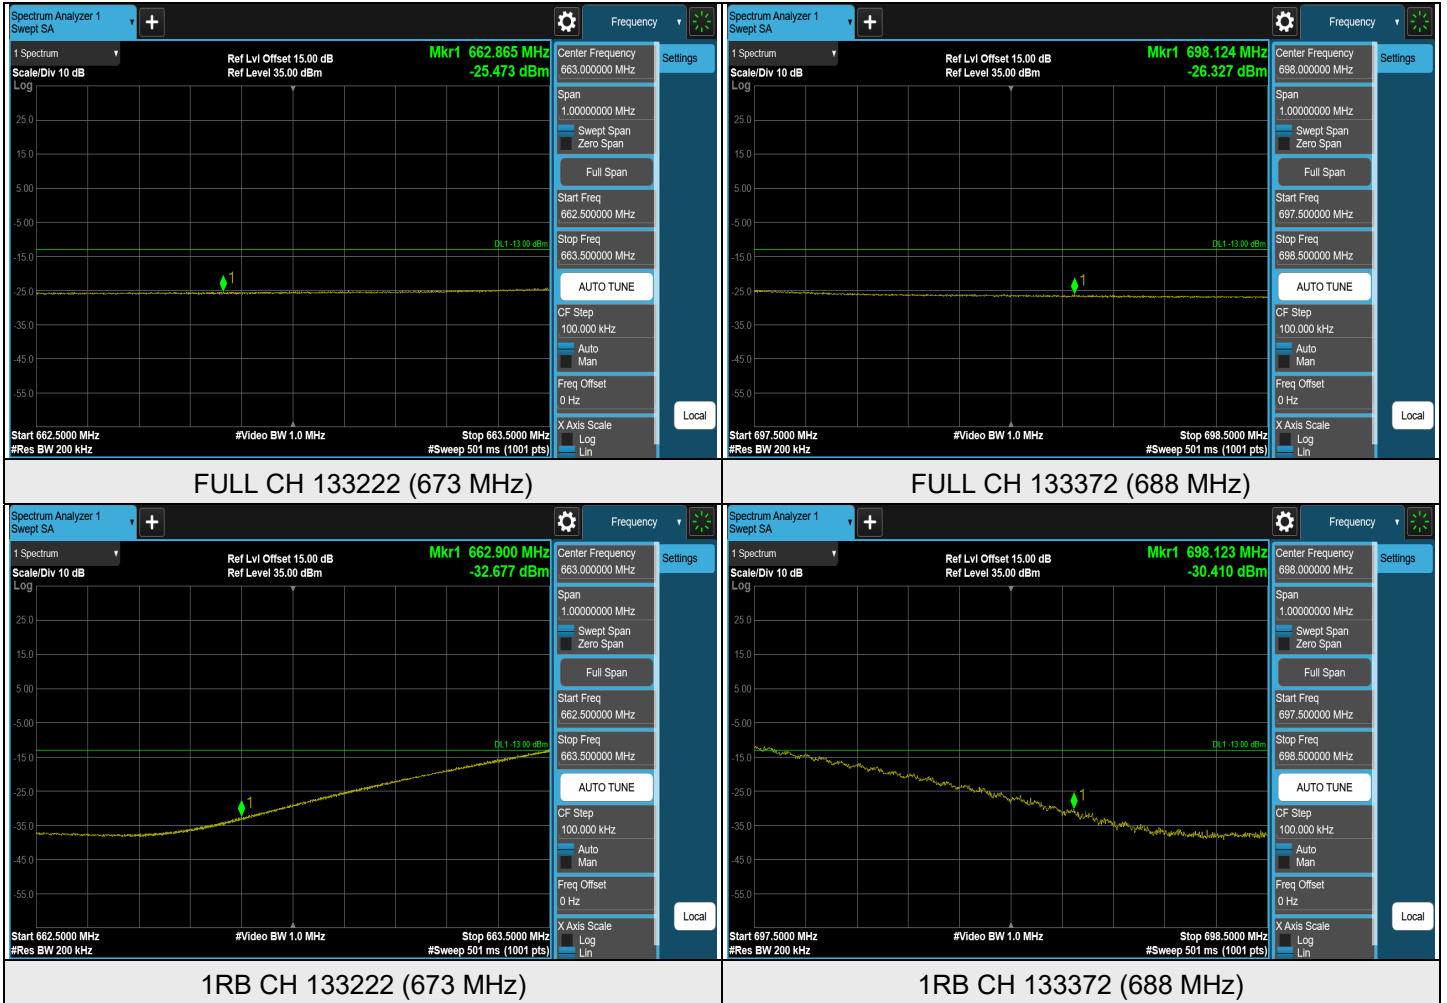

7.6 Radiated Spurious Emissions below 1GHz

7.6.1 LTE Band 2


RF Mode	LTE Band 2 Channel Bandwidth: 5MHz	Channel	CH 19175 : 1907.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.79	-49.48	-13.00	-36.48	1.51 H	98	59.53	-109.01
2	132.82	-48.62	-13.00	-35.62	2.00 H	152	60.69	-109.31
3	197.81	-51.50	-13.00	-38.50	2.00 H	96	60.35	-111.85
4	350.10	-60.52	-13.00	-47.52	1.01 H	300	46.21	-106.73
5	594.54	-60.21	-13.00	-47.21	1.01 H	2	40.61	-100.82
6	798.24	-55.67	-13.00	-42.67	1.51 H	101	42.10	-97.77

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

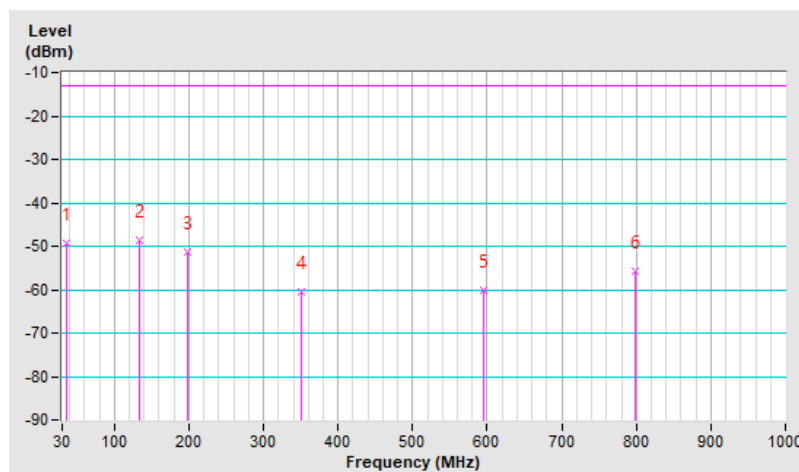


RF Mode	LTE Band 2 Channel Bandwidth: 5MHz	Channel	CH 19175 : 1907.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.91	-39.07	-13.00	-26.07	1.50 V	18	70.50	-109.57
2	66.86	-55.00	-13.00	-42.00	2.00 V	359	55.05	-110.05
3	163.86	-53.15	-13.00	-40.15	1.00 V	174	55.06	-108.21
4	213.33	-60.14	-13.00	-47.14	1.25 V	139	51.75	-111.89
5	323.91	-54.98	-13.00	-41.98	1.00 V	7	52.01	-106.99
6	801.15	-56.12	-13.00	-43.12	1.50 V	184	41.65	-97.77

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

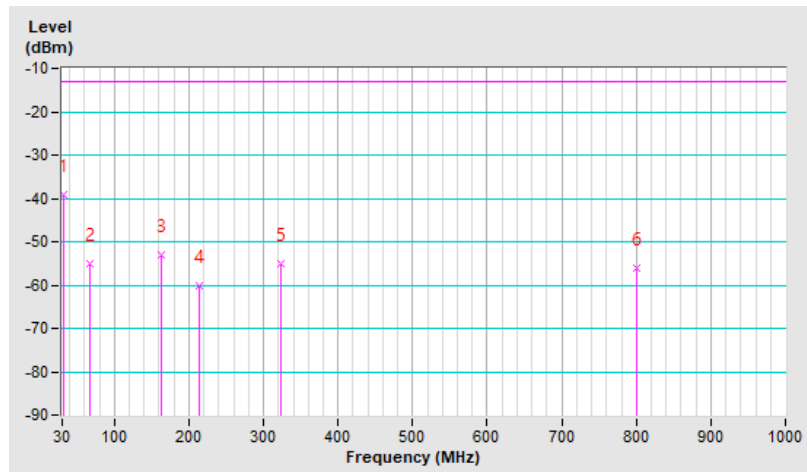


7.6.2 LTE Band 4

RF Mode	LTE Band 4 Channel Bandwidth: 1.4MHz	Channel	CH 20393 : 1754.3 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.82	-51.97	-13.00	-38.97	1.51 H	182	57.21	-109.18
2	162.89	-49.31	-13.00	-36.31	1.51 H	249	58.92	-108.23
3	212.36	-53.44	-13.00	-40.44	1.51 H	96	58.46	-111.90
4	280.26	-58.30	-13.00	-45.30	1.01 H	88	49.96	-108.26
5	576.11	-60.67	-13.00	-47.67	1.51 H	112	40.76	-101.43
6	857.41	-55.64	-13.00	-42.64	1.26 H	201	41.22	-96.86

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

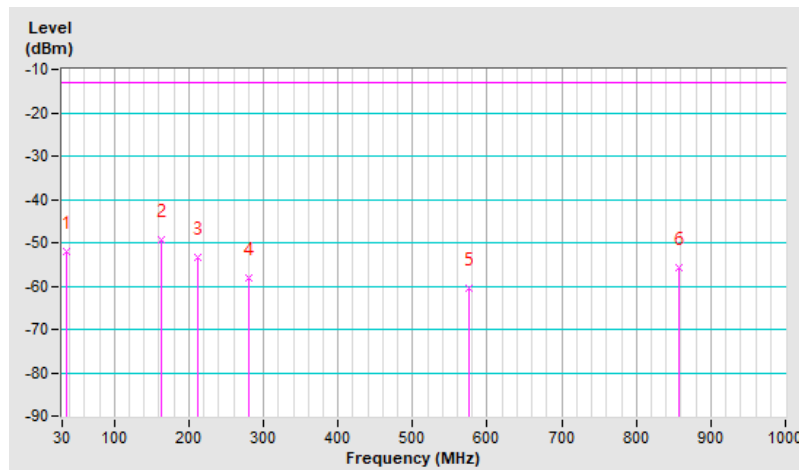


RF Mode	LTE Band 4 Channel Bandwidth: 1.4MHz	Channel	CH 20393 : 1754.3 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.79	-35.56	-13.00	-22.56	1.25 V	98	73.45	-109.01
2	50.37	-51.71	-13.00	-38.71	1.00 V	29	56.51	-108.22
3	131.85	-46.91	-13.00	-33.91	1.50 V	152	62.60	-109.51
4	246.31	-61.94	-13.00	-48.94	1.00 V	2	47.79	-109.73
5	385.02	-57.50	-13.00	-44.50	1.25 V	218	48.16	-105.66
6	978.66	-54.31	-13.00	-41.31	2.00 V	7	40.95	-95.26

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

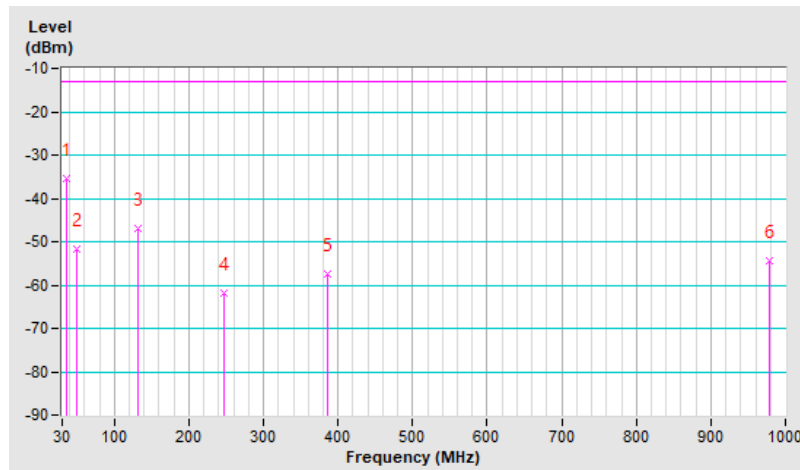


7.6.3 LTE Band 5

RF Mode	LTE Band 5 Channel Bandwidth: 1.4MHz	Channel	CH 20525 : 836.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.79	-55.03	-13.00	-42.03	1.50 H	136	56.13	-111.16
2	132.82	-54.12	-13.00	-41.12	1.25 H	166	57.34	-111.46
3	198.78	-54.86	-13.00	-41.86	1.00 H	107	59.19	-114.05
4	249.22	-59.10	-13.00	-46.10	1.25 H	94	52.72	-111.82
5	335.55	-62.08	-13.00	-49.08	1.00 H	306	46.84	-108.92
6	799.21	-58.80	-13.00	-45.80	1.50 H	130	41.14	-99.94

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

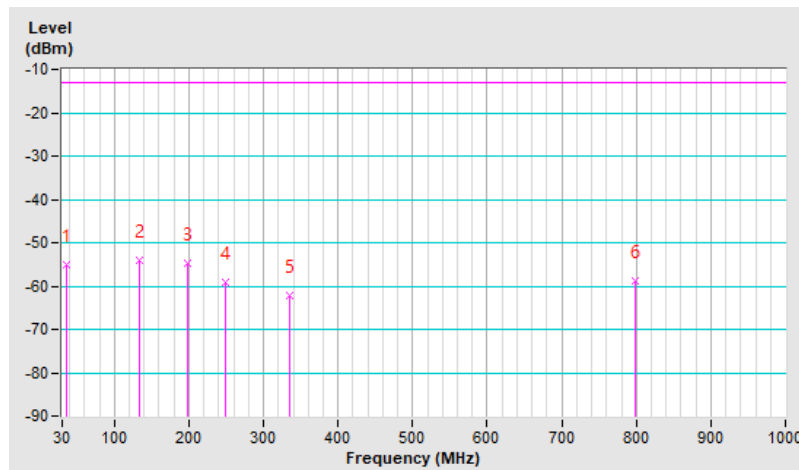


RF Mode	LTE Band 5 Channel Bandwidth: 1.4MHz	Channel	CH 20525 : 836.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.79	-37.61	-13.00	-24.61	1.50 V	172	73.55	-111.16
2	73.65	-53.28	-13.00	-40.28	1.00 V	158	60.53	-113.81
3	162.89	-55.45	-13.00	-42.45	2.00 V	5	54.93	-110.38
4	351.07	-61.32	-13.00	-48.32	1.25 V	124	47.54	-108.86
5	572.23	-63.62	-13.00	-50.62	1.00 V	25	40.10	-103.72
6	946.65	-58.02	-13.00	-45.02	1.00 V	255	39.90	-97.92

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

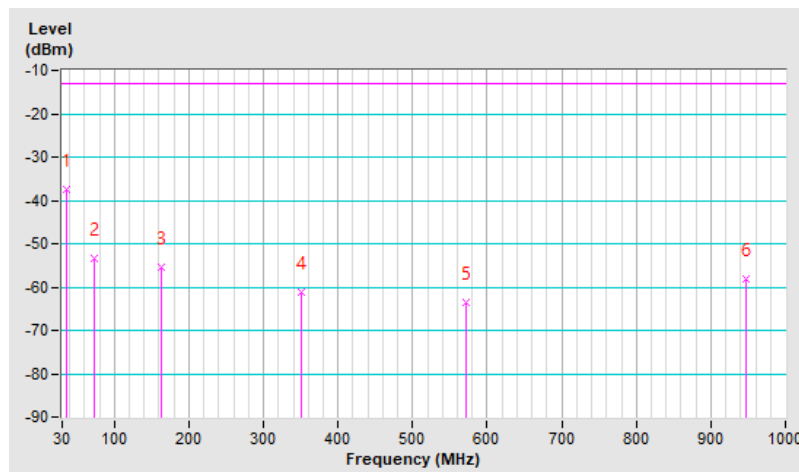


7.6.4 LTE Band 7

RF Mode	LTE Band 7 Channel Bandwidth: 5MHz	Channel	CH 21425 : 2567.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.79	-53.76	-25.00	-28.76	1.25 H	117	55.25	-109.01
2	163.86	-50.73	-25.00	-25.73	1.00 H	113	57.48	-108.21
3	200.72	-52.35	-25.00	-27.35	1.50 H	108	59.57	-111.92
4	281.23	-58.05	-25.00	-33.05	1.00 H	89	50.17	-108.22
5	560.59	-56.50	-25.00	-31.50	1.25 H	351	45.36	-101.86
6	799.21	-56.64	-25.00	-31.64	1.00 H	61	41.15	-97.79

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

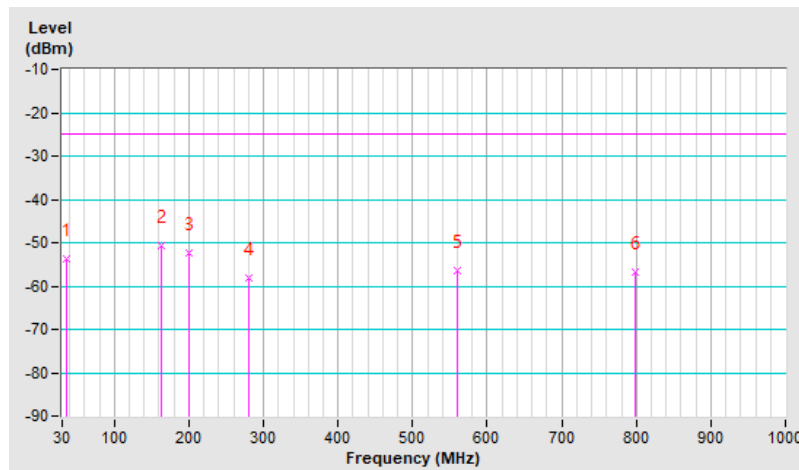


RF Mode	LTE Band 7 Channel Bandwidth: 5MHz	Channel	CH 21425 : 2567.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	-43.53	-25.00	-18.53	1.25 V	2	66.06	-109.59
2	49.40	-47.08	-25.00	-22.08	1.50 V	232	61.10	-108.18
3	162.89	-53.41	-25.00	-28.41	1.00 V	2	54.82	-108.23
4	352.04	-59.96	-25.00	-34.96	1.25 V	125	46.73	-106.69
5	584.84	-52.60	-25.00	-27.60	1.00 V	180	48.58	-101.18
6	883.60	-58.11	-25.00	-33.11	2.00 V	338	38.41	-96.52

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

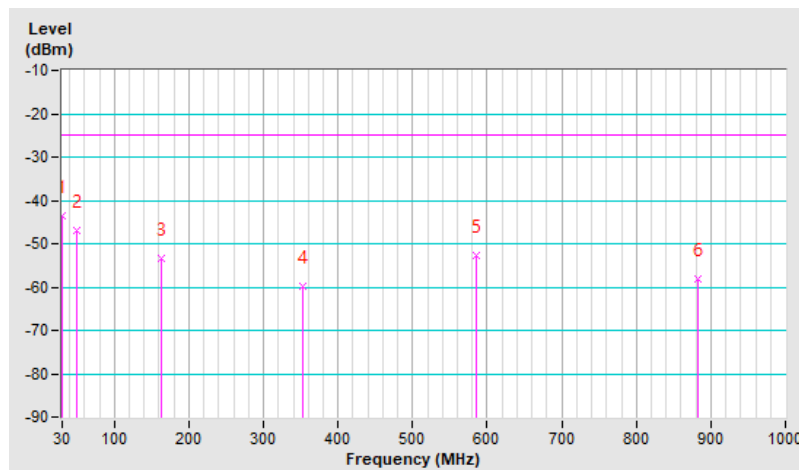

7.6.5 LTE Band 12


RF Mode	LTE Band 12 Channel Bandwidth: 5MHz	Channel	CH 23095 : 707.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	34.85	-56.66	-13.00	-43.66	1.00 H	136	54.86	-111.52
2	162.89	-53.48	-13.00	-40.48	1.25 H	96	56.90	-110.38
3	217.21	-56.34	-13.00	-43.34	1.00 H	104	57.65	-113.99
4	281.23	-59.98	-13.00	-46.98	1.50 H	91	50.39	-110.37
5	348.16	-62.01	-13.00	-49.01	1.25 H	295	46.89	-108.90
6	959.26	-58.48	-13.00	-45.48	1.00 H	39	39.19	-97.67

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + $20\log(D)$ – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

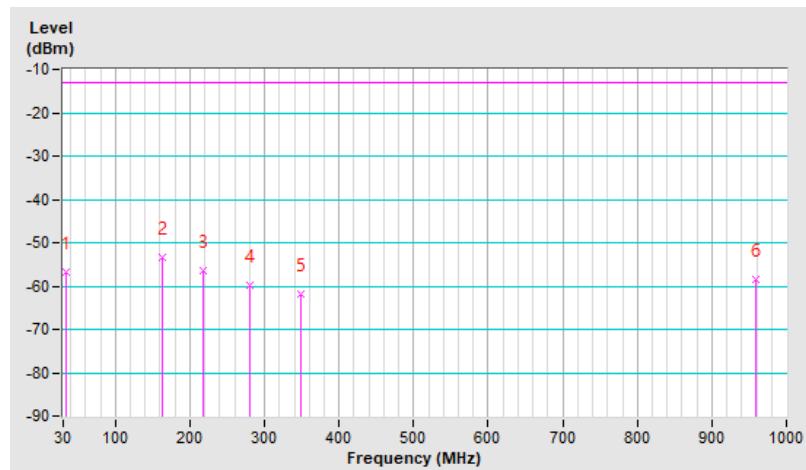


RF Mode	LTE Band 12 Channel Bandwidth: 5MHz	Channel	CH 23095 : 707.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	-40.10	-13.00	-27.10	1.50 V	340	71.32	-111.42
2	129.91	-50.89	-13.00	-37.89	1.25 V	130	60.85	-111.74
3	212.36	-62.27	-13.00	-49.27	1.00 V	101	51.78	-114.05
4	385.02	-60.04	-13.00	-47.04	1.50 V	213	47.77	-107.81
5	632.37	-63.21	-13.00	-50.21	1.00 V	80	39.07	-102.28
6	800.18	-59.10	-13.00	-46.10	1.25 V	247	40.85	-99.95

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

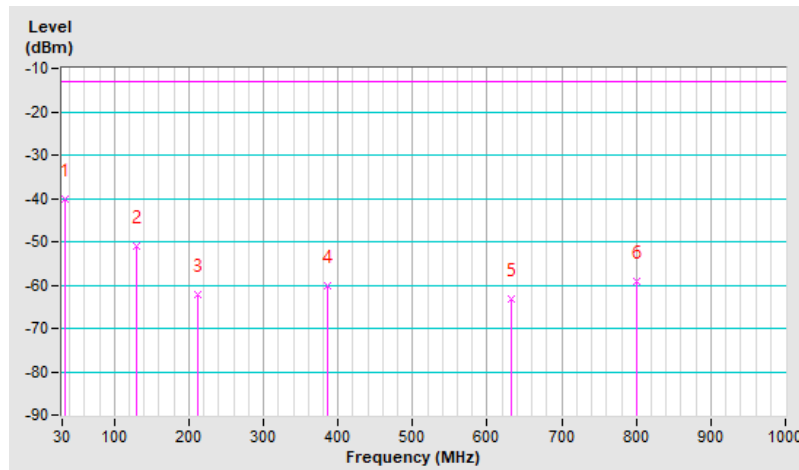


7.6.6 LTE Band 13

RF Mode	LTE Band 13 Channel Bandwidth: 10MHz	Channel	CH 23230 : 782 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.79	-55.08	-13.00	-42.08	1.50 H	147	56.08	-111.16
2	132.82	-53.71	-13.00	-40.71	1.00 H	125	57.75	-111.46
3	199.75	-54.62	-13.00	-41.62	1.25 H	104	59.44	-114.06
4	280.26	-60.03	-13.00	-47.03	1.00 H	86	50.38	-110.41
5	351.07	-62.33	-13.00	-49.33	1.00 H	299	46.53	-108.86
6	799.21	-58.77	-13.00	-45.77	1.25 H	72	41.17	-99.94

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

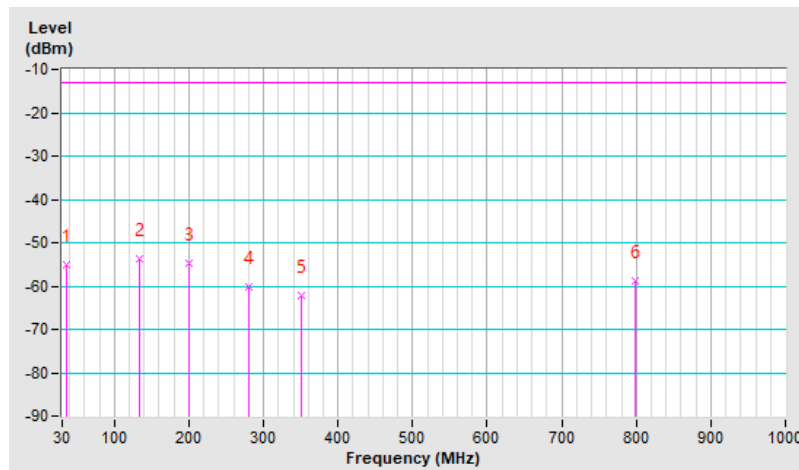


RF Mode	LTE Band 13 Channel Bandwidth: 10MHz	Channel	CH 23230 : 782 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.79	-36.44	-13.00	-23.44	1.25 V	121	74.72	-111.16
2	116.33	-51.06	-13.00	-38.06	1.00 V	6	61.91	-112.97
3	164.83	-54.93	-13.00	-41.93	1.50 V	335	55.50	-110.43
4	249.22	-63.03	-13.00	-50.03	1.25 V	2	48.79	-111.82
5	385.02	-59.80	-13.00	-46.80	1.00 V	196	48.01	-107.81
6	801.15	-60.25	-13.00	-47.25	1.25 V	236	39.67	-99.92

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

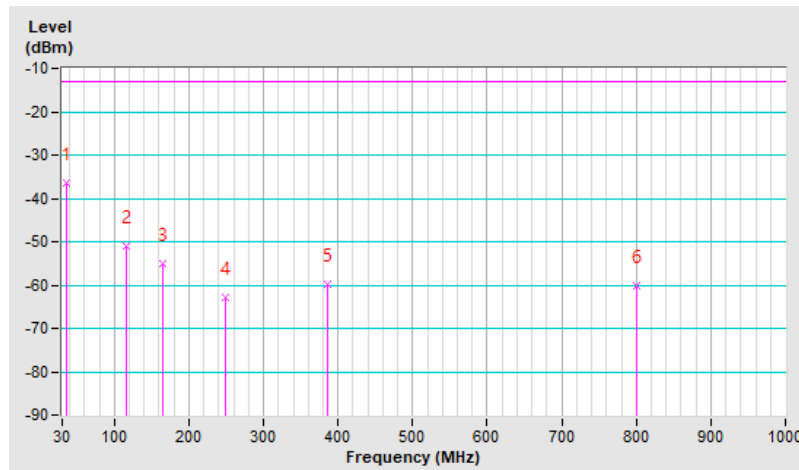


7.6.7 LTE Band 14

RF Mode	LTE Band 14 Channel Bandwidth: 10MHz	Channel	CH 23330 : 793 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.91	-56.66	-13.00	-43.66	1.25 H	206	55.06	-111.72
2	163.86	-53.57	-13.00	-40.57	1.50 H	99	56.79	-110.36
3	213.33	-56.45	-13.00	-43.45	1.00 H	238	57.59	-114.04
4	279.29	-60.20	-13.00	-47.20	1.50 H	96	50.26	-110.46
5	344.28	-62.78	-13.00	-49.78	1.00 H	301	46.16	-108.94
6	920.46	-59.08	-13.00	-46.08	1.25 H	46	39.09	-98.17

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

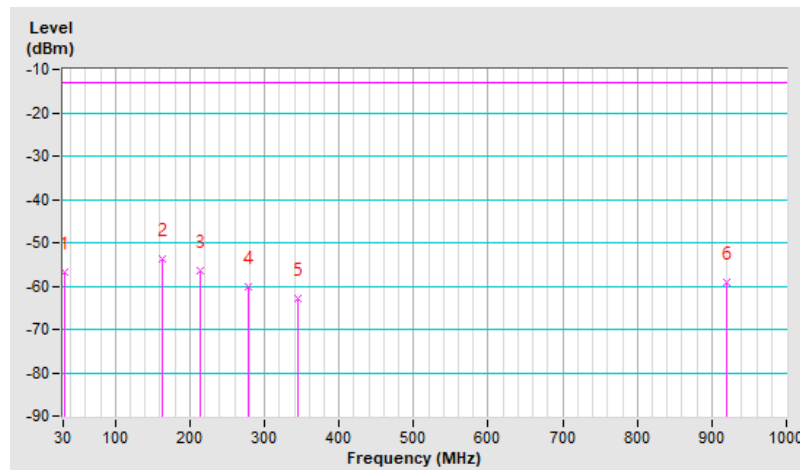


RF Mode	LTE Band 14 Channel Bandwidth: 10MHz	Channel	CH 23330 : 793 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	-41.01	-13.00	-28.01	1.00 V	6	70.41	-111.42
2	49.40	-50.97	-13.00	-37.97	1.25 V	307	59.36	-110.33
3	131.85	-49.77	-13.00	-36.77	1.50 V	150	61.89	-111.66
4	214.30	-61.89	-13.00	-48.89	1.00 V	134	52.14	-114.03
5	393.75	-60.51	-13.00	-47.51	1.50 V	194	47.14	-107.65
6	960.23	-58.32	-13.00	-45.32	1.00 V	302	39.32	-97.64

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

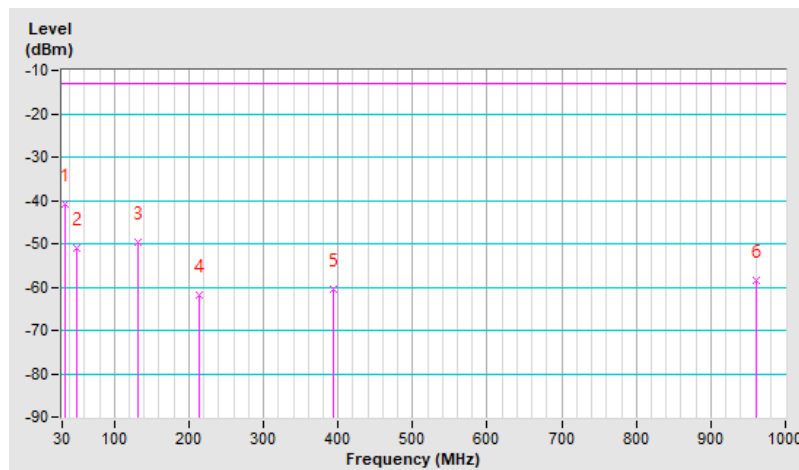


7.6.8 LTE Band 17

RF Mode	LTE Band 17 Channel Bandwidth: 10MHz	Channel	CH 23800 : 711 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.82	-55.41	-13.00	-42.41	1.00 H	136	55.92	-111.33
2	162.89	-53.10	-13.00	-40.10	1.25 H	234	57.28	-110.38
3	230.79	-57.69	-13.00	-44.69	1.50 H	219	55.19	-112.88
4	279.29	-59.83	-13.00	-46.83	1.50 H	87	50.63	-110.46
5	348.16	-61.99	-13.00	-48.99	1.00 H	303	46.91	-108.90
6	802.12	-60.12	-13.00	-47.12	2.00 H	180	39.78	-99.90

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

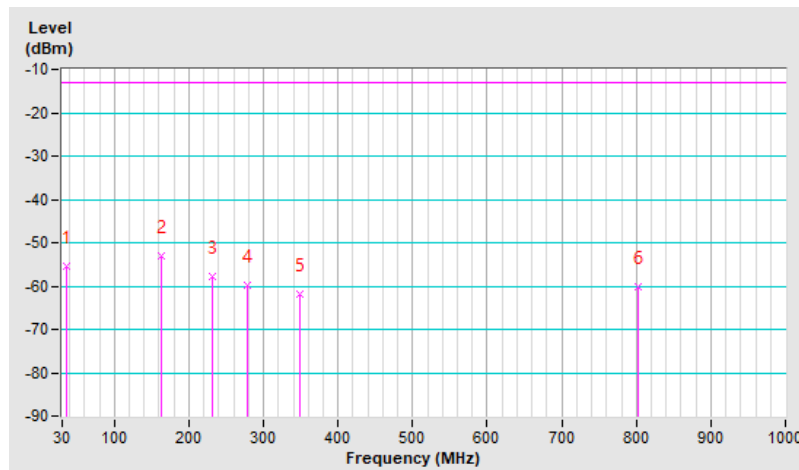


RF Mode	LTE Band 17 Channel Bandwidth: 10MHz	Channel	CH 23800 : 711 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.70	-40.92	-13.00	-27.92	1.25 V	224	67.89	-108.81
2	73.65	-55.43	-13.00	-42.43	1.00 V	5	56.23	-111.66
3	131.85	-48.30	-13.00	-35.30	1.00 V	176	61.21	-109.51
4	214.30	-60.07	-13.00	-47.07	1.50 V	150	51.81	-111.88
5	396.66	-58.64	-13.00	-45.64	2.00 V	206	46.83	-105.47
6	945.68	-56.07	-13.00	-43.07	1.25 V	344	39.72	-95.79

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

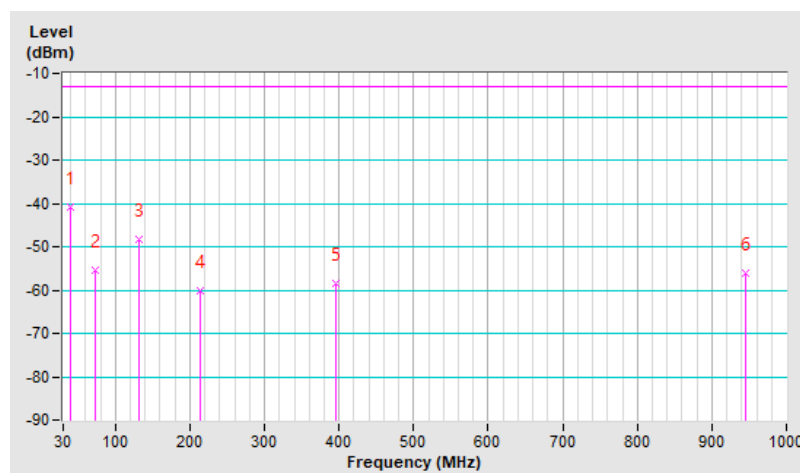


7.6.9 LTE Band 25

RF Mode	LTE Band 25 Channel Bandwidth: 20MHz	Channel	CH 26590 : 1905 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.79	-53.20	-13.00	-40.20	1.25 H	139	55.81	-109.01
2	134.76	-52.24	-13.00	-39.24	1.50 H	134	56.90	-109.14
3	197.81	-52.69	-13.00	-39.69	1.00 H	108	59.16	-111.85
4	351.07	-59.38	-13.00	-46.38	1.50 H	305	47.33	-106.71
5	642.07	-59.05	-13.00	-46.05	1.00 H	16	40.94	-99.99
6	836.07	-57.24	-13.00	-44.24	1.25 H	15	39.94	-97.18

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

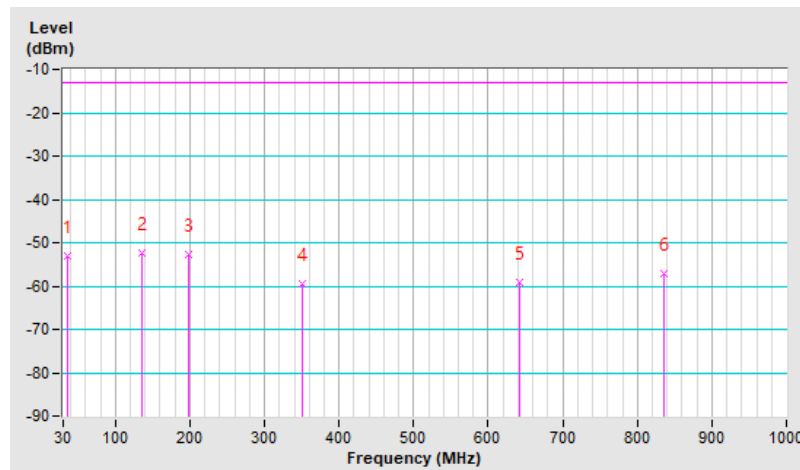


RF Mode	LTE Band 25 Channel Bandwidth: 20MHz	Channel	CH 26590 : 1905 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.79	-35.62	-13.00	-22.62	2.00 V	104	73.39	-109.01
2	129.91	-49.15	-13.00	-36.15	1.50 V	131	60.44	-109.59
3	210.42	-60.48	-13.00	-47.48	1.25 V	115	51.46	-111.94
4	385.02	-58.41	-13.00	-45.41	1.00 V	211	47.25	-105.66
5	556.71	-57.19	-13.00	-44.19	1.25 V	177	44.79	-101.98
6	800.18	-54.89	-13.00	-41.89	1.00 V	239	42.91	-97.80

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

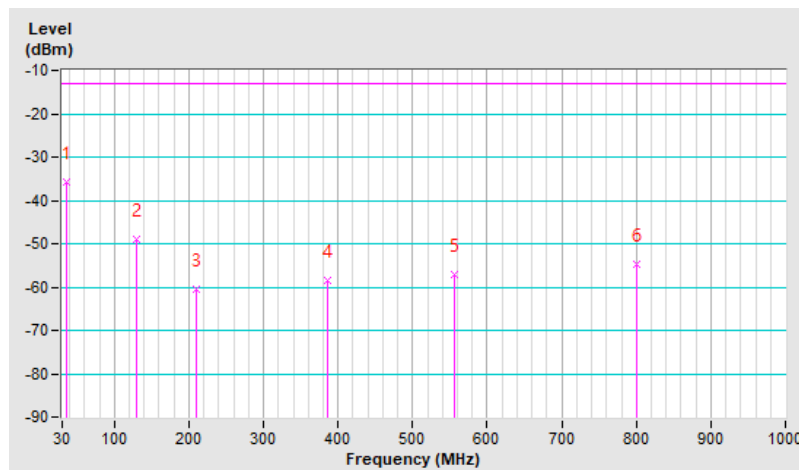


7.6.10 LTE Band 26 (814 MHz ~ 824 MHz)

RF Mode	LTE Band 26 (814 MHz ~ 824 MHz) Channel Bandwidth: 10MHz	Channel	CH 26740 : 819 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.79	-53.49	-13.00	-40.49	1.50 H	174	57.67	-111.16
2	162.89	-54.21	-13.00	-41.21	1.25 H	88	56.17	-110.38
3	229.82	-57.26	-13.00	-44.26	1.00 H	223	55.75	-113.01
4	298.69	-61.57	-13.00	-48.57	2.00 H	86	48.39	-109.96
5	352.04	-62.67	-13.00	-49.67	1.50 H	298	46.17	-108.84
6	799.21	-59.44	-13.00	-46.44	1.00 H	226	40.50	-99.94

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

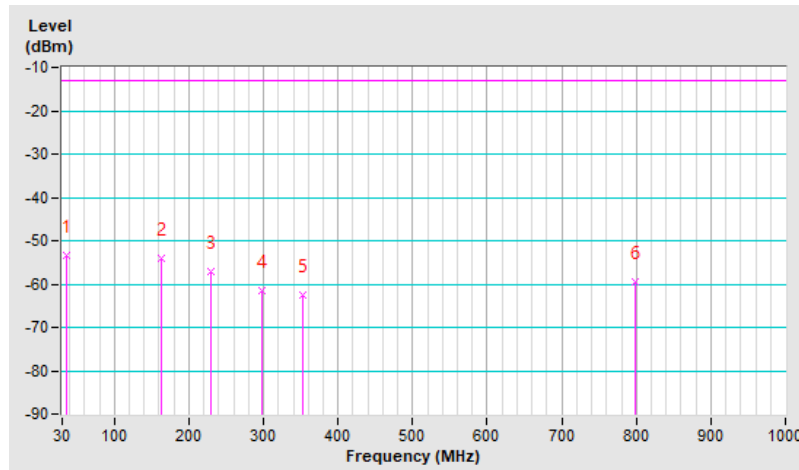




RF Mode	LTE Band 26 (814 MHz ~ 824 MHz) Channel Bandwidth: 10MHz	Channel	CH 26740 : 819 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.79	-37.51	-13.00	-24.51	1.50 V	166	73.65	-111.16
2	60.07	-53.21	-13.00	-40.21	1.25 V	15	57.90	-111.11
3	128.94	-51.52	-13.00	-38.52	1.00 V	128	60.40	-111.92
4	212.36	-62.25	-13.00	-49.25	1.25 V	120	51.80	-114.05
5	385.02	-59.56	-13.00	-46.56	1.00 V	195	48.25	-107.81
6	941.80	-58.20	-13.00	-45.20	1.50 V	195	39.83	-98.03

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

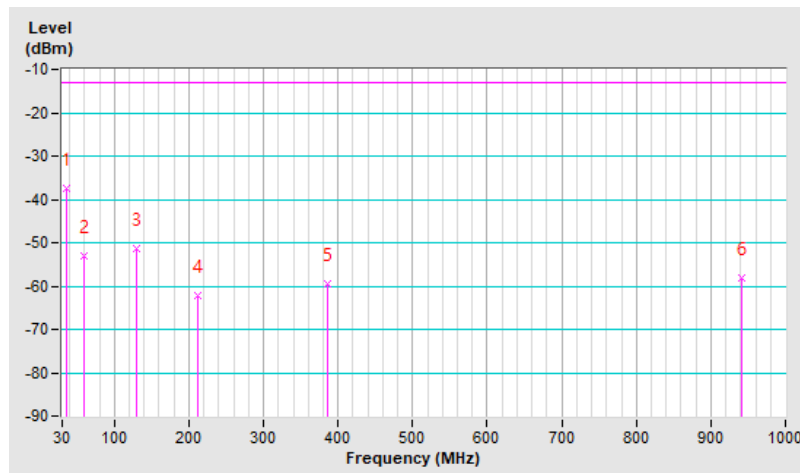

7.6.11 LTE Band 26 (824 MHz ~ 849 MHz)


RF Mode	LTE Band 26 (824 MHz ~ 849 MHz) Channel Bandwidth: 15MHz	Channel	CH 26965 : 841.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.94	-56.69	-13.00	-43.69	1.00 H	155	55.00	-111.69
2	132.82	-53.95	-13.00	-40.95	1.25 H	117	57.51	-111.46
3	213.33	-56.32	-13.00	-43.32	1.50 H	93	57.72	-114.04
4	280.26	-60.12	-13.00	-47.12	1.25 H	83	50.29	-110.41
5	338.46	-62.33	-13.00	-49.33	2.00 H	303	46.59	-108.92
6	578.05	-59.27	-13.00	-46.27	1.00 H	34	44.23	-103.50

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

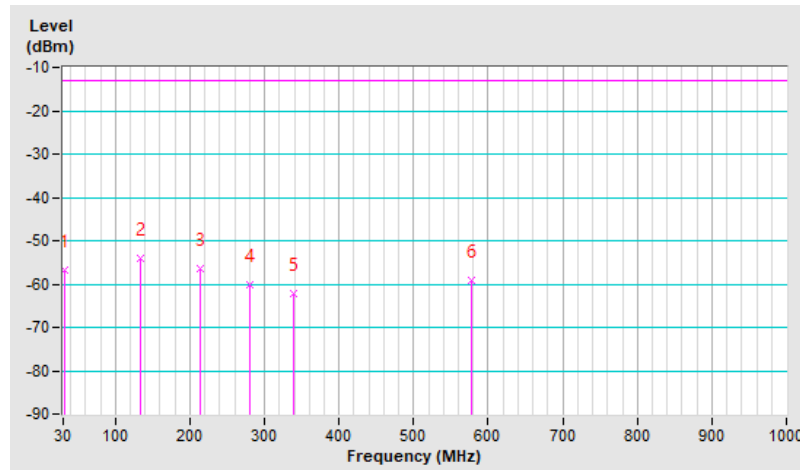




RF Mode	LTE Band 26 (824 MHz ~ 849 MHz) Channel Bandwidth: 15MHz	Channel	CH 26965 : 841.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.94	-42.92	-13.00	-29.92	1.25 V	31	68.77	-111.69
2	49.40	-48.71	-13.00	-35.71	1.50 V	202	61.62	-110.33
3	163.86	-55.53	-13.00	-42.53	1.00 V	176	54.83	-110.36
4	225.94	-64.11	-13.00	-51.11	2.00 V	2	49.53	-113.64
5	352.04	-60.72	-13.00	-47.72	1.00 V	128	48.12	-108.84
6	802.12	-59.85	-13.00	-46.85	2.00 V	100	40.05	-99.90

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

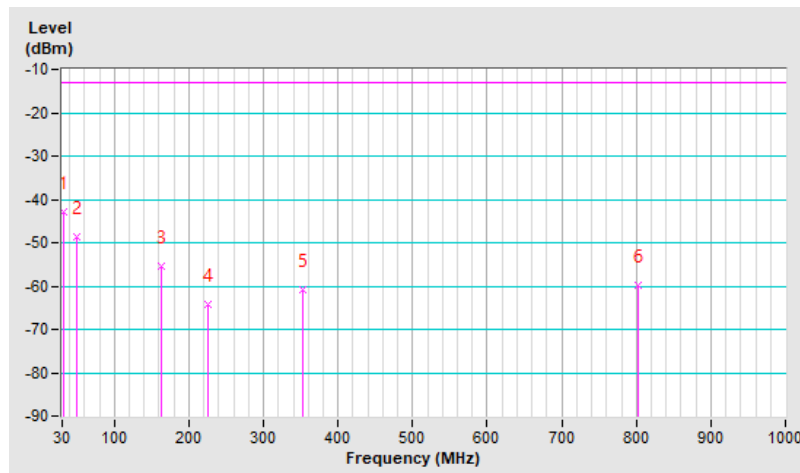


7.6.12 LTE Band 30

RF Mode	LTE Band 30 Channel Bandwidth: 10MHz	Channel	CH 27710 : 2310 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.79	-53.21	-40.00	-13.21	1.50 H	164	55.80	-109.01
2	132.82	-51.24	-40.00	-11.24	1.25 H	138	58.07	-109.31
3	199.75	-52.35	-40.00	-12.35	1.00 H	107	59.56	-111.91
4	248.25	-57.44	-40.00	-17.44	1.25 H	102	52.25	-109.69
5	351.07	-59.68	-40.00	-19.68	1.00 H	309	47.03	-106.71
6	800.18	-55.47	-40.00	-15.47	1.50 H	84	42.33	-97.80

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

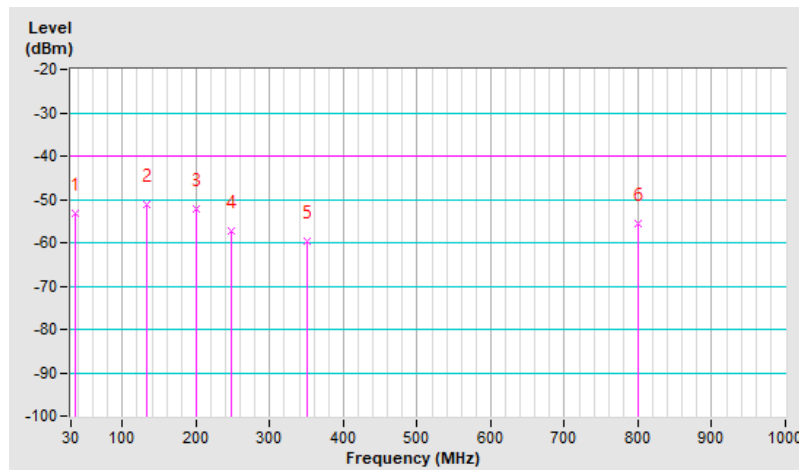


RF Mode	LTE Band 30 Channel Bandwidth: 10MHz	Channel	CH 27710 : 2310 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.94	-40.85	-40.00	-0.85	1.25 V	50	68.69	-109.54
2	49.40	-48.28	-40.00	-8.28	1.50 V	243	59.90	-108.18
3	165.80	-52.66	-40.00	-12.66	1.25 V	172	55.68	-108.34
4	214.30	-59.29	-40.00	-19.29	1.00 V	126	52.59	-111.88
5	385.02	-58.31	-40.00	-18.31	1.00 V	215	47.35	-105.66
6	838.01	-57.31	-40.00	-17.31	1.50 V	281	39.82	-97.13

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

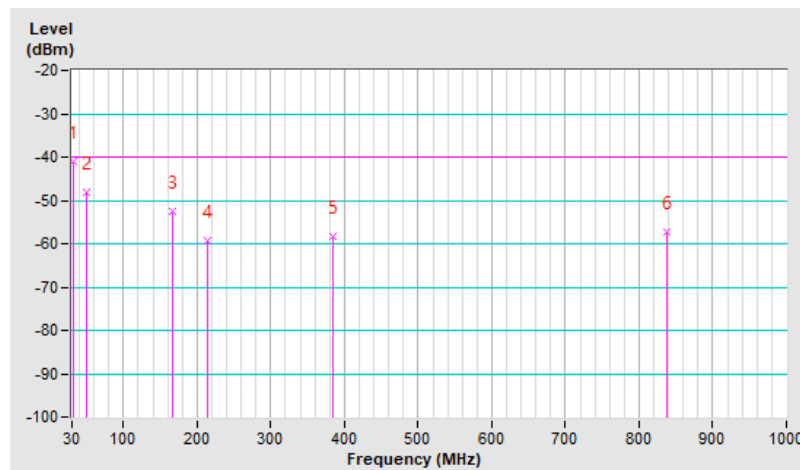


7.6.13 LTE Band 38

RF Mode	LTE Band 38 Channel Bandwidth: 5MHz	Channel	CH 37775 : 2572.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.79	-52.05	-25.00	-27.05	1.25 H	95	56.96	-109.01
2	133.79	-51.92	-25.00	-26.92	1.00 H	106	57.29	-109.21
3	197.81	-52.41	-25.00	-27.41	1.25 H	105	59.44	-111.85
4	248.25	-57.80	-25.00	-32.80	1.50 H	90	51.89	-109.69
5	340.40	-59.72	-25.00	-34.72	1.00 H	312	47.05	-106.77
6	799.21	-56.13	-25.00	-31.13	1.25 H	262	41.66	-97.79

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

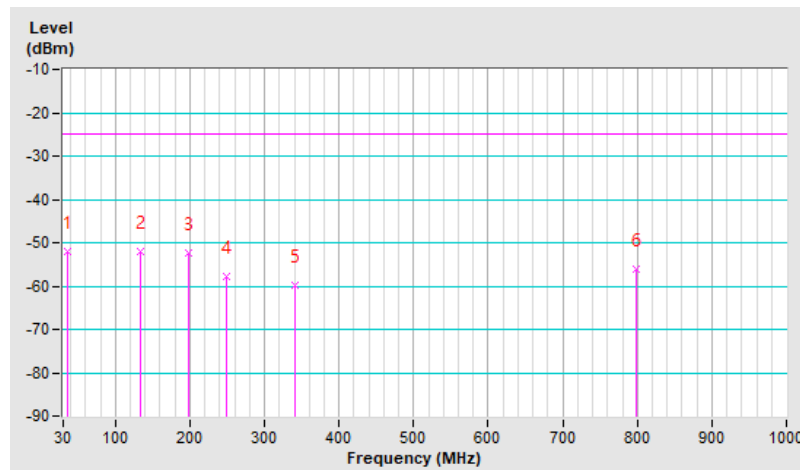


RF Mode	LTE Band 38 Channel Bandwidth: 5MHz	Channel	CH 37775 : 2572.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	-38.24	-25.00	-13.24	1.00 V	309	71.03	-109.27
2	131.85	-47.40	-25.00	-22.40	1.25 V	151	62.11	-109.51
3	184.23	-60.13	-25.00	-35.13	1.00 V	190	50.26	-110.39
4	352.04	-60.58	-25.00	-35.58	1.50 V	318	46.11	-106.69
5	397.63	-58.55	-25.00	-33.55	2.00 V	210	46.90	-105.45
6	800.18	-57.10	-25.00	-32.10	1.25 V	223	40.70	-97.80

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

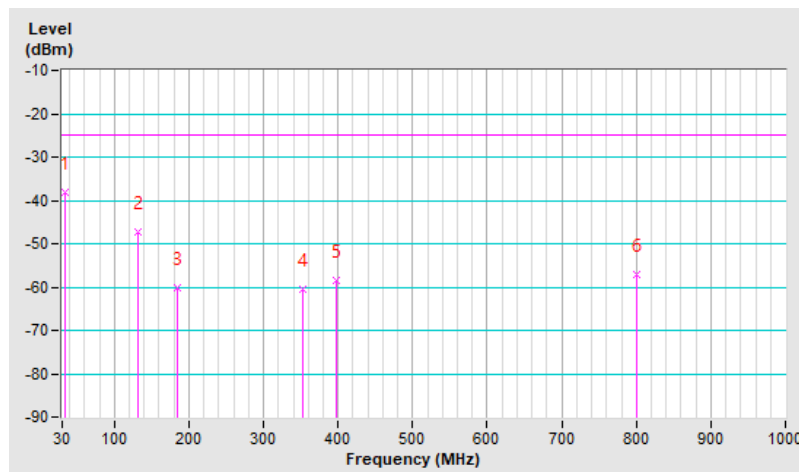


7.6.14 LTE Band 41

RF Mode	LTE Band 41 Channel Bandwidth: 20MHz	Channel	CH 40620 : 2593 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.82	-53.03	-25.00	-28.03	1.50 H	118	56.15	-109.18
2	132.82	-51.70	-25.00	-26.70	1.00 H	167	57.61	-109.31
3	198.78	-52.31	-25.00	-27.31	1.25 H	108	59.59	-111.90
4	281.23	-58.32	-25.00	-33.32	1.00 H	76	49.90	-108.22
5	351.07	-59.91	-25.00	-34.91	1.00 H	310	46.80	-106.71
6	799.21	-57.09	-25.00	-32.09	1.25 H	125	40.70	-97.79

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

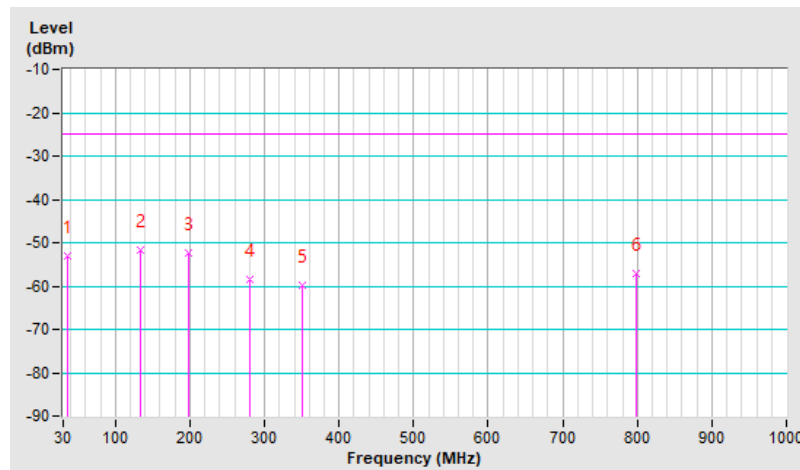


RF Mode	LTE Band 41 Channel Bandwidth: 20MHz	Channel	CH 40620 : 2593 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.79	-36.36	-25.00	-11.36	1.25 V	2	72.65	-109.01
2	129.91	-49.23	-25.00	-24.23	1.00 V	135	60.36	-109.59
3	165.80	-54.60	-25.00	-29.60	1.50 V	325	53.74	-108.34
4	212.36	-60.41	-25.00	-35.41	1.25 V	112	51.49	-111.90
5	391.81	-58.86	-25.00	-33.86	1.00 V	225	46.68	-105.54
6	946.65	-56.79	-25.00	-31.79	1.50 V	43	38.98	-95.77

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

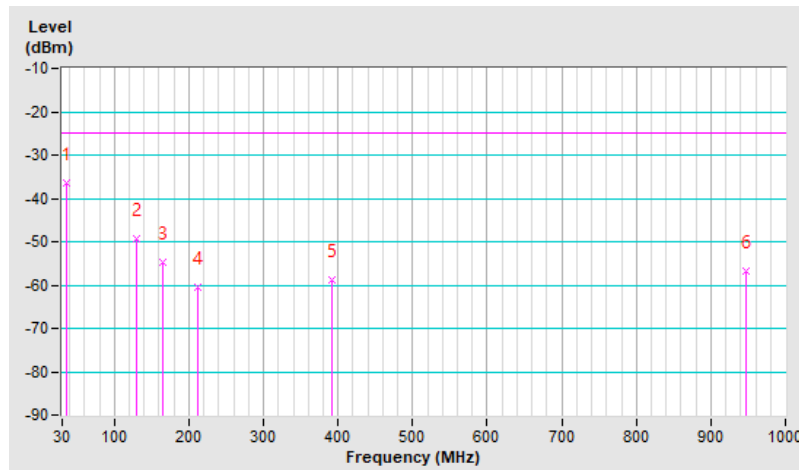


7.6.15 LTE Band 66

RF Mode	LTE Band 66 Channel Bandwidth: 1.4MHz	Channel	CH 132665 : 1779.3 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.76	-52.47	-13.00	-39.47	1.50 H	132	56.47	-108.94
2	132.82	-51.55	-13.00	-38.55	1.25 H	129	57.76	-109.31
3	197.81	-52.61	-13.00	-39.61	1.00 H	108	59.24	-111.85
4	281.23	-57.76	-13.00	-44.76	1.25 H	91	50.46	-108.22
5	591.63	-55.31	-13.00	-42.31	1.00 H	261	45.59	-100.90
6	799.21	-57.60	-13.00	-44.60	1.50 H	83	40.19	-97.79

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

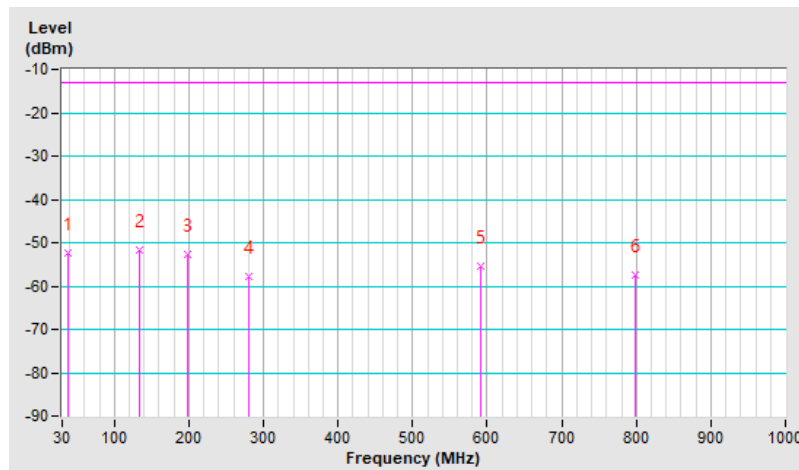




RF Mode	LTE Band 66 Channel Bandwidth: 1.4MHz	Channel	CH 132665 : 1779.3 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	-38.12	-13.00	-25.12	1.50 V	284	71.15	-109.27
2	49.40	-48.28	-13.00	-35.28	1.25 V	239	59.90	-108.18
3	162.89	-52.45	-13.00	-39.45	1.00 V	2	55.78	-108.23
4	247.28	-61.28	-13.00	-48.28	1.50 V	335	48.43	-109.71
5	395.69	-59.02	-13.00	-46.02	1.00 V	202	46.46	-105.48
6	918.52	-57.03	-13.00	-44.03	1.25 V	102	39.01	-96.04

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

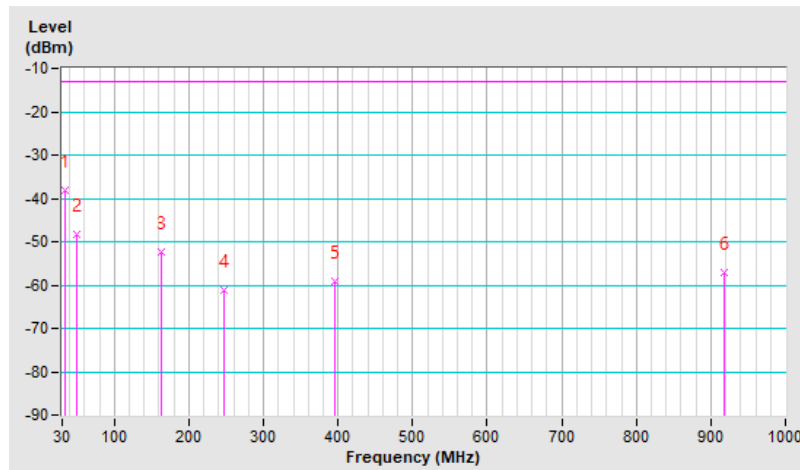

7.6.16 LTE Band 71


RF Mode	LTE Band 71 Channel Bandwidth: 5MHz	Channel	CH 133147 : 665.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.79	-53.60	-13.00	-40.60	1.25 H	130	55.41	-109.01
2	164.83	-51.84	-13.00	-38.84	1.00 H	91	56.44	-108.28
3	214.30	-53.71	-13.00	-40.71	1.25 H	85	58.17	-111.88
4	262.80	-58.35	-13.00	-45.35	1.50 H	94	50.89	-109.24
5	583.87	-57.01	-13.00	-44.01	1.25 H	263	44.19	-101.20
6	961.20	-56.34	-13.00	-43.34	1.00 H	186	39.16	-95.50

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

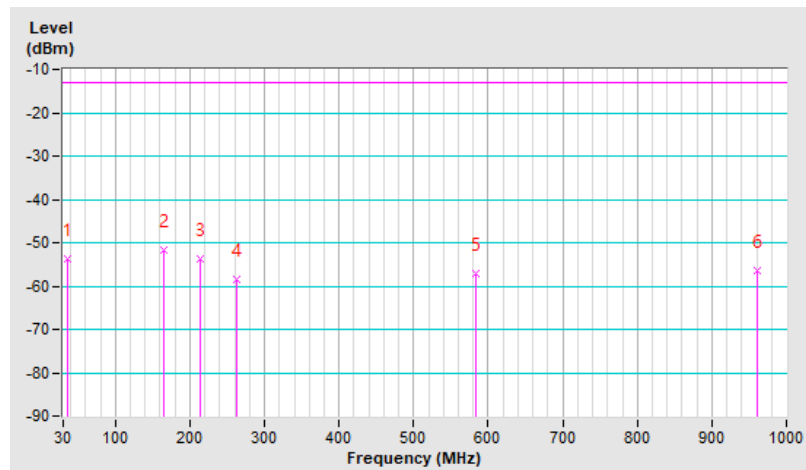


RF Mode	LTE Band 71 Channel Bandwidth: 5MHz	Channel	CH 133147 : 665.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.79	-35.84	-13.00	-22.84	1.50 V	109	73.17	-109.01
2	131.85	-47.34	-13.00	-34.34	1.25 V	159	62.17	-109.51
3	163.86	-52.22	-13.00	-39.22	2.00 V	179	55.99	-108.21
4	352.04	-58.44	-13.00	-45.44	1.00 V	116	48.25	-106.69
5	385.02	-57.44	-13.00	-44.44	1.25 V	194	48.22	-105.66
6	801.15	-56.21	-13.00	-43.21	1.00 V	228	41.56	-97.77

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

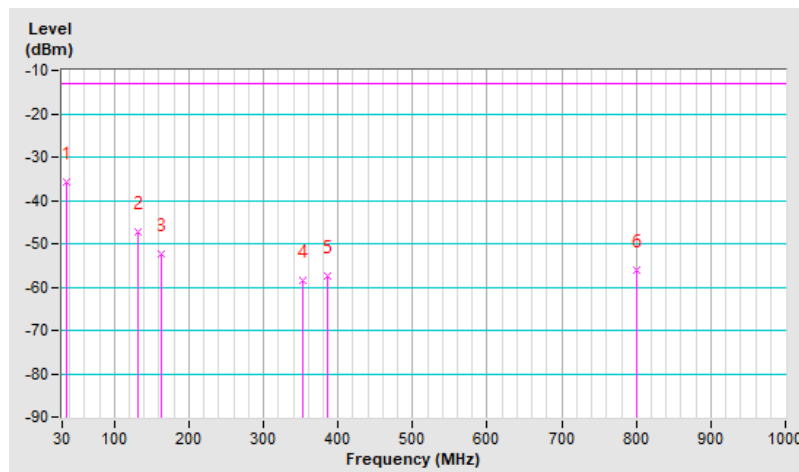

7.7 Radiated Spurious Emissions above 1GHz

7.7.1 LTE Band 2

RF Mode	LTE Band 2 Channel Bandwidth: 1.4MHz	Channel	CH 18607 : 1850.7 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-49.82	-13.00	-36.82	1.48 H	332	45.62	-95.44

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-51.07	-13.00	-38.07	2.75 V	210	44.37	-95.44

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 2 Channel Bandwidth: 1.4MHz	Channel	CH 18900 : 1880 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-49.06	-13.00	-36.06	1.55 H	333	46.02	-95.08
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-50.35	-13.00	-37.35	2.69 V	207	44.73	-95.08

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 2 Channel Bandwidth: 1.4MHz	Channel	CH 19193 : 1909.3 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3818.60	-48.96	-13.00	-35.96	1.51 H	332	45.93	-94.89
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3818.60	-50.10	-13.00	-37.10	2.74 V	205	44.79	-94.89

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 2 Channel Bandwidth: 5MHz	Channel	CH 18625 : 1852.5 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-49.78	-13.00	-36.78	1.52 H	327	45.64	-95.42
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-51.07	-13.00	-38.07	2.73 V	203	44.35	-95.42

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit.



RF Mode	LTE Band 2 Channel Bandwidth: 5MHz	Channel	CH 18900 : 1880 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-49.65	-13.00	-36.65	1.48 H	336	45.43	-95.08
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-50.41	-13.00	-37.41	2.71 V	207	44.67	-95.08

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit.



RF Mode	LTE Band 2 Channel Bandwidth: 5MHz	Channel	CH 19175 : 1907.5 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.00	-48.95	-13.00	-35.95	1.50 H	329	45.96	-94.91
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.00	-50.32	-13.00	-37.32	2.79 V	204	44.59	-94.91

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 2 Channel Bandwidth: 20MHz	Channel	CH 18700 : 1860 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-49.72	-13.00	-36.72	1.52 H	332	45.59	-95.31
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-50.83	-13.00	-37.83	2.76 V	209	44.48	-95.31

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit.



RF Mode	LTE Band 2 Channel Bandwidth: 20MHz	Channel	CH 18900 : 1880 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-49.00	-13.00	-36.00	1.47 H	334	46.08	-95.08
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-50.29	-13.00	-37.29	2.73 V	206	44.79	-95.08

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 2 Channel Bandwidth: 20MHz	Channel	CH 19100 : 1900 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3800.00	-49.56	-13.00	-36.56	1.56 H	332	45.43	-94.99
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3800.00	-50.67	-13.00	-37.67	2.69 V	208	44.32	-94.99

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

7.7.2 LTE Band 4

RF Mode	LTE Band 4 Channel Bandwidth: 1.4MHz	Channel	CH 19957 : 1710.7 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.40	-48.95	-13.00	-35.95	1.51 H	322	47.39	-96.34
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.40	-50.76	-13.00	-37.76	2.60 V	222	45.58	-96.34

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit.



RF Mode	LTE Band 4 Channel Bandwidth: 1.4MHz	Channel	CH 20175 : 1732.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-48.75	-13.00	-35.75	1.57 H	323	47.57	-96.32
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-50.01	-13.00	-37.01	2.56 V	223	46.31	-96.32

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 4 Channel Bandwidth: 1.4MHz	Channel	CH 20393 : 1754.3 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3508.60	-48.40	-13.00	-35.40	1.60 H	326	47.71	-96.11
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3508.60	-50.15	-13.00	-37.15	2.54 V	220	45.96	-96.11

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit.



RF Mode	LTE Band 4 Channel Bandwidth: 5MHz	Channel	CH 19975 : 1712.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-49.06	-13.00	-36.06	1.50 H	324	47.28	-96.34
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-50.25	-13.00	-37.25	2.57 V	228	46.09	-96.34

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 4 Channel Bandwidth: 5MHz	Channel	CH 20175 : 1732.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-49.29	-13.00	-36.29	1.59 H	323	47.03	-96.32
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-49.98	-13.00	-36.98	2.58 V	229	46.34	-96.32

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 4 Channel Bandwidth: 5MHz	Channel	CH 20375 : 1752.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3505.00	-48.51	-13.00	-35.51	1.52 H	320	47.62	-96.13
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3505.00	-49.90	-13.00	-36.90	2.51 V	227	46.23	-96.13

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 4 Channel Bandwidth: 20MHz	Channel	CH 20050 : 1720 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-48.81	-13.00	-35.81	1.51 H	325	47.57	-96.38
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-50.36	-13.00	-37.36	2.51 V	224	46.02	-96.38

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 4 Channel Bandwidth: 20MHz	Channel	CH 20175 : 1732.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-48.59	-13.00	-35.59	1.55 H	324	47.73	-96.32
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-49.96	-13.00	-36.96	2.54 V	231	46.36	-96.32

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 4 Channel Bandwidth: 20MHz	Channel	CH 20300 : 1745 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-48.58	-13.00	-35.58	1.51 H	322	47.61	-96.19
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-50.63	-13.00	-37.63	2.58 V	227	45.56	-96.19

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

7.7.3 LTE Band 5

RF Mode	LTE Band 5 Channel Bandwidth: 1.4MHz	Channel	CH 20407 : 824.7 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1649.40	-57.61	-13.00	-44.61	1.54 H	132	46.24	-103.85

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1649.40	-59.78	-13.00	-46.78	1.51 V	359	44.07	-103.85

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 5 Channel Bandwidth: 1.4MHz	Channel	CH 20525 : 836.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-57.12	-13.00	-44.12	1.49 H	128	46.73	-103.85
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-59.10	-13.00	-46.10	1.41 V	355	44.75	-103.85

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 5 Channel Bandwidth: 1.4MHz	Channel	CH 20643 : 848.3 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1696.60	-57.44	-13.00	-44.44	1.53 H	130	46.41	-103.85
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1696.60	-59.06	-13.00	-46.06	1.43 V	353	44.79	-103.85

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 5 Channel Bandwidth: 5MHz	Channel	CH 20425 : 826.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	-57.12	-13.00	-44.12	1.55 H	129	46.72	-103.84
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	-59.68	-13.00	-46.68	1.46 V	359	44.16	-103.84

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 5 Channel Bandwidth: 5MHz	Channel	CH 20525 : 836.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-57.57	-13.00	-44.57	1.47 H	130	46.28	-103.85
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-59.81	-13.00	-46.81	1.45 V	353	44.04	-103.85

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 5 Channel Bandwidth: 5MHz	Channel	CH 20625 : 846.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.00	-57.56	-13.00	-44.56	1.46 H	126	46.27	-103.83
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.00	-59.75	-13.00	-46.75	1.42 V	355	44.08	-103.83

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 5 Channel Bandwidth: 10MHz	Channel	CH 20450 : 829 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1658.00	-57.65	-13.00	-44.65	1.48 H	130	46.21	-103.86
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1658.00	-59.81	-13.00	-46.81	1.50 V	354	44.05	-103.86

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 5 Channel Bandwidth: 10MHz	Channel	CH 20525 : 836.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-57.62	-13.00	-44.62	1.51 H	127	46.23	-103.85
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-59.27	-13.00	-46.27	1.44 V	358	44.58	-103.85

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 5 Channel Bandwidth: 10MHz	Channel	CH 20600 : 844 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1688.00	-57.52	-13.00	-44.52	1.50 H	129	46.32	-103.84
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1688.00	-58.76	-13.00	-45.76	1.48 V	356	45.08	-103.84

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

7.7.4 LTE Band 7

RF Mode	LTE Band 7 Channel Bandwidth: 5MHz	Channel	CH 20775 : 2502.5 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5005.00	-43.57	-25.00	-18.57	2.74 H	185	49.21	-92.78
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5005.00	-45.61	-25.00	-20.61	1.32 V	303	47.17	-92.78

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 7 Channel Bandwidth: 5MHz	Channel	CH 21100 : 2535 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5070.00	-43.44	-25.00	-18.44	2.71 H	184	49.17	-92.61
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5070.00	-44.63	-25.00	-19.63	1.30 V	304	47.98	-92.61

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 7 Channel Bandwidth: 5MHz	Channel	CH 21425 : 2567.5 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5135.00	-43.21	-25.00	-18.21	2.75 H	181	49.30	-92.51
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5135.00	-45.02	-25.00	-20.02	1.31 V	301	47.49	-92.51

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 7 Channel Bandwidth: 20MHz	Channel	CH 20850 : 2510 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5020.00	-43.63	-25.00	-18.63	2.71 H	188	49.12	-92.75
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5020.00	-45.36	-25.00	-20.36	1.36 V	305	47.39	-92.75

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit.



RF Mode	LTE Band 7 Channel Bandwidth: 20MHz	Channel	CH 21100 : 2535 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5070.00	-43.29	-25.00	-18.29	2.66 H	184	49.32	-92.61
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5070.00	-44.62	-25.00	-19.62	1.35 V	303	47.99	-92.61

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 7 Channel Bandwidth: 20MHz	Channel	CH 21350 : 2560 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5120.00	-43.64	-25.00	-18.64	2.67 H	182	48.86	-92.50
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5120.00	-44.85	-25.00	-19.85	1.34 V	298	47.65	-92.50

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

7.7.5 LTE Band 12

RF Mode	LTE Band 12 Channel Bandwidth: 1.4MHz	Channel	CH 23017 : 699.7 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1399.40	-58.12	-13.00	-45.12	1.56 H	224	45.97	-104.09
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1399.40	-59.47	-13.00	-46.47	1.43 V	349	44.62	-104.09

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 12 Channel Bandwidth: 1.4MHz	Channel	CH 23095 : 707.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-57.62	-13.00	-44.62	1.53 H	221	46.43	-104.05
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-59.28	-13.00	-46.28	1.40 V	349	44.77	-104.05

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 12 Channel Bandwidth: 1.4MHz	Channel	CH 23173 : 715.3 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1430.60	-58.04	-13.00	-45.04	1.55 H	223	45.98	-104.02
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1430.60	-59.15	-13.00	-46.15	1.41 V	344	44.87	-104.02

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 12 Channel Bandwidth: 5MHz	Channel	CH 23035 : 701.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1403.00	-57.62	-13.00	-44.62	1.58 H	225	46.46	-104.08
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1403.00	-58.95	-13.00	-45.95	1.36 V	344	45.13	-104.08

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 12 Channel Bandwidth: 5MHz	Channel	CH 23095 : 707.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-57.44	-13.00	-44.44	1.49 H	228	46.61	-104.05
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-59.48	-13.00	-46.48	1.42 V	348	44.57	-104.05

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 12 Channel Bandwidth: 5MHz	Channel	CH 23155 : 713.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1427.00	-57.68	-13.00	-44.68	1.51 H	223	46.34	-104.02
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1427.00	-59.83	-13.00	-46.83	1.43 V	344	44.19	-104.02

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 12 Channel Bandwidth: 10MHz	Channel	CH 23060 : 704 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1408.00	-58.17	-13.00	-45.17	1.48 H	227	45.91	-104.08
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1408.00	-59.46	-13.00	-46.46	1.39 V	345	44.62	-104.08

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 12 Channel Bandwidth: 10MHz	Channel	CH 23095 : 707.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-57.88	-13.00	-44.88	1.49 H	224	46.17	-104.05
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-59.32	-13.00	-46.32	1.40 V	348	44.73	-104.05

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 12 Channel Bandwidth: 10MHz	Channel	CH 23130 : 711 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422.00	-57.56	-13.00	-44.56	1.48 H	225	46.48	-104.04
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422.00	-59.82	-13.00	-46.82	1.43 V	347	44.22	-104.04

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

7.7.6 LTE Band 13

RF Mode	LTE Band 13 Channel Bandwidth: 5MHz	Channel	CH 23205 : 779.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1559.00	-52.95	-40.00	-12.95	1.92 H	191	48.88	-101.83
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1559.00	-54.03	-40.00	-14.03	1.45 V	289	47.80	-101.83

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit.



RF Mode	LTE Band 13 Channel Bandwidth: 5MHz	Channel	CH 23230 : 782 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1564.00	-53.26	-40.00	-13.26	1.92 H	187	48.56	-101.82
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1564.00	-54.28	-40.00	-14.28	1.44 V	285	47.54	-101.82

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit.



RF Mode	LTE Band 13 Channel Bandwidth: 5MHz	Channel	CH 23255 : 784.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1569.00	-53.22	-40.00	-13.22	2.02 H	191	48.59	-101.81
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1569.00	-54.17	-40.00	-14.17	1.38 V	288	47.64	-101.81

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 13 Channel Bandwidth: 10MHz	Channel	CH 23230 : 782 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1564.00	-52.15	-40.00	-12.15	1.95 H	190	49.67	-101.82

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1564.00	-54.15	-40.00	-14.15	1.47 V	286	47.67	-101.82

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

7.7.7 LTE Band 14

RF Mode	LTE Band 14 Channel Bandwidth: 5MHz	Channel	CH 23305 : 790.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1581.00	-53.70	-40.00	-13.70	2.08 H	217	48.11	-101.81

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1581.00	-55.50	-40.00	-15.50	1.92 V	184	46.31	-101.81

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit.



RF Mode	LTE Band 14 Channel Bandwidth: 5MHz	Channel	CH 23330 : 793 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1586.00	-53.72	-40.00	-13.72	2.03 H	216	48.08	-101.80
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1586.00	-55.27	-40.00	-15.27	2.01 V	184	46.53	-101.80

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 14 Channel Bandwidth: 5MHz	Channel	CH 23355 : 795.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1591.00	-54.22	-40.00	-14.22	2.03 H	220	47.58	-101.80
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1591.00	-55.37	-40.00	-15.37	1.97 V	183	46.43	-101.80

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 14 Channel Bandwidth: 10MHz	Channel	CH 23330 : 793 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1586.00	-53.61	-40.00	-13.61	2.01 H	216	48.19	-101.80
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1586.00	-55.27	-40.00	-15.27	1.99 V	183	46.53	-101.80

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

7.7.8 LTE Band 17

RF Mode	LTE Band 17 Channel Bandwidth: 5MHz	Channel	CH 23755 : 706.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1413.00	-56.84	-13.00	-43.84	1.78 H	145	47.22	-104.06
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1413.00	-58.13	-13.00	-45.13	1.57 V	306	45.93	-104.06

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 17 Channel Bandwidth: 5MHz	Channel	CH 23790 : 710 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1420.00	-56.40	-13.00	-43.40	1.79 H	148	47.65	-104.05
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1420.00	-57.60	-13.00	-44.60	1.58 V	305	46.45	-104.05

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 17 Channel Bandwidth: 5MHz	Channel	CH 23825 : 713.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1427.00	-55.97	-13.00	-42.97	1.80 H	152	48.05	-104.02

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1427.00	-57.40	-13.00	-44.40	1.51 V	309	46.62	-104.02

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.



RF Mode	LTE Band 17 Channel Bandwidth: 10MHz	Channel	CH 23780 : 709 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1418.00	-56.47	-13.00	-43.47	1.78 H	151	47.57	-104.04
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1418.00	-57.92	-13.00	-44.92	1.55 V	312	46.12	-104.04

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 17 Channel Bandwidth: 10MHz	Channel	CH 23790 : 710 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1420.00	-56.50	-13.00	-43.50	1.84 H	145	47.55	-104.05
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1420.00	-57.98	-13.00	-44.98	1.48 V	311	46.07	-104.05

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 17 Channel Bandwidth: 10MHz	Channel	CH 23800 : 711 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422.00	-55.92	-13.00	-42.92	1.83 H	150	48.12	-104.04
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422.00	-57.62	-13.00	-44.62	1.53 V	305	46.42	-104.04

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

7.7.9 LTE Band 25

RF Mode	LTE Band 25 Channel Bandwidth: 1.4MHz	Channel	CH 26047 : 1850.7 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-48.38	-13.00	-35.38	1.40 H	318	47.11	-95.49
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-49.81	-13.00	-36.81	2.96 V	204	45.68	-95.49

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit.



RF Mode	LTE Band 25 Channel Bandwidth: 1.4MHz	Channel	CH 26365 : 1882.5 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-47.32	-13.00	-34.32	1.44 H	322	47.77	-95.09
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-49.38	-13.00	-36.38	2.96 V	202	45.71	-95.09

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 25 Channel Bandwidth: 1.4MHz	Channel	CH 26683 : 1914.3 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3828.60	-47.89	-13.00	-34.89	1.48 H	323	46.99	-94.88
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3828.60	-49.45	-13.00	-36.45	2.88 V	203	45.43	-94.88

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 25 Channel Bandwidth: 5MHz	Channel	CH 26065 : 1852.5 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-48.14	-13.00	-35.14	1.48 H	320	47.33	-95.47
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-49.95	-13.00	-36.95	2.88 V	207	45.52	-95.47

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 25 Channel Bandwidth: 5MHz	Channel	CH 26365 : 1882.5 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-47.82	-13.00	-34.82	1.43 H	322	47.27	-95.09
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-49.61	-13.00	-36.61	2.96 V	204	45.48	-95.09

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 25 Channel Bandwidth: 5MHz	Channel	CH 26665 : 1912.5 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3825.00	-47.73	-13.00	-34.73	1.41 H	324	47.15	-94.88
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3825.00	-48.81	-13.00	-35.81	2.90 V	202	46.07	-94.88

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 25 Channel Bandwidth: 20MHz	Channel	CH 26140 : 1860 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-47.63	-13.00	-34.63	1.39 H	319	47.73	-95.36
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-49.53	-13.00	-36.53	2.92 V	206	45.83	-95.36

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 25 Channel Bandwidth: 20MHz	Channel	CH 26365 : 1882.5 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-47.83	-13.00	-34.83	1.47 H	318	47.26	-95.09
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-49.35	-13.00	-36.35	2.91 V	206	45.74	-95.09

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 25 Channel Bandwidth: 20MHz	Channel	CH 26590 : 1905 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3810.00	-47.16	-13.00	-34.16	1.43 H	323	47.79	-94.95
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3810.00	-49.08	-13.00	-36.08	2.89 V	201	45.87	-94.95

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit.

7.7.10 LTE Band 26 (814 MHz ~ 824 MHz)

RF Mode	LTE Band 26 (814 MHz ~ 824 MHz) Channel Bandwidth: 1.4MHz	Channel	CH 26697 : 814.7 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1629.40	-56.64	-13.00	-43.64	2.78 H	239	47.25	-103.89

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1629.40	-57.57	-13.00	-44.57	1.67 V	289	46.32	-103.89

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 26 (814 MHz ~ 824 MHz) Channel Bandwidth: 1.4MHz	Channel	CH 26740 : 819 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1638.00	-56.55	-13.00	-43.55	2.72 H	240	47.32	-103.87
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1638.00	-57.79	-13.00	-44.79	1.61 V	284	46.08	-103.87

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 26 (814 MHz ~ 824 MHz) Channel Bandwidth: 1.4MHz	Channel	CH 26783 : 823.3 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1646.60	-55.84	-13.00	-42.84	2.82 H	241	48.02	-103.86
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1646.60	-57.53	-13.00	-44.53	1.63 V	287	46.33	-103.86

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 26 (814 MHz ~ 824 MHz) Channel Bandwidth: 5MHz	Channel	CH 26715 : 816.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1633.00	-56.65	-13.00	-43.65	2.77 H	241	47.23	-103.88
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1633.00	-58.23	-13.00	-45.23	1.58 V	285	45.65	-103.88

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 26 (814 MHz ~ 824 MHz) Channel Bandwidth: 5MHz	Channel	CH 26740 : 819 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1638.00	-56.58	-13.00	-43.58	2.76 H	245	47.29	-103.87
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1638.00	-57.34	-13.00	-44.34	1.67 V	289	46.53	-103.87

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 26 (814 MHz ~ 824 MHz) Channel Bandwidth: 5MHz	Channel	CH 26765 : 821.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1643.00	-56.48	-13.00	-43.48	2.76 H	245	47.38	-103.86
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1643.00	-58.31	-13.00	-45.31	1.66 V	287	45.55	-103.86

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 26 (814 MHz ~ 824 MHz) Channel Bandwidth: 10MHz	Channel	CH 26740 : 819 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1638.00	-55.79	-13.00	-42.79	2.74 H	245	48.08	-103.87
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1638.00	-57.31	-13.00	-44.31	1.62 V	288	46.56	-103.87

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

7.7.11 LTE Band 26 (824 MHz ~ 849 MHz)

RF Mode	LTE Band 26 (824 MHz ~ 849 MHz) Channel Bandwidth: 1.4MHz	Channel	CH 26797 : 824.7 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1649.40	-56.02	-13.00	-43.02	1.07 H	238	47.83	-103.85

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1649.40	-57.72	-13.00	-44.72	1.41 V	298	46.13	-103.85

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 26 (824 MHz ~ 849 MHz) Channel Bandwidth: 1.4MHz	Channel	CH 26915 : 836.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-56.12	-13.00	-43.12	1.07 H	241	47.73	-103.85
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-57.54	-13.00	-44.54	1.37 V	297	46.31	-103.85

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 26 (824 MHz ~ 849 MHz) Channel Bandwidth: 1.4MHz	Channel	CH 27033 : 848.3 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1696.60	-55.97	-13.00	-42.97	1.11 H	238	47.88	-103.85
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1696.60	-57.23	-13.00	-44.23	1.35 V	297	46.62	-103.85

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 26 (824 MHz ~ 849 MHz) Channel Bandwidth: 5MHz	Channel	CH 26815 : 826.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	-56.22	-13.00	-43.22	1.13 H	235	47.62	-103.84
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	-57.70	-13.00	-44.70	1.35 V	299	46.14	-103.84

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 26 (824 MHz ~ 849 MHz) Channel Bandwidth: 5MHz	Channel	CH 26915 : 836.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-55.89	-13.00	-42.89	1.03 H	236	47.96	-103.85
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-57.58	-13.00	-44.58	1.34 V	295	46.27	-103.85

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 26 (824 MHz ~ 849 MHz) Channel Bandwidth: 5MHz	Channel	CH 27015 : 846.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.00	-55.54	-13.00	-42.54	1.10 H	239	48.29	-103.83
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.00	-57.85	-13.00	-44.85	1.33 V	293	45.98	-103.83

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 26 (824 MHz ~ 849 MHz) Channel Bandwidth: 15MHz	Channel	CH 26865 : 831.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1663.00	-55.86	-13.00	-42.86	1.10 H	235	47.99	-103.85
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1663.00	-57.18	-13.00	-44.18	1.34 V	297	46.67	-103.85

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 26 (824 MHz ~ 849 MHz) Channel Bandwidth: 15MHz	Channel	CH 26915 : 836.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-55.42	-13.00	-42.42	1.06 H	239	48.43	-103.85
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-57.11	-13.00	-44.11	1.41 V	296	46.74	-103.85

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 26 (824 MHz ~ 849 MHz) Channel Bandwidth: 15MHz	Channel	CH 26965 : 841.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1683.00	-55.68	-13.00	-42.68	1.09 H	242	48.17	-103.85
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1683.00	-57.24	-13.00	-44.24	1.42 V	301	46.61	-103.85

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

7.7.12 LTE Band 30

RF Mode	LTE Band 30 Channel Bandwidth: 5MHz	Channel	CH 27685 : 2307.5 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4615.00	-45.56	-40.00	-5.56	1.70 H	199	47.84	-93.40

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4615.00	-46.98	-40.00	-6.98	3.91 V	194	46.42	-93.40

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 30 Channel Bandwidth: 5MHz	Channel	CH 27710 : 2310 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4620.00	-45.38	-40.00	-5.38	1.69 H	198	48.01	-93.39
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4620.00	-46.87	-40.00	-6.87	3.85 V	192	46.52	-93.39

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 30 Channel Bandwidth: 5MHz	Channel	CH 27735 : 2312.5 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4625.00	-45.28	-40.00	-5.28	1.63 H	195	48.10	-93.38
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4625.00	-46.54	-40.00	-6.54	3.89 V	191	46.84	-93.38

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 30 Channel Bandwidth: 10MHz	Channel	CH 27710 : 2310 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4620.00	-45.26	-40.00	-5.26	1.62 H	196	48.13	-93.39
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4620.00	-46.48	-40.00	-6.48	3.89 V	197	46.91	-93.39

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

7.7.13 LTE Band 38

RF Mode	LTE Band 38 Channel Bandwidth: 5MHz	Channel	CH 37775 : 2572.5 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5145.00	-40.29	-25.00	-15.29	1.03 H	227	52.21	-92.50
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5145.00	-41.67	-25.00	-16.67	1.21 V	176	50.83	-92.50

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit.



RF Mode	LTE Band 38 Channel Bandwidth: 5MHz	Channel	CH 38000 : 2595 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5190.00	-40.73	-25.00	-15.73	1.05 H	229	51.94	-92.67
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5190.00	-41.58	-25.00	-16.58	1.22 V	179	51.09	-92.67

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 38 Channel Bandwidth: 5MHz	Channel	CH 38225 : 2617.5 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5235.00	-40.52	-25.00	-15.52	1.00 H	223	52.23	-92.75
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5235.00	-42.04	-25.00	-17.04	1.26 V	182	50.71	-92.75

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 38 Channel Bandwidth: 20MHz	Channel	CH 37850 : 2580 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5160.00	-40.31	-25.00	-15.31	1.04 H	226	52.24	-92.55
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5160.00	-41.24	-25.00	-16.24	1.17 V	178	51.31	-92.55

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 38 Channel Bandwidth: 5MHz	Channel	CH 38000 : 2595 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5190.00	-40.40	-25.00	-15.40	1.02 H	223	52.27	-92.67
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5190.00	-41.35	-25.00	-16.35	1.15 V	174	51.32	-92.67

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 38 Channel Bandwidth: 20MHz	Channel	CH 38150 : 2610 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5220.00	-40.58	-25.00	-15.58	1.01 H	227	52.15	-92.73
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5220.00	-41.92	-25.00	-16.92	1.25 V	180	50.81	-92.73

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

7.7.14 LTE Band 41

RF Mode	LTE Band 41 Channel Bandwidth: 5MHz	Channel	CH 39675 : 2498.5 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4997.00	-44.15	-25.00	-19.15	1.87 H	71	48.64	-92.79
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4997.00	-45.46	-25.00	-20.46	1.99 V	141	47.33	-92.79

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit.



RF Mode	LTE Band 41 Channel Bandwidth: 5MHz	Channel	CH 40620 : 2593 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5186.00	-43.97	-25.00	-18.97	1.85 H	68	48.69	-92.66
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5186.00	-45.29	-25.00	-20.29	2.02 V	140	47.37	-92.66

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 41 Channel Bandwidth: 5MHz	Channel	CH 41565 : 2687.5 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5375.00	-44.06	-25.00	-19.06	1.89 H	65	48.59	-92.65
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5375.00	-45.42	-25.00	-20.42	2.03 V	138	47.23	-92.65

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 41 Channel Bandwidth: 20MHz	Channel	CH 39750 : 2506 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5012.00	-44.33	-25.00	-19.33	1.89 H	70	48.43	-92.76
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5012.00	-45.79	-25.00	-20.79	1.97 V	141	46.97	-92.76

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 41 Channel Bandwidth: 20MHz	Channel	CH 40620 : 2593 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5186.00	-43.95	-25.00	-18.95	1.91 H	67	48.71	-92.66
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5186.00	-45.24	-25.00	-20.24	2.01 V	143	47.42	-92.66

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 41 Channel Bandwidth: 20MHz	Channel	CH 41490 : 2680 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5360.00	-44.02	-25.00	-19.02	1.82 H	72	48.65	-92.67
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5360.00	-45.80	-25.00	-20.80	1.96 V	142	46.87	-92.67

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

7.7.15 LTE Band 66

RF Mode	LTE Band 66 Channel Bandwidth: 1.4MHz	Channel	CH 131979 : 1710.7 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.40	-48.48	-13.00	-35.48	2.05 H	111	47.86	-96.34

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.40	-49.52	-13.00	-36.52	1.58 V	216	46.82	-96.34

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit.



RF Mode	LTE Band 66 Channel Bandwidth: 1.4MHz	Channel	CH 132322 : 1745 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-48.35	-13.00	-35.35	1.97 H	113	47.84	-96.19
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-49.13	-13.00	-36.13	1.57 V	214	47.06	-96.19

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 66 Channel Bandwidth: 1.4MHz	Channel	CH 132665 : 1779.3 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3558.60	-47.79	-13.00	-34.79	2.00 H	113	48.18	-95.97
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3558.60	-48.86	-13.00	-35.86	1.59 V	215	47.11	-95.97

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 66 Channel Bandwidth: 5MHz	Channel	CH 131997 : 1712.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-48.12	-13.00	-35.12	2.06 H	113	48.22	-96.34
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-49.27	-13.00	-36.27	1.54 V	216	47.07	-96.34

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 66 Channel Bandwidth: 5MHz	Channel	CH 132322 : 1745 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-48.33	-13.00	-35.33	2.05 H	109	47.86	-96.19
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-49.07	-13.00	-36.07	1.59 V	210	47.12	-96.19

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 66 Channel Bandwidth: 5MHz	Channel	CH 132647 : 1777.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3555.00	-47.84	-13.00	-34.84	2.02 H	110	48.14	-95.98
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3555.00	-48.92	-13.00	-35.92	1.49 V	212	47.06	-95.98

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 66 Channel Bandwidth: 20MHz	Channel	CH 132072 : 1720 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-48.25	-13.00	-35.25	2.04 H	115	48.13	-96.38
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-49.14	-13.00	-36.14	1.50 V	216	47.24	-96.38

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 66 Channel Bandwidth: 20MHz	Channel	CH 132322 : 1745 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-47.95	-13.00	-34.95	2.03 H	112	48.24	-96.19
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-48.94	-13.00	-35.94	1.52 V	211	47.25	-96.19

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 66 Channel Bandwidth: 20MHz	Channel	CH 132572 : 1770 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3540.00	-47.81	-13.00	-34.81	1.98 H	111	48.21	-96.02
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3540.00	-48.90	-13.00	-35.90	1.58 V	217	47.12	-96.02

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

7.7.16 LTE Band 71

RF Mode	LTE Band 71 Channel Bandwidth: 5MHz	Channel	CH 133147 : 665.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1331.00	-56.49	-13.00	-43.49	2.69 H	181	47.62	-104.11
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1331.00	-58.49	-13.00	-45.49	1.53 V	303	45.62	-104.11

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 71 Channel Bandwidth: 5MHz	Channel	CH 133297 : 680.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1361.00	-56.28	-13.00	-43.28	2.67 H	180	47.77	-104.05
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1361.00	-58.02	-13.00	-45.02	1.54 V	305	46.03	-104.05

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 71 Channel Bandwidth: 5MHz	Channel	CH 133447 : 695.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1391.00	-56.42	-13.00	-43.42	2.75 H	184	47.66	-104.08
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1391.00	-58.33	-13.00	-45.33	1.59 V	300	45.75	-104.08

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 71 Channel Bandwidth: 20MHz	Channel	CH 133222 : 673 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1346.00	-56.97	-13.00	-43.97	2.69 H	178	47.09	-104.06
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1346.00	-57.61	-13.00	-44.61	1.58 V	302	46.45	-104.06

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 71 Channel Bandwidth: 20MHz	Channel	CH 133297 : 680.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1361.00	-56.53	-13.00	-43.53	2.73 H	180	47.52	-104.05
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1361.00	-57.80	-13.00	-44.80	1.61 V	306	46.25	-104.05

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 71 Channel Bandwidth: 20MHz	Channel	CH 133372 : 688 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1376.00	-56.45	-13.00	-43.45	2.66 H	177	47.62	-104.07
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1376.00	-57.68	-13.00	-44.68	1.56 V	306	46.39	-104.07

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

7.8 Frequency Stability

Environmental Conditions:	25°C, 60% RH	Tested By:	Noah Chang
---------------------------	--------------	------------	------------

7.8.1 LTE Band 2

LTE Band 2, Channel Bandwidth: 1.4 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 18607 (1850.7 MHz)		CH 19193 (1909.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	1850.700008	0.0043	1909.300005	0.0026
3.87	1850.699999	-0.0054	1909.299993	-0.0037
4.40	1850.700003	0.0016	1909.300007	0.0037

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 18607 (1850.7 MHz)		CH 19193 (1909.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1850.699992	-0.0043	1909.299995	-0.0026
-20	1850.700006	0.0032	1909.300009	0.0047
-10	1850.700001	0.0005	1909.299997	-0.0016
0	1850.7	0	1909.300002	0.001
10	1850.699999	-0.0054	1909.299992	-0.0042
20	1850.700001	0.0054	1909.300009	0.0047
30	1850.699996	-0.0022	1909.299992	-0.0042
40	1850.699999	-0.0054	1909.299994	-0.0031
50	1850.699995	-0.0027	1909.299992	-0.0042

LTE Band 2, Channel Bandwidth: 3 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 18615 (1851.5 MHz)		CH 19185 (1908.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	1851.500003	0.0016	1908.499999	-0.0005
3.87	1851.5	0	1908.500001	0.0005
4.40	1851.500001	0.0005	1908.500004	0.0021

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 18615 (1851.5 MHz)		CH 19185 (1908.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1851.500007	0.0038	1908.500003	0.0016
-20	1851.500001	0.0005	1908.500002	0.001
-10	1851.500005	0.0027	1908.500009	0.0047
0	1851.500007	0.0038	1908.500006	0.0031
10	1851.500004	0.0022	1908.5	0
20	1851.499999	-0.0005	1908.500002	0.001
30	1851.500004	0.0022	1908.500004	0.0021
40	1851.499993	-0.0038	1908.499991	-0.0047
50	1851.499996	-0.0022	1908.499994	-0.0031

LTE Band 2, Channel Bandwidth: 5 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 18625 (1852.5 MHz)		CH 19175 (1907.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	1852.499997	-0.0016	1907.499993	-0.0037
3.87	1852.500009	0.0049	1907.500005	0.0026
4.40	1852.500003	0.0016	1907.500007	0.0037

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 18625 (1852.5 MHz)		CH 19175 (1907.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1852.500008	0.0043	1907.500005	0.0026
-20	1852.499996	-0.0022	1907.499994	-0.0031
-10	1852.499994	-0.0032	1907.499996	-0.0021
0	1852.500009	0.0049	1907.500006	0.0031
10	1852.499993	-0.0038	1907.499999	-0.0052
20	1852.500002	0.0011	1907.499998	-0.001
30	1852.499995	-0.0027	1907.499995	-0.0026
40	1852.500004	0.0022	1907.5	0
50	1852.499997	-0.0016	1907.499993	-0.0037

LTE Band 2, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 18650 (1855 MHz)		CH 19150 (1905 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	1855.000007	0.0038	1905.000006	0.0031
3.87	1855.000006	0.0032	1905.000009	0.0047
4.40	1854.999996	-0.0022	1905.000001	0.0005

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 18650 (1855 MHz)		CH 19150 (1905 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1854.999996	-0.0022	1904.999991	-0.0047
-20	1854.999998	-0.0011	1905.000002	0.001
-10	1854.999998	-0.0011	1904.999999	-0.0005
0	1855	0	1905.000003	0.0016
10	1855.000005	0.0027	1905.000002	0.001
20	1855.000003	0.0016	1904.999999	-0.0005
30	1855.000009	0.0049	1905.000006	0.0031
40	1854.999999	-0.0005	1905.000001	0.0005
50	1854.999993	-0.0038	1904.999997	-0.0016

LTE Band 2, Channel Bandwidth: 15 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 18675 (1857.5 MHz)		CH 19125 (1902.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	1857.499991	-0.0048	1902.499991	-0.0047
3.87	1857.499999	-0.0005	1902.500004	0.0021
4.40	1857.499991	-0.0048	1902.499993	-0.0037

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 18675 (1857.5 MHz)		CH 19125 (1902.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1857.499991	-0.0048	1902.499996	-0.0021
-20	1857.499992	-0.0043	1902.499994	-0.0032
-10	1857.500008	0.0043	1902.50001	0.0053
0	1857.500009	0.0048	1902.500008	0.0042
10	1857.500001	0.0005	1902.500003	0.0016
20	1857.499995	-0.0027	1902.499995	-0.0026
30	1857.5	0	1902.500003	0.0016
40	1857.500007	0.0038	1902.500005	0.0026
50	1857.499995	-0.0027	1902.499995	-0.0026

LTE Band 2, Channel Bandwidth: 20 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 18700 (1860 MHz)		CH 19100 (1900 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	1859.999998	-0.0011	1899.999994	-0.0032
3.87	1860.000005	0.0027	1900.000008	0.0042
4.40	1859.999994	-0.0032	1899.999996	-0.0021

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 18700 (1860 MHz)		CH 19100 (1900 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1860.000006	0.0032	1900.000002	0.0011
-20	1859.99999	-0.0054	1899.999992	-0.0042
-10	1860.000009	0.0048	1900.000008	0.0042
0	1859.999999	-0.0005	1900.000004	0.0021
10	1859.999992	-0.0043	1899.999991	-0.0047
20	1860.000008	0.0043	1900.000006	0.0032
30	1860.000008	0.0043	1900.000006	0.0032
40	1860.000004	0.0022	1900.000001	0.0005
50	1860.000004	0.0022	1900.000008	0.0042

7.8.2 LTE Band 4

LTE Band 4, Channel Bandwidth: 1.4 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 19957 (1710.7 MHz)		CH 20393 (1754.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	1710.700006	0.0035	1754.300002	0.0011
3.87	1710.700006	0.0035	1754.300004	0.0023
4.40	1710.700009	0.0053	1754.300006	0.0034

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 19957 (1710.7 MHz)		CH 20393 (1754.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1710.699995	-0.0029	1754.299992	-0.0046
-20	1710.699998	-0.0012	1754.3	0
-10	1710.699996	-0.0023	1754.299995	-0.0029
0	1710.699999	-0.0006	1754.300001	0.0006
10	1710.699992	-0.0047	1754.299996	-0.0023
20	1710.700002	0.0012	1754.299999	-0.0006
30	1710.699997	-0.0018	1754.299999	-0.0006
40	1710.700008	0.0047	1754.300001	0.0057
50	1710.699996	-0.0023	1754.299993	-0.004

LTE Band 4, Channel Bandwidth: 3 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 19965 (1711.5 MHz)		CH 20385 (1753.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	1711.499994	-0.0035	1753.499991	-0.0051
3.87	1711.499995	-0.0029	1753.5	0
4.40	1711.499992	-0.0047	1753.49999	-0.0057

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 19965 (1711.5 MHz)		CH 20385 (1753.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1711.500001	0.0006	1753.499997	-0.0017
-20	1711.499991	-0.0053	1753.49999	-0.0057
-10	1711.499994	-0.0035	1753.499991	-0.0051
0	1711.499992	-0.0047	1753.499993	-0.004
10	1711.499992	-0.0047	1753.499994	-0.0034
20	1711.500003	0.0018	1753.500001	0.0006
30	1711.499992	-0.0047	1753.499992	-0.0046
40	1711.499996	-0.0023	1753.499992	-0.0046
50	1711.499998	-0.0012	1753.499999	-0.0006

LTE Band 4, Channel Bandwidth: 5 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 19975 (1712.5 MHz)		CH 20375 (1752.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	1712.499995	-0.0029	1752.499993	-0.004
3.87	1712.49999	-0.0058	1752.499992	-0.0046
4.40	1712.500004	0.0023	1752.500008	0.0046

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 19975 (1712.5 MHz)		CH 20375 (1752.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1712.5	0	1752.500004	0.0023
-20	1712.499999	-0.0006	1752.500003	0.0017
-10	1712.499995	-0.0029	1752.499995	-0.0029
0	1712.499996	-0.0023	1752.499993	-0.004
10	1712.499992	-0.0047	1752.499992	-0.0046
20	1712.499998	-0.0012	1752.500001	0.0006
30	1712.500001	0.0006	1752.500003	0.0017
40	1712.500007	0.0041	1752.500001	0.0057
50	1712.49999	-0.0058	1752.499992	-0.0046

LTE Band 4, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 20000 (1715 MHz)		CH 20350 (1750 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	1715.000006	0.0035	1750.000006	0.0034
3.87	1714.999991	-0.0052	1749.999992	-0.0046
4.40	1714.999996	-0.0023	1750	0

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 20000 (1715 MHz)		CH 20350 (1750 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1714.999991	-0.0052	1749.99999	-0.0057
-20	1715.000002	0.0012	1750.000001	0.0006
-10	1715.000001	0.0058	1750.000008	0.0046
0	1715.000004	0.0023	1750.000002	0.0011
10	1715.000006	0.0035	1750.000006	0.0034
20	1715.000006	0.0035	1750.000001	0.0057
30	1715.000009	0.0052	1750.000005	0.0029
40	1715.000007	0.0041	1750.000006	0.0034
50	1714.999992	-0.0047	1749.999996	-0.0023

LTE Band 4, Channel Bandwidth: 15 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 20025 (1717.5 MHz)		CH 20325 (1747.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	1717.49999	-0.0058	1747.499993	-0.004
3.87	1717.499992	-0.0047	1747.49999	-0.0057
4.40	1717.500009	0.0052	1747.50001	0.0057

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 20025 (1717.5 MHz)		CH 20325 (1747.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1717.499998	-0.0012	1747.5	0
-20	1717.500009	0.0052	1747.50001	0.0057
-10	1717.500008	0.0047	1747.500009	0.0052
0	1717.500004	0.0023	1747.500001	0.0006
10	1717.50001	0.0058	1747.500008	0.0046
20	1717.499993	-0.0041	1747.499995	-0.0029
30	1717.499999	-0.0006	1747.5	0
40	1717.5	0	1747.500002	0.0011
50	1717.500005	0.0029	1747.500001	0.0006

LTE Band 4, Channel Bandwidth: 20 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 20050 (1720 MHz)		CH 20300 (1745 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	1719.999999	-0.0006	1744.999999	-0.0006
3.87	1720.000004	0.0023	1745.000008	0.0046
4.40	1720.000005	0.0029	1745.000003	0.0017

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 20050 (1720 MHz)		CH 20300 (1745 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1720.000003	0.0017	1745.000008	0.0046
-20	1719.999998	-0.0012	1745.000001	0.0006
-10	1720.000003	0.0017	1745.000002	0.0011
0	1719.999991	-0.0052	1744.999994	-0.0034
10	1719.999994	-0.0035	1744.999992	-0.0046
20	1719.99999	-0.0058	1744.999994	-0.0034
30	1719.99999	-0.0058	1744.999991	-0.0052
40	1720.000007	0.0041	1745.000001	0.0057
50	1719.999993	-0.0041	1744.99999	-0.0057

7.8.3 LTE Band 5

LTE Band 5, Channel Bandwidth: 1.4 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 20407 (824.7 MHz)		CH 20643 (848.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	824.700001	0.0012	848.3	0
3.87	824.700007	0.0085	848.300003	0.0035
4.40	824.70001	0.0121	848.300007	0.0083

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 20407 (824.7 MHz)		CH 20643 (848.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	824.699997	-0.0036	848.299996	-0.0047
-20	824.700004	0.0049	848.300008	0.0094
-10	824.699996	-0.0049	848.299996	-0.0047
0	824.699996	-0.0049	848.299991	-0.0106
10	824.700001	0.0012	848.300006	0.0071
20	824.700009	0.0109	848.300009	0.0106
30	824.699993	-0.0085	848.299993	-0.0083
40	824.699994	-0.0073	848.299992	-0.0094
50	824.700006	0.0073	848.300004	0.0047

LTE Band 5, Channel Bandwidth: 3 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 20415 (825.5 MHz)		CH 20635 (847.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	825.5	0	847.499999	-0.0012
3.87	825.500005	0.0061	847.500007	0.0083
4.40	825.499993	-0.0085	847.499994	-0.0071

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 20415 (825.5 MHz)		CH 20635 (847.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	825.499991	-0.0109	847.499995	-0.0059
-20	825.500006	0.0073	847.500001	0.0012
-10	825.499997	-0.0036	847.499998	-0.0024
0	825.499991	-0.0109	847.499994	-0.0071
10	825.500001	0.0121	847.500009	0.0106
20	825.499997	-0.0036	847.500001	0.0012
30	825.500009	0.0109	847.500001	0.0118
40	825.500009	0.0109	847.500005	0.0059
50	825.499994	-0.0073	847.499998	-0.0024

LTE Band 5, Channel Bandwidth: 5 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 20425 (826.5 MHz)		CH 20625 (846.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	826.500006	0.0073	846.500009	0.0106
3.87	826.500006	0.0073	846.500001	0.0118
4.40	826.499996	-0.0048	846.499996	-0.0047

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 20425 (826.5 MHz)		CH 20625 (846.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	826.500002	0.0024	846.499999	-0.0012
-20	826.499999	-0.0012	846.499998	-0.0024
-10	826.500004	0.0048	846.500007	0.0083
0	826.500007	0.0085	846.500009	0.0106
10	826.499993	-0.0085	846.499993	-0.0083
20	826.499996	-0.0048	846.499991	-0.0106
30	826.500003	0.0036	846.500005	0.0059
40	826.499992	-0.0097	846.499994	-0.0071
50	826.500005	0.006	846.500003	0.0035

LTE Band 5, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 20450 (829 MHz)		CH 20600 (844 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	828.999994	-0.0072	843.999998	-0.0024
3.87	828.999993	-0.0084	843.999994	-0.0071
4.40	829.000002	0.0024	843.999998	-0.0024

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 20450 (829 MHz)		CH 20600 (844 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	828.999996	-0.0048	843.999997	-0.0036
-20	828.999992	-0.0097	843.999992	-0.0095
-10	828.999991	-0.0109	843.999991	-0.0107
0	829.000008	0.0097	844.000007	0.0083
10	829.000008	0.0097	844.000004	0.0047
20	829.000001	0.0121	844.000008	0.0095
30	828.999999	-0.0121	843.999999	-0.0118
40	828.999997	-0.0036	843.999997	-0.0036
50	828.999998	-0.0024	843.999999	-0.0012

7.8.4 LTE Band 7

LTE Band 7, Channel Bandwidth: 5 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 20775 (2502.5 MHz)		CH 21425 (2567.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	2502.500009	0.0036	2567.500006	0.0023
3.87	2502.499997	-0.0012	2567.499996	-0.0016
4.40	2502.500001	0.0004	2567.499996	-0.0016

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 20775 (2502.5 MHz)		CH 21425 (2567.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2502.500009	0.0036	2567.500009	0.0035
-20	2502.500001	0.0004	2567.499998	-0.0008
-10	2502.499996	-0.0016	2567.499997	-0.0012
0	2502.500006	0.0024	2567.500007	0.0027
10	2502.499994	-0.0024	2567.499999	-0.0039
20	2502.499993	-0.0028	2567.499994	-0.0023
30	2502.500008	0.0032	2567.500003	0.0012
40	2502.499993	-0.0028	2567.499993	-0.0027
50	2502.499999	-0.004	2567.499995	-0.0019

LTE Band 7, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 20800 (2505 MHz)		CH 21400 (2565 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	2504.999996	-0.0016	2564.999992	-0.0031
3.87	2504.999993	-0.0028	2564.999996	-0.0016
4.40	2504.999991	-0.0036	2564.999992	-0.0031

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 20800 (2505 MHz)		CH 21400 (2565 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2505.000002	0.0008	2564.999999	-0.0004
-20	2504.99999	-0.004	2564.999994	-0.0023
-10	2504.999991	-0.0036	2564.999996	-0.0016
0	2504.999994	-0.0024	2564.999991	-0.0035
10	2505.000009	0.0036	2565.000006	0.0023
20	2505.000003	0.0012	2565.000007	0.0027
30	2504.999998	-0.0008	2564.999994	-0.0023
40	2505.000003	0.0012	2564.999999	-0.0004
50	2504.999999	-0.0004	2565.000001	0.0004

LTE Band 7, Channel Bandwidth: 15 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 20825 (2507.5 MHz)		CH 21375 (2562.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	2507.499999	-0.0004	2562.499998	-0.0008
3.87	2507.499996	-0.0016	2562.499998	-0.0008
4.40	2507.500002	0.0008	2562.499997	-0.0012

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 20825 (2507.5 MHz)		CH 21375 (2562.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2507.500004	0.0016	2562.500008	0.0031
-20	2507.499991	-0.0036	2562.499996	-0.0016
-10	2507.499994	-0.0024	2562.499994	-0.0023
0	2507.500001	0.0004	2562.500005	0.002
10	2507.500009	0.0036	2562.500006	0.0023
20	2507.500002	0.0008	2562.499999	-0.0004
30	2507.500006	0.0024	2562.500002	0.0008
40	2507.500005	0.002	2562.500009	0.0035
50	2507.499995	-0.002	2562.499994	-0.0023

LTE Band 7, Channel Bandwidth: 20 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 20850 (2510 MHz)		CH 21350 (2560 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	2509.999994	-0.0024	2559.999997	-0.0012
3.87	2510.000004	0.0016	2560.000006	0.0023
4.40	2510.000004	0.0016	2560.000007	0.0027

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 20850 (2510 MHz)		CH 21350 (2560 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2510	0	2559.999999	-0.0004
-20	2510	0	2559.999996	-0.0016
-10	2510.000002	0.0008	2560	0
0	2510.000002	0.0008	2560.000004	0.0016
10	2510.000005	0.002	2560.000006	0.0023
20	2509.999991	-0.0036	2559.999992	-0.0031
30	2509.999994	-0.0024	2559.999998	-0.0008
40	2510.000006	0.0024	2560.000007	0.0027
50	2510.000001	0.004	2560.000009	0.0035

7.8.5 LTE Band 12

LTE Band 12, Channel Bandwidth: 1.4 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 23017 (699.7 MHz)		CH 23173 (715.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	699.700008	0.0114	715.300004	0.0056
3.87	699.700005	0.0071	715.300008	0.0112
4.40	699.7	0	715.299998	-0.0028

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 23017 (699.7 MHz)		CH 23173 (715.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	699.700006	0.0086	715.300003	0.0042
-20	699.699999	-0.0014	715.300001	0.0014
-10	699.699997	-0.0043	715.299999	-0.0014
0	699.699999	-0.0014	715.299999	-0.0014
10	699.699999	-0.0143	715.299993	-0.0098
20	699.700005	0.0071	715.300006	0.0084
30	699.699992	-0.0114	715.299991	-0.0126
40	699.700008	0.0114	715.300007	0.0098
50	699.7	0	715.299999	-0.0014

LTE Band 12, Channel Bandwidth: 3 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 23025 (700.5 MHz)		CH 23165 (714.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	700.500003	0.0043	714.500005	0.007
3.87	700.50001	0.0143	714.500009	0.0126
4.40	700.499999	-0.0014	714.5	0

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 23025 (700.5 MHz)		CH 23165 (714.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	700.500006	0.0086	714.500008	0.0112
-20	700.499995	-0.0071	714.4099996	-0.0056
-10	700.500009	0.0128	714.500007	0.0098
0	700.500004	0.0057	714.500005	0.007
10	700.499998	-0.0029	714.500003	0.0042
20	700.499993	-0.01	714.409999	-0.014
30	700.499993	-0.01	714.409999	-0.014
40	700.500009	0.0128	714.500008	0.0112
50	700.500001	0.0014	714.500004	0.0056

LTE Band 12, Channel Bandwidth: 5 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 23035 (701.5 MHz)		CH 23155 (713.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	701.500005	0.0071	713.500001	0.0014
3.87	701.499993	-0.01	713.499999	-0.014
4.40	701.499991	-0.0128	713.499991	-0.0126

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 23035 (701.5 MHz)		CH 23155 (713.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	701.500006	0.0086	713.500008	0.0112
-20	701.499997	-0.0043	713.499992	-0.0112
-10	701.499991	-0.0128	713.499991	-0.0126
0	701.499999	-0.0143	713.499994	-0.0084
10	701.500001	0.0014	713.500006	0.0084
20	701.499994	-0.0086	713.499999	-0.0014
30	701.500004	0.0057	713.500001	0.0014
40	701.500003	0.0043	713.500004	0.0056
50	701.499994	-0.0086	713.499997	-0.0042

LTE Band 12, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 23060 (704 MHz)		CH 23130 (711 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	703.999993	-0.0099	710.999997	-0.0042
3.87	704.000009	0.0128	711.000009	0.0127
4.40	704.000009	0.0128	711.000006	0.0084

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 23060 (704 MHz)		CH 23130 (711 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	703.999991	-0.0128	710.99999	-0.0141
-20	703.999997	-0.0043	711	0
-10	703.999995	-0.0071	710.999997	-0.0042
0	704.000001	0.0014	711.000001	0.0014
10	704.000004	0.0057	710.999999	-0.0014
20	703.999996	-0.0057	710.999998	-0.0028
30	704	0	711.000002	0.0028
40	703.999992	-0.0114	710.999995	-0.007
50	704.000002	0.0028	711.000002	0.0028

7.8.6 LTE Band 13

LTE Band 13, Channel Bandwidth: 5 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 23205 (779.5 MHz)		CH 23255 (784.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	779.500008	0.0103	784.500003	0.0038
3.87	779.499993	-0.009	784.4099998	-0.0025
4.40	779.500001	0.0013	784.500003	0.0038

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 23205 (779.5 MHz)		CH 23255 (784.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	779.500005	0.0064	784.500007	0.0089
-20	779.500006	0.0077	784.500004	0.0051
-10	779.499998	-0.0026	784.4099998	-0.0025
0	779.499992	-0.0103	784.4099991	-0.0115
10	779.499997	-0.0038	784.4099999	-0.0013
20	779.500005	0.0064	784.500008	0.0102
30	779.500002	0.0026	784.4099998	-0.0025
40	779.499998	-0.0026	784.4099996	-0.0051
50	779.500009	0.0115	784.500001	0.0127

LTE Band 13, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage		
Voltage (Vdc)	CH 23230 (782 MHz)	
	Frequency (MHz)	Frequency Error (ppm)
3.60	782.000003	0.0038
3.87	781.999991	-0.0115
4.40	782.000002	0.0026

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature		
Temperature (°C)	CH 23230 (782 MHz)	
	Frequency (MHz)	Frequency Error (ppm)
-30	782.000004	0.0051
-20	782.000009	0.0115
-10	782.000008	0.0102
0	782.000001	0.0013
10	782.000006	0.0077
20	781.999996	-0.0051
30	781.999996	-0.0051
40	782.000006	0.0077
50	782.00001	0.0128

7.8.7 LTE Band 14

LTE Band 14, Channel Bandwidth: 5 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 23305 (790.5 MHz)		CH 23355 (795.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	790.499994	-0.0076	795.499997	-0.0038
3.87	790.499993	-0.0089	795.499995	-0.0063
4.40	790.499994	-0.0076	795.499995	-0.0063

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 23305 (790.5 MHz)		CH 23355 (795.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	790.499991	-0.0114	795.499992	-0.0101
-20	790.500005	0.0063	795.500007	0.0088
-10	790.499999	-0.0127	795.499992	-0.0101
0	790.499992	-0.0101	795.499995	-0.0063
10	790.499996	-0.0051	795.499995	-0.0063
20	790.499996	-0.0051	795.499996	-0.005
30	790.500007	0.0089	795.500004	0.005
40	790.499996	-0.0051	795.499994	-0.0075
50	790.5	0	795.500005	0.0063

LTE Band 14, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage		
Voltage (Vdc)	CH 23330 (793 MHz)	
	Frequency (MHz)	Frequency Error (ppm)
3.60	793.000007	0.0088
3.87	792.999999	-0.0013
4.40	792.999999	-0.0013

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature		
Temperature (°C)	CH 23330 (793 MHz)	
	Frequency (MHz)	Frequency Error (ppm)
-30	792.999992	-0.0101
-20	792.999994	-0.0076
-10	793.000002	0.0025
0	793.000005	0.0063
10	793.000001	0.0013
20	792.999993	-0.0088
30	792.999991	-0.0113
40	792.999991	-0.0113
50	792.999991	-0.0113

7.8.8 LTE Band 17

LTE Band 17, Channel Bandwidth: 5 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 23755 (706.5 MHz)		CH 23825 (713.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	706.499993	-0.0099	713.499996	-0.0056
3.87	706.500009	0.0127	713.500005	0.007
4.40	706.499999	-0.0014	713.500003	0.0042

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 23755 (706.5 MHz)		CH 23825 (713.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	706.500009	0.0127	713.500006	0.0084
-20	706.499991	-0.0127	713.499991	-0.0126
-10	706.500009	0.0127	713.500008	0.0112
0	706.499993	-0.0099	713.499998	-0.0028
10	706.499995	-0.0071	713.499995	-0.007
20	706.499993	-0.0099	713.499997	-0.0042
30	706.499998	-0.0028	713.499999	-0.0014
40	706.500006	0.0085	713.500004	0.0056
50	706.500005	0.0071	713.500003	0.0042

LTE Band 17, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 23780 (709 MHz)		CH 23800 (711 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	709.000006	0.0085	711.000002	0.0028
3.87	708.999997	-0.0042	710.999993	-0.0098
4.40	708.999992	-0.0113	710.999997	-0.0042

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 23780 (709 MHz)		CH 23800 (711 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	708.999996	-0.0056	710.999994	-0.0084
-20	709.000004	0.0056	711.000003	0.0042
-10	709.000002	0.0028	711.000004	0.0056
0	709.000003	0.0042	711.000007	0.0098
10	708.999994	-0.0085	710.999991	-0.0127
20	709.000002	0.0028	711.000003	0.0042
30	709.000007	0.0099	711.000005	0.007
40	709.000008	0.0113	711.000008	0.0113
50	709.000006	0.0085	711.000005	0.007

7.8.9 LTE Band 25

LTE Band 25, Channel Bandwidth: 1.4 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 26047 (1850.7 MHz)		CH 26683 (1914.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	1850.700001	0.0005	1914.299998	-0.001
3.87	1850.699996	-0.0022	1914.299992	-0.0042
4.40	1850.700005	0.0027	1914.300006	0.0031

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 26047 (1850.7 MHz)		CH 26683 (1914.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1850.700003	0.0016	1914.300004	0.0021
-20	1850.700004	0.0022	1914.300003	0.0016
-10	1850.699996	-0.0022	1914.299995	-0.0026
0	1850.699999	-0.0054	1914.299999	-0.0052
10	1850.699995	-0.0027	1914.299996	-0.0021
20	1850.700003	0.0016	1914.300005	0.0026
30	1850.7	0	1914.299995	-0.0026
40	1850.700001	0.0005	1914.299998	-0.001
50	1850.700007	0.0038	1914.30001	0.0052

LTE Band 25, Channel Bandwidth: 3 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 26055 (1851.5 MHz)		CH 26675 (1913.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	1851.500001	0.0005	1913.500005	0.0026
3.87	1851.500005	0.0027	1913.500006	0.0031
4.40	1851.500007	0.0038	1913.500002	0.001

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 26055 (1851.5 MHz)		CH 26675 (1913.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1851.500004	0.0022	1913.500006	0.0031
-20	1851.499999	-0.0005	1913.499996	-0.0021
-10	1851.500004	0.0022	1913.5	0
0	1851.499998	-0.0011	1913.5	0
10	1851.499996	-0.0022	1913.499997	-0.0016
20	1851.499997	-0.0016	1913.499997	-0.0016
30	1851.500009	0.0049	1913.500006	0.0031
40	1851.500001	0.0005	1913.500005	0.0026
50	1851.500007	0.0038	1913.500005	0.0026

LTE Band 25, Channel Bandwidth: 5 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 26065 (1852.5 MHz)		CH 26665 (1912.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	1852.500004	0.0022	1912.500001	0.0005
3.87	1852.499996	-0.0022	1912.499993	-0.0037
4.40	1852.499999	-0.0005	1912.499999	-0.0005

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 26065 (1852.5 MHz)		CH 26665 (1912.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1852.500006	0.0032	1912.500003	0.0016
-20	1852.499995	-0.0027	1912.499994	-0.0031
-10	1852.500002	0.0011	1912.500002	0.001
0	1852.499991	-0.0049	1912.499999	-0.0052
10	1852.500005	0.0027	1912.500001	0.0005
20	1852.5	0	1912.499999	-0.0005
30	1852.499993	-0.0038	1912.499996	-0.0021
40	1852.500009	0.0049	1912.500007	0.0037
50	1852.499991	-0.0049	1912.499993	-0.0037

LTE Band 25, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 26090 (1855 MHz)		CH 26640 (1910 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	1855.000002	0.0011	1910.000004	0.0021
3.87	1854.999997	-0.0016	1910.000002	0.001
4.40	1855.000009	0.0049	1910.000007	0.0037

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 26090 (1855 MHz)		CH 26640 (1910 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1854.999997	-0.0016	1909.999996	-0.0021
-20	1854.999995	-0.0027	1909.999997	-0.0016
-10	1854.99999	-0.0054	1909.999994	-0.0031
0	1855.000001	0.0005	1909.999998	-0.001
10	1854.999995	-0.0027	1909.999996	-0.0021
20	1854.999994	-0.0032	1909.999992	-0.0042
30	1855.000001	0.0005	1910.000003	0.0016
40	1854.999993	-0.0038	1909.999992	-0.0042
50	1854.999993	-0.0038	1909.999997	-0.0016

LTE Band 25, Channel Bandwidth: 15 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 26115 (1857.5 MHz)		CH 26615 (1907.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	1857.499998	-0.0011	1907.500002	0.001
3.87	1857.500007	0.0038	1907.500006	0.0031
4.40	1857.499999	-0.0054	1907.499991	-0.0047

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 26115 (1857.5 MHz)		CH 26615 (1907.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1857.500003	0.0016	1907.5	0
-20	1857.499998	-0.0011	1907.499996	-0.0021
-10	1857.500002	0.0011	1907.500003	0.0016
0	1857.500001	0.0054	1907.500009	0.0047
10	1857.500008	0.0043	1907.500001	0.0052
20	1857.500003	0.0016	1907.500007	0.0037
30	1857.499994	-0.0032	1907.499994	-0.0031
40	1857.500008	0.0043	1907.500001	0.0052
50	1857.500007	0.0038	1907.500005	0.0026

LTE Band 25, Channel Bandwidth: 20 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 26140 (1860 MHz)		CH 26590 (1905 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	1859.999994	-0.0032	1904.999997	-0.0016
3.87	1860.000006	0.0032	1905.000005	0.0026
4.40	1860.000006	0.0032	1905.00001	0.0052

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 26140 (1860 MHz)		CH 26590 (1905 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1859.999992	-0.0043	1904.999996	-0.0021
-20	1860	0	1905.000002	0.001
-10	1860.000003	0.0016	1905.000004	0.0021
0	1860.000005	0.0027	1905.000002	0.001
10	1859.999996	-0.0022	1904.999996	-0.0021
20	1859.999991	-0.0048	1904.999995	-0.0026
30	1860.000002	0.0011	1905.000004	0.0021
40	1860.000004	0.0022	1905.000004	0.0021
50	1859.99999	-0.0054	1904.99999	-0.0052

7.8.10 LTE Band 26 (814 MHz ~ 824 MHz)

LTE Band 26 (814 MHz ~ 824 MHz), Channel Bandwidth: 1.4 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 26697 (814.7 MHz)		CH 26783 (823.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	814.700007	0.0086	823.300007	0.0085
3.87	814.700001	0.0012	823.300006	0.0073
4.40	814.7	0	823.300001	0.0012

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 26697 (814.7 MHz)		CH 26783 (823.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	814.700007	0.0086	823.300003	0.0036
-20	814.700005	0.0061	823.300001	0.0121
-10	814.7	0	823.3	0
0	814.699999	-0.0123	823.299995	-0.0061
10	814.700009	0.011	823.300007	0.0085
20	814.700009	0.011	823.300008	0.0097
30	814.700005	0.0061	823.300002	0.0024
40	814.700005	0.0061	823.300001	0.0121
50	814.700007	0.0086	823.300004	0.0049

LTE Band 26 (814 MHz ~ 824 MHz), Channel Bandwidth: 3 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 26705 (815.5 MHz)		CH 26775 (822.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	815.500007	0.0086	822.500005	0.0061
3.87	815.50001	0.0123	822.500007	0.0085
4.40	815.499996	-0.0049	822.499993	-0.0085

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 26705 (815.5 MHz)		CH 26775 (822.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	815.499999	-0.0012	822.500002	0.0024
-20	815.499992	-0.0098	822.499999	-0.0122
-10	815.499999	-0.0012	822.500003	0.0036
0	815.500006	0.0074	822.500005	0.0061
10	815.499998	-0.0025	822.499993	-0.0085
20	815.499993	-0.0086	822.499993	-0.0085
30	815.500003	0.0037	822.500003	0.0036
40	815.499991	-0.011	822.499996	-0.0049
50	815.50001	0.0123	822.50001	0.0122

LTE Band 26 (814 MHz ~ 824 MHz), Channel Bandwidth: 5 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 26715 (816.5 MHz)		CH 26765 (821.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	816.500005	0.0061	821.500009	0.011
3.87	816.499991	-0.011	821.499999	-0.0122
4.40	816.500007	0.0086	821.500006	0.0073

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 26715 (816.5 MHz)		CH 26765 (821.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	816.500009	0.011	821.500004	0.0049
-20	816.500007	0.0086	821.500005	0.0061
-10	816.500008	0.0098	821.500008	0.0097
0	816.499999	-0.0012	821.499995	-0.0061
10	816.500008	0.0098	821.500006	0.0073
20	816.499992	-0.0098	821.499996	-0.0049
30	816.499994	-0.0073	821.499993	-0.0085
40	816.499991	-0.011	821.499991	-0.011
50	816.500006	0.0073	821.500004	0.0049

LTE Band 26 (814 MHz ~ 824 MHz), Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage		
Voltage (Vdc)	CH 26740 (819 MHz)	
	Frequency (MHz)	Frequency Error (ppm)
3.60	819	0
3.87	819.000005	0.0061
4.40	818.999995	-0.0061

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature		
Temperature (°C)	CH 26740 (819 MHz)	
	Frequency (MHz)	Frequency Error (ppm)
-30	819.000003	0.0037
-20	818.999995	-0.0061
-10	819.000004	0.0049
0	818.999996	-0.0049
10	819.000001	0.0012
20	818.999996	-0.0049
30	818.999996	-0.0049
40	818.999993	-0.0085
50	819	0

7.8.11 LTE Band 26 (824 MHz ~ 849 MHz)

LTE Band 26 (824 MHz ~ 849 MHz), Channel Bandwidth: 1.4 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 26797 (824.7 MHz)		CH 27033 (848.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	824.699999	-0.0012	848.300003	0.0035
3.87	824.700002	0.0024	848.300005	0.0059
4.40	824.700008	0.0097	848.300008	0.0094

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 26797 (824.7 MHz)		CH 27033 (848.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	824.699997	-0.0036	848.299996	-0.0047
-20	824.700006	0.0073	848.300009	0.0106
-10	824.699999	-0.0121	848.299999	-0.0118
0	824.699992	-0.0097	848.299994	-0.0071
10	824.700009	0.0109	848.30001	0.0118
20	824.700004	0.0049	848.3	0
30	824.699995	-0.0061	848.299999	-0.0118
40	824.700003	0.0036	848.300004	0.0047
50	824.700001	0.0012	848.300001	0.0012

LTE Band 26 (824 MHz ~ 849 MHz), Channel Bandwidth: 3 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 26805 (825.5 MHz)		CH 27025 (847.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	825.500003	0.0036	847.500001	0.0012
3.87	825.499994	-0.0073	847.499993	-0.0083
4.40	825.500009	0.0109	847.500008	0.0094

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 26805 (825.5 MHz)		CH 27025 (847.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	825.499993	-0.0085	847.499993	-0.0083
-20	825.500001	0.0012	847.500002	0.0024
-10	825.499999	-0.0012	847.500003	0.0035
0	825.5	0	847.499996	-0.0047
10	825.500005	0.0061	847.500007	0.0083
20	825.499999	-0.0012	847.500003	0.0035
30	825.500003	0.0036	847.500003	0.0035
40	825.500005	0.0061	847.500001	0.0118
50	825.500003	0.0036	847.500004	0.0047

LTE Band 26 (824 MHz ~ 849 MHz), Channel Bandwidth: 5 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 26815 (826.5 MHz)		CH 27015 (846.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	826.499998	-0.0024	846.499994	-0.0071
3.87	826.500003	0.0036	846.499999	-0.0012
4.40	826.499996	-0.0048	846.499997	-0.0035

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 26815 (826.5 MHz)		CH 27015 (846.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	826.499995	-0.006	846.499996	-0.0047
-20	826.499996	-0.0048	846.499995	-0.0059
-10	826.500007	0.0085	846.500008	0.0095
0	826.500007	0.0085	846.500009	0.0106
10	826.499992	-0.0097	846.499992	-0.0095
20	826.500008	0.0097	846.500007	0.0083
30	826.5	0	846.499999	-0.0012
40	826.500003	0.0036	846.500005	0.0059
50	826.500009	0.0109	846.500008	0.0095

LTE Band 26 (824 MHz ~ 849 MHz), Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 26840 (829 MHz)		CH 26990 (844 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	828.999998	-0.0024	843.999999	-0.0012
3.87	829.000006	0.0072	844.000008	0.0095
4.40	828.999995	-0.006	843.999996	-0.0047

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 26840 (829 MHz)		CH 26990 (844 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	829.000008	0.0097	844.000006	0.0071
-20	829.000003	0.0036	844.000004	0.0047
-10	828.999997	-0.0036	844.000002	0.0024
0	828.999993	-0.0084	843.99999	-0.0118
10	828.999992	-0.0097	843.999991	-0.0107
20	829.000006	0.0072	844.00001	0.0118
30	829	0	844.000003	0.0036
40	829.000005	0.006	844.000001	0.0012
50	828.999993	-0.0084	843.99999	-0.0118

LTE Band 26 (824 MHz ~ 849 MHz), Channel Bandwidth: 15 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 26865 (831.5 MHz)		CH 26965 (841.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	831.49999	-0.012	841.49999	-0.0119
3.87	831.500006	0.0072	841.500008	0.0095
4.40	831.499997	-0.0036	841.499992	-0.0095

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 26865 (831.5 MHz)		CH 26965 (841.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	831.499991	-0.0108	841.49999	-0.0119
-20	831.50001	0.012	841.500006	0.0071
-10	831.499997	-0.0036	841.499997	-0.0036
0	831.500009	0.0108	841.500006	0.0071
10	831.500009	0.0108	841.500008	0.0095
20	831.500003	0.0036	841.5	0
30	831.500006	0.0072	841.500002	0.0024
40	831.500007	0.0084	841.500008	0.0095
50	831.500009	0.0108	841.500006	0.0071

7.8.12 LTE Band 30

LTE Band 30, Channel Bandwidth: 5 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 27685 (2307.5 MHz)		CH 27735 (2312.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	2307.499991	-0.0039	2312.49999	-0.0043
3.87	2307.499997	-0.0013	2312.5	0
4.40	2307.499994	-0.0026	2312.499996	-0.0017

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 27685 (2307.5 MHz)		CH 27735 (2312.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2307.500001	0.0004	2312.500001	0.0004
-20	2307.500004	0.0017	2312.499999	-0.0004
-10	2307.499996	-0.0017	2312.499998	-0.0009
0	2307.499999	-0.0004	2312.500002	0.0009
10	2307.499995	-0.0022	2312.499991	-0.0039
20	2307.500004	0.0017	2312.500006	0.0026
30	2307.499997	-0.0013	2312.5	0
40	2307.500007	0.003	2312.500002	0.0009
50	2307.500006	0.0026	2312.500005	0.0022

LTE Band 30, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage		
Voltage (Vdc)	CH 27710 (2310 MHz)	
	Frequency (MHz)	Frequency Error (ppm)
3.60	2310.000002	0.0009
3.87	2310.000002	0.0009
4.40	2310.000002	0.0009

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature		
Temperature (°C)	CH 27710 (2310 MHz)	
	Frequency (MHz)	Frequency Error (ppm)
-30	2310.000003	0.0013
-20	2309.999992	-0.0035
-10	2309.999995	-0.0022
0	2309.999998	-0.0009
10	2310.000009	0.0039
20	2309.999994	-0.0026
30	2309.999994	-0.0026
40	2310	0
50	2310.000002	0.0009

7.8.13 LTE Band 38

LTE Band 38, Channel Bandwidth: 5 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 37775 (2572.5 MHz)		CH 38225 (2617.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	2572.500003	0.0012	2617.500003	0.0011
3.87	2572.500009	0.0035	2617.500007	0.0027
4.40	2572.499992	-0.0031	2617.499995	-0.0019

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 37775 (2572.5 MHz)		CH 38225 (2617.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2572.499999	-0.0004	2617.499999	-0.0004
-20	2572.500008	0.0031	2617.500007	0.0027
-10	2572.500001	0.0004	2617.500004	0.0015
0	2572.500005	0.0019	2617.500004	0.0015
10	2572.500003	0.0012	2617.5	0
20	2572.499993	-0.0027	2617.499995	-0.0019
30	2572.500007	0.0027	2617.500003	0.0011
40	2572.500002	0.0008	2617.499997	-0.0011
50	2572.500002	0.0008	2617.499998	-0.0008

LTE Band 38, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 37800 (2575 MHz)		CH 38200 (2615 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	2574.999998	-0.0008	2615.000002	0.0008
3.87	2574.999998	-0.0008	2614.999999	-0.0004
4.40	2575	0	2615.000004	0.0015

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 37800 (2575 MHz)		CH 38200 (2615 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2575.000001	0.0004	2615.000006	0.0023
-20	2575.000003	0.0012	2615.000007	0.0027
-10	2575.000001	0.0039	2615.000006	0.0023
0	2575.000005	0.0019	2615.000009	0.0034
10	2575.000008	0.0031	2615.000004	0.0015
20	2575.000001	0.0004	2615.000001	0.0004
30	2574.999991	-0.0035	2614.999994	-0.0023
40	2574.999993	-0.0027	2614.999995	-0.0019
50	2575.000003	0.0012	2615.000007	0.0027

LTE Band 38, Channel Bandwidth: 15 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 37825 (2577.5 MHz)		CH 38175 (2612.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	2577.500008	0.0031	2612.50001	0.0038
3.87	2577.500007	0.0027	2612.500009	0.0034
4.40	2577.500006	0.0023	2612.500009	0.0034

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 37825 (2577.5 MHz)		CH 38175 (2612.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2577.499992	-0.0031	2612.499996	-0.0015
-20	2577.500009	0.0035	2612.500004	0.0015
-10	2577.500007	0.0027	2612.500006	0.0023
0	2577.499998	-0.0008	2612.499993	-0.0027
10	2577.500006	0.0023	2612.500003	0.0011
20	2577.499991	-0.0035	2612.499995	-0.0019
30	2577.499992	-0.0031	2612.499999	-0.0038
40	2577.50001	0.0039	2612.500006	0.0023
50	2577.499995	-0.0019	2612.499994	-0.0023

LTE Band 38, Channel Bandwidth: 20 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 37850 (2580 MHz)		CH 38150 (2610 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	2580.000003	0.0012	2610	0
3.87	2580.000002	0.0008	2609.999999	-0.0004
4.40	2580.000003	0.0012	2610.000008	0.0031

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 37850 (2580 MHz)		CH 38150 (2610 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2579.999995	-0.0019	2610	0
-20	2580.000009	0.0035	2610.00001	0.0038
-10	2579.999992	-0.0031	2609.999993	-0.0027
0	2579.999995	-0.0019	2609.999995	-0.0019
10	2580.000001	0.0004	2610.000001	0.0004
20	2580.000004	0.0016	2609.999999	-0.0004
30	2579.999991	-0.0035	2609.999991	-0.0034
40	2580	0	2610.000002	0.0008
50	2579.999993	-0.0027	2609.999996	-0.0015

7.8.14 LTE Band 41

LTE Band 41, Channel Bandwidth: 5 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 39675 (2498.5 MHz)		CH 41565 (2687.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	2498.499997	-0.0012	2687.499998	-0.0007
3.87	2498.499995	-0.002	2687.499994	-0.0022
4.40	2498.500005	0.002	2687.500009	0.0033

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 39675 (2498.5 MHz)		CH 41565 (2687.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2498.500004	0.0016	2687.500002	0.0007
-20	2498.499995	-0.002	2687.499992	-0.003
-10	2498.499994	-0.0024	2687.499992	-0.003
0	2498.499999	-0.004	2687.499994	-0.0022
10	2498.499999	-0.004	2687.499991	-0.0033
20	2498.499992	-0.0032	2687.499995	-0.0019
30	2498.499993	-0.0028	2687.499999	-0.0037
40	2498.499995	-0.002	2687.499991	-0.0033
50	2498.500002	0.0008	2687.499999	-0.0004

LTE Band 41, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 39700 (2501 MHz)		CH 41540 (2685 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	2500.99999	-0.004	2684.999992	-0.003
3.87	2501.000002	0.0008	2685.000001	0.0004
4.40	2501.000006	0.0024	2685.000007	0.0026

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 39700 (2501 MHz)		CH 41540 (2685 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2500.999999	-0.0004	2685.000001	0.0004
-20	2501.000008	0.0032	2685.000009	0.0034
-10	2501.000001	0.0004	2684.999999	-0.0004
0	2500.999991	-0.0036	2684.999992	-0.003
10	2500.99999	-0.004	2684.999994	-0.0022
20	2500.999993	-0.0028	2684.999993	-0.0026
30	2500.999995	-0.002	2684.999993	-0.0026
40	2501.000006	0.0024	2685.000007	0.0026
50	2501.000001	0.0004	2685	0

LTE Band 41, Channel Bandwidth: 15 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 39725 (2503.5 MHz)		CH 41515 (2682.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	2503.500005	0.002	2682.500007	0.0026
3.87	2503.499993	-0.0028	2682.499994	-0.0022
4.40	2503.499991	-0.0036	2682.499991	-0.0034

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 39725 (2503.5 MHz)		CH 41515 (2682.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2503.499997	-0.0012	2682.499998	-0.0007
-20	2503.499991	-0.0036	2682.499994	-0.0022
-10	2503.499999	-0.0004	2682.499998	-0.0007
0	2503.500008	0.0032	2682.500005	0.0019
10	2503.500002	0.0008	2682.500007	0.0026
20	2503.499997	-0.0012	2682.499994	-0.0022
30	2503.499991	-0.0036	2682.499992	-0.0003
40	2503.500006	0.0024	2682.500009	0.0034
50	2503.500006	0.0024	2682.500001	0.0037

LTE Band 41, Channel Bandwidth: 20 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 39750 (2506 MHz)		CH 41490 (2680 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	2506.000002	0.0008	2680.000002	0.0007
3.87	2506.000002	0.0008	2679.999999	-0.0004
4.40	2505.999999	-0.0004	2679.999998	-0.0007

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 39750 (2506 MHz)		CH 41490 (2680 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2506.000005	0.002	2680.000008	0.003
-20	2506.000007	0.0028	2680.000009	0.0034
-10	2505.999994	-0.0024	2679.999994	-0.0022
0	2505.999997	-0.0012	2679.999992	-0.003
10	2506.000003	0.0012	2680.000005	0.0019
20	2505.999992	-0.0032	2679.999994	-0.0022
30	2506.000005	0.002	2680	0
40	2506	0	2680.000004	0.0015
50	2505.999993	-0.0028	2679.999997	-0.0011

7.8.15 LTE Band 66

LTE Band 66, Channel Bandwidth: 1.4 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 131979 (1710.7 MHz)		CH 132665 (1779.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	1710.700003	0.0018	1779.3	0
3.87	1710.700002	0.0012	1779.300003	0.0017
4.40	1710.699992	-0.0047	1779.299994	-0.0034

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 131979 (1710.7 MHz)		CH 132665 (1779.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1710.699992	-0.0047	1779.299995	-0.0028
-20	1710.700008	0.0047	1779.300007	0.0039
-10	1710.700008	0.0047	1779.300004	0.0022
0	1710.700001	0.0058	1779.300008	0.0045
10	1710.699996	-0.0023	1779.299998	-0.0011
20	1710.699993	-0.0041	1779.299994	-0.0034
30	1710.699999	-0.0006	1779.299998	-0.0011
40	1710.700002	0.0012	1779.300006	0.0034
50	1710.699995	-0.0029	1779.299996	-0.0022

LTE Band 66, Channel Bandwidth: 3 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 131987 (1711.5 MHz)		CH 132657 (1778.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	1711.499998	-0.0012	1778.499999	-0.0006
3.87	1711.499991	-0.0053	1778.499995	-0.0028
4.40	1711.5	0	1778.5	0

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 131987 (1711.5 MHz)		CH 132657 (1778.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1711.499993	-0.0041	1778.499994	-0.0034
-20	1711.500003	0.0018	1778.500006	0.0034
-10	1711.500002	0.0012	1778.499999	-0.0006
0	1711.499998	-0.0012	1778.499997	-0.0017
10	1711.499997	-0.0018	1778.499997	-0.0017
20	1711.500008	0.0047	1778.500003	0.0017
30	1711.499994	-0.0035	1778.499997	-0.0017
40	1711.499999	-0.0058	1778.499999	-0.0056
50	1711.499998	-0.0012	1778.499997	-0.0017

LTE Band 66, Channel Bandwidth: 5 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 131997 (1712.5 MHz)		CH 132647 (1777.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	1712.499996	-0.0023	1777.499999	-0.0006
3.87	1712.499991	-0.0053	1777.499995	-0.0028
4.40	1712.500002	0.0012	1777.5	0

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 131997 (1712.5 MHz)		CH 132647 (1777.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1712.499996	-0.0023	1777.499998	-0.0011
-20	1712.499995	-0.0029	1777.499993	-0.0039
-10	1712.500002	0.0012	1777.500002	0.0011
0	1712.499994	-0.0035	1777.499994	-0.0034
10	1712.500009	0.0053	1777.500005	0.0028
20	1712.49999	-0.0058	1777.499993	-0.0039
30	1712.499994	-0.0035	1777.499997	-0.0017
40	1712.499995	-0.0029	1777.499996	-0.0023
50	1712.499992	-0.0047	1777.499993	-0.0039

LTE Band 66, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 132022 (1715 MHz)		CH 132622 (1775 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	1715.000006	0.0035	1775.000008	0.0045
3.87	1714.999991	-0.0052	1774.999993	-0.0039
4.40	1714.999993	-0.0041	1774.999996	-0.0023

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 132022 (1715 MHz)		CH 132622 (1775 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1714.999991	-0.0052	1774.999996	-0.0023
-20	1714.999996	-0.0023	1774.999997	-0.0017
-10	1715.000009	0.0052	1775.000005	0.0028
0	1714.999992	-0.0047	1774.999999	-0.0056
10	1715.000005	0.0029	1775.000006	0.0034
20	1714.999994	-0.0035	1774.999991	-0.0051
30	1715.000007	0.0041	1775.000004	0.0023
40	1715	0	1774.999998	-0.0011
50	1715.000008	0.0047	1775.000004	0.0023

LTE Band 66, Channel Bandwidth: 15 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 132047 (1717.5 MHz)		CH 132597 (1772.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	1717.500006	0.0035	1772.50001	0.0056
3.87	1717.500002	0.0012	1772.500004	0.0023
4.40	1717.500008	0.0047	1772.500005	0.0028

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 132047 (1717.5 MHz)		CH 132597 (1772.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1717.500004	0.0023	1772.500006	0.0034
-20	1717.49999	-0.0058	1772.499993	-0.0039
-10	1717.500007	0.0041	1772.500009	0.0051
0	1717.499994	-0.0035	1772.499996	-0.0023
10	1717.499997	-0.0017	1772.499995	-0.0028
20	1717.500009	0.0052	1772.500007	0.0039
30	1717.500009	0.0052	1772.500008	0.0045
40	1717.500008	0.0047	1772.500009	0.0051
50	1717.500003	0.0017	1772.5	0

LTE Band 66, Channel Bandwidth: 20 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 132072 (1720 MHz)		CH 132572 (1770 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	1719.999997	-0.0017	1769.999998	-0.0011
3.87	1719.999992	-0.0047	1769.999995	-0.0028
4.40	1719.999997	-0.0017	1770	0

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 132072 (1720 MHz)		CH 132572 (1770 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1719.999993	-0.0041	1769.999992	-0.0045
-20	1719.999993	-0.0041	1769.999993	-0.004
-10	1719.999996	-0.0023	1769.999998	-0.0011
0	1719.999999	-0.0006	1770	0
10	1720.000005	0.0029	1770.000007	0.004
20	1720.000008	0.0047	1770.000005	0.0028
30	1719.999995	-0.0029	1769.999997	-0.0017
40	1720.000004	0.0023	1770.000008	0.0045
50	1719.999996	-0.0023	1770.000001	0.0006

7.8.16 LTE Band 71

LTE Band 71, Channel Bandwidth: 5 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 133147 (665.5 MHz)		CH 133447 (695.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	665.5	0	695.500003	0.0043
3.87	665.499999	-0.0015	695.5	0
4.40	665.500009	0.0135	695.500005	0.0072

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 133147 (665.5 MHz)		CH 133447 (695.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	665.500008	0.012	695.500008	0.0115
-20	665.499998	-0.003	695.499997	-0.0043
-10	665.499998	-0.003	695.499998	-0.0029
0	665.499994	-0.009	695.499999	-0.0144
10	665.499994	-0.009	695.499997	-0.0043
20	665.499996	-0.006	695.499991	-0.0129
30	665.499997	-0.0045	695.499996	-0.0058
40	665.499999	-0.0015	695.499997	-0.0043
50	665.500005	0.0075	695.500003	0.0043

LTE Band 71, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 133172 (668 MHz)		CH 133422 (693 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	668.000008	0.012	693.000009	0.013
3.87	668.000001	0.0015	692.999999	-0.0014
4.40	668.000004	0.006	693.000004	0.0058

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 133172 (668 MHz)		CH 133422 (693 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	667.999997	-0.0045	692.999998	-0.0029
-20	668.000006	0.009	693.000006	0.0087
-10	667.999999	-0.0015	692.999996	-0.0058
0	668.000009	0.0135	693.000009	0.013
10	668.000008	0.012	693.000005	0.0072
20	667.999999	-0.0015	692.999995	-0.0072
30	667.999998	-0.003	692.999994	-0.0087
40	667.999994	-0.009	692.999996	-0.0058
50	668	0	692.999999	-0.0014

LTE Band 71, Channel Bandwidth: 15 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 133197 (670.5 MHz)		CH 133397 (690.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	670.499996	-0.006	690.499998	-0.0029
3.87	670.500008	0.0119	690.500006	0.0087
4.40	670.500005	0.0075	690.500002	0.0029

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 133197 (670.5 MHz)		CH 133397 (690.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	670.499997	-0.0045	690.499995	-0.0072
-20	670.5	0	690.5	0
-10	670.500007	0.0104	690.500004	0.0058
0	670.499995	-0.0075	690.499994	-0.0087
10	670.500003	0.0045	690.500003	0.0043
20	670.499992	-0.0119	690.499991	-0.013
30	670.500005	0.0075	690.500002	0.0029
40	670.5	0	690.499999	-0.0014
50	670.499994	-0.0089	690.499997	-0.0043

LTE Band 71, Channel Bandwidth: 20 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 133222 (673 MHz)		CH 133372 (688 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.60	673.00001	0.0149	688.000005	0.0073
3.87	673.000009	0.0134	688.000005	0.0073
4.40	673.000006	0.0089	688.000007	0.0102

Note: The applicant defined the normal working voltage is from 3.60 to 4.40 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 133222 (673 MHz)		CH 133372 (688 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	673.000006	0.0089	688.000005	0.0073
-20	673.000002	0.003	688.000003	0.0044
-10	673.000008	0.0119	688.000006	0.0087
0	673.000007	0.0104	688.000006	0.0087
10	673.000003	0.0045	688.000003	0.0044
20	672.999994	-0.0089	687.999998	-0.0029
30	673.000008	0.0119	688.000006	0.0087
40	673.000007	0.0104	688.000003	0.0044
50	673.000006	0.0089	688.000002	0.0029

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---