

APPENDIX D - TEST SYSTEM VERIFICATIONS SCANS

Liquid Measurement Result

Testing was performed by Dan Corona on 2007-10-03 for PCS 1900MHz; 2007-10-05 for Cellular 900MHz.

Simulant	Freq [MHz]	Parameters	Liquid Temp [°C]	Target Value	Measured Value	Deviation [%]	Limits [%]
Head	835	ϵ_r	22	41.5	42.4	2.2	±5
		σ	22	0.90	0.93	3.3	±5
		1g SAR	22	10.8	9.86	-8.7	±10

ϵ_r = relative permittivity, σ = conductivity and $\rho=1000\text{kg/m}^3$

Simulant	Freq [MHz]	Parameters	Liquid Temp [°C]	Target Value	Measured Value	Deviation [%]	Limits [%]
Head	1800	ϵ	22	40.0	39.9	-0.25	±5
		σ	22	1.40	1.38	-1.43	±5
		1g SAR	22	39.7	36.8	-7.3	±10

ϵ_r = relative permittivity, σ = conductivity and $\rho=1000\text{kg/m}^3$

Test Laboratory: Bay Area Compliance Laboratories Corp. (BACL)**System Performance Check for Head****EUT: Dipole Antenna 900 MHz; Type: D900V2; Serial Number: 122**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 – SN: 1604; ConvF(6.82, 6.82, 6.82); Calibrated: 2007-08-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 2006-11-22
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Post processing SW: SEMCAD, V1.8 Build 161

System Performance Check for Head, 1W/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 9.82 mW/g


System Performance Check for Head, 1W/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.4 V/m; Power Drift = -0.092 dB

Peak SAR (extrapolated) = 9.36 W/kg

SAR(1 g) = 9.86 mW/g; SAR(10 g) = 6.62 mW/g

Maximum value of SAR (measured) = 9.89 mW/g

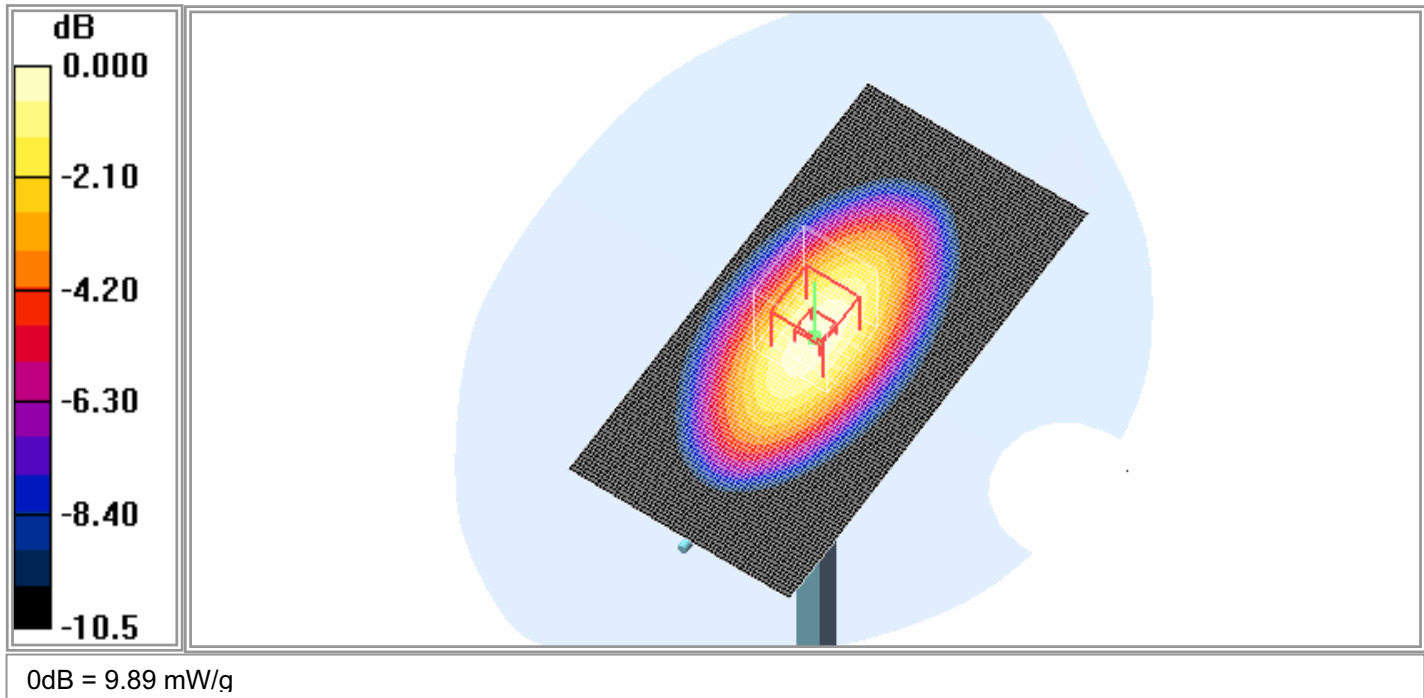**System Validation for Head Tissue**

Test Laboratory: Bay Area Compliance Laboratories Corp. (BACL)**System Performance Check for Head****EUT: Dipole Antenna 1800 MHz; Type: D-1800-S-1; Serial Number: BCL-049**

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 – SN: 1604; ConvF(5.21, 5.21, 5.21); Calibrated: 2007-08-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 2006-11-22
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Post processing SW: SEMCAD, V1.8 Build 161

System Performance Check for Head, 1W/Area Scan (131x151x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 36.2 mW/g


System Performance Check for Head, 1W/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.6 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 22.0 W/kg

SAR(1 g) = 36.8 mW/g; SAR(10 g) = 18.9 mW/g

Maximum value of SAR (measured) = 36.7 mW/g

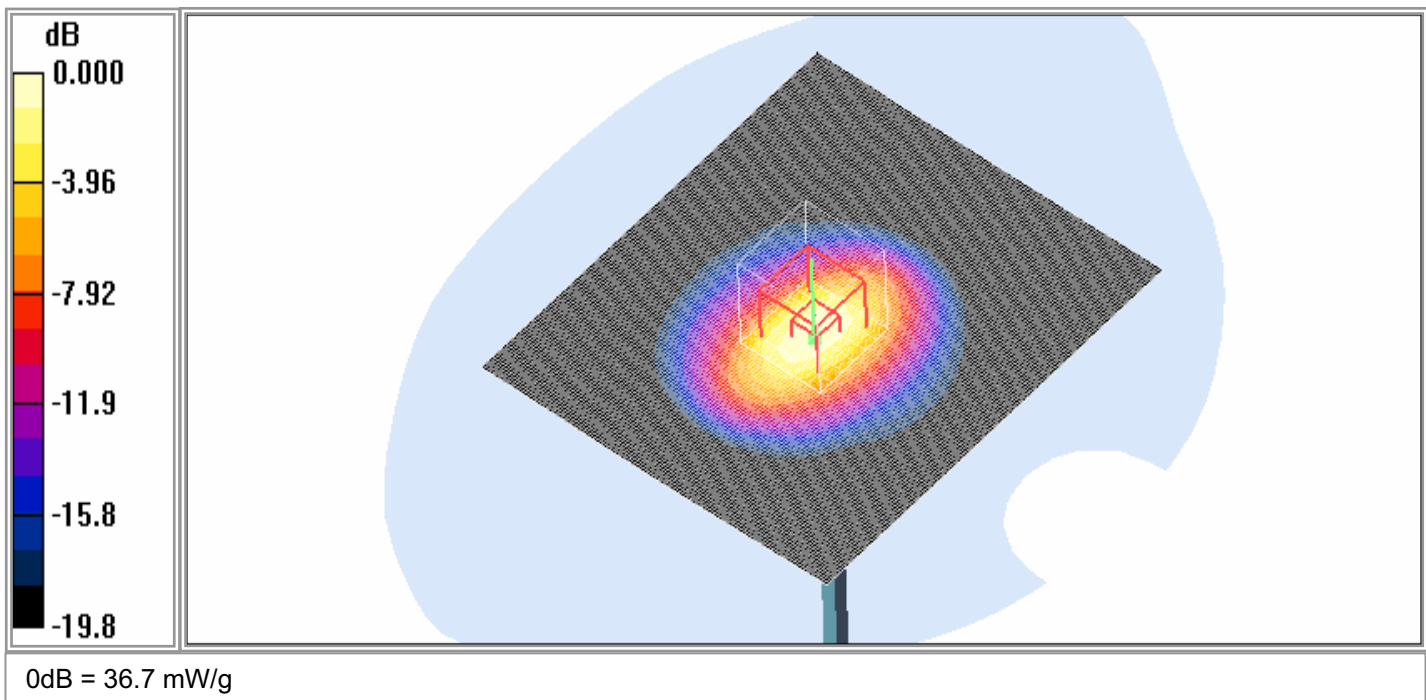**System Validation for Head Tissue**

APPENDIX E - EUT SCANS

Test Laboratory: Bay Area Compliance Laboratories Corp. (BACL)

EUT back touching to the flat phantom (836.52 MHz – Middle Channel) – Antenna Open (100°)

Motion Computing Inc.; EUT Type: Tablet PC with Novatel Wireless E725 CDMA/EVDO Module

Model Number: LE1700; Serial: 00214569-LE1700

Cellular Band – EV- DO Rev. 0

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 800 \text{ MHz}$; $\sigma = 0.99 \text{ mho/m}$; $\epsilon_r = 55.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(6.47, 6.47, 6.47); Calibrated: 2007-08-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 2006-11-22
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Body Position with perpendicular antenna / Area Scan (131x151x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.710 mW/g


Body Position with perpendicular antenna / Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.6 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.666 mW/g; SAR(10 g) = 0.380 mW/g

Maximum value of SAR (measured) = 0.725 mW/g

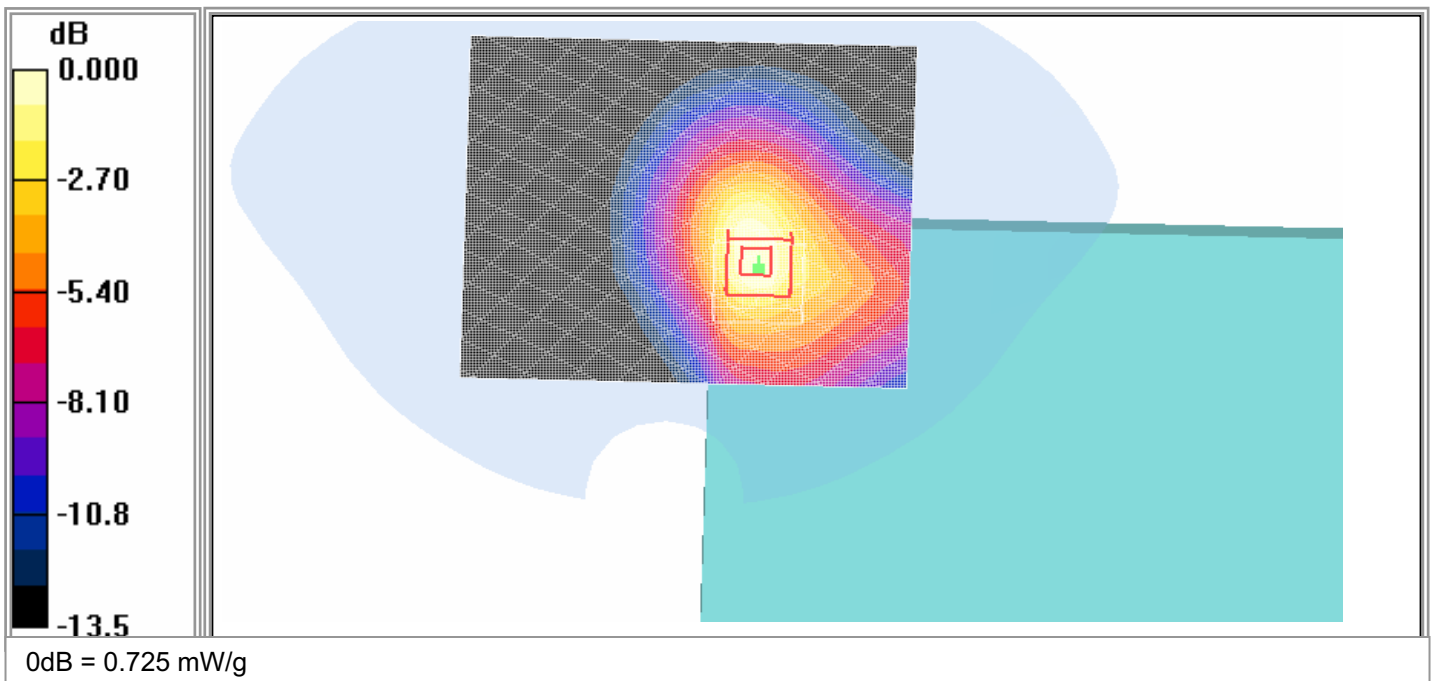

Plot #1

Test Laboratory: Bay Area Compliance Laboratories Corp. (BACL)**EUT back touching to the flat phantom (836.52 MHz – Middle Channel) – Antenna Open (100°)****Motion Computing Inc.; EUT Type: Tablet PC with Novatel Wireless E725 CDMA/EVDO Module****Model Number: LE1700; Serial: 00214569-LE1700****Cellular Band – CDMA 1xRTT**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 800$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 55.5$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(6.47, 6.47, 6.47); Calibrated: 2007-08-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 2006-11-22
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Body Postion with perpendicular antenna / Area Scan (131x151x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.794 mW/g


Body Postion with perpendicular antenna / Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.5 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.727 mW/g; SAR(10 g) = 0.416 mW/g

Maximum value of SAR (measured) = 0.784 mW/g

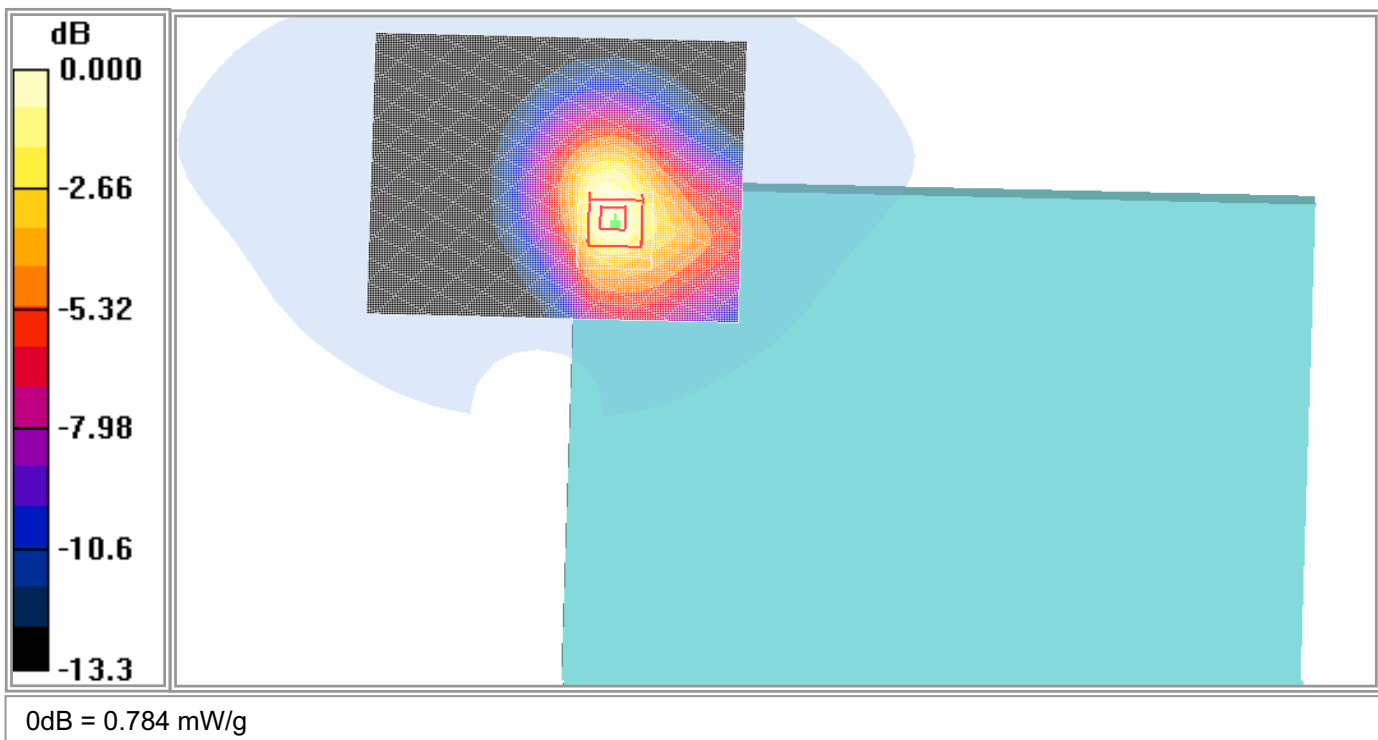**Plot #2**

Test Laboratory: Bay Area Compliance Laboratories Corp. (BACL)

EUT back touching to the flat phantom (836.52 MHz – Middle Channel) – Antenna Closed (0°)

Motion Computing Inc.; EUT Type: Tablet PC with Novatel Wireless E725 CDMA/EVDO Module

Model Number: LE1700; Serial: 00214569-LE1700

Cellular Band – EV-DO Rev. 0

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 800 \text{ MHz}$; $\sigma = 0.99 \text{ mho/m}$; $\epsilon_r = 55.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(6.47, 6.47, 6.47); Calibrated: 2007-08-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 2006-11-22
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Body Postion with perpendicular antenna / Area Scan (131x151x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.726 mW/g


Body Postion with perpendicular antenna / Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.662 mW/g; SAR(10 g) = 0.378 mW/g

Maximum value of SAR (measured) = 0.714 mW/g

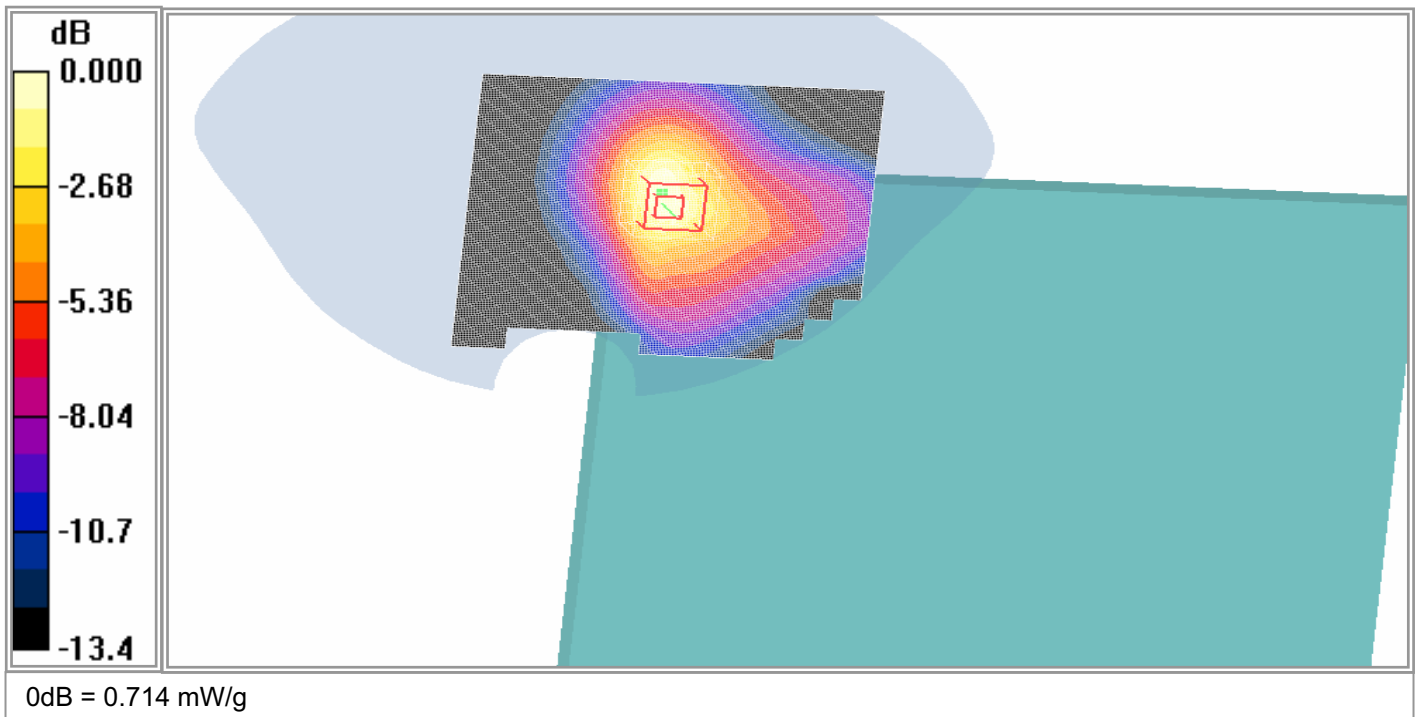

Plot #3

Test Laboratory: Bay Area Compliance Laboratories Corp. (BACL)

EUT back touching to the flat phantom (836.52 MHz – Middle Channel) – Antenna Closed (0°)

Motion Computing Inc.; EUT Type: Tablet PC with Novatel Wireless E725 CDMA/EVDO Module

Model Number: LE1700; Serial: 00214569-LE1700

Cellular Band – CDMA 1xRTT

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 800 \text{ MHz}$; $\sigma = 0.99 \text{ mho/m}$; $\epsilon_r = 55.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(6.47, 6.47, 6.47); Calibrated: 2007-08-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 2006-11-22
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Body Postion with the Antenna 0 Degree / Area Scan (131x151x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.767 mW/g


Body Postion with the Antenna 0 Degree / Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.5 V/m; Power Drift = -0.063 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.700 mW/g; SAR(10 g) = 0.402 mW/g

Maximum value of SAR (measured) = 0.765 mW/g

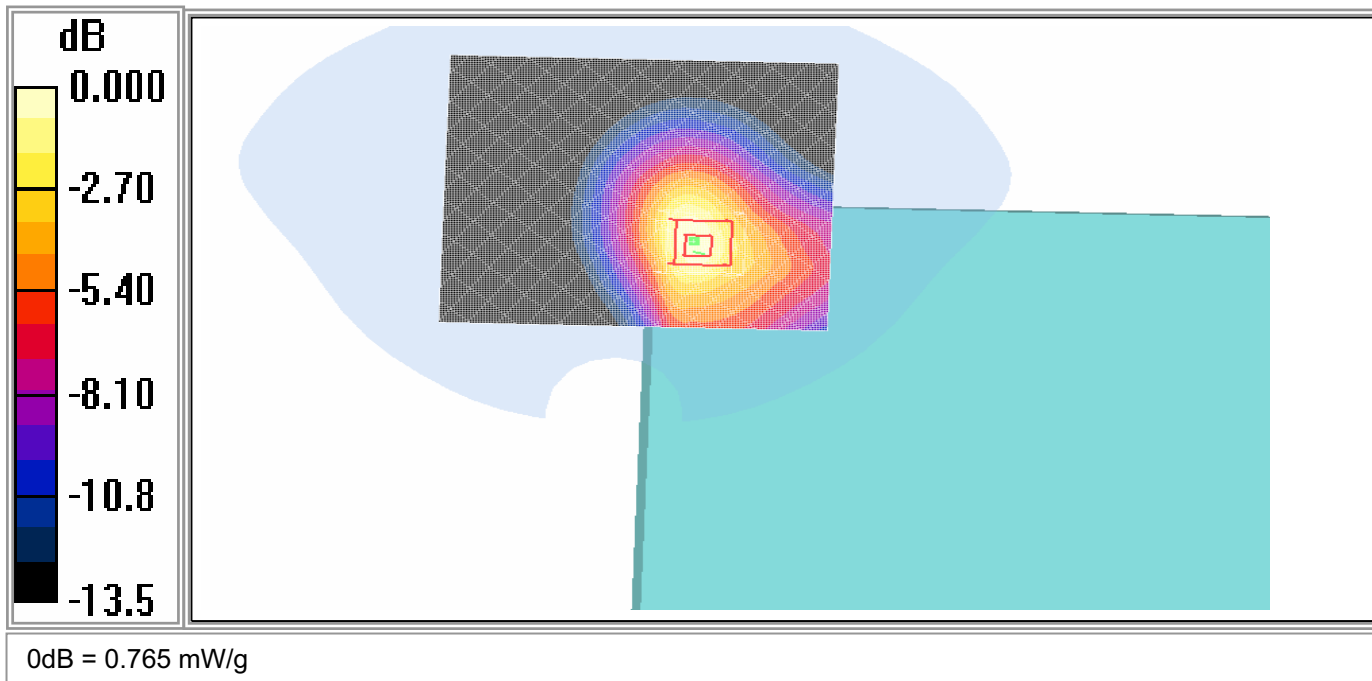

Plot #4

Test Laboratory: Bay Area Compliance Laboratories Corp. (BACL)

EUT back touching to the flat phantom (836.52 MHz – Middle Channel) – Antenna Open (100°)

Motion Computing Inc.; EUT Type: Tablet PC with Novatel Wireless E725 CDMA/EVDO Module

Model Number: LE1700; Serial: 00214569-LE1700

Cellular Band – CDMA 1xRTT

Simultaneous Transmit with the Co-located Bluetooth

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 800 \text{ MHz}$; $\sigma = 0.99 \text{ mho/m}$; $\epsilon_r = 55.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(6.47, 6.47, 6.47); Calibrated: 2007-08-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 2006-11-22
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Body Postion with perpendicular antenna / Area Scan (131x151x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.802 mW/g


Body Postion with perpendicular antenna / Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.9 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.729 mW/g; SAR(10 g) = 0.416 mW/g

Maximum value of SAR (measured) = 0.793 mW/g

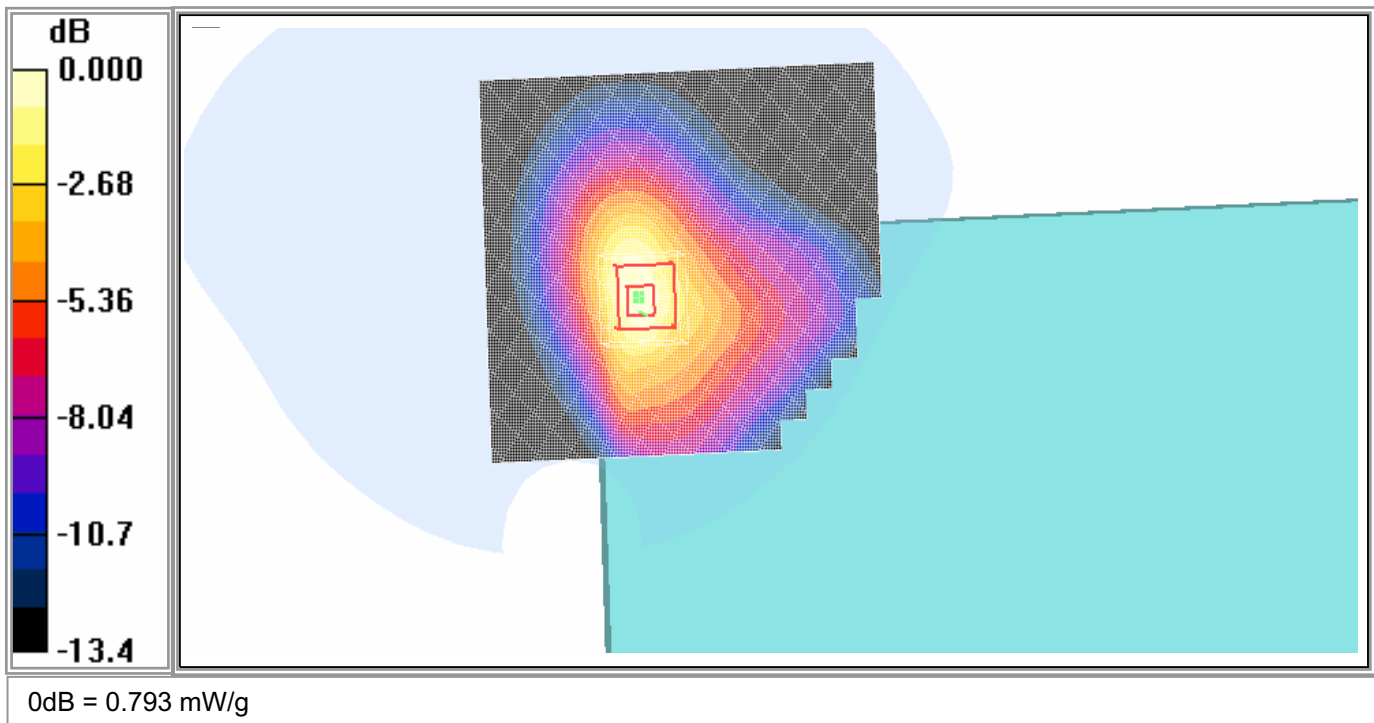

Plot #5

Test Laboratory: Bay Area Compliance Laboratories Corp. (BACL)

EUT back touching to the flat phantom (1880 MHz – Middle Channel) – Antenna Open (100°)

Motion Computing Inc.; EUT Type: Tablet PC with Novatel Wireless E725 CDMA/EVDO Module

Model Number: LE1700; Serial: 00214569-LE1700

PCS Band – EV- DO Rev. 0

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 53.8$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(4.68, 4.68, 4.68); Calibrated: 2007-08-28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 2006-11-22
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Post processing SW: SEMCAD, V1.8 Build 161

Body Position with perpendicular antenna / Area Scan (131x151x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.883 mW/g


Body Position with perpendicular antenna / Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.31 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 0.756 mW/g; SAR(10 g) = 0.275 mW/g

Maximum value of SAR (measured) = 0.894 mW/g

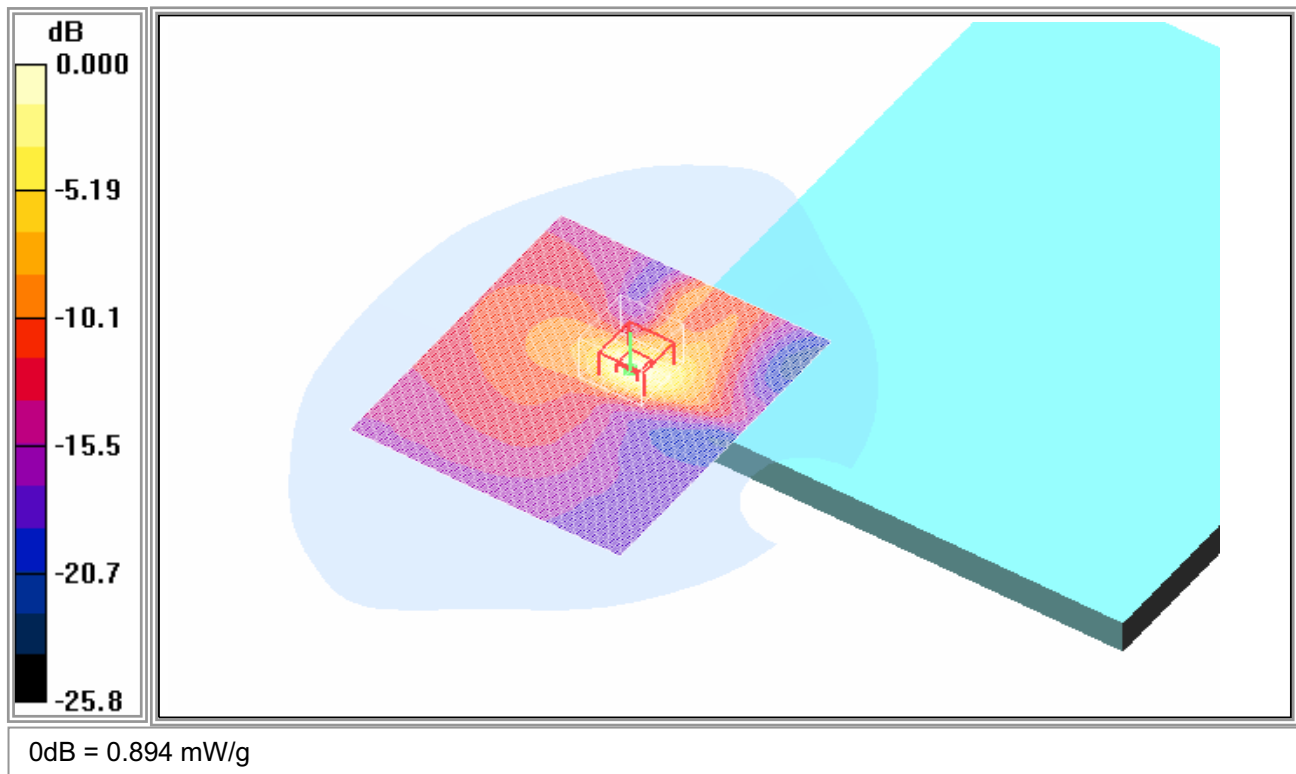

Plot #6

Test Laboratory: Bay Area Compliance Laboratories Corp. (BACL)

EUT back touching to the flat phantom (1880 MHz – Middle Channel) – Antenna Open (100°)

Motion Computing Inc.; EUT Type: Tablet PC with Novatel Wireless E725 CDMA/EVDO Module

Model Number: LE1700; Serial: 00214569-LE1700

PCS Band – EV- DO Rev. 0

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(4.68, 4.68, 4.68); Calibrated: 8/28/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 11/22/2006
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Post processing SW: SEMCAD, V1.8 Build

Body Position with perpendicular antenna / Area Scan (131x151x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.772 mW/g


Body Position with perpendicular antenna / Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.47 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.765 mW/g; SAR(10 g) = 0.220 mW/g

Maximum value of SAR (measured) = 0.716 mW/g

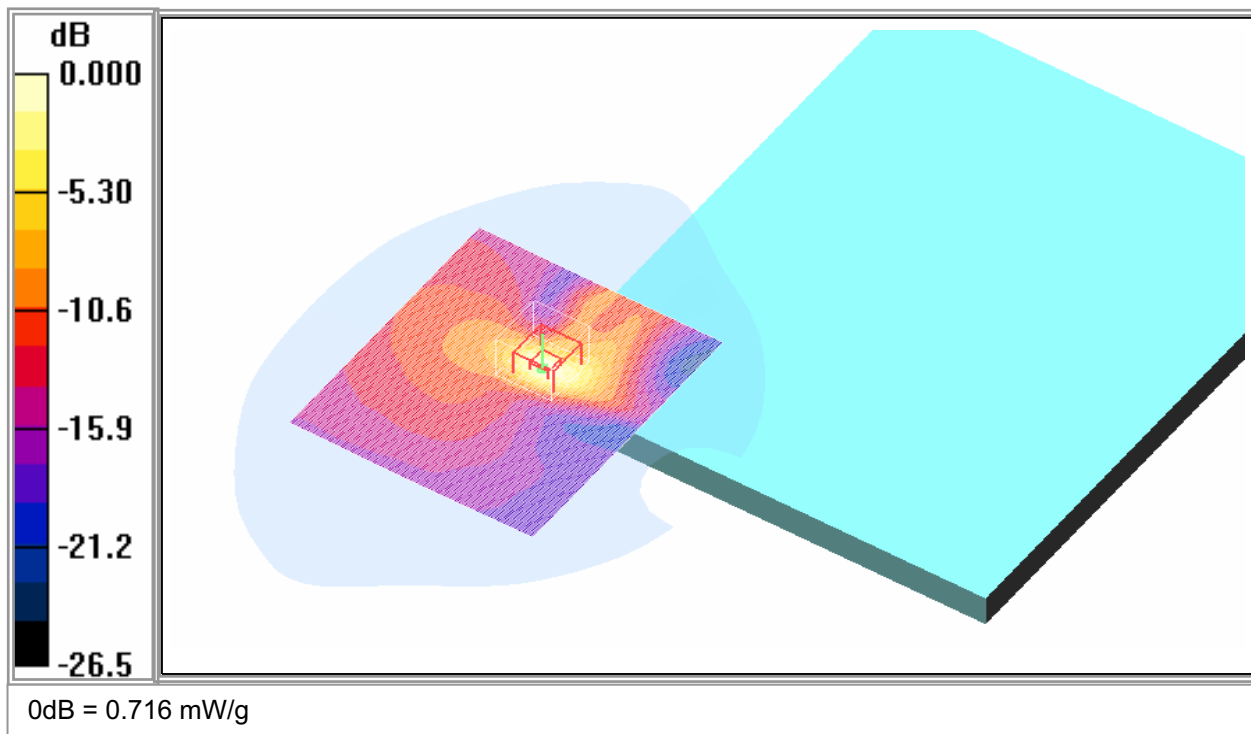

Plot #7

Test Laboratory: Bay Area Compliance Laboratories Corp. (BACL)**EUT back touching to the flat phantom (1880 MHz – Middle Channel) – Antenna Closed (0°)****Motion Computing Inc.; EUT Type: Tablet PC with Novatel Wireless E725 CDMA/EVDO Module****Model Number: LE1700; Serial: 00214569-LE1700****PCS Band – EV-DO Rev. 0**

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(4.68, 4.68, 4.68); Calibrated: 8/28/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 11/22/2006
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Post processing SW: SEMCAD, V1.8 Build 161

Body Position with perpendicular antenna / Area Scan (131x151x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.855 mW/g


Body Position with perpendicular antenna / Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.32 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 g) = 0.771 mW/g; SAR(10 g) = 0.279 mW/g

Maximum value of SAR (measured) = 0.899 mW/g

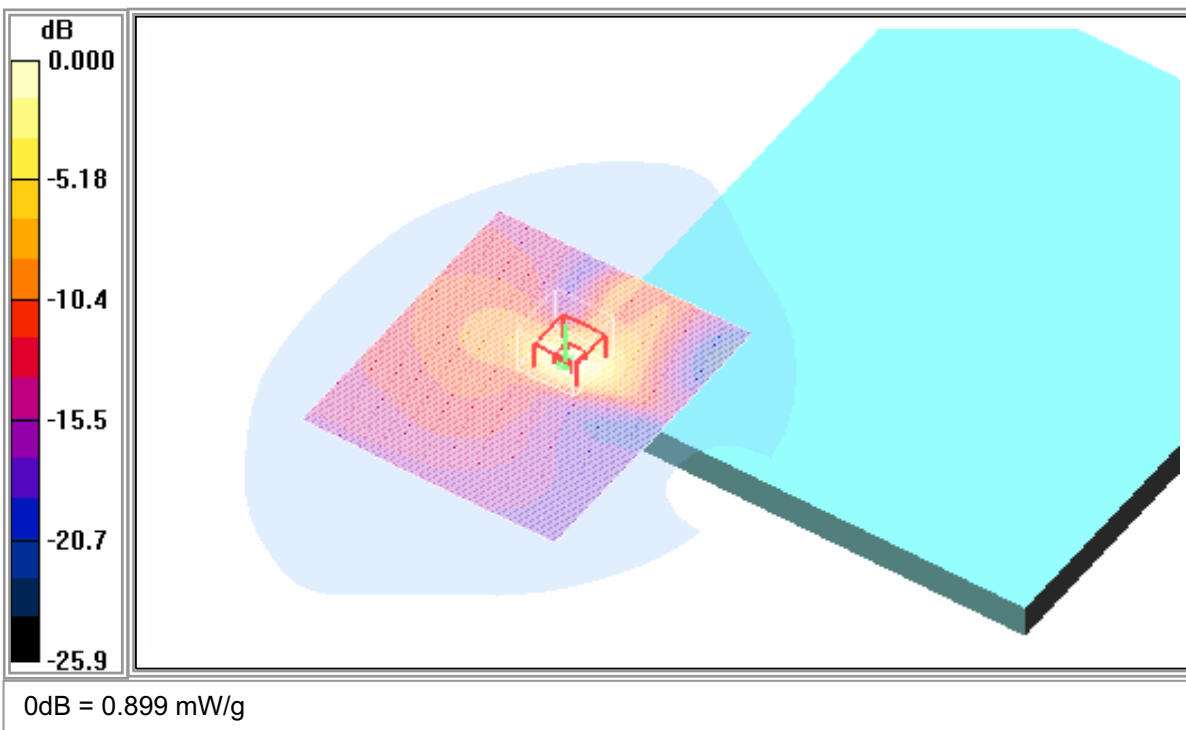**Plot #8**

Test Laboratory: Bay Area Compliance Laboratories Corp. (BACL)

EUT back touching to the flat phantom (1880 MHz – Middle Channel) – Antenna Closed (0°)

Motion Computing Inc.; EUT Type: Tablet PC with Novatel Wireless E725 CDMA/EVDO Module

Model Number: LE1700; Serial: 00214569-LE1700

PCS Band – EV-DO Rev. 0

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(4.68, 4.68, 4.68); Calibrated: 8/28/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 11/22/2006
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Post processing SW: SEMCAD, V1.8 Build 161

Body Position with perpendicular antenna / Area Scan (131x151x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.862 mW/g


Body Position with perpendicular antenna / Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.31 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 0.749 mW/g; SAR(10 g) = 0.274 mW/g

Maximum value of SAR (measured) = 0.888 mW/g

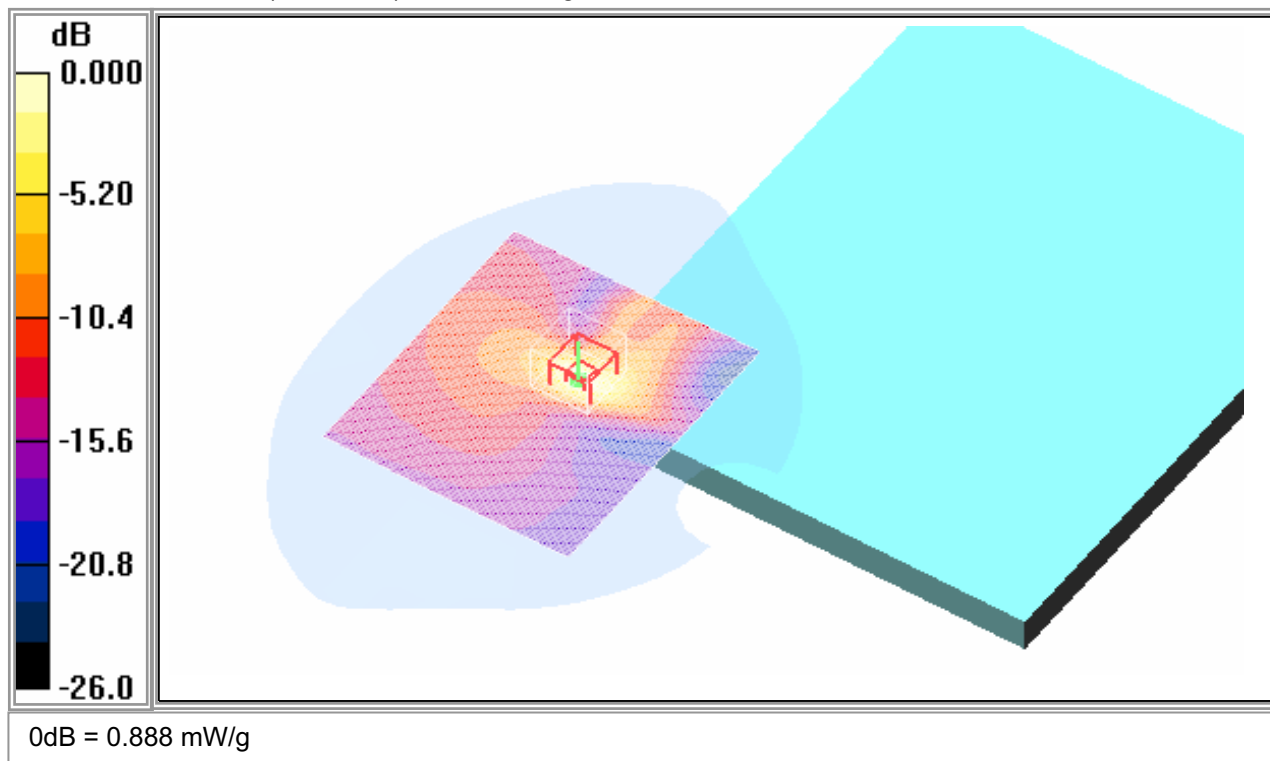

Plot #9

Test Laboratory: Bay Area Compliance Laboratories Corp. (BACL)**EUT back touching to the flat phantom (1880 MHz – Middle Channel) – Antenna Closed (100°)****Motion Computing Inc.; EUT Type: Tablet PC with Novatel Wireless E725 CDMA/EVDO Module****Model Number: LE1700; Serial: 00214569-LE1700****PCS Band – EV-DO Rev. 0****Simultaneous Transmit with the Co-located Bluetooth**

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(4.68, 4.68, 4.68); Calibrated: 8/28/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 11/22/2006
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Post processing SW: SEMCAD, V1.8 Build 161

Body Position with perpendicular antenna / Area Scan (131x151x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.851 mW/g


Body Position with perpendicular antenna / Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.35 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 2.30 W/kg

SAR(1 g) = 0.764 mW/g; SAR(10 g) = 0.278 mW/g

Maximum value of SAR (measured) = 0.913 mW/g

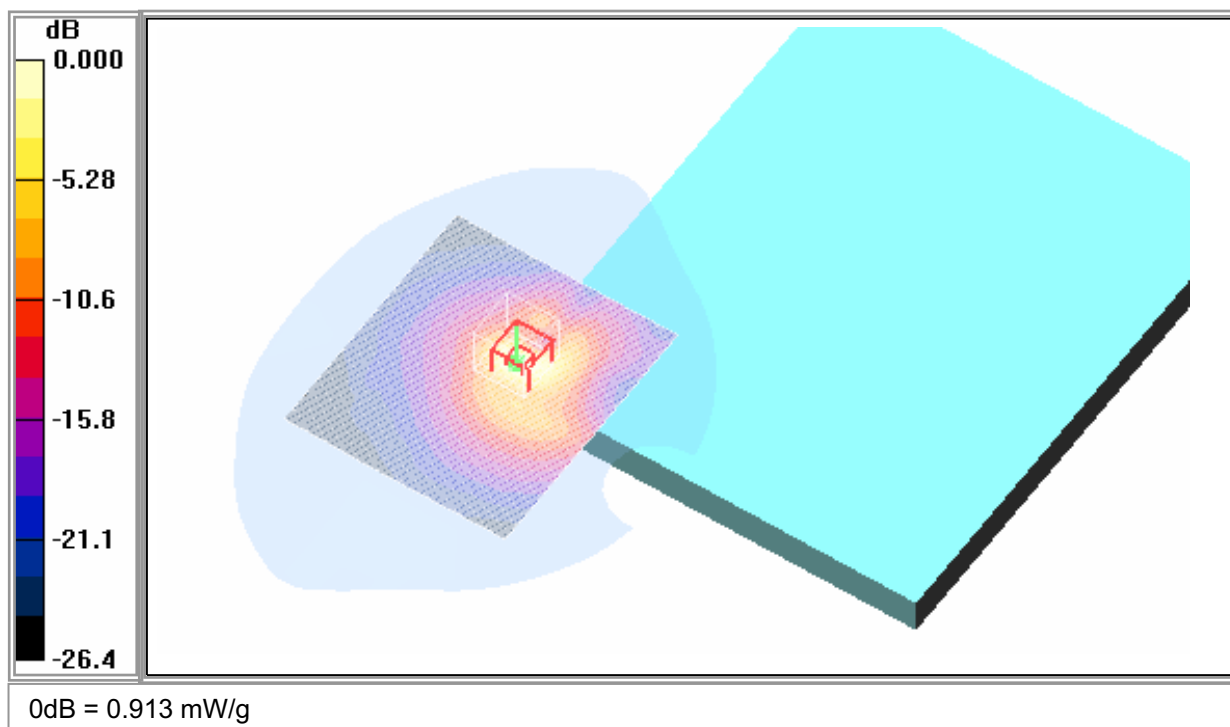**Plot #10**

APPENDIX F – CONDUCTED OUTPUT POWER MEASUREMENT

Provision Applicable

The measured peak output power should be greater and within 5% than EMI measurement.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Test equipment

Agilent E4446A Spectrum Analyzer, Calibration Due Date: 2006-03-06

Test Results

Cellular Band CDMA:

Channel No.	Frequency (MHz)	Measured Output Power			
		Cellular Band 1xRTT		Cellular Band EV-DO Rev 0	
		(dBm)	(Watts)	(dBm)	(Watts)
1013	824.7	23.49	0.223	23.58	0.228
384	836.52	23.96	0.249	23.97	0.249
777	848.31	24.07	0.255	24.08	0.256

PCS Band CDMA:

Channel No.	Frequency (MHz)	Measured Output Power			
		Cellular Band 1xRTT		Cellular Band EV-DO Rev 0	
		(dBm)	(Watts)	(dBm)	(Watts)
025	1851.25	24.09	0.256	24.09	0.256
600	1880.00	23.84	0.242	23.88	0.244
1175	1908.75	23.89	0.245	23.96	0.249

APPENDIX G – EUT TEST POSITION PHOTOS

EUT with PC tablet back touching to the flat phantom Antenna View (open antenna 100°)



EUT with PC tablet back touching to the flat phantom Antenna View (closed antenna 0°)



EUT with PC tablet back touching to the flat phantom Front View



APPENDIX H- EUT PHOTO

EUT – Laptop Front View



EUT – Laptop Bottom Side View




EUT – Antenna Open (100°)




EUT – Antenna Open (100°)




EUT – Top View CDMA Card with shielding 1

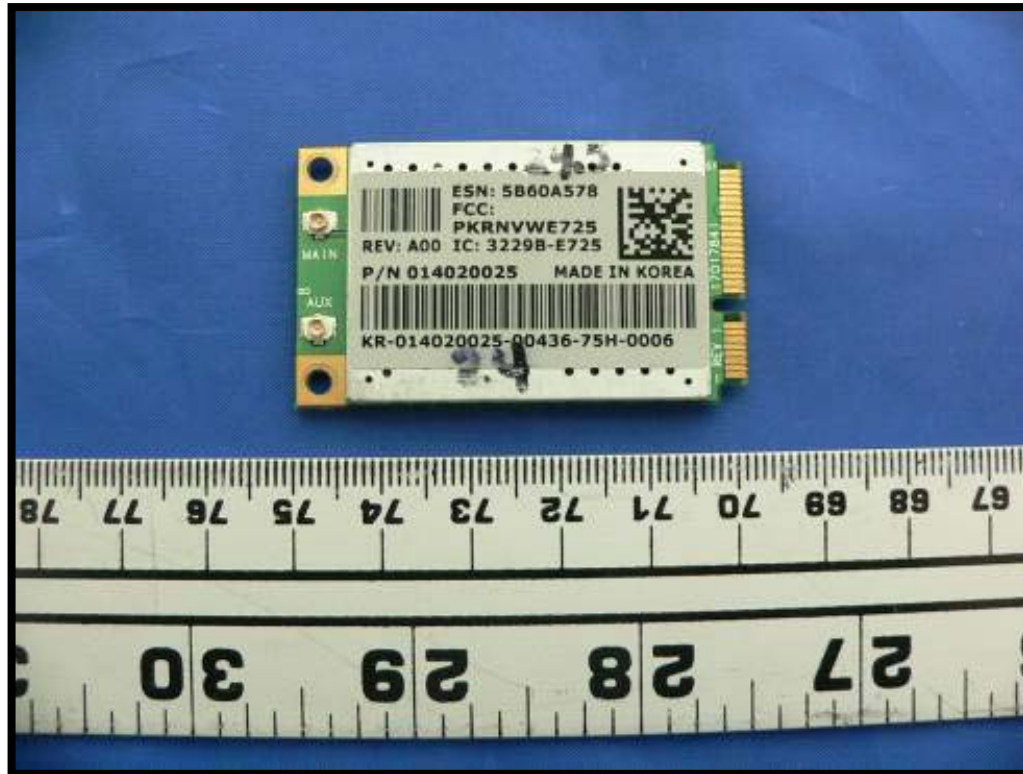


EUT – Top View CDMA Card shielding removed 1

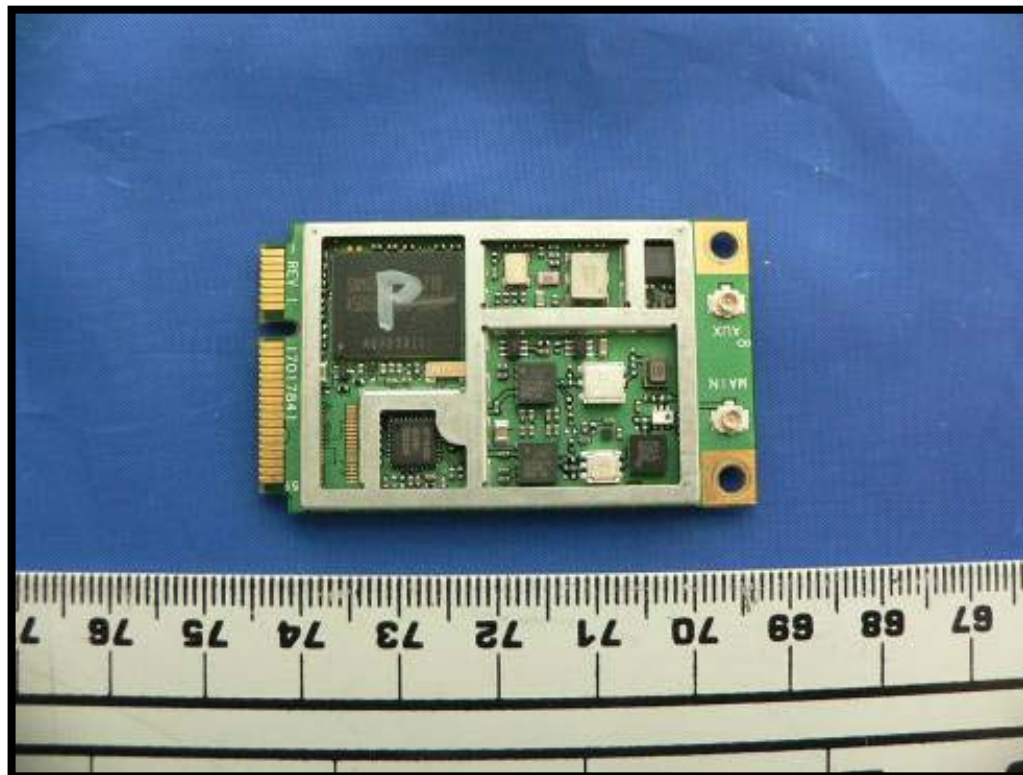

EUT – Bottom View CDMA Card with shielding 2

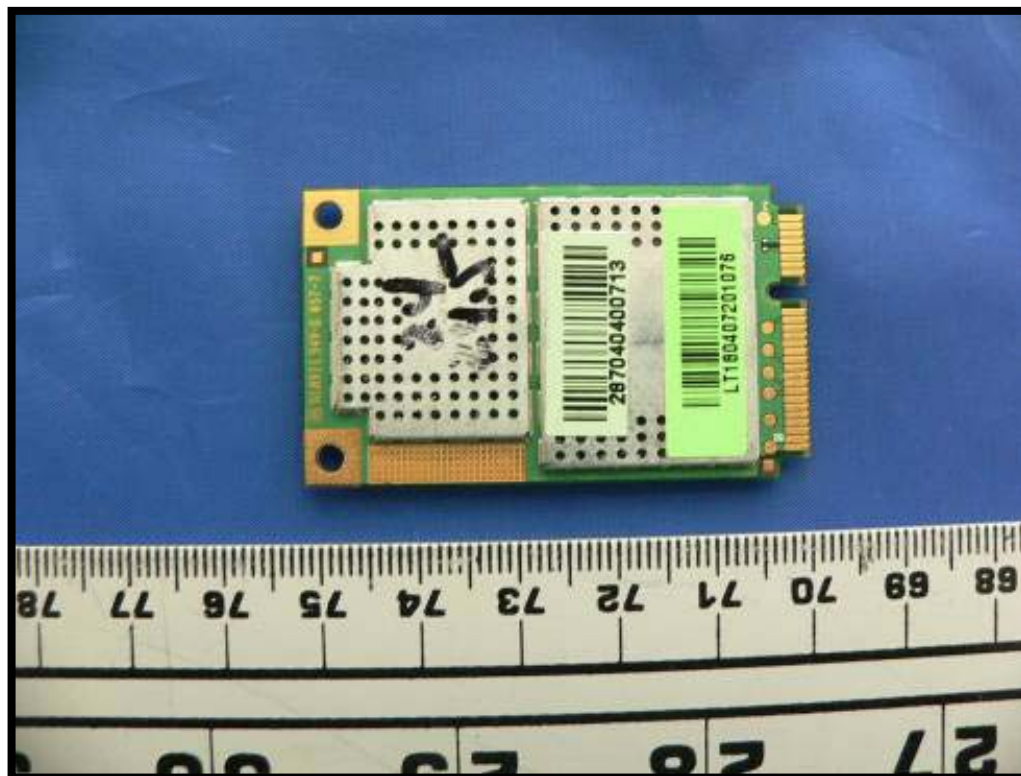

EUT – Bottom View CDMA Card shielding removed 2

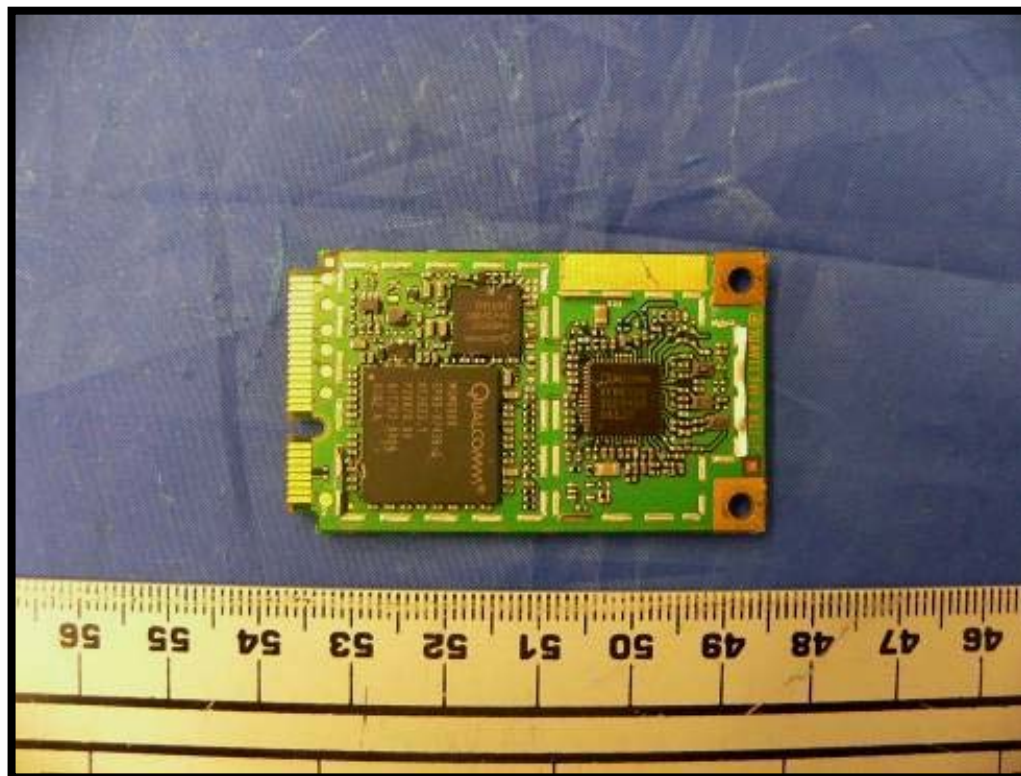

APPENDIX I - INFORMATIVE REFERENCES

- [1] Federal Communications Commission, "Report and order: Guidelines for evaluating the environmental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, FCC, Washington, D.C. 20554, 1996.
- [2] David L. Means Kwok Chan, Robert F. Cleveland, "Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields", Tech. Rep., Federal Communication Commission, Office of Engineering & Technology, Washington, DC, 1997.
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, "Automated E-field scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105-113, Jan. 1996.
- [4] Niels Kuster, Ralph Kastle, and Thomas Schmid, "Dosimetric evaluation of mobile communications equipment with known precision", IEEE Transactions on Communications, vol. E80-B, no. 5, pp. 645-652, May 1997.
- [5] CENELEC, "Considerations for evaluating of human exposure to electromagnetic fields (EMFs) from mobile telecommunication equipment (MTE) in the frequency range 30MHz - 6GHz", Tech. Rep., CENELEC, European Committee for Electrotechnical Standardization, Brussels, 1997.
- [6] ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [7] Katja Pokovic, Thomas Schmid, and Niels Kuster, "Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM '97, Dubrovnik, October 15-17, 1997, pp. 120-24.
- [8] Katja Pokovic, Thomas Schmid, and Niels Kuster, "E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp. 172-175.
- [9] Volker Hombach, Klaus Meier, Michael Burkhardt, Eberhard Kuhn, and Niels Kuster, "The dependence of EM energy absorption upon human head modeling at 900 MHz", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1865-1873, Oct. 1996.
- [10] Klaus Meier, Ralf Kastle, Volker Hombach, Roger Tay, and Niels Kuster, "The dependence of EM energy absorption upon human head modeling at 1800 MHz", IEEE Transactions on Microwave Theory and Techniques, Oct. 1997, in press.
- [11] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [12] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992. Dosimetric Evaluation of Sample device, month 1998 9
- [13] NIS81 NAMAS, "The treatment of uncertainty in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddington, Middlesex, England, 1994.
- [14] Barry N. Taylor and Christ E. Kuyatt, "Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994. Dosimetric Evaluation of Sample device, month 1998 10.
- [15] SAR measurement procedures for 802.11a/b/g transmitters, Laboratory Division Office of Engineering and Technology FCC, October 2006
- [16] SAR measurement procedures for 3-6GHz device, Laboratory Division Office of Engineering and Technology FCC, October 2006.

***** END OF REPORT *****