



**FCC 47 CFR PART 15 SUBPART E &  
INDUSTRY CANADA RSS-210**

**TEST REPORT**

**For**

**J3400 Table PC**

**Model: T008**

**Trade Name: Motion**

*Issued to*

**Motion Computing Incorporated  
8601 Ranch Road 2222; Building 2 Austin,  
Texas 78730 USA**

*Issued by*



**Compliance Certification Services Inc.  
No. 11, Wu-Gong 6<sup>th</sup> Rd., Wugu Industrial Park,  
Taipei Hsien 248, Taiwan (R.O.C.)  
<http://www.ccsemc.com.tw>  
[service@tw.ccsemc.com](mailto:service@tw.ccsemc.com)**



---

***Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.*



# TABLE OF CONTENTS

- 1. TEST RESULT CERTIFICATION..... 3**
- 2. EUT DESCRIPTION ..... 4**
- 3. TEST METHODOLOGY ..... 6**
  - 3.1 EUT CONFIGURATION ..... 6
  - 3.2 EUT EXERCISE ..... 6
  - 3.3 GENERAL TEST PROCEDURES ..... 6
  - 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS ..... 7
  - 3.5 DESCRIPTION OF TEST MODES ..... 8
- 4. INSTRUMENT CALIBRATION..... 9**
  - 4.1 MEASURING INSTRUMENT CALIBRATION ..... 9
  - 4.2 MEASUREMENT EQUIPMENT USED ..... 9
  - 4.3 MEASUREMENT UNCERTAINTY ..... 10
- 5. FACILITIES AND ACCREDITATIONS ..... 11**
  - 5.1 FACILITIES ..... 11
  - 5.2 EQUIPMENT ..... 11
  - 5.3 LABORATORY ACCREDITATIONS AND LISTING ..... 11
  - 5.4 TABLE OF ACCREDITATIONS AND LISTINGS ..... 12
- 6. SETUP OF EQUIPMENT UNDER TEST ..... 13**
  - 6.1 SETUP CONFIGURATION OF EUT ..... 13
  - 6.2 SUPPORT EQUIPMENT ..... 13
- 7. APPLICABLE RULES ..... 14**
- 8. FCC PART 15 REQUIREMENTS & RSS 210 REQUIREMENTS ..... 23**
  - 8.1 99% BANDWIDTH ..... 23
  - 8.2 26 DB EMISSION BANDWIDTH ..... 24
  - 8.3 MAXIMUM CONDUCTED OUTPUT POWER ..... 25
  - 8.4 BAND EDGES MEASUREMENT ..... 27
  - 8.5 PEAK POWER SPECTRAL DENSITY ..... 40
  - 8.6 PEAK EXCURSION ..... 41
  - 8.7 RADIATED UNDESIRABLE EMISSION ..... 42
  - 8.8 CONDUCTED UNDESIRABLE EMISSION ..... 72
  - 8.9 POWERLINE CONDUCTED EMISSIONS ..... 73
  - 8.10 TRANSMISSION IN ABSENCE OF DATA ..... 76
  - 8.11 FREQUENCY STABILITY ..... 76
  - 8.12 DYNAMIC FREQUENCY SELECTION ..... 77
- APPENDIX I RADIO FREQUENCY EXPOSURE ..... 108**
- APPENDIX II PHOTOGRAPHS OF TEST SETUP..... 109**



# 1. TEST RESULT CERTIFICATION

**Applicant:** Motion Computing Incorporated  
 8601 Ranch Road 2222; Building 2 Austin,  
 Texas 78730 USA

**Manufacturer:** COMPAL ELECTRONICS, INC.  
 No. 581, Ruiguang Rd., Neihu District,  
 Taipei City 11492, Taiwan(R.O.C.)

**Equipment Under Test:** J3400 Table PC

**Trade Name:** Motion

**Model:** T008

**Date of Test:** November 25, 2008 ~ January 6, 2009

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart E & Industry Canada RSS-210 Issue 7 <small>June, 2007</small>	No non-compliance noted

**We hereby certify that:**

Compliance Certification Services Inc. tested the above equipment. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.4: 2003** and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.407 and Industry Canada RSS-210 Issue 7.

The test results of this report relate only to the tested sample identified in this report.

*Approved by:*

*Reviewed by:*

---

Rex Lai  
 Section Manager  
 Compliance Certification Services Inc.

---

Amanda Wu  
 Section Manager  
 Compliance Certification Services Inc.



## 2. EUT DESCRIPTION

<b>Product</b>	J3400 Table PC			
<b>Trade Name</b>	Motion			
<b>Model Number</b>	T008			
<b>Model Discrepancy</b>	N/A			
<b>RF Module Number</b>	533AN_HMW			
<b>RF Module Trade Name</b>	INTEL			
<b>Power Supply</b>	1. Power Adapter DELTA ELECTRONICS, INC. / ADP-50HH REV.B I/P: 100-240V, 1.5A, 50-60Hz LPS O/P: 19V, 2.64A 2. Rechargeable Battery *2 Motion / BATKEX00L4 Rating: 14.8V, 2000mAh, 30Wh			
<b>Operating Frequency Range &amp; Number of Channels</b>		<b>Mode</b>	<b>Frequency Range (MHz)</b>	<b>Number of Channels</b>
	UNII Band I	IEEE 802.11a	5180 – 5240	4 Channels
		draft 802.11n Standard-20 MHz	5180 – 5240	4 Channels
		draft 802.11n Wide-40 MHz	5190 ~ 5230	2 Channels
	UNII Band II	IEEE 802.11a	5260 - 5320	4 Channels
		draft 802.11n Standard-20 MHz	5260 - 5320	4 Channels
		draft 802.11n Wide-40 MHz	5270 - 5310	2 Channels
	UNII Band III	IEEE 802.11a	5500 - 5700	11 Channels
		draft 802.11n Standard-20 MHz	5500 – 5700	11 Channels
draft 802.11n Wide-40 MHz		5510 - 5670	7 Channels	
<b>Transmit Power Listed in the Grant as below (FCC ID: PD9533ANH, IC: 1000M-533ANH)</b>	<b>For FCC</b>			
	UNII Band I (5180.0 - 5240MHz): 0.0448 mW UNII Band II (5260.0 - 5320MHz): 0.0454 mW UNII Band III (5500.0 - 5700MHz): 0.0454 mW			
	<b>For IC</b>			
	0.049 Watts Conducted 5180-5240MHz 0.087 Watts Conducted 5260-5350MHz 0.083 Watts Conducted 5260-5320 802.11n 0.083 Watts Conducted 5500-5700 802.11n			
<b>Modulation Technique</b>	OFDM (QPSK, BPSK, 16-QAM, 64-QAM)			
<b>Transmit Data Rate</b>	6/36/54 Mbps for 802.11a mode Up to 450 Mbps for 802.11n mode			
<b>Antenna Specification</b>	Gain: -1.16dBi			
<b>Antenna Designation</b>	Monopole Antenna			



**Operation Frequency:**

UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII)	
CHANNEL	MHz
36	5180
38	5190
40	5200
46	5230
48	5240
52	5260
54	5270
62	5310
64	5350
100	5500
102	5510
118	5590
134	5670
120	5600
140	5700

- Remark:**
- 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.*
  - 2. Testing was performed on the Motion Notebook PC, Model: T008 with INTEL Mini-PCI Wireless LAN Module (802.11a/b/g/n), Model: 533AN\_HMW.*
  - 3. The WLAN module was originally certified by INTEL as a modular approval under FCC ID: PD9533ANH (IC: 1000M-533ANH). The Radio modules are installed in a controlled environment at the Motion Notebook production/assembly factory.*
  - 4. The WLAN supports IEEE 802.11a and IEEE 802.11n (U-NII) configurations. Tests were performed in all configurations.*



### **3. TEST METHODOLOGY**

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4: 2003 Radiated testing was performed at an antenna to EUT distance 3 meters.

The tests documented in this report were performed in accordance with ANSI C63.4: 2003 and FCC CFR 47 Part 15.407, RSS-GEN Issue 2, and RSS-210 Issue 7.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed for RF field strength measurement to meet the Commissions requirement, and is operated in a manner intended to generate the maximum emission in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT is operated in the engineering mode to fix the Tx frequency for the purposes of measurement.

According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Radiated Emissions**

The EUT is placed on the turntable, which is 0.8 m above the ground plane. The turntable is then rotated for 360 degrees to determine the proper orientation for the maximum emission level. The EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission level. And, each emission is to be maximized by changing the horizontal and vertical polarization of the receiving antenna. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003.



### 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



### 3.5 DESCRIPTION OF TEST MODES

The EUT (model: T008) had been tested under operating condition.

The EUT is a 3x3 configuration spatial MIMO (3Tx & 3Rx) without beam forming function. The 3x3 configuration is implemented with three outside TX & RX chains (Chain 0, Chain 1 and Chain 2).

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all test items was carried out with the worst case test modes as shown below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode and receiving radiated spurious emission above 1GHz, which worst case was in CH Mid mode only.

#### **UNII Band I:**

##### **IEEE 802.11a for 5180 ~ 5240MHz:**

Channel Low (5180MHz), Channel Mid (5220MHz) and Channel High (5240MHz) with 6Mbps data rate were chosen for full testing.

##### **draft 802.11n Standard-20 MHz for 5180 ~ 5240MHz:**

Channel Low (5180MHz), Channel Mid (5220MHz) and Channel High (5240MHz) with 6.5Mbps data rate were chosen for full testing.

##### **draft 802.11n Wide-40 MHz for 5190 ~ 5230MHz:**

Channel Low (5190MHz) and Channel High (5230MHz) with 13.5Mbps data rate were chosen for full testing.

#### **UNII Band II:**

##### **IEEE 802.11a for 5260 ~ 5320MHz:**

Channel Low (5260MHz), Channel Mid (5280MHz) and Channel High (5320MHz) with 6Mbps data rate were chosen for full testing.

##### **draft 802.11n Standard-20 MHz for 5260 ~ 5320MHz:**

Channel Low (5260MHz), Channel Mid (5280MHz) and Channel High (5320MHz) with 6.5Mbps data rate were chosen for full testing.

##### **draft 802.11n Wide-40 MHz for 5270 ~ 5310MHz:**

Channel Low (5270MHz) and Channel High (5310MHz) with 13.5Mbps data rate were chosen for full testing.

#### **UNII Band III:**

##### **IEEE 802.11a for 5500 ~ 5700MHz:**

Channel Low (5500MHz), Channel Mid (5600MHz) and Channel High (5700MHz) with 6Mbps data rate were chosen for full testing.

##### **draft 802.11n Standard-20 MHz for 5500 ~ 5700MHz:**

Channel Low (5500MHz), Channel Mid (5600MHz) and Channel High (5700MHz) with 6Mbps data rate were chosen for full testing.

##### **draft 802.11n Wide-40 MHz for 5510 ~ 5670MHz:**

Channel Low (5510MHz), Channel Mid (5590MHz) and Channel High (5670MHz) with 13.5Mbps data rate were chosen for full testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z mode), lie-down position (X, Y mode) and docking mode. The worst emission was found in docking mode for powerline conducted emissions, Z mode for radiation emissions and the worst cases were recorded.





## 4. INSTRUMENT CALIBRATION

### 4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 4.2 MEASUREMENT EQUIPMENT USED

#### Equipment Used for Emissions Measurement

*Remark: Each piece of equipment is scheduled for calibration once a year.*

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	09/10/2009
Test Receiver	Rohde&Schwarz	ESCI	100064	11/30/2009
Switch Controller	TRC	Switch Controller	SC94050010	05/03/2009
4 Port Switch	TRC	4 Port Switch	SC94050020	05/03/2009
Horn-Antenna	TRC	HA-0502	06	06/04/2009
Horn-Antenna	TRC	HA-0801	04	06/18/2009
Horn-Antenna	TRC	HA-1201A	01	08/10/2009
Horn-Antenna	TRC	HA-1301A	01	08/11/2009
Bilog- Antenna	Sunol Sciences	JB3	A030205	03/28/2009
Turn Table	Max-Full	MFT-120S	T120S940302	N.C.R.
Antenna Tower	Max-Full	MFA-430	A440940302	N.C.R.
Controller	Max-Full	MF-CM886	CC-C-1F-13	N.C.R.
Site NSA	CCS	N/A	FCC MRA: TW1039 IC: IC 2324G-1/-2	10/17/2010 11/04/2010
Test S/W	LABVIEW (V 6.1)			

Powerline Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver 9kHz-30MHz	Rohde & Schwarz	ESHS30	828144/003	11/25/2009
Two-Line V-Network 9kHz-30MHz	Schaffner	NNB41	03/10013	06/11/2009
LISN 10kHz-100MHz	EMCO	3825/2	9106-1809	04/09/2009
Test S/W	LABVIEW (V 6.1)			

Dynamic Frequency Selection				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Rohde&Schwarz	FSEK 30	100264	04/15/2009
Signal Generator	Agilent	E8267C	US42340162	04/12/2009



### 4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 2.81
3M Semi Anechoic Chamber / 30MHz ~ 1GHz	+/-3.7046
3M Semi Anechoic Chamber / Above 1GHz	+/-3.0958

**Remark:** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.




Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 5.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 0824-01 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC 2324G-1 for 3M Semi Anechoic Chamber A, 2324G-2 for 3M Semi Anechoic Chamber B.

## 5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

\* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

### 6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	LCD Monitor	SAMSUNG	959NF	AQ19H2RT706126P	FCC DoC	Shielded, 1.8m with 2 cores	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2.	USB 2.0 External HDD	TeraSyS	F12-U	A0100214-2Bq0039	FCC DoC	Shielded, 1.8m	N/A
3.	Multimedia Earphone	Labtec	Axis-301	N/A	FCC DoC	Unshielded, 1.8m*2	N/A
4.	USB Mouse	HP	MO19UCA	20440964	FCC DoC	Shielded, 1.8m	N/A
5.	Test Kit	N/A	N/A	N/A	N/A	N/A	N/A
6.	Notebook PC (Remote)	DELL	PP10L	50XP51J	FCC DoC	LAN Cable: Unshielded, 10m	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

**Remark:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



## 7. APPLICABLE RULES

### **RSS-210 §2 General Certification Requirements and Specifications**

#### **RSS-210 §2.1 Frequency Stability**

When the carrier frequency stability is not specified, it need not be tested, provided that the carrier frequency is chosen such that the fundamental modulation products (meaning the nominal bandwidth) lie totally within the bands listed in Tables 2, 3, 4 and 5 and do not fall into any restricted band listed in Table 1. Due account shall be taken of carrier frequency drift as a result of aging, temperature, humidity, and supply voltage variations when using frequencies near the band edges.

#### **RSS-210 §2.2 Restricted Bands and Unwanted Emission Frequencies**

Restricted bands, identified in Table 1, are designated primarily for safety-of-life services (distress calling and certain aeronautical bands), certain satellite downlinks, radio astronomy, and some government uses. Except where otherwise indicated, the following restrictions apply:

- (a) Fundamental components of modulation of LPDs shall not fall within the restricted bands of Table 1.
- (b) Unwanted emissions falling into restricted bands of Table 1 shall meet Tables 2 and 3 limits. It should also be noted that unwanted emissions falling in non-restricted bands do not need to be suppressed to a level lower than the Table 2 and 3 limits.
- (c) Unwanted emissions not falling within restricted frequency bands may also use the limits specified in the applicable annex.

#### **RSS-210 §2.3 Licence-exempt Receivers**

Category I licence-exempt receivers are required to have their spurious emissions comply with Section 7.2.3 of RSS-Gen.

#### **RSS-210 §2.6 General Field Strength Limits**

Table 2 and 3 list the permissible levels of unwanted emissions of transmitters and receivers. However, transmitters with field strengths that do not exceed the limits in these tables may also operate in these frequency bands, other than the restricted bands of Table 1 and the TV bands (i.e. unwanted emissions of transmitters and receivers are permitted to fall into Table 1 and TV frequencies but intentional emissions are prohibited). See the note of Table 2 for further details.

**RSS-210 §2.7 Tables****RSS-210 Table 1: Restricted Frequency Bands** <sup>(Note)</sup>

MHz	MHz	MHz	MHz	GHz
0.090-0.110	8.37625-8.38675	--	1718.8-1722.2	9.0-9.2
--	8.41425-8.41475	156.52475-156.52525	2200-2300	9.3-9.5
2.1735-2.1905	12.29-12.293	156.7-156.9	2310-2390	10.6-12.7
3.020-3.026	12.51975-12.52025	--	--	13.25-13.4
4.125-4.128	12.57675-12.57725	--	2655-2900	14.47-14.5
4.17725-4.17775	13.36-13.41	240-285	3260-3267	15.35-16.2
4.20725-4.20775	16.42-16.423	322-335.4	3332-3339	17.7-21.4
5.677-5.683	16.69475-16.69525	399.9-410	3345.8-3358	22.01-23.12
6.215-6.218	16.80425-16.80475	608-614	3500-4400	23.6-24.0
6.26775-6.26825	25.5-25.67	960-1427	4500-5150	31.2-31.8
6.31175-6.31225	37.5-38.25	1435-1626.5	5350-5460	36.43-36.5
8.291-8.294	73-74.6; 74.8-75.2	1645.5-1646.5	7250-7750	Above 38.6
8.362-8.366	108-138	1660-1710	8025-8500	

*Note: Certain frequency bands listed in Table 2 and above 38.6 GHz are designated for low-power licence-exempt applications. These frequency bands and the requirements that apply to the devices are set out in this Standard as well as RSS-310.*

**RSS-210 Table 2: General Field Strength Limits for Transmitters and Receivers at Frequencies Above 30 MHz** <sup>(Note)</sup>

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

*Note: Transmitting devices are not permitted in Table 1 bands or in TV bands (54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz, and 614-806 MHz). Prohibition of operation in TV bands does not apply to momentary devices, or to medical telemetry devices in the band 174-216 MHz, and to perimeter protection systems in the bands 54-72 and 76-88 MHz. The perimeter protection devices are to meet Table 3 field strengths limits.*

**RSS-210 Table 3: General Field Strength Limits for Transmitters at Frequencies Below 30 MHz (Transmit)**

Frequency (fundamental or spurious)	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/377F (F in Hz)	300
490-1.705 kHz	24,000/F (F in kHz)	24,000/377F (F in kHz)	30
1.705-30 MHz	30	N/A	30

*Note: The emission limits for the bands 9-90 kHz and 110-490 kHz are based on measurements employing an average detector.*

**RSS-210 §Annex 8: Frequency Hopping and Digital Modulation Systems Operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz Bands**

This section applies to systems that employ frequency hopping (FH) and digital modulation technology in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. Systems in these bands may employ frequency hopping, digital modulation and or a combination (hybrid) of both techniques.

A frequency hopping system that synchronizes with another or several other systems (to avoid frequency collision among them) via off-air sensing or via connecting cables is not hopping randomly and therefore is not in compliance with RSS-210.

**RSS-210 §A8.1 Frequency Hopping Systems**

Frequency hopping systems are spread spectrum systems in which the carrier is modulated with coded information in a conventional manner causing a conventional spreading of the RF energy about the carrier frequency. The frequency of the carrier is not fixed but changes at fixed intervals under the direction of a coded sequence.

Frequency hopping systems are not required to employ all available hopping frequencies during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream.

Incorporation of intelligence into a frequency hopping system that enables it to recognize other users of the band and to avoid occupied frequencies is permitted, provided that the frequency hopping system does it individually, and independently chooses or adapts its hopset. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

The following applies to frequency hopping systems in each of the three bands.

(a) The bandwidth of a frequency hopping channel is the 20 dB emission bandwidth, measured with the hopping stopped. The system RF bandwidth is equal to the channel bandwidth multiplied by the number of channels in the hopset. The hopset shall be such that the near term distribution of frequencies appears random, with sequential hops randomly distributed in both direction and magnitude of change in the hopset while the long term distribution appears evenly distributed.





(b) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125 W. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(d) Frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that a minimum of 15 hopping channels are used.

### **RSS-210 §A8.2 Digital Modulation Systems**

These include systems employing digital modulation techniques resulting in spectral characteristics similar to direct sequence systems. The following applies to all three bands.

### **RSS-210 §A8.4 Transmitter Output Power and e.i.r.p. Requirements**

(4) For systems employing digital modulation techniques operating in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands, the maximum peak conducted power shall not exceed 1 W. Except as provided in Section A8.4(5), the e.i.r.p. shall not exceed 4 W.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power (see RSS-Gen)

(5) Point-to-point systems in the bands 2400-2483.5 MHz and 5725-5850 MHz are permitted to have an e.i.r.p. higher than 4 W, provided that the higher e.i.r.p. is achieved by employing higher gain directional antennas and not higher transmitter output powers. Point-to-multipoint systems, omni-directional applications and multiple co-located transmitters transmitting the same information are prohibited from exceeding 4 W e.i.r.p. However, remote stations of point-to-multipoint systems shall be allowed to operate at greater than 4 W e.i.r.p. under the same conditions as for point-to-point systems.

**Note:** "Fixed, point-to-point operation", excludes point-to-multipoint systems, omnidirectional applications and multiple co-located transmitters transmitting the same information.



**RSS-210 §A8.5 Out-of-band Emissions**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required.

**RSS-210 §Annex 9: Local Area Network Devices**

This annex provides standards for licence-exempt local area network (LE-LAN) devices operating in the 5150-5350 MHz and 5470-5825 MHz bands.

Devices operating in the 5250-5350 MHz which do not comply with the provisions in this annex but only with the requirements in RSS-210, Issue 5 will be allowed to be certified until May 1, 2008. After that date, devices operating in this band shall be certified only if they comply with the provisions in this annex.

Within the band 5150-5250 MHz, LE-LAN devices are restricted to indoor operation only.

**RSS-210 §A9.2 Transmitter power and e.i.r.p. Limits**

(1) For the band 5150-5250 MHz, the maximum equivalent isotropically radiated power (e.i.r.p.) shall not exceed 200 mW or  $10 + 10 \text{ Log}_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

(2) For the band 5250-5350 MHz and 5470-5725 MHz, the maximum conducted output power shall not exceed 250 mW or  $11 + 10 \text{ Log}_{10} B$ , dBm, whichever power is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \text{ Log}_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

In addition, devices with maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

In addition to the above requirements, devices operating in the 5250-5350 MHz band with maximum e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. elevation mask where  $\theta$  is the angle above the local horizontal plane (of the earth) as shown below:

- -13 dB(W/MHz) for  $0^\circ \leq \theta < 8^\circ$
- $-13 - 0.716 (\theta - 8)$  dB(W/MHz) for  $8^\circ \leq \theta < 40^\circ$
- $-35.9 - 1.22 (\theta - 40)$  dB(W/MHz) for  $40^\circ \leq \theta \leq 45^\circ$
- -42 dB(W/MHz) for  $\theta > 45^\circ$



(3) For the band 5725-5825 MHz, the maximum conducted output power shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever power is less. The power spectral density shall not exceed 17 dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 4.0 W or  $23 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

Fixed point-to-point devices for this band are permitted up to 200 W e.i.r.p. by employing higher gain antennas, but not higher transmitter output powers. Point-to-multipoint systems, omni-directional applications and multiple co-located transmitters transmitting the same information are prohibited under this high e.i.r.p. category. However, remote stations of point-to-multipoint systems shall be permitted to operate at the point-to-point e.i.r.p. limit provided that the higher e.i.r.p. is achieved by employing higher gain directional antennas and not higher transmitter output powers.

### **RSS-210 §A9.3 Out-of-band Emissions Limits**

(1) For transmitters operating in the 5150-5250 MHz band, all emissions outside the 5150-5350 MHz band shall not exceed -27 dBm/MHz e.i.r.p.

(2) For transmitters operating in the 5250-5350 MHz band, all emissions outside the 5150-5350 MHz band shall not exceed -27 dBm/MHz e.i.r.p. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band shall not exceed an out-of-band emission limit of -27 dBm/MHz e.i.r.p. in the 5150-5250 MHz band in order to operate indoor/outdoor, or alternatively shall comply with the spectral power density for operation within 5150-5250 MHz band and shall be labelled "for indoor use only".

(3) For transmitters operating in the 5470-5725 MHz, all emissions outside the 5470-5725 MHz band shall not exceed -27 dBm/MHz e.i.r.p.

(4) For transmitters operating in the 5725-5825 MHz, all emissions within the frequency range from the band edges to 10 MHz above or below the band edges shall not exceed -17 dBm/MHz e.i.r.p. For frequencies more than 10 MHz above or below the band edges, emissions shall not exceed -27 dBm/MHz.

### **RSS-210 §A9.5 Other Requirements for All Bands**

(a) Digital modulation shall be used. The power measurements (transmitter output power and e.i.r.p., or unwanted emissions) are in terms of average value (i.e. using an averaging meter). If the transmission is in bursts, Section 4.3 (Pulsed Operation) of RSS-Gen applies.

(b) Within the emission bandwidth, when the peak spectral density per MHz over any continuous transmission exceeds the average ( $10 \log_{10} B$ ) value by more than 3 dB, the permissible power spectral density shall be reduced by the excess amount.

A measurement resolution bandwidth narrower than 1.0 MHz is permitted provided that power integration over 1.0 MHz is performed. On the other hand, if the emission bandwidth of the signal is less than 1.0 MHz, the measurement bandwidth should be reduced to that of the emission bandwidth to obtain the proper power spectral density; alternatively, the measured value could be normalized to 1.0 MHz. (**Note:** B has been defined above as the 99% emission bandwidth).

(c) The outermost carrier frequencies or channels, as permitted by the design of the equipment, shall be used when measuring unwanted emissions. Such carrier or channel centre frequencies are to be indicated in the test report.

(d) The device shall automatically discontinue transmission in case of absence of information to transmit, or operational failure. A description on how this is done shall accompany the application for equipment certification. Note that this is not intended to prohibit transmission of control or signalling information or the use of repetitive codes where required by the technology.



(e) The transmitter frequency stability shall be better than  $\pm 10$  ppm. Alternatively, the applicant can show that the unwanted emission masks of the outermost channels are complied with when tested under all conditions of normal operation as specified in the user manual.

(f) Mobile Satellite Service operators may monitor emissions from LE-LAN devices in the 5150-5250 MHz band and, if emissions approach the 10 W/MHz aggregate ground level emission, may request that Industry Canada reassess the technical parameters of LE-LAN devices. The aggregation may be from all devices within the footprint of the MSS satellite antenna beam and not just from Canadian devices.

(g) User Manual

The user manual of local area network devices shall contain clear instructions on the restrictions mentioned above, namely:

- that the device for the band 5150-5250 MHz is only for indoor usage to reduce potential for harmful interference to co-channel mobile satellite systems;
- the maximum antenna gain permitted (for devices in the 5250-5350 MHz and 5470-5725 MHz bands) to comply with the e.i.r.p. limit; and
- the maximum antenna gain permitted (for devices in the 5725-5825 MHz band) to comply with the e.i.r.p. limits specified for point-to-point and non point-to-point operation as appropriate, as stated in section A9.2(3).

In addition, users should also be cautioned to take note that high power radars are allocated as primary users (meaning they have priority) of 5250-5350 MHz and 5650-5850 MHz and these radars could cause interference and/or damage to LE-LAN devices.

### **RSS-Gen §2 General Information**

Unless otherwise indicated, radiocommunications equipment is subject to licensing pursuant to subsection 4(1) of the *Radiocommunication Act*.

#### **RSS-Gen §2.1.2 Category II Equipment**

Category II equipment comprises radio devices where a standard has been prescribed but for which a TAC is not required, that is, equipment certification by Industry Canada or a Certification Body (CB) is not required (certification exempt), pursuant to subsection 4(3) of the *Radiocommunication Act*. The manufacturer or importer shall nevertheless ensure that the standards are complied with. A test report shall be available on request and the device shall be properly labelled.

#### **RSS-Gen §2.2 Receivers**

Radiocommunication receivers are defined as Category I equipment or Category II equipment by the characteristics outlined below.

##### **RSS-Gen §2.2.1 Category I Equipment Receivers**

A receiver is classified as Category I equipment if it meets one of the following conditions:

- (a) is a stand-alone receiver that is tunable to any frequency in the band 30-960 MHz;
- (b) is a receiver that is associated with Category I transmitters; or
- (c) is a scanner receiver.

Except for scanner receivers, which have their own RSSs, Category I receivers shall comply with the limits for receiver spurious emissions set out in Section 6 of this RSS-Gen, and shall be certified under the RSS applicable to the transmitter type with which the receiver is associated or designed to operate (NOT under RSS-Gen).



**RSS-Gen §2.2.2 Category II Equipment Receivers**

A receiver is classified as Category II equipment if it is not meeting the conditions of Section 2.2.1.

**RSS-Gen §2.2.3 Licence-exempt Receivers**

Paging receivers, “receive-only” earth stations operating with satellites approved by Industry Canada, and stand-alone receivers which are exempted from licensing, can be classified as either Category I or Category II. These receivers shall comply with the requirements of RSS-210 or RSS-310, respectively.

**RSS-Gen §2.3 Licence-exempt Low-power Radiocommunication Devices (LPDs)**

Licence-exempt low-power radiocommunication devices are devices which have intentional and unwanted emissions of very low signal levels such that they can co-exist with licensed radio services. LPDs are required to operate on a “**no-interference no-protection**” basis (i.e. they may not cause radio interference and cannot claim protection from interference). The requirements for LPDs are generally described in Section 7.

**RSS-Gen §5.5 Exposure of Humans to RF Fields**

Before equipment certification is granted, the applicable requirements of RSS-102 shall be met.

**RSS-Gen §6 Receiver Spurious Emission Standard**

The following receiver spurious emission limits shall be complied with:

- (a) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table 1.

**RSS-Gen Table 1 - Spurious Emission Limits for Receivers**

Frequency (MHz)	Field Strength microvolts/m at 3 metres
30-88	100
88-216	150
216-960	200
Above 960	500

- (b) If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5 nanowatts above 1 GHz.



**RSS-Gen §7.1.4 Transmitter Antenna**

A transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the highest-gain antenna of each combination of transmitter and antenna type for which certification is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type and having equal or lesser gain as an antenna that had been successfully tested for certification with the transmitter, will also be considered certified with the transmitter, and may be used and marketed with the transmitter. The manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power before using the power limits specified in RSS-210 or RSS-310 for devices of RF output powers of 10 milliwatts or less. For devices of output powers greater than 10 milliwatts, except devices subject to RSS-210 Annex 8 (Frequency Hopping and Digital Modulation Systems Operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz Bands) or RSS-210 Annex 9 (Local Area Network Devices), the total antenna gain shall be added to the measured RF output power before using the specified power limits. For devices subject to RSS-210 Annex 8 or Annex 9, the antenna gain shall not be added.

**RSS-Gen §7.2.2 Transmitter and Receiver AC Power Lines Conducted Emission Limits**

Except when the requirements applicable to a given device state otherwise, for any licence-exempt radiocommunication device equipped to operate from the public utility AC power supply, either directly or indirectly, the radio frequency voltage that is conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in Table 2. The tighter limit applies at the frequency range boundaries.

**RSS-Gen Table 2 – AC Power Lines Conducted Emission Limits**

Frequency Range (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50


*\*Decreases with the logarithm of the frequency.*



## 8. FCC PART 15 REQUIREMENTS & RSS 210 REQUIREMENTS

### 8.1 99% BANDWIDTH

#### Test Configuration



#### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled.

#### TEST RESULTS

*Not Applicable.*

*Testing was performed by Aegis Labs Inc. CA, USA accredited by A2LA (Accreditation Certificate Number: 1111.01)*

**Results:** *Complied –refer to attachment 2, Aegis test report number: INTEL-080318F with FCC ID: PD94965AGN and INTEL-080318IC with IC No. 1000M-533ANH.*




## 8.2 26 dB EMISSION BANDWIDTH

### LIMIT

According to §15.303(c), for purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Compliance with the emissions limits is based on the use of measurement instrumentation employing a peak detector function with an instrument resolutions bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

### Test Configuration

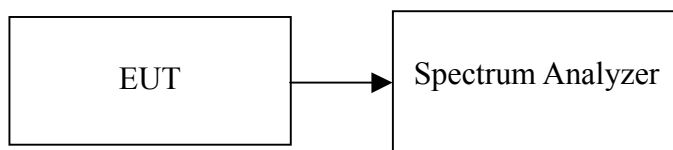

### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low-loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW > 1%EBW, VBW > RBW, Span >26dB bandwidth, and Sweep = auto.
4. Mark the peak frequency and -26dB (upper and lower) frequency.
5. Repeat until all the rest channels were investigated.

### TEST RESULTS

*Not Applicable.*

*Testing was performed by Aegis Labs Inc. CA, USA accredited by A2LA (Accreditation Certificate Number: 1111.01)*

*Results: Complied –refer to attachment 2, Aegis test report number: INTEL-080318F with FCC ID: PD94965AGN and INTEL-080318IC with IC No. 1000M-533ANH.*





## 8.3 MAXIMUM CONDUCTED OUTPUT POWER

### LIMIT

#### According to §15.407(a),

- (1) For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or  $4 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in MHz.
- (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in MHz.

*If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.*


#### According to RSS-210 §A9.2,

- (1) For the band 5150-5250 MHz, the maximum equivalent isotropically radiated power (e.i.r.p.) shall not exceed 200 mW or  $10 + 10 \text{ Log}_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.
- (2) For the band 5250-5350 MHz and 5470-5725 MHz, the maximum conducted output power shall not exceed 250 mW or  $11 + 10 \text{ Log}_{10} B$ , dBm, whichever power is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \text{ Log}_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

*In addition, devices with maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.*

## **Test Configuration**

*The EUT was connected to a spectrum analyzer through a 50  $\Omega$  RF cable.*



## **TEST PROCEDURE**

Set span to encompass the entire emission bandwidth (EBW) of the signal.

Set RBW = 1 MHz / Set VBW = 3 MHz.

Use sample detector mode if bin width (i.e., span/number of points in spectrum display) < 0.5 RBW. Otherwise use peak detector mode. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to “free run”. Trace average 100 traces in power averaging mode. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer’s band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.

## **TEST RESULTS**

***Not Applicable.***

*Testing was performed by Aegis Labs Inc. CA, USA accredited by A2LA (Accreditation Certificate Number: 1111.01)*

***Results: Complied –refer to attachment 2, Aegis test report number: INTEL-080318F with FCC ID: PD94965AGN and INTEL-080318IC with IC No. 1000M-533ANH.***


## 8.4 BAND EDGES MEASUREMENT

### LIMIT

According to §15.407(b) & RSS-210 §A8.5,

- (1) The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.
- (2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency block edges as the design of the equipment permits.

### Test Configuration

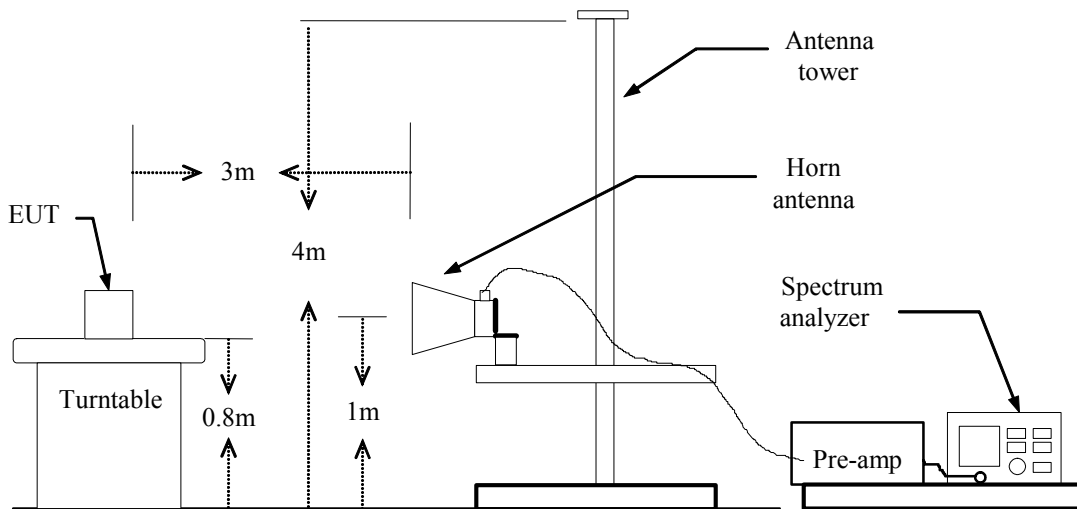

### TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

### TEST RESULTS

Refer to attach spectrum analyzer data chart.



### Band Edges (IEEE 802.11a mode / 5180 MHz)


Detector mode: Peak

Polarity: Vertical

Agilent 11:33:02 Dec 17, 2008

R T

Mkr1 5.150 0 GHz  
59.29 dBμV

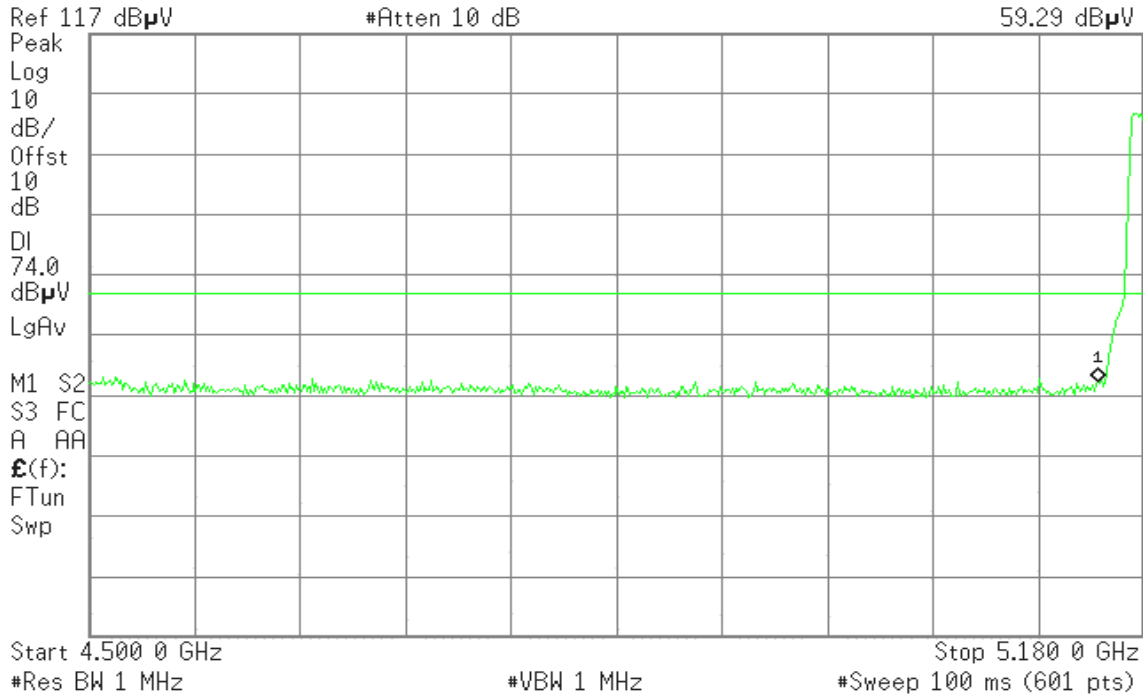


Detector mode: Average

Polarity: Vertical

Agilent 11:34:07 Dec 17, 2008

R T

Mkr1 5.150 0 GHz  
46.50 dBμV

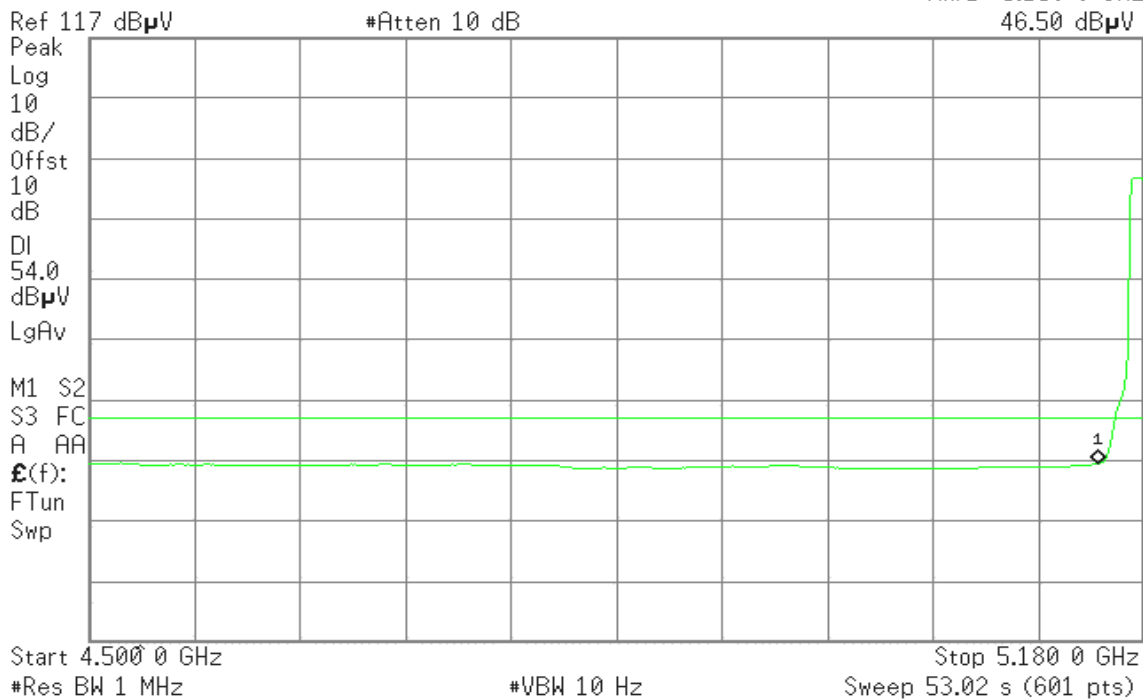



Detector mode: Peak

Polarity: Horizontal


Agilent 11:36:29 Dec 17, 2008

R T

Mkr1 5.150 0 GHz  
58.63 dBμV

Ref 117 dBμV

#Atten 10 dB

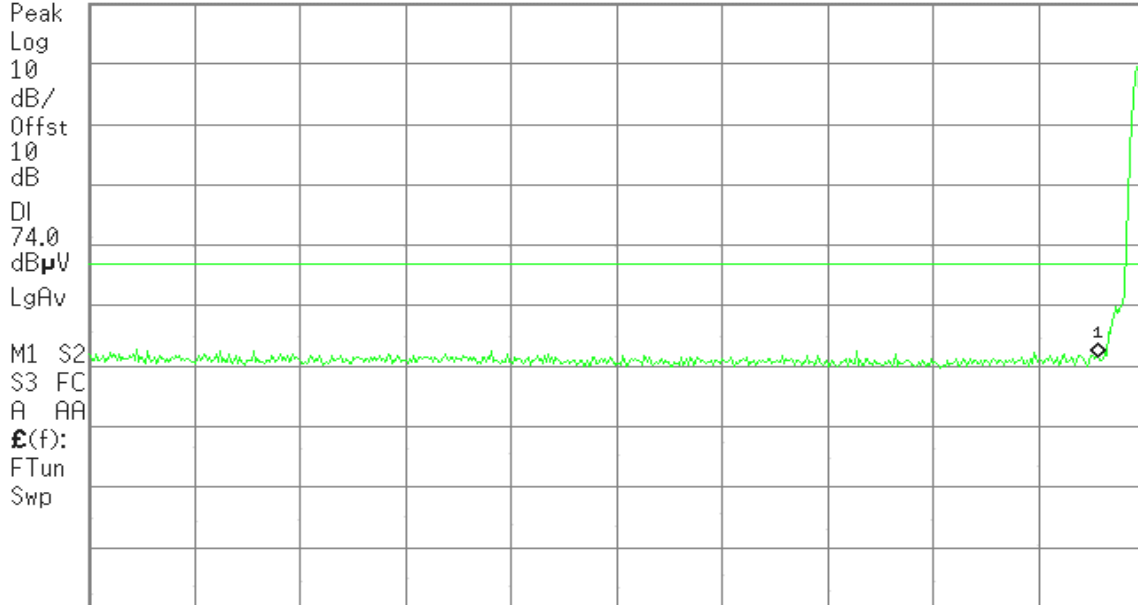

Start 4.500 0 GHz

Stop 5.180 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal


Agilent 11:36:04 Dec 17, 2008

R T

Mkr1 5.150 0 GHz  
46.44 dBμV

Ref 117 dBμV

#Atten 10 dB

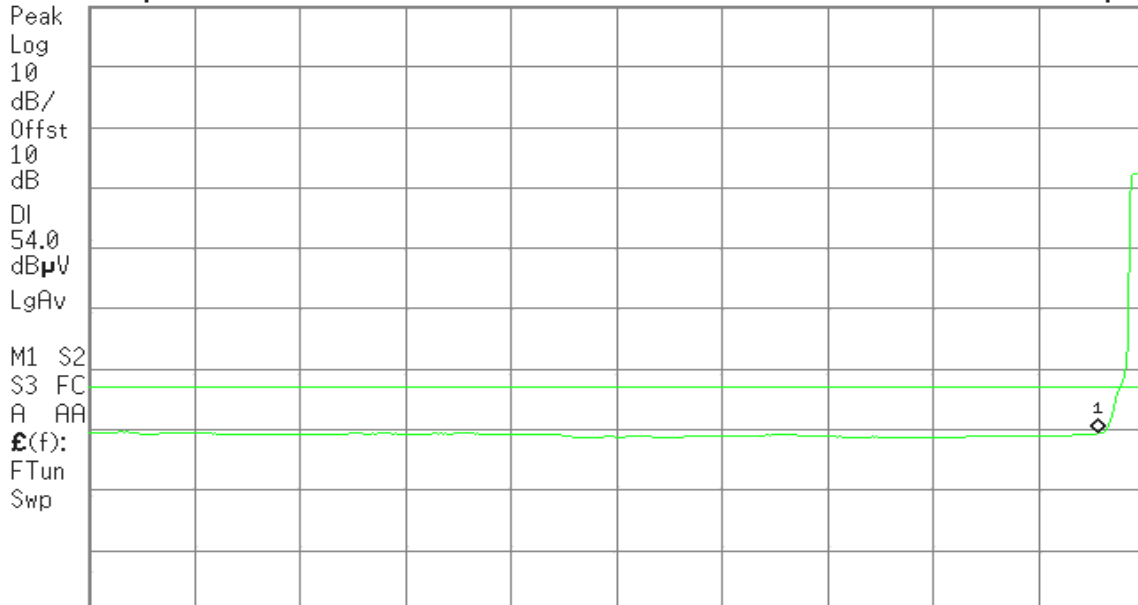

Start 4.500 0 GHz

Stop 5.180 0 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 53.02 s (601 pts)



### Band Edges (IEEE 802.11a mode / 5320 MHz)


Detector mode: Peak

Polarity: Vertical

Agilent 21:03:24 Dec 17, 2008

R T

Mkr1 5.350 0 GHz  
50.79 dBμV

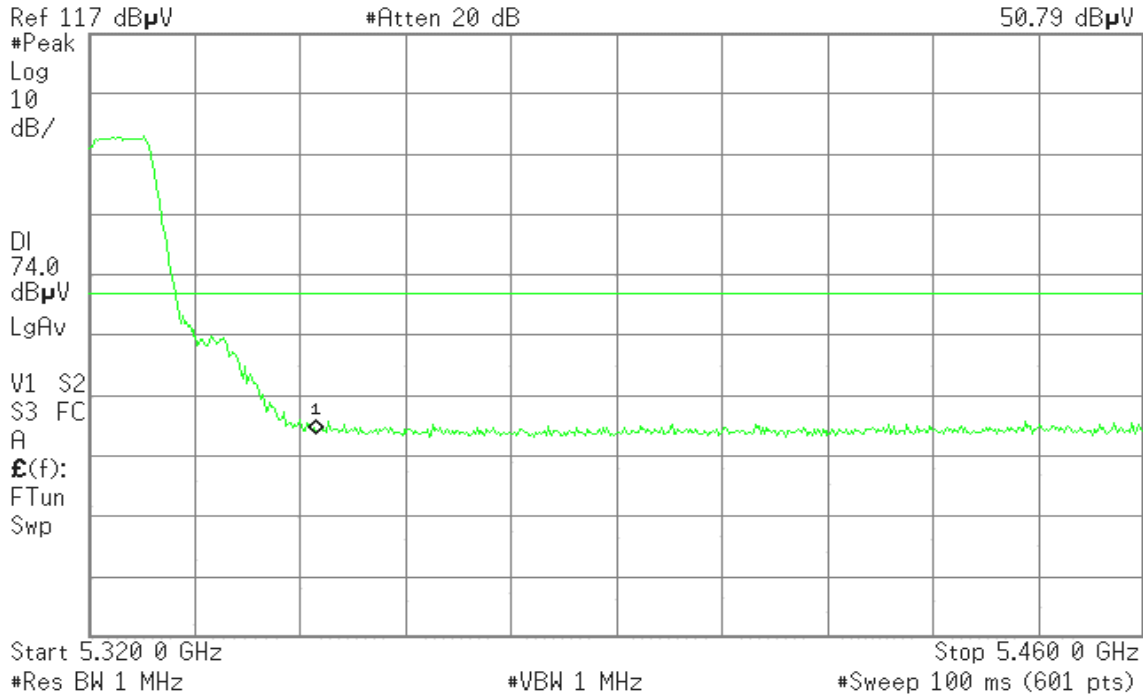


Detector mode: Average

Polarity: Vertical

Agilent 21:03:44 Dec 17, 2008

R T

Mkr1 5.350 0 GHz  
38.97 dBμV

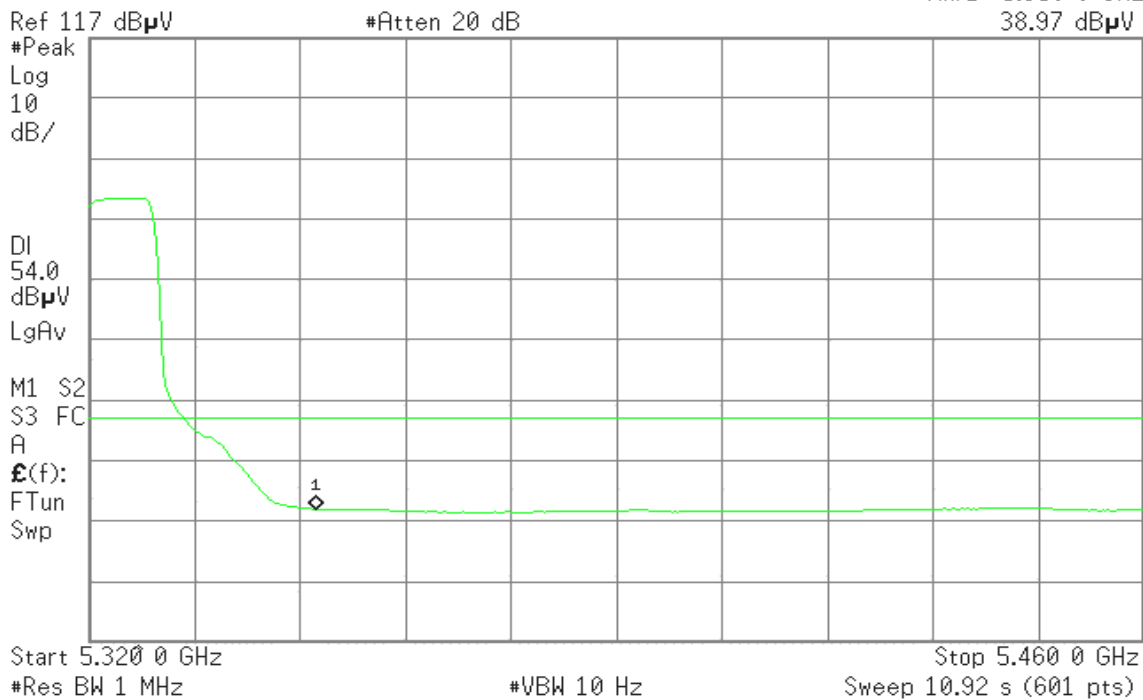




Detector mode: Peak

Polarity: Horizontal

Agilent 21:00:04 Dec 17, 2008

R T

Mkr1 5.350 0 GHz  
51.55 dBμV

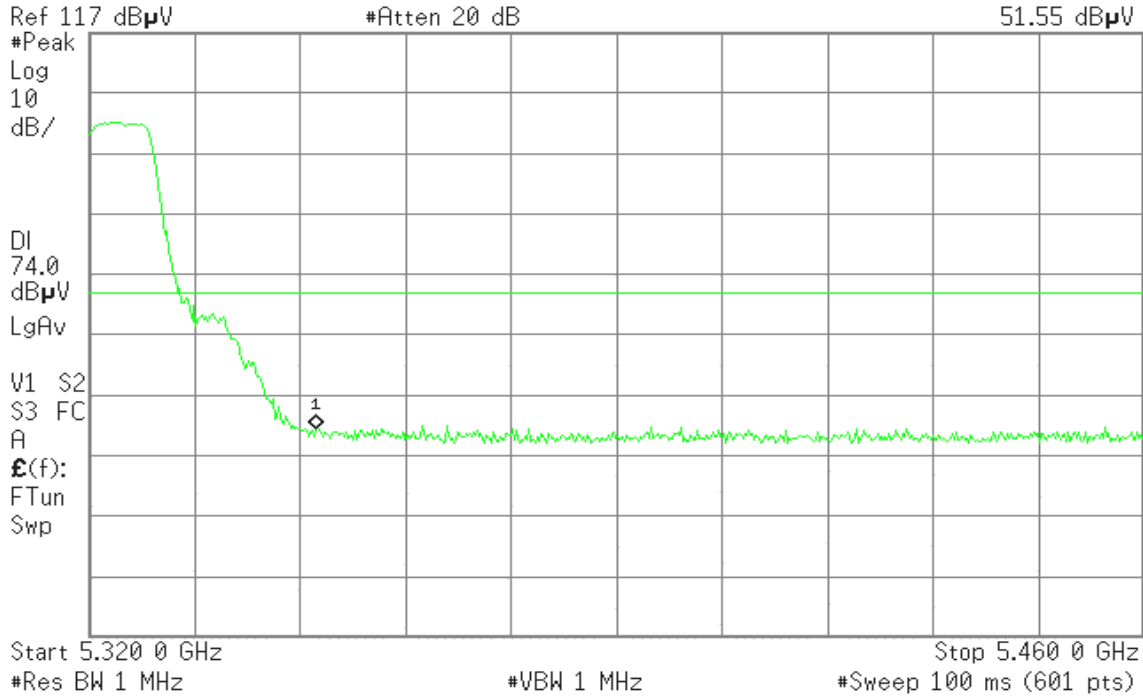


Detector mode: Average

Polarity: Horizontal

Agilent 21:00:32 Dec 17, 2008

R T

Mkr1 5.350 0 GHz  
39.19 dBμV

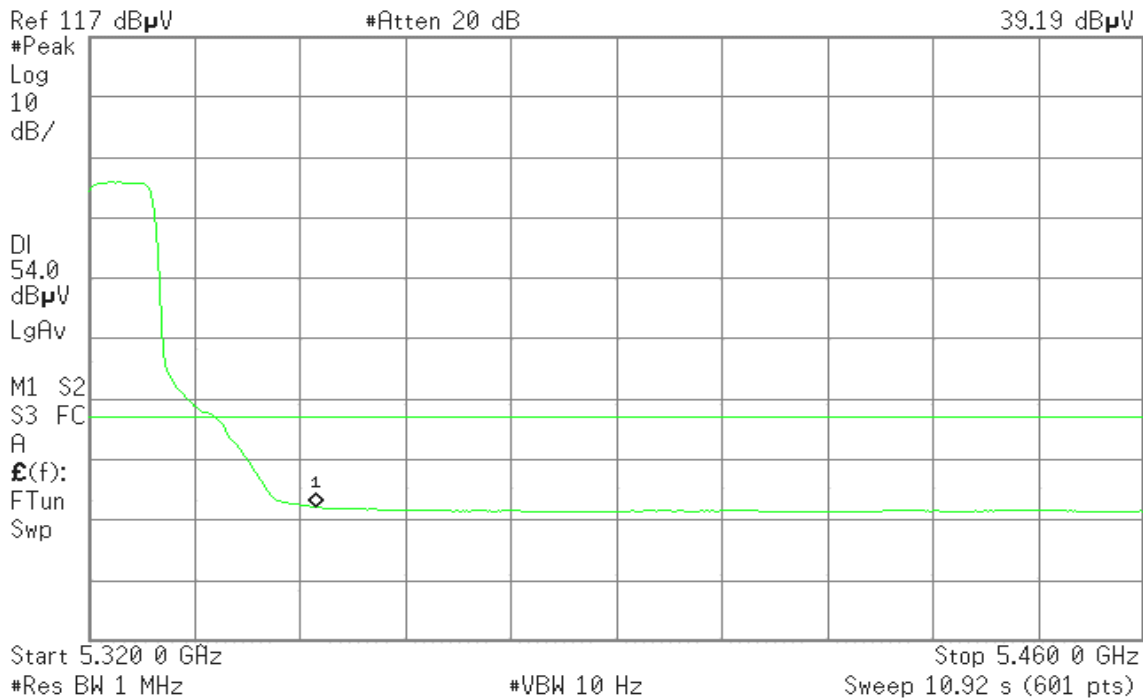



### Band Edges (draft 802.11n Standard-20 MHz / 5180 MHz)


Detector mode: Peak

Polarity: Vertical

Agilent 21:18:27 Dec 17, 2008

R T

Mkr1 5.150 0 GHz  
50.44 dBμV

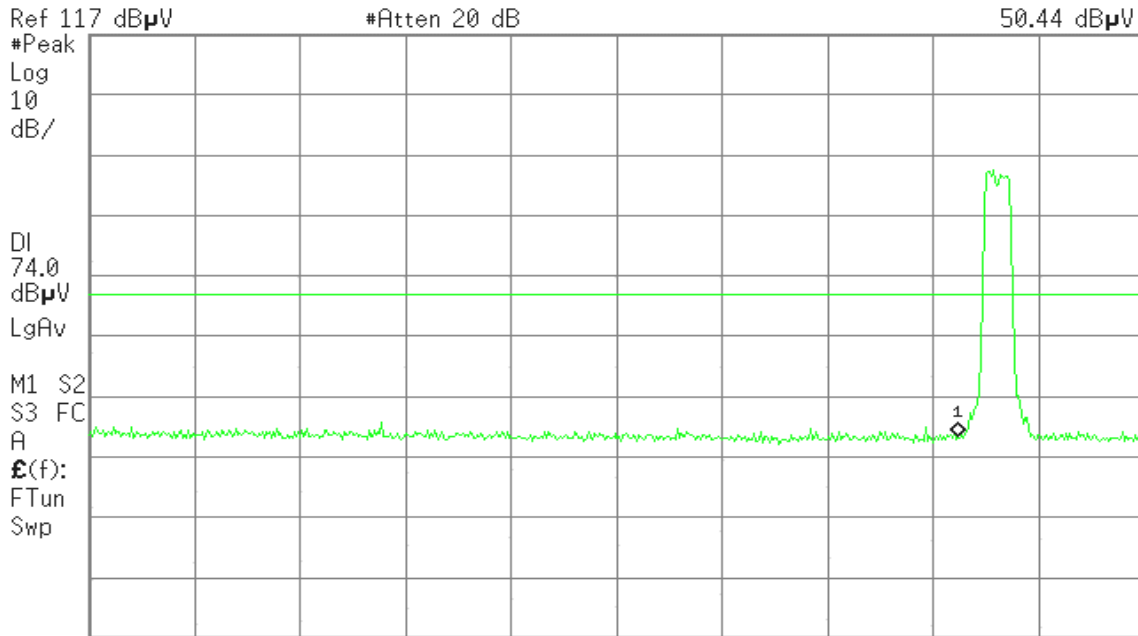

Start 4.500 0 GHz

Stop 5.290 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 21:19:43 Dec 17, 2008

R T

Mkr1 5.150 0 GHz  
38.23 dBμV

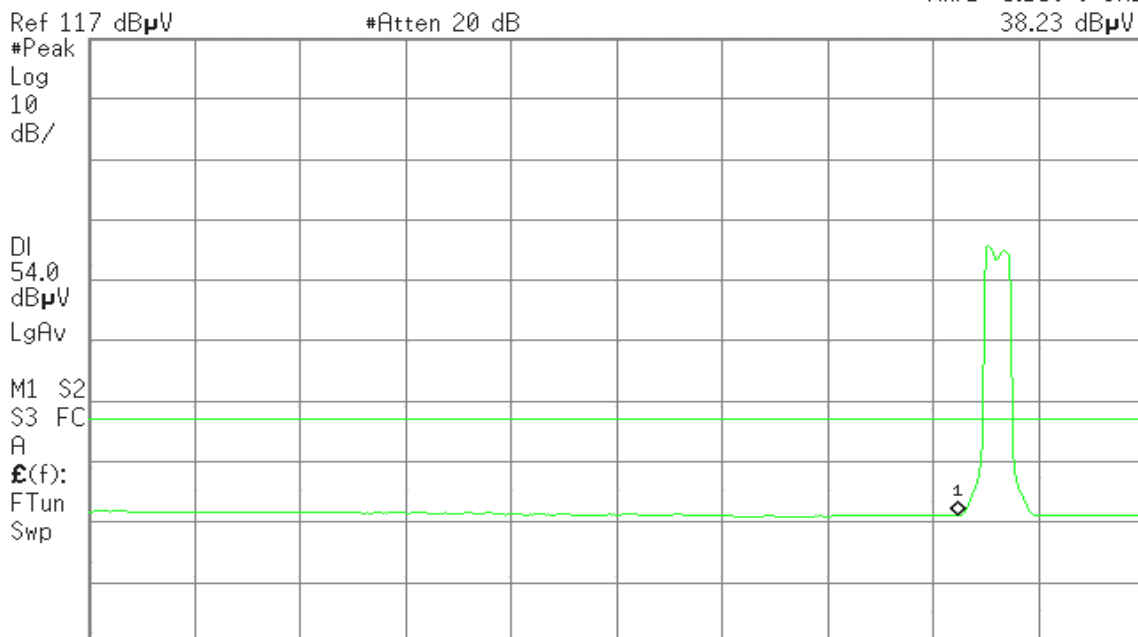

Start 4.500 0 GHz

Stop 5.290 0 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 61.6 s (601 pts)






**Detector mode: Peak**

**Polarity: Horizontal**

Agilent 21:17:11 Dec 17, 2008

R T

Mkr1 5.150 0 GHz  
50.040 dBμV

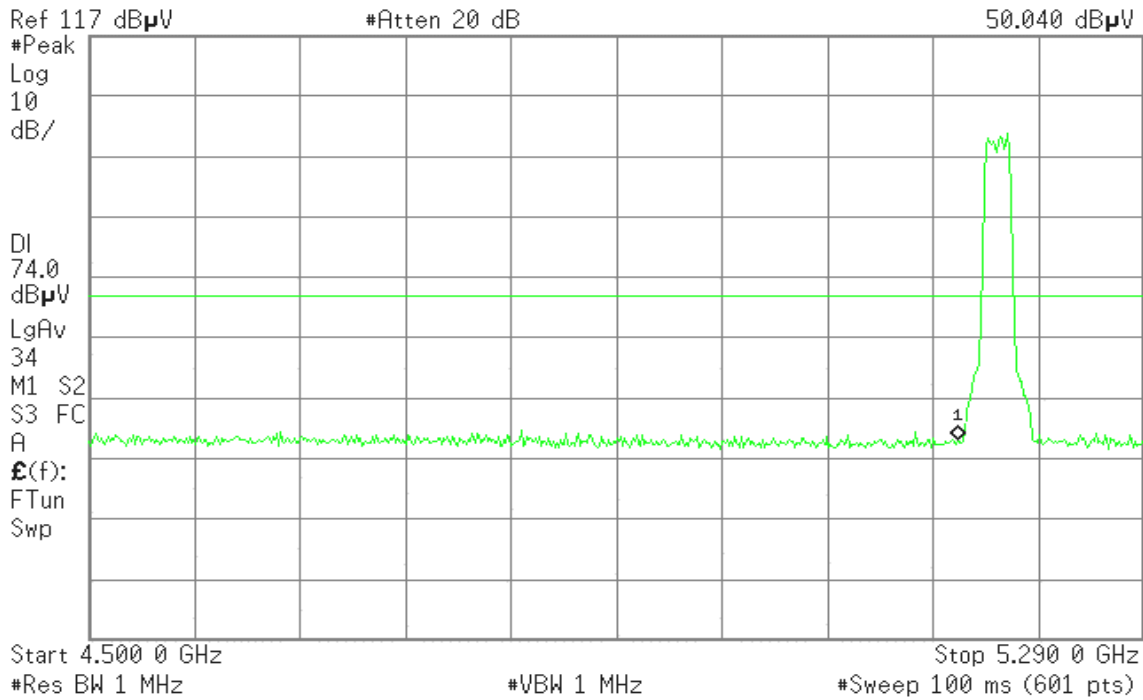


**Detector mode: Average**

**Polarity: Horizontal**

Agilent 21:16:46 Dec 17, 2008

R T

Mkr1 5.150 0 GHz  
38.506 dBμV

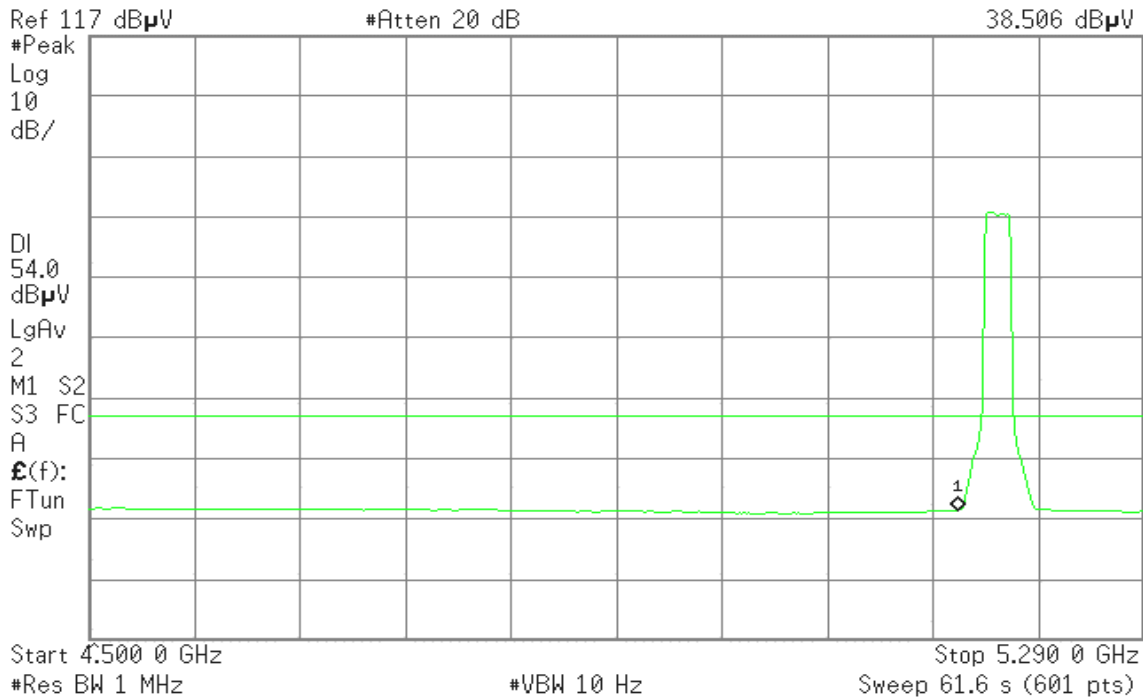



### Band Edges (draft 802.11n Standard-20 MHz / 5320 MHz)


Detector mode: Peak

Polarity: Vertical

Agilent 21:04:59 Dec 17, 2008

R T

Mkr1 5.350 0 GHz  
50.08 dBµV

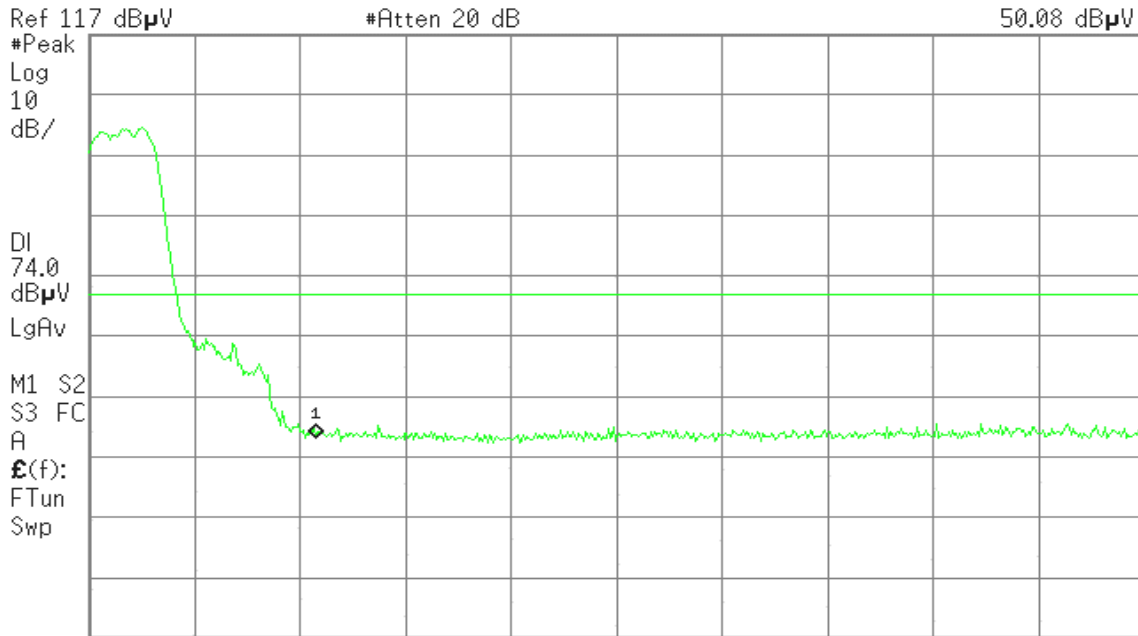

Start 5.320 0 GHz Stop 5.460 0 GHz  
#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 21:04:41 Dec 17, 2008

R T

Mkr1 5.350 0 GHz  
39.11 dBµV

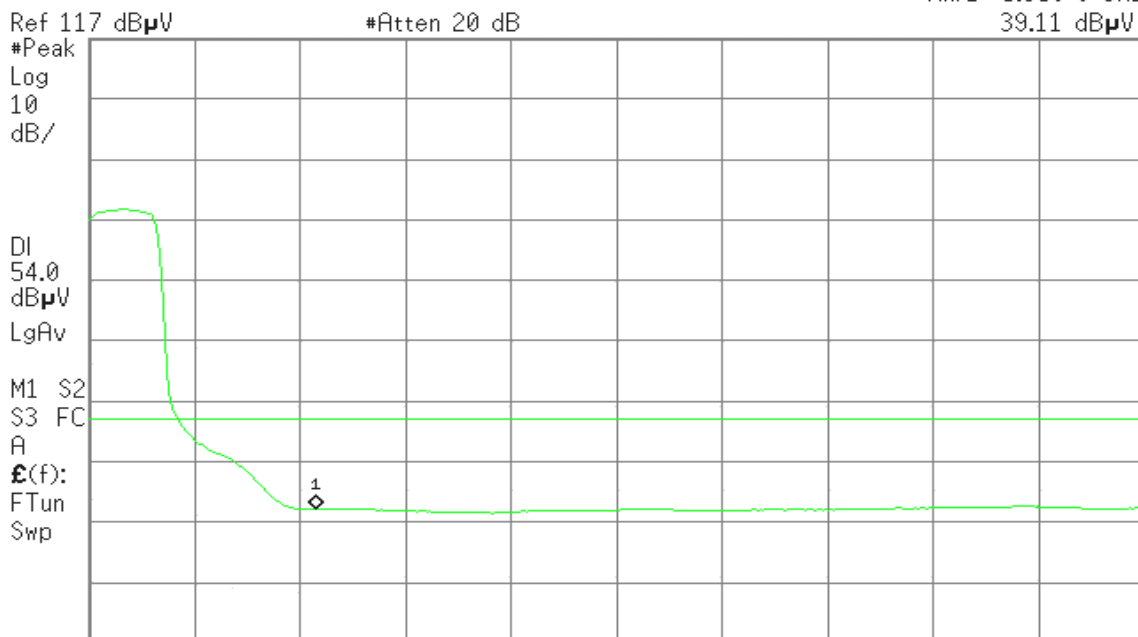

Start 5.320 0 GHz Stop 5.460 0 GHz  
#Res BW 1 MHz #VBW 10 Hz Sweep 10.92 s (601 pts)




**Detector mode: Peak**

**Polarity: Horizontal**

Agilent 21:06:05 Dec 17, 2008

R T

Mkr1 5.350 0 GHz  
51.73 dB $\mu$ V

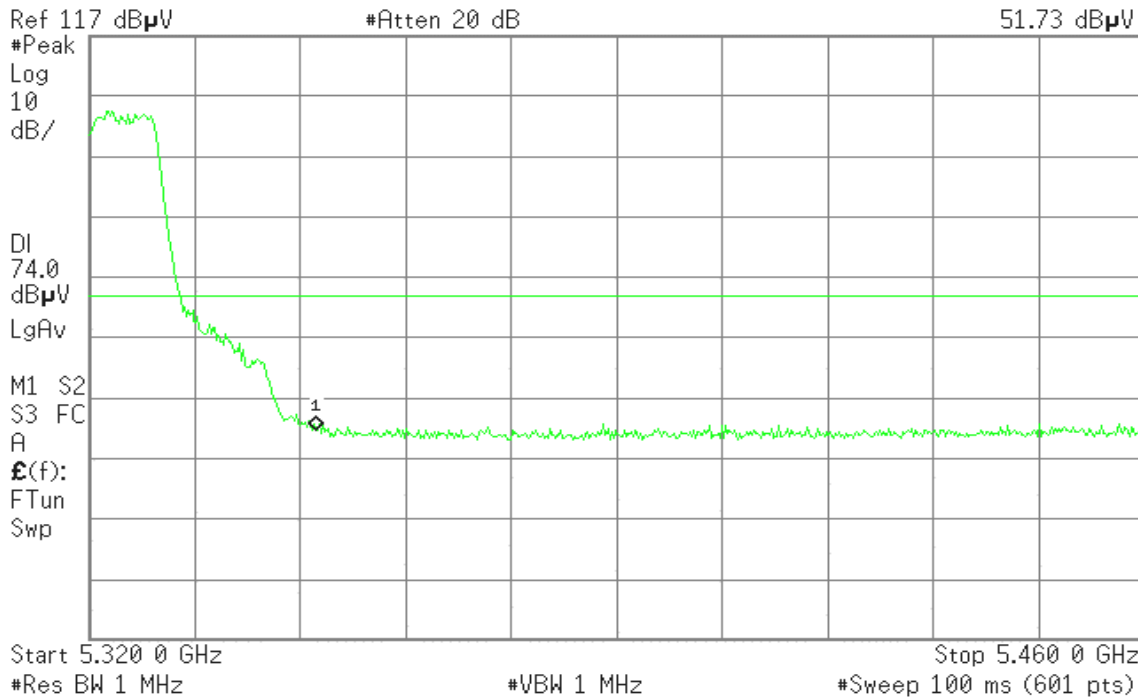


**Detector mode: Average**

**Polarity: Horizontal**

Agilent 21:06:26 Dec 17, 2008

R T

Mkr1 5.350 0 GHz  
39.47 dB $\mu$ V

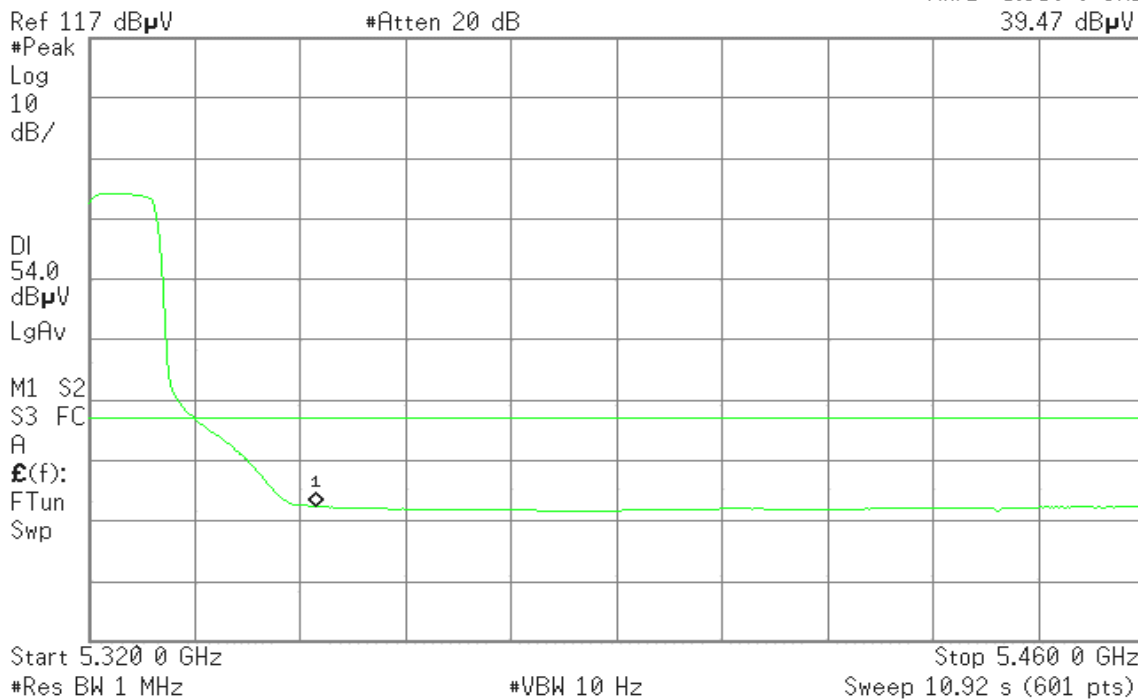




### Band Edges (draft 802.11n Wide-40 MHz / 5190 MHz)

Detector mode: Peak

Polarity: Vertical

Agilent 21:11:54 Dec 17, 2008

R T

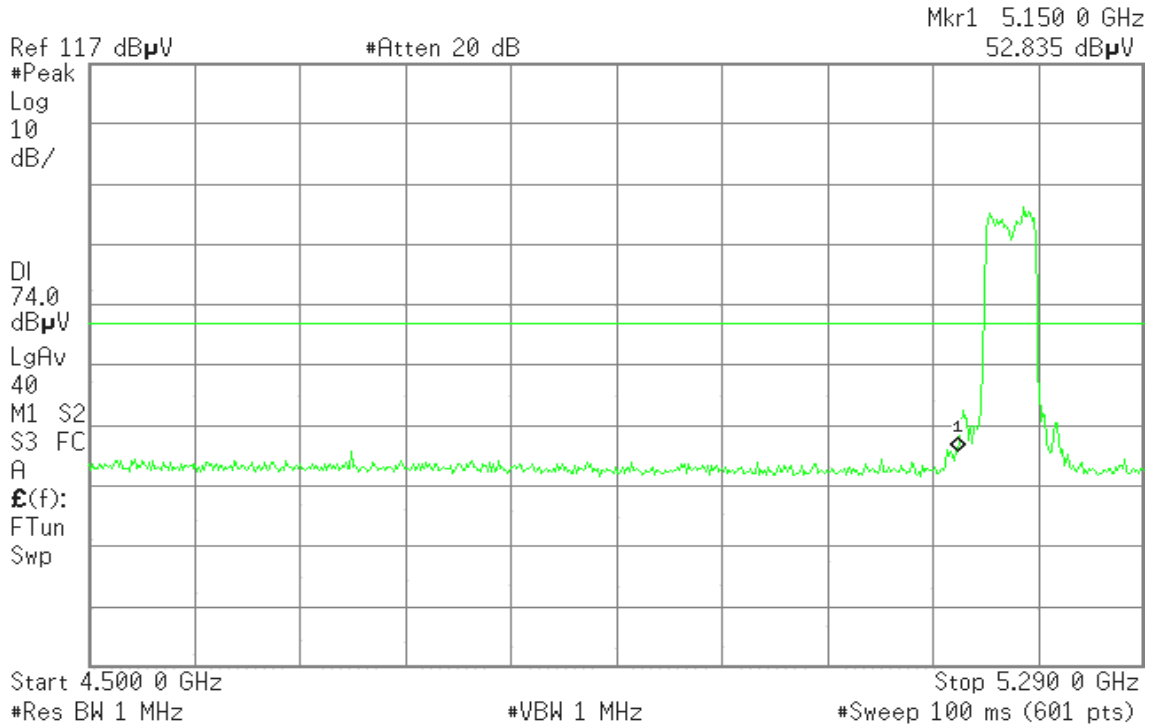


Detector mode: Average

Polarity: Vertical

Agilent 21:11:35 Dec 17, 2008

R T

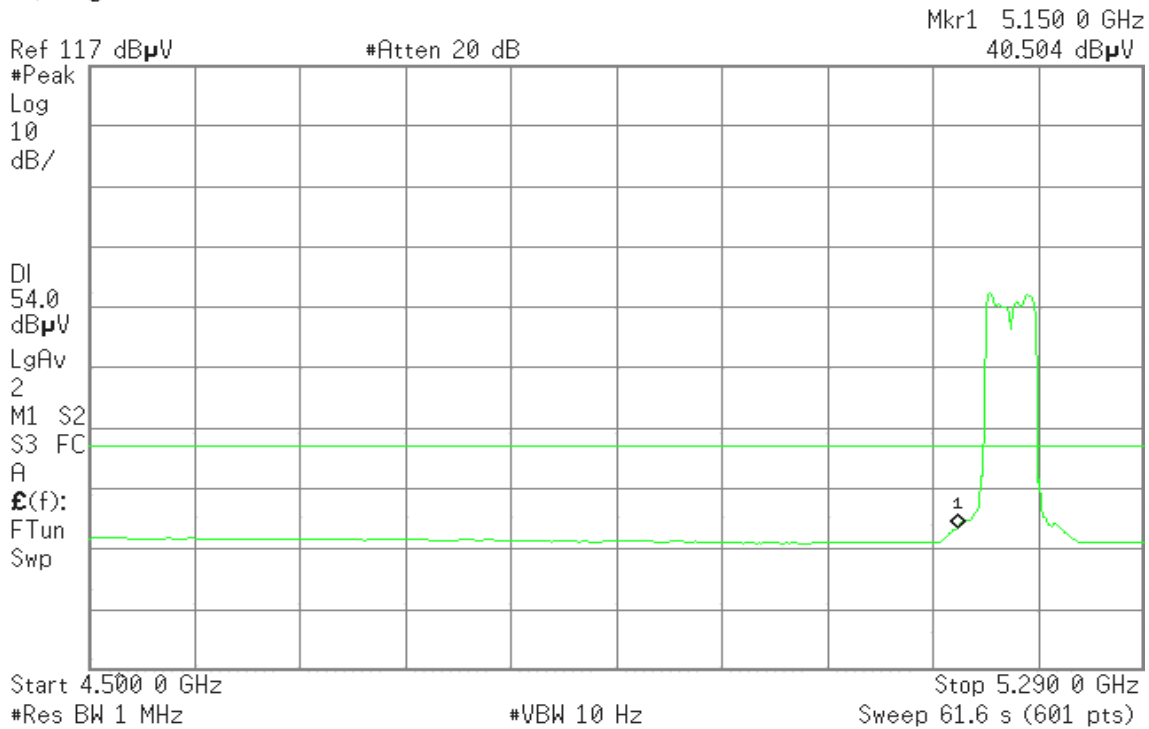




**Detector mode: Peak**

**Polarity: Horizontal**

Agilent 21:13:16 Dec 17, 2008

R T

Mkr1 5.150 0 GHz  
57.631 dBμV

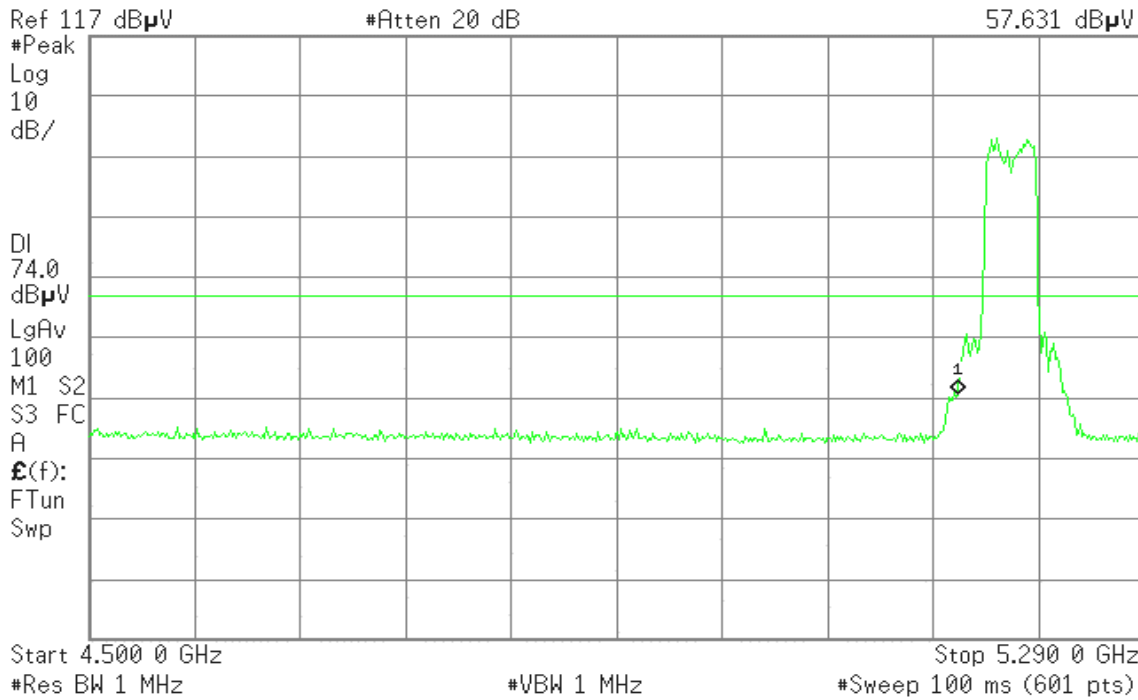


**Detector mode: Average**

**Polarity: Horizontal**

Agilent 21:14:31 Dec 17, 2008

R T

Mkr1 5.150 0 GHz  
45.181 dBμV

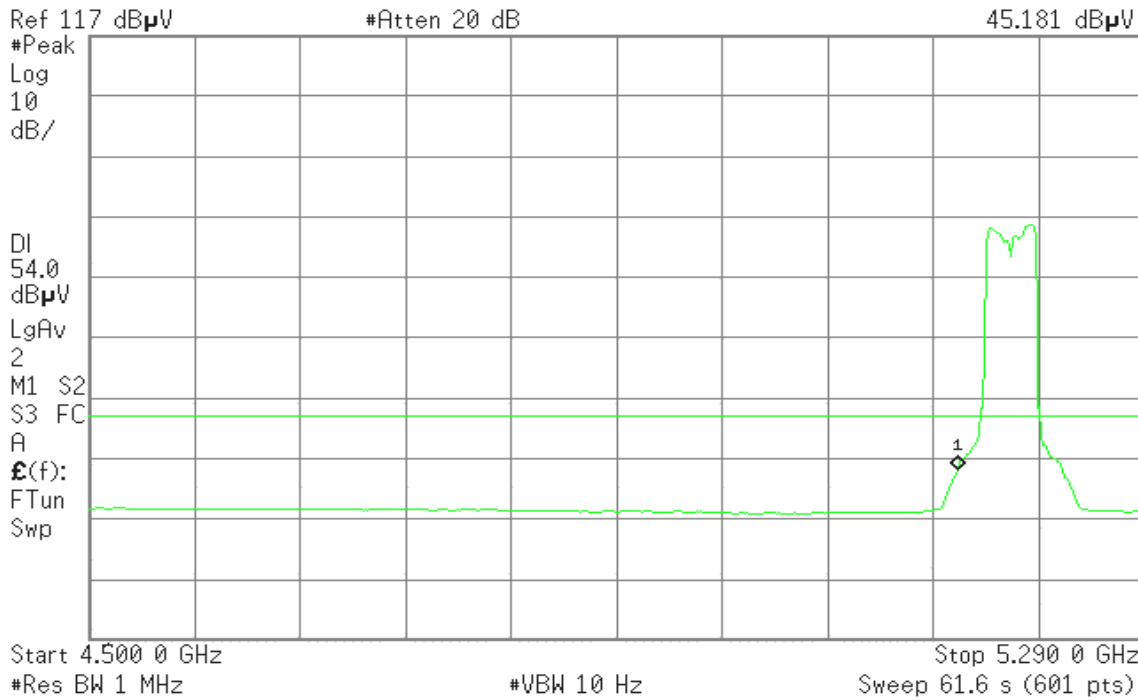



### Band Edges (draft 802.11n Wide-40 MHz / CH 5310 MHz)


Detector mode: Peak

Polarity: Vertical

Agilent 21:08:48 Dec 17, 2008

R T

Mkr1 5.350 0 GHz  
54.61 dBµV

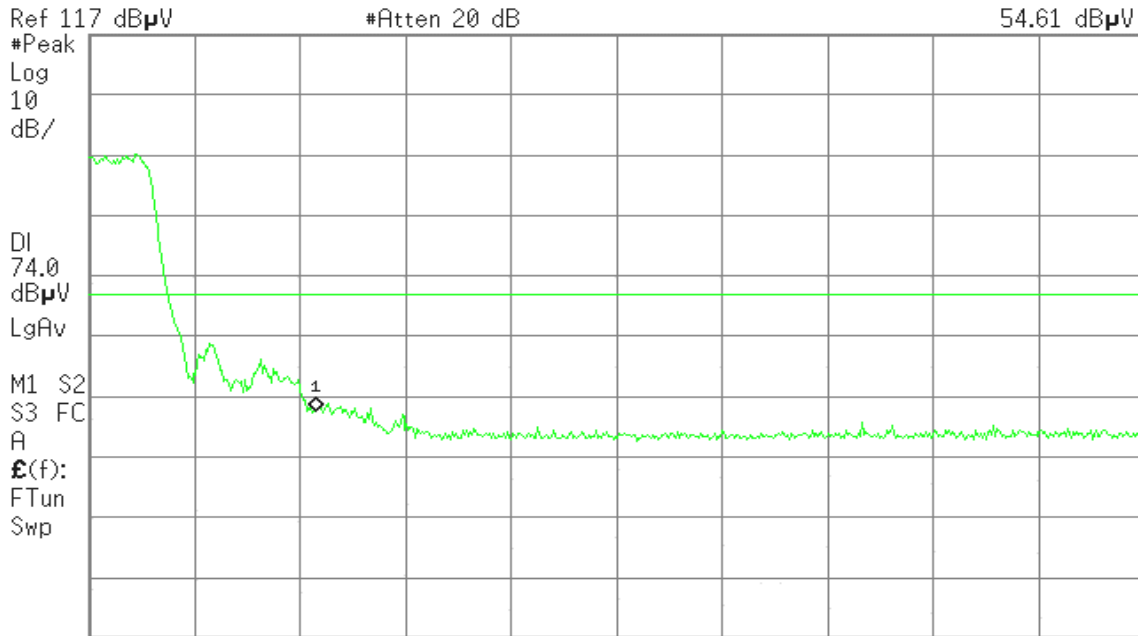

Start 5.320 0 GHz #Res BW 1 MHz #VBW 1 MHz Stop 5.460 0 GHz #Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 21:09:09 Dec 17, 2008

R T

Mkr1 5.350 0 GHz  
42.613 dBµV

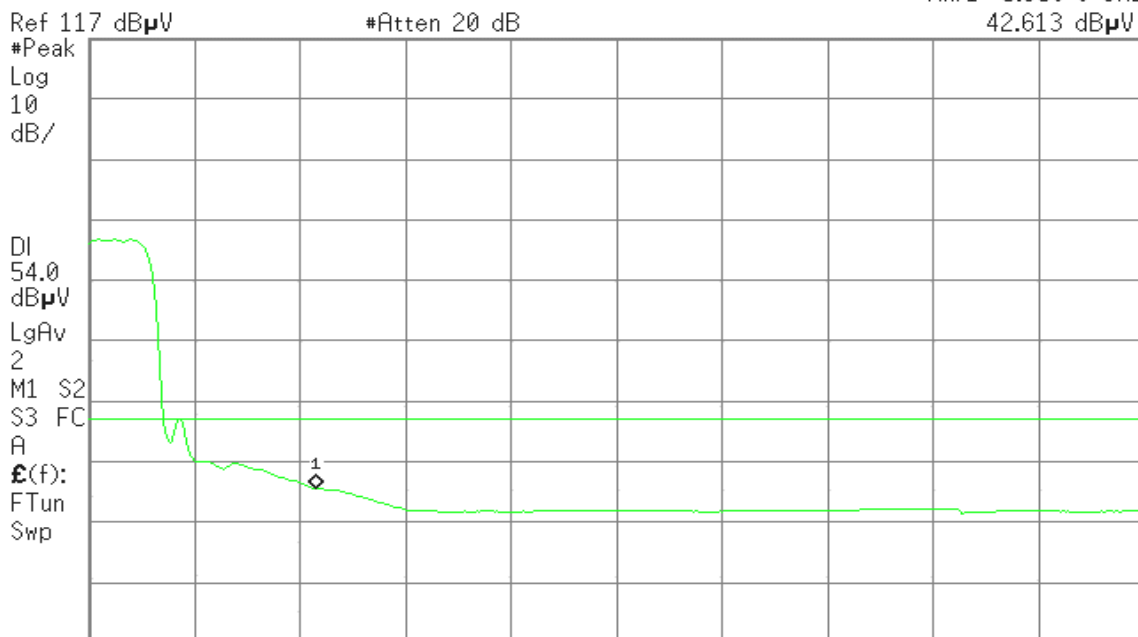

Start 5.320 0 GHz #Res BW 1 MHz #VBW 10 Hz Stop 5.460 0 GHz Sweep 10.92 s (601 pts)




**Detector mode: Peak**

**Polarity: Horizontal**

Agilent 21:07:43 Dec 17, 2008

R T

Mkr1 5.350 0 GHz  
56.71 dBµV

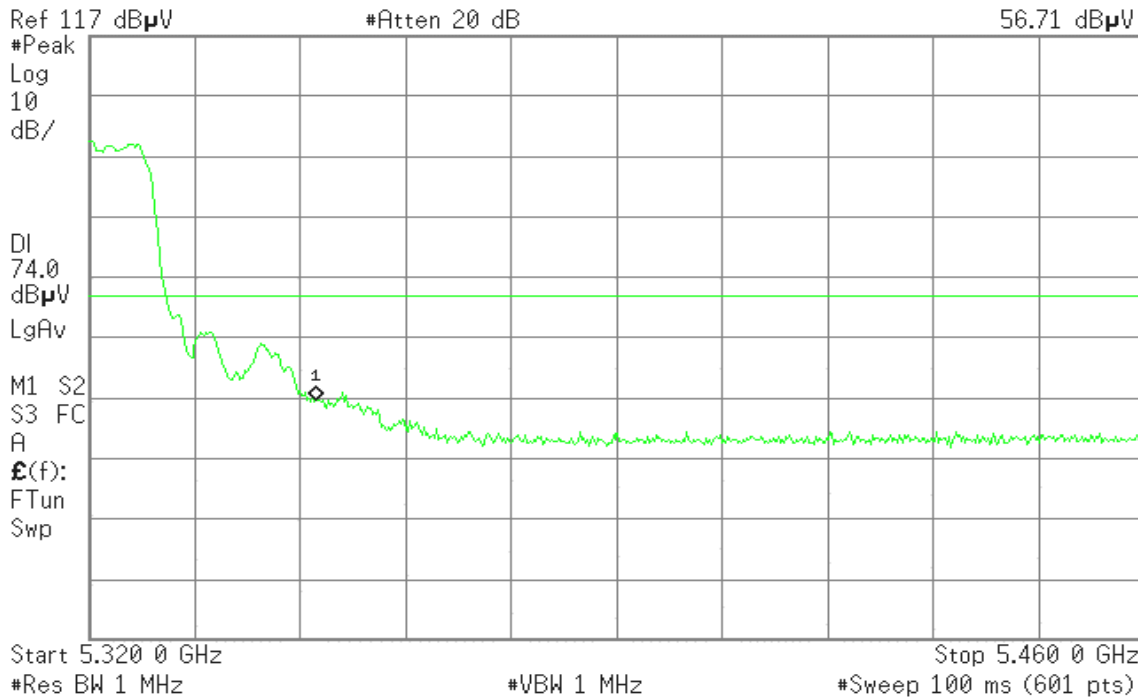


**Detector mode: Average**

**Polarity: Horizontal**

Agilent 21:07:21 Dec 17, 2008

R T

Mkr1 5.350 0 GHz  
42.99 dBµV

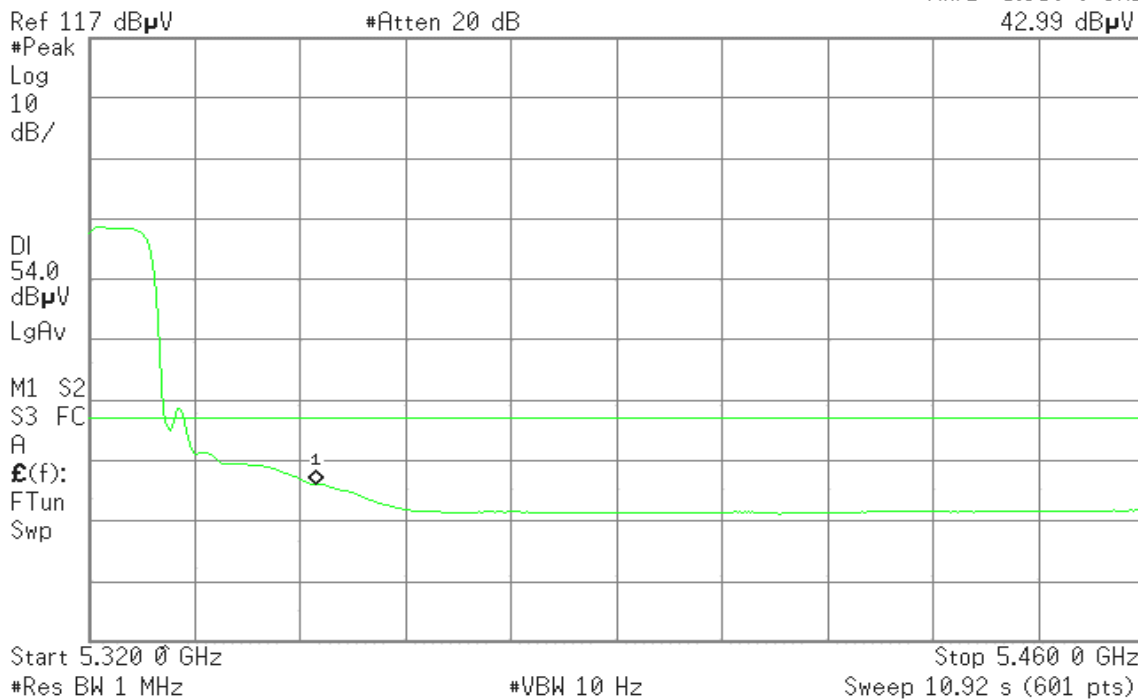

## 8.5 PEAK POWER SPECTRAL DENSITY

### LIMIT

According to §15.407(a)


- (1) For the band 5.15-5.25 GHz, the peak power spectral density shall not exceed 4dBm in any 1MHz band.
- (2) For the band 5.25-5.35 GHz, the peak power spectral density shall not exceed 11dBm in any 1MHz band.

According to RSS-210 §A9.2,

- (1) The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.
- (2) The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

*If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.*

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.  
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 1MHz, VBW = 3MHz, Span = Sweep= AUTO
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed

### TEST RESULTS

**Not Applicable.**

*Testing was performed by Aegis Labs Inc. CA, USA accredited by A2LA (Accreditation Certificate Number: 1111.01)*

**Results:** *Complied –refer to attachment 2, Aegis test report number: INTEL-080318F with FCC ID: PD94965AGN and INTEL-080318IC with IC No. 1000M-533ANH.*




## 8.6 PEAK EXCURSION

### LIMIT

According to §15.407(a)(6), the ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

### Test Configuration



### TEST PROCEDURE

The test is performed in accordance with <FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices> – Part 15, Subpart E, August 2002.

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to spectrum.
3. Trace A, Set RBW =1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
4. Delta Mark trace A Maximum frequency and trace B same frequency.
5. Repeat the above procedure until measurements for all frequencies were complete.

### TEST RESULTS

*Not Applicable.*

*Testing was performed by Aegis Labs Inc. CA, USA accredited by A2LA (Accreditation Certificate Number: 1111.01)*

**Results:** *Complied –refer to attachment 2, Aegis test report number: INTEL-080318F with FCC ID: PD94965AGN and INTEL-080318IC with IC No. 1000M-533ANH.*



## 8.7 RADIATED UNDESIRABLE EMISSION

1. According to §15.209(a) & RSS-210 §A9.3, except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

### Test Configuration

#### Below 1 GHz

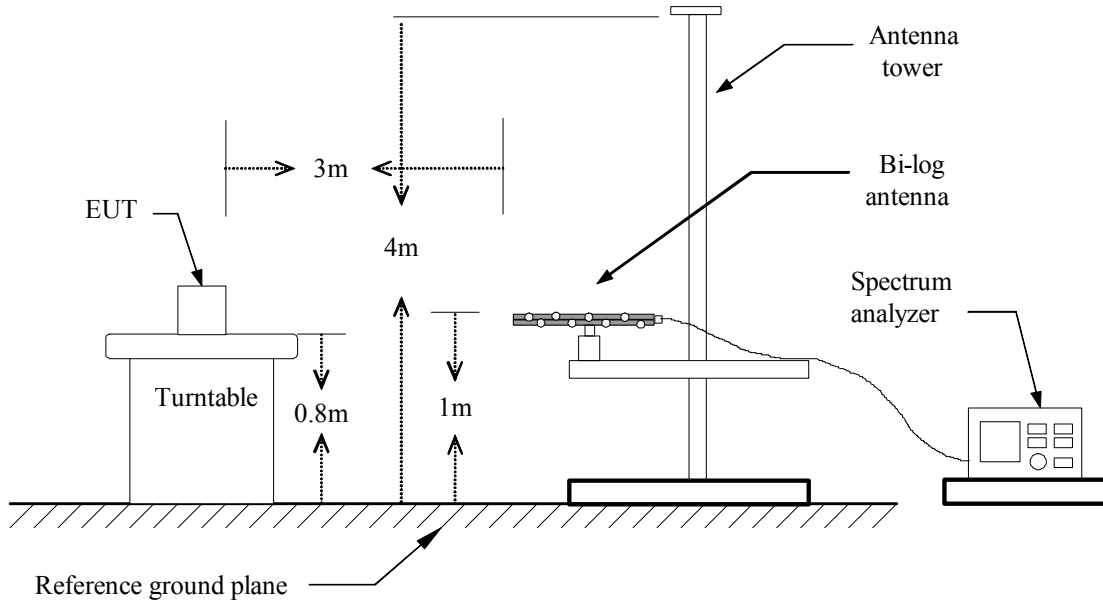

#### Above 1 GHz

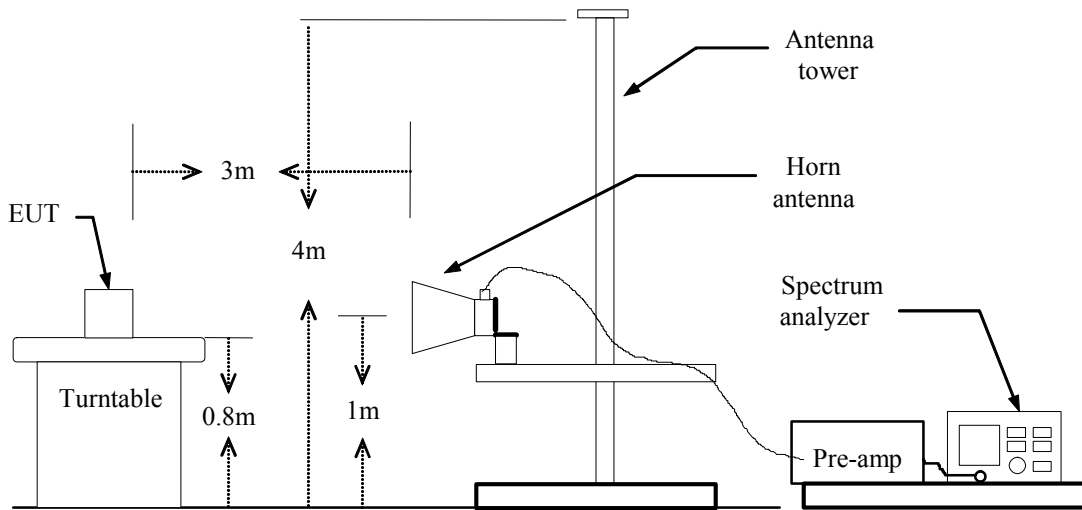



## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.

**Below 1 GHz****Operation Mode:** Normal Link**Test Date:** December 25, 2008**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
47.78	V	51.15	-12.40	38.75	40.00	-1.25	QP
89.82	V	47.01	-15.47	31.54	43.50	-11.96	Peak
185.20	V	39.81	-10.21	29.61	43.50	-13.89	Peak
296.75	V	36.49	-8.65	27.84	46.00	-18.16	Peak
684.75	V	30.07	-2.12	27.95	46.00	-18.05	Peak
728.40	V	29.12	-0.93	28.19	46.00	-17.81	Peak
88.20	H	49.30	-15.52	33.78	43.50	-9.72	Peak
105.98	H	42.93	-11.89	31.03	43.50	-12.47	Peak
120.53	H	41.43	-8.72	32.71	43.50	-10.79	Peak
186.82	H	45.61	-9.98	35.64	43.50	-7.86	Peak
311.30	H	39.57	-8.43	31.14	46.00	-14.86	Peak
684.75	H	29.78	-2.12	27.66	46.00	-18.34	Peak

**Remark:**

- 1 No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
- 3 Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
- 4 Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5 Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

**Above 1 GHz**

**Operation Mode:** Tx / IEEE 802.11a mode / 5180 ~ 5240MHz / CH Low **Test Date:** December 17, 2008  
**Temperature:** 25°C **Tested by:** Nan Tsai  
**Humidity:** 50% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
5180.00	V	103.62	94.01	0.11	103.73	94.12	Fundamental			
1996.67	V	50.74	---	-4.20	46.54	---	74.00	54.00	-7.46	Peak
6908.33	V	63.90	56.93	2.78	66.68	59.71	83.73	74.12	-14.41	20dB BC AVG Fundamental
N/A										
5180.00	H	100.00	90.63	0.11	100.11	90.74	Fundamental			
2926.67	H	48.55	---	-1.50	47.04	---	74.00	54.00	-6.96	Peak
6908.33	H	62.71	53.71	2.78	65.49	56.49	80.11	70.74	-14.25	20dB BC AVG Fundamental
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.



**Operation Mode:** Tx / IEEE 802.11a mode / 5180 ~ 5240MHz / CH Mid **Test Date:** December 17, 2008  
**Temperature:** 25°C **Tested by:** Nan Tsai  
**Humidity:** 50% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
5200.67	V	102.77	92.84	0.14	102.91	92.98	Fundamental			
1996.67	V	49.73	---	-4.20	45.52	---	74.00	54.00	-8.48	Peak
6958.33	V	63.70	55.67	2.91	66.61	58.58	82.91	72.98	-14.4	20dBC AVG Fundamental
N/A										
5200.67	H	99.13	89.09	0.14	99.27	89.23	Fundamental			
1923.33	H	49.59	---	-4.82	44.77	---	74.00	54.00	-9.23	Peak
6958.33	H	62.77	52.16	2.91	65.68	55.07	79.27	69.23	-14.16	20dBC AVG Fundamental
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

**Operation Mode:** Tx / IEEE 802.11a mode / 5180 ~ 5240MHz / CH High**Test Date:** December 17, 2008**Temperature:** 25°C**Tested by:** Nan Tsai**Humidity:** 50% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1993.33	V	49.75	---	-4.23	45.52	---	74.00	54.00	-8.48	Peak
N/A										
1996.67	H	51.20	---	-4.20	46.99	---	74.00	54.00	-7.01	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





**Operation Mode:** Tx / draft 802.11n Standard-20 MHz / 5180 ~ 5240MHz / CH Low **Test Date:** December 17, 2008  
**Temperature:** 23°C **Tested by:** Mimic Yang  
**Humidity:** 53% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
5180.33	V	96.03	85.80	0.11	96.14	85.91	Fundamental			
1993.33	V	51.38	---	-4.23	47.14	---	74.00	54.00	-6.86	Peak
6908.33	V	58.42	56.58	2.78	61.21	59.36	76.14	65.91	-6.55	20dB BC AVG Fundamental
N/A										
518.000	H	100.74	88.10	0.11	100.84	88.21	Fundamental			
1833.33	H	50.59	---	-5.57	45.02	---	74.00	54.00	-8.98	Peak
1993.33	H	49.88	---	-4.23	45.65	---	74.00	54.00	-8.35	Peak
6908.33	H	59.23	56.23	2.78	62.01	59.01	80.84	68.21	-9.2	20dB BC AVG Fundamental
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.



**Operation Mode:** Tx / draft 802.11n Standard-20 MHz / 5180 ~ 5240MHz / CH Mid **Test Date:** December 17, 2008  
**Temperature:** 23°C **Tested by:** Nan Tsai  
**Humidity:** 50% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1993.33	V	49.94	---	-4.23	45.71	---	74.00	54.00	-8.29	Peak
N/A										
5200.67	H	99.53	88.23	0.14	99.67	88.37	Fundamental			
1483.33	H	50.79	---	-8.40	42.40	---	74.00	54.00	-11.60	Peak
2000.00	H	50.55	---	-4.18	46.38	---	74.00	54.00	-7.62	Peak
2440.00	H	48.40	---	-2.82	45.58	---	74.00	54.00	-8.42	Peak
6958.33	H	56.31	51.75	2.91	59.22	54.66	79.67	68.37	-13.71	20dBc AVG Fundamental
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

**Operation Mode:** Tx / draft 802.11n Standard-20 MHz / 5180 ~ 5240MHz / CH High**Test Date:** December 17, 2008**Temperature:** 23°C**Tested by:** Nan Tsai**Humidity:** 50% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1913.33	V	49.57	---	-4.90	44.67	---	74.00	54.00	-9.33	Peak
2113.33	V	49.54	---	-3.83	45.72	---	74.00	54.00	-8.28	Peak
N/A										
1156.67	H	51.15	---	-9.17	41.98	---	74.00	54.00	-12.02	Peak
1993.33	H	50.77	---	-4.23	46.53	---	74.00	54.00	-7.47	Peak
2323.33	H	50.23	---	-3.18	47.06	---	74.00	54.00	-6.94	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** Tx / draft 802.11n Wide-40 MHz / 5190 ~ 5230MHz / CH Low**Test Date:** December 17, 2008**Temperature:** 23°C**Tested by:** Nan Tsai**Humidity:** 50% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1303.33	V	50.36	---	-8.82	41.53	---	74.00	54.00	-12.47	Peak
2000.00	V	49.94	---	-4.18	45.76	---	74.00	54.00	-8.24	Peak
N/A										
1486.67	H	52.63	---	-8.39	44.24	---	74.00	54.00	-9.76	Peak
2100.00	H	49.88	---	-3.87	46.01	---	74.00	54.00	-7.99	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** Tx / draft 802.11n Wide-40 MHz / 5190 ~ 5230MHz / CH High**Test Date:** December 17, 2008**Temperature:** 23°C**Tested by:** Nan Tsai**Humidity:** 50% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1990.00	V	50.35	---	-4.26	46.09	---	74.00	54.00	-7.91	Peak
N/A										
1486.67	H	50.91	---	-8.39	42.52	---	74.00	54.00	-11.48	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** Tx / IEEE 802.11a mode / 5260 ~ 5320MHz / CH Low      **Test Date:** December 17, 2008  
**Temperature:** 25°C      **Tested by:** Nan Tsai  
**Humidity:** 50% RH      **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2093.33	V	49.60	---	-3.89	45.72	---	74.00	54.00	-8.28	Peak
N/A										
1996.67	H	50.29	---	-4.20	46.09	---	74.00	54.00	-7.91	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** Tx / IEEE 802.11a mode / 5260 ~ 5320MHz / CH Mid **Test Date:** December 17, 2008  
**Temperature:** 25°C **Tested by:** Nan Tsai  
**Humidity:** 50% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1223.33	V	50.52	---	-9.01	41.51	---	74.00	54.00	-12.49	Peak
1996.67	V	50.46	---	-4.20	46.25	---	74.00	54.00	-7.75	Peak
N/A										
1223.33	H	51.22	---	-9.01	42.21	---	74.00	54.00	-11.79	Peak
2000.00	H	49.96	---	-4.18	45.78	---	74.00	54.00	-8.22	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** Tx / IEEE 802.11a mode / 5260 ~ 5320MHz /  
CH High

**Test Date:** December 17, 2008

**Temperature:** 25°C

**Tested by:** Nan Tsai

**Humidity:** 50% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1996.67	V	51.25	---	-4.20	47.05	---	74.00	54.00	-6.95	Peak
N/A										
2000.00	H	50.81	---	-4.18	46.63	---	74.00	54.00	-7.37	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





**Operation Mode:** Tx / draft 802.11n Standard-20 MHz / 5260 ~ 5320MHz / CH Low **Test Date:** December 17, 2008  
**Temperature:** 25°C **Tested by:** Nan Tsai  
**Humidity:** 50% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2000.00	V	50.92	---	-4.18	46.74	---	74.00	54.00	-7.26	Peak
N/A										
1996.67	H	50.44	---	-4.20	46.24	---	74.00	54.00	-7.76	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** Tx / draft 802.11n Standard-20 MHz / 5260 ~ 5320MHz / CH Mid      **Test Date:** December 17, 2008  
**Temperature:** 25°C      **Tested by:** Nan Tsai  
**Humidity:** 50% RH      **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2096.67	V	49.32	---	-3.88	45.44	---	74.00	54.00	-8.56	Peak
N/A										
1486.67	H	50.77	---	-8.39	42.38	---	74.00	54.00	-11.62	Peak
1993.33	H	50.52	---	-4.23	46.29	---	74.00	54.00	-7.71	Peak
3858.33	H	62.15	47.87	0.46	62.61	48.33	74.00	54.00	-5.67	AVG
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** Tx / draft 802.11n Standard-20 MHz / 5260 ~ 5320MHz / CH High**Test Date:** December 17, 2008**Temperature:** 25°C**Tested by:** Nan Tsai**Humidity:** 50% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1996.67	V	50.01	---	-4.20	45.80	---	74.00	54.00	-8.20	Peak
2306.67	V	49.98	---	-3.23	46.75	---	74.00	54.00	-7.25	Peak
N/A										
2076.67	H	49.42	---	-3.94	45.48	---	74.00	54.00	-8.52	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** Tx / draft 802.11n Wide-40 MHz / 5270 ~ 5310MHz / CH Low**Test Date:** December 17, 2008**Temperature:** 25°C**Tested by:** Nan Tsai**Humidity:** 50% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1533.33	V	50.91	---	-8.08	42.83	---	74.00	54.00	-11.17	Peak
2330.00	V	50.00	---	-3.16	46.84	---	74.00	54.00	-7.16	Peak
N/A										
1846.67	H	50.47	---	-5.46	45.01	---	74.00	54.00	-8.99	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** Tx / draft 802.11n Wide-40 MHz / 5270 ~ 5310MHz / CH High**Test Date:** December 17, 2008**Temperature:** 25°C**Tested by:** Nan Tsai**Humidity:** 50% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2336.67	V	50.17	---	-3.14	47.03	---	74.00	54.00	-6.97	Peak
N/A										
2000.00	H	50.81	---	-4.18	46.63	---	74.00	54.00	-7.37	Peak
2353.33	H	51.23	---	-3.08	48.14	---	74.00	54.00	-5.86	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** Tx / IEEE 802.11a mode / 5500 ~ 5700MHz / CH Low **Test Date:** December 18, 2008  
**Temperature:** 25°C **Tested by:** Nan Tsai  
**Humidity:** 50% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1290.00	V	50.81	---	-8.86	41.96	---	74.00	54.00	-12.04	Peak
1996.67	V	51.46	---	-4.20	47.25	---	74.00	54.00	-6.75	Peak
2566.67	V	50.57	---	-2.45	48.11	---	74.00	54.00	-5.89	Peak
4191.67	V	51.48	37.56	0.89	52.37	38.45	74.00	54.00	-15.55	AVG
N/A										
2103.33	H	49.70	---	-3.86	45.84	---	74.00	54.00	-8.16	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** Tx / IEEE 802.11a mode / 5500 ~ 5700MHz /CH Mid **Test Date:** December 18, 2008  
**Temperature:** 25°C **Tested by:** Nan Tsai  
**Humidity:** 50% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1993.33	V	50.46	---	-4.23	46.23	---	74.00	54.00	-7.77	Peak
N/A										
1486.67	H	51.46	---	-8.39	43.06	---	74.00	54.00	-10.94	Peak
2616.67	H	49.74	---	-2.32	47.42	---	74.00	54.00	-6.58	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** Tx / IEEE 802.11a mode / 5500 ~ 5700MHz / CH High **Test Date:** December 18, 2008  
**Temperature:** 25°C **Tested by:** Nan Tsai  
**Humidity:** 50% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1996.67	V	51.59	---	-4.20	47.39	---	74.00	54.00	-6.61	Peak
N/A										
2000.00	H	51.12	---	-4.18	46.94	---	74.00	54.00	-7.06	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





**Operation Mode:** Tx / draft 802.11n Standard-20 MHz / 5500 ~ 5700MHz / CH Low **Test Date:** December 17, 2008  
**Temperature:** 25°C **Tested by:** Nan Tsai  
**Humidity:** 50% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1466.67	V	50.65	---	-8.44	42.21	---	74.00	54.00	-11.79	Peak
2000.00	V	51.20	---	-4.18	47.03	---	74.00	54.00	-6.97	Peak
2260.00	V	50.18	---	-3.37	46.81	---	74.00	54.00	-7.19	Peak
N/A										
1483.33	H	50.43	---	-8.40	42.03	---	74.00	54.00	-11.97	Peak
2146.67	H	48.98	---	-3.72	45.25	---	74.00	54.00	-8.75	Peak
N/A										

**Remark:**

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*



**Operation Mode:** Tx / draft 802.11n Standard-20 MHz / 5500 ~ 5700MHz / CH Mid **Test Date:** December 17, 2008  
**Temperature:** 25°C **Tested by:** Nan Tsai  
**Humidity:** 50% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2563.33	V	49.67	---	-2.46	47.21	---	74.00	54.00	-6.79	Peak
N/A										
1993.33	H	51.16	---	-4.23	46.92	---	74.00	54.00	-7.08	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** Tx / draft 802.11n Standard-20 MHz / 5500 ~ 5700MHz / CH High      **Test Date:** December 18, 2008  
**Temperature:** 25°C      **Tested by:** Nan Tsai  
**Humidity:** 50% RH      **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1103.33	V	51.23	---	-9.30	41.93	---	74.00	54.00	-12.07	Peak
1853.33	V	50.34	---	-5.40	44.94	---	74.00	54.00	-9.06	Peak
1993.33	V	50.56	---	-4.23	46.33	---	74.00	54.00	-7.67	Peak
N/A										
2356.67	H	49.89	---	-3.07	46.82	---	74.00	54.00	-7.18	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** Tx / draft 802.11n Wide-40 MHz / 5510 ~ 5670MHz / CH Low**Test Date:** December 17, 2008**Temperature:** 25°C**Tested by:** Nan Tsai**Humidity:** 50% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1993.33	V	51.42	---	-4.23	47.19	---	74.00	54.00	-6.81	Peak
2340.00	V	50.34	---	-3.13	47.21	---	74.00	54.00	-6.79	Peak
N/A										
1993.33	H	52.29	---	-4.23	48.05	---	74.00	54.00	-5.95	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** Tx / draft 802.11n Wide-40 MHz / 5510 ~ 5670MHz / CH Mid**Test Date:** December 17, 2008**Temperature:** 25°C**Tested by:** Nan Tsai**Humidity:** 50% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1136.67	V	51.43	---	-9.22	42.22	---	74.00	54.00	-11.78	Peak
1996.67	V	50.25	---	-4.20	46.04	---	74.00	54.00	-7.96	Peak
N/A										
1110.00	H	50.80	---	-9.28	41.52	---	74.00	54.00	-12.48	Peak
1990.00	H	49.80	---	-4.26	45.54	---	74.00	54.00	-8.46	Peak
2333.33	H	50.12	---	-3.15	46.97	---	74.00	54.00	-7.03	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** Tx / draft 802.11n Wide-40 MHz / 5510 ~ 5670MHz / CH High**Test Date:** December 17, 2008**Temperature:** 25°C**Tested by:** Nan Tsai**Humidity:** 50% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1996.67	V	52.23	---	-4.20	48.02	---	74.00	54.00	-5.98	Peak
N/A										
1996.67	H	51.75	---	-4.20	47.55	---	74.00	54.00	-6.45	Peak
2373.33	H	50.39	---	-3.02	47.36	---	74.00	54.00	-6.64	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** Rx / draft 802.11a mode**Test Date:** December 18, 2008**Temperature:** 25°C**Tested by:** Nan Tsai**Humidity:** 50% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2621.67	V	49.63	---	-2.31	47.33	---	74.00	54.00	-6.67	Peak
4756.67	V	49.35	---	0.50	49.85	---	74.00	54.00	-4.15	Peak
N/A										
3741.67	H	48.20	---	0.18	48.39	---	74.00	54.00	-5.61	Peak
4838.33	H	49.63	---	0.32	49.95	---	74.00	54.00	-4.05	Peak
6285.00	H	49.28	---	1.50	50.78	---	74.00	54.00	-3.22	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

## 8.8 CONDUCTED UNDESIRABLE EMISSION


### LIMIT

According to 15.407(b) & RSS-210 §A9.3,

- (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.

The provisions of §15.205 apply to intentional radiators operating under this section.

### Test Configuration

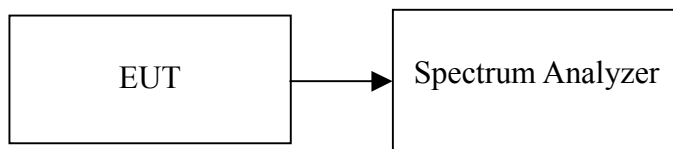

### TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to the average EIRP limit, adjusted for the maximum antenna gain. If necessary, additional average detection measurements are made.

Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.

### TEST RESULTS

*Not Applicable.*

*Testing was performed by Aegis Labs Inc. CA, USA accredited by A2LA (Accreditation Certificate Number: 1111.01)*

**Results:** *Complied—refer to attachment 2, Aegis test report number: INTEL-080318F with FCC ID: PD94965AGN and INTEL-080318IC with IC No. 1000M-533ANH.*





## 8.9 POWERLINE CONDUCTED EMISSIONS

### LIMIT

According to §15.207(a) & RSS-Gen §7.2.2, except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

### Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



## TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

### Test Data

**Operation Mode:** Normal Link                      **Test Date:** January 6, 2009  
**Temperature:** 22°C                                      **Tested by:** Eddy Cheng  
**Humidity:** 45% RH

Frequency (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB)	QP Result (dBuV)	AV Result (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.2000	49.04	39.64	0.16	49.20	39.80	63.61	53.61	-14.41	-13.81	L1
0.2700	39.67	31.97	0.13	39.80	32.10	61.12	51.12	-21.32	-19.02	L1
3.6650	29.36	24.96	0.14	29.50	25.10	56.00	46.00	-26.50	-20.90	L1
5.1600	31.36	22.46	0.24	31.60	22.70	60.00	50.00	-28.40	-27.30	L1
15.1500	22.16	18.16	0.64	22.80	18.80	60.00	50.00	-37.20	-31.20	L1
29.9950	35.70	34.20	1.00	36.70	35.20	60.00	50.00	-23.30	-14.80	L1
0.2050	50.25	42.55	0.15	50.40	42.70	63.41	53.41	-13.01	-10.71	L2
0.5400	37.67	36.17	0.03	37.70	36.20	56.00	46.00	-18.30	-9.80	L2
2.3100	47.85	43.35	0.05	47.90	43.40	56.00	46.00	-8.10	-2.60	L2
4.4150	37.00	30.70	0.20	37.20	30.90	56.00	46.00	-18.80	-15.10	L2
6.1800	44.48	37.48	0.32	44.80	37.80	60.00	50.00	-15.20	-12.20	L2
15.4200	33.13	27.13	0.67	33.80	27.80	60.00	50.00	-26.20	-22.20	L2


### **Remark:**

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)




### Test Plots

#### Conducted emissions (Line 1)

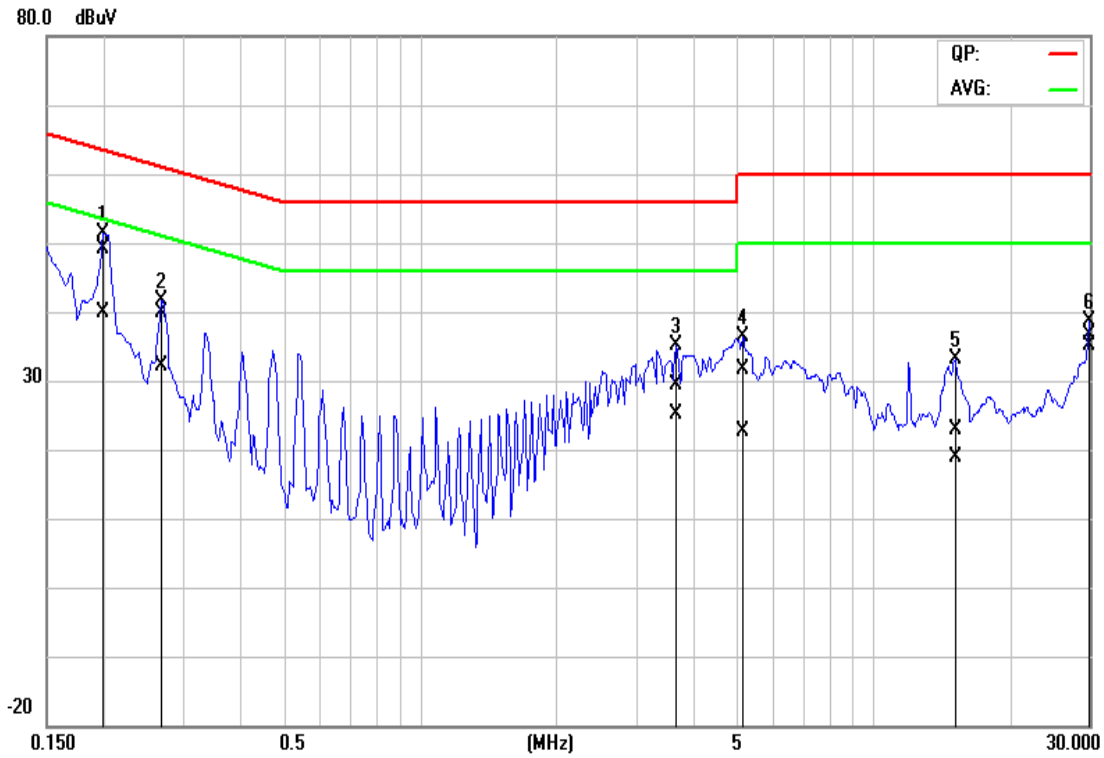

#### Conducted emissions (Line 2)

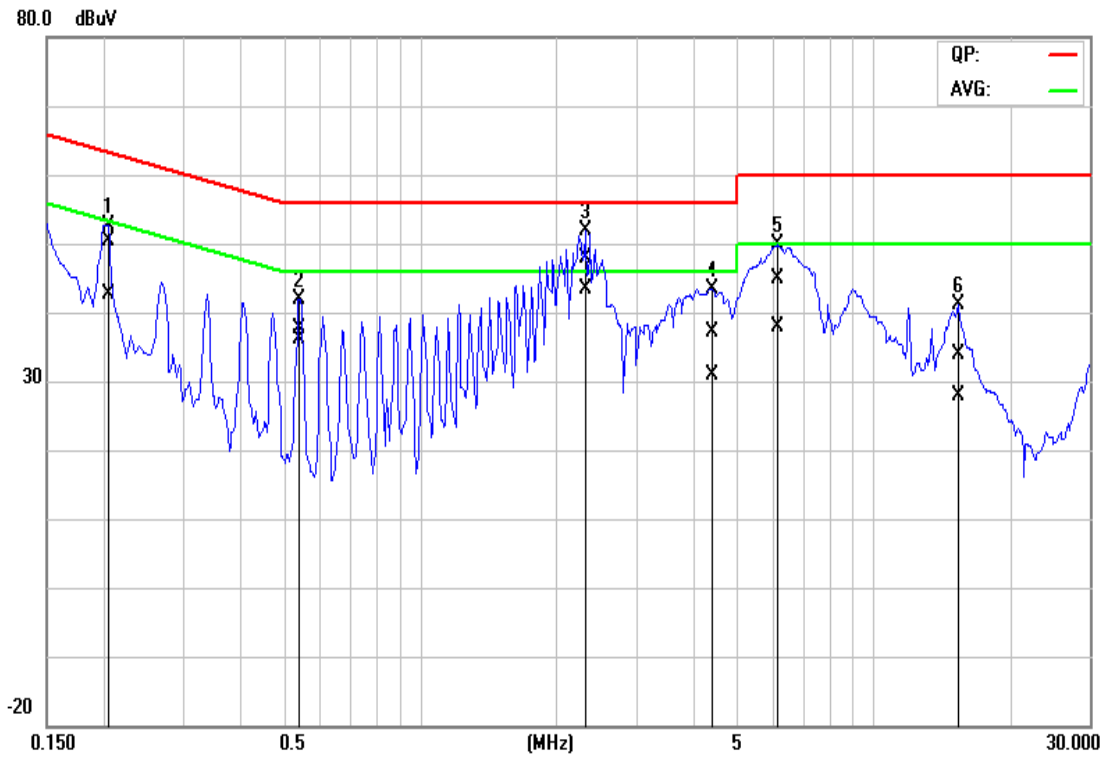



## 8.10 TRANSMISSION IN ABSENCE OF DATA

*Data Transmission is always initiated by software, which is then passed down through the MAC, through the digital and analog baseband, finally to the RF chip. Several special packets (ACKs, CTS, PSpoll, etc) are initiated by the MAC. These are the only ways the digital baseband portion will turn on the RF transmitter, which then turns off at the end of the packet. Therefore, the transmitter will be ON only while one of the four mentioned packets is being transmitted.*

## 8.11 FREQUENCY STABILITY

### LIMIT

According to §15.407(g) & RSS-210 §A9.5(5), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the operational description.

### TEST RESULTS

*Testing was performed by Aegis Labs Inc. CA, USA accredited by A2LA (Accreditation Certificate Number: 1111.01)*

**Results:** *Complied –refer to attachment 2, Aegis test report number: INTEL-080318F with FCC ID: PD94965AGN and IC No. 1000M-533ANH.*

*Please refer to the operational description for further details.*

**Remark:** *An examination of the band-edge plots shows that the emission will stay within the authorized band over the entire temperature range.*



## 8.12 DYNAMIC FREQUENCY SELECTION

### LIMIT

According to §15.407 (h) and FCC 06-96 appendix “compliance measurement procedures for unlicensed-national information infrastructure devices operating in the 5250-5350 MHz and 5470-5725 MHz bands incorporating dynamic frequency selection”.

*Remark: IC RSS-210 §A9.5 is closely harmonized with FCC Part 15 DFS rules.*

**Table 1: Applicability of DFS requirements prior to use of a channel**

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client(with radar detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
Uniform Spreading	Yes	Not required	Not required

**Table 2: Applicability of DFS requirements during normal operation**

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client(with radar detection)
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes

**Table 3: Interference Threshold values, Master or Client incorporating In-Service**

Maximum Transmit Power	Value (see note)
≥200 Milliwatt	-64 dBm
< 200 Milliwatt	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.



**Table 4: DFS Response requirement values**

Parameter	Value
Non-occupancy period	30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds
Channel Closing Transmission Time	200 milliseconds + approx. 60 milliseconds over remaining 10 second period

The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar burst generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate channel changes (an aggregate of approximately 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

**Table 5 – Short Pulse Radar Test Waveforms**

Radar Type	Pulse Width (Microseconds)	PRI (Microseconds)	Pulses	Minimum Percentage of Successful Detection	Minimum Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

**Table 6 – Long Pulse Radar Test Signal**

Radar Waveform	Bursts	Pulses per Burst	Pulse Width (µsec)	Chirp Width (µsec)	PRI (µsec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80%	30

**Table 7 – Frequency Hopping Radar Test Signal**

Radar Waveform	Pulse Width (µsec)	PRI (µsec)	Burst Length (ms)	Pulses Per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	0.33	70%	30



## **DESCRIPTION OF EUT**

### **Overview Of EUT With Respect To §15.407 (H) Requirements**

The firmware installed in the EUT during testing was:

Firmware Rev: 12.0.0.55

The EUT operates over the 5250-5350 MHz range as a Client Device that does not have radar detection capability.

The antenna assembly utilized with the EUT has a gain of  $-1.16$  dBi.

The highest power level is 20.93 dBm EIRP in the 5260 ~ 5320MHz band.

The EUT uses one transmitter connected to two 50-ohm coaxial antenna ports via a diversity switch. Only one antenna port is connected to the test system since the EUT has one antenna only.

The Slave device associated with the EUT during these tests does not have radar detection capability.

WLAN traffic is generated by streaming the video file TestFile.mp2 “6 ½ Magic Hours” from the Master to the Slave in full motion video mode using the media player with the V2.61 Codec package.

TPC is not required since the maximum EIRP is less than 500 mW (27 dBm).

The EUT utilizes the 802.11a architecture, with a nominal channel bandwidth of 20 MHz.

The Master Device is a Cisco Aironet 802.11a/b/g Access Point, FCC ID: LDK102056.

The rated output power of the Master unit is  $< 23$ dBm (EIRP). Therefore the required interference threshold level is  $-62$  dBm. After correction for antenna gain and procedural adjustments, the required conducted threshold at the antenna port is  $-62 + -1.16 = -63.16$  dBm.

The calibrated conducted DFS Detection Threshold level is set to  $-63.16$  dBm. The tested level is lower than the required level hence it provides margin to the limit.

### **Manufacturer’s Statement Regarding Uniform Channel Spreading**

The end product implements an automatic channel selection feature at startup such that operation commences on channels distributed across the entire set of allowed 5GHz channels. This feature will ensure uniform spreading is achieved while avoiding non-allowed channels due to prior radar events.

## **TEST AND MEASUREMENT SYSTEM**

### **System Overview**

The measurement system is based on a conducted test method.

The short pulse and long pulse signal generating system utilizes the NTIA software. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the CCS simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.


The short pulse types 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time.

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC 06-96 APPENDIX. The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer set to display 8001 bins on the horizontal axis. The time-domain resolution is 2 msec / bin with a 16 second sweep time, meeting the 10 second short pulse reporting criteria. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold. The time-domain resolution is 3 msec / bin with a 24 second sweep time, meeting the 22 second long pulse reporting criteria and allowing a minimum of 10 seconds after the end of the long pulse waveform.

Should multiple RF ports be utilized for the Master and/or Slave devices (for example, for diversity or MIMO implementations), 50 ohm termination would be removed from the splitter so that connection can be established between splitter and the Master and/or Slave devices.

### **Conducted Method System Block Diagram**

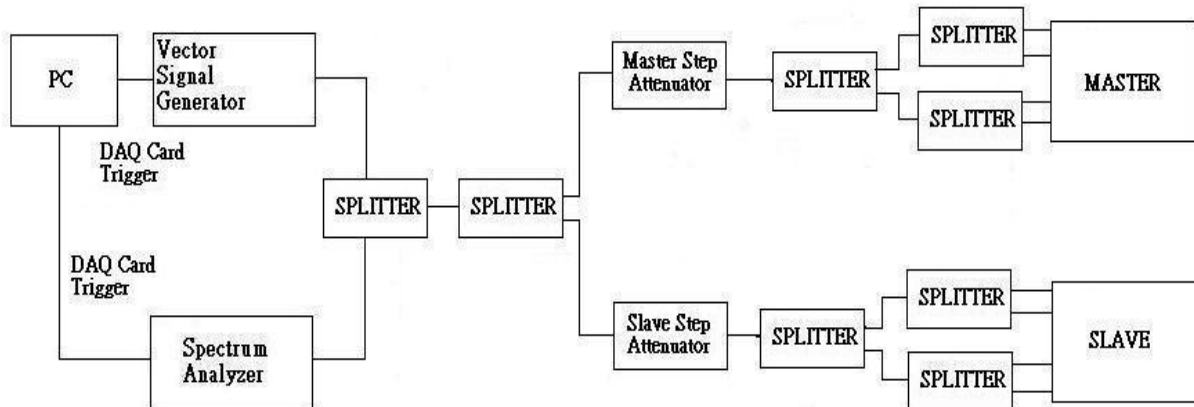





## **System Calibration**

Connect the spectrum analyzer to the test system in place of the master device. Set the signal generator to CW mode. Adjust the amplitude of the signal generator to yield a measured level of  $-62$  dBm on the spectrum analyzer.

Without changing any of the instrument settings, reconnect the spectrum analyzer to the Common port of the Spectrum Analyzer Combiner/Divider and connect a 50 ohm load to the Master Device port of the test system.

Measure the amplitude and calculate the difference from  $-62$  dBm. Adjust the Reference Level Offset of the spectrum analyzer to this difference. Confirm that the signal is displayed at  $-62$  dBm. Readjust the RBW and VBW to 3 MHz, set the span to 10 MHz, and confirm that the signal is still displayed at  $-62$  dBm.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of  $-62$  dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

Set the signal generator to produce a radar waveform, trigger a burst manually and measure the level on the spectrum analyzer. Readjust the amplitude of the signal generator as required so that the peak level of the waveform is at a displayed level equal to the required or desired interference detection threshold. Separate signal generator amplitude settings are determined as required for each radar type.


## **Adjustment Of Displayed Traffic Level**

Establish a link between the Master and Slave, adjusting the Link Step Attenuator as needed to provide a suitable received level at the Master and Slave devices. Stream the video test file to generate WLAN traffic. Confirm that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold. Confirm that the displayed traffic is from the Master Device. For Master Device testing confirm that the displayed traffic does not include Slave Device traffic. For Slave Device testing confirm that the displayed traffic does not include Master Device traffic.

If a different setting of the Master Step Attenuator is required to meet the above conditions, perform a new System Calibration for the new Master Step Attenuator setting.



## Test Setup

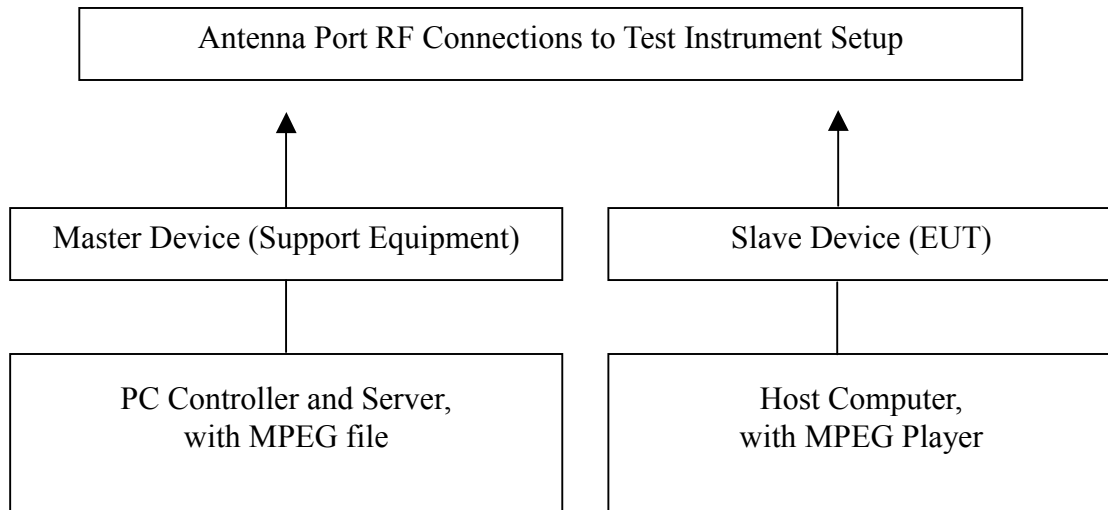

## TEST RESULTS

*No non-compliance noted*



**Test Plot**


**PLOTS OF RADAR WAVEFORMS**

**draft 802.11n Standard-20 MHz mode**

**Sample of Short Pulse Radar Type 1**

Agilent 19:16:02 Dec 18, 2008


R T

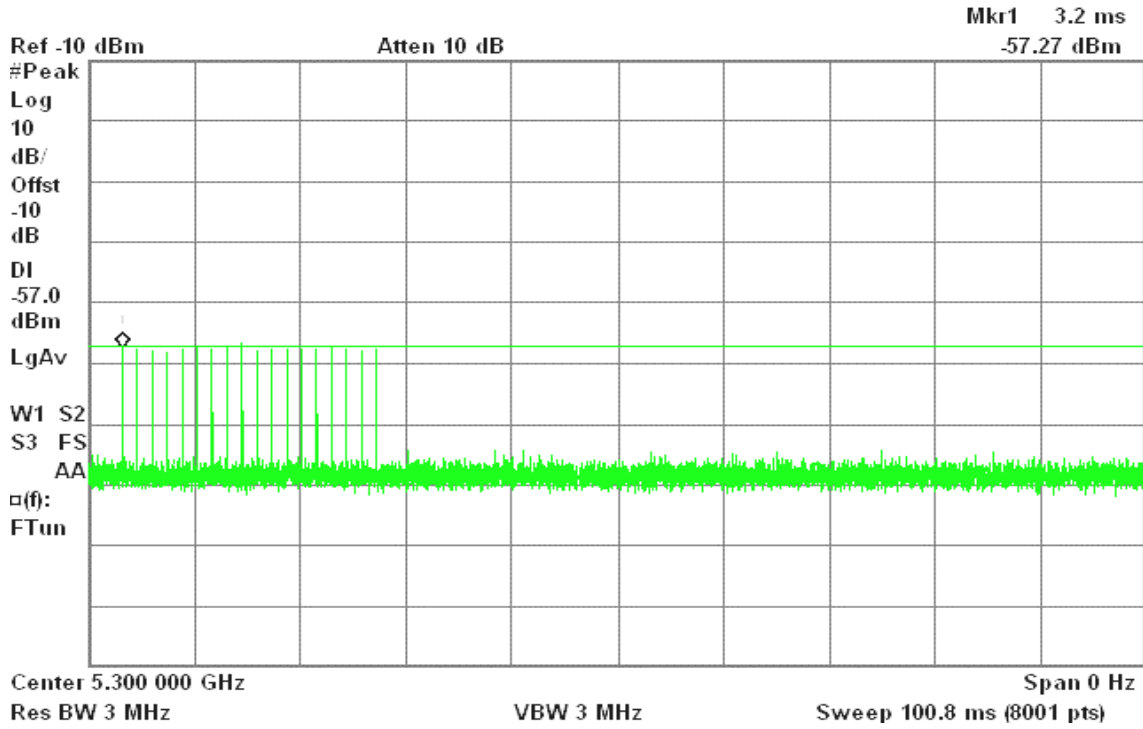

**Sample of Short Pulse Radar Type 2**

Agilent 19:14:51 Dec 18, 2008

R T

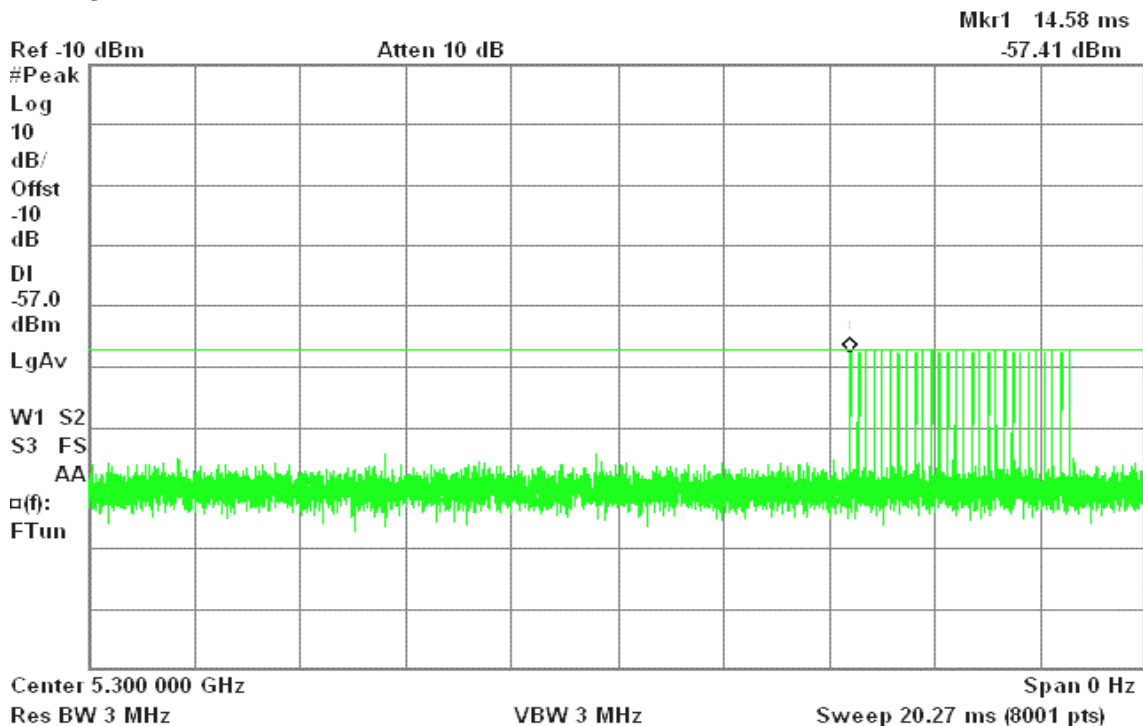




### Sample of Short Pulse Radar Type 3

Agilent 19:14:18 Dec 18, 2008

R T

Mkr1 8.755 ms  
-56.96 dBm

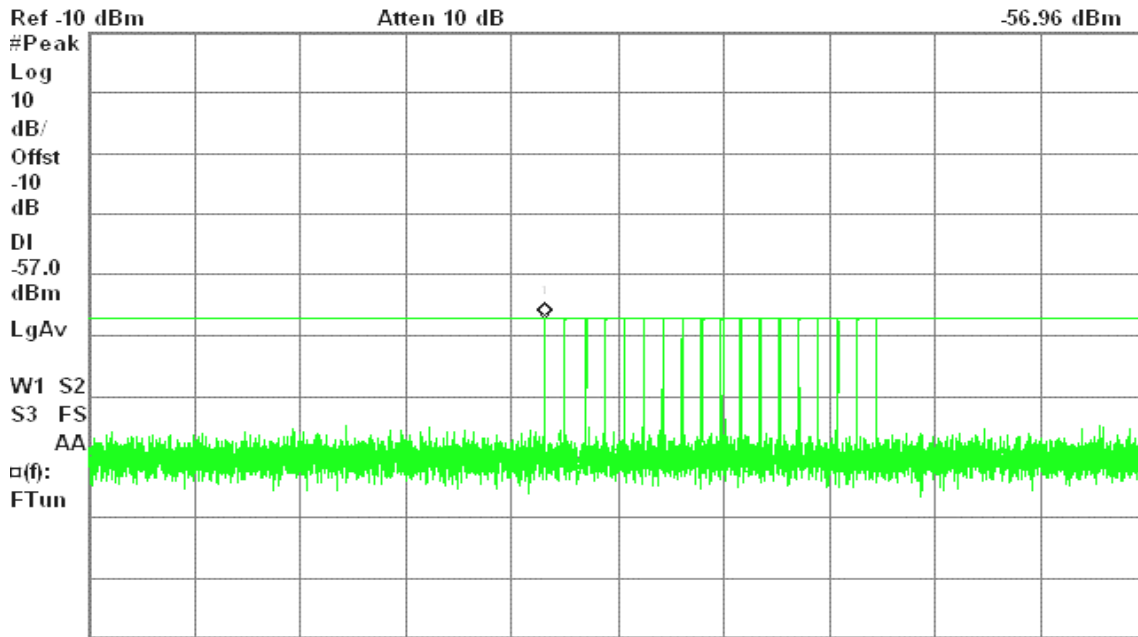


Center 5.300 000 GHz Span 0 Hz  
Res BW 3 MHz VBW 3 MHz Sweep 20.27 ms (8001 pts)

### Sample of Short Pulse Radar Type 4

Agilent 19:13:33 Dec 18, 2008

R T

Mkr1 10.1 ms  
-57.06 dBm

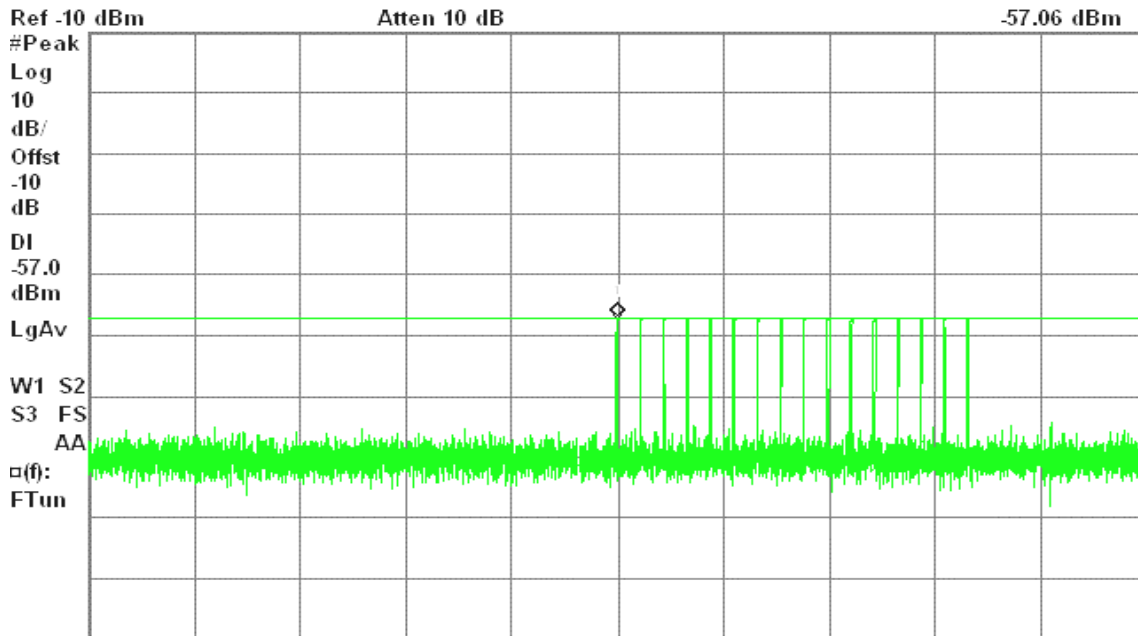

Center 5.300 000 GHz Span 0 Hz  
Res BW 3 MHz VBW 3 MHz Sweep 20.27 ms (8001 pts)




### Sample of Long Pulse Radar Type 5

Agilent 19:12:51 Dec 18, 2008

R T

Mkr1 1.762 s  
-57.28 dBm

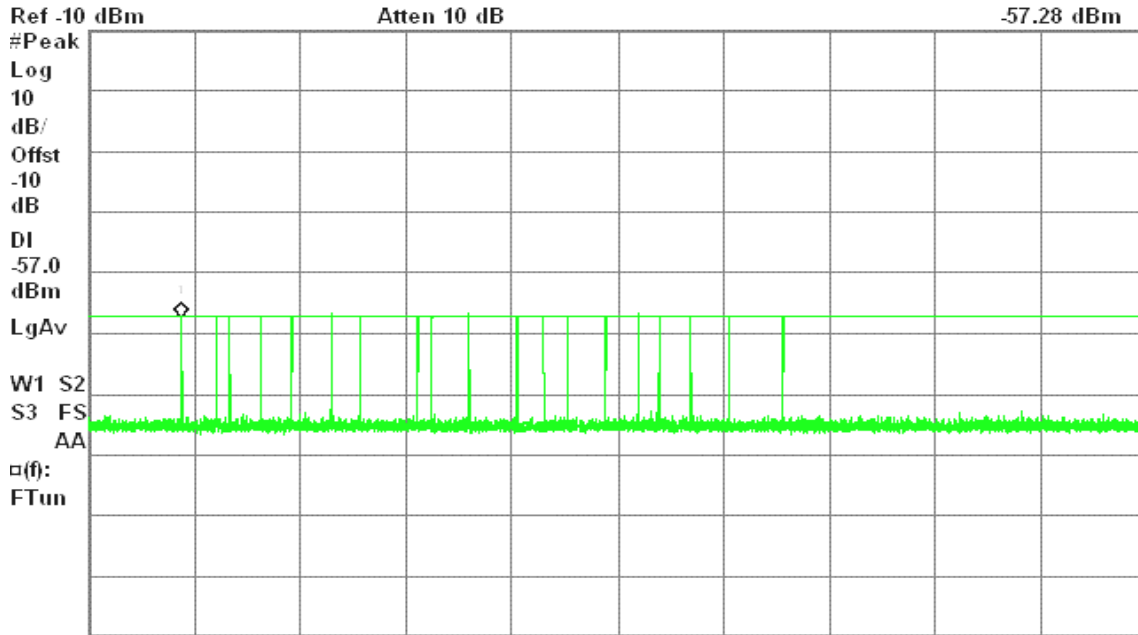


Center 5.300 000 GHz Span 0 Hz  
Res BW 3 MHz VBW 3 MHz Sweep 20 s (8001 pts)

### Sample of Frequency Hopping Radar Type 6

Agilent 19:12:09 Dec 18, 2008

R T

Mkr1 11.37 ms  
-56.74 dBm

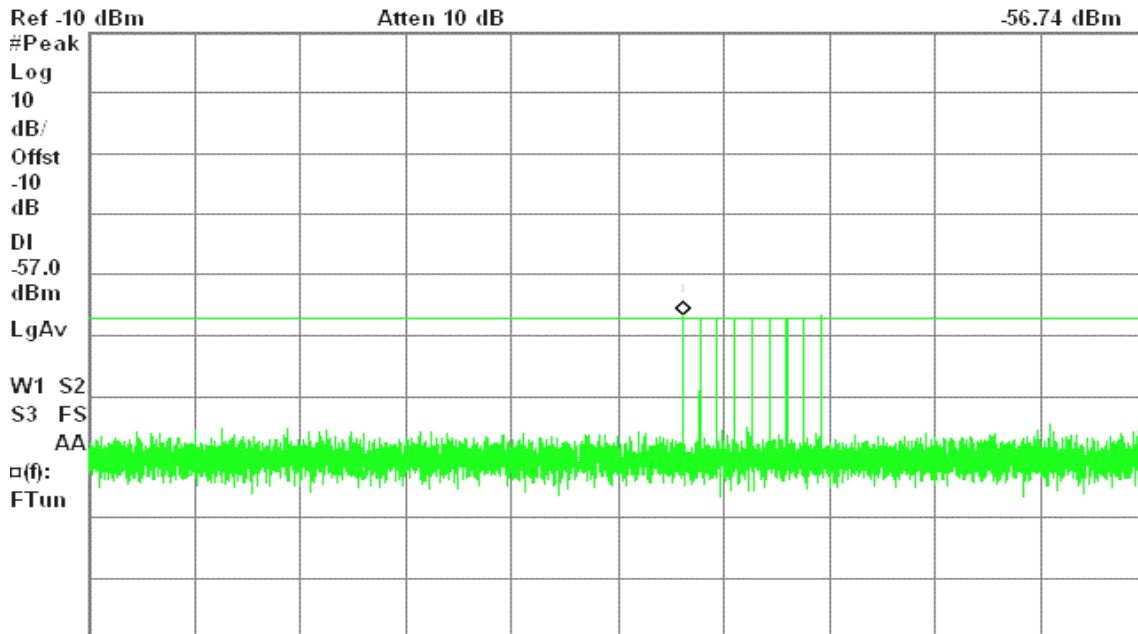

Center 5.300 000 GHz Span 0 Hz  
Res BW 3 MHz VBW 3 MHz Sweep 20.27 ms (8001 pts)




### Plot of WLAN Traffic from Slave

Agilent 19:19:34 Dec 18, 2008

R T

Mkr1 12.34 s  
-115.01 dBm

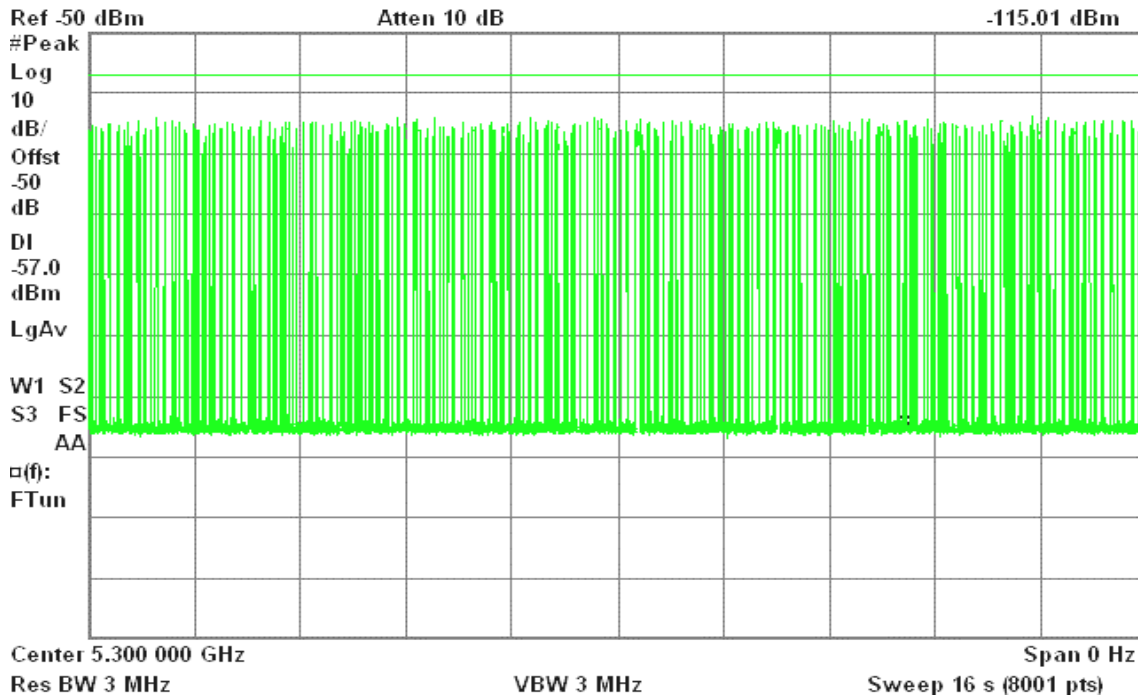




### draft 802.11n Wide-40 MHz mode

### Sample of Short Pulse Radar Type 1

Agilent 19:00:14 Dec 18, 2008


R T

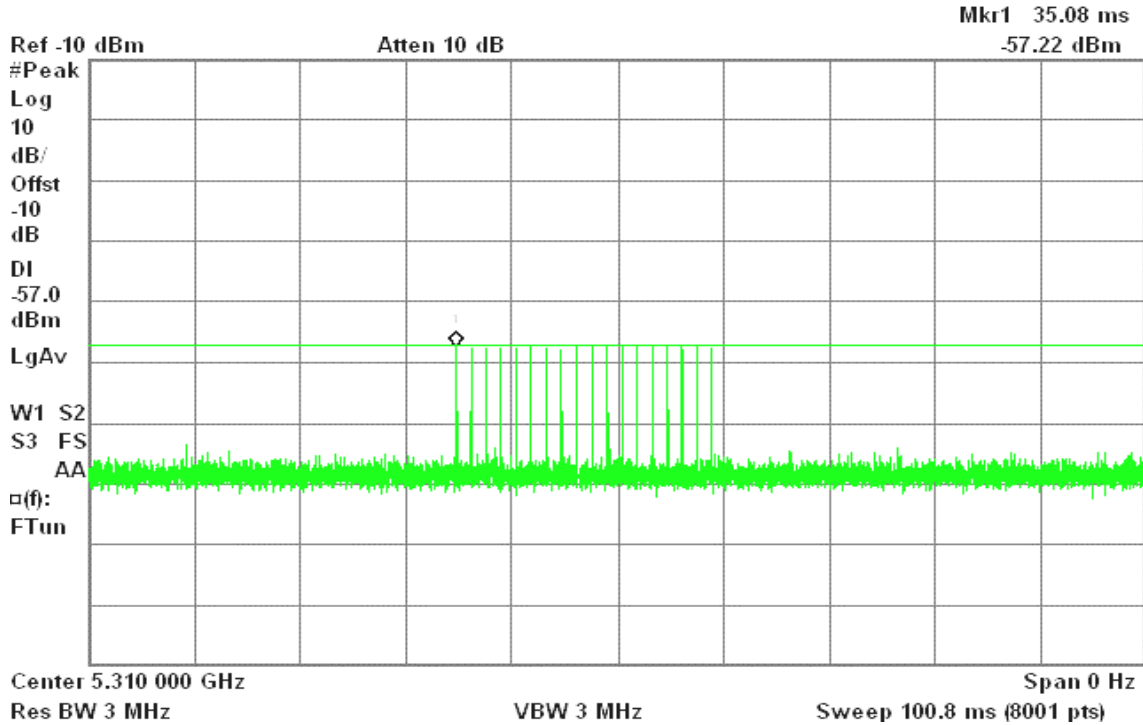

### Sample of Short Pulse Radar Type 2

Agilent 19:01:21 Dec 18, 2008

R T

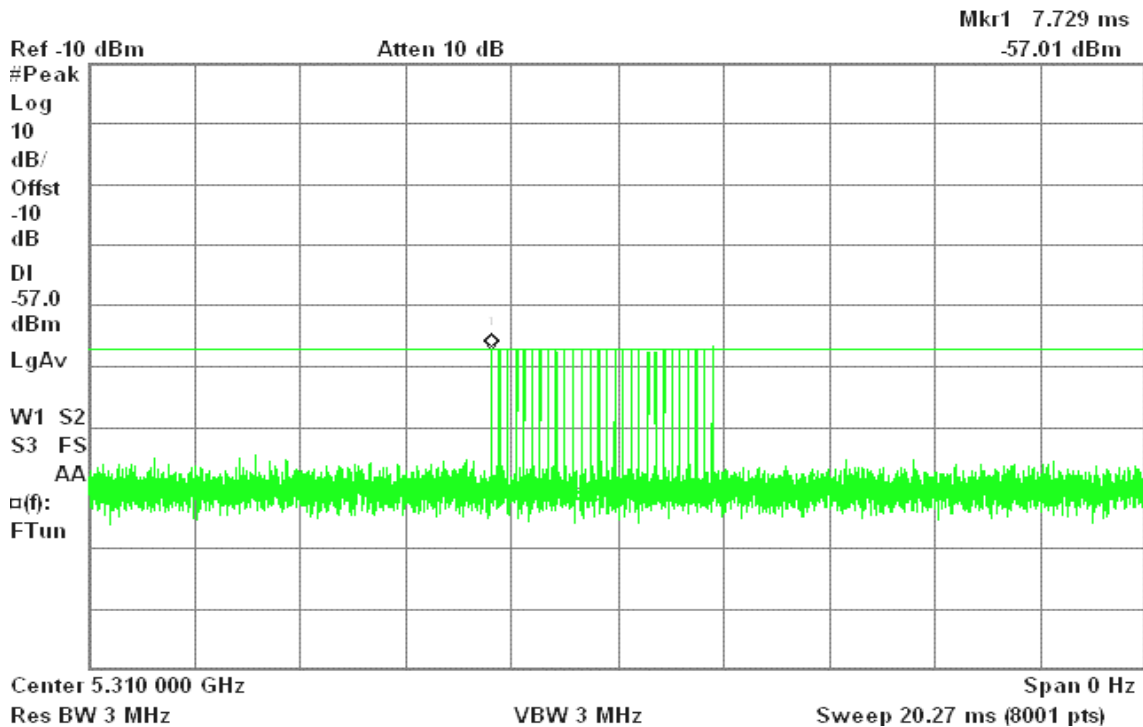




### Sample of Short Pulse Radar Type 3

Agilent 19:02:13 Dec 18, 2008

R T

Mkr1 11.31 ms  
-57.14 dBm

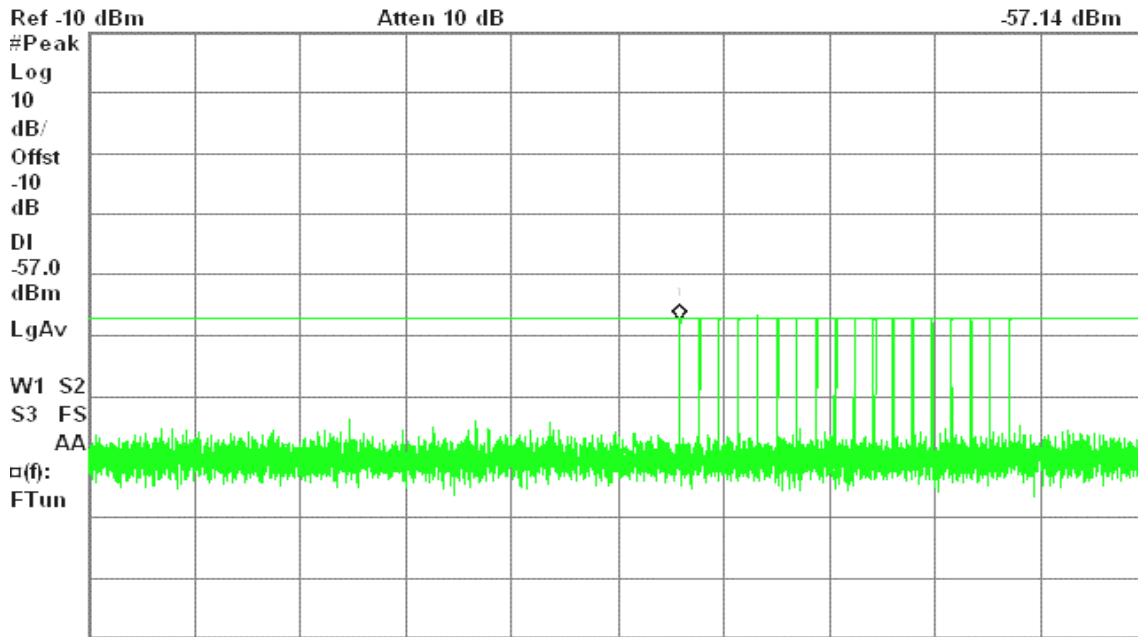


Center 5.310 000 GHz Span 0 Hz  
Res BW 3 MHz VBW 3 MHz Sweep 20.27 ms (8001 pts)

### Sample of Short Pulse Radar Type 4

Agilent 19:03:08 Dec 18, 2008

R T

Mkr1 9.551 ms  
-56.95 dBm

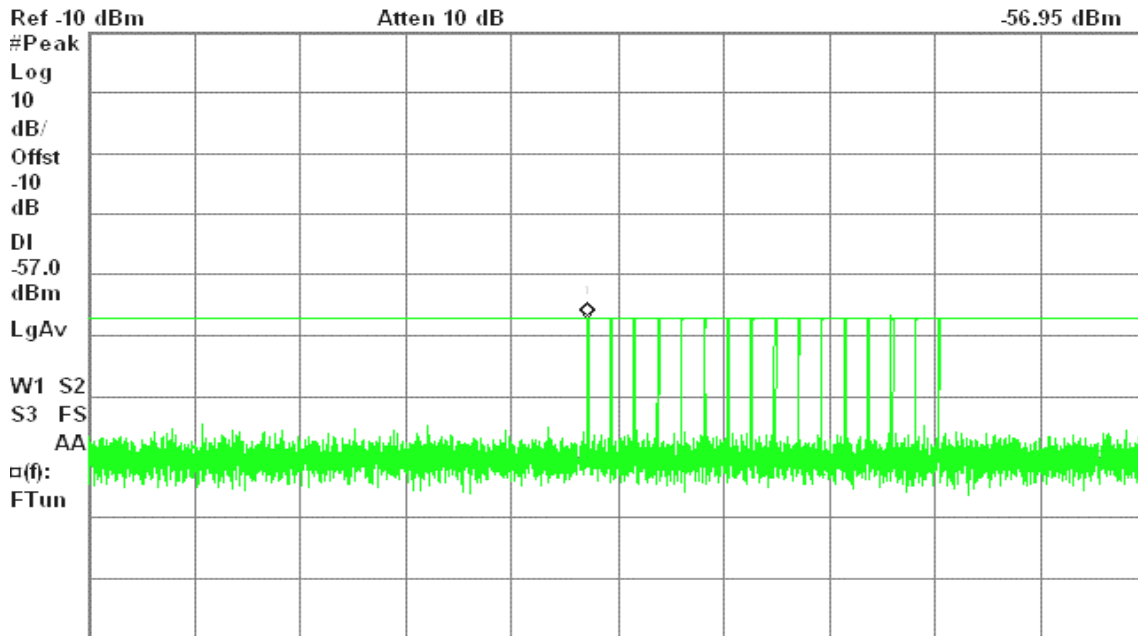

Center 5.310 000 GHz Span 0 Hz  
Res BW 3 MHz VBW 3 MHz Sweep 20.27 ms (8001 pts)






### Sample of Long Pulse Radar Type 5

Agilent 19:04:44 Dec 18, 2008

R T

Mkr1 1.643 s  
-57.11 dBm

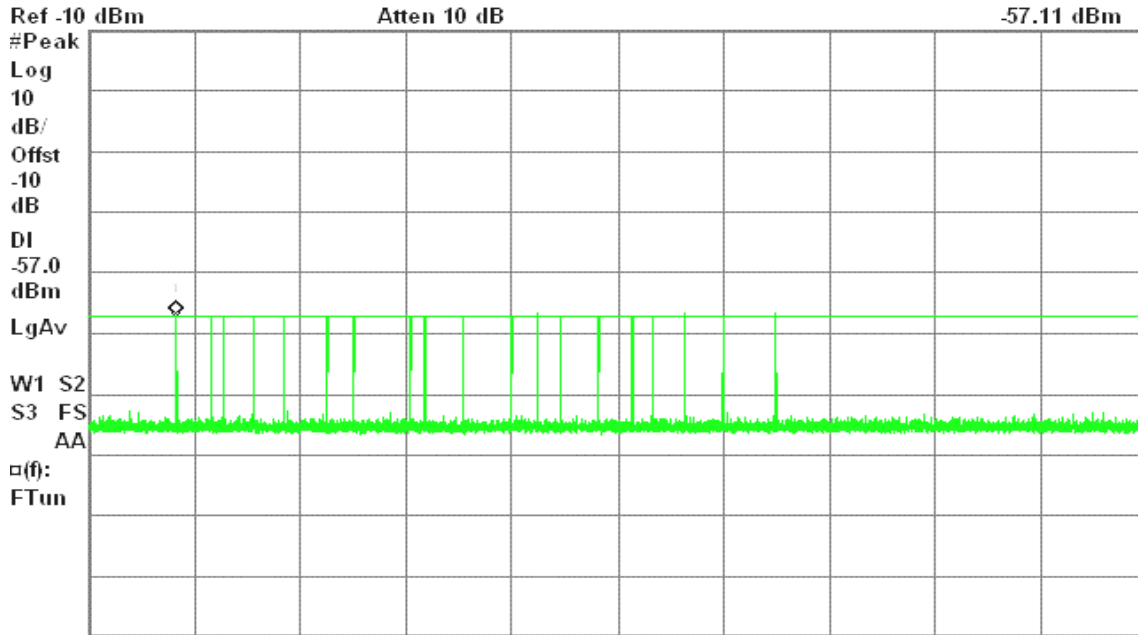


Center 5.310 000 GHz Span 0 Hz  
Res BW 3 MHz VBW 3 MHz Sweep 20 s (8001 pts)

### Sample of Frequency Hopping Radar Type 6

Agilent 19:05:22 Dec 19, 2008

R T

Mkr1 4.104 ms  
-56.89 dBm

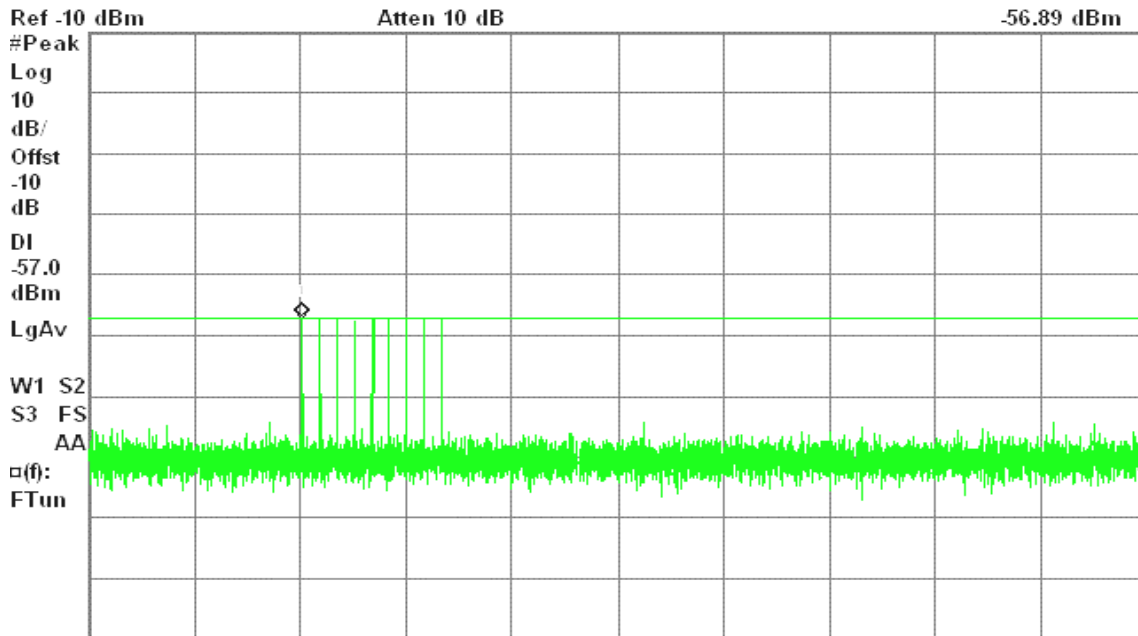


Center 5.310 000 GHz Span 0 Hz  
Res BW 3 MHz VBW 3 MHz Sweep 20.27 ms (8001 pts)



### Plot of WLAN Traffic from Slave

Agilent 14:27:24 Dec 18, 2008

R T

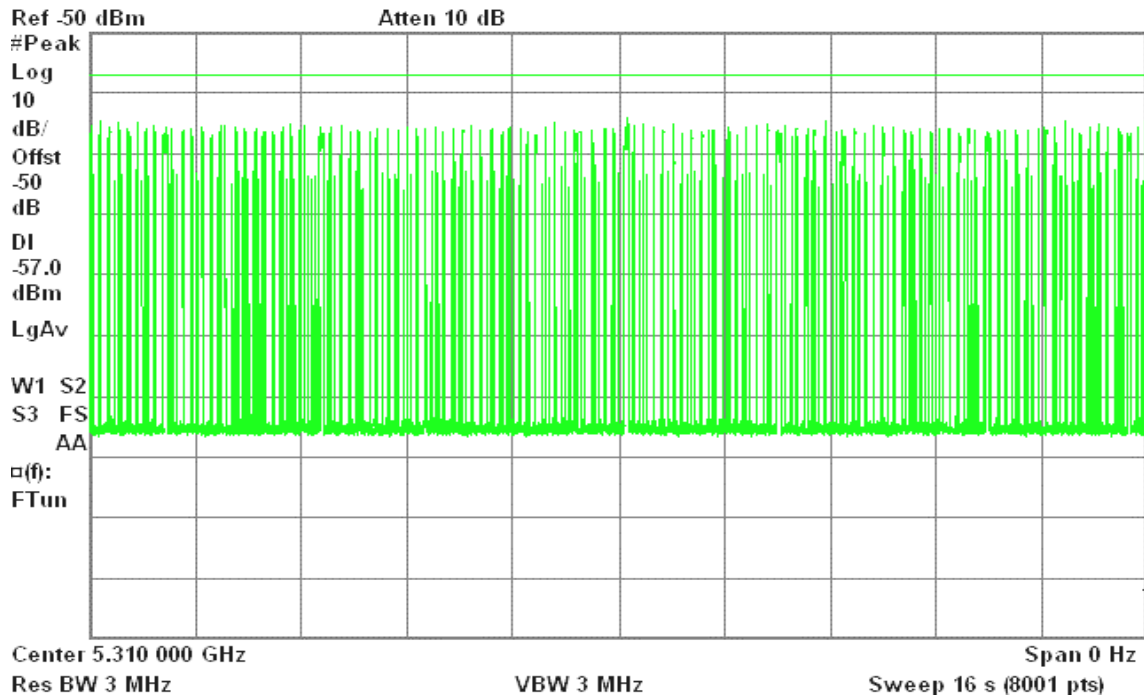



## **TEST CHANNEL AND METHOD**

All tests were performed at a channel center frequency of 5300 MHz utilizing a conducted test method.

## **CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME**

### **GENERAL REPORTING NOTES**

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =

(Number of analyzer bins showing transmission) \* (dwell time per bin)

The observation period over which the aggregate time is calculated

Begins at (Reference Marker + 200 msec) and

Ends no earlier than (Reference Marker + 10 sec).



**draft 802.11n Standard-20 MHz mode**


**Type 1 Channel Move Time Results**

*No non-compliance noted.*

Channel Move Time (s)	Limit (s)
2.686	10

Agilent 19:22:38 Dec 18, 2008

R T

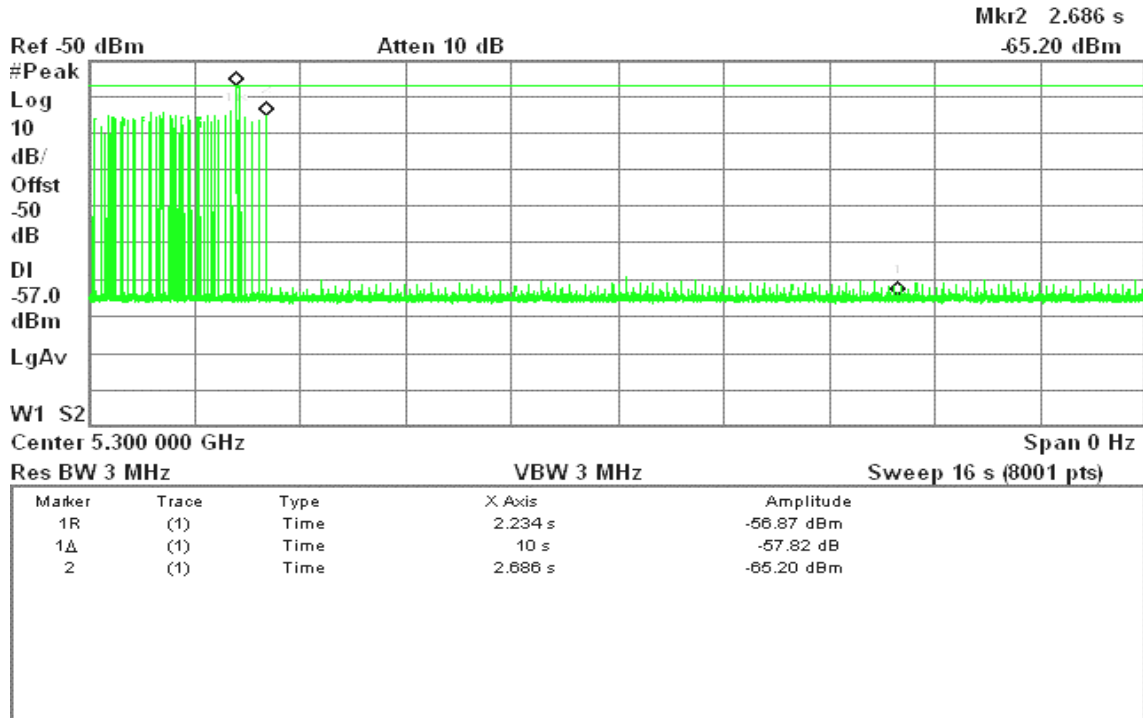



**draft 802.11n Wide-40 MHz mode**


**Type 1 Channel Move Time Results**

No non-compliance noted.

Channel Move Time (s)	Limit (s)
2.774	10

Agilent 14:43:35 Dec 18, 2008

R T

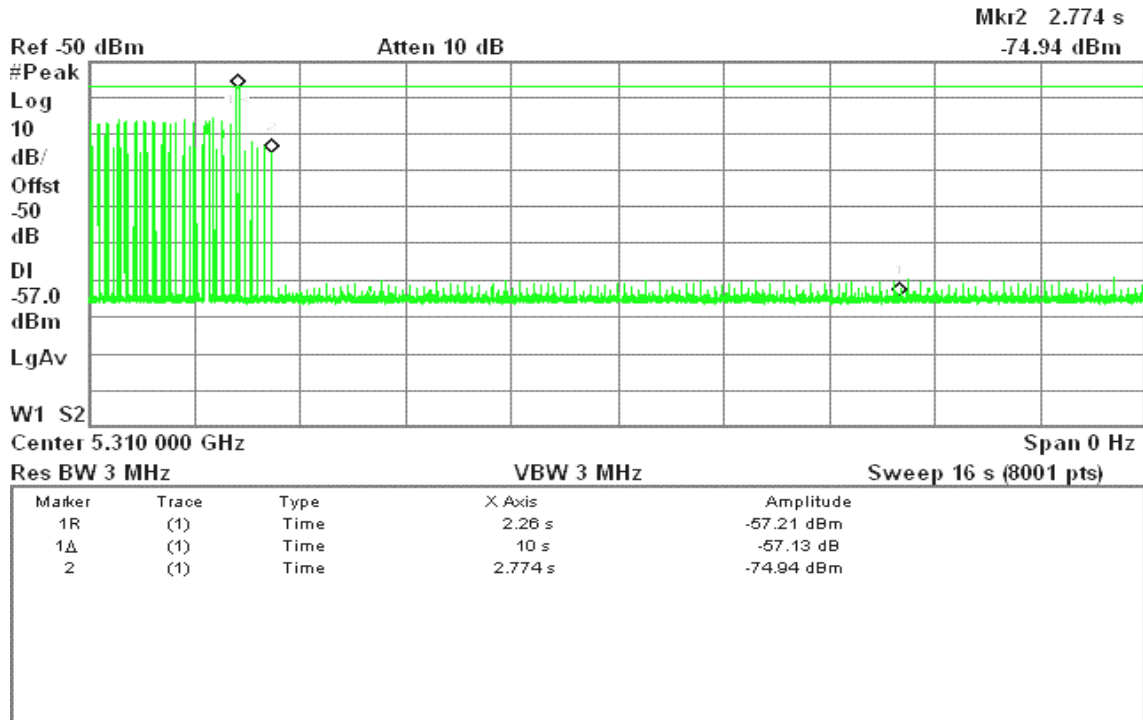







**draft 802.11n Standard-20 MHz mode**

**Type 1 Channel Closing Transmission Time Results**

No non-compliance noted.

Aggregate Transmission Time (ms)	Limit (ms)	Margin (ms)
8	60	-52

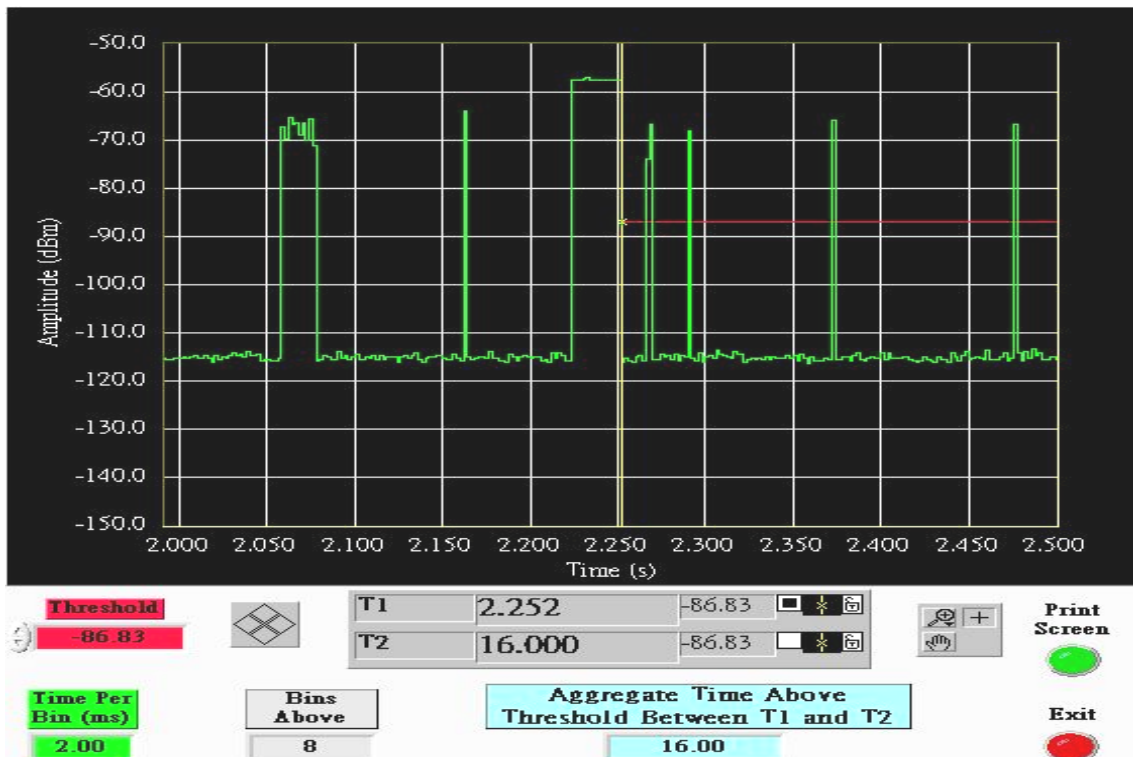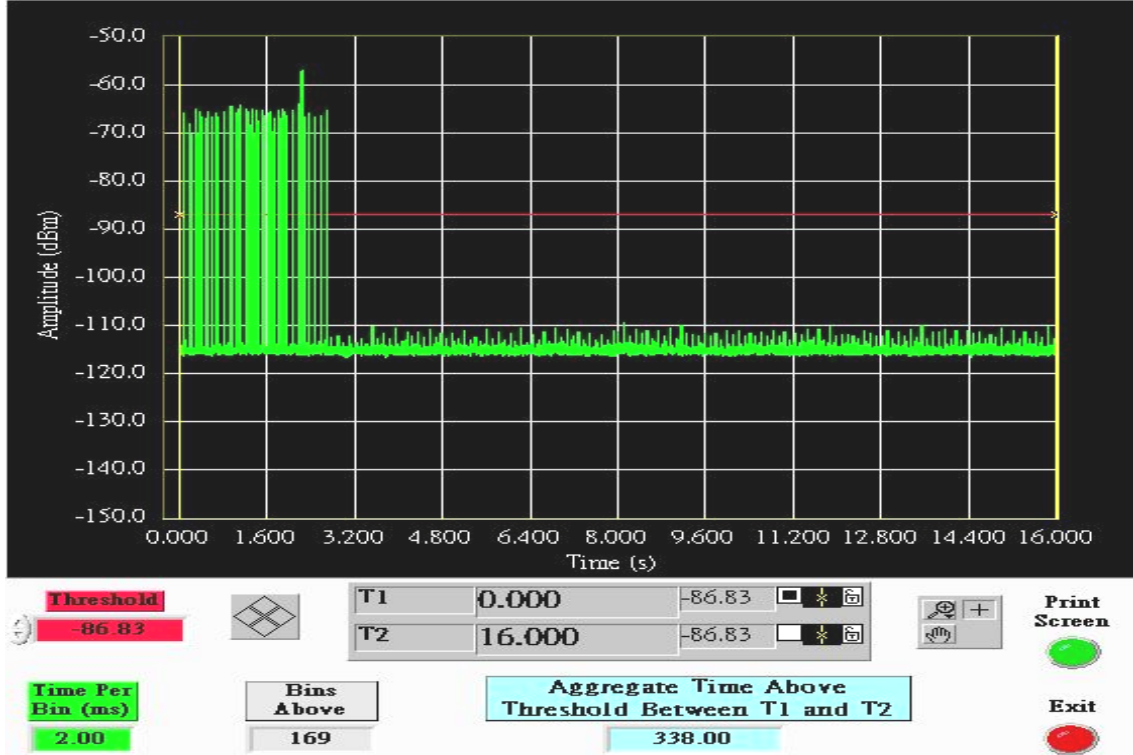

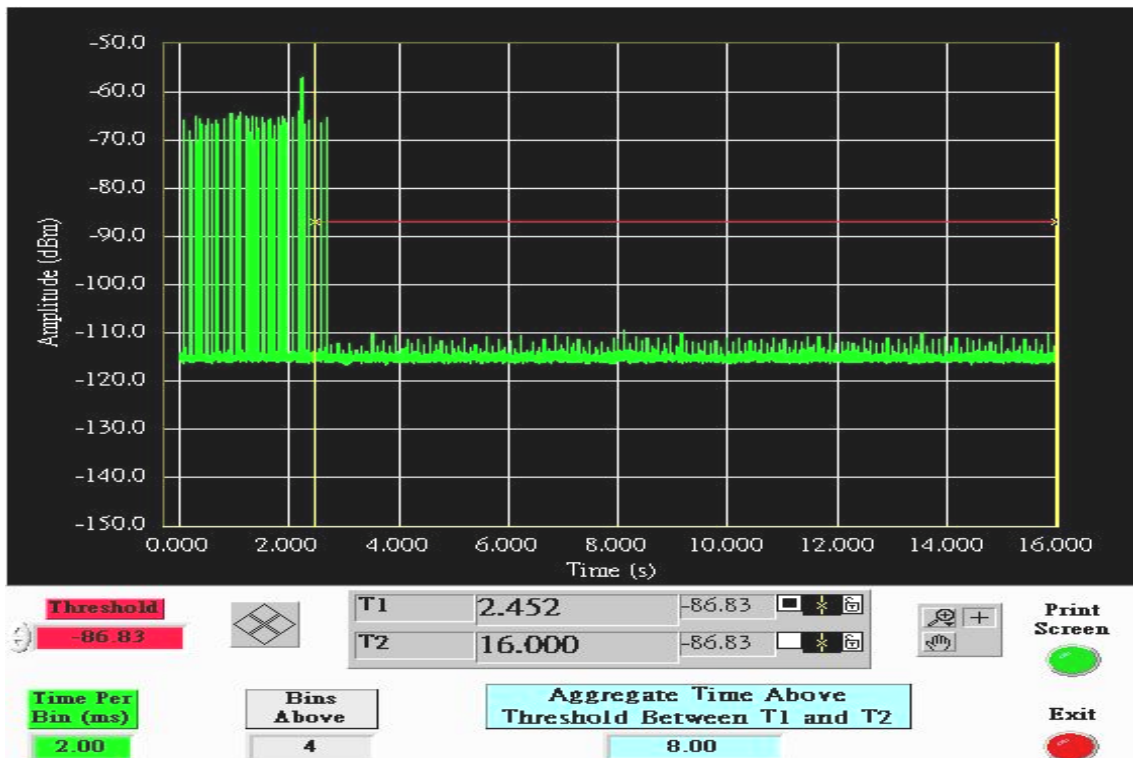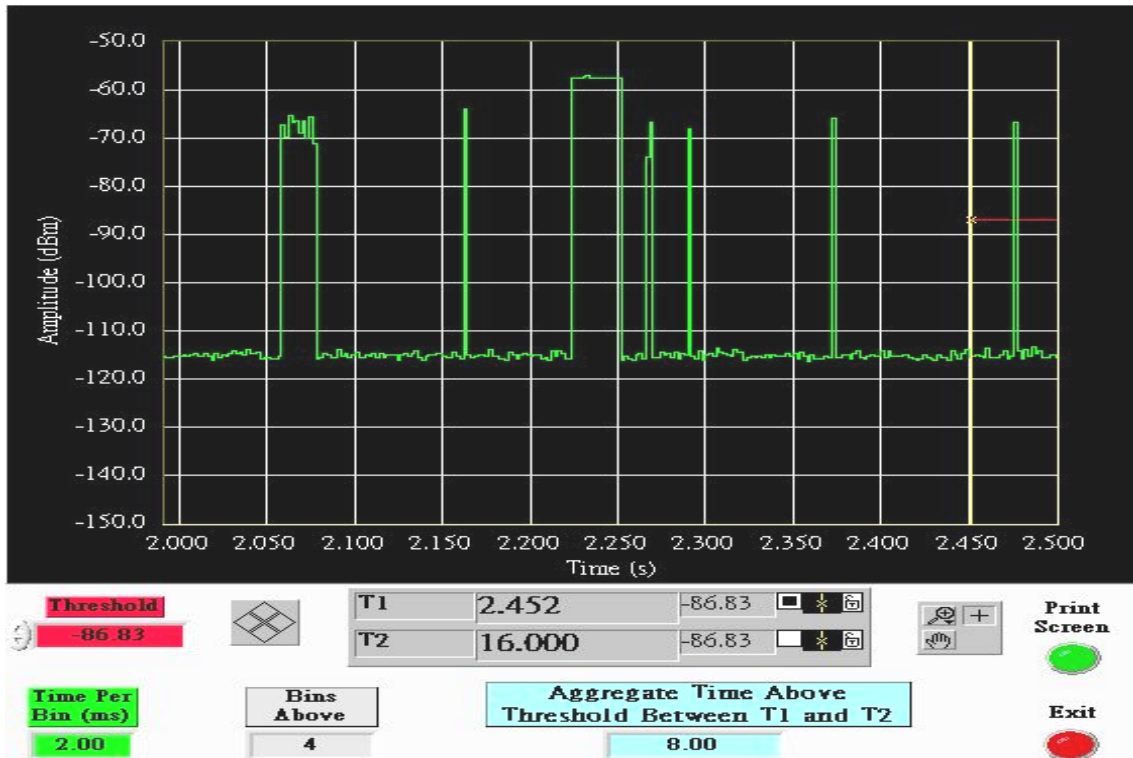





**draft 802.11n Wide-40 MHz mode**



**Type 1 Channel Closing Transmission Time Results**

No non-compliance noted.

Aggregate Transmission Time (ms)	Limit (ms)	Margin (ms)
8	60	-52

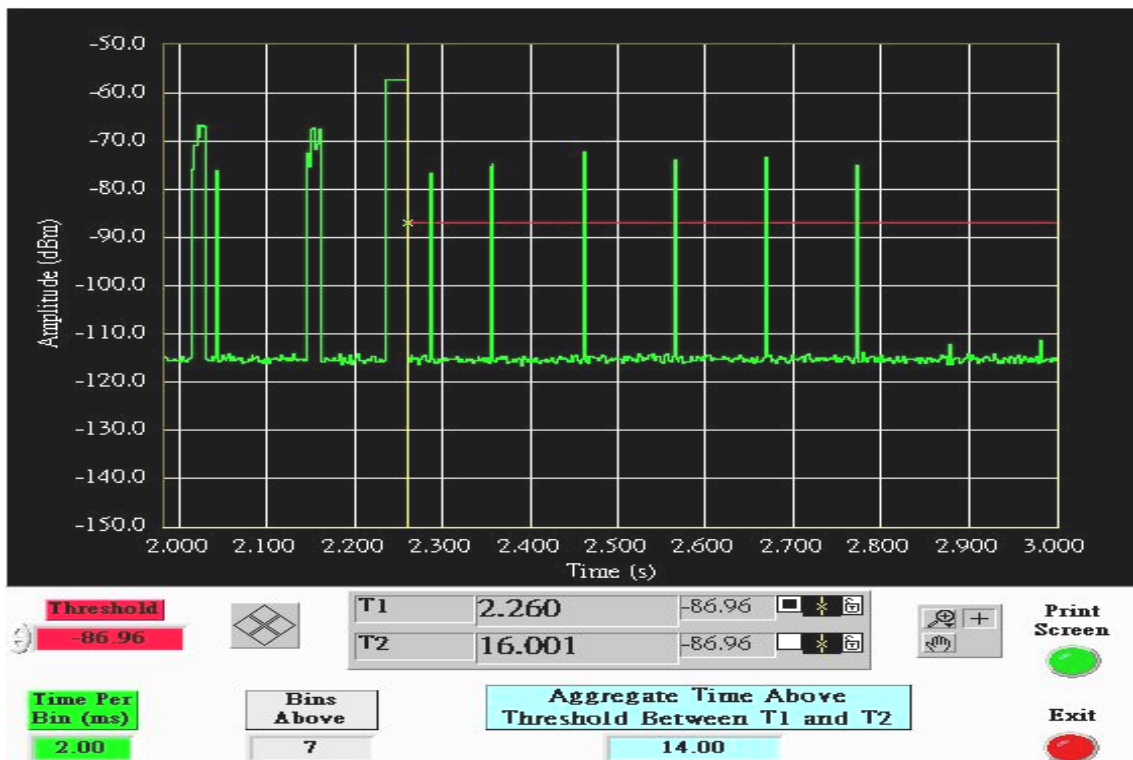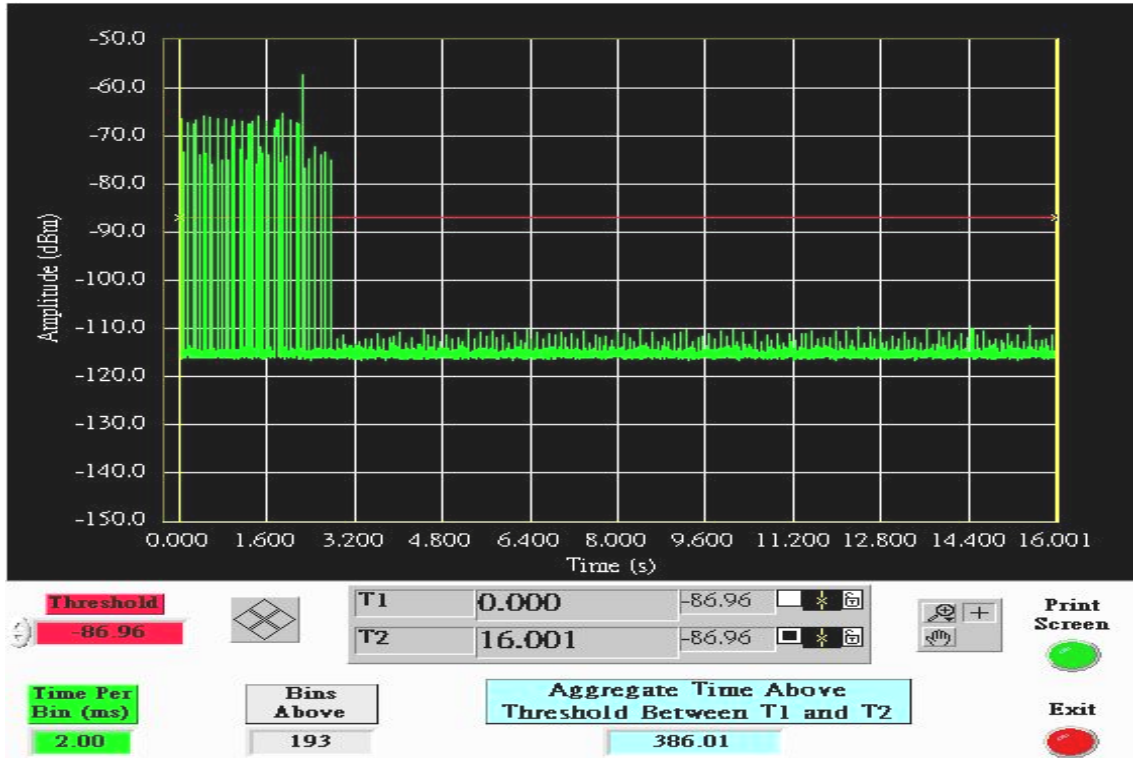



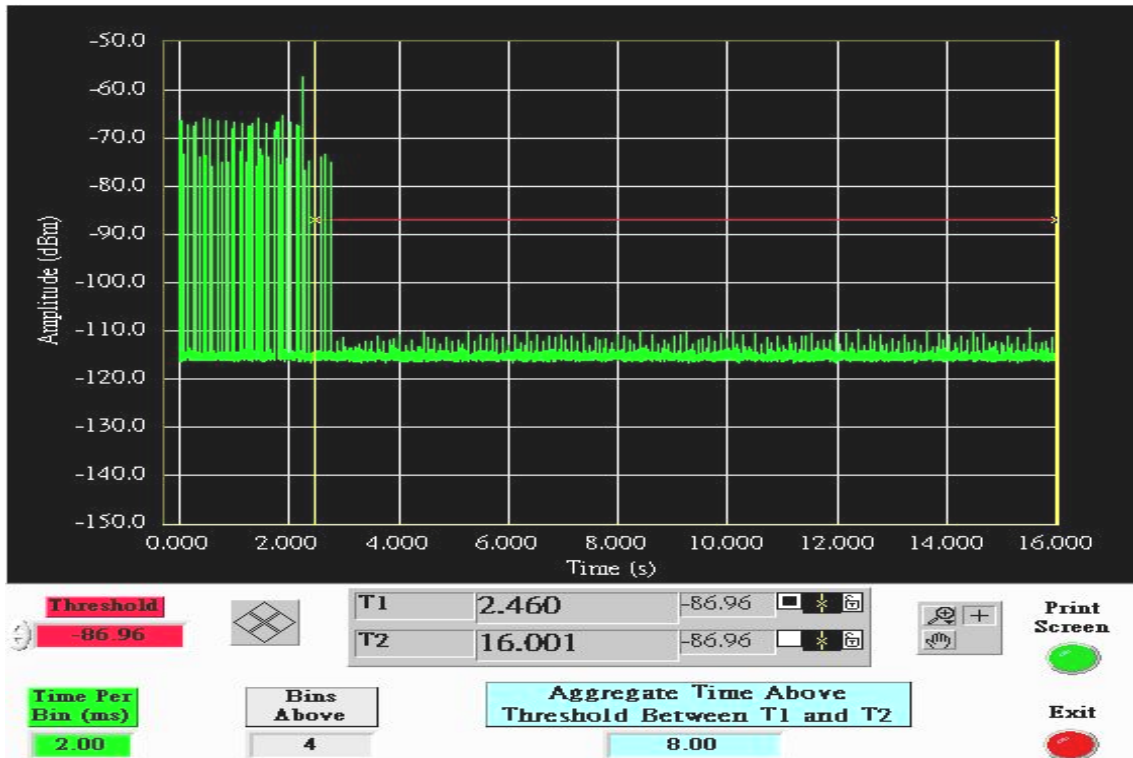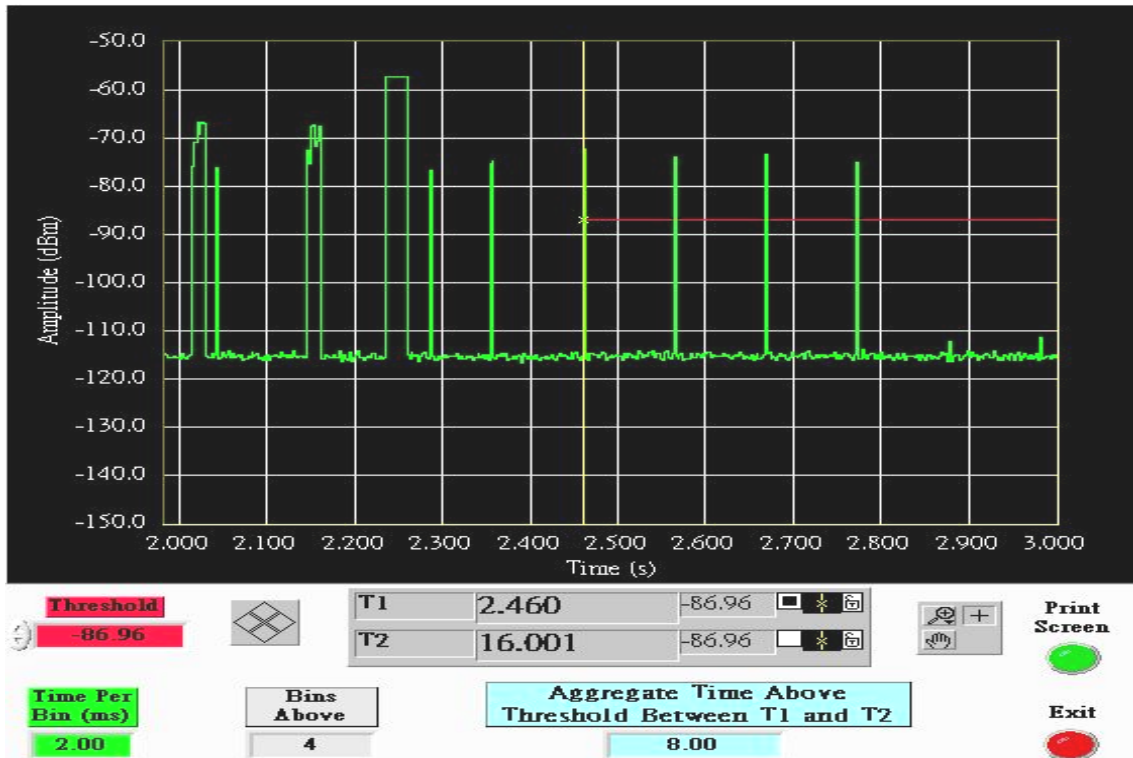



**draft 802.11n Standard-20 MHz mode**

**Type 5 Channel Move Time Results**


No non-compliance noted: The traffic ceases prior to the end of the radar waveform, therefore it also ceases prior to 10 seconds after the end of the radar waveform.

Agilent 19:31:45 Dec 18, 2008

R T

Δ Mkr1 10 s

-58.02 dB

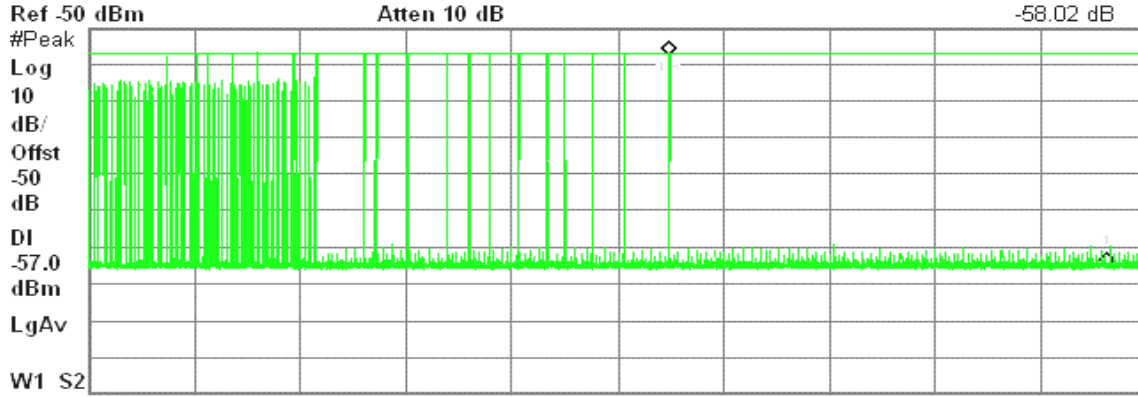

Center 5.300 000 GHz Span 0 Hz  
 Res BW 3 MHz VBW 3 MHz Sweep 24 s (8001 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	13.13 s	-57.36 dBm
1Δ	(1)	Time	10 s	-58.02 dB



**draft 802.11n Wide-40 MHz Channel mode**


**Type 5 Channel Move Time Results**

No non-compliance noted: The traffic ceases prior to the end of the radar waveform, therefore it also ceases prior to 10 seconds after the end of the radar waveform.

Agilent 14:51:27 Dec 18, 2008

R T

Δ Mkr1 10 s  
-58.69 dB

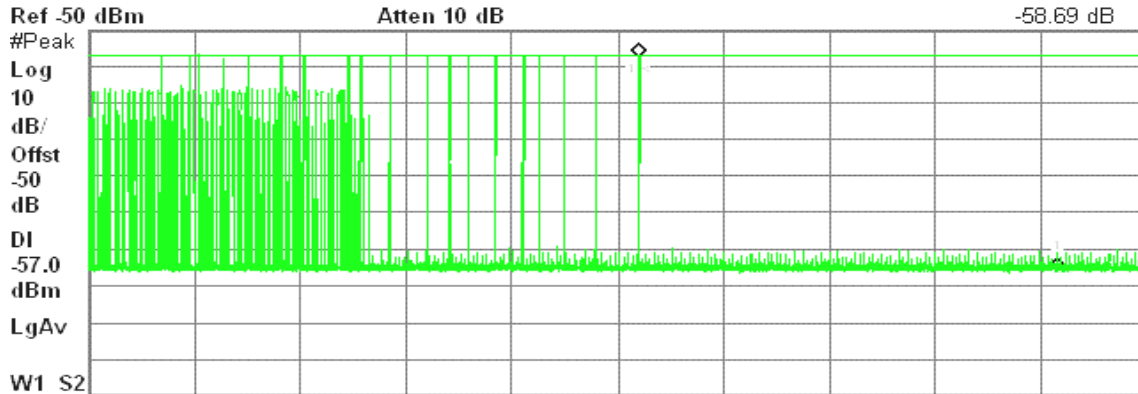

Center 5.310 000 GHz  
Res BW 3 MHz  
VBW 3 MHz  
Sweep 24 s (8001 pts)  
Span 0 Hz

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	13.08 s	-57.40 dBm
1Δ	(1)	Time	10 s	-58.69 dB






**draft 802.11n Standard-20 MHz mode**

**Type 5 Channel Closing Transmission Time Results**

No non-compliance noted.

Aggregate Transmission Time (ms)	Limit (ms)	Margin (ms)
3	60	-57

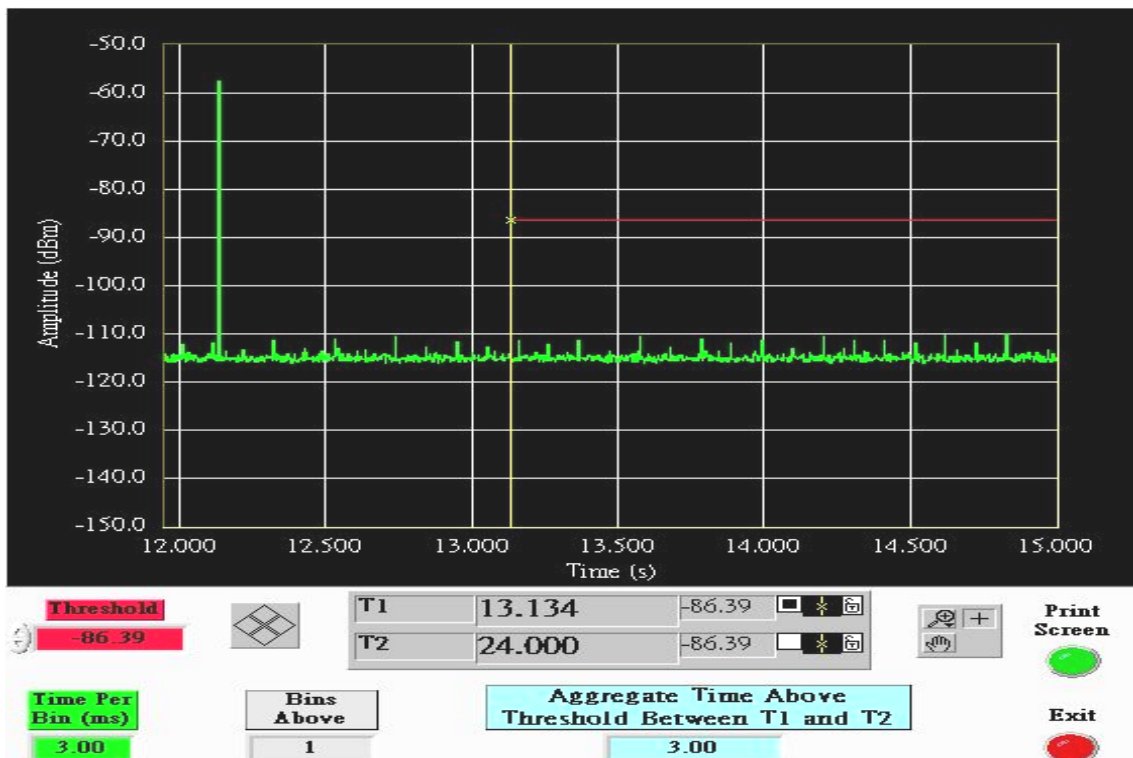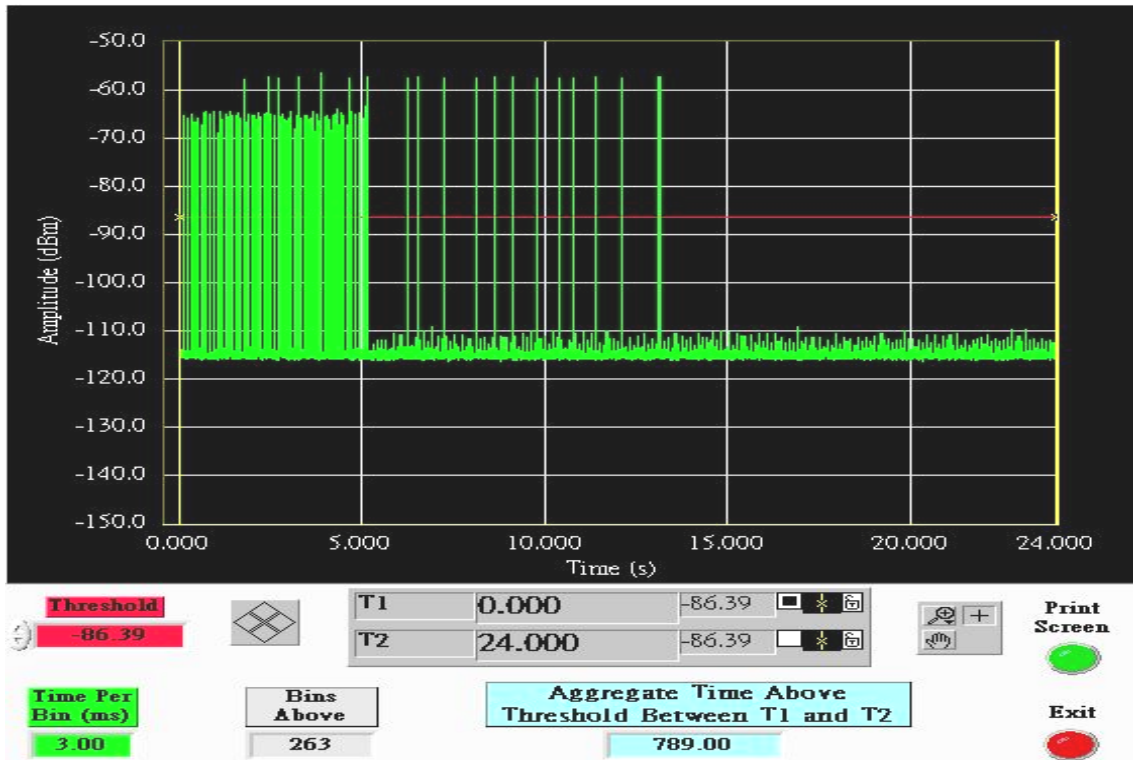

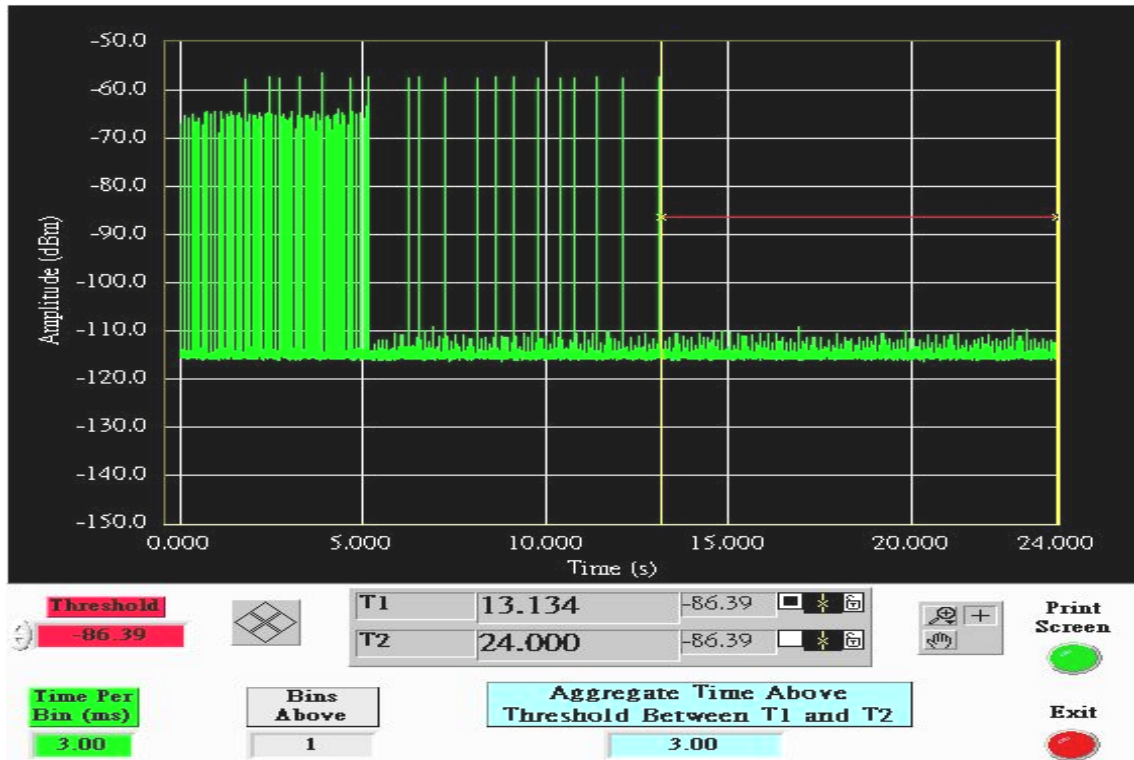






**draft 802.11n Wide-40 MHz mode**

**Type 1 Channel Closing Transmission Time Results**

No non-compliance noted.

Aggregate Transmission Time (ms)	Limit (ms)	Margin (ms)
0	60	-60

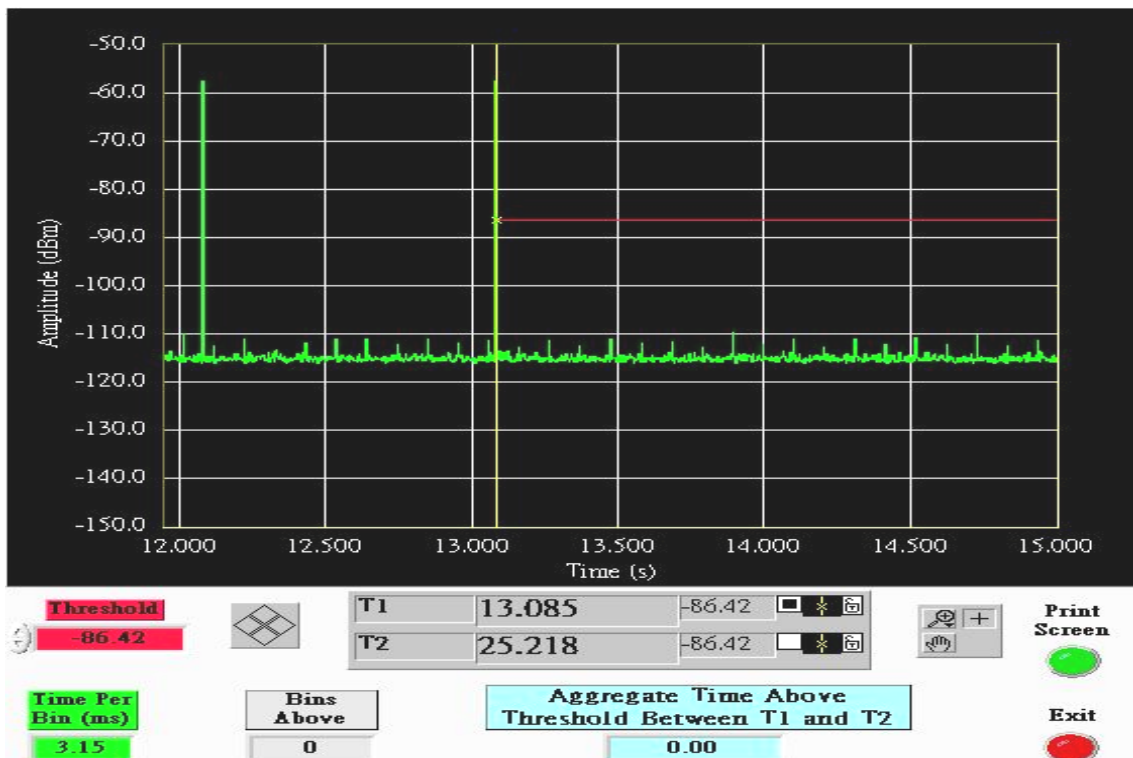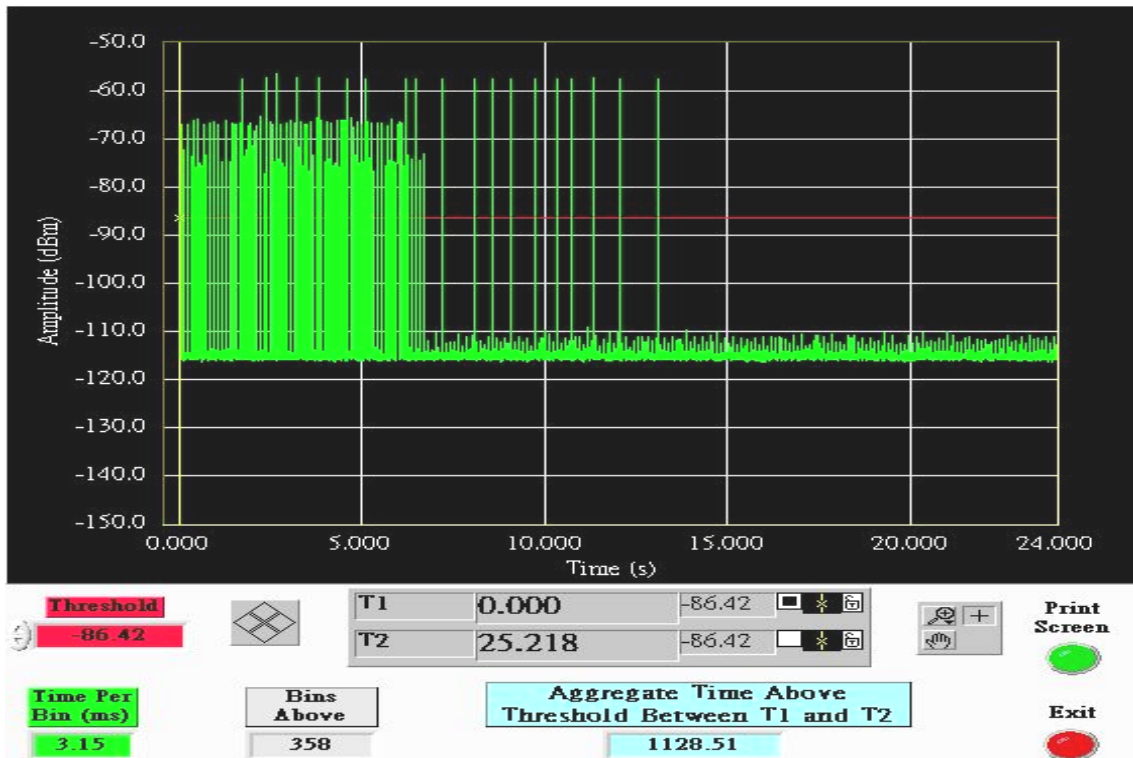

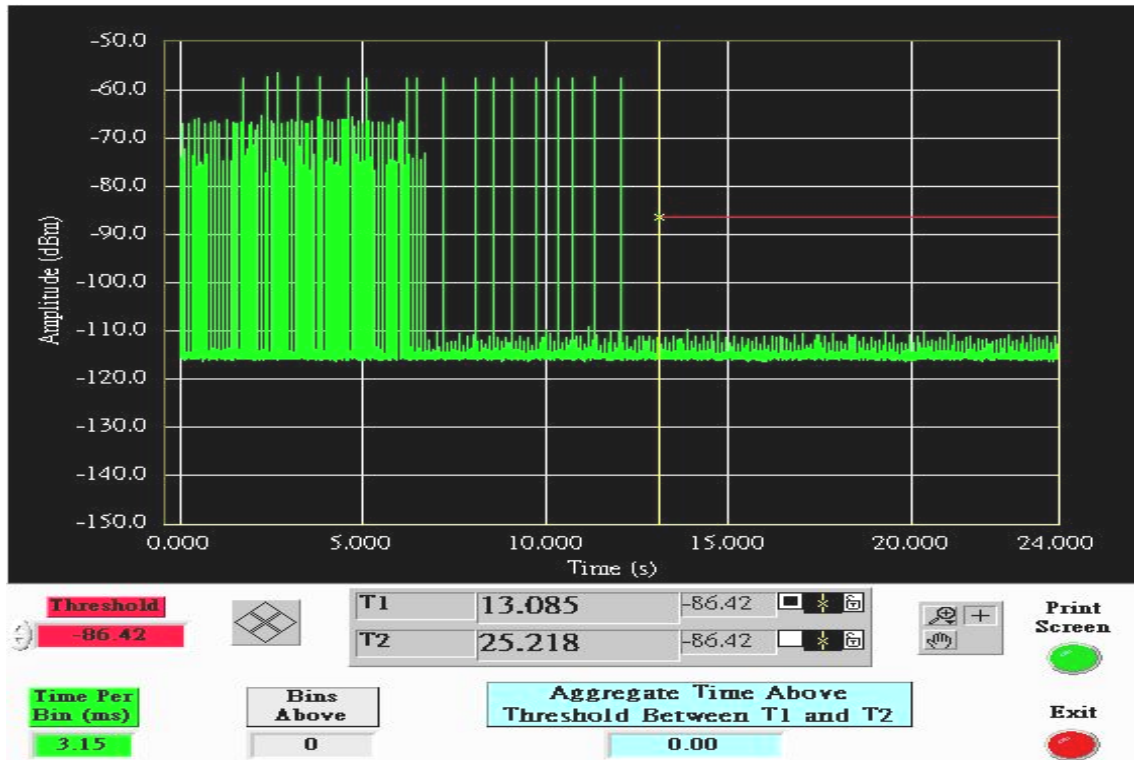



# NON-OCCUPANCY PERIOD

## draft 802.11n Wide-20 MHz mode

### Type 1 Non-Occupancy Period Test Results

No non-compliance noted.


No EUT transmissions were observed on the test channel during the 30 minute observation time.

Agilent 20:52:42 Dec 18, 2008

R T

Δ Mkr1 1.8 ks

-53.88 dB

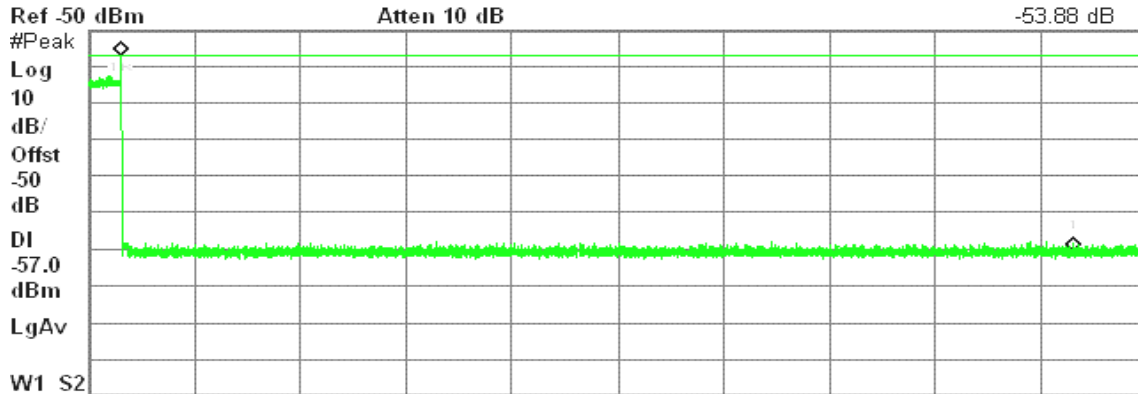

Center 5.300 000 GHz

Span 0 Hz

Res BW 3 MHz

VBW 3 MHz

Sweep 2 ks (8001 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	01.5 s	-56.71 dBm
1Δ	(1)	Time	1.8 ks	-53.88 dB





### Type 5 Non-Occupancy Period Test Results

No non-compliance noted.


No EUT transmissions were observed on the test channel during the 30 minute observation time.

Agilent 20:13:28 Dec 18, 2008

R T

Δ Mkr1 1.8 ks

-53.72 dB

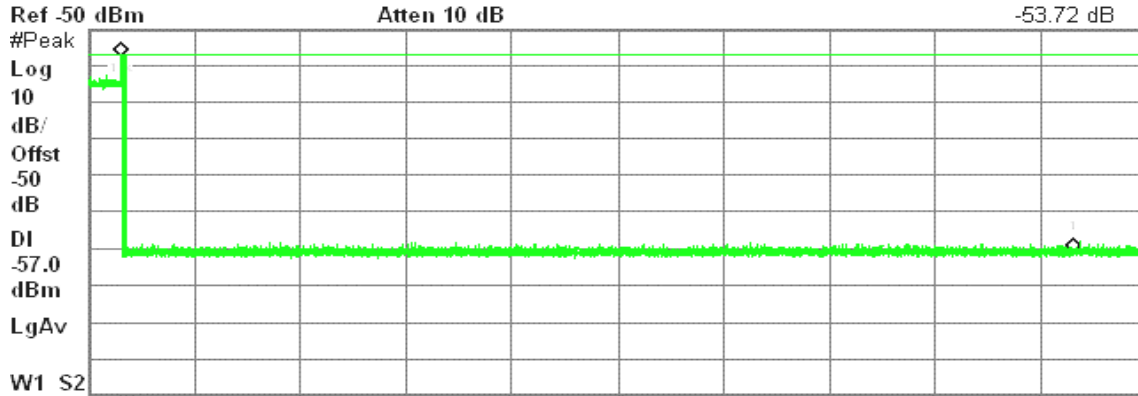

Center 5.300 000 GHz

Span 0 Hz

Res BW 3 MHz

VBW 3 MHz

Sweep 2 ks (8001 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	6.1 s	-57.27 dBm
1Δ	(1)	Time	1.8 ks	-53.72 dB



**draft 802.11n Wide-40 MHz mode**

**Type 1 Non-Occupancy Period Test Results**


*No non-compliance noted.*

No EUT transmissions were observed on the test channel during the 30 minute observation time.

Agilent 18:56:38 Dec 18, 2008

R T

Δ Mkr1 1.8 ks

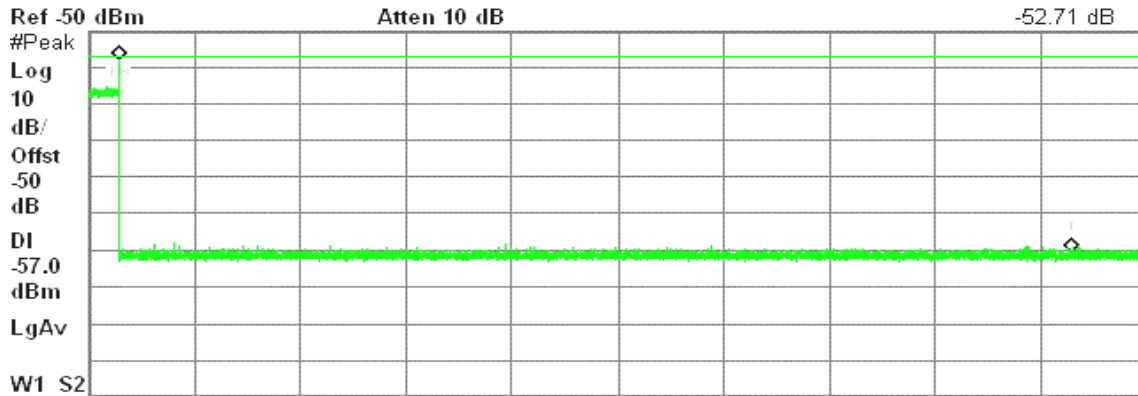

Center 5.310 000 GHz Span 0 Hz  
 Res BW 3 MHz VBW 3 MHz Sweep 2 ks (8001 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	57.5 s	-57.83 dBm
1Δ	(1)	Time	1.8 ks	-52.71 dB



### Type 5 Non-Occupancy Period Test Results

No non-compliance noted.


No EUT transmissions were observed on the test channel during the 30 minute observation time.

Agilent 18:07:54 Dec 18, 2008

R T

Δ Mkr1 1.8 ks

-52.95 dB

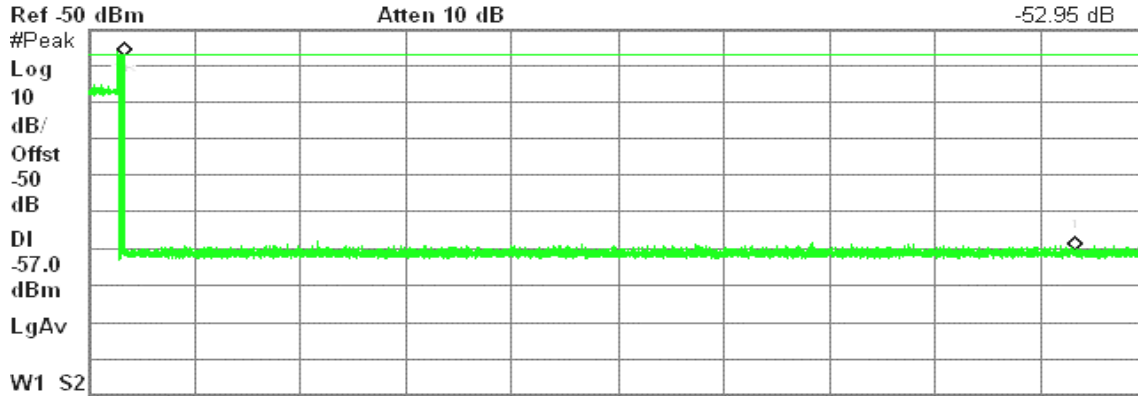

Center 5.310 000 GHz

Span 0 Hz

Res BW 3 MHz

VBW 3 MHz

Sweep 2 ks (8001 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	65.75 s	-57.47 dBm
1Δ	(1)	Time	1.8 ks	-52.95 dB