

Test Laboratory: Compliance Certification Services Inc.

D2450V2 SN-728 Body

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:728

Communication System: CW2450; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.99$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.93, 5.93, 5.93);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Pin=250mW,d=10mm/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 14.2 mW/g

Pin=250mW,d=10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.9 V/m; Power Drift = -0.064 dB



Peak SAR (extrapolated) = 28.1 W/kg

SAR(1 g) = 13.6 mW/g; SAR(10 g) = 6.21 mW/g

Maximum value of SAR (measured) = 19.2 mW/g

Pin=250mW,d=10mm/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 19.9 mW/g

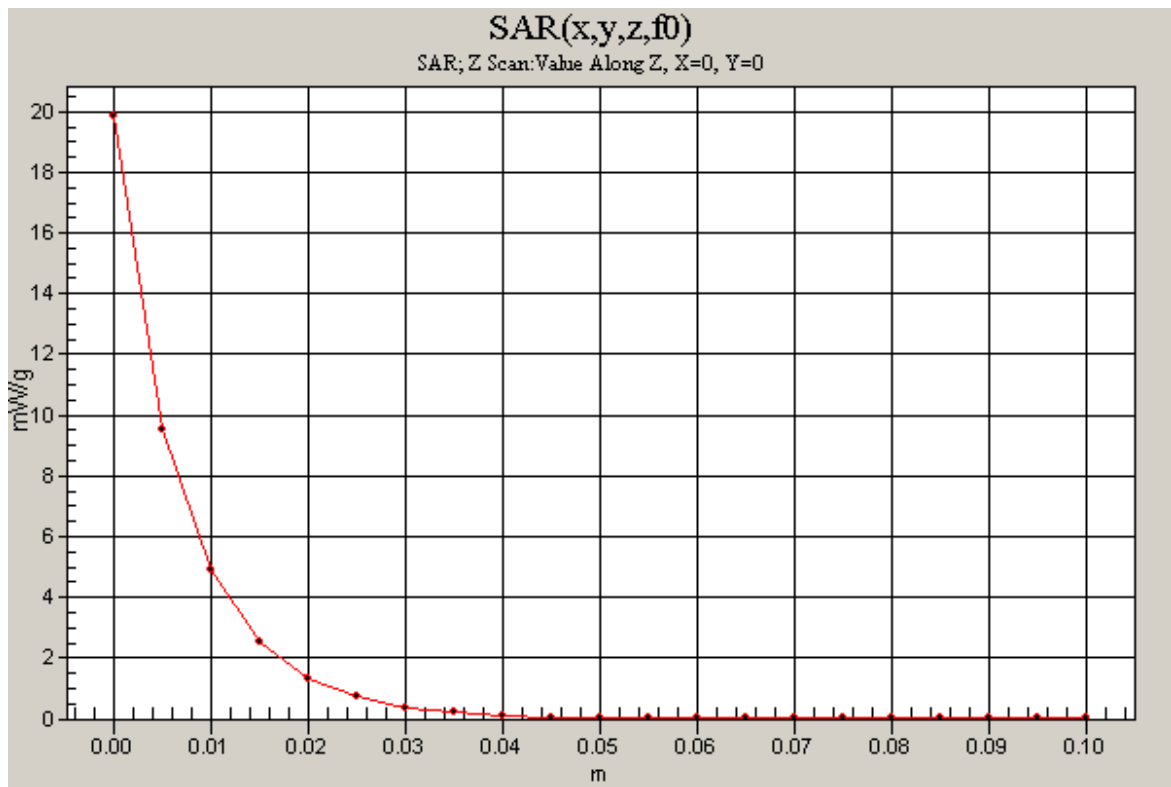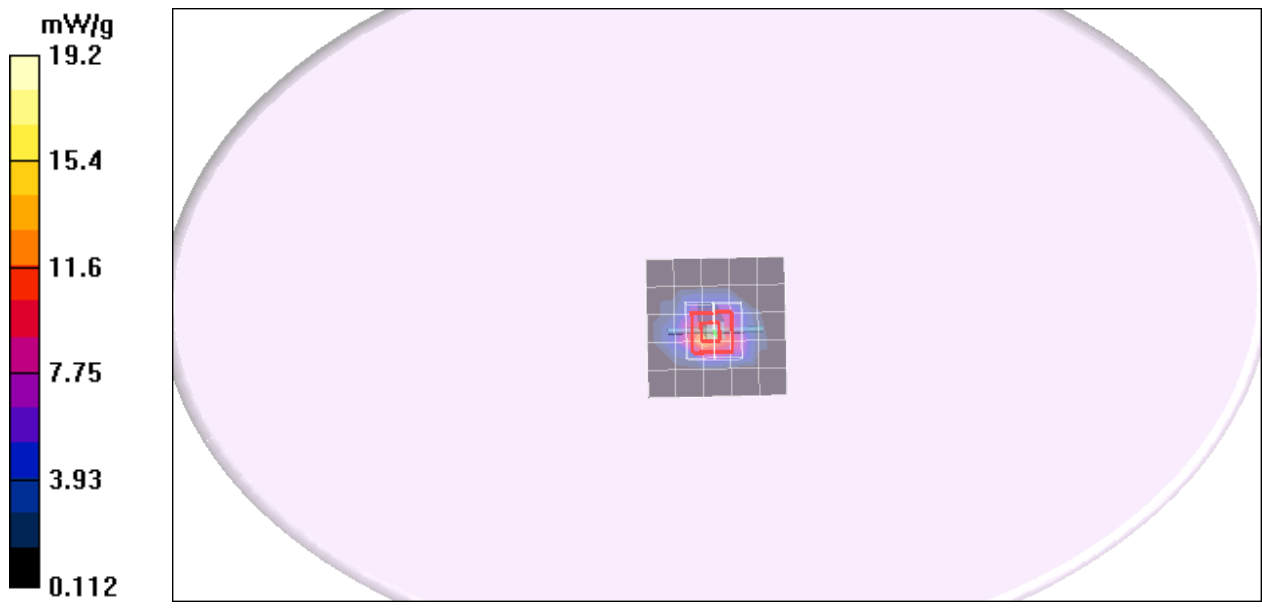

Test Laboratory: Compliance Certification Services Inc.

D5GHz V2 SN 1004

DUT: Dipole 5GHz ; Type: D5GHz V2; Serial: 1004

Communication System: CW5GHz; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.38$ mho/m; $\epsilon_r = 48.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.99, 3.99, 3.99);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Pin=250mW,d=10mm f=5200MHz/Area Scan (8x8x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 9.21 mW/g

Pin=250mW,d=10mm f=5200MHz/Zoom Scan (8x8x10)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 47.7 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 29.3 W/kg



SAR(1 g) = 8.12 mW/g; SAR(10 g) = 2.17 mW/g

Maximum value of SAR (measured) = 14.6 mW/g

Pin=250mW,d=10mm f=5200MHz/Z Scan (1x1x21): Measurement grid:

dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 32.5 mW/g

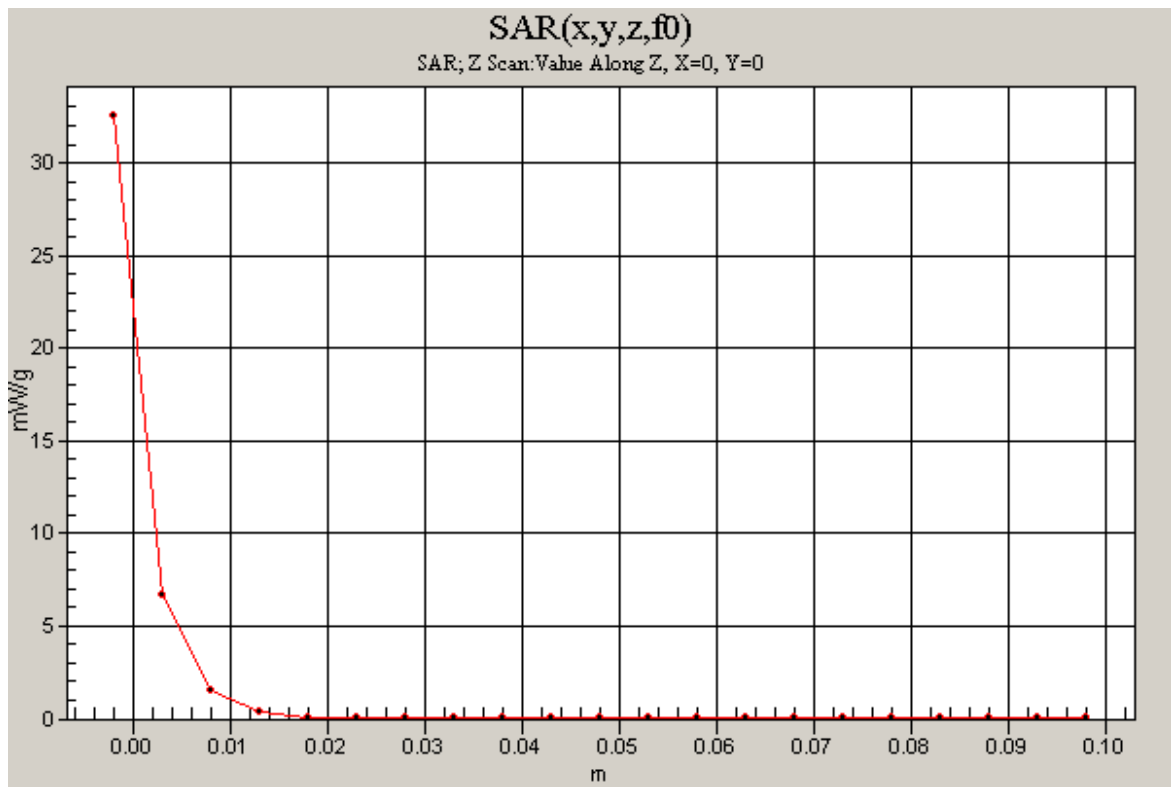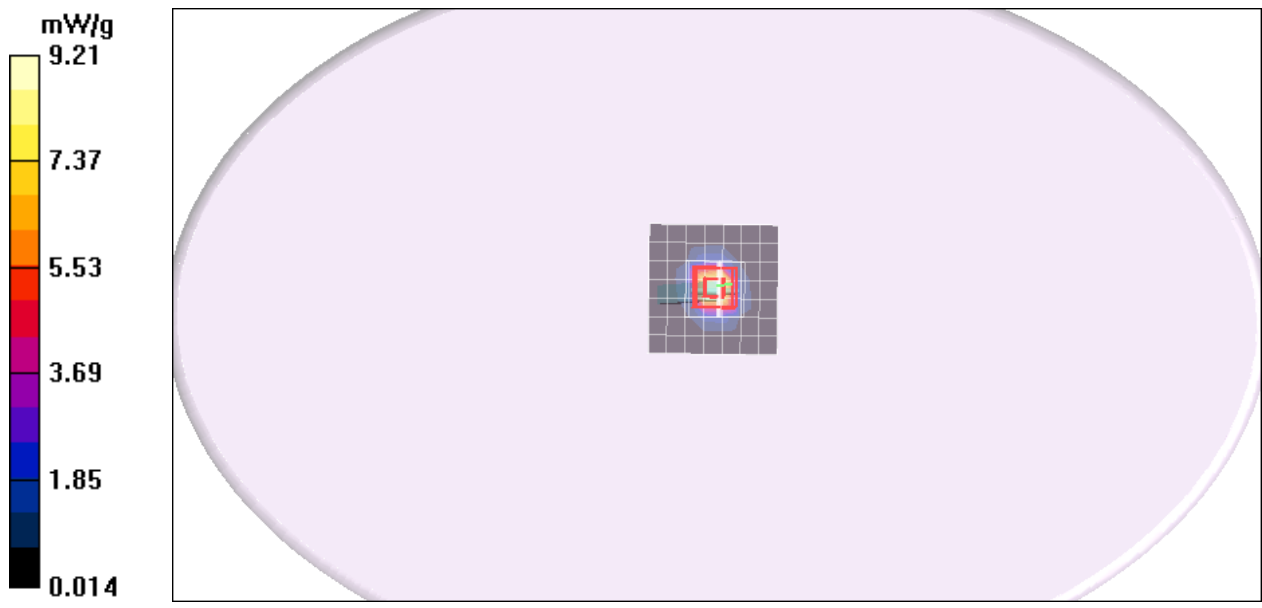

Test Laboratory: Compliance Certification Services Inc.

D5GHz V2 SN 1004

DUT: Dipole 5GHz ; Type: D5GHz V2; Serial: 1004

Communication System: CW5GHz; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800$ MHz; $\sigma = 6.24$ mho/m; $\epsilon_r = 47$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.77, 3.77, 3.77);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Pin=250mW, d=10mm f=5800MHz/Area Scan (8x8x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 9.01 mW/g

Pin=250mW, d=10mm f=5800MHz/Zoom Scan (8x8x10)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 52.8 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 33.1 W/kg



SAR(1 g) = 7.32 mW/g; SAR(10 g) = 2.03 mW/g

Maximum value of SAR (measured) = 13.8 mW/g

Pin=250mW, d=10mm f=5800MHz/Z Scan (1x1x21): Measurement grid:

dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 31.7 mW/g

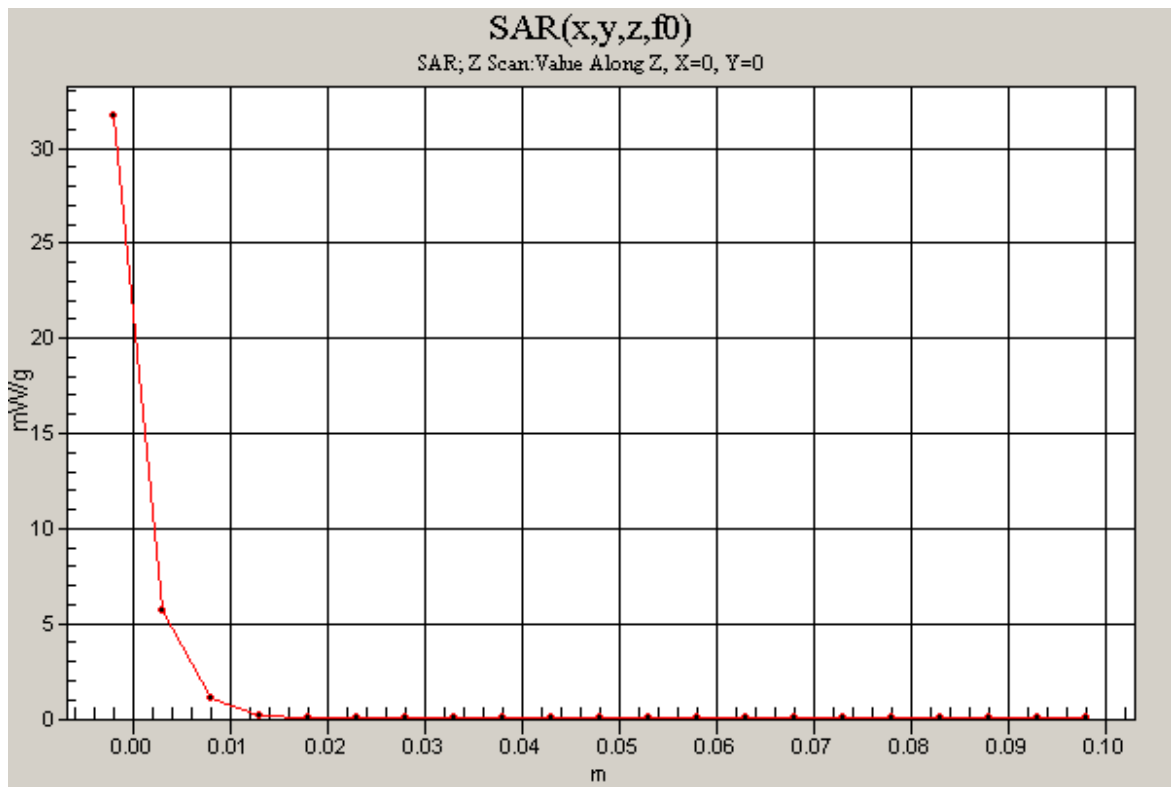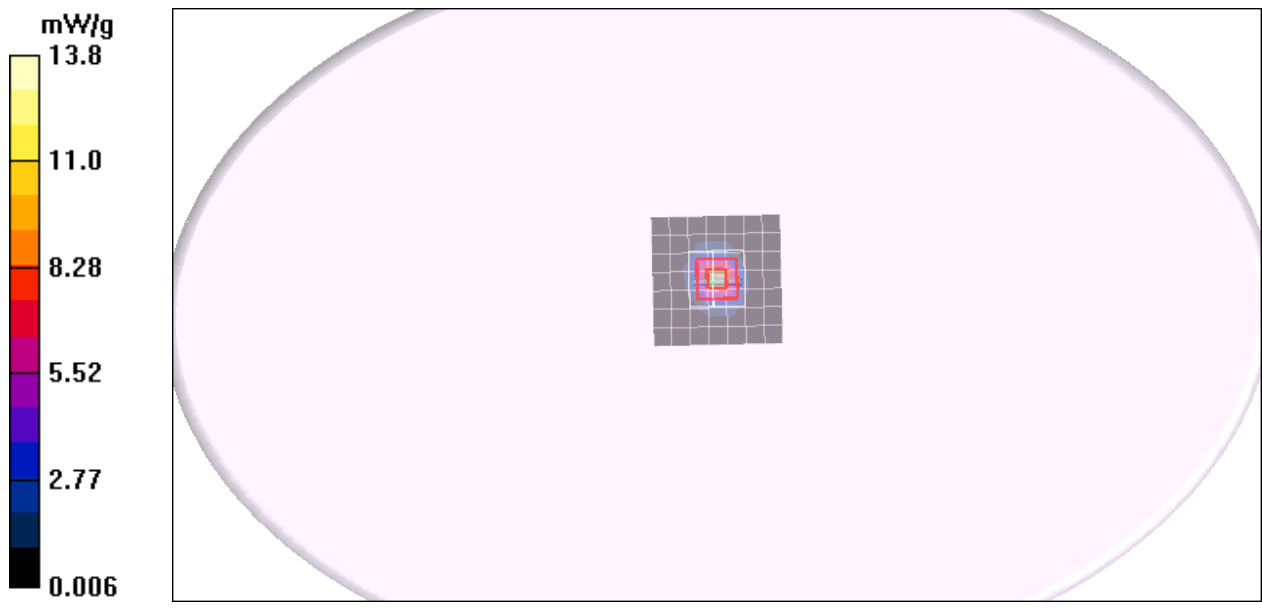

Test Laboratory: Compliance Certification Services Inc.

D5GHz V2 SN 1004

DUT: Dipole 5GHz ; Type: D5GHz V2; Serial: 1004

Communication System: CW5GHz; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.35$ mho/m; $\epsilon_r = 48.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.99, 3.99, 3.99);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Pin=250mW,d=10mm f=5200MHz/Area Scan (8x8x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 9.16 mW/g

Pin=250mW,d=10mm f=5200MHz/Zoom Scan (8x8x10)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 57.7 V/m; Power Drift = -0.072 dB

Peak SAR (extrapolated) = 29.2 W/kg



SAR(1 g) = 8.17 mW/g; SAR(10 g) = 2.15 mW/g

Maximum value of SAR (measured) = 14.5 mW/g

Pin=250mW,d=10mm f=5200MHz/Z Scan (1x1x21): Measurement grid:

dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 32.3 mW/g

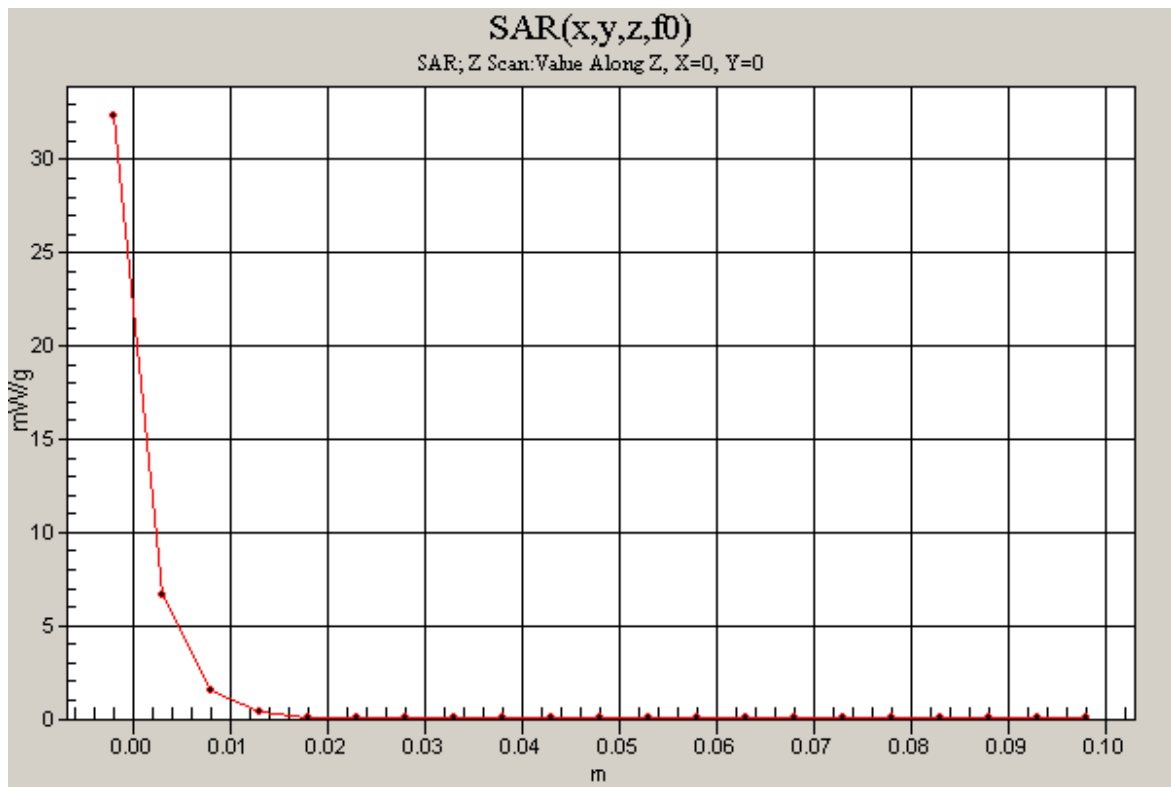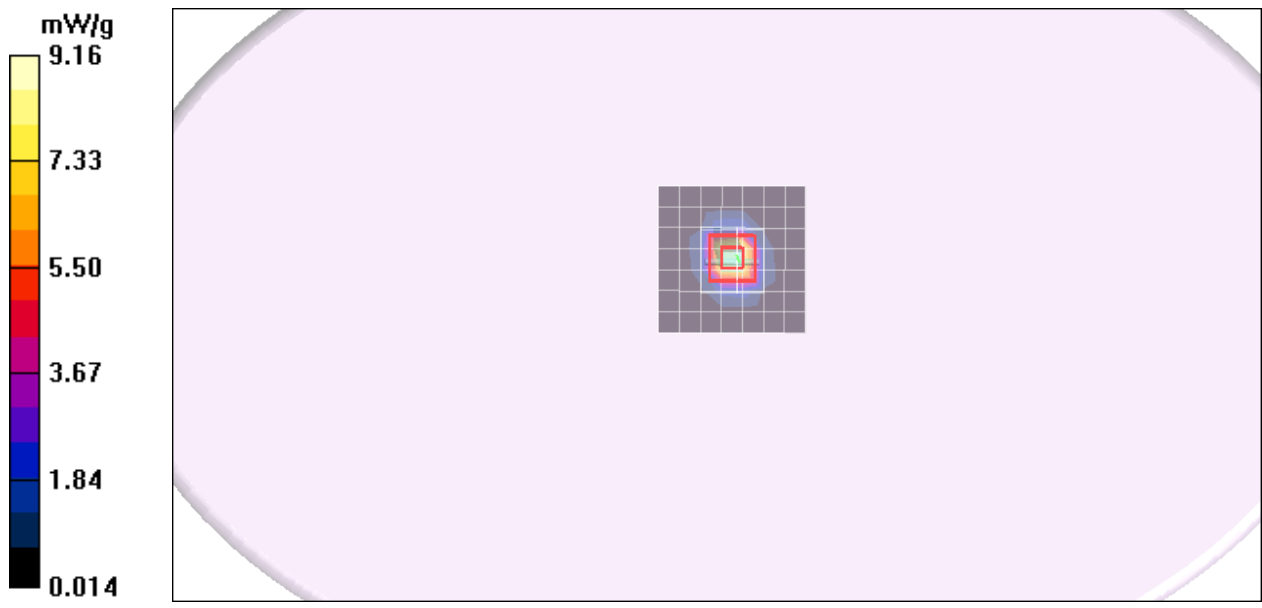

Test Laboratory: Compliance Certification Services Inc.

D5GHz V2 SN 1004

DUT: Dipole 5GHz ; Type: D5GHz V2; Serial: 1004

Communication System: CW5GHz; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800$ MHz; $\sigma = 6.22$ mho/m; $\epsilon_r = 47.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.77, 3.77, 3.77);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Pin=250mW,d=10mm f=5800MHz/Area Scan (8x8x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 8.98 mW/g

Pin=250mW,d=10mm f=5800MHz/Zoom Scan (8x8x10)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 53.9 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 33.3 W/kg



SAR(1 g) = 7.35 mW/g; SAR(10 g) = 2.04 mW/g

Maximum value of SAR (measured) = 13.8 mW/g

Pin=250mW,d=10mm f=5800MHz/Z Scan (1x1x21): Measurement grid:

dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 31.6 mW/g

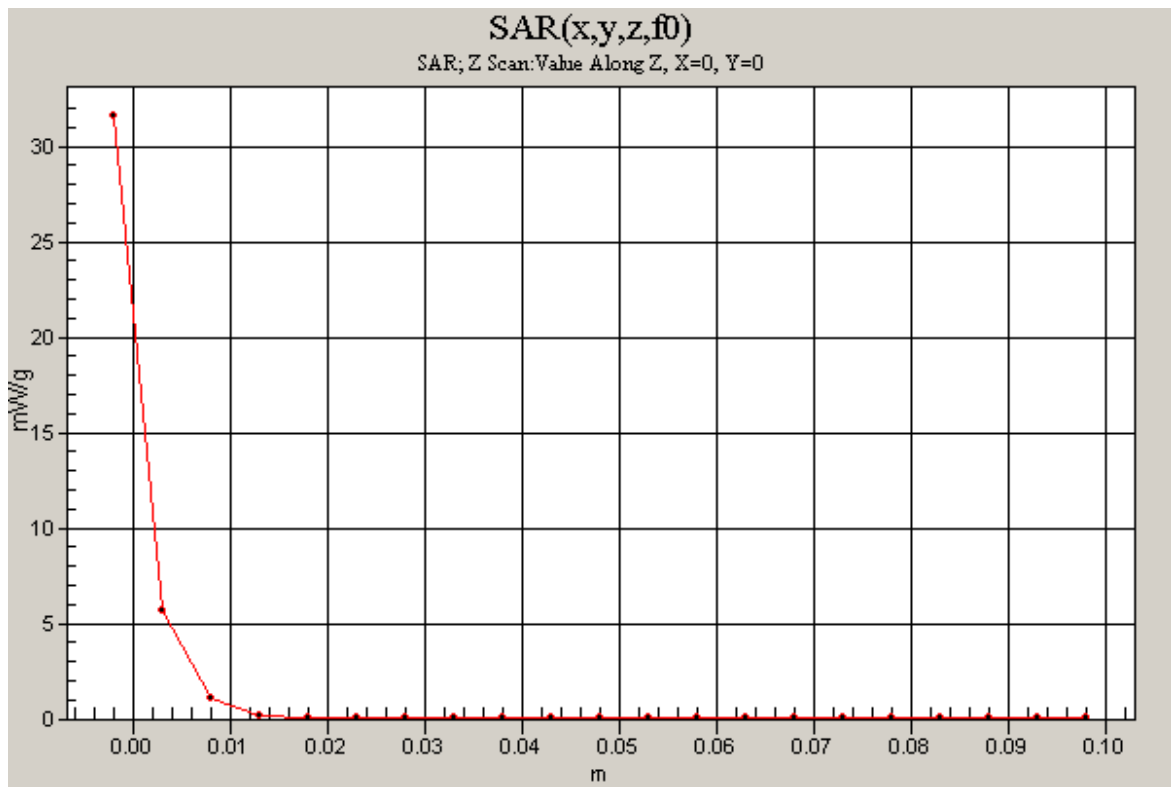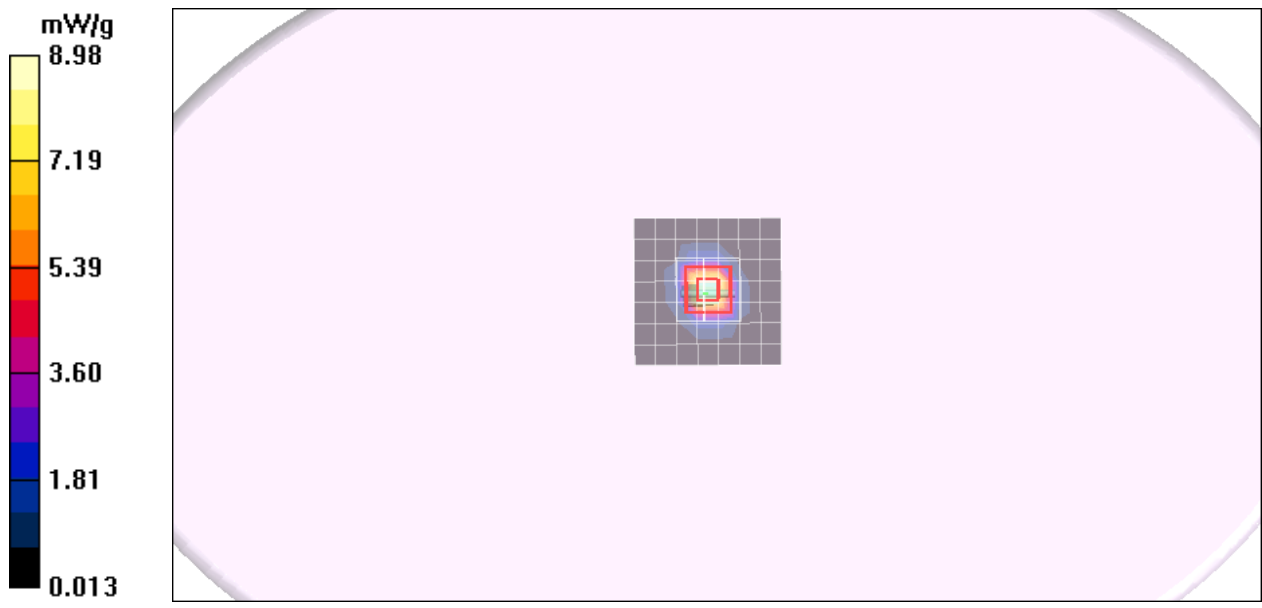

Test Laboratory: Compliance Certification Services Inc.

80211b Vertical Left Edge mode ant A

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.93, 5.93, 5.93);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Middle CH Rate 1M/Area Scan (6x19x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.070 mW/g

Middle CH Rate 1M/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=3mm

Reference Value = 0.530 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.097 W/kg

SAR(1 g) = 0.0068 mW/g; SAR(10 g) = 0.00215 mW/g

Maximum value of SAR (measured) = 0.078 mW/g

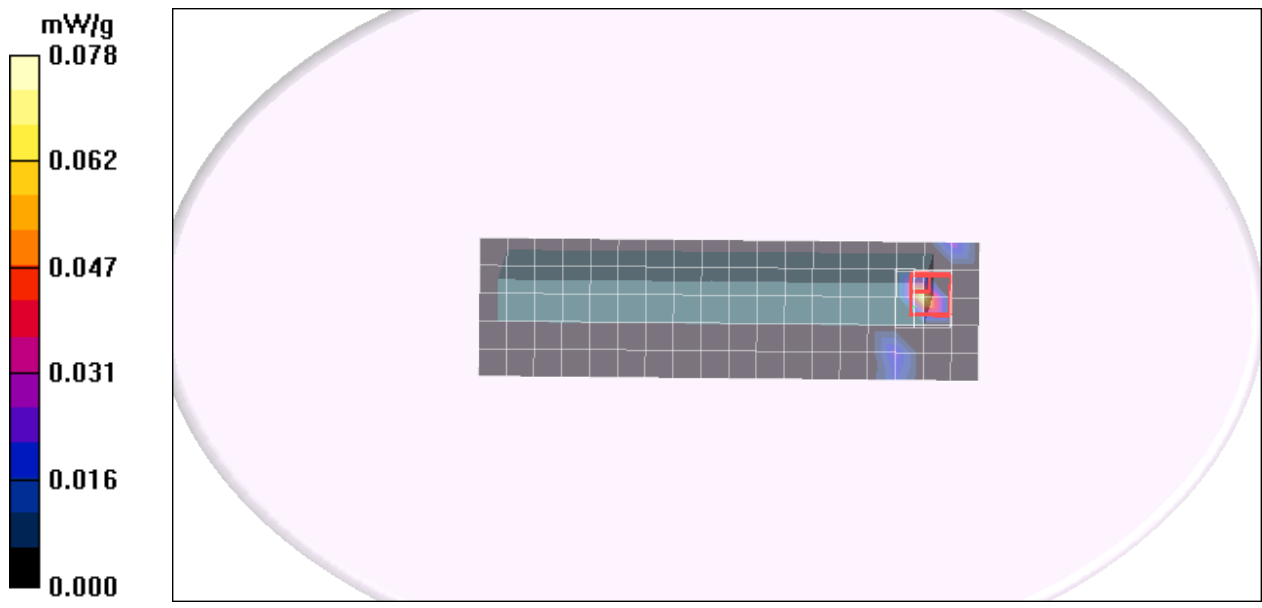

Test Laboratory: Compliance Certification Services Inc.

80211b Vertical Down mode ant C

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.93, 5.93, 5.93);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Middle CH Rate 1M/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.081 mW/g

Middle CH Rate 1M/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=3mm

Reference Value = 0.377 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 0.054 W/kg

SAR(1 g) = 0.00226 mW/g; SAR(10 g) = 0.0007 mW/g

Maximum value of SAR (measured) = 0.031 mW/g

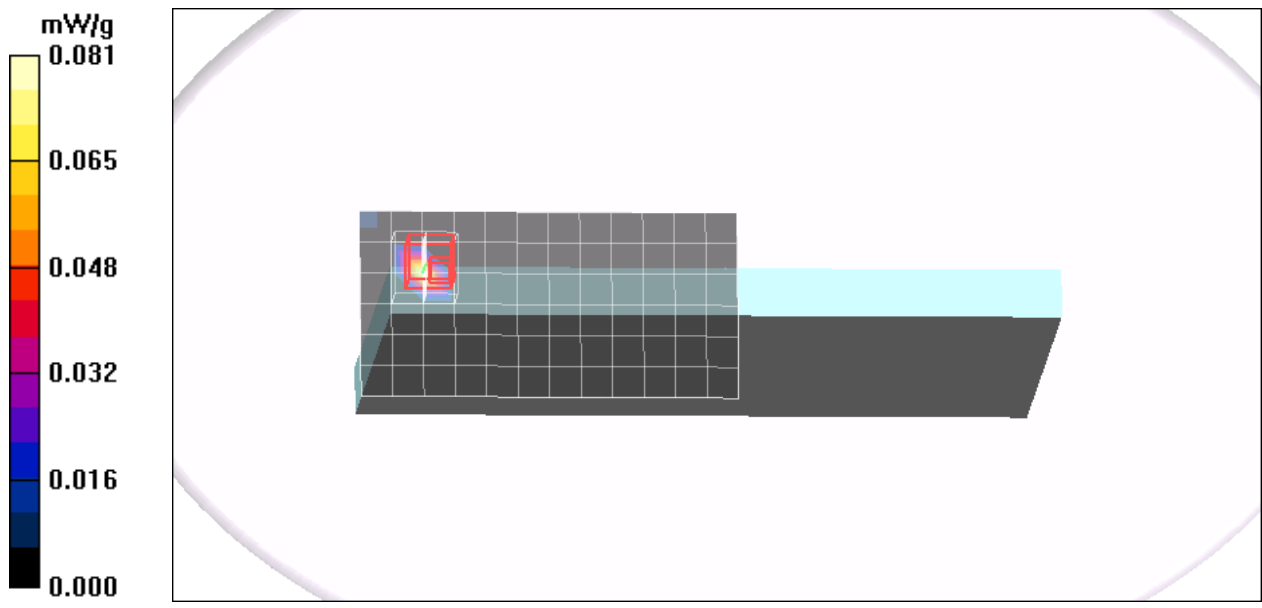

Test Laboratory: Compliance Certification Services Inc.

80211g Vertical Left Edge mode ant A

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.93, 5.93, 5.93);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

A Middle CH Rate 6M ant A/Area Scan (6x20x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.041 mW/g

A Middle CH Rate 6M ant A/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=3$ mm

Reference Value = 0.703 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 0.104 W/kg

SAR(1 g) = 0.00222 mW/g; SAR(10 g) = 0.000549 mW/g

Maximum value of SAR (measured) = 0.054 mW/g

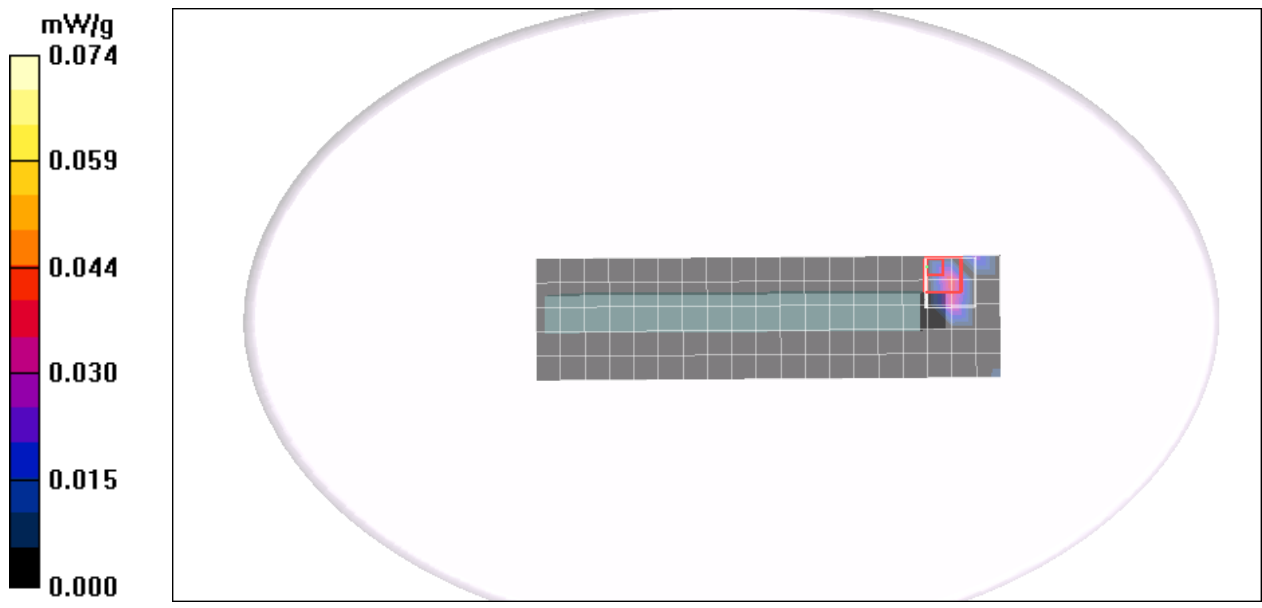

Test Laboratory: Compliance Certification Services Inc.

80211g Vertical Down mode ant C

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.93, 5.93, 5.93);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Middle CH Rate 6M/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.008 mW/g

Middle CH Rate 6M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 0.354 V/m; Power Drift = -0.123 dB

Peak SAR (extrapolated) = 0.010 W/kg

SAR(1 g) = 0.000388 mW/g; SAR(10 g) = 0.00015 mW/g

Maximum value of SAR (measured) = 0.007 mW/g


Middle CH Rate 6M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 0.354 V/m; Power Drift = -0.123 dB

Peak SAR (extrapolated) = 0.010 W/kg

SAR(1 g) = 0.000267 mW/g; SAR(10 g) = 0.00013 mW/g

Maximum value of SAR (measured) = 0.006 mW/g

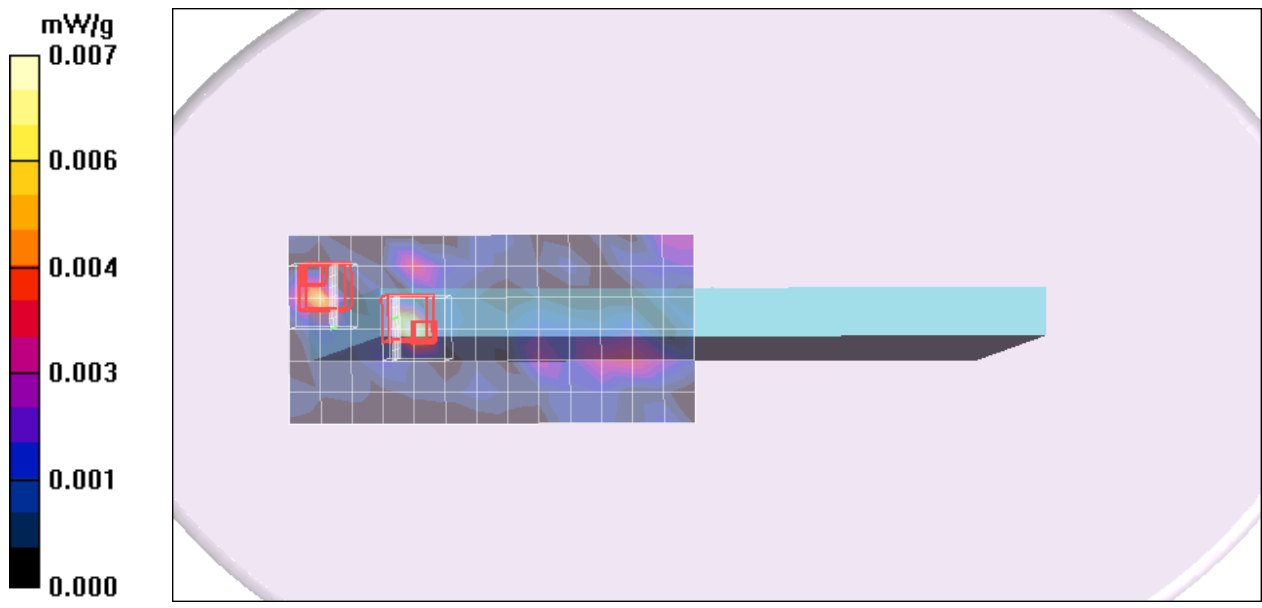

Test Laboratory: Compliance Certification Services Inc.

80211g Vertical Left Edge mode ant A HT20

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11g WLAN HT20; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.93, 5.93, 5.93);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Middle CH Rate 6.5M/Area Scan (7x19x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.024 mW/g

Middle CH Rate 6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=3mm

Reference Value = 0.922 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.019 W/kg

SAR(1 g) = 0.000589 mW/g; SAR(10 g) = 0.000109 mW/g

Maximum value of SAR (measured) = 0.019 mW/g

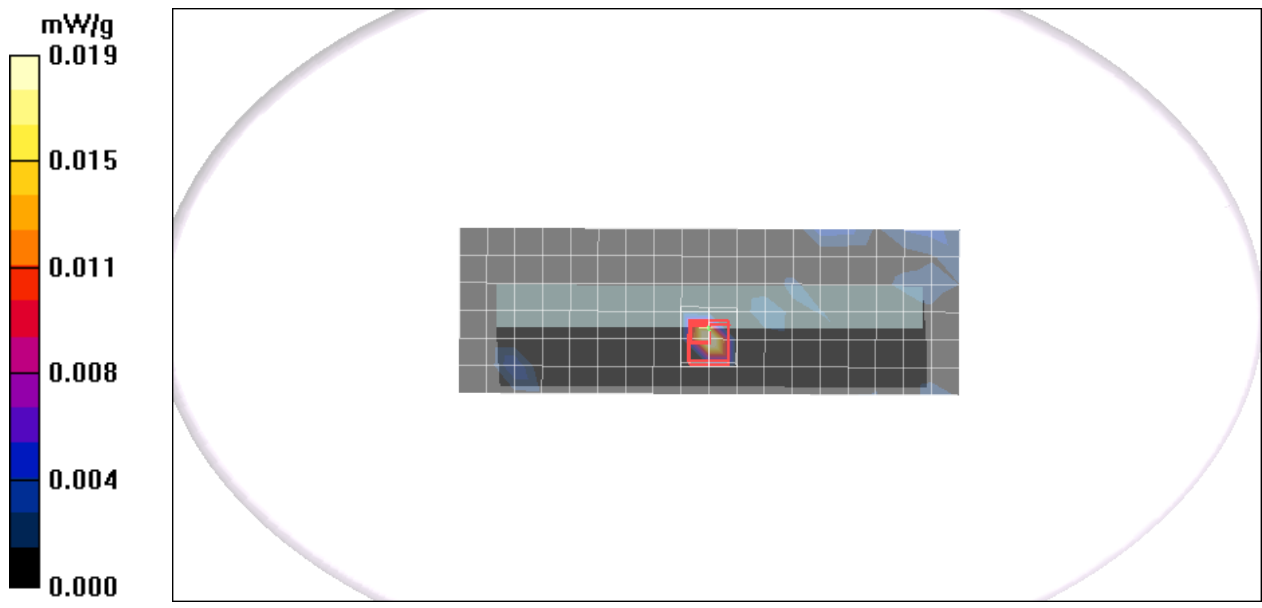

Test Laboratory: Compliance Certification Services Inc.

80211g Vertical Down mode HT20 ant C

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.93, 5.93, 5.93);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Middle CH Rate 6.5M/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.004 mW/g

Middle CH Rate 6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=3mm

Reference Value = 0.000 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.008 W/kg

SAR(1 g) = 0.000487 mW/g; SAR(10 g) = 0.000137 mW/g

Maximum value of SAR (measured) = 0.007 mW/g

Middle CH Rate 6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid:


dx=5mm, dy=5mm, dz=3mm

Reference Value = 0.000 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.011 W/kg

SAR(1 g) = 0.00133 mW/g; SAR(10 g) = 0.000267 mW/g

Maximum value of SAR (measured) = 0.007 mW/g

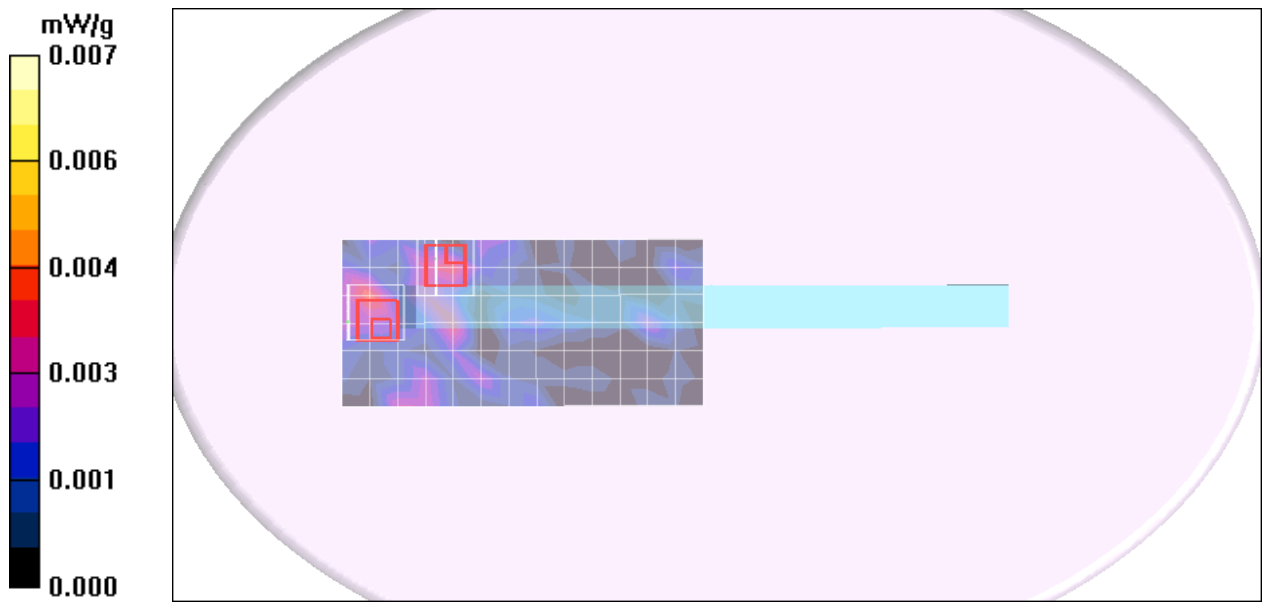

Test Laboratory: Compliance Certification Services Inc.

80211g Vertical Left Edge mode ant A HT40

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11g WLAN HT40; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.93, 5.93, 5.93);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Middle CH Rate 13.5M/Area Scan (7x18x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.003 mW/g


Middle CH Rate 13.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 0.816 V/m; Power Drift = -0.030 dB

Peak SAR (extrapolated) = 0.055 W/kg

SAR(1 g) = 0.00181 mW/g; SAR(10 g) = 0.000338 mW/g

Maximum value of SAR (measured) = 0.026 mW/g

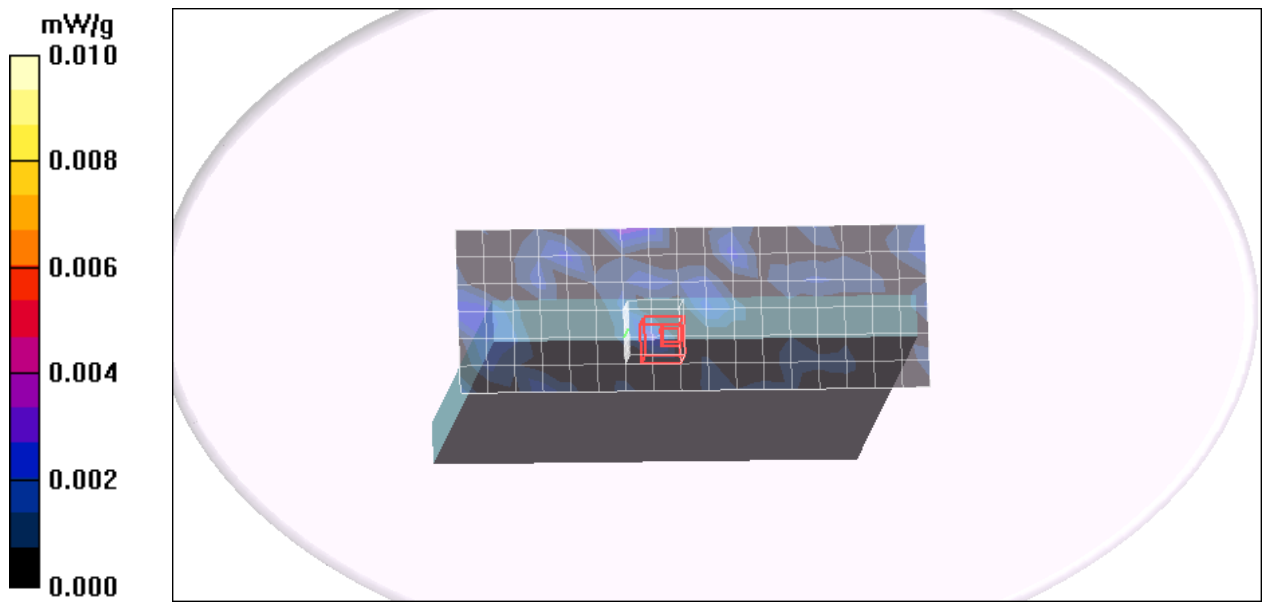

Test Laboratory: Compliance Certification Services Inc.

80211g Vertical Down mode HT40 ant C

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.93, 5.93, 5.93);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Middle CH Rate 1M/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.003 mW/g

Middle CH Rate 1M/Zoom Scan (7x7x9)/Cube 1: Measurement grid:


dx=5mm, dy=5mm, dz=3mm

Reference Value = 0.000 V/m; Power Drift = -0.000 dB

Peak SAR (extrapolated) = 0.008 W/kg

SAR(1 g) = 0.000584 mW/g; SAR(10 g) = 0.000246 mW/g

Maximum value of SAR (measured) = 0.008 mW/g

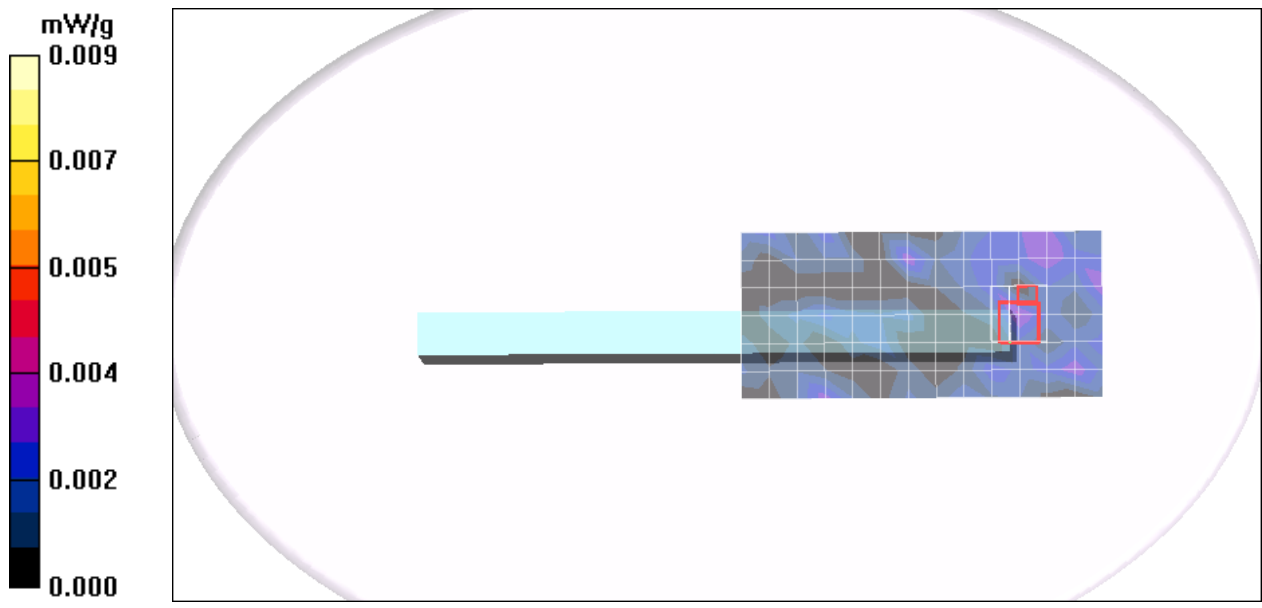

Test Laboratory: Compliance Certification Services Inc.

80211b Bottom Flat mode ant A

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.93, 5.93, 5.93);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

A Middle CH Rate 1M ant A/Area Scan (8x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.013 mW/g

A Middle CH Rate 1M ant A/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=3$ mm

Reference Value = 0.558 V/m; Power Drift = -0.056 dB

Peak SAR (extrapolated) = 0.068 W/kg

SAR(1 g) = 0.00253 mW/g; SAR(10 g) = 0.000532 mW/g

Maximum value of SAR (measured) = 0.028 mW/g

A Middle CH Rate 1M ant A/Zoom Scan (7x7x9)/Cube 1:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=3$ mm

Reference Value = 0.558 V/m; Power Drift = -0.056 dB

Peak SAR (extrapolated) = 0.072 W/kg

SAR(1 g) = 0.00168 mW/g; SAR(10 g) = 0.000466 mW/g

Maximum value of SAR (measured) = 0.046 mW/g

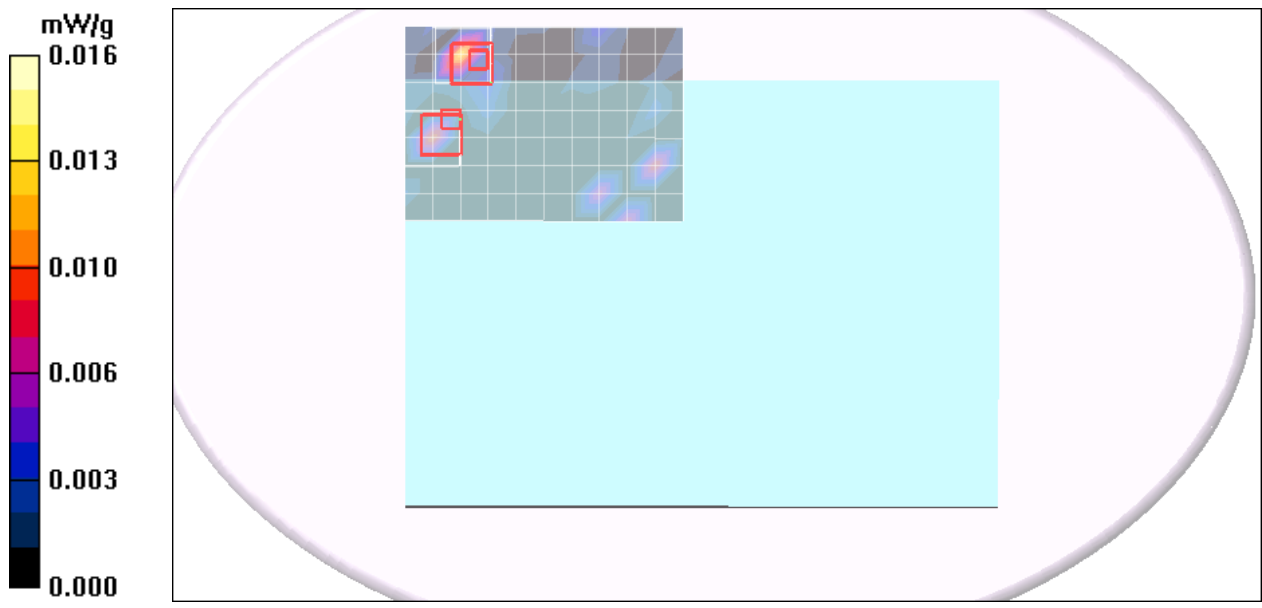

Test Laboratory: Compliance Certification Services Inc.

80211b Bottom Flat mode ant C

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.93, 5.93, 5.93);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Middle CH Rate 1M/Area Scan (19x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.070 mW/g

Middle CH Rate 1M/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=3mm

Reference Value = 0.000 V/m; Power Drift = -0.109 dB

Peak SAR (extrapolated) = 0.418 W/kg

SAR(1 g) = 0.024 mW/g; SAR(10 g) = 0.00537 mW/g

Maximum value of SAR (measured) = 0.194 mW/g

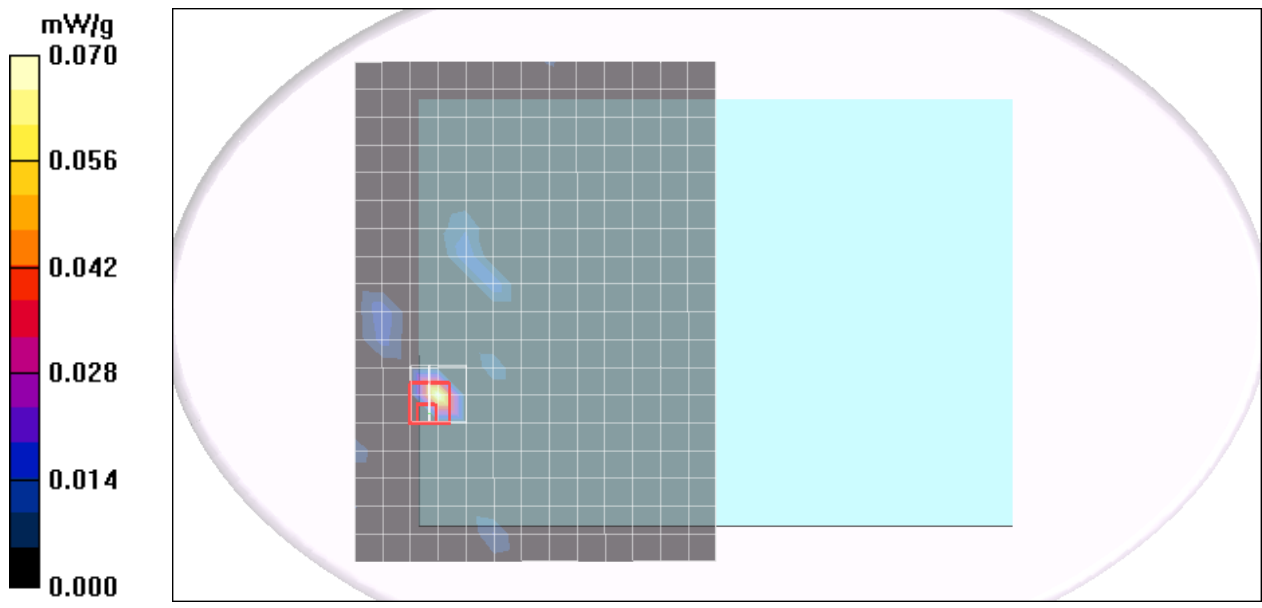

Test Laboratory: Compliance Certification Services Inc.

80211g Bottom Flat mode ant A

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.93, 5.93, 5.93);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

A Middle CH Rate 1M ant A/Area Scan (9x12x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.029 mW/g

A Middle CH Rate 1M ant A/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 0.000 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.033 W/kg

SAR(1 g) = 0.0019 mW/g; SAR(10 g) = 0.000315 mW/g

Maximum value of SAR (measured) = 0.019 mW/g

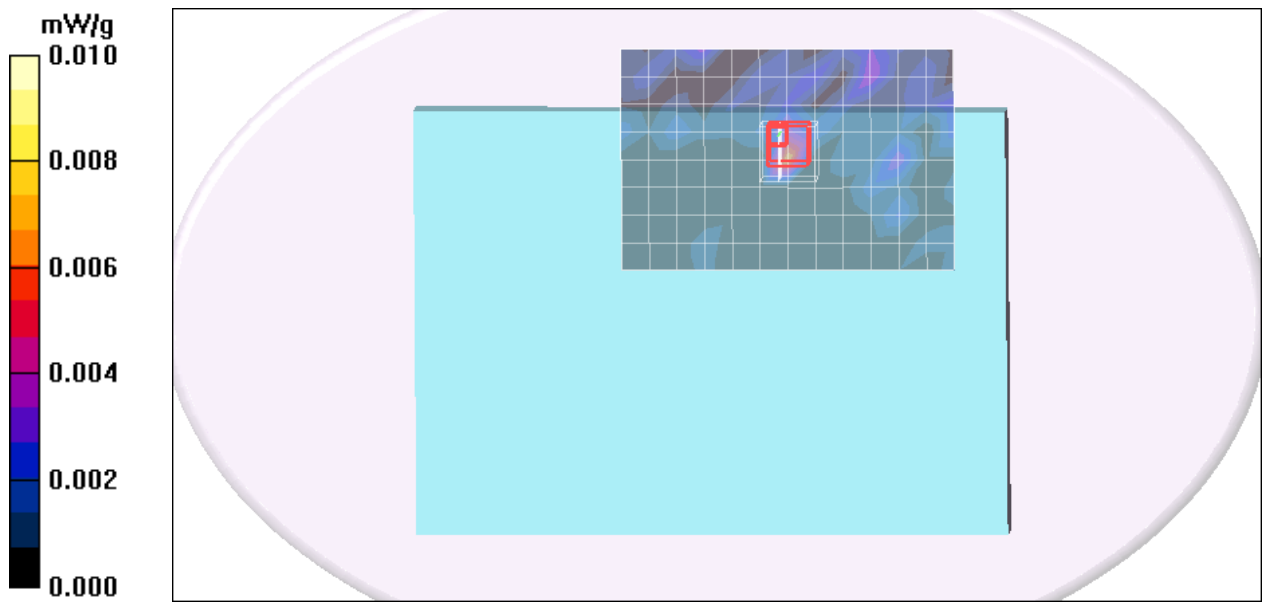

Test Laboratory: Compliance Certification Services Inc.

80211g Bottom Flat mode ant C

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.93, 5.93, 5.93);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Middle CH Rate 6M/Area Scan (19x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.019 mW/g

Middle CH Rate 6M/Zoom Scan (7x7x9)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=3mm

Reference Value = 0.000 V/m; Power Drift = -0.056 dB

Peak SAR (extrapolated) = 0.019 W/kg

SAR(1 g) = 0.00312 mW/g; SAR(10 g) = 0.0015 mW/g

Maximum value of SAR (measured) = 0.017 mW/g

Middle CH Rate 6M/Zoom Scan (7x7x9)/Cube 1: Measurement grid:


dx=5mm, dy=5mm, dz=3mm

Reference Value = 0.000 V/m; Power Drift = -0.056 dB

Peak SAR (extrapolated) = 0.043 W/kg

SAR(1 g) = 0.00297 mW/g; SAR(10 g) = 0.0014 mW/g

Maximum value of SAR (measured) = 0.015 mW/g

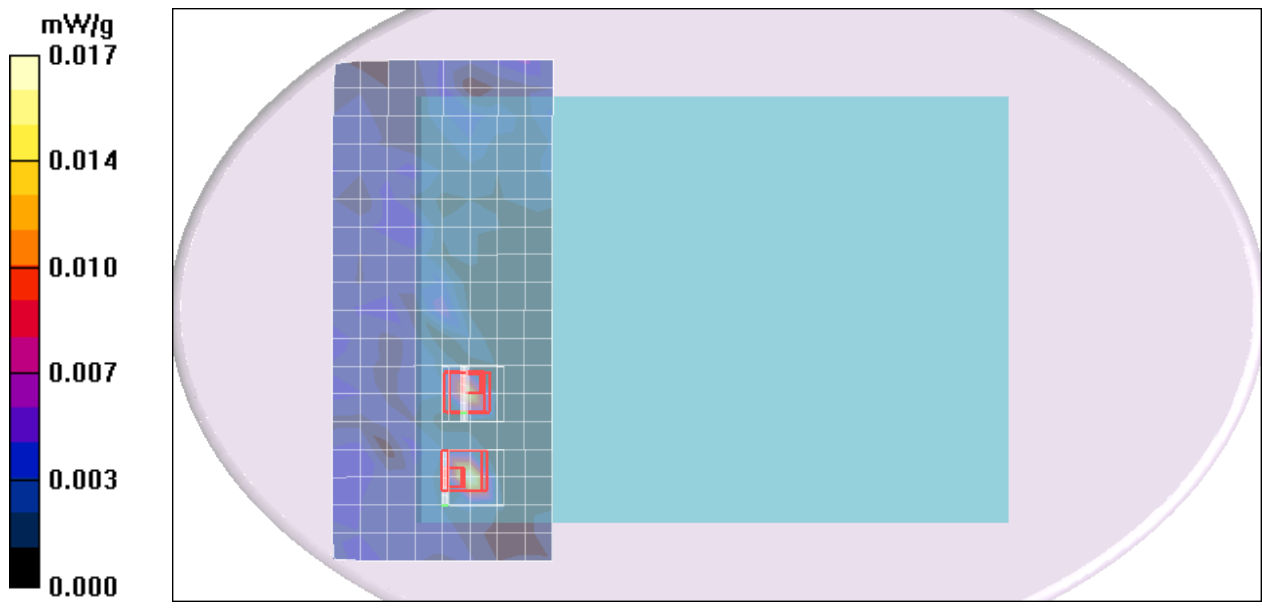

Test Laboratory: Compliance Certification Services Inc.

80211g Bottom Flat mode ant B

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.93, 5.93, 5.93);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

B Middle CH Rate 1M ant C/Area Scan (9x13x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.007 mW/g

B Middle CH Rate 1M ant C/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 0.000 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.021 W/kg

SAR(1 g) = 0.00115 mW/g; SAR(10 g) = 0.000322 mW/g

Maximum value of SAR (measured) = 0.015 mW/g

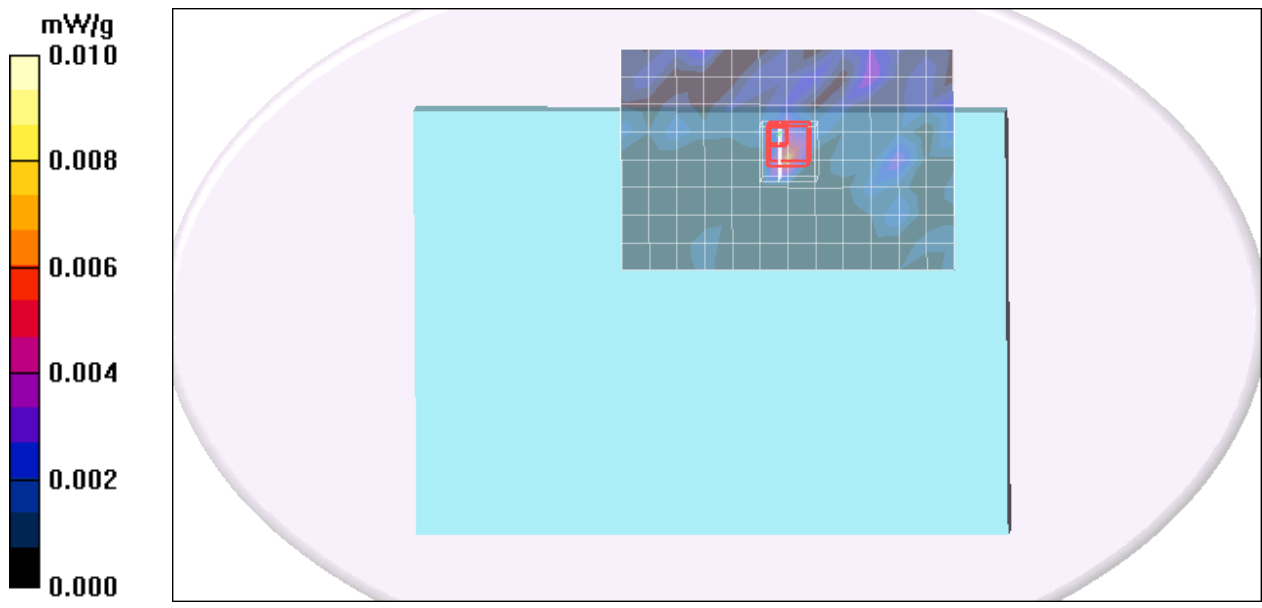

Test Laboratory: Compliance Certification Services Inc.

80211g Bottom Flat mode ant A HT20

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11g WLAN HT20; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.93, 5.93, 5.93);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

A Middle CH Rate 6.5M/Area Scan (11x25x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.011 mW/g

A Middle CH Rate 6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


$dx=5$ mm, $dy=5$ mm, $dz=3$ mm

Reference Value = 0.657 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 0.017 W/kg

SAR(1 g) = 0.000678 mW/g; SAR(10 g) = 0.000213 mW/g

Maximum value of SAR (measured) = 0.007 mW/g

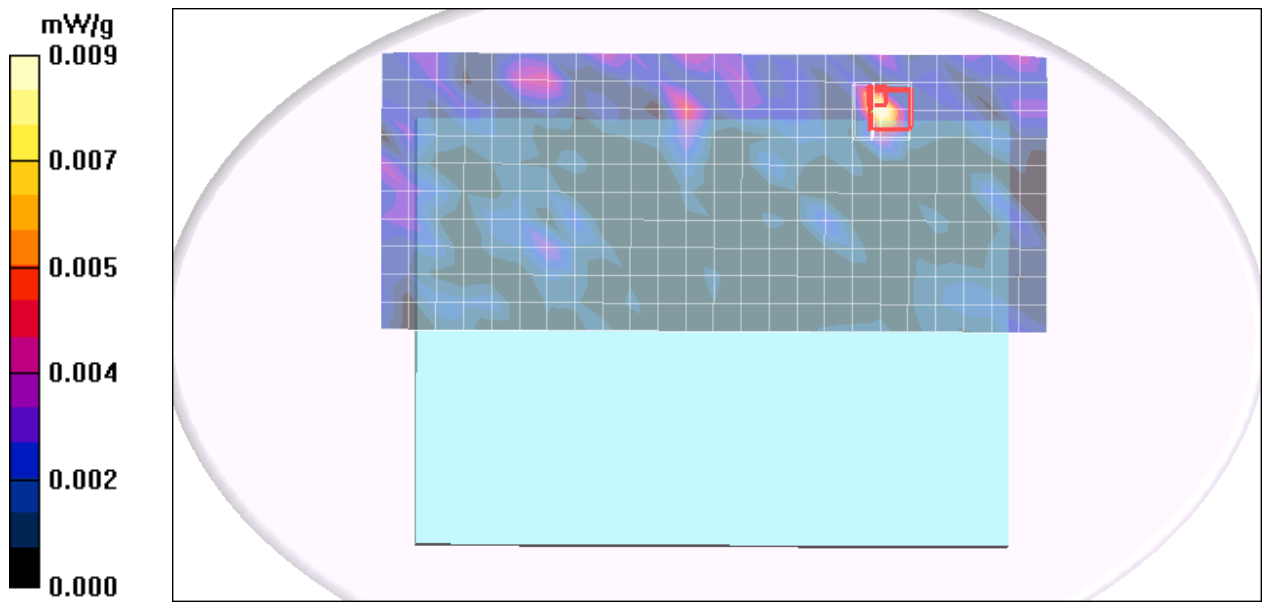

Test Laboratory: Compliance Certification Services Inc.

80211g Bottom Flat mode ant C HT20

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11g WLAN HT20; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.93, 5.93, 5.93);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

C Middle CH Rate 6.5M/Area Scan (19x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.007 mW/g


C Middle CH Rate 6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 0.000 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 0.021 W/kg

SAR(1 g) = 0.0013 mW/g; SAR(10 g) = 0.000548 mW/g

Maximum value of SAR (measured) = 0.014 mW/g

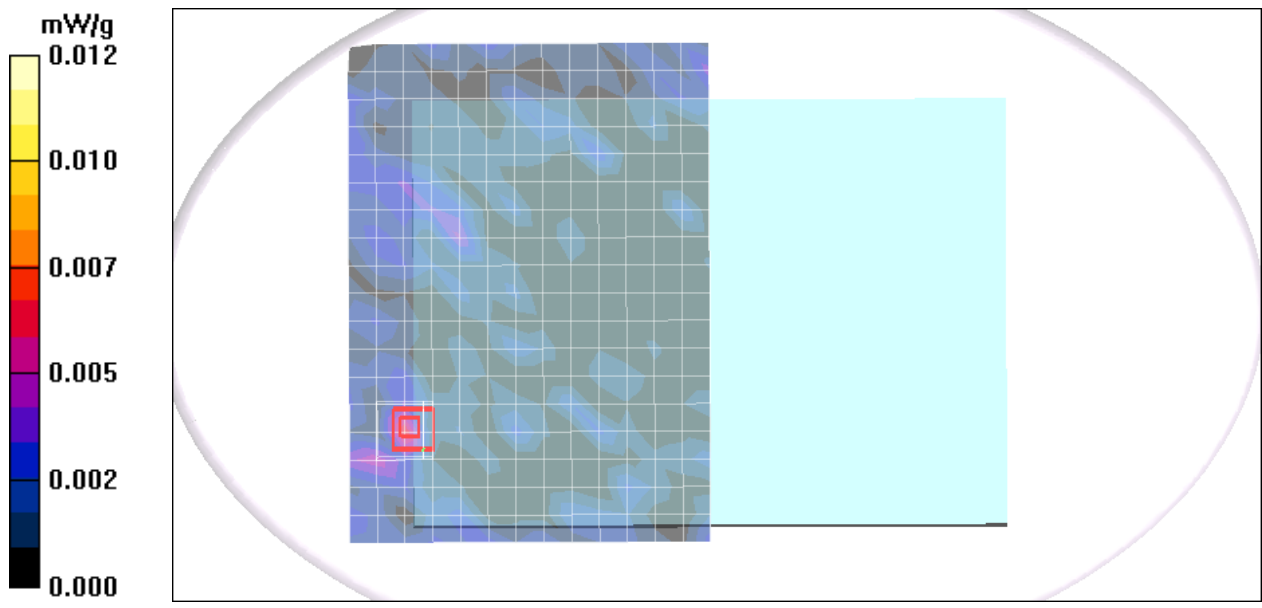

Test Laboratory: Compliance Certification Services Inc.

80211g Bottom Flat mode ant B HT20

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11g WLAN HT20; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.93, 5.93, 5.93);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

B Middle CH Rate 6.5M/Area Scan (11x25x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.005 mW/g

B Middle CH Rate 6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 0.000 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 0.019 W/kg

SAR(1 g) = 0.000436 mW/g; SAR(10 g) = 0.000155 mW/g

Maximum value of SAR (measured) = 0.007 mW/g


B Middle CH Rate 6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 0.000 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 0.009 W/kg

SAR(1 g) = 0.000859 mW/g; SAR(10 g) = 0.000288 mW/g

Maximum value of SAR (measured) = 0.007 mW/g

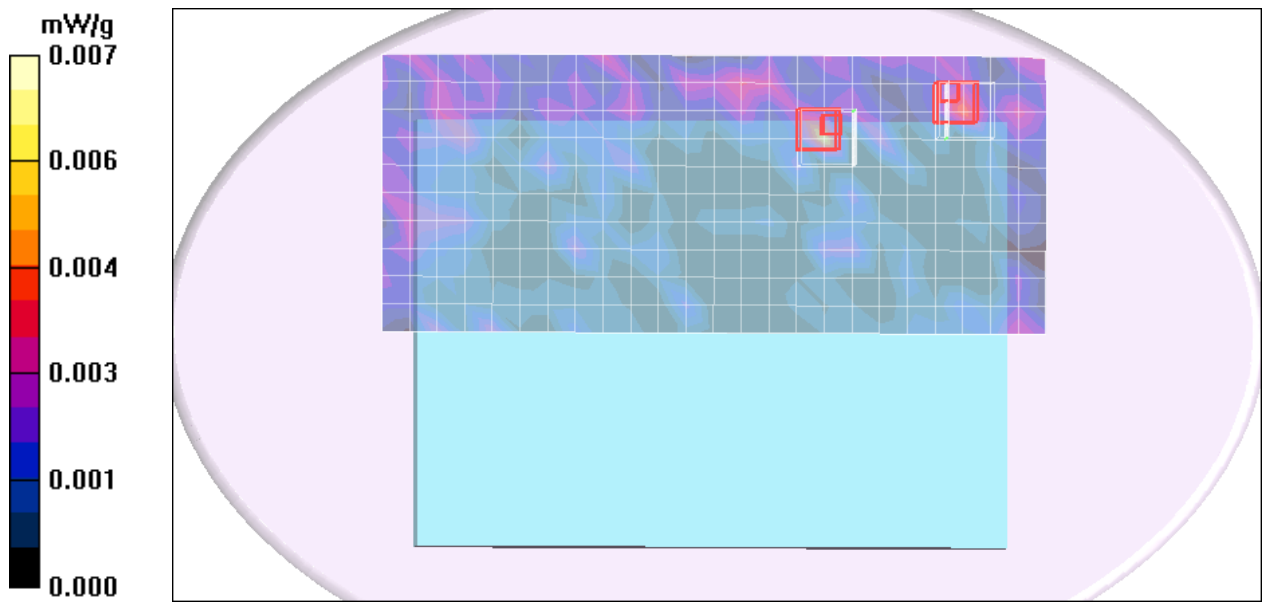

Test Laboratory: Compliance Certification Services Inc.

80211g Bottom Flat mode ant A HT40

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11g WLAN HT40; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.93, 5.93, 5.93);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

A Middle CH Rate 13.5M/Area Scan (11x25x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.008 mW/g

A Middle CH Rate 13.5M/Zoom Scan (7x7x9)/Cube 0: Measurement


grid: $dx=5$ mm, $dy=5$ mm, $dz=3$ mm

Reference Value = 0.000 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.007 W/kg

SAR(1 g) = 0.000802 mW/g; SAR(10 g) = 0.000384 mW/g

Maximum value of SAR (measured) = 0.007 mW/g

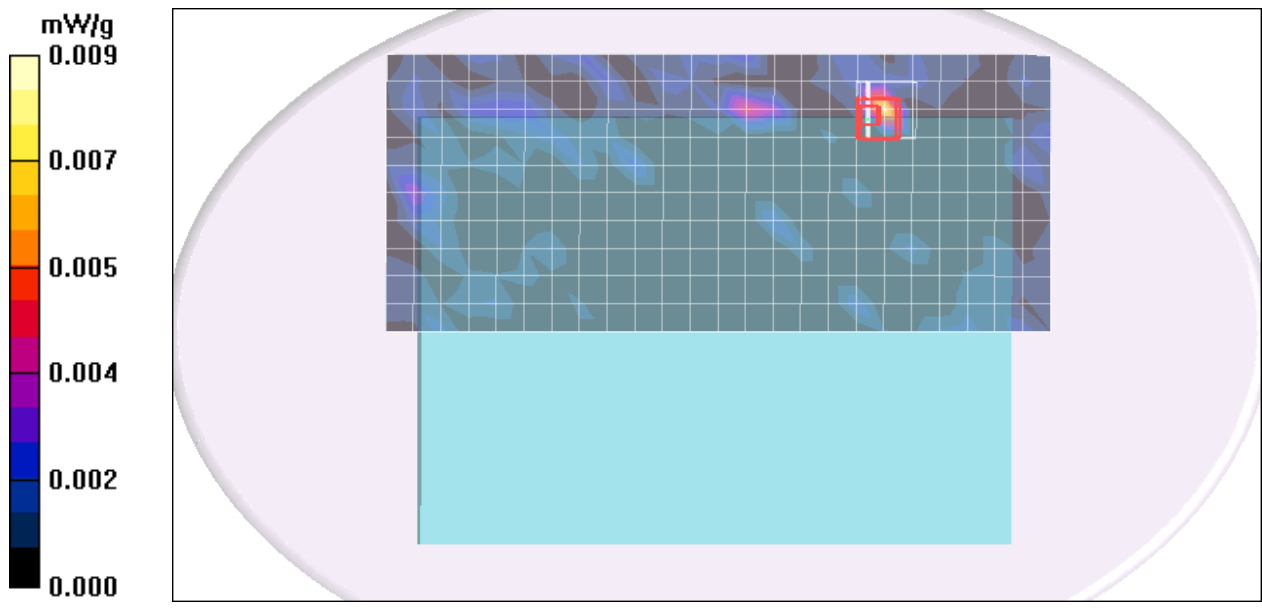

Test Laboratory: Compliance Certification Services Inc.

80211g Bottom Flat mode ant C HT40

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11g WLAN HT40; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.93, 5.93, 5.93);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

C Middle CH Rate 13.5M/Area Scan (19x14x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.006 mW/g

C Middle CH Rate 13.5M/Zoom Scan (7x7x9)/Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 0.305 V/m; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 0.016 W/kg

SAR(1 g) = 0.00191 mW/g; SAR(10 g) = 0.00106 mW/g

Maximum value of SAR (measured) = 0.013 mW/g

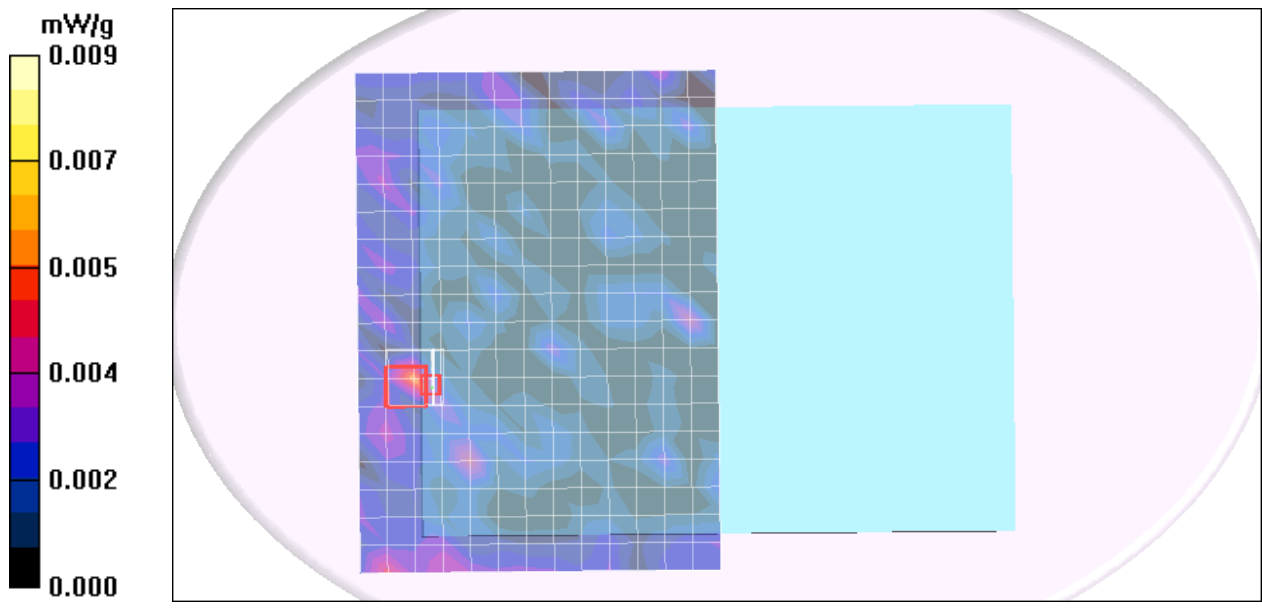

Test Laboratory: Compliance Certification Services Inc.

80211g Bottom Flat mode ant B HT40

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11g WLAN HT40; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.93, 5.93, 5.93);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

B Middle CH Rate 13.5M/Area Scan (11x25x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.004 mW/g

B Middle CH Rate 13.5M/Zoom Scan (7x7x9)/Cube 0: Measurement

grid: $dx=5$ mm, $dy=5$ mm, $dz=3$ mm

Reference Value = 0.000 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.005 W/kg

SAR(1 g) = 0.00226 mW/g; SAR(10 g) = 0.00115 mW/g

Maximum value of SAR (measured) = 0.005 mW/g

B Middle CH Rate 13.5M/Zoom Scan (7x7x9)/Cube 1: Measurement


grid: $dx=5$ mm, $dy=5$ mm, $dz=3$ mm

Reference Value = 0.000 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.006 W/kg

SAR(1 g) = 0.00131 mW/g; SAR(10 g) = 0.000502 mW/g

Maximum value of SAR (measured) = 0.005 mW/g

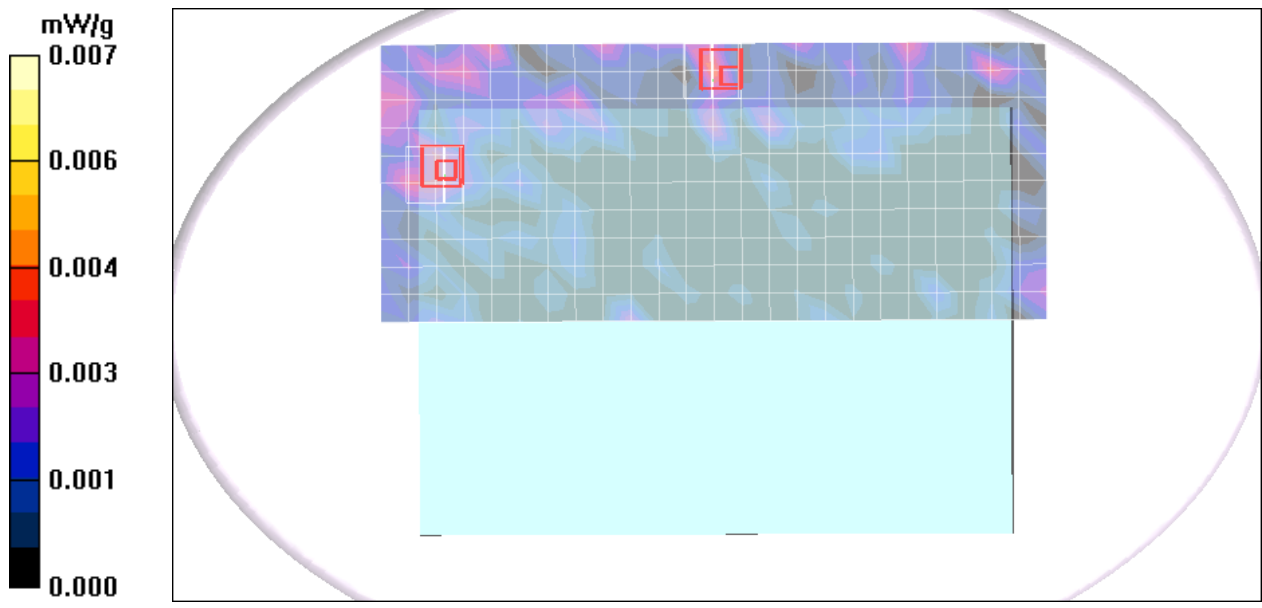

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Left Edge Touch mode ant A

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.38$ mho/m; $\epsilon_r = 48.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.99, 3.99, 3.99);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

UNII CH5200 Rate=6M bit ant A/Area Scan (9x17x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.049 mW/g

UNII CH5200 Rate=6M bit ant A/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.650 V/m; Power Drift = -0.123 dB

Peak SAR (extrapolated) = 0.154 W/kg

SAR(1 g) = 0.029 mW/g; SAR(10 g) = 0.012 mW/g

Maximum value of SAR (measured) = 0.051 mW/g

UNII CH5200 Rate=6M bit ant A/Zoom Scan (7x7x9)/Cube 1:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.650 V/m; Power Drift = -0.123 dB

Peak SAR (extrapolated) = 0.149 W/kg

SAR(1 g) = 0.024 mW/g; SAR(10 g) = 0.010 mW/g

Maximum value of SAR (measured) = 0.054 mW/g

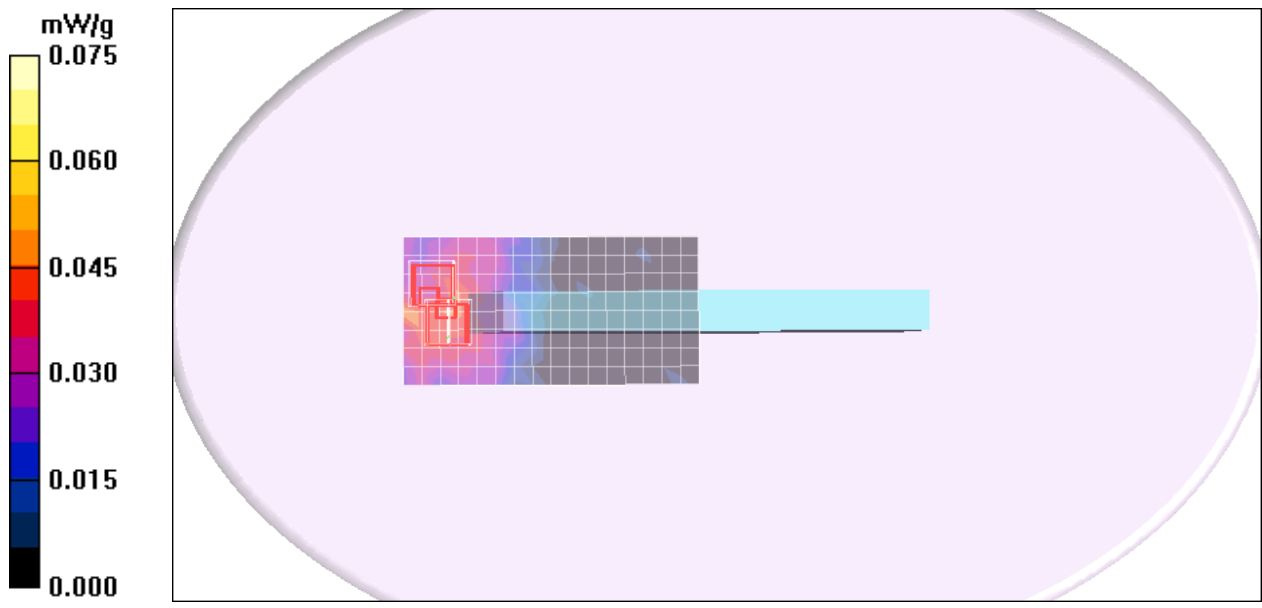

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Down Touch Edge mode ant C

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.35$ mho/m; $\epsilon_r = 48.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.99, 3.99, 3.99);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

C UNII CH5200 Rate=6M bit ant C/Area Scan (10x21x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.023 mW/g

C UNII CH5200 Rate=6M bit ant C/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.198 W/kg

SAR(1 g) = 0.020 mW/g; SAR(10 g) = 0.00755 mW/g

Maximum value of SAR (measured) = 0.026 mW/g

C UNII CH5200 Rate=6M bit ant C/Zoom Scan (7x7x9)/Cube 1:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.014 mW/g; SAR(10 g) = 0.0044 mW/g

Maximum value of SAR (measured) = 0.024 mW/g

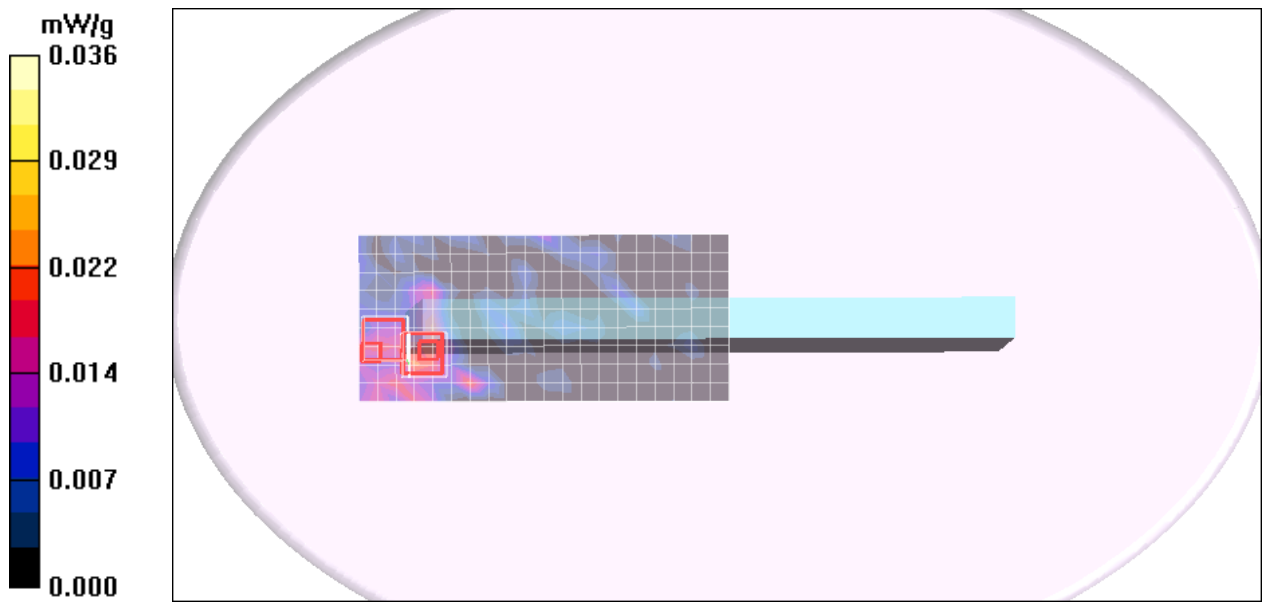

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Left Edge Touch mode ant A

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.5$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.72, 3.72, 3.72);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

UNII CH5280 Rate=6M bit ant A/Area Scan (9x17x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.062 mW/g

UNII CH5280 Rate=6M bit ant A/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.074 W/kg

SAR(1 g) = 0.023 mW/g; SAR(10 g) = 0.00988 mW/g

Maximum value of SAR (measured) = 0.053 mW/g

UNII CH5280 Rate=6M bit ant A/Zoom Scan (7x7x9)/Cube 1:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.180 W/kg

SAR(1 g) = 0.033 mW/g; SAR(10 g) = 0.014 mW/g

Maximum value of SAR (measured) = 0.061 mW/g

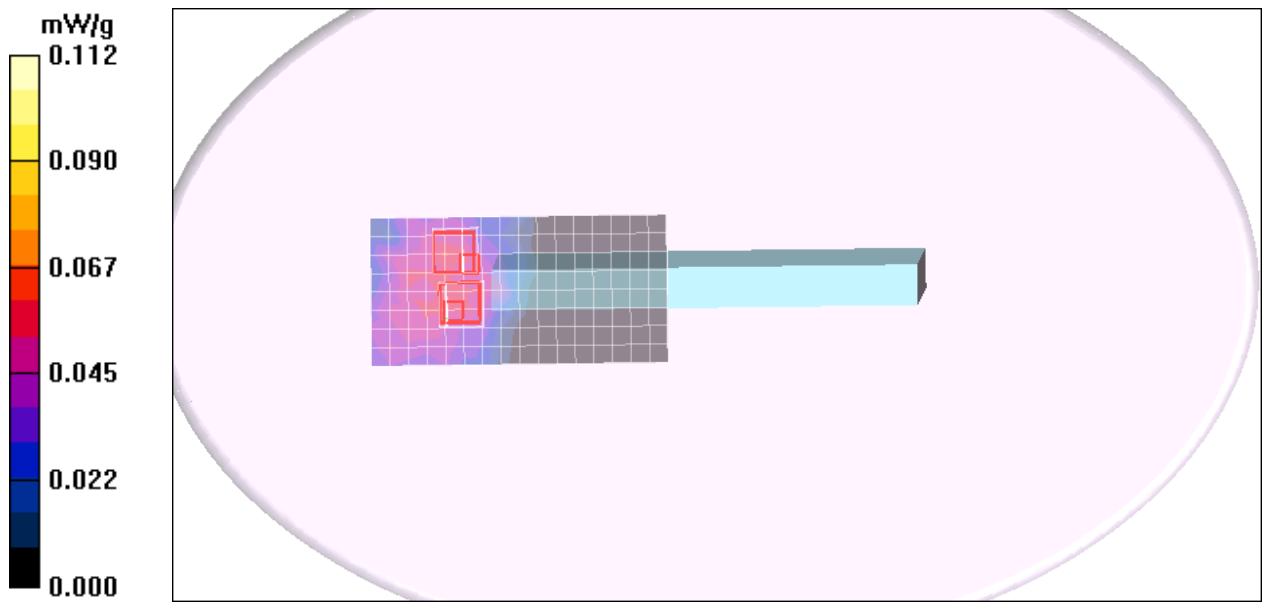

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Down Touch Edge mode ant C

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.47$ mho/m; $\epsilon_r = 48.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.72, 3.72, 3.72);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

UNII CH5280 Rate=6M bit ant C/Area Scan (10x20x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.034 mW/g

UNII CH5280 Rate=6M bit ant C/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.159 W/kg

SAR(1 g) = 0.018 mW/g; SAR(10 g) = 0.00743 mW/g

Maximum value of SAR (measured) = 0.038 mW/g

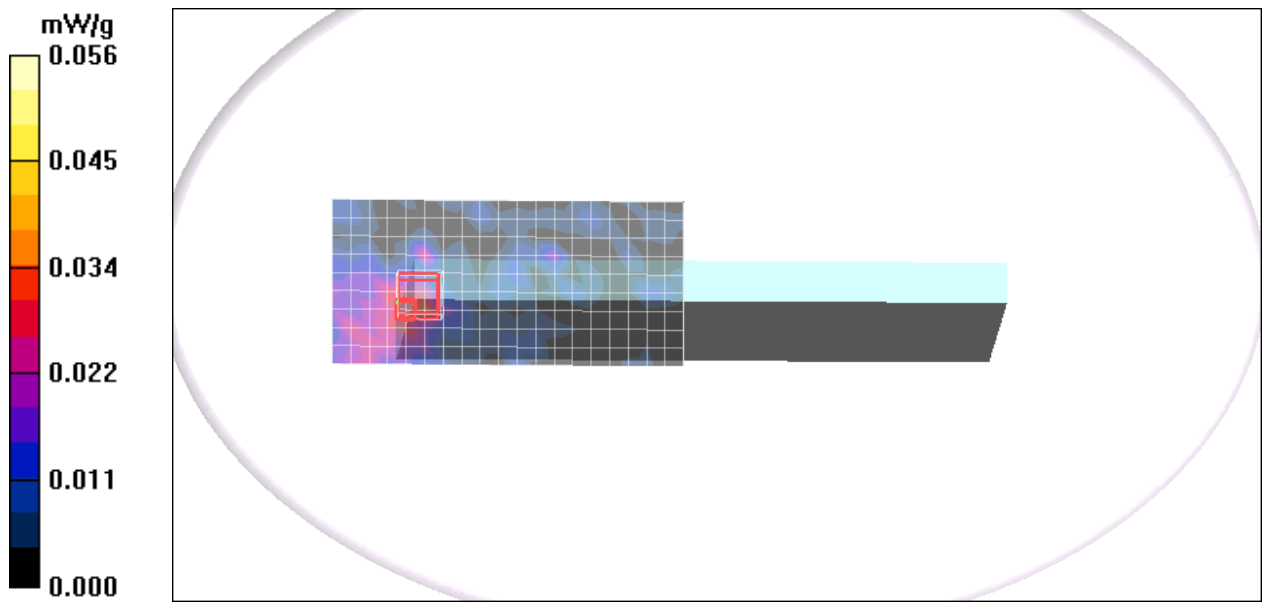

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Left Edge Touch mode ant A

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.98$ mho/m; $\epsilon_r = 47.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

DTS CH5600 Rate=6M bit ant A/Area Scan (9x17x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.044 mW/g

DTS CH5600 Rate=6M bit ant A/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.224 W/kg

SAR(1 g) = 0.025 mW/g; SAR(10 g) = 0.00835 mW/g

Maximum value of SAR (measured) = 0.061 mW/g

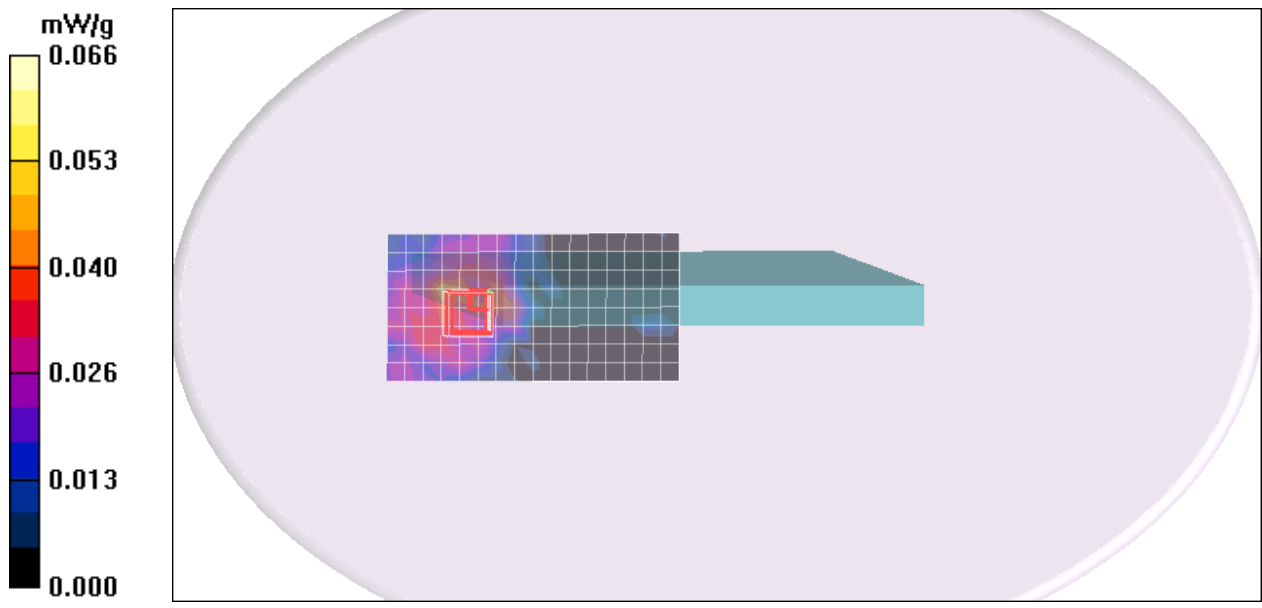

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Down Edge Touch mode ant C

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.96$ mho/m; $\epsilon_r = 47.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

DTS CH5600 Rate=6M bit ant C/Area Scan (10x19x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.063 mW/g

DTS CH5600 Rate=6M bit ant C/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.349 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.164 W/kg

SAR(1 g) = 0.012 mW/g; SAR(10 g) = 0.00288 mW/g

Maximum value of SAR (measured) = 0.027 mW/g

DTS CH5600 Rate=6M bit ant C/Zoom Scan (7x7x9)/Cube 1:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.349 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.033 mW/g; SAR(10 g) = 0.014 mW/g

Maximum value of SAR (measured) = 0.069 mW/g

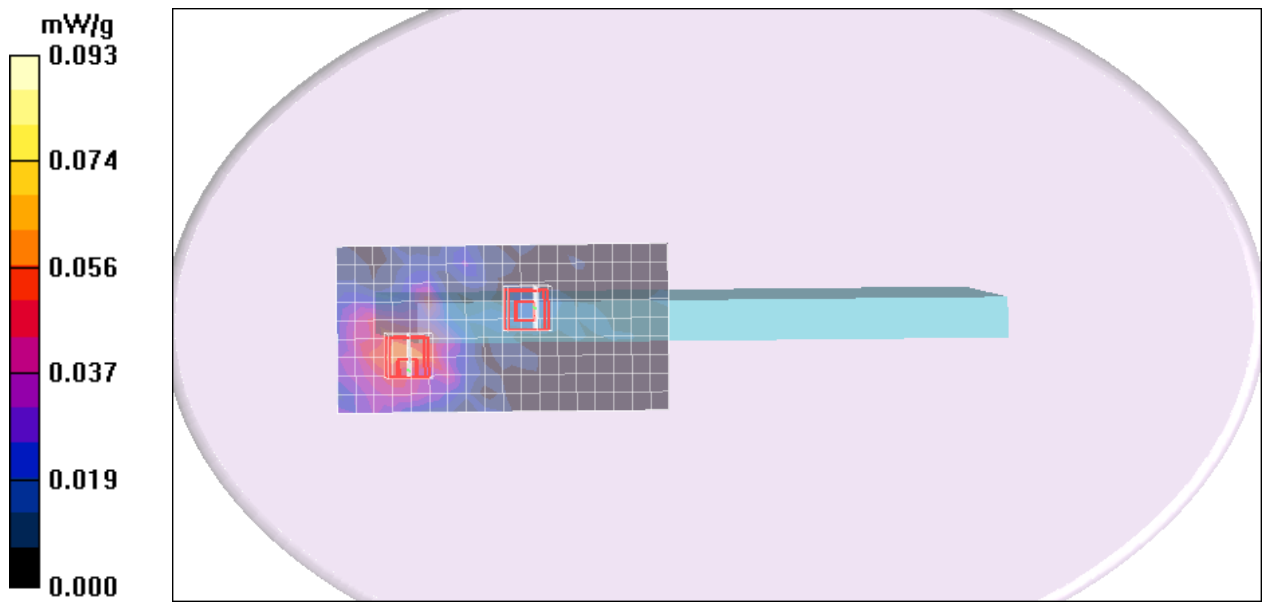

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Left Edge Touch mode ant A

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.23$ mho/m; $\epsilon_r = 47$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.77, 3.77, 3.77);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

DTS CH5785 Rate=6M bit ant A/Area Scan (9x17x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.050 mW/g

DTS CH5785 Rate=6M bit ant A/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.623 V/m; Power Drift = -0.126 dB

Peak SAR (extrapolated) = 0.338 W/kg

SAR(1 g) = 0.033 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.047 mW/g

DTS CH5785 Rate=6M bit ant A/Zoom Scan (7x7x9)/Cube 1:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.623 V/m; Power Drift = -0.126 dB

Peak SAR (extrapolated) = 0.258 W/kg

SAR(1 g) = 0.028 mW/g; SAR(10 g) = 0.011 mW/g

Maximum value of SAR (measured) = 0.048 mW/g

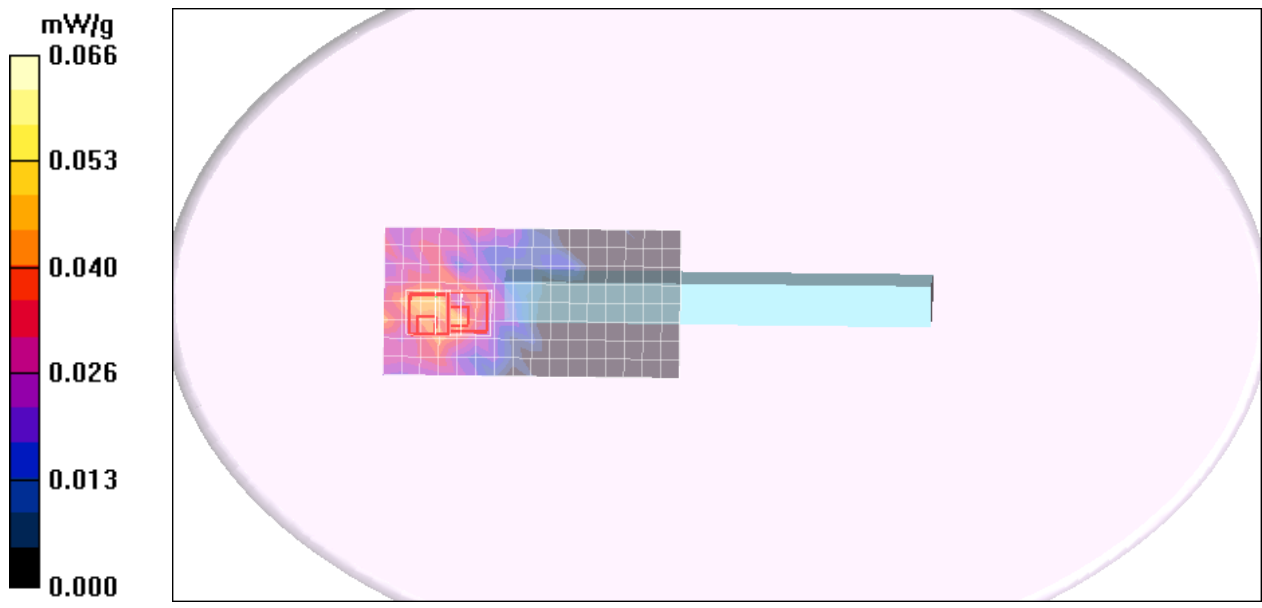

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Down Edge Touch mode ant C

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.21$ mho/m; $\epsilon_r = 47.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.77, 3.77, 3.77);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

DTS CH5785 Rate=6M bit ant C/Area Scan (10x18x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.109 mW/g

DTS CH5785 Rate=6M bit ant C/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 0.390 W/kg

SAR(1 g) = 0.056 mW/g; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.102 mW/g

DTS CH5785 Rate=6M bit ant C/Zoom Scan (7x7x9)/Cube 1:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 0.297 W/kg

SAR(1 g) = 0.045 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.083 mW/g

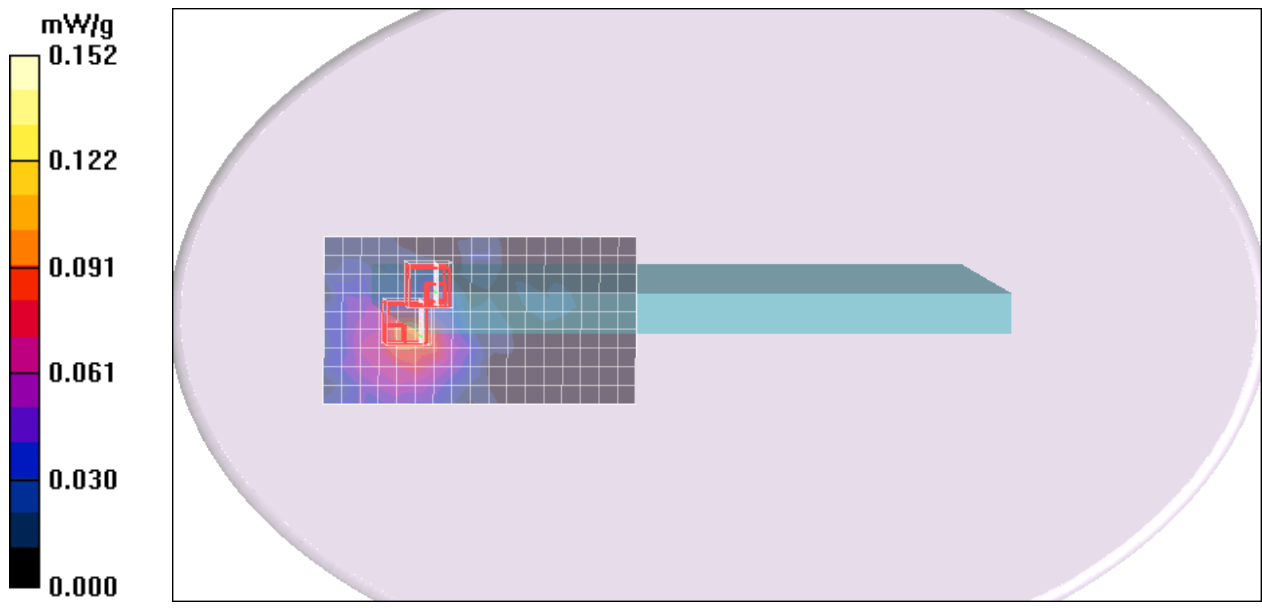

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Bottom Flat mode ant A

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.38$ mho/m; $\epsilon_r = 48.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.99, 3.99, 3.99);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

A UNII CH5200 Rate=6M/Area Scan (11x17x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.176 mW/g

A UNII CH5200 Rate=6M/Zoom Scan (7x7x9)/Cube 0: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.000 V/m; Power Drift = -0.063 dB

Peak SAR (extrapolated) = 0.670 W/kg

SAR(1 g) = 0.089 mW/g; SAR(10 g) = 0.029 mW/g

Maximum value of SAR (measured) = 0.178 mW/g

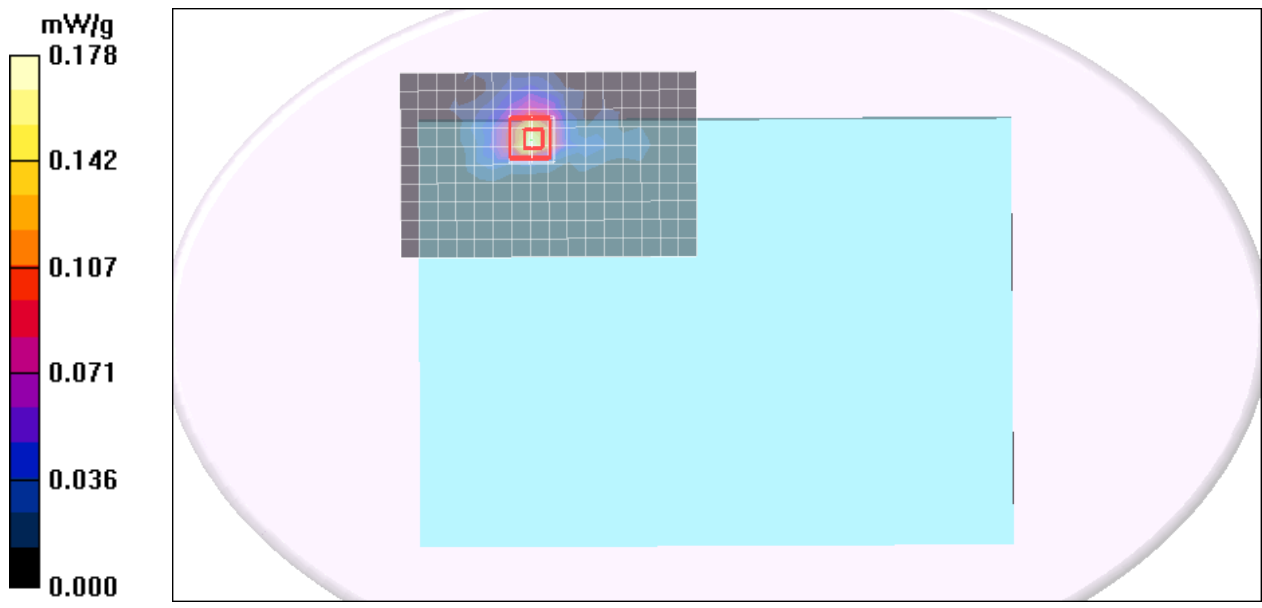

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Bottom Flat mode ant C

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.35$ mho/m; $\epsilon_r = 48.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.99, 3.99, 3.99);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

C UNII CH5200 Rate=6M/Area Scan (13x12x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.323 mW/g

C UNII CH5200 Rate=6M/Zoom Scan (7x7x9)/Cube 0: Measurement


grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.43 V/m; Power Drift = -0.045 dB

Peak SAR (extrapolated) = 0.661 W/kg

SAR(1 g) = 0.200 mW/g; SAR(10 g) = 0.069 mW/g

Maximum value of SAR (measured) = 0.326 mW/g

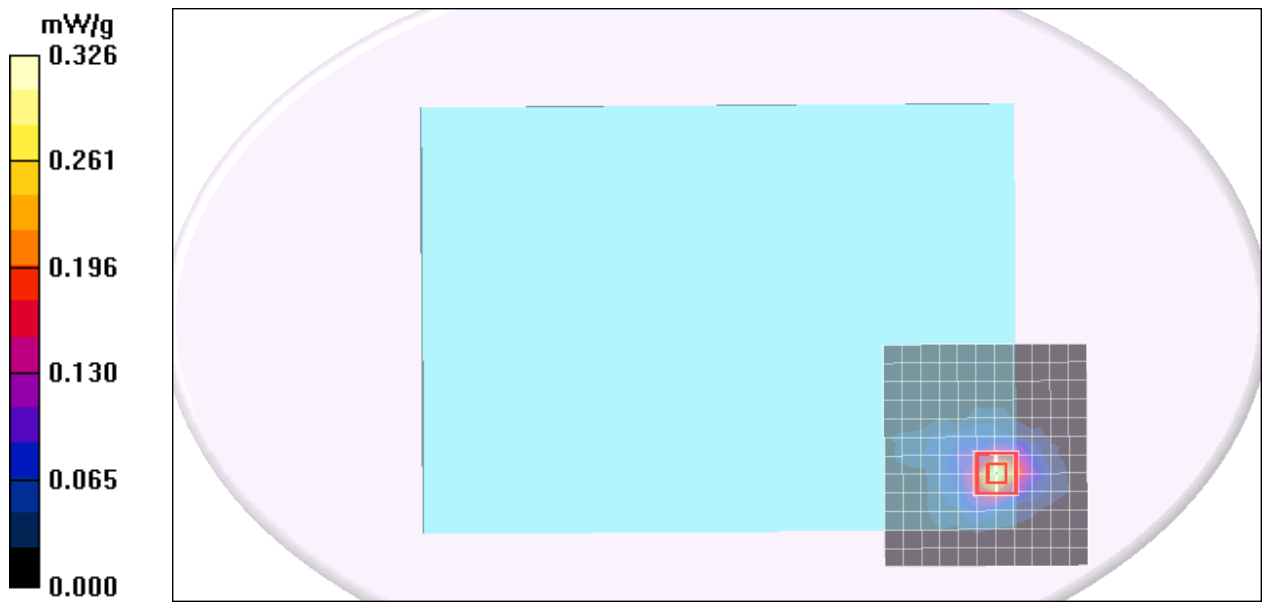

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Bottom Flat mode ant B

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.38$ mho/m; $\epsilon_r = 48.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.99, 3.99, 3.99);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

B UNII CH5200 Rate=6M/Area Scan (11x28x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.230 mW/g

B UNII CH5200 Rate=6M/Zoom Scan (7x7x9)/Cube 0: Measurement


grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.094 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 0.427 W/kg

SAR(1 g) = 0.137 mW/g; SAR(10 g) = 0.049 mW/g

Maximum value of SAR (measured) = 0.236 mW/g

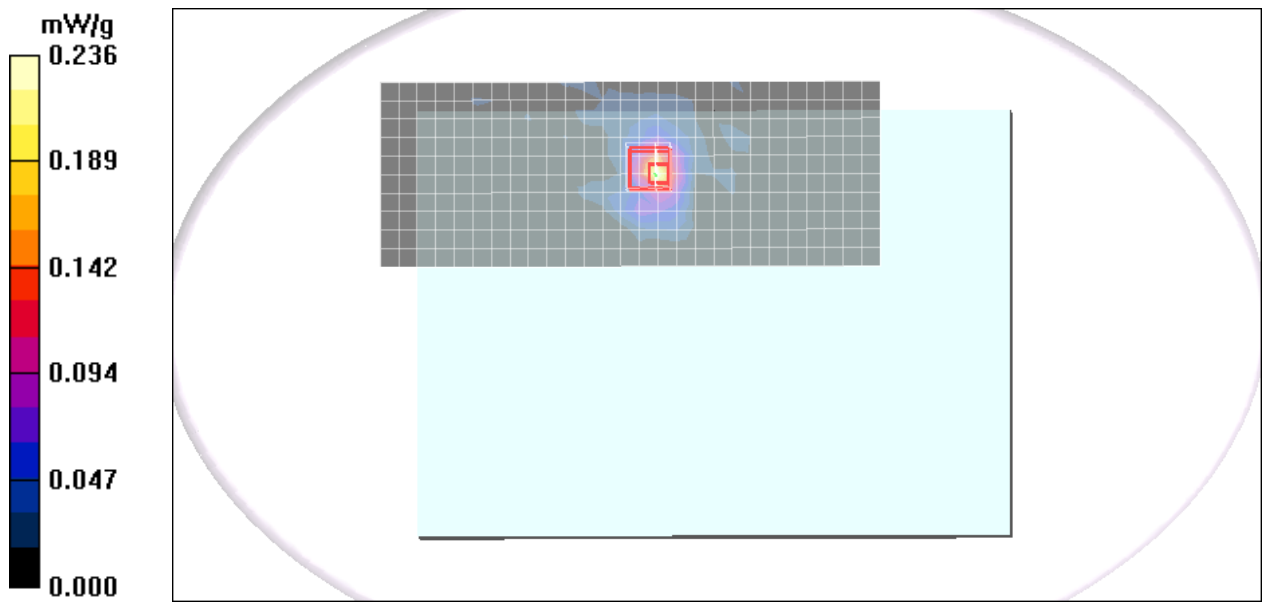

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Bottom Flat mode ant A

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.5$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.72, 3.72, 3.72);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

A UNII CH5280 Rate=6M/Area Scan (10x15x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.209 mW/g

A UNII CH5280 Rate=6M/Zoom Scan (7x7x9)/Cube 0: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.000 V/m; Power Drift = -0.000 dB

Peak SAR (extrapolated) = 0.397 W/kg

SAR(1 g) = 0.120 mW/g; SAR(10 g) = 0.041 mW/g

Maximum value of SAR (measured) = 0.216 mW/g

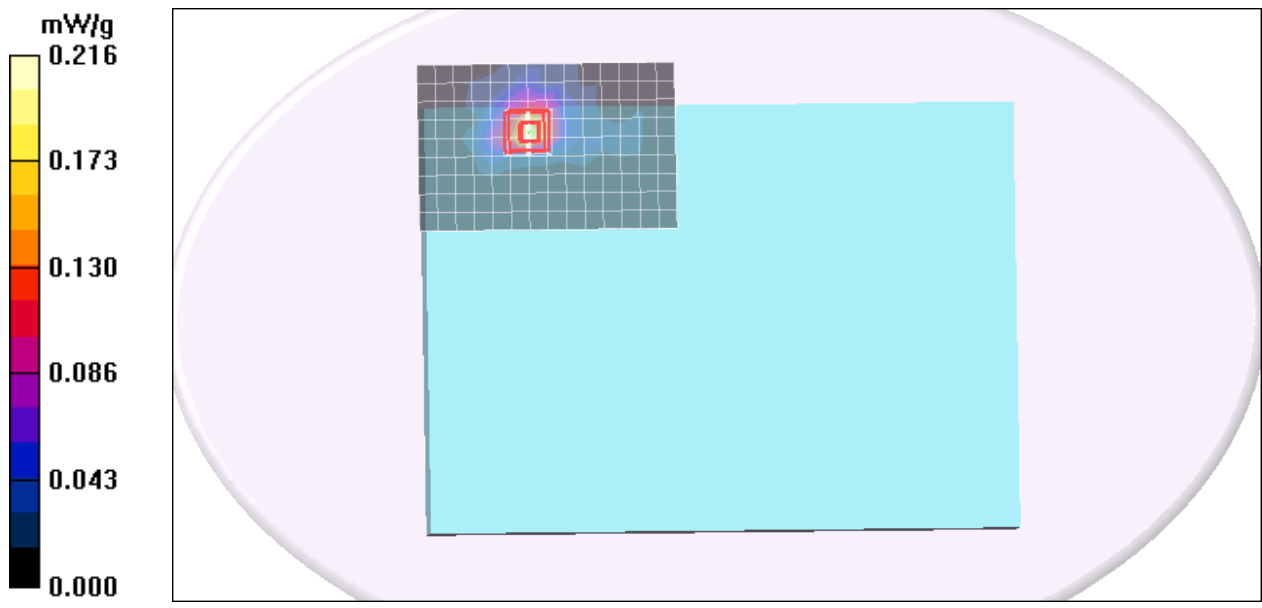

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Bottom Flat mode ant C

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.47$ mho/m; $\epsilon_r = 48.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.72, 3.72, 3.72);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

C UNII CH5280 Rate=6M/Area Scan (13x12x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.479 mW/g

C UNII CH5280 Rate=6M/Zoom Scan (7x7x9)/Cube 0: Measurement

grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 1.00 W/kg



SAR(1 g) = 0.303 mW/g; SAR(10 g) = 0.111 mW/g

Maximum value of SAR (measured) = 0.492 mW/g

C UNII CH5280 Rate=6M/Z Scan (1x1x11): Measurement grid: dx=20mm,

dy=20mm, dz=10mm

Maximum value of SAR (measured) = 0.565 mW/g

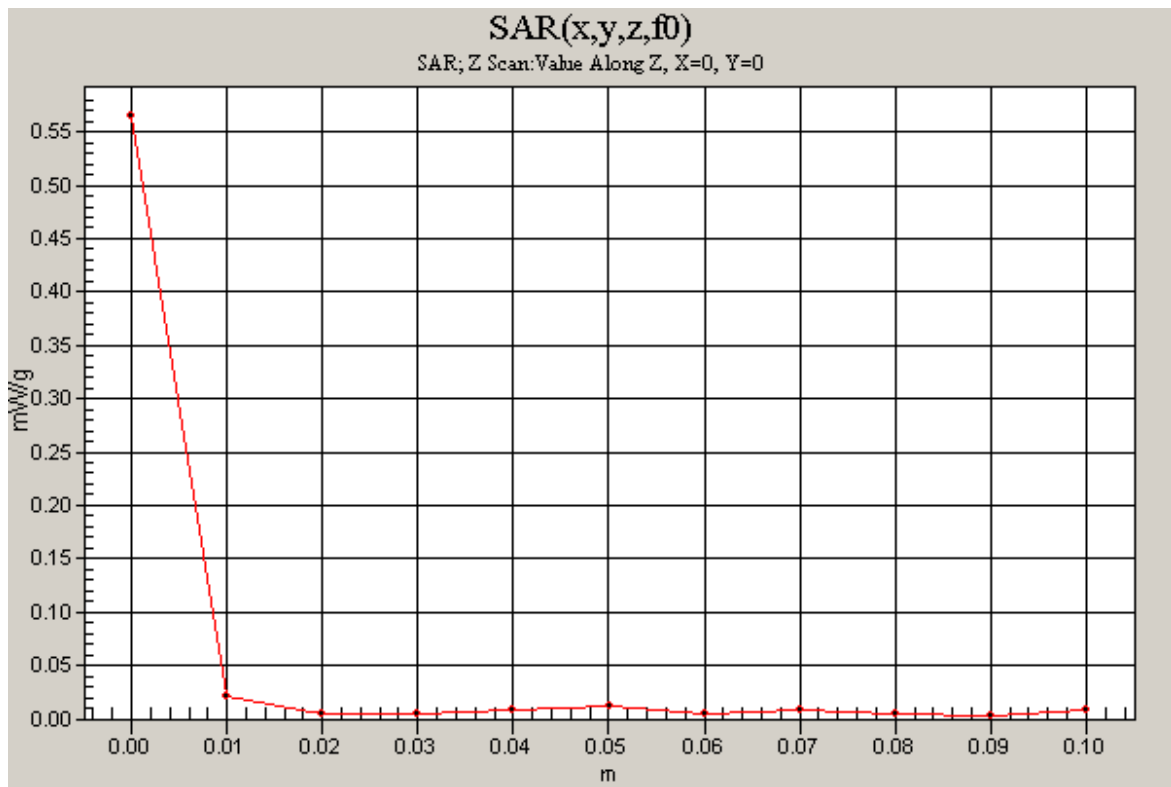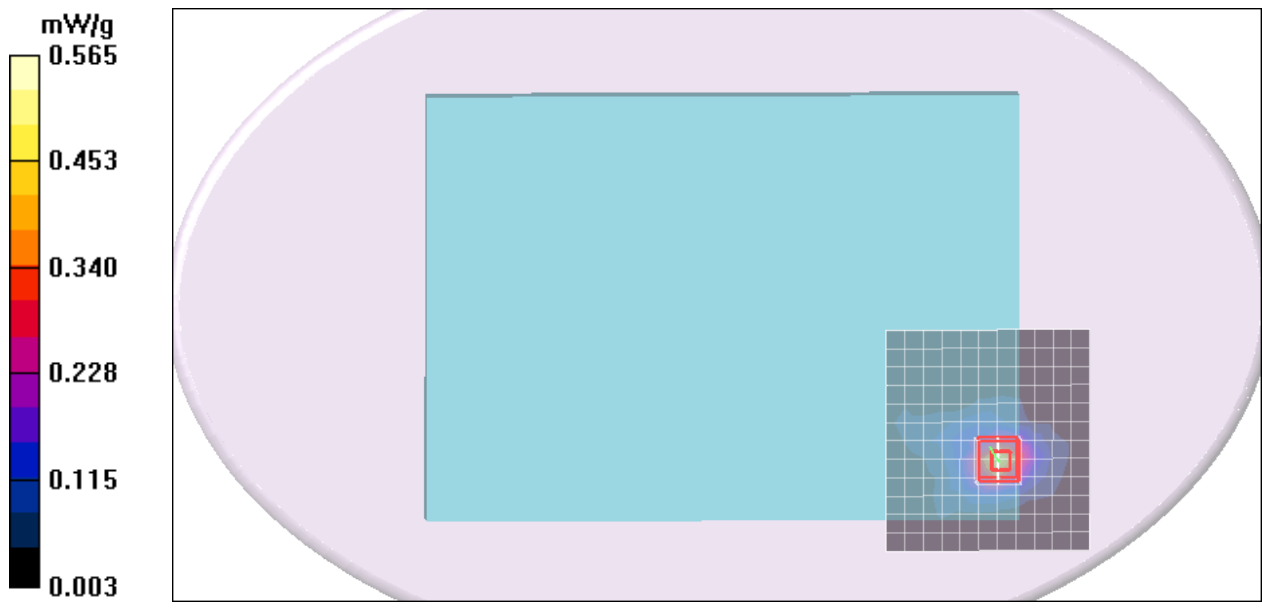

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Bottom Flat mode ant B

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.5$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.72, 3.72, 3.72);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

B UNII CH5280 Rate=6M/Area Scan (12x37x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.216 mW/g

B UNII CH5280 Rate=6M/Zoom Scan (7x7x9)/Cube 0: Measurement

grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.000 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.381 W/kg

SAR(1 g) = 0.125 mW/g; SAR(10 g) = 0.050 mW/g

Maximum value of SAR (measured) = 0.206 mW/g

B UNII CH5280 Rate=6M/Zoom Scan (7x7x9)/Cube 1: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.000 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.345 W/kg

SAR(1 g) = 0.104 mW/g; SAR(10 g) = 0.032 mW/g

Maximum value of SAR (measured) = 0.199 mW/g

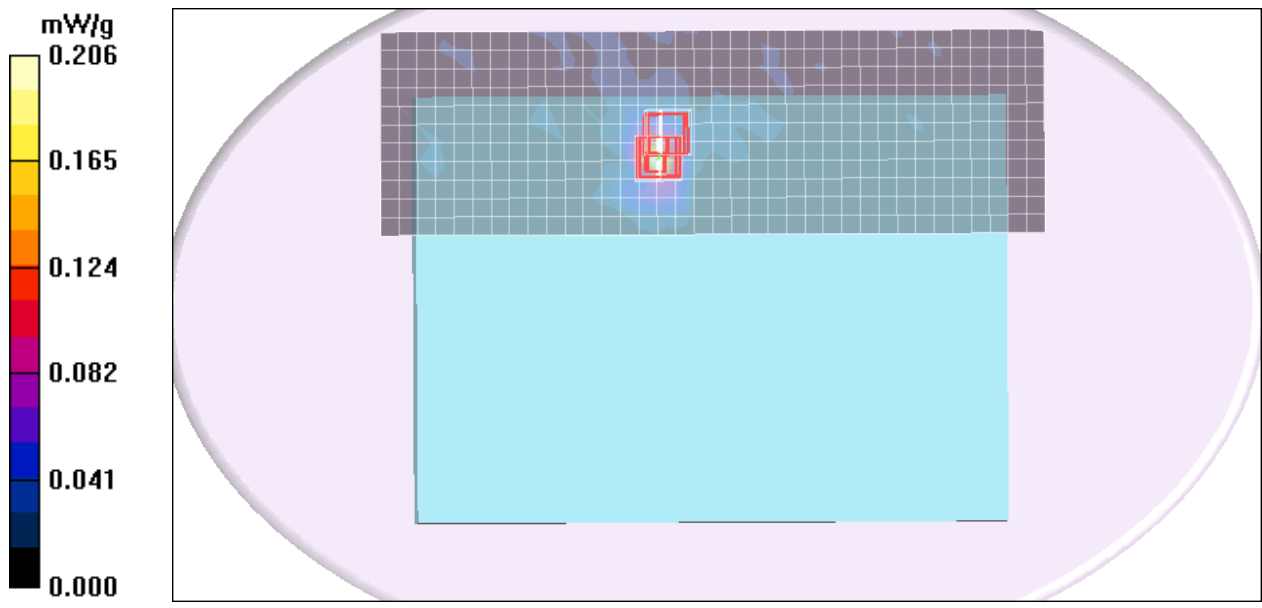

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Bottom Flat mode ant A

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.98$ mho/m; $\epsilon_r = 47.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

A DTS CH5600 Rate=6M bit ant A/Area Scan (10x15x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.248 mW/g

A DTS CH5600 Rate=6M bit ant A/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.563 W/kg

SAR(1 g) = 0.133 mW/g; SAR(10 g) = 0.044 mW/g

Maximum value of SAR (measured) = 0.232 mW/g

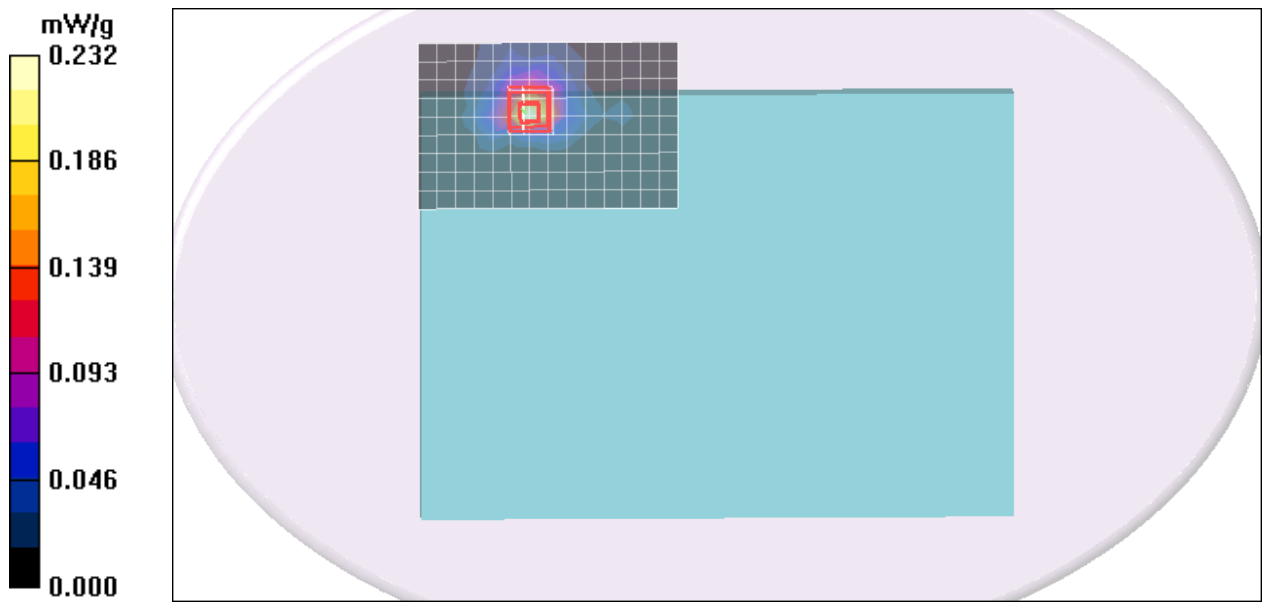

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Bottom Flat mode ant C

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.96$ mho/m; $\epsilon_r = 47.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

C DTS CH5600 Rate=6M bit ant C/Area Scan (13x12x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.443 mW/g

C DTS CH5600 Rate=6M bit ant C/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.838 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.284 mW/g; SAR(10 g) = 0.106 mW/g

Maximum value of SAR (measured) = 0.460 mW/g

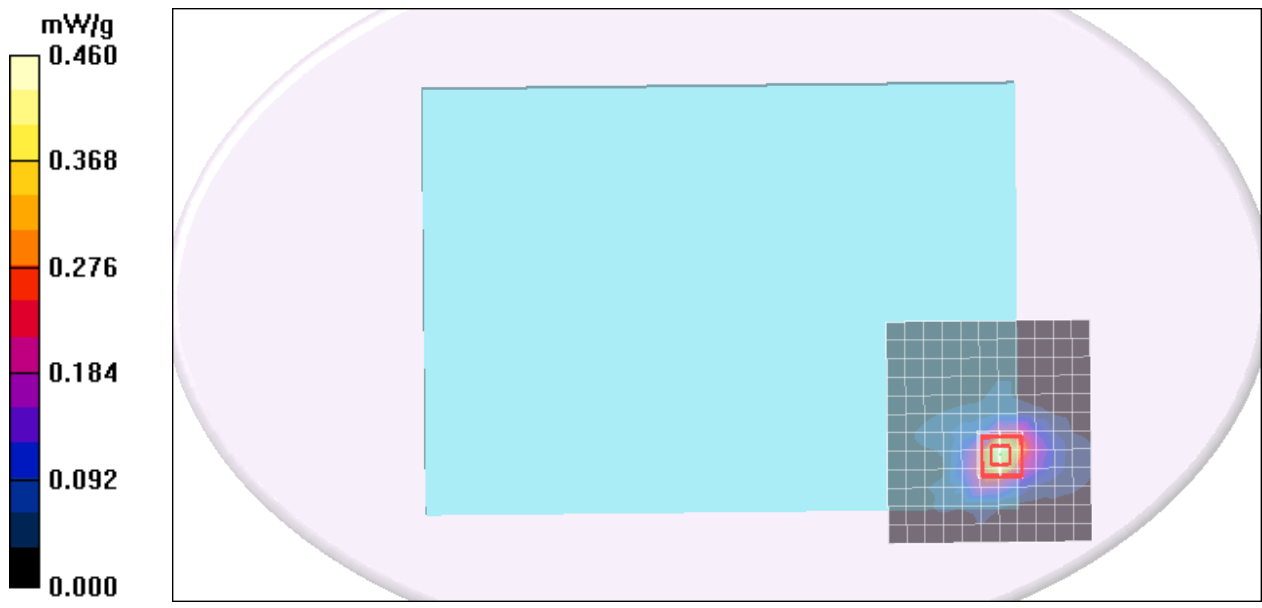

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Bottom Flat mode ant B

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.98$ mho/m; $\epsilon_r = 47.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

DTS CH5600 Rate=6M bit ant B/Area Scan (11x37x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.394 mW/g

DTS CH5600 Rate=6M bit ant B/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.07 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 0.882 W/kg



SAR(1 g) = 0.246 mW/g; SAR(10 g) = 0.091 mW/g

Maximum value of SAR (measured) = 0.407 mW/g

DTS CH5600 Rate=6M bit ant B/Z Scan (1x1x11): Measurement grid:

dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 0.438 mW/g

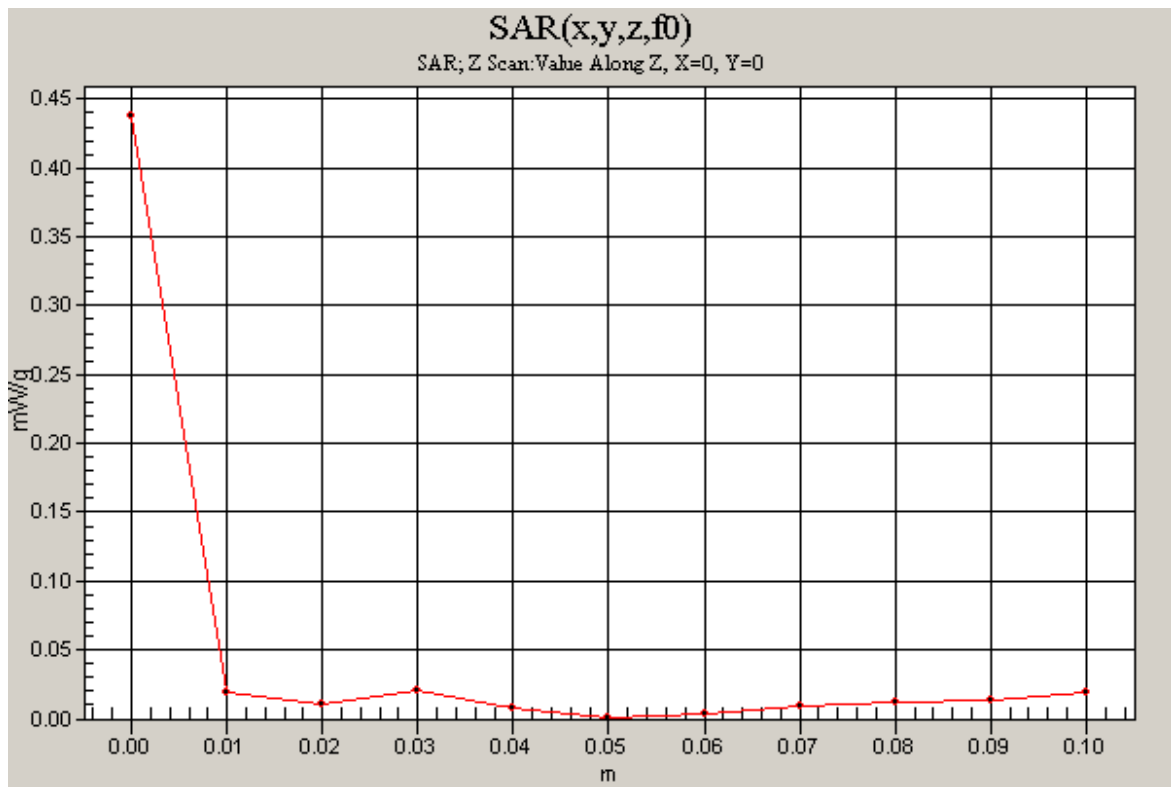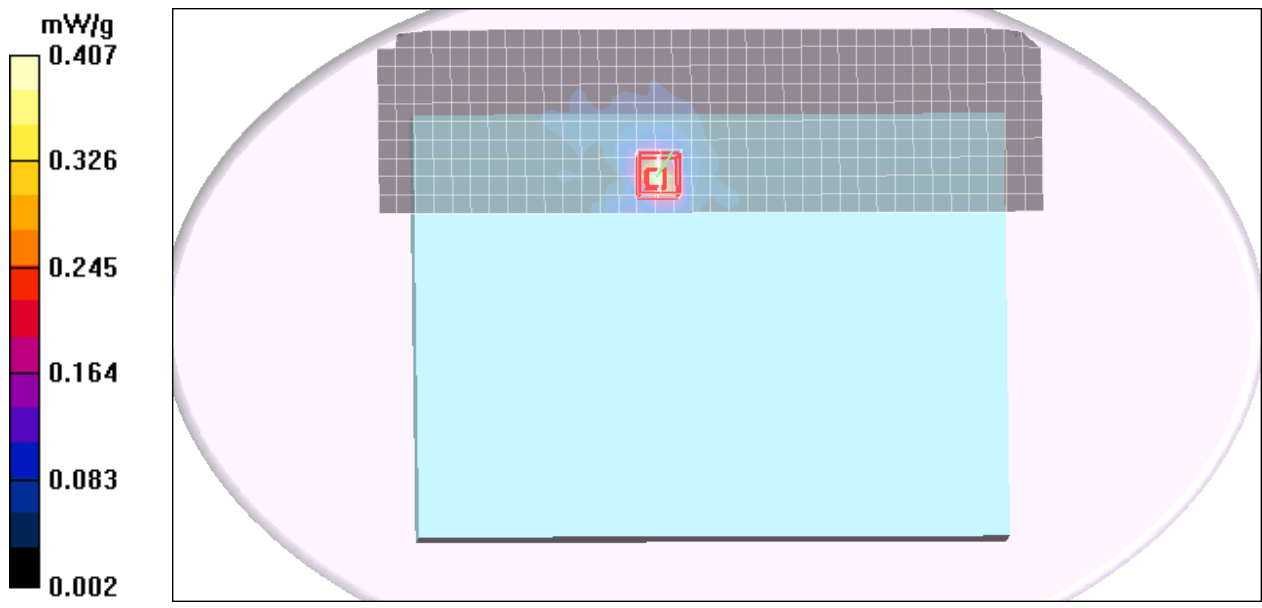

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Bottom Flat mode ant A

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.23$ mho/m; $\epsilon_r = 47$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.77, 3.77, 3.77);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

A DTS CH5785 Rate=6M bit ant A/Area Scan (10x15x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.213 mW/g

A DTS CH5785 Rate=6M bit ant A/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.875 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.104 mW/g; SAR(10 g) = 0.034 mW/g

Maximum value of SAR (measured) = 0.238 mW/g

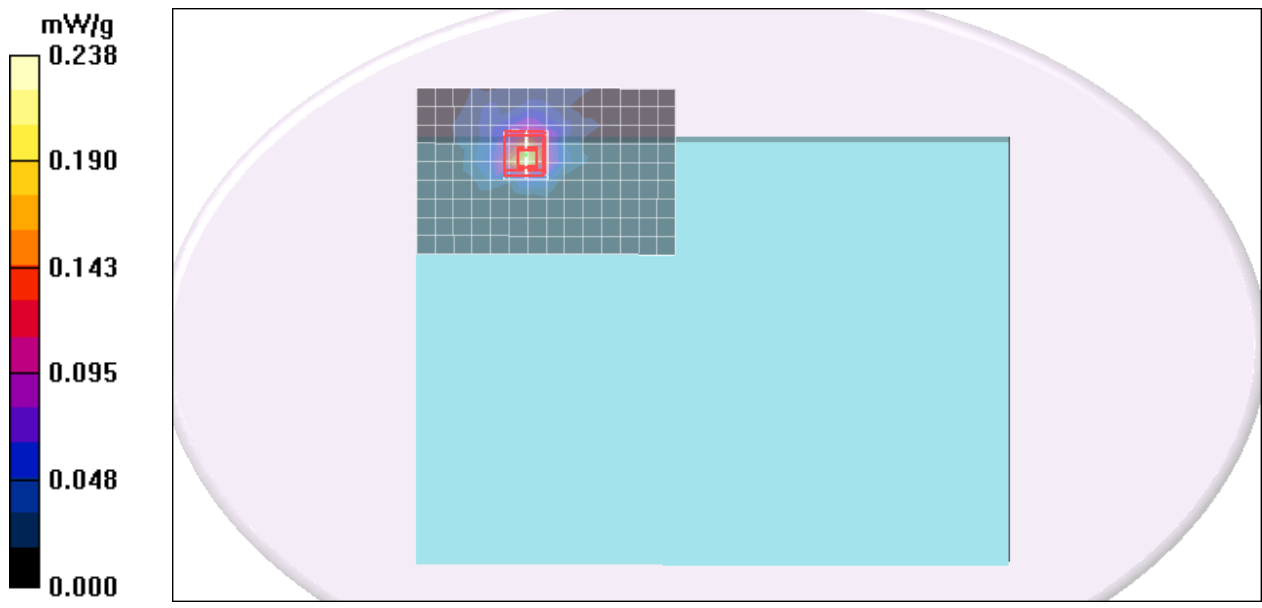

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Bottom Flat mode ant C

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.21$ mho/m; $\epsilon_r = 47.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.77, 3.77, 3.77);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

C DTS CH5785 Rate=6M bit ant C/Area Scan (13x12x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.418 mW/g

C DTS CH5785 Rate=6M bit ant C/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.212 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 0.998 W/kg

SAR(1 g) = 0.265 mW/g; SAR(10 g) = 0.102 mW/g

Maximum value of SAR (measured) = 0.438 mW/g

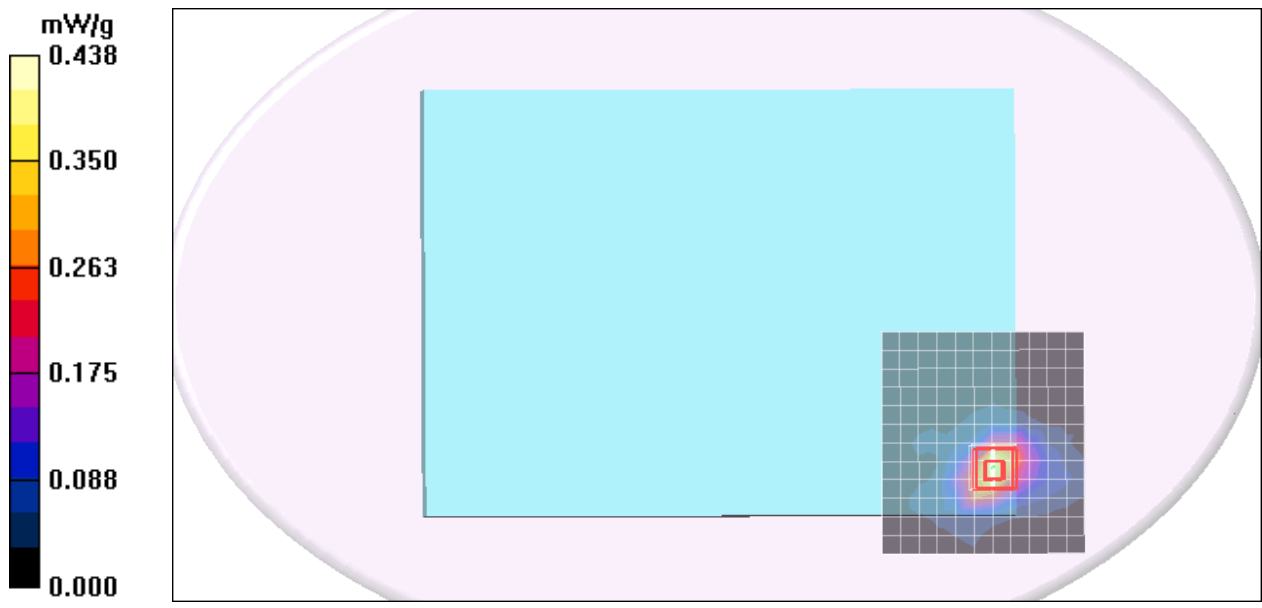

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Left Edge Touch mode ant A HT20

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.38$ mho/m; $\epsilon_r = 48.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.99, 3.99, 3.99);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

UNII CH5200 Rate=6M bit ant A/Area Scan (9x19x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.009 mW/g

UNII CH5200 Rate=6M bit ant A/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = -0.033 dB

Peak SAR (extrapolated) = 0.037 W/kg

SAR(1 g) = 0.00307 mW/g; SAR(10 g) = 0.00108 mW/g

Maximum value of SAR (measured) = 0.037 mW/g

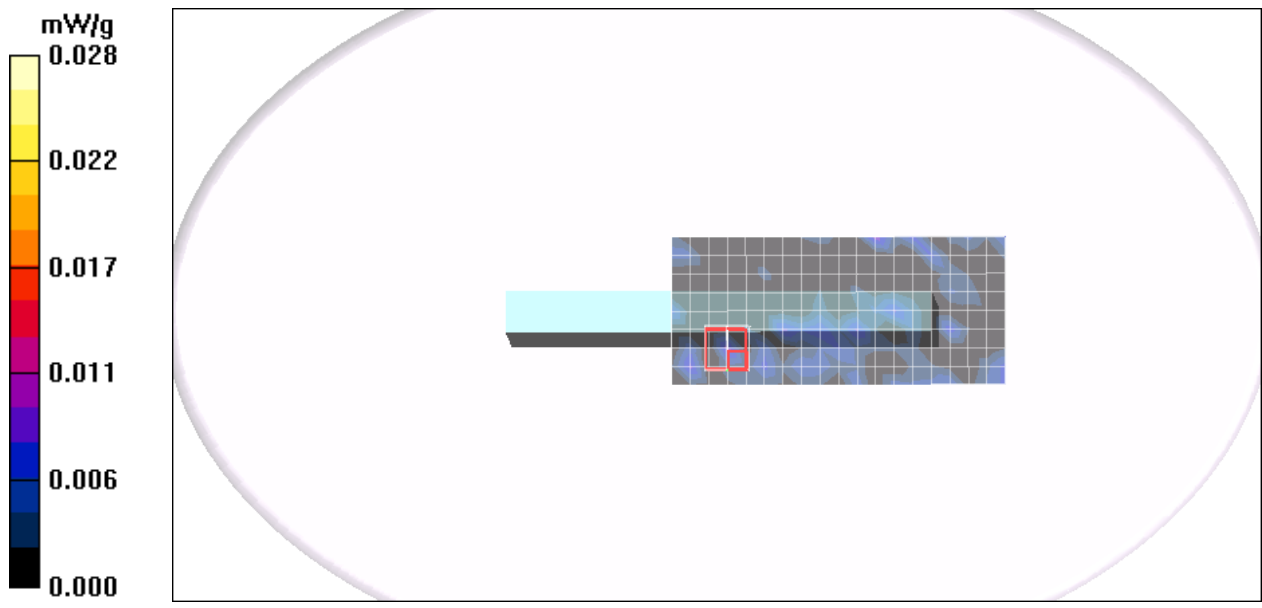

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Down Touch Edge mode ant C HT20

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.35$ mho/m; $\epsilon_r = 48.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.99, 3.99, 3.99);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

UNII CH5200 Rate=6.5M bit ant C/Area Scan (7x37x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.014 mW/g

UNII CH5200 Rate=6.5M bit ant C/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.818 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 0.084 W/kg

SAR(1 g) = 0.00112 mW/g; SAR(10 g) = 0.00346 mW/g

Maximum value of SAR (measured) = 0.023 mW/g

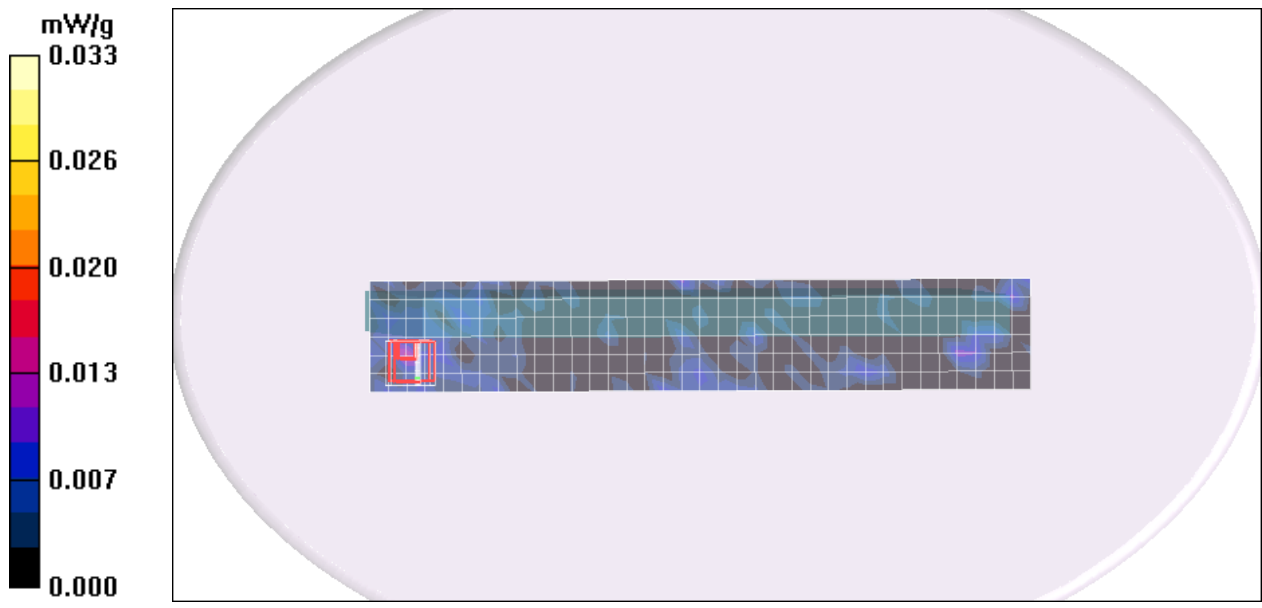

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Left Edge Touch mode ant A HT20

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.5$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.72, 3.72, 3.72);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

UNII CH5280 Rate=6M bit ant A/Area Scan (9x17x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.018 mW/g

UNII CH5280 Rate=6M bit ant A/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 0.032 W/kg

SAR(1 g) = 0.00306 mW/g; SAR(10 g) = 0.000827 mW/g

Maximum value of SAR (measured) = 0.029 mW/g

UNII CH5280 Rate=6M bit ant A/Zoom Scan 2 (7x7x9)/Cube 1:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 0.029 W/kg

SAR(1 g) = 0.00141 mW/g; SAR(10 g) = 0.000445 mW/g

Maximum value of SAR (measured) = 0.028 mW/g

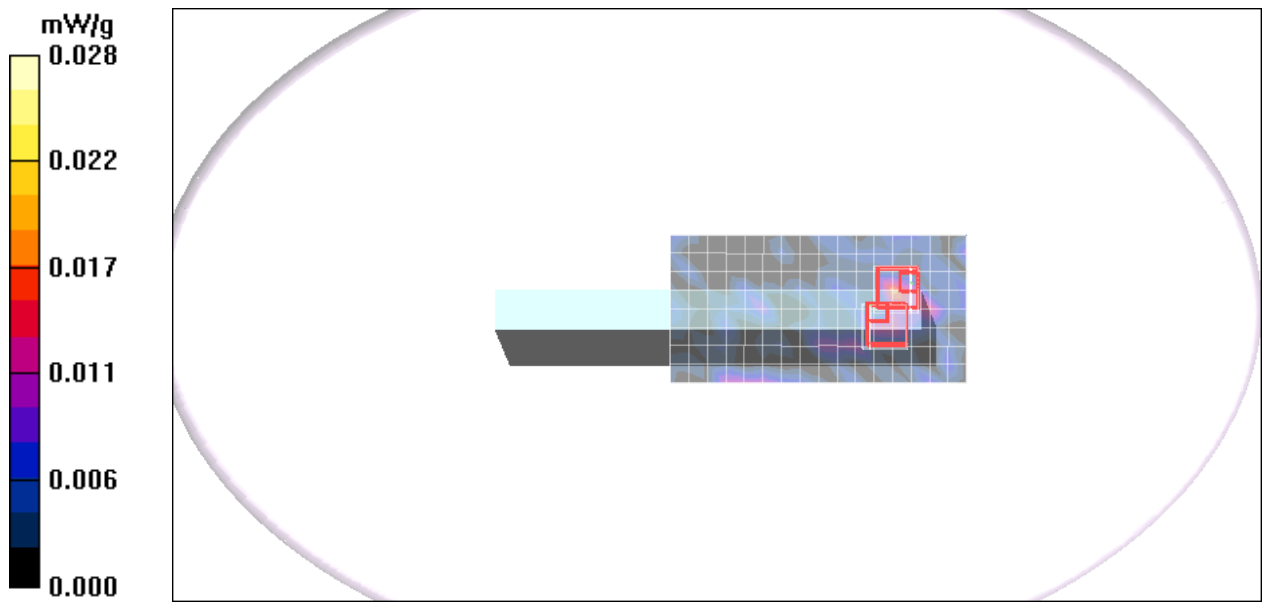

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Down Touch Edge mode ant C HT20

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.47$ mho/m; $\epsilon_r = 48.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.72, 3.72, 3.72);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

UNII CH5280 Rate=6.5M bit ant C/Area Scan (8x15x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.014 mW/g

UNII CH5280 Rate=6.5M bit ant C/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.818 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.084 W/kg

SAR(1 g) = 0.010 mW/g; SAR(10 g) = 0.00346 mW/g

Maximum value of SAR (measured) = 0.023 mW/g

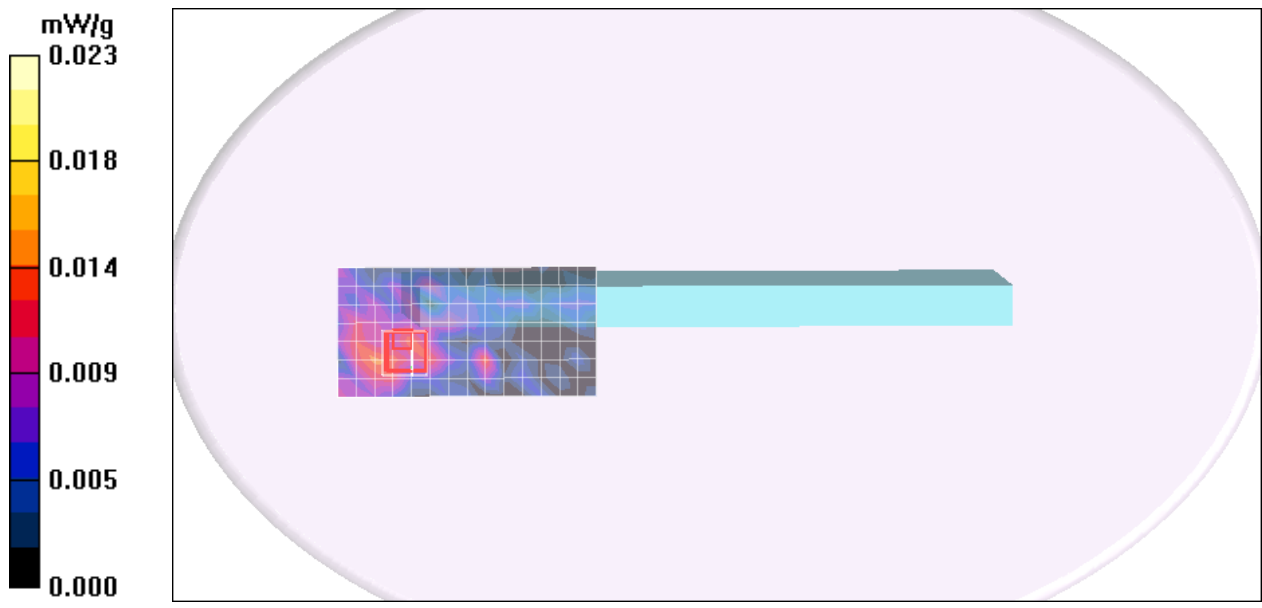

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Left Edge Touch mode ant A HT20

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.98$ mho/m; $\epsilon_r = 47.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

DTS CH5600 Rate=6.5M bit ant A/Area Scan (9x19x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.071 mW/g

DTS CH5600 Rate=6.5M bit ant A/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.034 W/kg

SAR(1 g) = 0.000998 mW/g; SAR(10 g) = 0.000189 mW/g

Maximum value of SAR (measured) = 0.034 mW/g

DTS CH5600 Rate=6.5M bit ant A/Zoom Scan 2 (7x7x9)/Cube 1:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.198 W/kg

SAR(1 g) = 0.021 mW/g; SAR(10 g) = 0.00352 mW/g

Maximum value of SAR (measured) = 0.086 mW/g

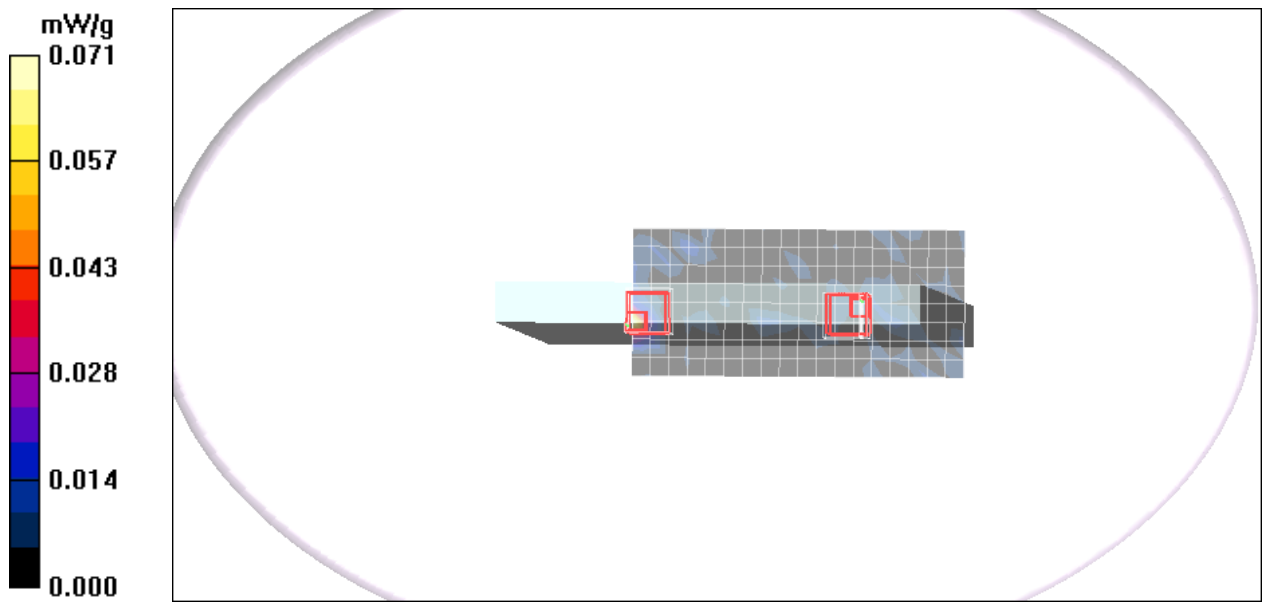

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Down Edge Touch mode ant C HT20

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.96$ mho/m; $\epsilon_r = 47.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

DTS CH5600 Rate=6M bit ant C/Area Scan (8x11x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.027 mW/g

DTS CH5600 Rate=6M bit ant C/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = -0.132 dB

Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.014 mW/g; SAR(10 g) = 0.00545 mW/g

Maximum value of SAR (measured) = 0.027 mW/g

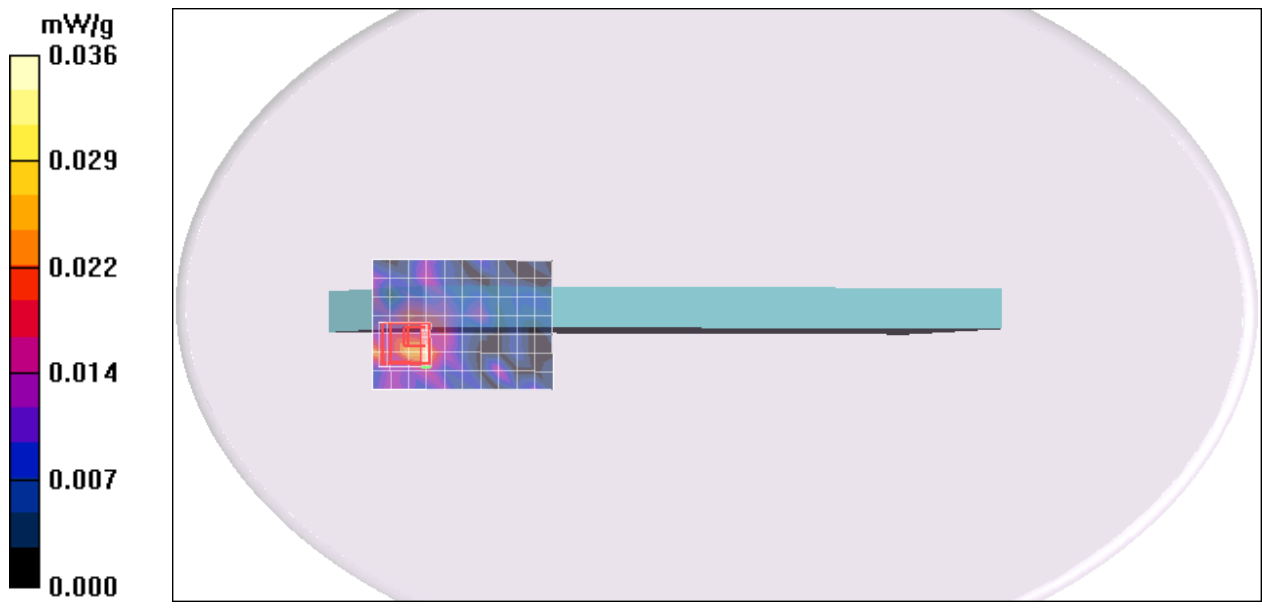

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Left Edge Touch mode ant A HT20

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.23$ mho/m; $\epsilon_r = 47$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.77, 3.77, 3.77);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

DTS CH5785 Rate=6M bit ant A/Area Scan (9x19x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.013 mW/g

DTS CH5785 Rate=6M bit ant A/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.631 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 0.046 W/kg

SAR(1 g) = 0.00221 mW/g; SAR(10 g) = 0.000953 mW/g

Maximum value of SAR (measured) = 0.038 mW/g

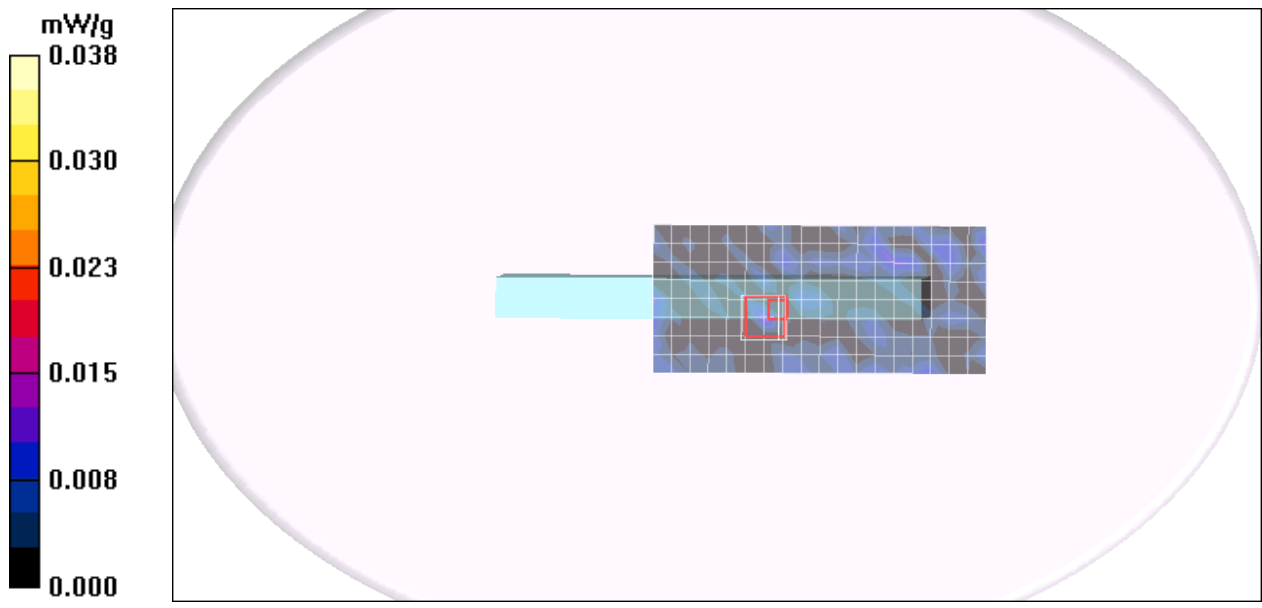

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Down Edge Touch mode ant C HT20

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.21$ mho/m; $\epsilon_r = 47.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.77, 3.77, 3.77);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

DTS CH5785 Rate=6M bit ant C/Area Scan (8x15x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.019 mW/g

DTS CH5785 Rate=6M bit ant C/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.118 W/kg

SAR(1 g) = 0.00954 mW/g; SAR(10 g) = 0.00297 mW/g

Maximum value of SAR (measured) = 0.023 mW/g

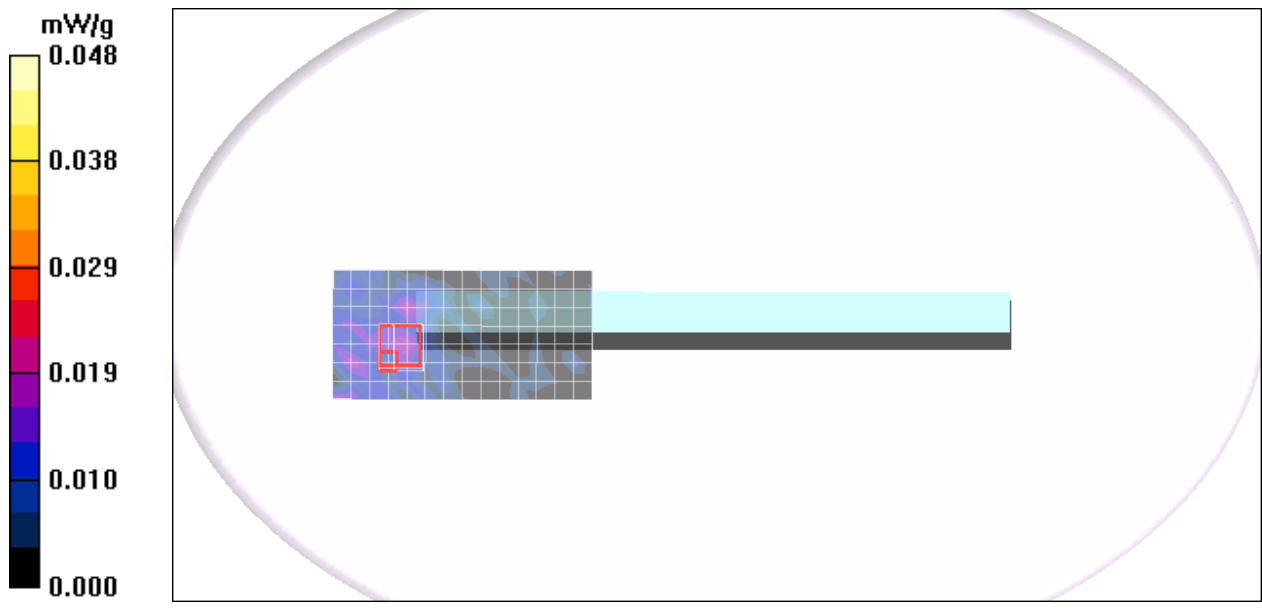

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Bottom Flat mode ant A HT20

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.38$ mho/m; $\epsilon_r = 48.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.99, 3.99, 3.99);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

A UNII CH5200 Rate=6.5M/Area Scan (11x35x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.101 mW/g

A UNII CH5200 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement

grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.743 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 0.154 W/kg

SAR(1 g) = 0.057 mW/g; SAR(10 g) = 0.023 mW/g

Maximum value of SAR (measured) = 0.099 mW/g

A UNII CH5200 Rate=6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.743 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 0.317 W/kg

SAR(1 g) = 0.059 mW/g; SAR(10 g) = 0.024 mW/g

Maximum value of SAR (measured) = 0.104 mW/g

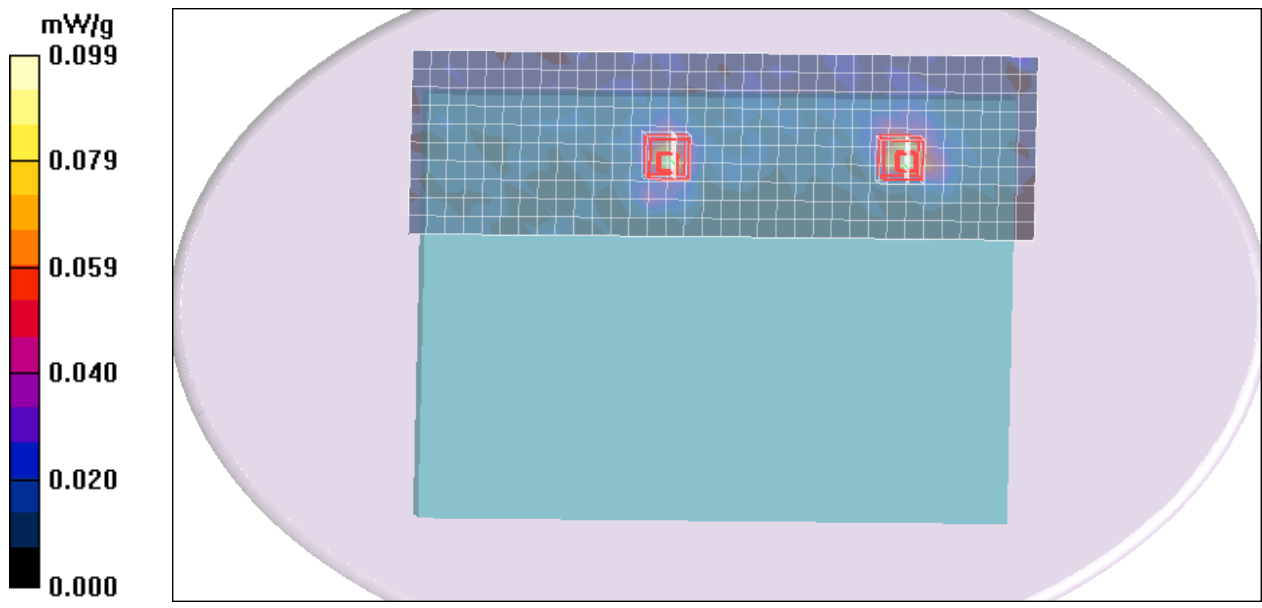

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Bottom Flat mode ant C HT20

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.35$ mho/m; $\epsilon_r = 48.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.99, 3.99, 3.99);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

C UNII CH5200 Rate=6.5M/Area Scan (26x14x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.148 mW/g

C UNII CH5200 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement


grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 0.338 W/kg

SAR(1 g) = 0.095 mW/g; SAR(10 g) = 0.041 mW/g

Maximum value of SAR (measured) = 0.146 mW/g

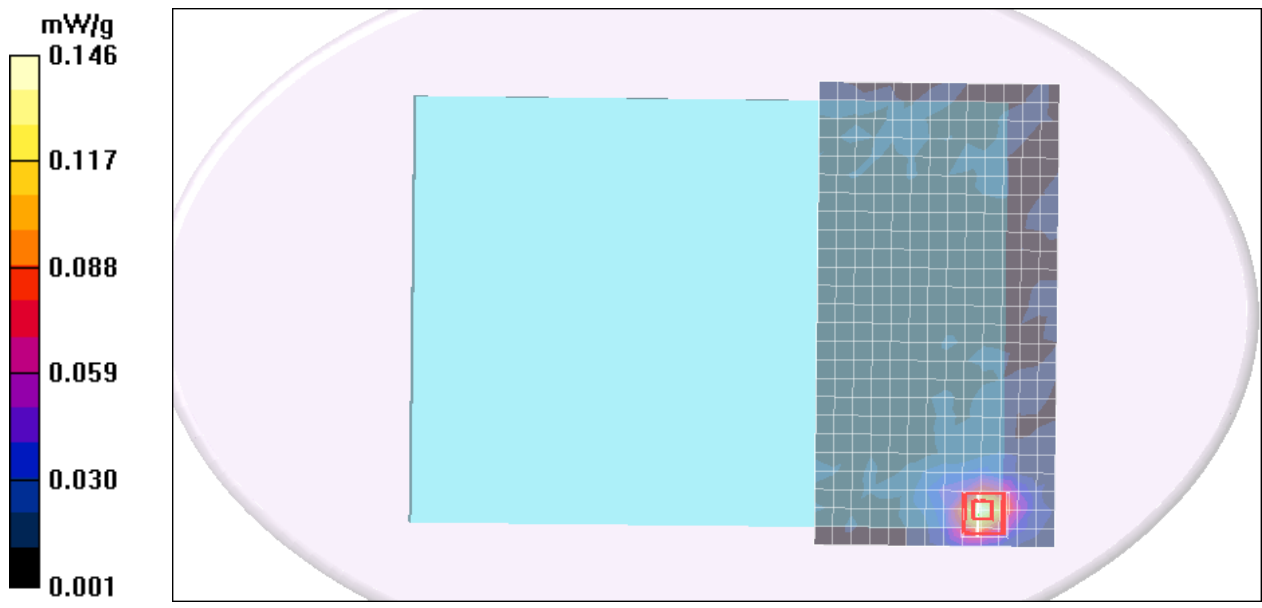

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Bottom Flat mode ant B HT20

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.38$ mho/m; $\epsilon_r = 48.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.99, 3.99, 3.99);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

B UNII CH5200 Rate=6.5M/Area Scan (10x37x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.043 mW/g

B UNII CH5200 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement

grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.654 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 0.234 W/kg

SAR(1 g) = 0.028 mW/g; SAR(10 g) = 0.010 mW/g

Maximum value of SAR (measured) = 0.037 mW/g

B UNII CH5200 Rate=6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.654 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 0.216 W/kg

SAR(1 g) = 0.020 mW/g; SAR(10 g) = 0.00768 mW/g

Maximum value of SAR (measured) = 0.035 mW/g

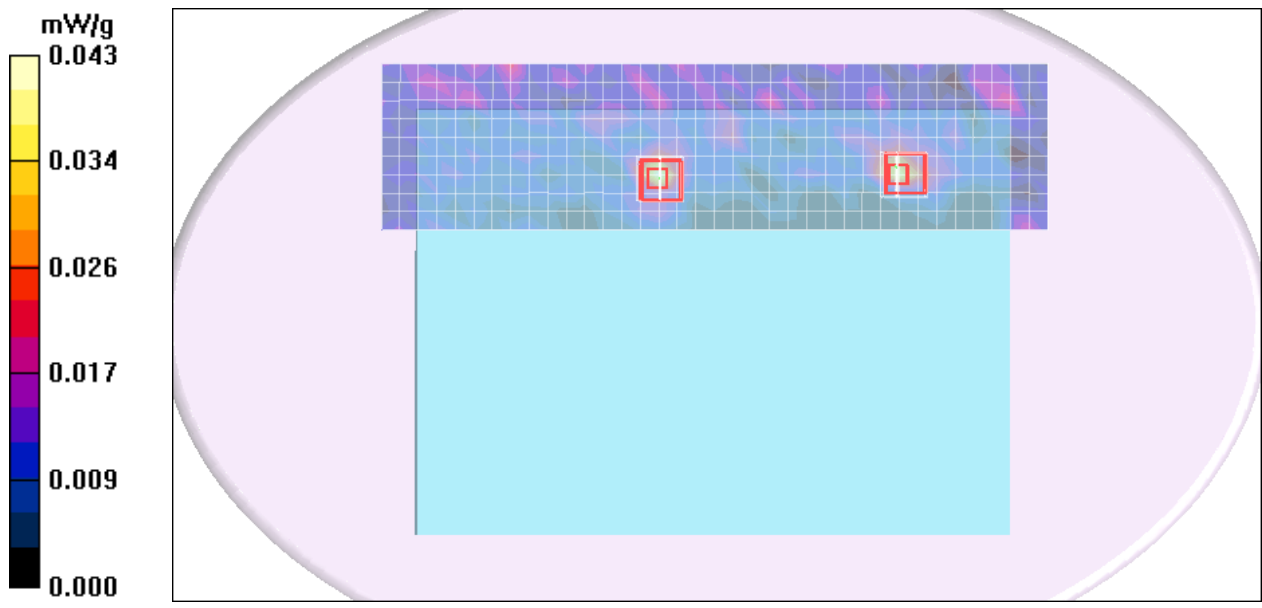

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Bottom Flat mode ant A HT20

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.5$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.72, 3.72, 3.72);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

A UNII CH5280 Rate=6M/Area Scan (11x27x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.149 mW/g

A UNII CH5280 Rate=6M/Zoom Scan (7x7x9)/Cube 0: Measurement

grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.22 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 0.227 W/kg

SAR(1 g) = 0.076 mW/g; SAR(10 g) = 0.028 mW/g

Maximum value of SAR (measured) = 0.121 mW/g

A UNII CH5280 Rate=6M/Zoom Scan (7x7x9)/Cube 1: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.22 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 0.286 W/kg

SAR(1 g) = 0.094 mW/g; SAR(10 g) = 0.037 mW/g

Maximum value of SAR (measured) = 0.152 mW/g

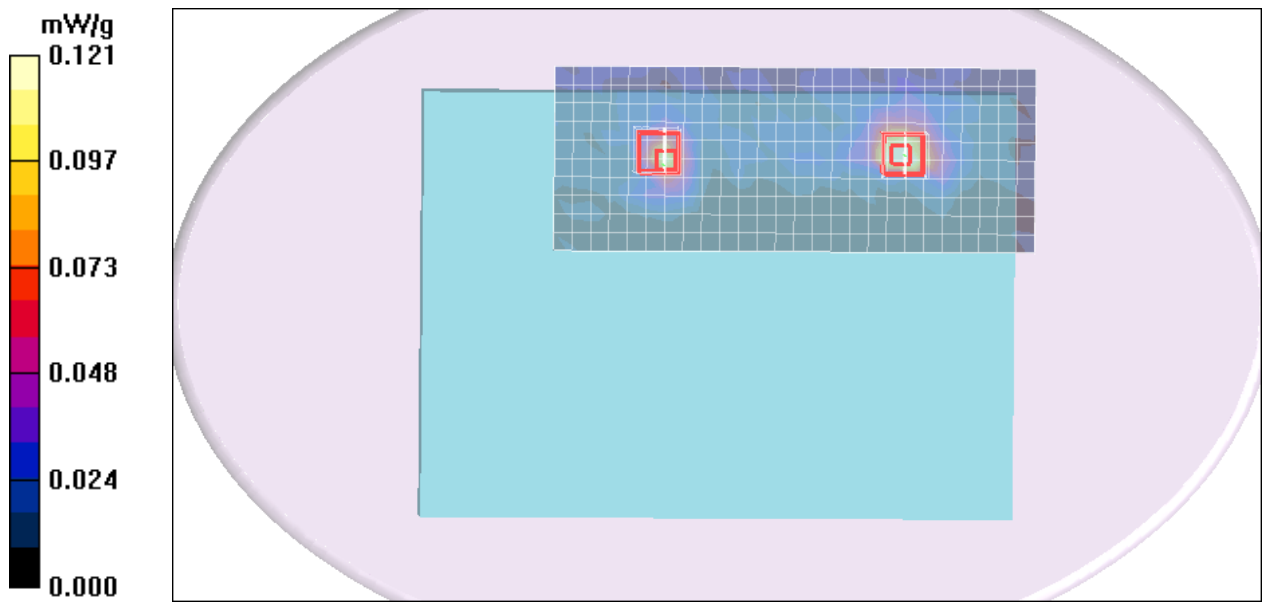

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Bottom Flat mode ant C HT20

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.47$ mho/m; $\epsilon_r = 48.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.72, 3.72, 3.72);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

C UNII CH5280 Rate=6M/Area Scan (19x14x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.267 mW/g

C UNII CH5280 Rate=6M/Zoom Scan (7x7x9)/Cube 0: Measurement


grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.664 V/m; Power Drift = -0.086 dB

Peak SAR (extrapolated) = 0.580 W/kg

SAR(1 g) = 0.177 mW/g; SAR(10 g) = 0.074 mW/g

Maximum value of SAR (measured) = 0.275 mW/g

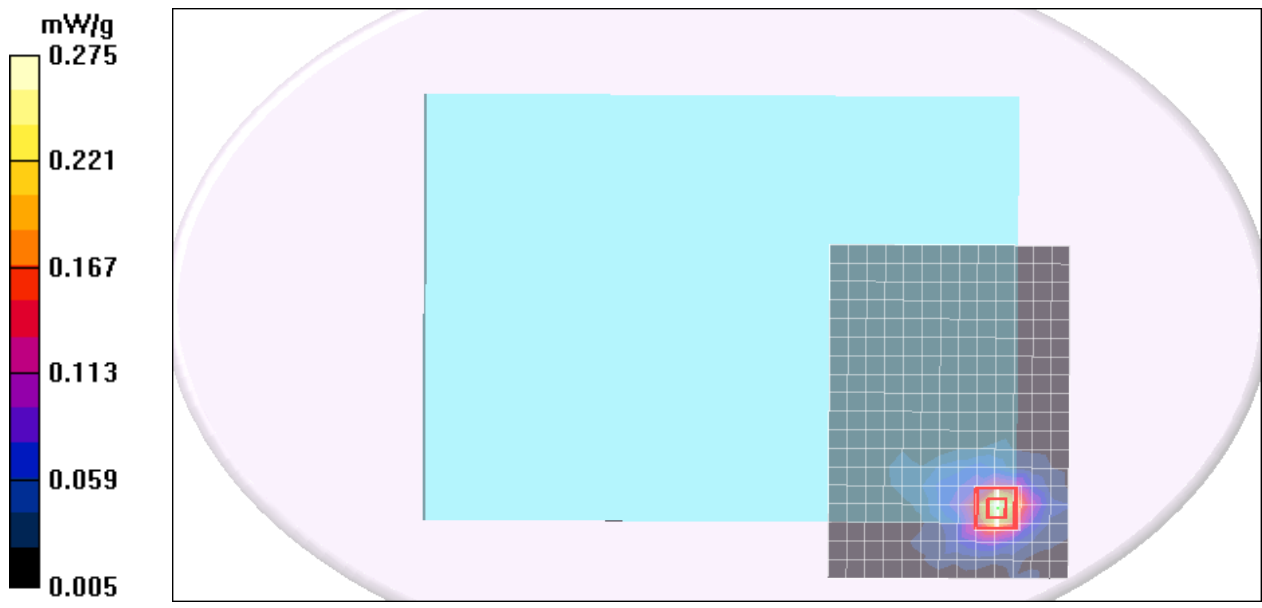

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Bottom Flat mode ant B HT20

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.48$ mho/m; $\epsilon_r = 48.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.72, 3.72, 3.72);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

B UNII CH5280 Rate=6.5M/Area Scan (11x24x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.126 mW/g

B UNII CH5280 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.985 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 0.233 W/kg

SAR(1 g) = 0.075 mW/g; SAR(10 g) = 0.029 mW/g

Maximum value of SAR (measured) = 0.123 mW/g

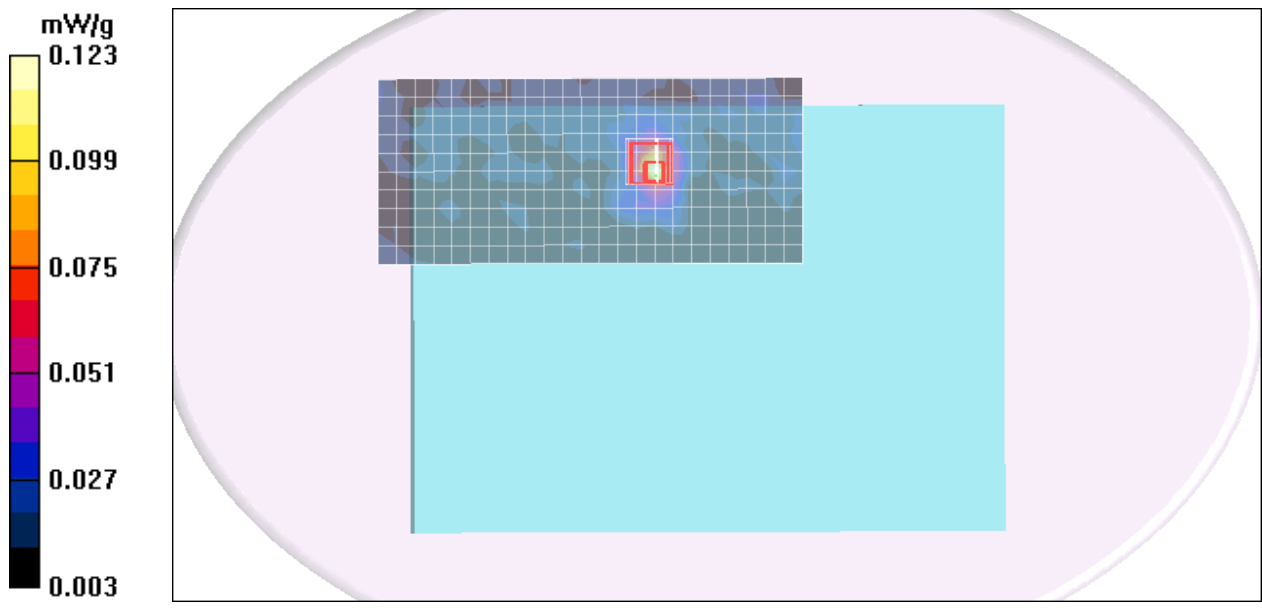

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Bottom Flat mode ant A HT20

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.98$ mho/m; $\epsilon_r = 47.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

A UNII CH5600 Rate=6.5M/Area Scan (11x20x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.182 mW/g

A UNII CH5600 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.000 V/m; Power Drift = -0.064 dB

Peak SAR (extrapolated) = 0.308 W/kg

SAR(1 g) = 0.099 mW/g; SAR(10 g) = 0.037 mW/g

Maximum value of SAR (measured) = 0.176 mW/g

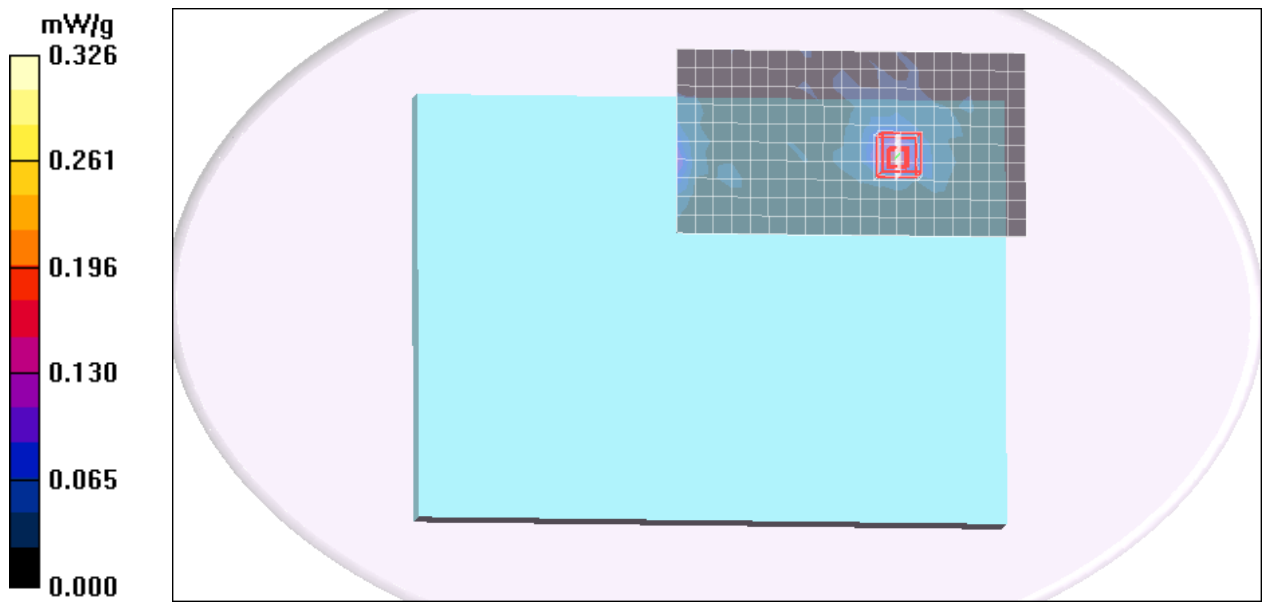

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Bottom Flat mode ant C HT20

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.96$ mho/m; $\epsilon_r = 47.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

C UNII CH5600 Rate=6.5M/Area Scan (17x14x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.269 mW/g

C UNII CH5600 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement


grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.750 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 0.600 W/kg

SAR(1 g) = 0.176 mW/g; SAR(10 g) = 0.075 mW/g

Maximum value of SAR (measured) = 0.286 mW/g

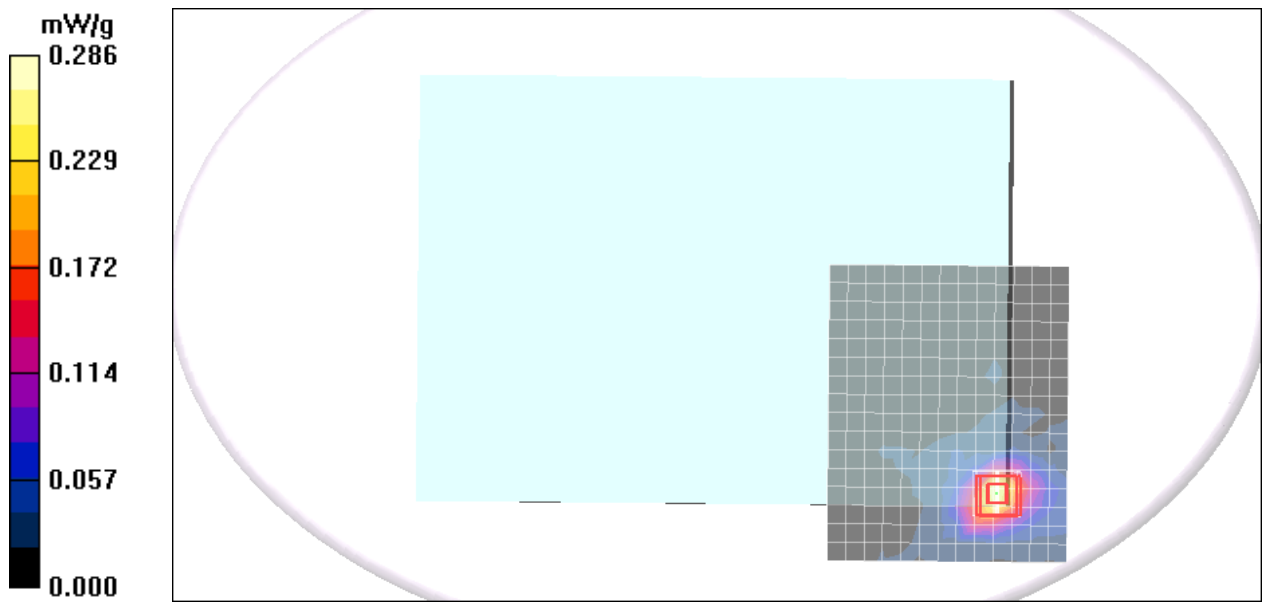

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Bottom Flat mode ant B HT20

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.98$ mho/m; $\epsilon_r = 47.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

B UNII CH5600 Rate=6.5M/Area Scan (11x22x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.179 mW/g

B UNII CH5600 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement

grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.705 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.386 W/kg

SAR(1 g) = 0.111 mW/g; SAR(10 g) = 0.044 mW/g

Maximum value of SAR (measured) = 0.199 mW/g

B UNII CH5600 Rate=6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.705 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.324 W/kg

SAR(1 g) = 0.081 mW/g; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.168 mW/g

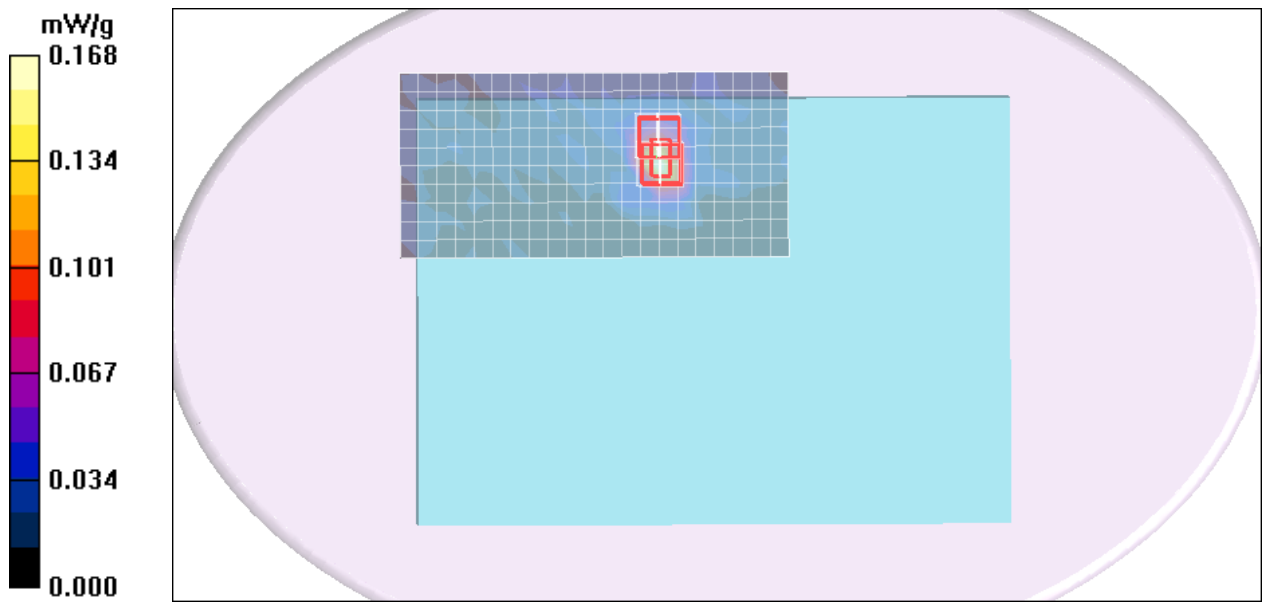

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Bottom Flat mode ant A HT20

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.23$ mho/m; $\epsilon_r = 47$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.77, 3.77, 3.77);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

A UNII CH5785 Rate=6.M/Area Scan (11x18x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.082 mW/g

A UNII CH5785 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement


grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = -0.000 dB

Peak SAR (extrapolated) = 0.360 W/kg

SAR(1 g) = 0.055 mW/g; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.092 mW/g

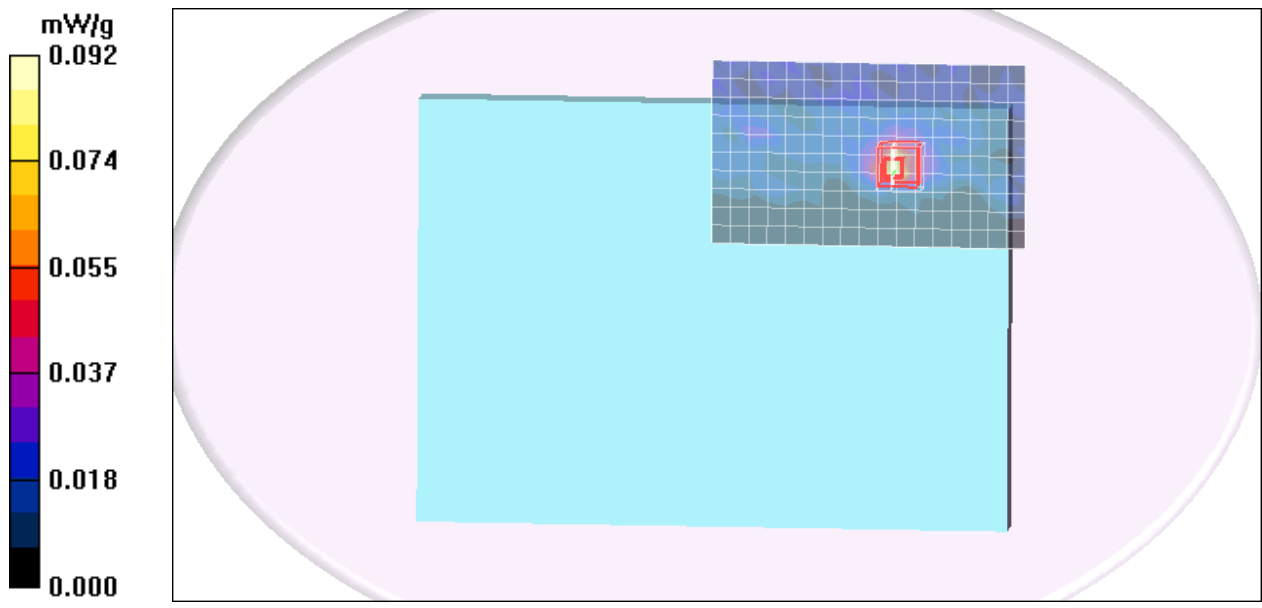

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Bottom Flat mode ant C HT20

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.21$ mho/m; $\epsilon_r = 47.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.77, 3.77, 3.77);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

C UNII CH5785 Rate=6.5M/Area Scan (15x13x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.161 mW/g

C UNII CH5785 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement


grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.816 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.540 W/kg

SAR(1 g) = 0.117 mW/g; SAR(10 g) = 0.053 mW/g

Maximum value of SAR (measured) = 0.169 mW/g

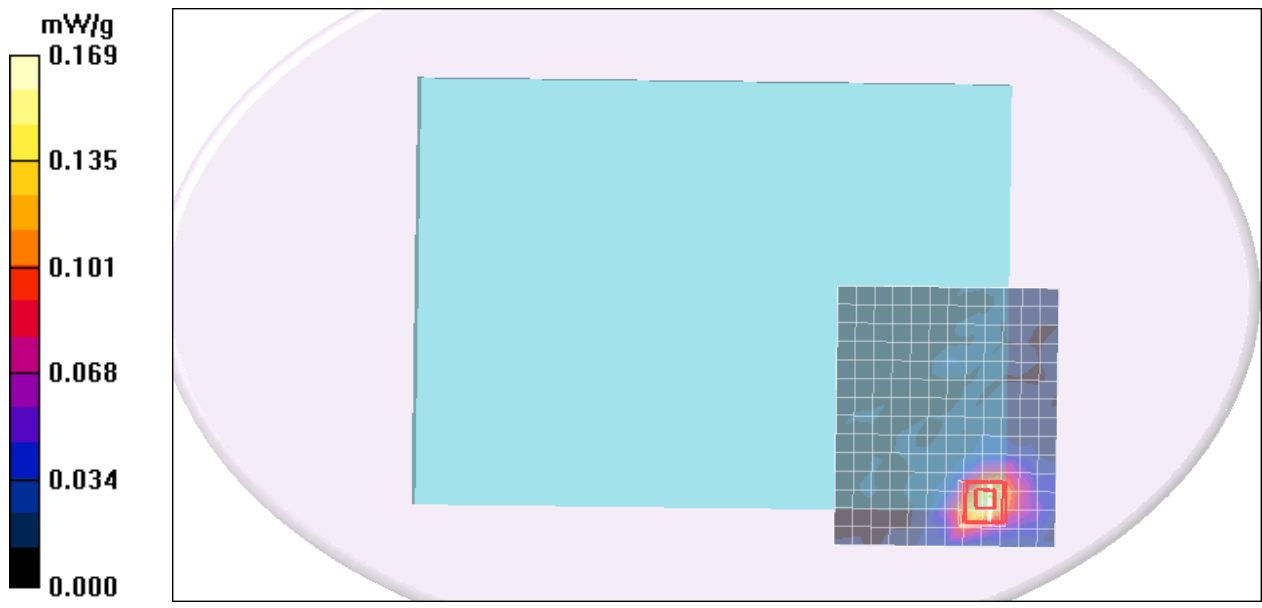

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Bottom Flat mode ant B HT20

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.96$ mho/m; $\epsilon_r = 47.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.77, 3.77, 3.77);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

B UNII CH5785 Rate=6.5M/Area Scan (11x21x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.080 mW/g

B UNII CH5785 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement


grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 0.291 W/kg

SAR(1 g) = 0.048 mW/g; SAR(10 g) = 0.024 mW/g

Maximum value of SAR (measured) = 0.090 mW/g

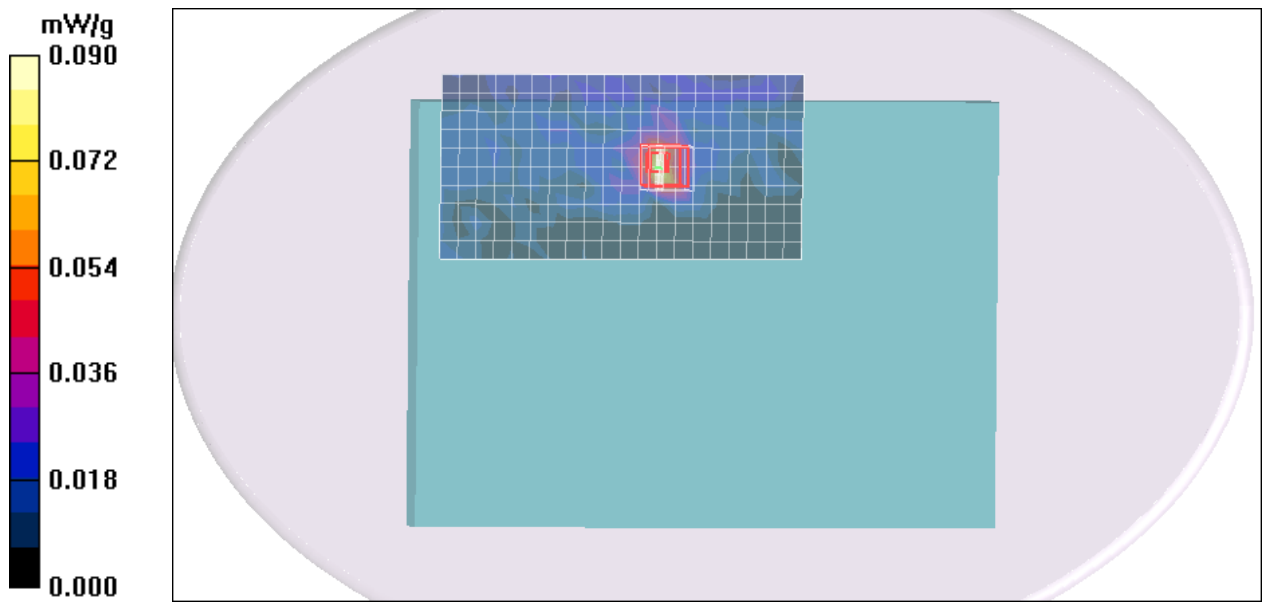

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Left Edge Touch mode ant A HT40

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5230 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5230$ MHz; $\sigma = 5.43$ mho/m; $\epsilon_r = 48.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.99, 3.99, 3.99);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

UNII CH5230 Rate=13.5M bit ant A/Area Scan (9x19x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.011 mW/g

UNII CH5230 Rate=13.5M bit ant A/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.244 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 0.031 W/kg

SAR(1 g) = 0.00244 mW/g; SAR(10 g) = 0.000658 mW/g

Maximum value of SAR (measured) = 0.029 mW/g

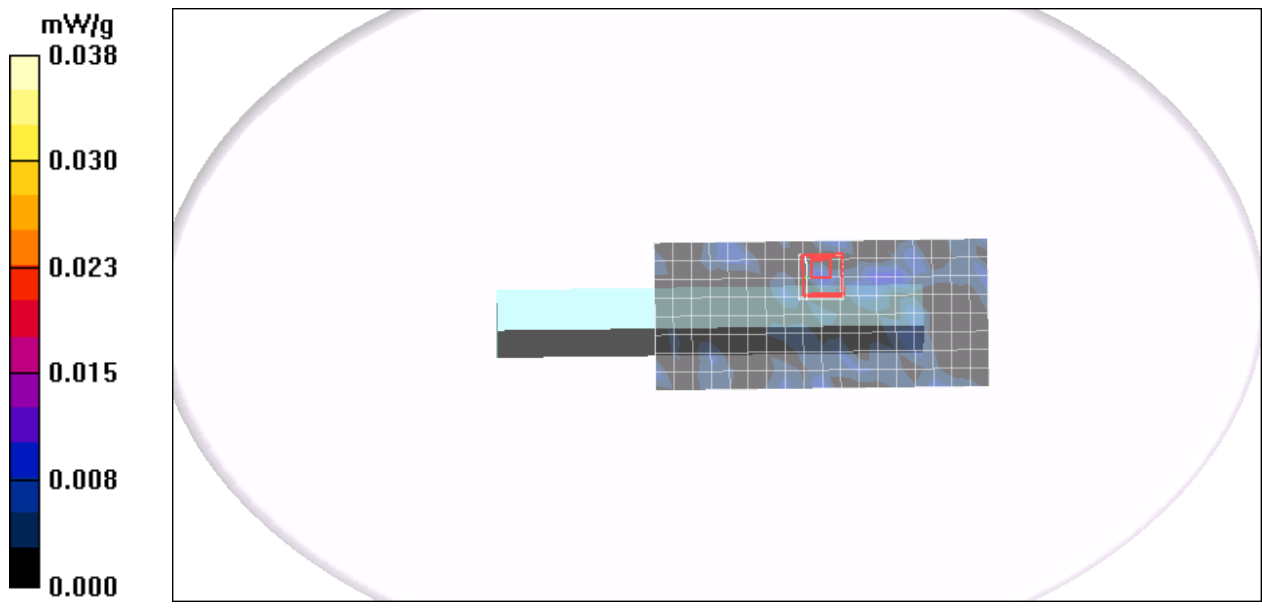

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Down Touch Edge mode ant C HT40

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5230 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5230$ MHz; $\sigma = 5.43$ mho/m; $\epsilon_r = 48.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.99, 3.99, 3.99);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

UNII CH5230 Rate=13.5M bit ant C/Area Scan (8x15x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.013 mW/g

UNII CH5230 Rate=13.5M bit ant C/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.718 V/m; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 0.016 W/kg

SAR(1 g) = 0.000731 mW/g; SAR(10 g) = 0.0002 mW/g

Maximum value of SAR (measured) = 0.016 mW/g

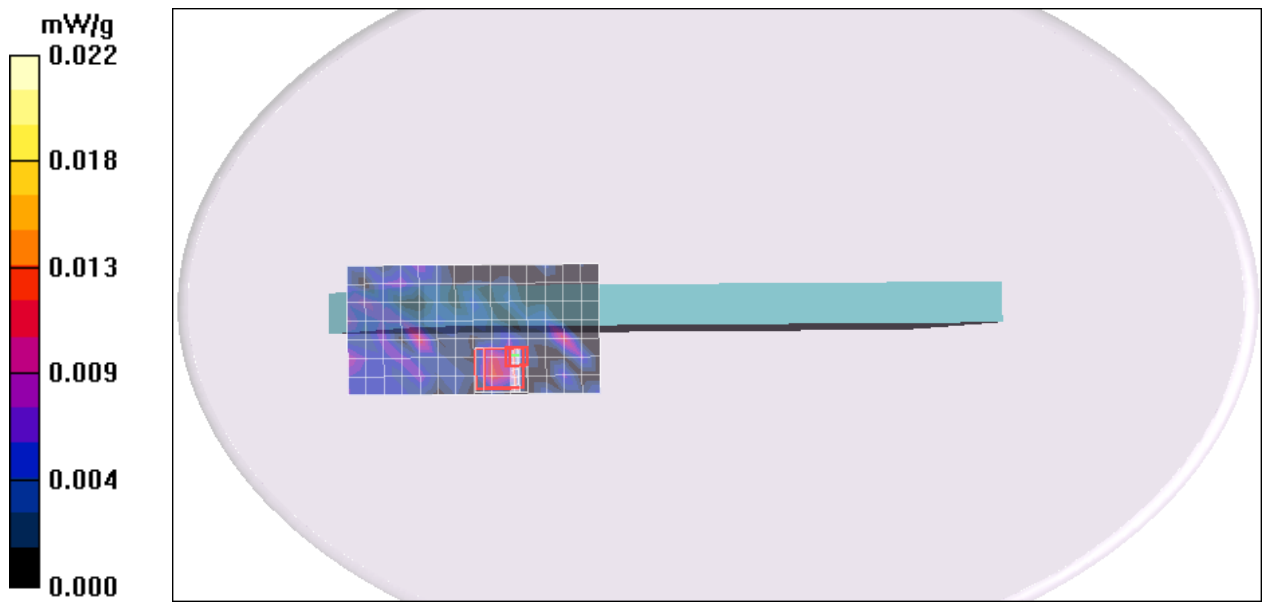

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Left Edge Touch mode ant A HT40

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5270 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5270$ MHz; $\sigma = 5.48$ mho/m; $\epsilon_r = 48.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.72, 3.72, 3.72);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

UNII CH5270 Rate=13.5M bit ant A/Area Scan (10x18x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.020 mW/g

UNII CH5270 Rate=13.5M bit ant A/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.795 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 0.023 W/kg

SAR(1 g) = 0.000624 mW/g; SAR(10 g) = 0.000116 mW/g

Maximum value of SAR (measured) = 0.023 mW/g

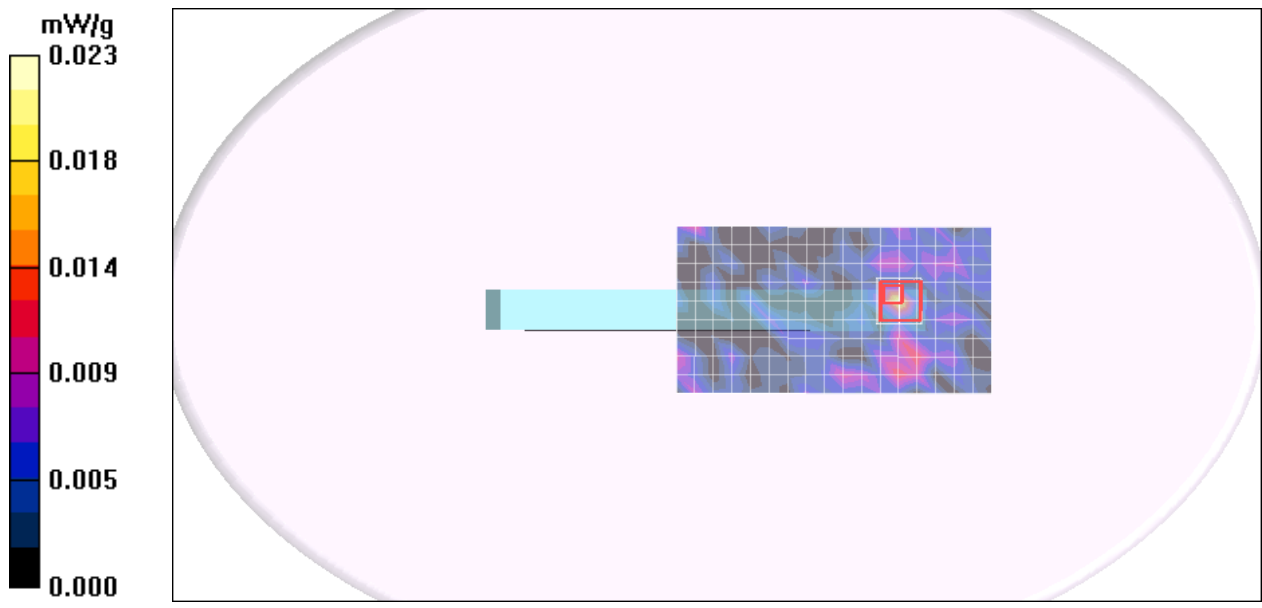

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Down Touch Edge mode ant C HT40

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5190 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5190$ MHz; $\sigma = 5.44$ mho/m; $\epsilon_r = 48.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.99, 3.99, 3.99);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

UNII CH5270 Rate=6M bit ant C/Area Scan (8x18x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.016 mW/g

UNII CH5270 Rate=6M bit ant C/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.555 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.020 W/kg

SAR(1 g) = 0.000558 mW/g; SAR(10 g) = 0.000117 mW/g

Maximum value of SAR (measured) = 0.017 mW/g

UNII CH5270 Rate=6M bit ant C/Zoom Scan (7x7x9)/Cube 1:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.555 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.021 W/kg

SAR(1 g) = 0.000338 mW/g; SAR(10 g) = 7.06e-005 mW/g

Maximum value of SAR (measured) = 0.014 mW/g

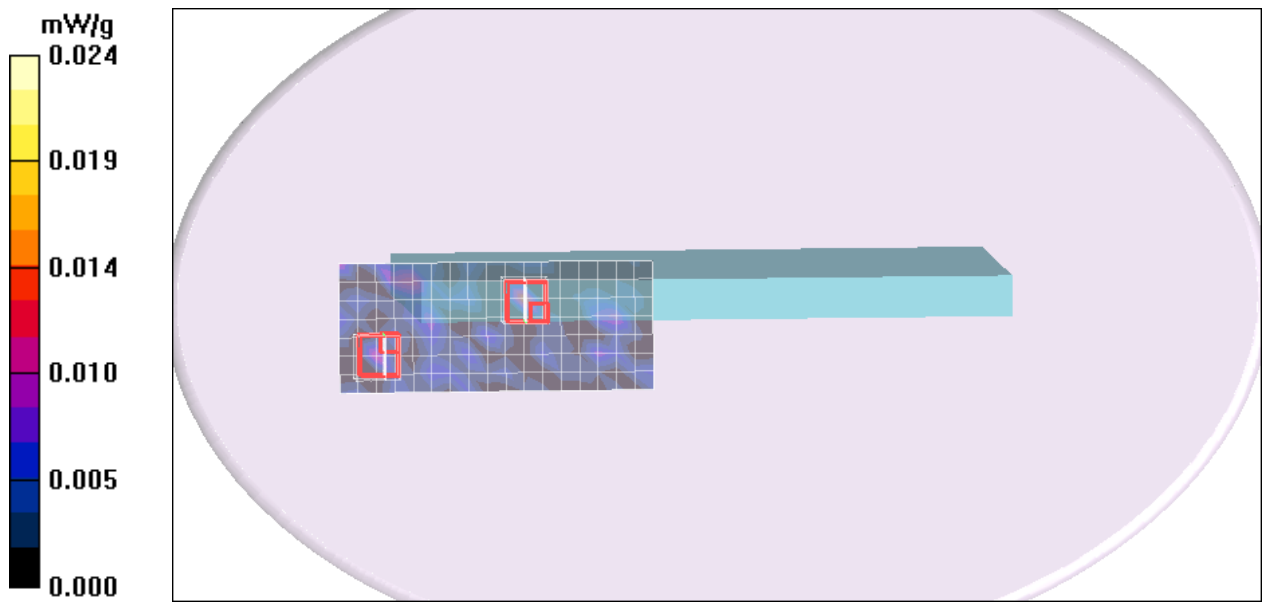

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Left Edge Touch mode ant A HT40

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5590 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5590$ MHz; $\sigma = 5.97$ mho/m; $\epsilon_r = 47.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

DTS CH5590 Rate=6M bit ant A/Area Scan (9x19x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.014 mW/g

DTS CH5590 Rate=6M bit ant A/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.31 V/m; Power Drift = -0.058 dB

Peak SAR (extrapolated) = 0.041 W/kg

SAR(1 g) = 0.00234 mW/g; SAR(10 g) = 0.000666 mW/g

Maximum value of SAR (measured) = 0.028 mW/g

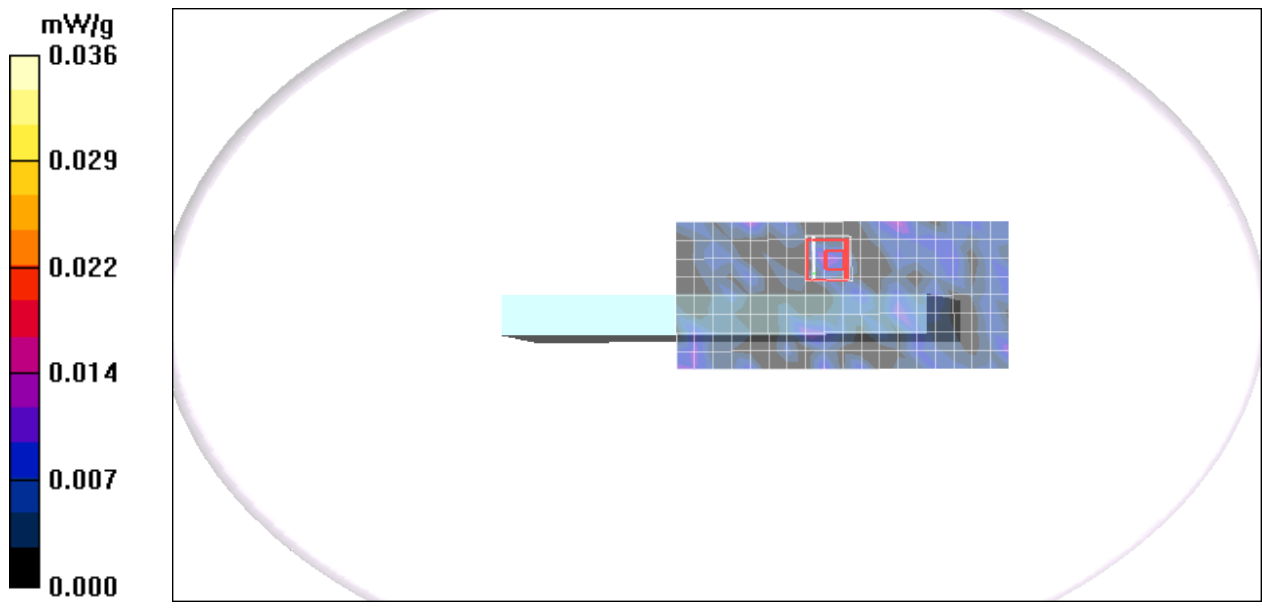

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Down Edge Touch mode ant C HT40

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5590 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5590$ MHz; $\sigma = 5.94$ mho/m; $\epsilon_r = 47.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

DTS CH5590 Rate=6M bit ant C/Area Scan (9x17x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.030 mW/g

DTS CH5590 Rate=6M bit ant C/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.708 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.166 W/kg

SAR(1 g) = 0.020 mW/g; SAR(10 g) = 0.00806 mW/g

Maximum value of SAR (measured) = 0.036 mW/g

DTS CH5590 Rate=6M bit ant C/Zoom Scan (7x7x9)/Cube 1:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.708 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.211 W/kg

SAR(1 g) = 0.022 mW/g; SAR(10 g) = 0.00842 mW/g

Maximum value of SAR (measured) = 0.038 mW/g

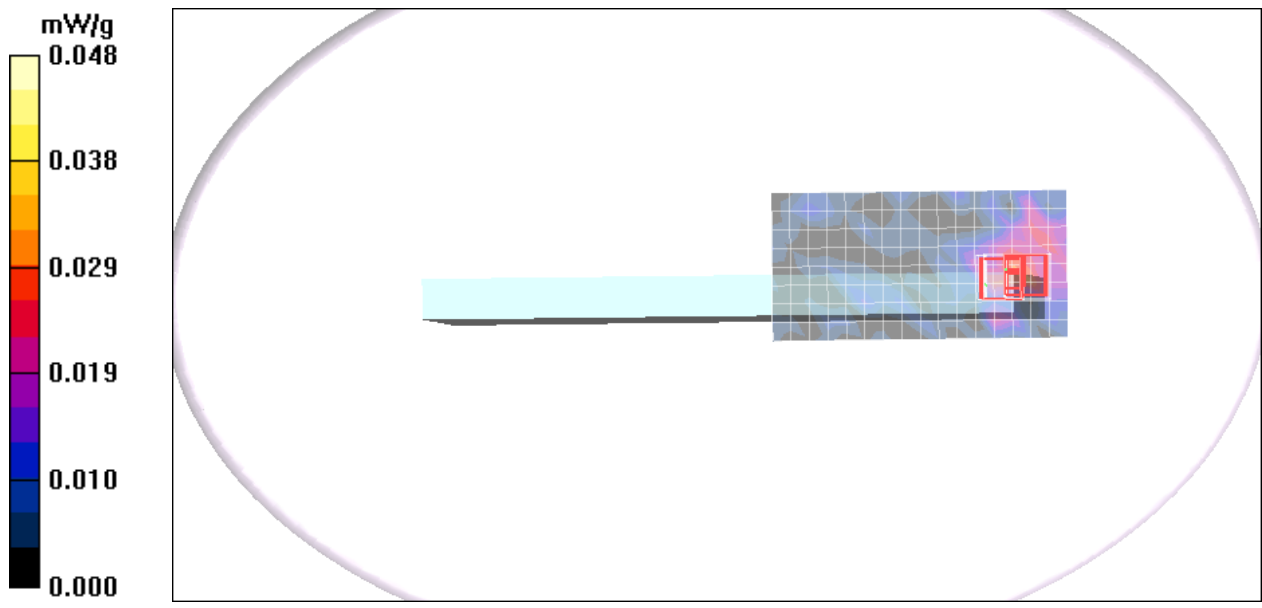

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Left Edge Touch mode ant A HT40

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5755 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5755$ MHz; $\sigma = 6.2$ mho/m; $\epsilon_r = 47.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.77, 3.77, 3.77);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

DTS CH5755 Rate=6M bit ant A/Area Scan (10x19x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.017 mW/g

DTS CH5755 Rate=6M bit ant A/Zoom Scan (7x7x9)/Cube 1:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.996 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.048 W/kg

SAR(1 g) = 0.00515 mW/g; SAR(10 g) = 0.00199 mW/g

Maximum value of SAR (measured) = 0.044 mW/g

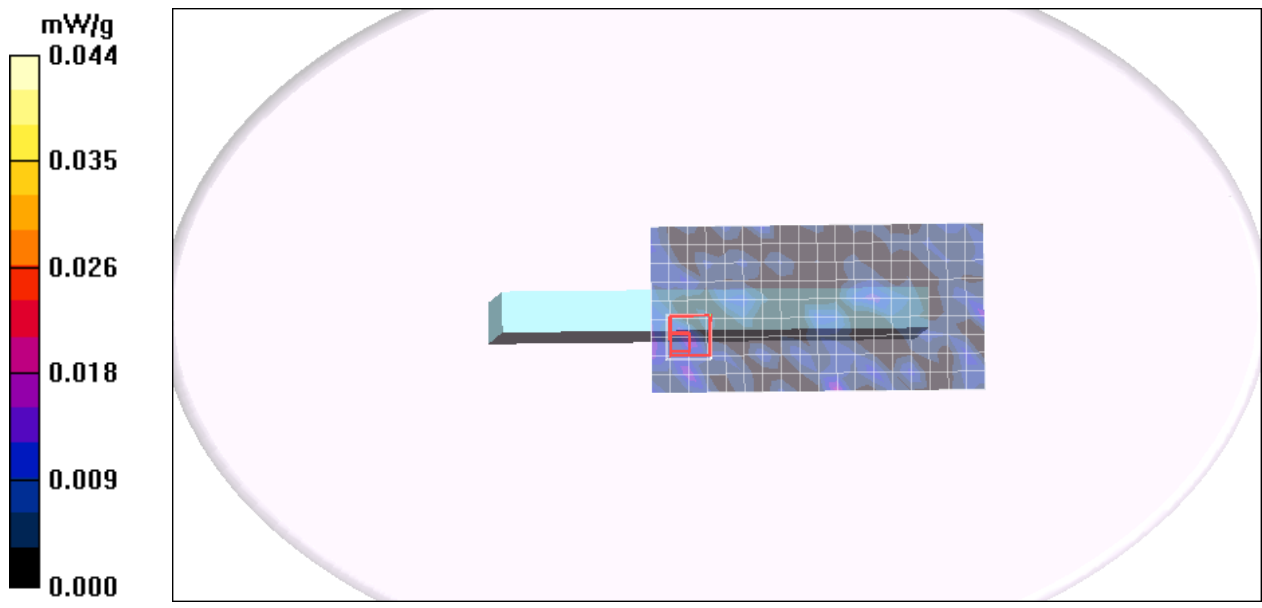

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Down Edge Touch mode ant C HT40

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5755 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5755$ MHz; $\sigma = 6.18$ mho/m; $\epsilon_r = 47.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.77, 3.77, 3.77);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

DTS CH5755 Rate=6M bit ant C/Area Scan (9x16x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.039 mW/g

DTS CH5755 Rate=6M bit ant C/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.01 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 0.112 W/kg

SAR(1 g) = 0.015 mW/g; SAR(10 g) = 0.00537 mW/g

Maximum value of SAR (measured) = 0.027 mW/g

DTS CH5755 Rate=6M bit ant C/Zoom Scan (7x7x9)/Cube 1:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.01 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 0.117 W/kg

SAR(1 g) = 0.0093 mW/g; SAR(10 g) = 0.00287 mW/g

Maximum value of SAR (measured) = 0.022 mW/g

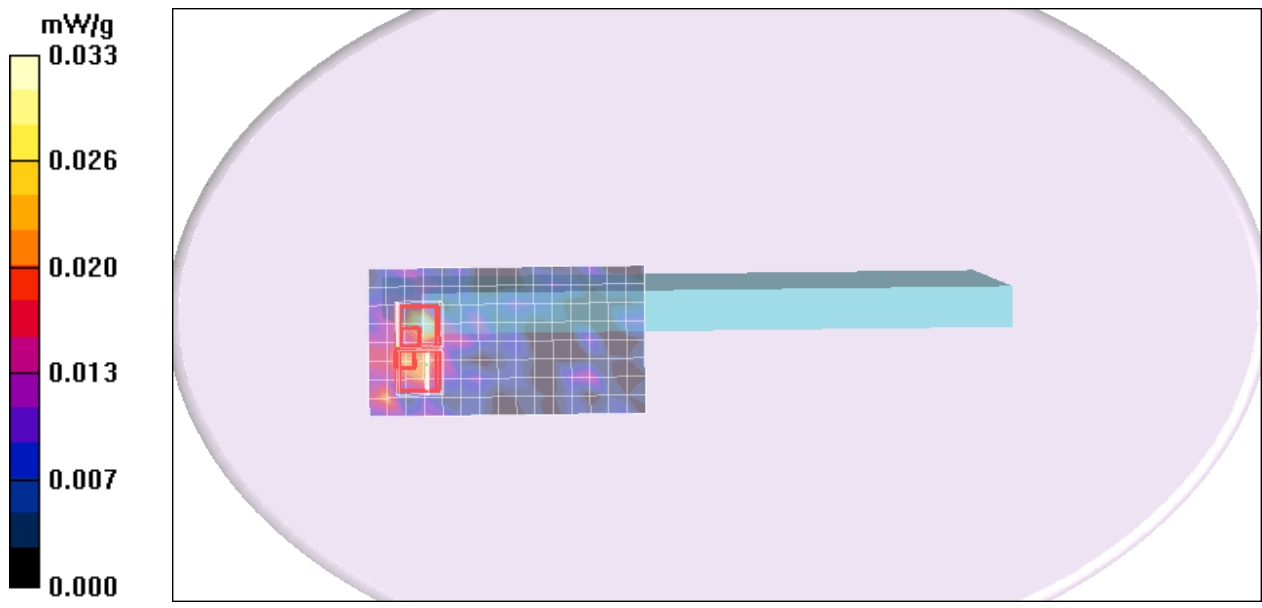

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Bottom Flat mode ant A HT40

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5230 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5230$ MHz; $\sigma = 5.43$ mho/m; $\epsilon_r = 48.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.99, 3.99, 3.99);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

A UNII CH5230 Rate=13.5M/Area Scan (11x17x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.101 mW/g

A UNII CH5230 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.19 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.206 W/kg

SAR(1 g) = 0.068 mW/g; SAR(10 g) = 0.020 mW/g

Maximum value of SAR (measured) = 0.127 mW/g

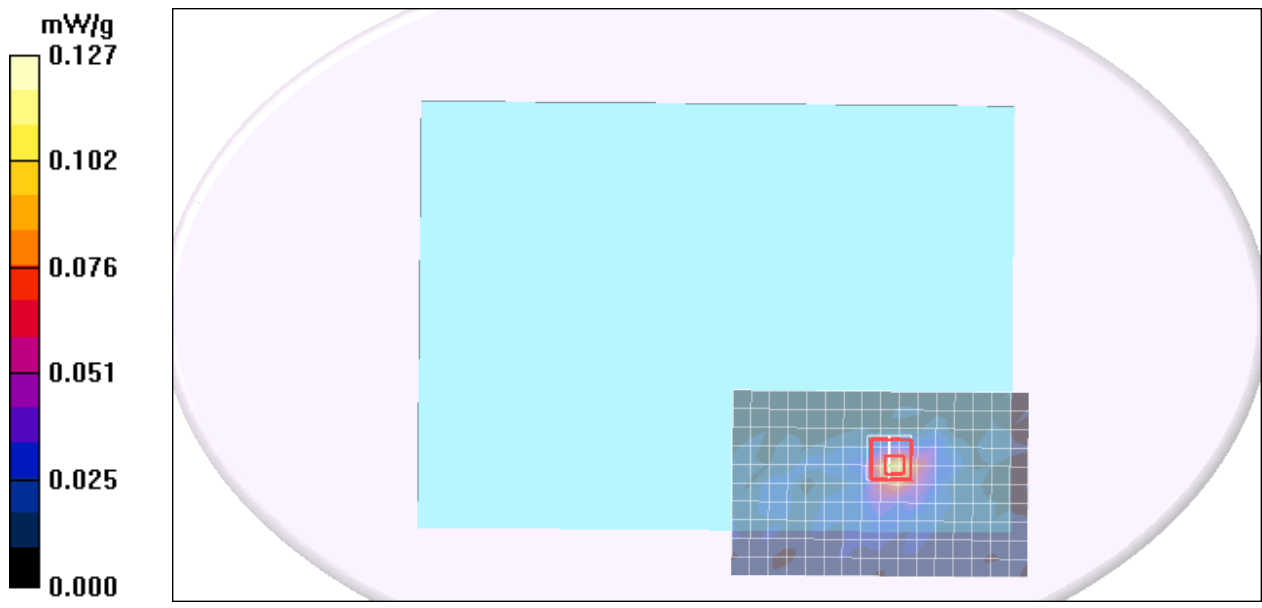

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Bottom Flat mode ant A HT40

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5230 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5230$ MHz; $\sigma = 5.39$ mho/m; $\epsilon_r = 48.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.99, 3.99, 3.99);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

B UNII CH5230 Rate=13.5M/Area Scan (15x13x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.123 mW/g

B UNII CH5230 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 0.221 W/kg

SAR(1 g) = 0.079 mW/g; SAR(10 g) = 0.032 mW/g

Maximum value of SAR (measured) = 0.133 mW/g

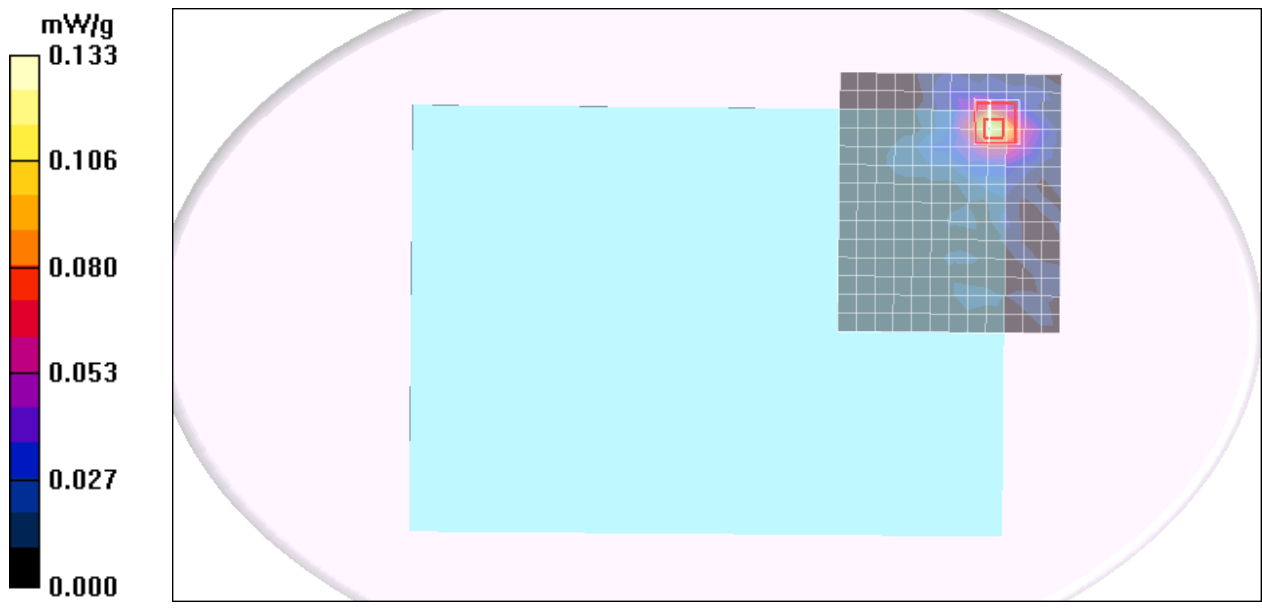

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Bottom Flat mode ant B HT40

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5230 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5230$ MHz; $\sigma = 5.39$ mho/m; $\epsilon_r = 48.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.99, 3.99, 3.99);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

B UNII CH5230 Rate=13.5M/Area Scan (11x21x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.106 mW/g

B UNII CH5230 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.598 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 0.182 W/kg

SAR(1 g) = 0.060 mW/g; SAR(10 g) = 0.021 mW/g

Maximum value of SAR (measured) = 0.106 mW/g

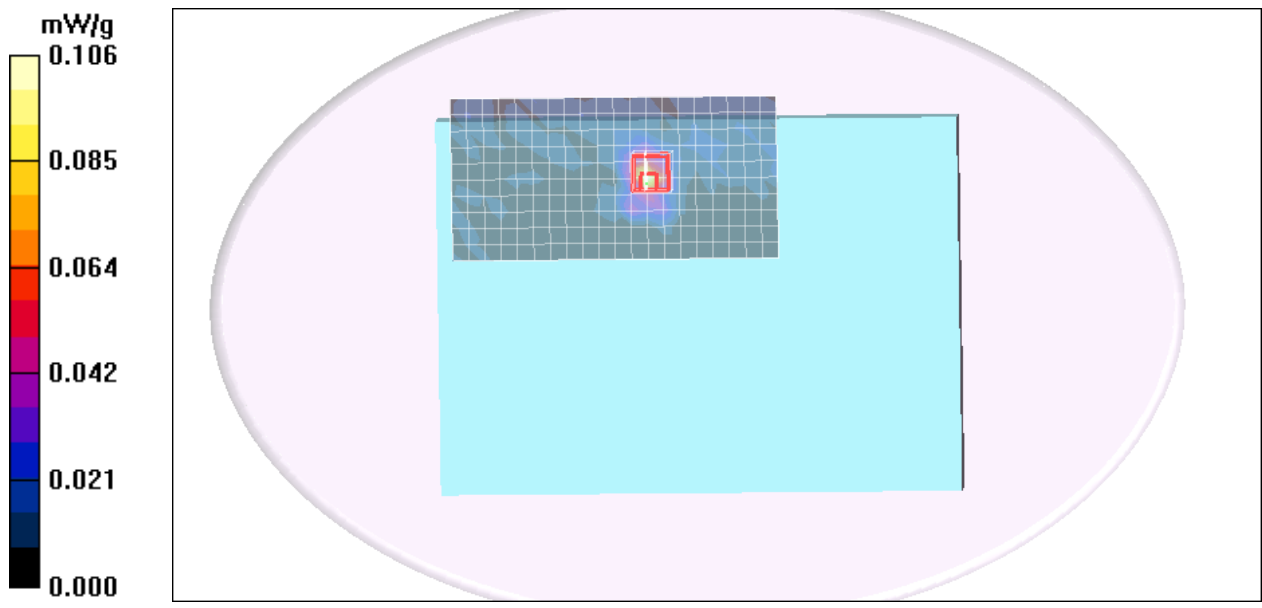

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Bottom Flat mode ant A HT40

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5270 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5270$ MHz; $\sigma = 5.48$ mho/m; $\epsilon_r = 48.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.72, 3.72, 3.72);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

A UNII CH5270 Rate=13.5M/Area Scan (11x17x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.171 mW/g

A UNII CH5270 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 999.0 dB

Peak SAR (extrapolated) = 0.281 W/kg

SAR(1 g) = 0.096 mW/g; SAR(10 g) = 0.036 mW/g

Maximum value of SAR (measured) = 0.161 mW/g

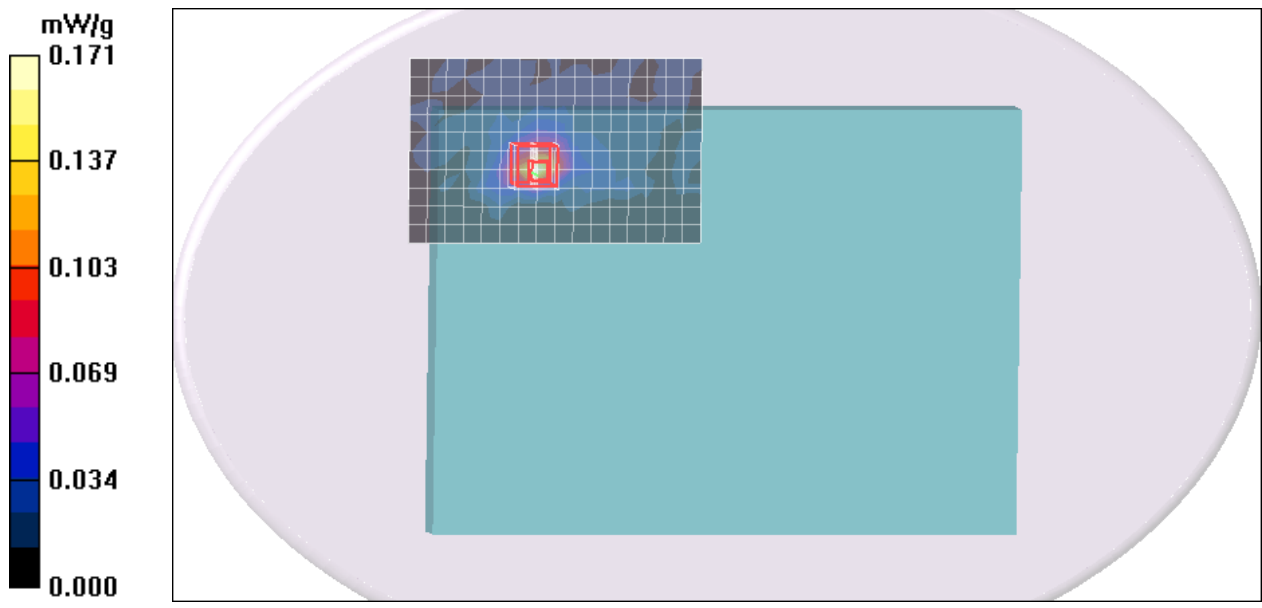

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Bottom Flat mode ant C HT40

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5270 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5270$ MHz; $\sigma = 5.44$ mho/m; $\epsilon_r = 48.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.72, 3.72, 3.72);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

C UNII CH5270 Rate=13.5M/Area Scan (14x13x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.252 mW/g

C UNII CH5270 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.846 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 0.520 W/kg

SAR(1 g) = 0.169 mW/g; SAR(10 g) = 0.069 mW/g

Maximum value of SAR (measured) = 0.263 mW/g

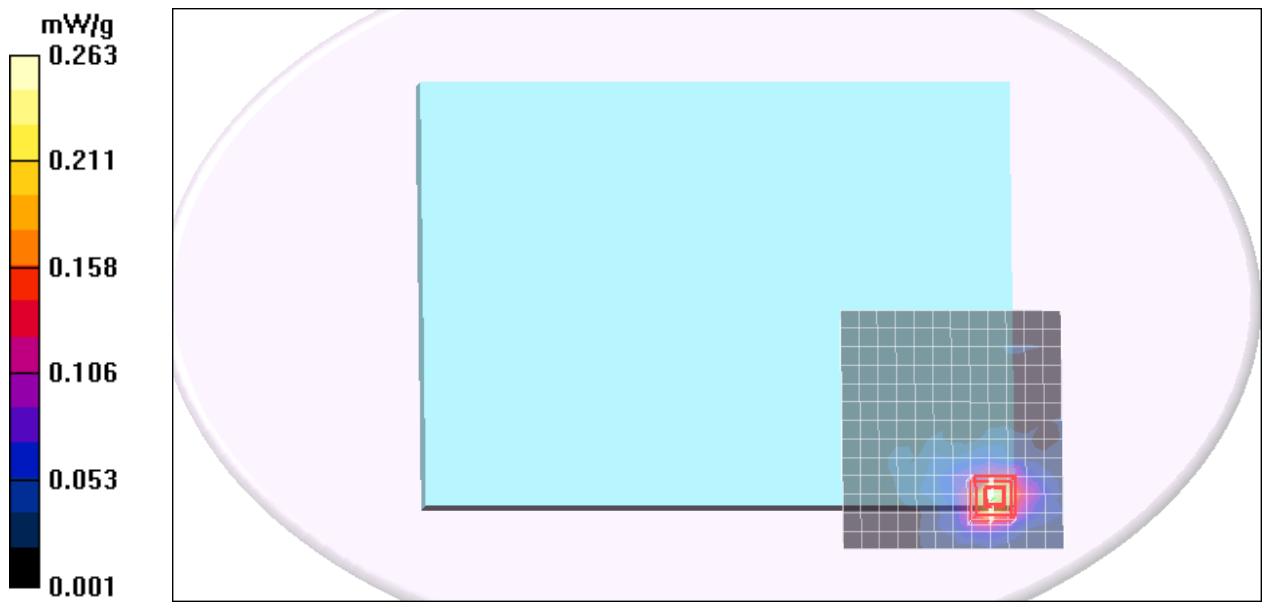

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Bottom Flat mode ant B HT40

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5270 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5270$ MHz; $\sigma = 5.44$ mho/m; $\epsilon_r = 48.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.72, 3.72, 3.72);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

B UNII CH5270 Rate=13.5M/Area Scan (11x19x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.136 mW/g

B UNII CH5270 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.09 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.373 W/kg

SAR(1 g) = 0.075 mW/g; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.132 mW/g

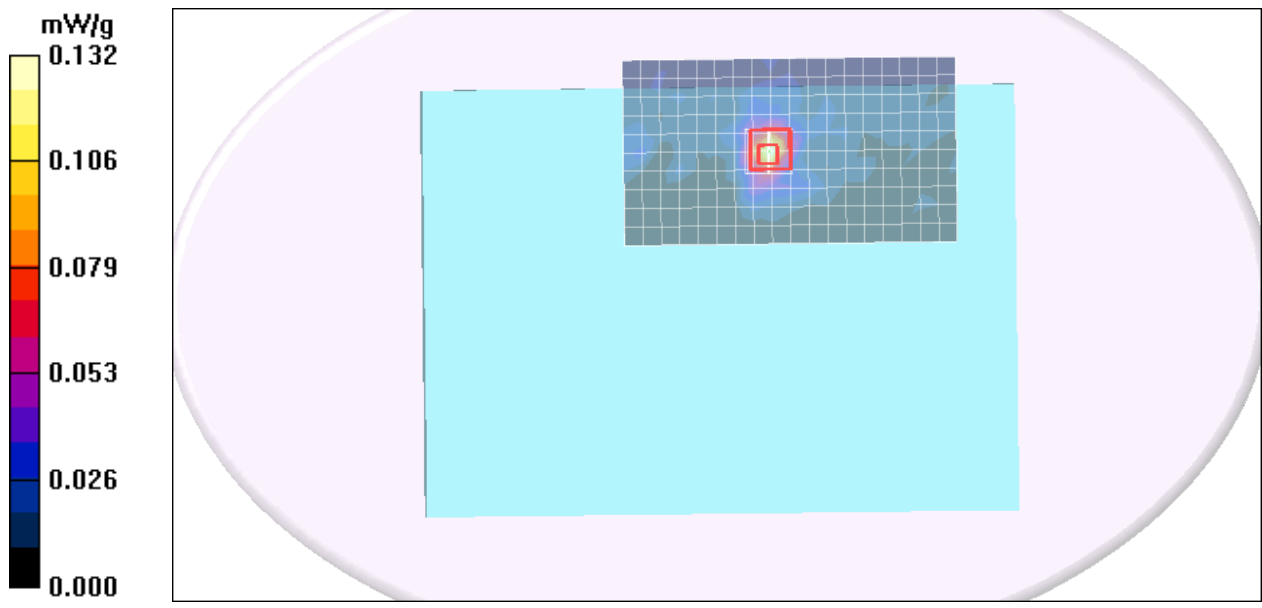

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Bottom Flat mode ant A HT40

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5590 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5590$ MHz; $\sigma = 5.97$ mho/m; $\epsilon_r = 47.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

A UNII CH5590 Rate=13.5M/Area Scan (11x17x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.159 mW/g

A UNII CH5590 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.000 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 0.318 W/kg

SAR(1 g) = 0.101 mW/g; SAR(10 g) = 0.034 mW/g

Maximum value of SAR (measured) = 0.187 mW/g

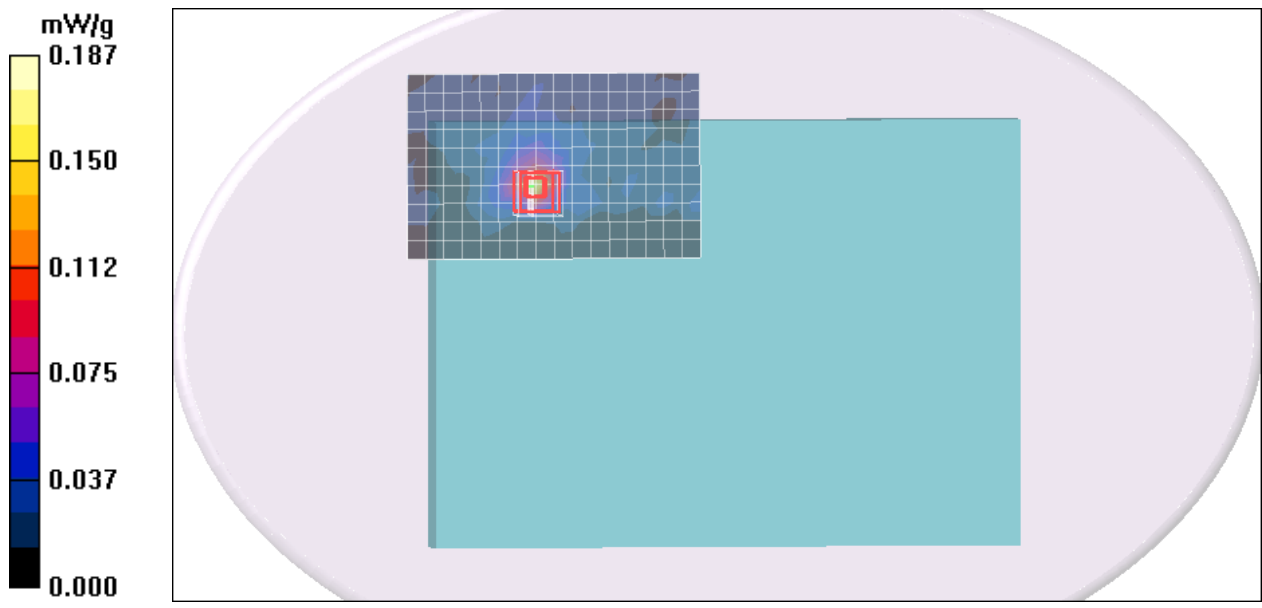

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Bottom Flat mode ant C HT40

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5590 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5590$ MHz; $\sigma = 5.94$ mho/m; $\epsilon_r = 47.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

C UNII CH5590 Rate=13.5M/Area Scan (13x12x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.237 mW/g

C UNII CH5590 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.855 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 0.676 W/kg

SAR(1 g) = 0.179 mW/g; SAR(10 g) = 0.070 mW/g

Maximum value of SAR (measured) = 0.299 mW/g

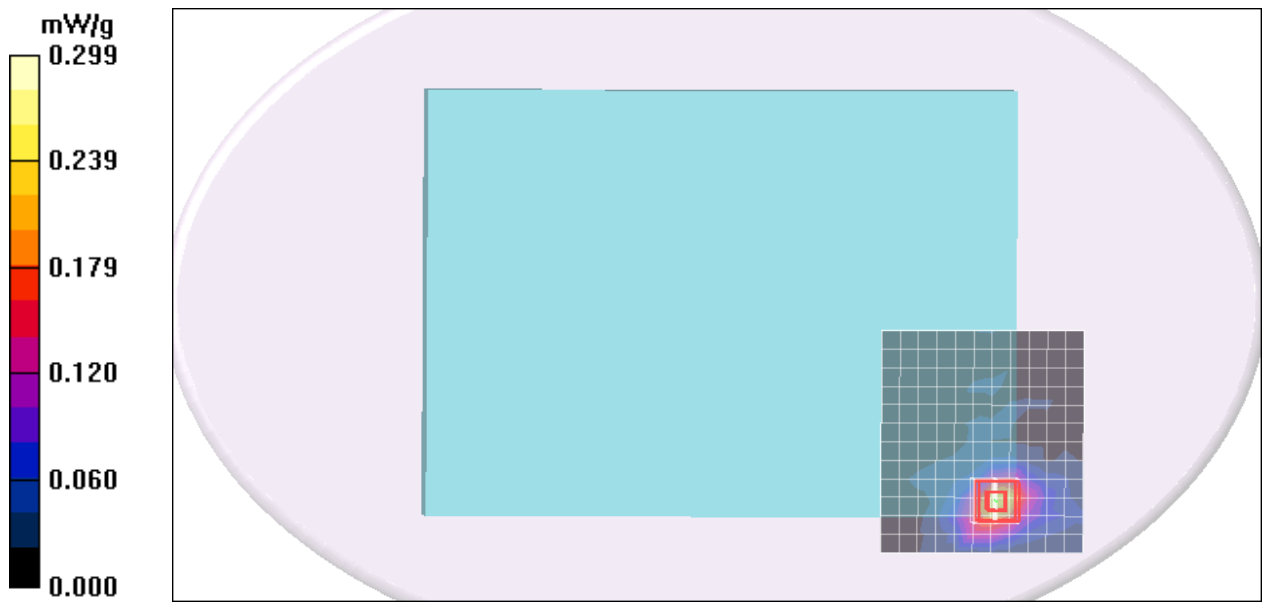

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Bottom Flat mode ant B HT40

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5590 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5590$ MHz; $\sigma = 5.94$ mho/m; $\epsilon_r = 47.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

B UNII CH5590 Rate=13.5M/Area Scan (11x19x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.197 mW/g

B UNII CH5590 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.286 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 0.395 W/kg

SAR(1 g) = 0.104 mW/g; SAR(10 g) = 0.038 mW/g

Maximum value of SAR (measured) = 0.214 mW/g

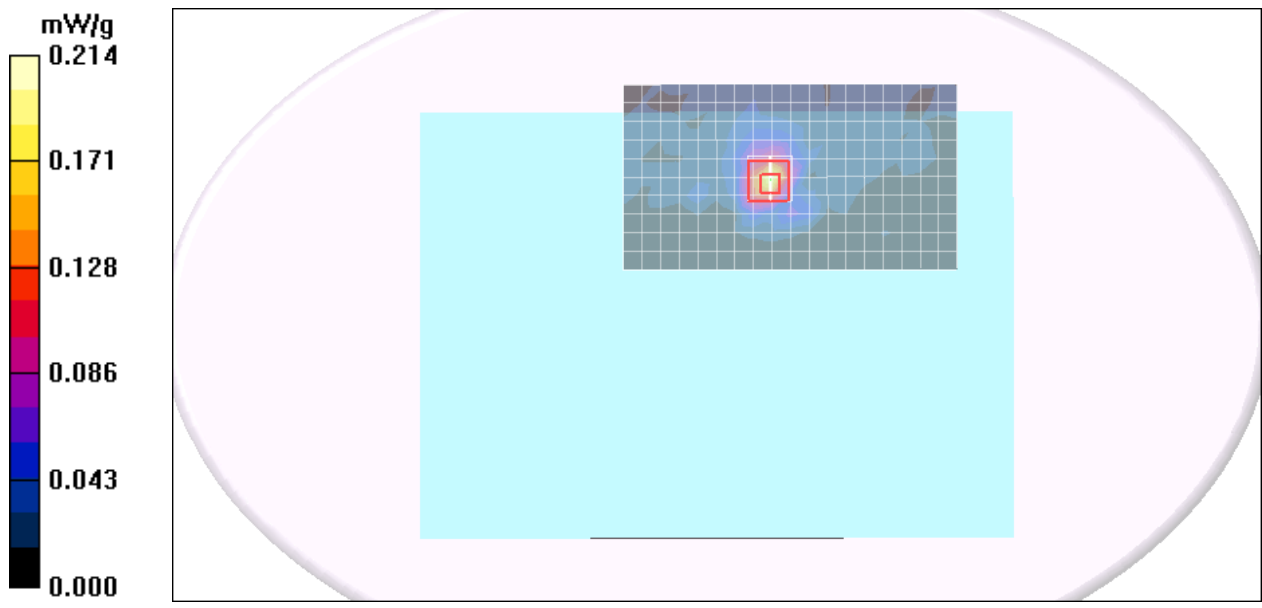

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Bottom Flat mode ant A HT40

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5755 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5755$ MHz; $\sigma = 6.2$ mho/m; $\epsilon_r = 47.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.77, 3.77, 3.77);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

A UNII CH5755 Rate=13.5M/Area Scan (11x17x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.077 mW/g

A UNII CH5755 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = -0.073 dB

Peak SAR (extrapolated) = 0.476 W/kg

SAR(1 g) = 0.056 mW/g; SAR(10 g) = 0.018 mW/g

Maximum value of SAR (measured) = 0.088 mW/g

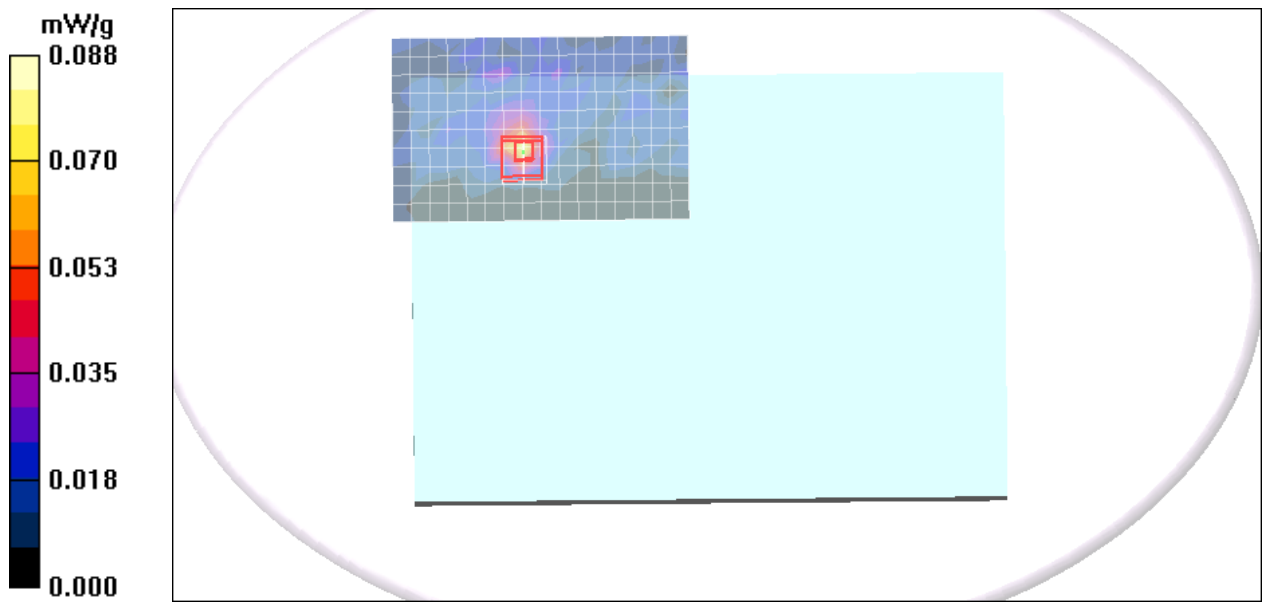

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Bottom Flat mode ant C HT40

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5755 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5755$ MHz; $\sigma = 6.18$ mho/m; $\epsilon_r = 47.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.77, 3.77, 3.77);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

C UNII CH5755 Rate=13.5M/Area Scan (13x12x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.135 mW/g

C UNII CH5755 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.861 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 0.262 W/kg

SAR(1 g) = 0.088 mW/g; SAR(10 g) = 0.038 mW/g

Maximum value of SAR (measured) = 0.142 mW/g

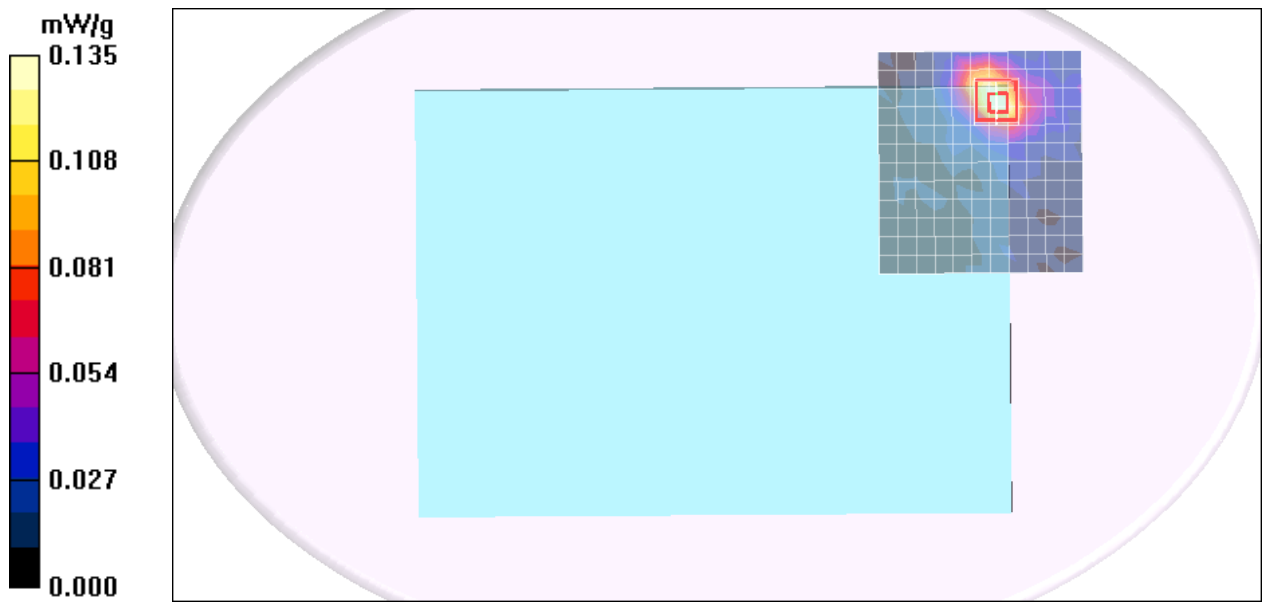

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Bottom Flat mode ant B HT40

DUT: T008; Type: J3400 Tablet PC; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5755 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5755$ MHz; $\sigma = 6.18$ mho/m; $\epsilon_r = 47.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.77, 3.77, 3.77);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 9/19/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

B UNII CH5755 Rate=13.5M/Area Scan (11x19x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.070 mW/g

B UNII CH5755 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = -0.082 dB

Peak SAR (extrapolated) = 0.319 W/kg

SAR(1 g) = 0.058 mW/g; SAR(10 g) = 0.024 mW/g

Maximum value of SAR (measured) = 0.087 mW/g

