




SAR & HAC Instruments for Wireless • Consulting • Research • Standards • Compliance • Training

Applicant Name: Intel Corporation
Applicant Address: Intel Corporation
 2111 Ne 25th Avenue JF3-3-G14,
 Hillsboro, OR 97124
Project Number: ITLB-Motion-5269
Test/Analysis Date: 26th, 29th, 30th 31st January 2007

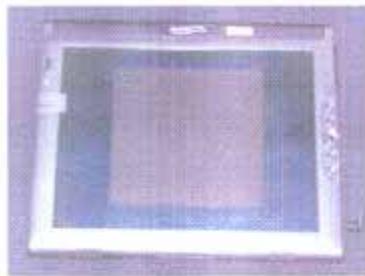

DUT Type	WM3945ABG
FCC ID	Q3QIWM3945ABG
Antenna Type	Pecos II
Project Name	Motion
Received Status	Pre Production Model
DUT Serial Number	IDX80010016007
Experimental/Compliance	Compliance-FCC
Tx Frequency	2412MHz to 2462MHz 802.11bg 5180MHz to 5320MHz 802.11a 5745MHz to 5825MHz 802.11a
Max Tx Power	802.11bg = 18.72dBm peak 802.11a = 23dBm peak
Conservative Averaged SAR (RF Exposure)	802.11b = 1.435 W/kg 802.11g = 1.489 W/kg 802.11a = 1.422 W/kg low band 802.11a = 1.497 W/kg high band

We the undersigned of APREL Laboratories, located at 17 Bentley Avenue, Ottawa, Ontario, Canada, K2E-6T7 on the date indicated attest that the Device Under Test as detailed within this test report has been tested and found to be compliant with the Uncontrolled Environment RF exposure rules and regulations as defined by the methodologies, procedures, and standards as described in this document.

APREL Laboratories are an ISO 17025 accredited facility registered under Standards Council Canada lab 48.

Art Brennan
Document Control

Stuart Nicol, Date
Director Product Development

Dr Jacek J. Wojcik, Date
P. Engineer



Table of Contents

1.0	Introduction.....	3
2.0	Applicable Documents.....	6
3.0	ALSAS-10U System Description	7
3.1	Applications	8
3.2	Visualisation and reporting	8
3.3	Field scans	8
3.3.1	 Area Scans	8
3.3.2	 Zoom Scan (Cube Scan Averaging)	9
3.4	Operator settings.....	9
3.5	ALSAS-10U Interpolation and Extrapolation Uncertainty	9
4.0	ALSAS-10U Hardware	10
4.1	Isotropic E-Field Probe	10
4.2	Isotropic E-Field Probe Specification.....	11
4.3	Boundary Detection Unit and Probe Mounting Device.....	11
4.4	Daq-Paq (Analog to Digital Electronics).....	11
4.5	Axis Articulated Robot	12
4.6	ALSAS Universal Workstation	12
4.7	Universal Device Positioner	13
4.8	Phantom Types	14
4.8.1	 APREL SAM Phantoms.....	14
4.8.2	 APREL Laboratories Universal Phantom.....	15
4.9	Validation Dipoles.....	16
5.0	Tissue Simulation Fluid	17
5.1	Tissue Calibration Procedure Using a Coaxial Probe	18
5.2	Tissue Calibration Results	18
6.0	System Validation.....	19
6.1	Experimental Results Summary.....	20
6.2	SAR Measurement Procedure	20
6.3	SAR Exposure Limits	20
6.4	Equipment List.....	22
6.5	SAR Measurement Results.....	23
Appendix A SAR Plots		35
Appendix B Calibration Reports		



1.0 Introduction

Tests were conducted at APREL Laboratories within the ISO 17025 accredited SAR facility to establish the conservative exposure value associated with the Device Under Test as detailed within this test report. Assessments were made in line with the guidelines contained in the reference documents. The method used for assessment was the ALSAS-10U (APREL Laboratories SAR Assessment System-10 Universal). All practices along with standards and scientific methodologies which have been utilized during the assessment of the Device Under Test (DUT) are detailed within this test report.




APREL Laboratories currently hold senior and executive positions in multiple international standards organizations, including IEC, IEEE, among others, and work closely with several national regulators, including the FCC. Through the IEC, we have a liaison with CENELEC, and informal links to other national and international standards organizations.

1.2 Device Description

The Device Under Test (DUT) is the Intel® WM3945ABG Network Connection card which was activated within a Motion Computing tablet PC. The card was connected to a set of internal antennas within the DUT and the WM3945ABG Network Connection card was set to transmit at the maximum power as defined by the manufacturer. The card was operated utilizing proprietary software and each channel was measured using a broadband power meter and sensor to determine the maximum average power. The tests conducted do not represent every conceivable application or use but do represent a WORST CASE normal user exposure condition when the DUT is used in conjunction with the antenna listed at a separation distance of 0mm from the Motion Tablet PC to the phantom.



Device as Tested in WORST Case Configuration

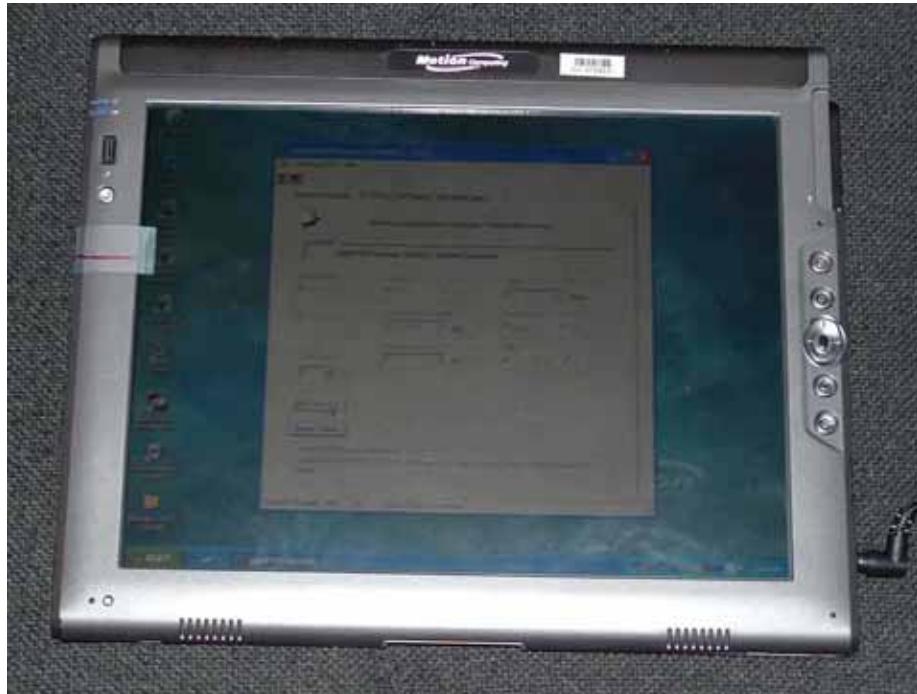

Front of Motion Tablet PC



Back of Motion Tablet PC

Project number: Intel-FCC-5269
FCC ID: Q3QIWM3945ABG
17 Bentley Avenue,
Ottawa Ontario, K2E-6T7
© 2005 APREL Laboratories
E.& O.E.



This report shall not be reproduced, except in full, without written approval of APREL Laboratories

2.0 Applicable Documents

ANSI/IEEE C95.1-1999, IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

ANSI/IEEE C95.3-1992, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave.

OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields".

IEEE 1528 "Recommended Practice for Determining the Peak Spatial Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communication Devices: Experimental Techniques."

ICNIRP Guidelines "GUIDELINES FOR LIMITING EXPOSURE TO TIME-VARYING ELECTRIC, MAGNETIC, AND ELECTROMAGNETIC FIELDS (UP TO 300 GHz)"

IEC-62209 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"

Part 1: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 300 MHz to 3 GHz)"

IEC-62209 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"

Part 2 Draft: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 30 MHz to 6 GHz)"



3.0 ALSAS-10U System Description

APREL Laboratories ALSAS-10-U (APREL Laboratories SAR Assessment System) is fully optimized for the dosimetric evaluation of a broad range of wireless transceivers and antennas. It is an easy-to-use development and compliance tool, which provides excellent application flexibility. Developed in line with the latest methodologies it is fully compliant with the technical and scientific requirements of IEEE 1528, IEC 62212, CENELEC, ARIB, ACA, and the Federal Communications Commission. The system comprises of a six axes articulated robot which utilizes a dedicated controller.

ALSAS-10U has been developed with a strong engineering focus, and with custom modular software/hardware for the broadest range of applications, including dosimetry research and measurements in various Phantoms – SAM Phantom, UniPhantom™ Universal Phantom, Universal Flat Phantom and others.

Free space E-Field measurements of mobile devices and base station antennas can also be executed using ALSAS. With the current ALSAS configuration, several phantoms and setups can be arranged around the system – and since the phantoms are designed to be light and easy to move for interchanging between test frequencies.

ALSAS-10U has been developed using the latest methodologies and FDTD modeling to provide a platform which is repeatable with minimum uncertainty.

The ongoing commitment from APREL Laboratories to the field of Dosimetric research and development will ensure that the ALSAS-10-U measurement system can easily be upgraded to accommodate changes to wireless technologies, and scientific methodologies.



3.1 Applications

Predefined measurement procedures compliant with the guidelines of CENELEC, IEEE, IEC, FCC, etc are utilized during the assessment for the device. Automatic detection for all SAR maxima are embedded within the core architecture for the system, ensuring that peak locations used for centering the zoom scan are within a 1mm resolution and a 0.05mm repeatable position. A little less than 10 min per device position measurement completion time, (depending of DUT size) ensures minimum power drift during the assessment. No user interaction is required during the measurement processes: area scan, evaluation of cube maximal search, fine cube measurements and device power drift measurement. System operation range currently available up-to 6 GHz in simulated tissue.

ALSAS-10U can be used for all analog and digital devices, including wideband, spread spectrum and pulsed systems, etc.: handsets, handhelds, wireless data, electronic article surveillance, accessories, wireless access points, WLAN, cordless, radio, etc.

3.2 Visualization and reporting

2/3D isoline distribution, scatter graphics, polar graphics, and vector reproduction. Device representation and phantom visualization in 2/3D graphics with measurement data overlaid (in color plot format). Freely configurable output graphic formats with automatic title, data and legend generation which includes all relevant information relating to the measurement process. Uncertainty analysis and budget calculated and reported drawing on active device drift assessment, and tissue simulation values.

3.3 Field scans

ALSAS-10U can provide multiple scan types including Measurements along lines (X, Y, Z), multiple planes, curved surfaces (normalize probe to surface), volumes in free space or restricted volumes (phantoms). Cube measurements with surface extrapolation and spatial SAR evaluation for 1g and/or 10g. Time measurements (source power drift). Probe rotation measurements (isotropy) and many others in line with the requirements of any given standard or procedure.

3.3.1 Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm² step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

A maximum area scan size is set at 280mm x 200mm which can be changed to a smaller size dependent on the field distribution of the device under test. The area scan size is documented within the SAR report which is delivered by the SAR system software.

Where the system identifies multiple SAR peaks (which are within 2dB of each peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.



3.3.2 Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the ALSAS-10U software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1 000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the centre of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface. The centre of the cube and the tangential angle associated defines each face of the cube so that all transitional points follow this tangential angle.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 5x5x9 (8mmx8mmx4mm Fx <3GHz) and 9x9x17 (4mmx4mmx2mm Fx>3GHz) providing a volume of 32mm in the X & Y axis, and 32mm in the Z axis. All points remain tangential to the surface by utilizing the normalize (probe tilt) feature so as to reduce measurement uncertainty.

3.4 Operator settings

Multiple access levels (password protected) for parametric modifications/test scenarios in line with selected standards, including the FCC. Any number of predefined settings (probes, phantoms, liquids, devices, measurement procedures, etc.) can be stored for future use and repeatable assessments.

3.5 ALSAS-10U Interpolation and Extrapolation Uncertainty

The overall uncertainty for the methodology and algorithms that are used during the SAR calculation was evaluated using the data from IEEE 1528 based on the example f3 algorithm:

$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \cdot \left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a + 2z)^2} \right)$$



4.0 ALSAS-10U Hardware


The ALSAS-10U comprises of hardware designed exclusively by APREL Laboratories based on methodologies presented in IEEE 1528, IEC 62212, CENELEC and FCC supplement C OET bulletin 65.

4.1 Isotropic E-Field Probe

The isotropic E-Field probe used by APREL Laboratories, has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change. APREL Laboratories utilize a number of methods for calibrating probes, and these are outlined in the table below.

Calibration Frequency (MHz)	Air Calibration	Tissue Calibration
300	TEM Cell	Temperature
450	TEM Cell	Temperature
835	TEM Cell	Temperature
900	TEM Cell	Temperature
1800	TEM Cell	Temperature
1900	TEM Cell	Temperature
2450	Waveguide	Temperature
5200	Waveguide	Waveguide
5600	Waveguide	Waveguide
5800	Waveguide	Waveguide

The APREL Laboratories E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below.

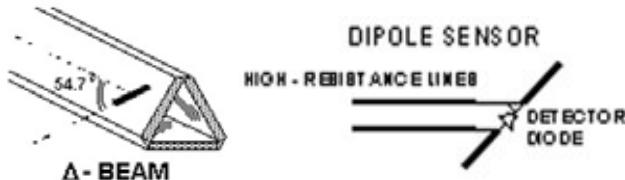

SAR is assessed with a calibrated probe which moves at a default height of 5mm from the centre of the diode, which is mounted to the sensor, to the phantom surface (in the Z Axis). The 5mm offset height has been selected so as to minimize any resultant boundary effect due to the probe being in close proximity to the phantom surface.

The following algorithm is an example of the function used by the system for linearization of the output from the probe when measuring complex modulation schemes.

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

4.2 Isotropic E-Field Probe Specification

Calibration in Air	Frequency Dependent Below 2GHz Calibration in air performed in a TEM Cell Above 2GHz Calibration in air performed in waveguide
Sensitivity	0.60 μ V/(V/m) ² to 1.25 μ V/(V/m) ²
Dynamic Range	0.01 W/kg to 100 W/kg
Isotropic Response	Better than 0.2dB in air Better than 0.05dB in tissue
Diode Compression Point (DCP)	Calibrated for Specific Frequency typically 95mV +/- 10%
Probe Tip Radius	<5mm
Sensor Offset	1.56 (+/-0.02mm)
Probe Length	290mm
Video Bandwidth	@ 500 Hz: 1 dB @ 1.02 KHz: 3 dB
Boundary Effect	Less than 2% for distances greater than 2.4mm
Spatial Resolution	Better than 2.5mm

4.3 Boundary Detection Unit and Probe Mounting Device

ALSAS-10U incorporates a boundary detection unit with a sensitivity of 0.05mm for detecting all types of surfaces. The robust design allows for detection during probe tilt (probe normalize) exercises, and utilizes a second stage emergency stop. The signal electronics are fed directly into the robot controller for high accuracy surface detection in lateral and axial detection modes (X, Y, & Z).

The probe is mounted directly onto the Boundary Detection unit for accurate tooling and displacement calculations controlled by the robot kinematics. The probe is connect to an isolated probe interconnect where the output stage of the probe is fed directly into the amplifier stage of the Daq-Paq.

4.4 Daq-Paq (Analog to Digital Electronics)

ALSAS-10U incorporates a fully calibrated Daq-Paq (analog to digital conversion system) which has a 4 channel input stage, sent into an amplifier module. The input signal is amplified accordingly so as to offer a dynamic range from 5 μ V to 800mV. Integration of the fields measured is carried out at board level utilizing a Co-Processor which then sends the measured fields down into the main computational module in digitized form via an RS232 communications port. Probe linearization and duty cycle compensation is carried out within the main Daq-Paq module.

ADC	16 Bit
Amplifier Range	30 μ V to +200 mV (16 bit resolution: 4 μ V, 400mV)
Field Integration	Local Co-Processor utilizing proprietary integration algorithms
Number of Input Channels	4 in total 3 dedicated and 1 spare
Communication	Packet data via RS232



4.5 Axis Articulated Robot



ALSAS-10U utilizes a six axis articulated robot, which is controlled using a Pentium based real-time movement controller. The movement kinematics engine utilizes proprietary (Thermo CRS) interpolation and extrapolation algorithms, which allow full freedom of movement for each of the six joints within the working envelope. Utilization of joint 6 allows for full probe rotation with a tolerance better than 0.05mm around the central axis.

Robot/Controller Manufacturer	Thermo CRS
Number of Axis	Six independently controlled axis
Positioning Repeatability	0.05mm
Controller Type	Single phase Pentium based C500C
Robot Reach	710mm
Communication	RS232 and LAN compatible

4.6 ALSAS Universal Workstation

ALSAS Universal workstation was developed with a strong engineering focus taking into consideration flexibility and engineering needs, and the necessity to have integrated system which will allow for repeatability and fast adaptability. ALSAS workstation technology is stable and robust in structure, but at the same time flexible so that users can do calibration, testing and measurements using different types of phantoms with one set up, which significantly speeds up the measurement process.

The workstation incorporates a modular structure which can be easily adapted to specific engineering requirements and needs. Phantoms which are self contained modular units are easily located, removable and swappable. Three fully configurable shelves allow for setting up of a test device in a way which can either utilize the APREL Laboratories device positioner, or custom designed units. When using the modular shelf for positioning of a device, additional loading characteristics have been avoided.

The workstation has been constructed entirely out of composite wood and Canadian maple, with all metallic fasteners kept at a compliant distance from the Device under test.

4.7 Universal Device Positioner



The APREL Laboratories universal device positioner has been developed so as to allow complete freedom of movement of the DUT. Developed to hold a DUT in a free-space scenario any additional loading attributable to the material used in the construction of the positioner has been eliminated. Repeatability has been enhanced through the linear scales which form the design used to indicate positioning for any given test scenario in all major axes. A 15° tilt indicator has been included for the aid of cheek to tilt movements for head SAR analysis. Overall uncertainty for measurements have been reduced due to the design of the Universal device positioner, which allows positioning of a device in as near to a free-space scenario as possible, and by providing the means for complete repeatability.




Length	201mm
Width	140mm
Height	222mm
Weight	1.95kg
Number of Axis	6 axis freedom of movement
Translation Along MB Line	+/- 76.2mm
Translation Along NF Line	+/- 38.1mm
Translation Along Z Axis	+/- 25.4mm (expandable to 500mm)
Rotation Around MB Line (yaw)	+/- 10°
Rotation Around NF Line (pitch)	+/- 30°
Rotation Around Z Axis (roll)	360° full circle
Minimum Grip Range	0mm
Maximum Grip	152mm
Maximum Distance from Device to Positioner Material	40mm
Tilt Movement	Full movement with predefined 15° guide

4.8 Phantom Types

The ALSAS-10U has been designed so as to allow the integration of multiple phantom types. This includes but is not limited to the APREL Laboratories SAM Phantoms fully compliant with IEEE 1528, Universal Phantom, and Universal Flat.

4.8.1 APREL SAM Phantoms

The APREL Laboratories SAM phantoms have been designed so as to aid repeatability and positioning for any DUT. Developed using the IEEE SAM CAD file they are fully compliant with the requirements for both IEEE 1528 and FCC Supplement C. Both the left and right SAM phantoms are interchangeable, transparent and include the IEEE 1528 grid with visible NF and MB lines.

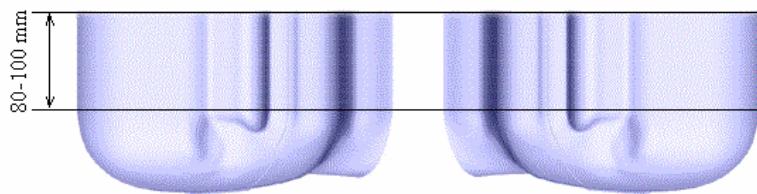

Compliant Standards	IEEE-1528, IEC 62212, CENELEC, and others
Manufacturing Process	Injection molded
Material	Composite urethane
Manufacturing Tolerance	+/- 0.2mm
Frame Material	Corian
Tissue Simulation Volume	7 ltr with 15cm tissue
Thickness	2mm nominally 6mm at NF/MB intersection
Loss Tangent	<0.05
Relative Permittivity	<5
Resistant to Solvents	Resistant to all solvents detailed in IEEE 1528
Load Deflection	<1mm with sugar water compositions

4.8.2 APREL Laboratories Universal Phantom



The APREL Laboratories Universal Phantom has been developed as an engineering tool for both compliance and development. It is also used on the ALSAS-10U as a system validation phantom. The unique design allows repeatable measurements for all devices, including handsets, PDA units, laptop computers, and validation dipoles. The APREL Laboratories Universal Phantom has been fully validated both experimentally from 800MHz to 6GHz and numerically using XFDTD numerical software. The shell thickness is 2mm overall, with a 4mm spacer located at the NF/MB intersection providing an overall thickness of 6mm in line with the requirements of IEEE-1528. The design allows for fast and accurate measurements, of handsets, by allowing the conservative SAR to be evaluated at on frequency for


both left and right head experiments in one measurement. The phantom is surrounded by a Corian frame, which adds additional support and load bearing characteristics.

Compliant Standards	IEEE-1528, IEC 62212, CENELEC, and others
Frequency Range	800MHz to 6GHz
Material	High Density Polycarbonate
Manufacturing Tolerance	+/- 0.2mm
Frame Material	Corian
Tissue Simulation Volume	8 ltr with 15cm tissue
Thickness	2mm nominally 6mm at NF/MB intersection
Loss Tangent	<0.05
Relative Permittivity	<5
Resistant to Solvents	Resistant to all solvents detailed in IEEE 1528
Load Deflection	<1% Length with sugar water compositions
Dimensions	Length 220mm x breadth 170mm

4.9 Validation Dipoles

APREL Laboratories utilize dipoles based on the IEEE-1528 standard, and have ensured that they comply with mechanical and electrical specifications in line with the requirements of both IEEE and FCC Supplement C. the table below provides details for the mechanical and electrical specifications for the dipoles used by APREL Laboratories.

Body validation target numbers have been derived using XFDTD numerical software, and validated experimentally.

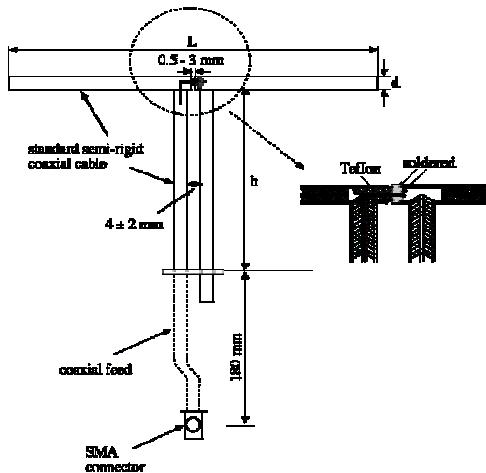

APREL Laboratories have developed high frequency dipoles based on current scientific research carried both experimentally and numerically here at the APREL Laboratories site. Mechanical and electrical parameters for the dipoles have been established using experimental and numerical techniques, and target SAR values have been established following IEC methodologies. The results of the experimental and numerical research have been published and released for peer review.

Frequency (MHz)	L (mm)	h (mm)	d (mm)
300	396.0	250.0	6.0
450	270.0	166.7	6.0
835	161.0	89.8	3.6
900	149.0	83.3	3.6
1450	89.1	51.7	3.6
1800	72.0	41.7	3.6
1900	68.0	39.5	3.6
2000	64.5	37.5	3.6
2450	51.5	30.4	3.6
3000	41.5	25.0	3.6
5200	23.6	14	3.6
5800	21.6	13	3.6
5190-5900	23.1	20.7	3.6

5.0 Tissue Simulation Fluid

Tissue simulation fluids in the frequency range of 450MHz to 2450MHz are based on IEEE-1528 and FCC Supplement C guidelines. All fluids meet the dielectric specifications as outlined in the above standards (within allowable tolerances) and are calibrated on a regular basis, to maintain stability. The recipes used along with the dielectric target values are included in the table below.

Ingredients (% Weight)	450 MHz Head	835 MHz Head	915 MHz Head	1900 MHz Head	2450 MHz Head
Water	38.56	41.45	41.05	54.9	62.7
Salt	3.95	1.45	1.35	0.18	0.5
Sugar	56.32	56.0	56.5	x	x
HEC	0.98	1.0	1.0	x	x
Bactericide	0.19	0.1	0.1	0.1	X
Triton-X	X	X	X	X	36.8
DGBE	X	X	X	44.92	x
ϵ^r	43.42	42.54	42.0	39.9	39.8
δ	0.85	0.91	1.0	1.42	1.88

Ingredients (% Weight)	450 MHz Body	835 MHz Body	915 MHz Body	1900 MHz Body	2450 MHz Body
Water	51.16	52.4	56.0	40.4	73.2
Salt	1.49	1.4	0.76	0.5	0.04
Sugar	46.78	45.0	41.76	58.0	X
HEC	0.52	1.0	1.21	1.0	X
Bactericide	0.05	0.1	0.27	0.1	X
Triton-X	X	X	X	X	X
DGBE	X	X	X	X	26.7
ϵ^r	58.0	56.1	56.8	54.0	52.5
δ	0.83	0.95	1.07	1.45	1.95

NOTE. Recipes are based on those presented in FCC Supplement C Page 36.

For frequencies above 2450MHz recipes will be presented as and when requested by a designated body.

Ingredients (% Weight)	5200 MHz Body	5600 MHz Body	5800 MHz Body
Water	X	X	X
Salt	X	X	X
Sugar	X	X	X
HEC	X	X	X
Bactericide	X	X	X
Triton-X	X	X	X
DGBE	X	X	X
ϵ^r	36.0	35.5	35.4
δ	4.65	5.06	5.27



5.1 Tissue Calibration Procedure Using a Coaxial Probe

The VNA (Vector Network Analyzer) is configured and calibrated for the frequency of the simulated tissue which has to be assessed. The Coaxial probe is then calibrated in line with the tissue frequency using an open, short, and De-Ionized water routine. The sample of simulated tissue is placed into a non-metallic container for use during the calibration. The temperature of the simulated tissue sample is measured. The probe head is then completely immersed in the simulated tissue sample (the probe is held in place using a non metallic probe holder). The simulated tissue sample is then measured to assess the permittivity and conductivity.

5.2 Tissue Calibration Results




Tissue used during the SAR assessment is calibrated prior to use in the measurement process. APREL Laboratories use the co-axial probe method for all tissue calibration exercises. Tissue which is being used over a period of 24 hours is re-calibrated to ensure that no change to the dielectric properties will affect the SAR measurement process. The table below provides details of the results from the tissue equivalent dielectric calibration. This project was conducted over a period of 6 days and the tissues were calibrated daily to ensure that they met the values presented below.

Calibrated By	Calibration Date	Frequency MHz	Tissue Type	Epsilon (ϵ')	Sigma (δ)
M. Nesterova	26-01-2007	2450	Body	52.7	1.95
M. Nesterova	29-01-2007	5200	Head	36.0	4.65
M. Nesterova	30-01-2007	5200	Head	36.0	4.65
M. Nesterova	31-01-2007	5800	Head	35.4	5.27

6.0 System Validation

ALSAS-10U is fully validated prior to the SAR assessment of the DUT following methodologies presented in IEEE-1528 section 8. The system is validated using tissue which has been calibrated within a 24 hour period. When the measurement process exceeds a 24 hour period a secondary system validation is executed and the results presented within this test report.

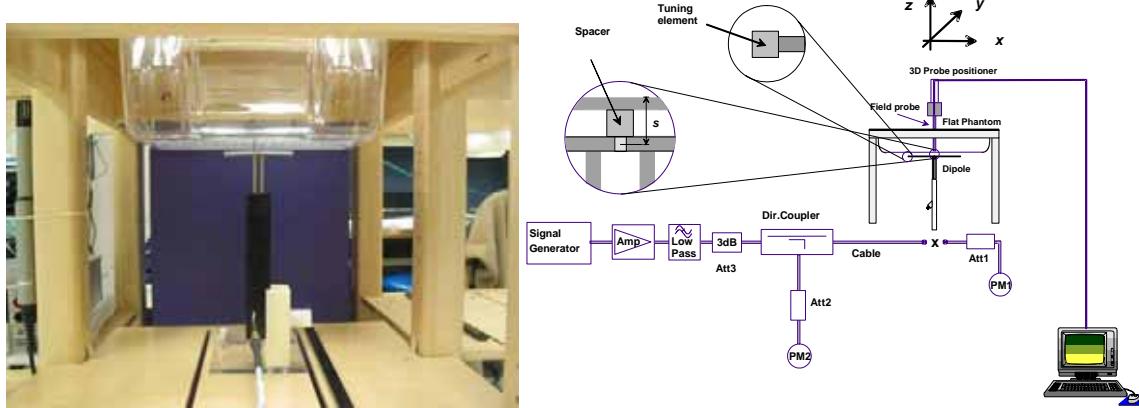

Date	Validation Frequency (MHz)	Dipole Separation Distance mm	Power W	Dipole	SAR 1g W/kg	Target 1g W/kg
26-01-2007	2450	10	1.0	2450-220-00754	52.7	53.1
29-01-2007	5200	10	1.0	5200-230-00803	58.3	62.9
30-01-2007	5200	10	1.0	5800-240-00853	58.6	62.9
31-01-2007	5800	10	1.0	5800-240-00853	57.7	58.3

Currently no standards are in place for validating a system while using body tissue. System validation and values are based on current guidance coming from IEC-62209 Pt.2 and utilize the APREL Laboratories broad-band dipole for frequencies above 5GHz. This project was conducted over a period of 6 days and when necessary system validations were repeated when the test completion was greater than a 24 hour period.

6.1 Experimental Results Summary

The results for each experimental assessment are contained within this section. Where any deviation has been made from the given procedures contained within IEEE-1528 or FCC Supplement C this has been described accordingly.

6.2 SAR Measurement Procedure

The ALSAS-10U calculates SAR using the following equation,

$$SAR = \frac{\sigma |E|^2}{\rho}$$

σ: represents the simulated tissue conductivity
 ρ: represents the tissue density

The DUT is set to transmit at the required power in line with product specification, at each frequency relating to the LOW, MID, and HIGH channel settings.

Pre-scans are made on the device to establish the location for the transmitting antenna, using a large area scan in either air or tissue simulation fluid.

The DUT is placed against the Universal Phantom where the maximum area scan dimensions are larger than the physical size of the resonating antenna. When the scan size is not large enough to cover the peak SAR distribution, it is modified by either extending the area scan size in both the X and Y directions, or the device is shifted within the predefined area.

The area scan is then run to establish the peak SAR location (interpolated resolution set at 1mm²) which is then used to orient the center of the zoom scan. The zoom scan is then executed and the 1g and 10g averages are derived from the zoom scan volume (interpolated resolution set at 1mm³).

6.3 SAR Exposure Limits

SAR assessments have been made in line with the requirements of the documents listed in section 2 of this report.

Type of Exposure	Uncontrolled Environment Limit
Spatial Peak SAR (1g cube tissue for brain or body)	1.60 W/kg
Spatial Average SAR (whole body)	0.08 W/kg
Spatial Peak SAR (10g for hands, feet, ankles and wrist)	4.00 W/kg



6.4 DUT Power Validation

The DUT was assessed for power to ensure that it was within the accepted limit with regards to the analysis made during the EMC/EMI evaluations. Where the measurement made had a deviation less than that measured during the EMI/EMC evaluations the DUT was set to a power level slightly higher than that assessed during the EMI/EMC analysis to ensure that SAR measurements presented were conservative. A broad band power sensor was used along with a power meter to make the conducted power measurements where an average was taken of the output Tx power.



Intel WM3945ABG Network Connection Card Being Assessed for Conducted Power

Mode	Channel	Frequency	Measured Peak Power
802.11b	1	2412	17.89
802.11b	6	2437	18.17
802.11b	11	2462	18.12
802.11g	1	2412	18.72
802.11g	6	2437	18.43
802.11g	11	2462	18.42
802.11a	36	5180	22.27
802.11a	51	5240	23.9
802.11a	52	5260	23
802.11a	64	5320	23.2
802.11a	149	5745	24
802.11a	157	5785	24
802.11a	165	5825	23.67

6.5 Equipment List

APREL Laboratories utilize the following equipment.

Equipment Description	Asset/Serial Number	Calibration Date
ALSAS-10U	301571	Prior to Test
Boundary Detection Unit	301572	Calibrated Once
Daq-Paq	301573	January 2006
Pentium 4 Workstation	301574	Not Required
Signal Generator	301468	September 2006
Anritsu Power Meter	301602	August 2006
Anritsu Broad Band Power Sensor	301740	August 2006
Narda Directional Coupler	301569	November 2006
APREL Laboratories 800-4200MHz 12W Amplifier	301577	December 2006
APREL Laboratories 2450MHz Validation Dipole	2450-220-00754	March 2006
APREL Laboratories E-020 E-Field Probe	225	December 2006
40MHz -20GHz VNA	301382	August 2006
TRL Calibration Kit	301582	January 2006
APREL Laboratories Coaxial Probe (Dielectric Probe Kit)	100757	December 2006
APREL Laboratories Universal Phantom	301511	Calibrated Once
APREL Laboratories SAM Phantom LHS	301500	Calibrated Once
APREL Laboratories SAM Phantom RHS	301501	Calibrated Once
APREL Laboratories 15mm Dipole Separation Kit	301546	Calibrated Once
APREL Laboratories 10mm Dipole Separation Kit	301547	Calibrated Once
APREL Laboratories 5-6GHz 2 W Amplifier	301692	December 2006
APREL Laboratories MMW Directional Coupler	301693	March 2006
APREL Laboratories 5200MHz Validation Dipole	5200-230-00803	March 2006
APREL Laboratories 5800MHz Validation Dipole	5800-240-00853	March 2006
ALSAS-10 Device Positioner ALS-H-E-SET-2	ALS-H-E-SET-2-LAB1	Not Required
APREL Laboratories 5-6GHz Broad Band Validation Dipole	301678	March 2006
APREL Laboratories 835MHz Validation Dipole	301672	March 2006
APREL Laboratories 900MHz Validation Dipole	301673	March 2006
APREL Laboratories 1800MHz Validation Dipole	301674	March 2006
APREL Laboratories 1900MHz Validation Dipole	301675	March 2006



6.5 SAR Measurement Results

Intel® WM3945ABG Network Connection with Pecos II Antenna **802.11b MODE**



Max Power	18.17dBm
DUT Position	Side
Separation	0mm
Antenna Type	Internal
Antenna Manufacturer	Pecos
Antenna Location	Left Hand Side
Power Mode	Mains A/C
Tx Frequency	2412-2462MHz
Duty Cycle	100%
Epsilon	52.2
Sigma	2.01
Tissue Depth	15cm
Phantom Type	Universal
DUT Workstation Location	Centre
Device Positioner	HESET1
Test Date	26-01-2007
Test Engineer	Stuart N

Mode	Separation Distance (mm)	Channel	Frequency MHz	1g SAR W/kg
802.11b	0	1	2412	1.435
802.11b	0	6	2437	1.389
802.11b	0	11	2462	1.383

SAR Limit	Conservative Measured SAR
1.6 W/kg 1gram Average Maximum	1.435 W/kg 1gram Average

SAR Plot for Conservative SAR Included in Appendix A.



Intel® WM3945ABG Network Connection with Picos II Antenna **802.11g MODE**

Max Power	18.72 dBm
DUT Position	Side
Separation	0mm
Antenna Type	Internal
Antenna Manufacturer	Pecos
Antenna Location	Left Hand Side
Power Mode	Mains A/C
Tx Frequency	2412-2462MHz
Duty Cycle	100%
Epsilon	52.2
Sigma	2.01
Tissue Depth	15cm
Phantom Type	Universal
DUT Workstation Location	Centre
Device Positioner	HESET1
Test Date	26 January 2007
Test Engineer	Stuart N

Mode	Separation Distance (mm)	Channel	Frequency MHz	1g SAR W/kg
802.11g	0	1	2412	1.427
802.11g	0	6	2437	1.374
802.11g	0	11	2462	1.489

SAR Limit	Conservative Measured SAR
1.6 W/kg 10gram Average Maximum	1.489 W/kg 1gram Average

SAR Plot for Conservative SAR Included in Appendix A.



Intel® WM3945ABG Network Connection with Pecos II Antenna **802.11a Low Band MODE**

Max Power	23.9 dBm
DUT Position	Side
Separation	0mm
Antenna Type	Internal
Antenna Manufacturer	Pecos
Antenna Location	Left Hand Side
Power Mode	Mains A/C
Tx Frequency	5180-5320MHz
Duty Cycle	100%
Epsilon	36.2
Sigma	4.45
Tissue Depth	15cm
Phantom Type	Universal
DUT Workstation Location	Centre
Device Positioner	HESET1
Test Date	29 January 2007
Test Engineer	Stuart. N

Mode	Separation Distance (mm)	Channel	Frequency MHz	1g SAR W/kg
802.11a	0	36	5180	1.394
802.11a	0	51	5240	1.395
802.11a	0	52	5260	1.336
802.11a	0	64	5320	1.422

SAR Limit	Conservative Measured SAR
1.6 W/kg 1gram Average Maximum	1.422 W/kg 1gram Average

SAR Plot for Conservative SAR Included in Appendix A.



Intel® WM3945ABG Network Connection with Pecos II Antenna **802.11a High Band MODE**

Max Power	24 dBm
DUT Position	Side
Separation	0mm
Antenna Type	Internal
Antenna Manufacturer	Pecos
Antenna Location	Left Hand Side
Power Mode	Mains A/C
Tx Frequency	5180-5320MHz
Duty Cycle	100%
Epsilon	35.4
Sigma	5.27
Tissue Depth	15cm
Phantom Type	Universal
DUT Workstation Location	Centre
Device Positioner	HESET1
Test Date	31 January 2007
Test Engineer	Stuart. N

Mode	Separation Distance (mm)	Channel	Frequency MHz	1g SAR W/kg
802.11a	0	149	5745	1.271
802.11a	0	157	5785	1.462
802.11a	0	165	5825	1.497


SAR Limit	Conservative Measured SAR
1.6 W/kg 1gram Average Maximum	1.497 W/kg 1gram Average

SAR Plot for Conservative SAR Included in Appendix A.




6.6 Additional Information

To establish the position of the antennas and to ensure that the DUT was being assessed in an area where the Peak SAR Maximum was located a sniffer probe (APREL Laboratories 50 ohm Sniffer Probe) was used. A series of hand held probe scans were executed where the sniffer probe was moved around all sides of the Motion Computing Laptop and the area was designated with a marker to show where the antenna was located.

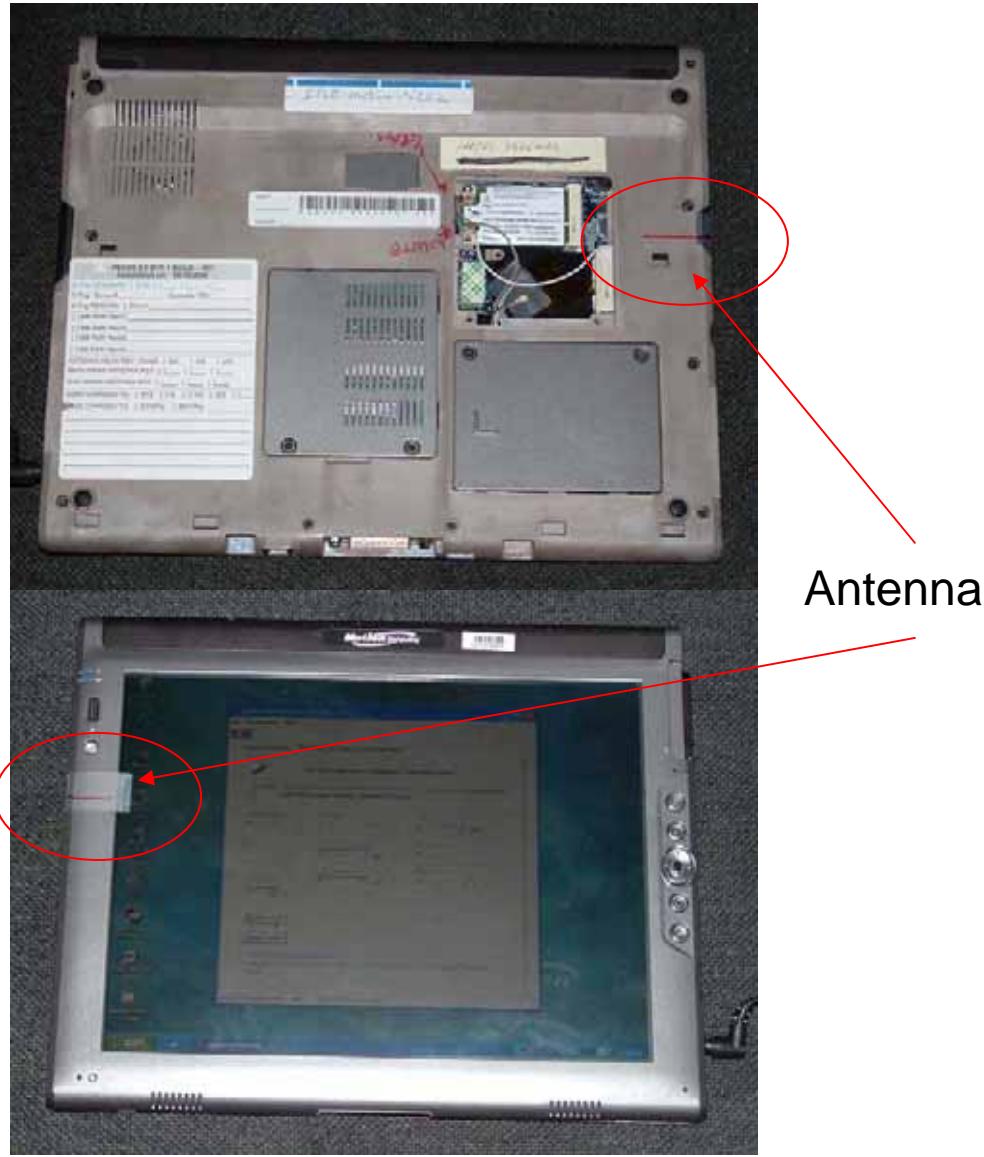

Antenna

Pecos II Main Antenna Location

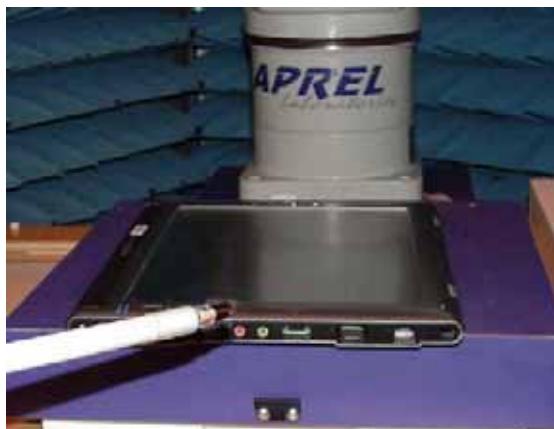**Sniffer Probe Side****Sniffer Probe Antenna Location****Sniffer Probe Top**

The Intel® WM3945ABG Network Connection card which was operated within the Motion Computing Tablet PC was tested in other positions with respect to general user scenarios. The SAR was found to be less than 80% lower than the highest value recorded in this report. The following images represent the full exposure conditions in which the DUT was assessed.



APREL
Laboratories

SAR & HAC Instruments for Wireless • Consulting • Research • Standards • Compliance • Training



Project number: Intel-FCC-5269
FCC ID: Q3QIWM3945ABG
17 Bentley Avenue,
Ottawa Ontario, K2E-6T7
© 2005 APREL Laboratories
E.& O.E.




This report shall not be reproduced, except in full, without written approval of APREL Laboratories







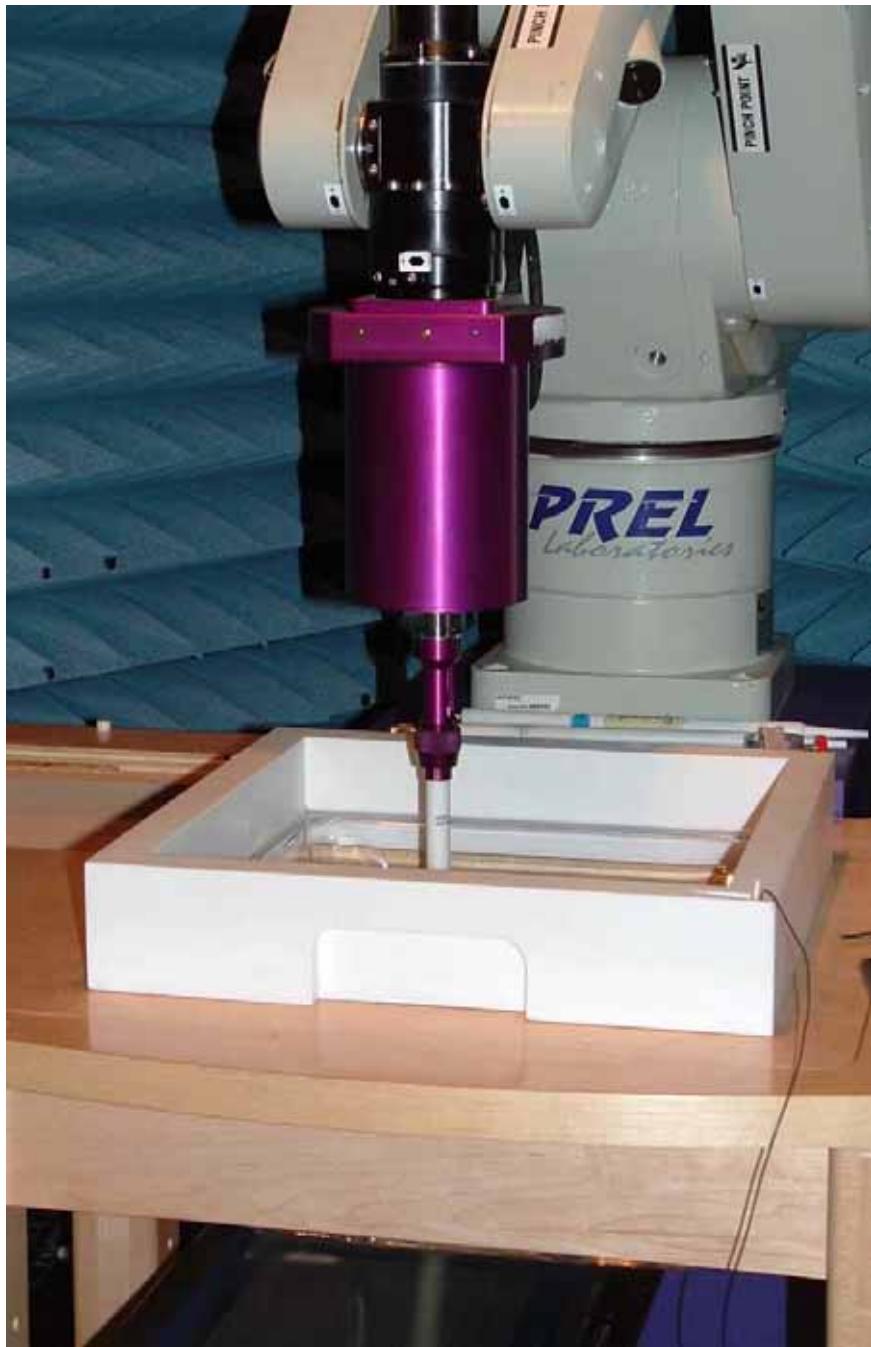

**Appendix A
SAR Plots**

SAR Test Report

Report Date : 26-Jan-2007
 By Operator : 123
 Measurement Date : 26-Jan-2007
 Starting Time : 26-Jan-2007 03:03:32 PM
 End Time : 26-Jan-2007 03:20:54 PM
 Scanning Time : 1042 secs

Product Data
 Device Name : Motion
 Serial No. : IDX80010016007
 Type : Other
 Model : tablet pc
 Frequency : 5200.00 MHz
 Max. Transmit Pwr : 55 W
 Drift Time : 0 min(s)
 Length : 100 mm
 Width : 20 mm
 Depth : 20 mm
 Antenna Type : Internal
 Orientation : Touch
 Power Drift-Start : 0.952 W/kg
 Power Drift-Finish: 0.945 W/kg
 Power Drift (%) : -0.726
 Picture : C:\alsas\bitmap\Device-5.bmp

Phantom Data
 Name : APREL-Uni
 Type : Uni-Phantom
 Size (mm) : 280 x 280 x 200
 Serial No. : User Define
 Location : Center
 Description : U

Tissue Data
 Type : BODY
 Serial No. : 2450B
 Frequency : 2450.00 MHz
 Last Calib. Date : 26-Jan-2007
 Temperature : 23.00 °C
 Ambient Temp. : 23.00 °C
 Humidity : 35.00 RH%
 Epsilon : 51.39 F/m
 Sigma : 2.03 S/m
 Density : 1000.00 kg/cu. m



Probe Data

Name : APREL
 Model : E-020
 Type : E-Field Triangle
 Serial No. : 225
 Last Calib. Date : 22-Jan-2007
 Frequency : 2450.00 MHz
 Duty Cycle Factor: 1
 Conversion Factor: 4.4
 Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point: 95.00 mV
 Offset : 1.56 mm


Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 22.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 26-Jan-2007
 Set-up Time : 3:03:09 PM
 Area Scan : 9x6x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Touch
 Separation : 0
 Channel : Low

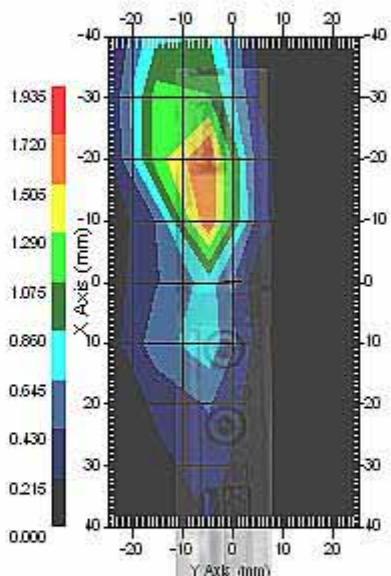

Area Scan

1 gram SAR value : 1.435 W/kg
 Zoom Scan Peak SAR : 3.683 W/kg




Exposure Assessment Measurement Uncertainty

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	$c_i^1 (1-g)$	$c_i^1 (10-g)$	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	•3	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	•3	•cp	•cp	4.4	4.4
Boundary Effect	1.0	rectangular	•3	1	1	0.6	0.6
Linearity	4.7	rectangular	•3	1	1	2.7	2.7
Detection Limit	1.0	rectangular	•3	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	•3	1	1	0.5	0.5
Integration Time	1.7	rectangular	•3	1	1	1.0	1.0
RF Ambient Condition	3.0	rectangular	•3	1	1	1.7	1.7
Probe Positioner Mech.	0.4	rectangular	•3	1	1	0.2	0.2
Restriction							
Probe Positioning with respect to Phantom Shell	2.9	rectangular	•3	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	•3	1	1	2.1	2.1
Test Sample Positioning	4.0	normal	1	1	1	4.0	4.0
Device Holder Uncertainty	2.0	normal	1	1	1	2.0	2.0
Drift of Output Power	0.7	rectangular	•3	1	1	0.4	0.4
Phantom and Setup							
Phantom Uncertainty(shape & thickness tolerance)	3.4	rectangular	•3	1	1	2.0	2.0
Liquid Conductivity(target)	5.0	rectangular	•3	0.7	0.5	2.0	1.4
Liquid Conductivity(meas.)	4.1	normal	1	0.7	0.5	2.9	2.1
Liquid Permittivity(target)	5.0	rectangular	•3	0.6	0.5	1.7	1.4
Liquid Permittivity(meas.)	2.5	normal	1	0.6	0.5	1.5	1.2
Combined Uncertainty		RSS				9.8	9.4
Combined Uncertainty (coverage factor=2)		Normal (k=2)				19.6	18.8



SAR-Z Axis

at Hotspot x:-2.86 y:-3.97

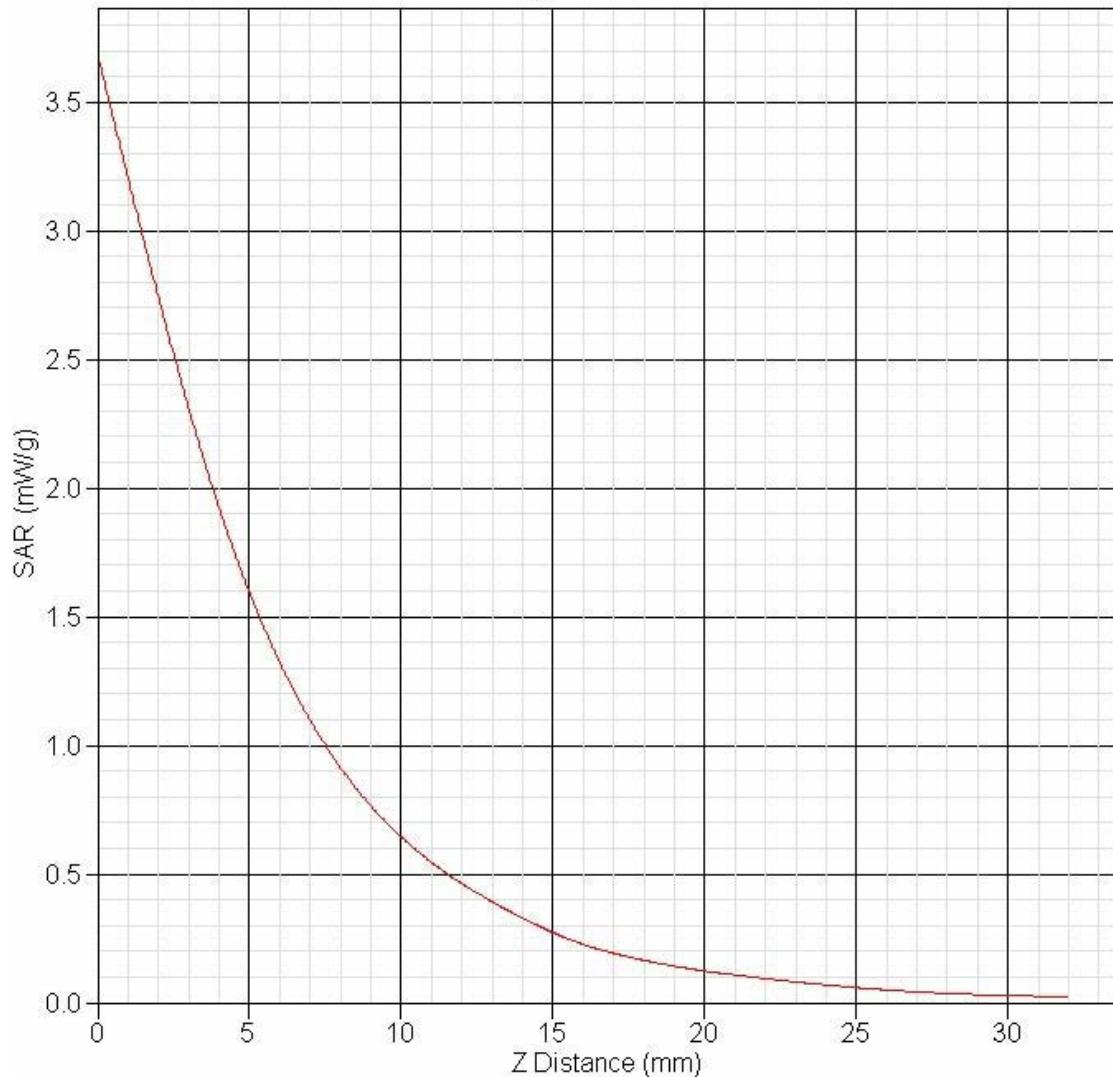

SAR Test Report

Report Date : 26-Jan-2007
 By Operator : 123
 Measurement Date : 26-Jan-2007
 Starting Time : 26-Jan-2007 03:40:43 PM
 End Time : 26-Jan-2007 03:58:15 PM
 Scanning Time : 1052 secs

Product Data
 Device Name : Motion
 Serial No. : IDX80010016007
 Type : Other
 Model : tablet pc
 Frequency : 5200.00 MHz
 Max. Transmit Pwr : 55 W
 Drift Time : 0 min(s)
 Length : 100 mm
 Width : 20 mm
 Depth : 20 mm
 Antenna Type : Internal
 Orientation : Touch
 Power Drift-Start : 0.998 W/kg
 Power Drift-Finish: 1.019 W/kg
 Power Drift (%) : 2.085
 Picture : C:\alsas\bitmap\Device-5.bmp

Phantom Data
 Name : APREL-Uni
 Type : Uni-Phantom
 Size (mm) : 280 x 280 x 200
 Serial No. : User Define
 Location : Center
 Description : U

Tissue Data
 Type : BODY
 Serial No. : 2450B
 Frequency : 2450.00 MHz
 Last Calib. Date : 26-Jan-2007
 Temperature : 23.00 °C
 Ambient Temp. : 23.00 °C
 Humidity : 35.00 RH%
 Epsilon : 51.39 F/m
 Sigma : 2.03 S/m
 Density : 1000.00 kg/cu. m



Probe Data

Name : APREL
 Model : E-020
 Type : E-Field Triangle
 Serial No. : 225
 Last Calib. Date : 22-Jan-2007
 Frequency : 2450.00 MHz
 Duty Cycle Factor: 1
 Conversion Factor: 4.4
 Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point: 95.00 mV
 Offset : 1.56 mm


Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 22.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 26-Jan-2007
 Set-up Time : 3:40:19 PM
 Area Scan : 9x6x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Touch
 Separation : 0
 Channel : Mid

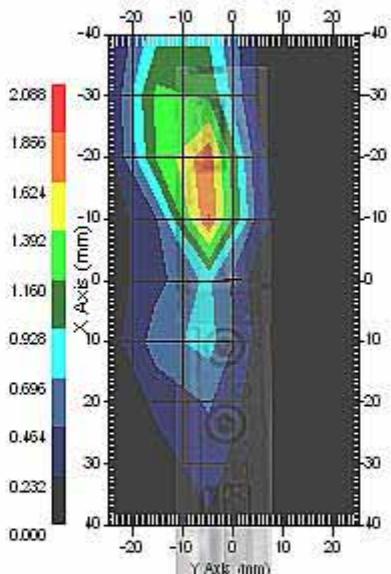

Area Scan

1 gram SAR value : 1.389 W/kg
 Zoom Scan Peak SAR : 3.523 W/kg




Exposure Assessment Measurement Uncertainty

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	$c_i^1 (1-g)$	$c_i^1 (10-g)$	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	•3	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	•3	•cp	•cp	4.4	4.4
Boundary Effect	1.0	rectangular	•3	1	1	0.6	0.6
Linearity	4.7	rectangular	•3	1	1	2.7	2.7
Detection Limit	1.0	rectangular	•3	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	•3	1	1	0.5	0.5
Integration Time	1.7	rectangular	•3	1	1	1.0	1.0
RF Ambient Condition	3.0	rectangular	•3	1	1	1.7	1.7
Probe Positioner Mech.	0.4	rectangular	•3	1	1	0.2	0.2
Restriction							
Probe Positioning with respect to Phantom Shell	2.9	rectangular	•3	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	•3	1	1	2.1	2.1
Test Sample Positioning	4.0	normal	1	1	1	4.0	4.0
Device Holder Uncertainty	2.0	normal	1	1	1	2.0	2.0
Drift of Output Power	2.1	rectangular	•3	1	1	1.2	1.2
Phantom and Setup							
Phantom Uncertainty(shape & thickness tolerance)	3.4	rectangular	•3	1	1	2.0	2.0
Liquid Conductivity(target)	5.0	rectangular	•3	0.7	0.5	2.0	1.4
Liquid Conductivity(meas.)	4.1	normal	1	0.7	0.5	2.9	2.1
Liquid Permittivity(target)	5.0	rectangular	•3	0.6	0.5	1.7	1.4
Liquid Permittivity(meas.)	2.5	normal	1	0.6	0.5	1.5	1.2
Combined Uncertainty		RSS				9.9	9.5
Combined Uncertainty (coverage factor=2)		Normal (k=2)				19.7	18.9



SAR-Z Axis

at Hotspot x:-8.88 y:-3.97

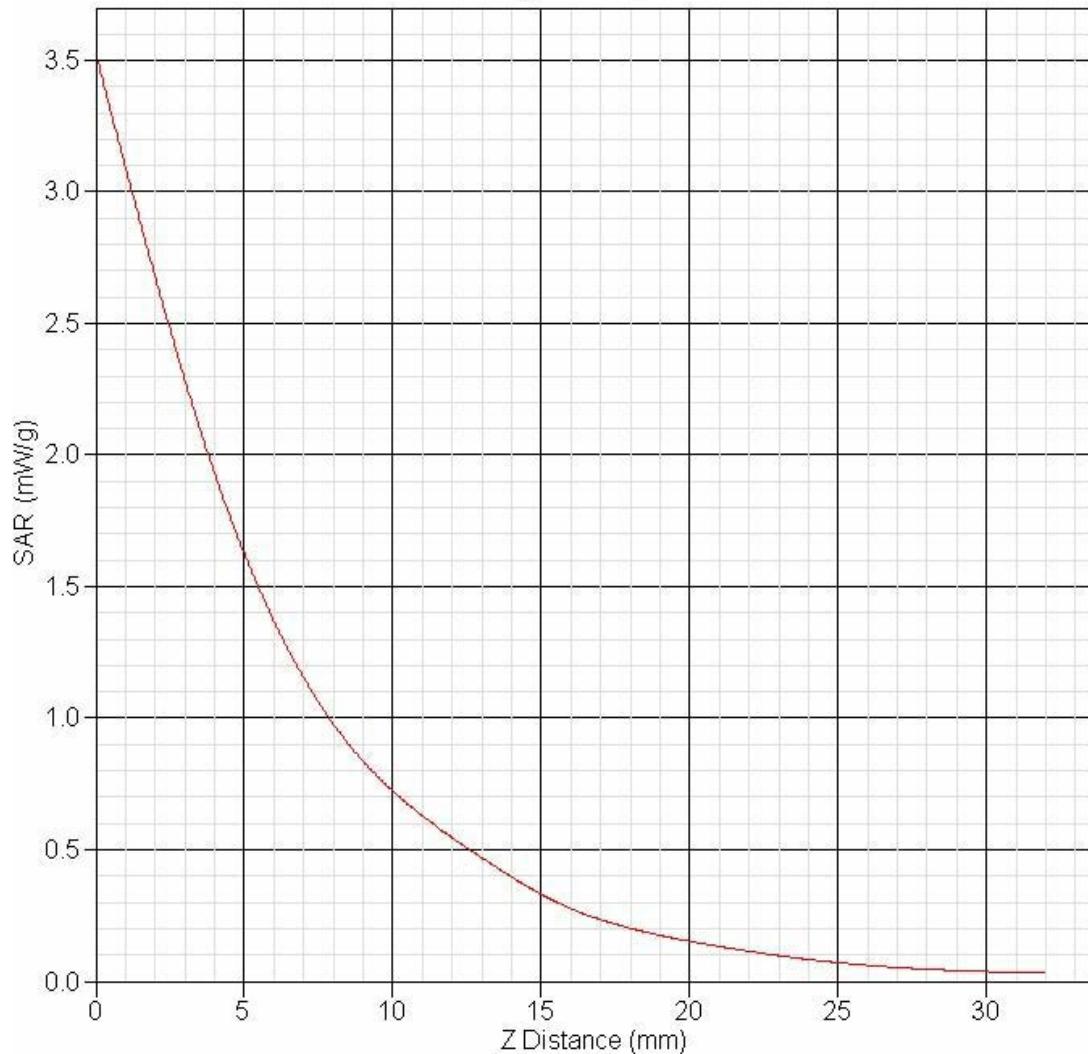

SAR Test Report

Report Date : 26-Jan-2007
 By Operator : 123
 Measurement Date : 26-Jan-2007
 Starting Time : 26-Jan-2007 04:11:08 PM
 End Time : 26-Jan-2007 04:28:28 PM
 Scanning Time : 1040 secs

Product Data
 Device Name : Motion
 Serial No. : IDX80010016007
 Type : Other
 Model : tablet pc
 Frequency : 2450 MHz
 Max. Transmit Pwr : 55 W
 Drift Time : 0 min(s)
 Length : 100 mm
 Width : 20 mm
 Depth : 20 mm
 Antenna Type : Internal
 Orientation : Touch
 Power Drift-Start : 1.095 W/kg
 Power Drift-Finish: 1.066 W/kg
 Power Drift (%) : -2.631
 Picture : C:\alsas\bitmap\Device-5.bmp

Phantom Data
 Name : APREL-Uni
 Type : Uni-Phantom
 Size (mm) : 280 x 280 x 200
 Serial No. : User Define
 Location : Center
 Description : U

Tissue Data
 Type : BODY
 Serial No. : 2450B
 Frequency : 2450.00 MHz
 Last Calib. Date : 26-Jan-2007
 Temperature : 23.00 °C
 Ambient Temp. : 23.00 °C
 Humidity : 35.00 RH%
 Epsilon : 51.39 F/m
 Sigma : 2.03 S/m
 Density : 1000.00 kg/cu. m



Probe Data

Name : APREL
 Model : E-020
 Type : E-Field Triangle
 Serial No. : 225
 Last Calib. Date : 22-Jan-2007
 Frequency : 2450.00 MHz
 Duty Cycle Factor: 1
 Conversion Factor: 4.4
 Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point: 95.00 mV
 Offset : 1.56 mm


Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 22.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 26-Jan-2007
 Set-up Time : 4:10:49 PM
 Area Scan : 9x6x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Touch
 Separation : 0
 Channel : High

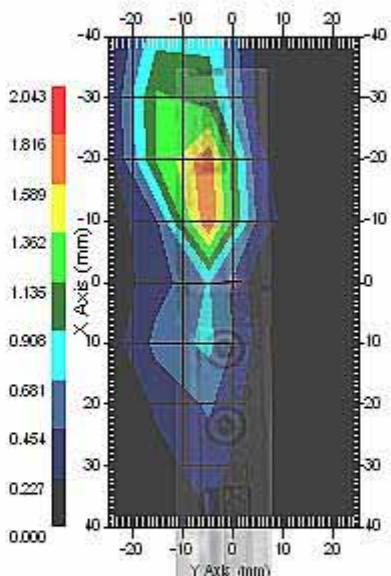

Area Scan

1 gram SAR value : 1.383 W/kg
 Zoom Scan Peak SAR : 3.563 W/kg




Exposure Assessment Measurement Uncertainty

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	$c_i^1 (1-g)$	$c_i^1 (10-g)$	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	•3	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	•3	•cp	•cp	4.4	4.4
Boundary Effect	1.0	rectangular	•3	1	1	0.6	0.6
Linearity	4.7	rectangular	•3	1	1	2.7	2.7
Detection Limit	1.0	rectangular	•3	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	•3	1	1	0.5	0.5
Integration Time	1.7	rectangular	•3	1	1	1.0	1.0
RF Ambient Condition	3.0	rectangular	•3	1	1	1.7	1.7
Probe Positioner Mech.	0.4	rectangular	•3	1	1	0.2	0.2
Restriction							
Probe Positioning with respect to Phantom Shell	2.9	rectangular	•3	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	•3	1	1	2.1	2.1
Test Sample Positioning	4.0	normal	1	1	1	4.0	4.0
Device Holder Uncertainty	2.0	normal	1	1	1	2.0	2.0
Drift of Output Power	2.6	rectangular	•3	1	1	1.5	1.5
Phantom and Setup							
Phantom Uncertainty(shape & thickness tolerance)	3.4	rectangular	•3	1	1	2.0	2.0
Liquid Conductivity(target)	5.0	rectangular	•3	0.7	0.5	2.0	1.4
Liquid Conductivity(meas.)	4.1	normal	1	0.7	0.5	2.9	2.1
Liquid Permittivity(target)	5.0	rectangular	•3	0.6	0.5	1.7	1.4
Liquid Permittivity(meas.)	2.5	normal	1	0.6	0.5	1.5	1.2
Combined Uncertainty		RSS				9.9	9.5
Combined Uncertainty (coverage factor=2)		Normal (k=2)				19.8	19.0



SAR-Z Axis

at Hotspot x:-8.89 y:-3.97

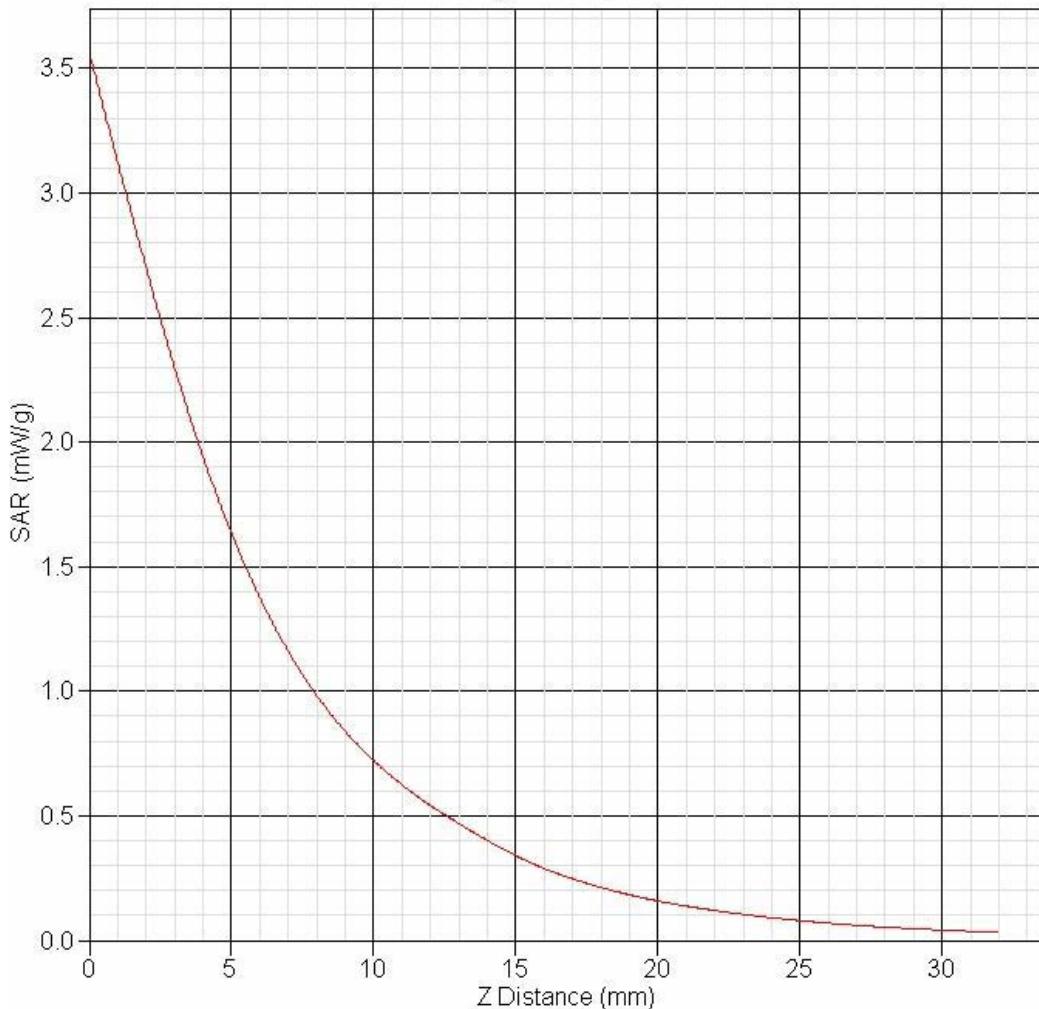

SAR Test Report

Report Date : 26-Jan-2007
 By Operator : 123
 Measurement Date : 26-Jan-2007
 Starting Time : 26-Jan-2007 04:34:56 PM
 End Time : 26-Jan-2007 04:52:24 PM
 Scanning Time : 1048 secs

Product Data
 Device Name : Motion
 Serial No. : IDX80010016007
 Type : Other
 Model : tablet pc
 Frequency : 2450.00 MHz
 Max. Transmit Pwr : 55 W
 Drift Time : 0 min(s)
 Length : 100 mm
 Width : 20 mm
 Depth : 20 mm
 Antenna Type : Internal
 Orientation : Touch
 Power Drift-Start : 0.927 W/kg
 Power Drift-Finish: 0.904 W/kg
 Power Drift (%) : -2.471
 Picture : C:\alsas\bitmap\Device-5.bmp

Phantom Data
 Name : APREL-Uni
 Type : Uni-Phantom
 Size (mm) : 280 x 280 x 200
 Serial No. : User Define
 Location : Center
 Description : U

Tissue Data
 Type : BODY
 Serial No. : 2450B
 Frequency : 2450.00 MHz
 Last Calib. Date : 26-Jan-2007
 Temperature : 23.00 °C
 Ambient Temp. : 23.00 °C
 Humidity : 35.00 RH%
 Epsilon : 51.39 F/m
 Sigma : 2.03 S/m
 Density : 1000.00 kg/cu. m



Probe Data

Name : APREL
 Model : E-020
 Type : E-Field Triangle
 Serial No. : 225
 Last Calib. Date : 22-Jan-2007
 Frequency : 2450.00 MHz
 Duty Cycle Factor: 1
 Conversion Factor: 4.4
 Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point: 95.00 mV
 Offset : 1.56 mm


Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 22.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 26-Jan-2007
 Set-up Time : 4:34:29 PM
 Area Scan : 9x6x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Touch
 Separation : 0
 Channel : Low

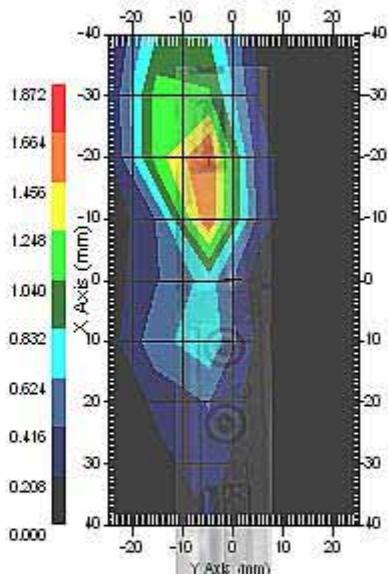

Area Scan

1 gram SAR value : 1.427 W/kg
 Zoom Scan Peak SAR : 3.693 W/kg




Exposure Assessment Measurement Uncertainty

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	$c_i^1 (1-g)$	$c_i^1 (10-g)$	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	•3	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	•3	•cp	•cp	4.4	4.4
Boundary Effect	1.0	rectangular	•3	1	1	0.6	0.6
Linearity	4.7	rectangular	•3	1	1	2.7	2.7
Detection Limit	1.0	rectangular	•3	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	•3	1	1	0.5	0.5
Integration Time	1.7	rectangular	•3	1	1	1.0	1.0
RF Ambient Condition	3.0	rectangular	•3	1	1	1.7	1.7
Probe Positioner Mech.	0.4	rectangular	•3	1	1	0.2	0.2
Restriction							
Probe Positioning with respect to Phantom Shell	2.9	rectangular	•3	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	•3	1	1	2.1	2.1
Test Sample Positioning	4.0	normal	1	1	1	4.0	4.0
Device Holder Uncertainty	2.0	normal	1	1	1	2.0	2.0
Drift of Output Power	2.5	rectangular	•3	1	1	1.4	1.4
Phantom and Setup							
Phantom Uncertainty(shape & thickness tolerance)	3.4	rectangular	•3	1	1	2.0	2.0
Liquid Conductivity(target)	5.0	rectangular	•3	0.7	0.5	2.0	1.4
Liquid Conductivity(meas.)	4.1	normal	1	0.7	0.5	2.9	2.1
Liquid Permittivity(target)	5.0	rectangular	•3	0.6	0.5	1.7	1.4
Liquid Permittivity(meas.)	2.5	normal	1	0.6	0.5	1.5	1.2
Combined Uncertainty		RSS				9.9	9.5
Combined Uncertainty (coverage factor=2)		Normal (k=2)				19.8	19.0



SAR-Z Axis

at Hotspot x:-2.89 y:-3.97

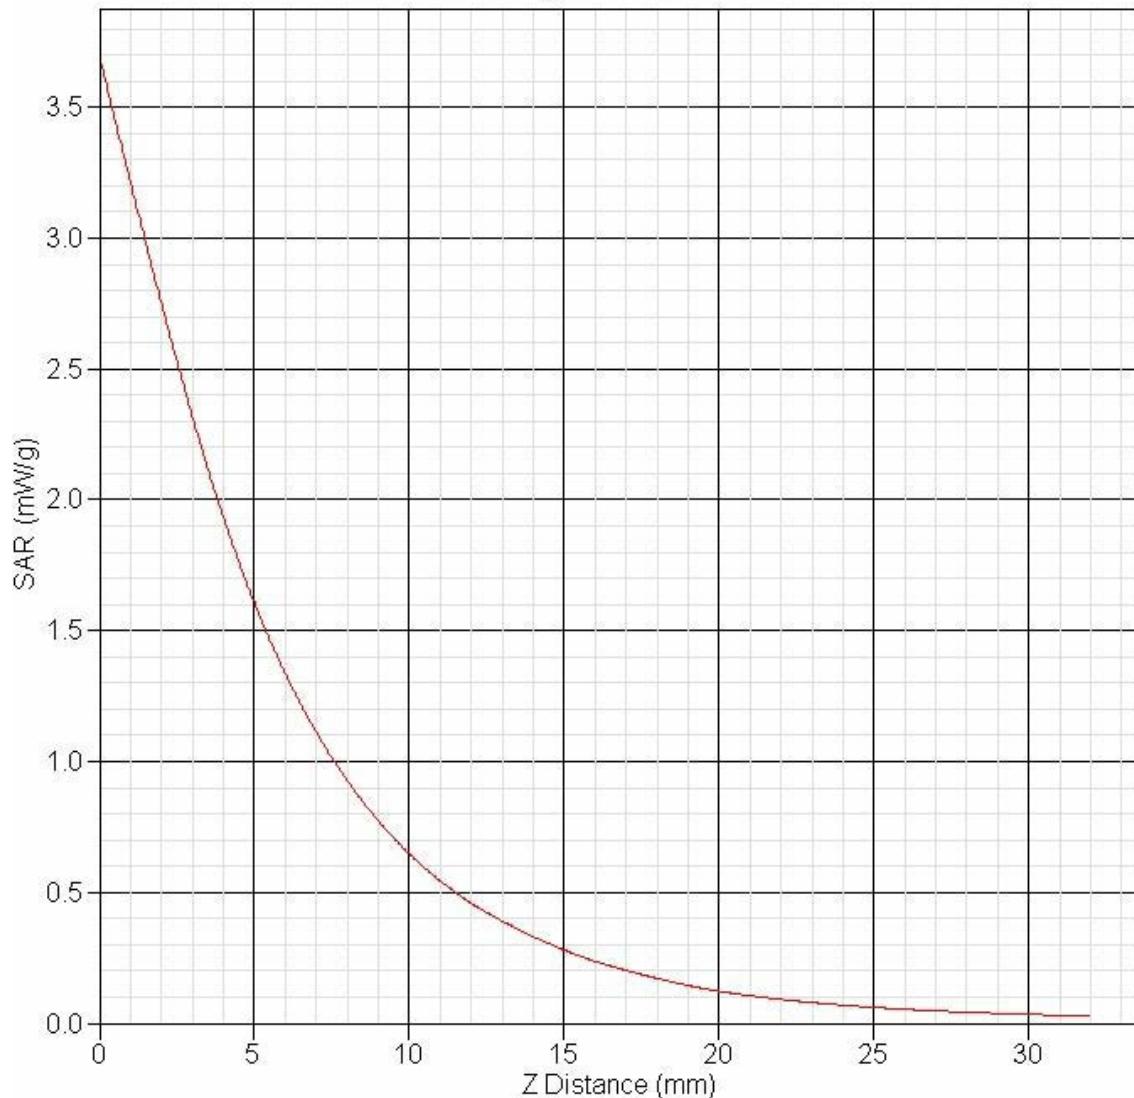

SAR Test Report

Report Date : 26-Jan-2007
 By Operator : 123
 Measurement Date : 26-Jan-2007
 Starting Time : 26-Jan-2007 04:57:35 PM
 End Time : 26-Jan-2007 05:15:04 PM
 Scanning Time : 1049 secs

Product Data
 Device Name : Motion
 Serial No. : IDX80010016007
 Type : Other
 Model : tablet pc
 Frequency : 2450.00 MHz
 Max. Transmit Pwr : 55 W
 Drift Time : 0 min(s)
 Length : 100 mm
 Width : 20 mm
 Depth : 20 mm
 Antenna Type : Internal
 Orientation : Touch
 Power Drift-Start : 1.000 W/kg
 Power Drift-Finish: 1.004 W/kg
 Power Drift (%) : 0.409
 Picture : C:\alsas\bitmap\Device-5.bmp

Phantom Data
 Name : APREL-Uni
 Type : Uni-Phantom
 Size (mm) : 280 x 280 x 200
 Serial No. : User Define
 Location : Center
 Description : U

Tissue Data
 Type : BODY
 Serial No. : 2450B
 Frequency : 2450.00 MHz
 Last Calib. Date : 26-Jan-2007
 Temperature : 23.00 °C
 Ambient Temp. : 23.00 °C
 Humidity : 35.00 RH%
 Epsilon : 51.39 F/m
 Sigma : 2.03 S/m
 Density : 1000.00 kg/cu. m



Probe Data

Name : APREL
 Model : E-020
 Type : E-Field Triangle
 Serial No. : 225
 Last Calib. Date : 22-Jan-2007
 Frequency : 2450.00 MHz
 Duty Cycle Factor: 1
 Conversion Factor: 4.4
 Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point: 95.00 mV
 Offset : 1.56 mm


Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 22.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 26-Jan-2007
 Set-up Time : 4:57:08 PM
 Area Scan : 9x6x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Touch
 Separation : 0
 Channel : Mid

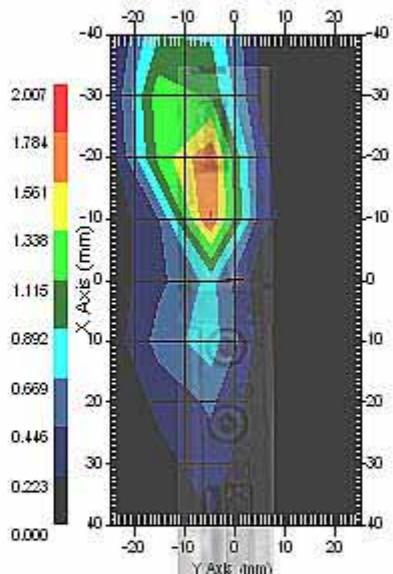

Area Scan

1 gram SAR value : 1.374 W/kg
 Zoom Scan Peak SAR : 3.503 W/kg




Exposure Assessment Measurement Uncertainty

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	$c_i^1 (1-g)$	$c_i^1 (10-g)$	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	•3	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	•3	•cp	•cp	4.4	4.4
Boundary Effect	1.0	rectangular	•3	1	1	0.6	0.6
Linearity	4.7	rectangular	•3	1	1	2.7	2.7
Detection Limit	1.0	rectangular	•3	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	•3	1	1	0.5	0.5
Integration Time	1.7	rectangular	•3	1	1	1.0	1.0
RF Ambient Condition	3.0	rectangular	•3	1	1	1.7	1.7
Probe Positioner Mech.	0.4	rectangular	•3	1	1	0.2	0.2
Restriction							
Probe Positioning with respect to Phantom Shell	2.9	rectangular	•3	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	•3	1	1	2.1	2.1
Test Sample Positioning	4.0	normal	1	1	1	4.0	4.0
Device Holder Uncertainty	2.0	normal	1	1	1	2.0	2.0
Drift of Output Power	0.4	rectangular	•3	1	1	0.2	0.2
Phantom and Setup							
Phantom Uncertainty(shape & thickness tolerance)	3.4	rectangular	•3	1	1	2.0	2.0
Liquid Conductivity(target)	5.0	rectangular	•3	0.7	0.5	2.0	1.4
Liquid Conductivity(meas.)	4.1	normal	1	0.7	0.5	2.9	2.1
Liquid Permittivity(target)	5.0	rectangular	•3	0.6	0.5	1.7	1.4
Liquid Permittivity(meas.)	2.5	normal	1	0.6	0.5	1.5	1.2
Combined Uncertainty		RSS				9.8	9.4
Combined Uncertainty (coverage factor=2)		Normal (k=2)				19.6	18.8



SAR-Z Axis
 at Hotspot x:-8.92 y:-3.97

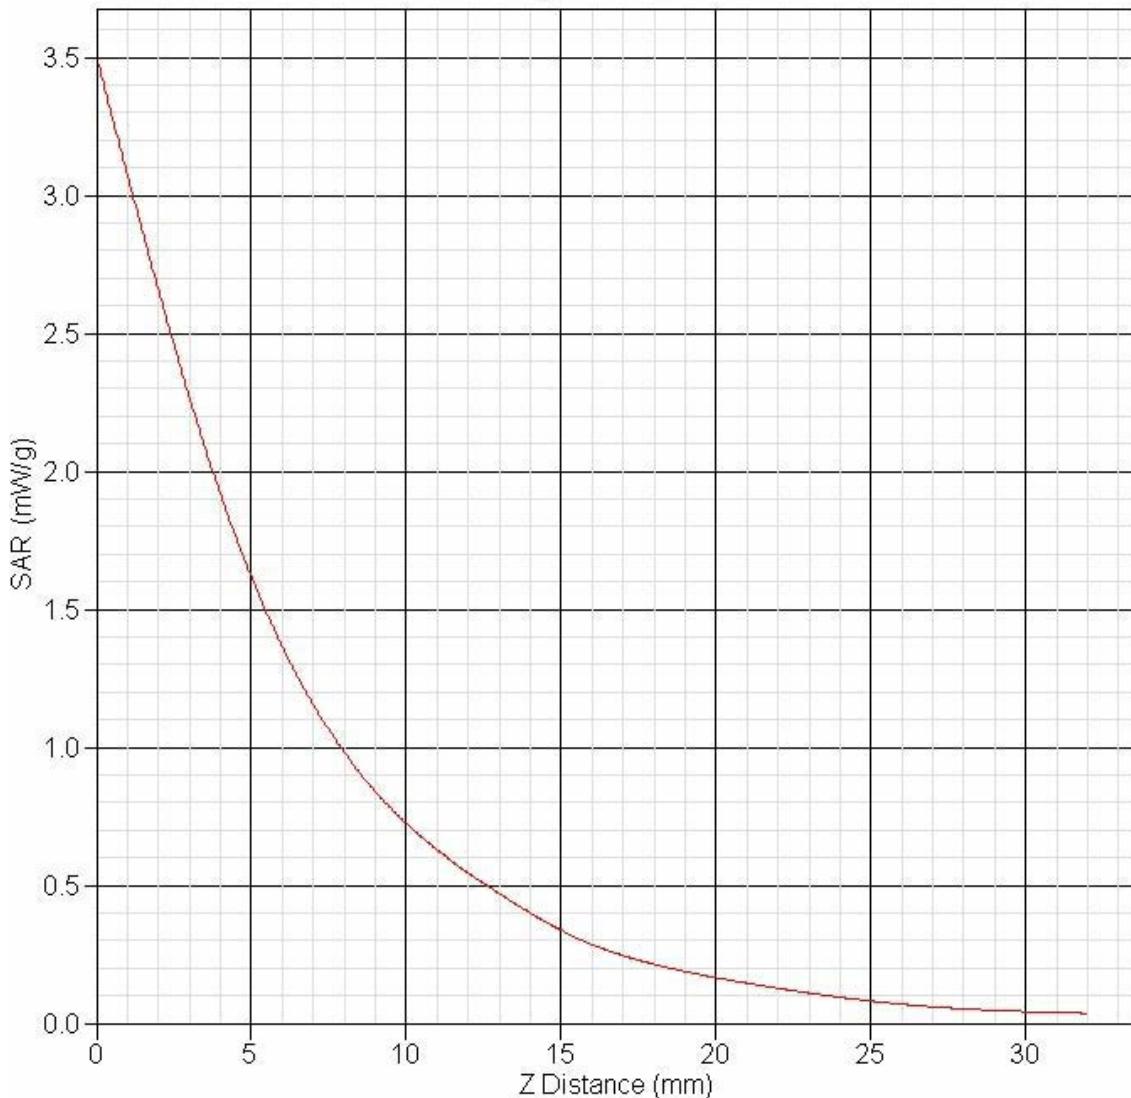

SAR Test Report

Report Date : 26-Jan-2007
 By Operator : 123
 Measurement Date : 26-Jan-2007
 Starting Time : 26-Jan-2007 08:29:27 AM
 End Time : 26-Jan-2007 08:46:03 AM
 Scanning Time : 996 secs

Product Data
 Device Name : Motion
 Serial No. : IDX80010016007
 Type : Other
 Model : tablet pc
 Frequency : 2450.00 MHz
 Max. Transmit Pwr : 55 W
 Drift Time : 0 min(s)
 Length : 100 mm
 Width : 20 mm
 Depth : 20 mm
 Antenna Type : Internal
 Orientation : Touch
 Power Drift-Start : 1.416 W/kg
 Power Drift-Finish: 1.293 W/kg
 Power Drift (%) : -8.651
 Picture : C:\alsas\bitmap\Device-5.bmp

Phantom Data
 Name : APREL-Uni
 Type : Uni-Phantom
 Size (mm) : 280 x 280 x 200
 Serial No. : User Define
 Location : Center
 Description : U

Tissue Data
 Type : BODY
 Serial No. : 2450B
 Frequency : 2450.00 MHz
 Last Calib. Date : 26-Jan-2007
 Temperature : 23.00 °C
 Ambient Temp. : 23.00 °C
 Humidity : 35.00 RH%
 Epsilon : 51.39 F/m
 Sigma : 2.03 S/m
 Density : 1000.00 kg/cu. m



Probe Data

Name : APREL
 Model : E-020
 Type : E-Field Triangle
 Serial No. : 225
 Last Calib. Date : 22-Jan-2007
 Frequency : 2450.00 MHz
 Duty Cycle Factor: 1
 Conversion Factor: 4.4
 Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point: 95.00 mV
 Offset : 1.56 mm

Measurement Data


Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 22.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 26-Jan-2007
 Set-up Time : 8:28:20 AM
 Area Scan : 9x6x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Touch
 Separation : 0
 Channel : High



Area Scan

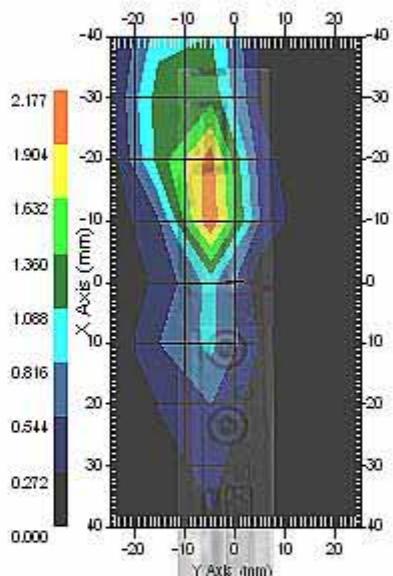

1 gram SAR value : 1.489 W/kg
 Zoom Scan Peak SAR : 4.003 W/kg




Exposure Assessment Measurement Uncertainty

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	$c_i^1 (1-g)$	$c_i^1 (10-g)$	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	•3	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	•3	•cp	•cp	4.4	4.4
Boundary Effect	1.0	rectangular	•3	1	1	0.6	0.6
Linearity	4.7	rectangular	•3	1	1	2.7	2.7
Detection Limit	1.0	rectangular	•3	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	•3	1	1	0.5	0.5
Integration Time	1.7	rectangular	•3	1	1	1.0	1.0
RF Ambient Condition	3.0	rectangular	•3	1	1	1.7	1.7
Probe Positioner Mech.	0.4	rectangular	•3	1	1	0.2	0.2
Restriction							
Probe Positioning with respect to Phantom Shell	2.9	rectangular	•3	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	•3	1	1	2.1	2.1
Test Sample Positioning	4.0	normal	1	1	1	4.0	4.0
Device Holder Uncertainty	2.0	normal	1	1	1	2.0	2.0
Drift of Output Power	8.7	rectangular	•3	1	1	5.0	5.0
Phantom and Setup							
Phantom Uncertainty(shape & thickness tolerance)	3.4	rectangular	•3	1	1	2.0	2.0
Liquid Conductivity(target)	5.0	rectangular	•3	0.7	0.5	2.0	1.4
Liquid Conductivity(meas.)	4.1	normal	1	0.7	0.5	2.9	2.1
Liquid Permittivity(target)	5.0	rectangular	•3	0.6	0.5	1.7	1.4
Liquid Permittivity(meas.)	2.5	normal	1	0.6	0.5	1.5	1.2
Combined Uncertainty		RSS				11.0	10.6
Combined Uncertainty (coverage factor=2)		Normal (k=2)				22.0	21.3



SAR-Z Axis

at Hotspot x:-8.92 y:-3.97

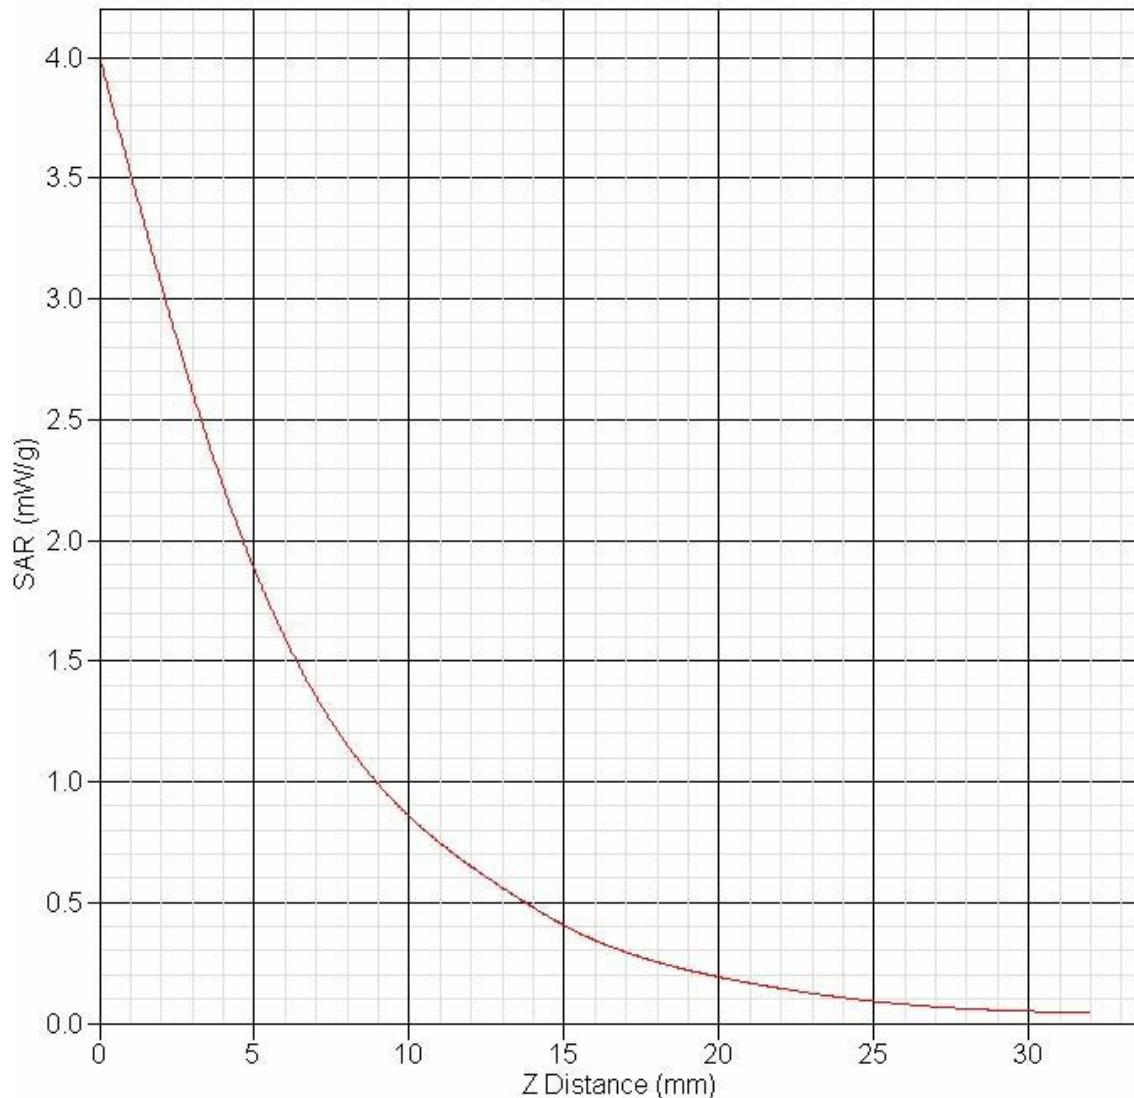

SAR Test Report

Report Date : 30-Jan-2007
 By Operator : 123
 Measurement Date : 30-Jan-2007
 Starting Time : 30-Jan-2007 03:10:57 PM
 End Time : 30-Jan-2007 03:58:40 PM
 Scanning Time : 2863 secs

Product Data
 Device Name : Motion
 Serial No. : IDX80010016007
 Type : Other
 Model : tablet pc
 Frequency : 5200.00 MHz
 Max. Transmit Pwr : 55 W
 Drift Time : 0 min(s)
 Length : 100 mm
 Width : 20 mm
 Depth : 20 mm
 Antenna Type : Internal
 Orientation : Touch
 Power Drift-Start : 1.430 W/kg
 Power Drift-Finish: 1.454 W/kg
 Power Drift (%) : 1.683
 Picture : C:\alsas\bitmap\Device-5.bmp

Phantom Data
 Name : APREL-Uni
 Type : Uni-Phantom
 Size (mm) : 280 x 280 x 200
 Serial No. : User Define
 Location : Center
 Description : U

Tissue Data
 Type : IEC
 Serial No. : 5200
 Frequency : 5200.00 MHz
 Last Calib. Date : 30-Jan-2007
 Temperature : 20.00 °C
 Ambient Temp. : 20.00 °C
 Humidity : 15.00 RH%
 Epsilon : 33.50 F/m
 Sigma : 4.45 S/m
 Density : 1000.00 kg/cu. m



Probe Data

Name : APREL
 Model : E-020
 Type : E-Field Triangle
 Serial No. : 225
 Last Calib. Date : 22-Jan-2007
 Frequency : 5200.00 MHz
 Duty Cycle Factor: 1
 Conversion Factor: 6.24
 Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point: 95.00 mV
 Offset : 1.56 mm

Measurement Data


Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 22.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 30-Jan-2007
 Set-up Time : 3:10:32 PM
 Area Scan : 9x6x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 9x9x17 : Measurement x=4mm, y=4mm, z=2mm

Other Data

DUT Position : Touch
 Separation : 0
 Channel : Low



Area Scan

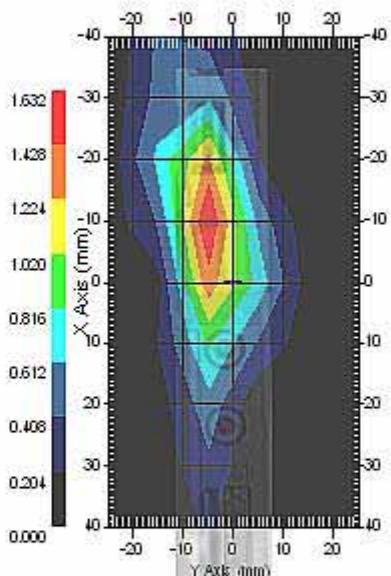

1 gram SAR value : 1.394 W/kg
 Zoom Scan Peak SAR : 4.543 W/kg




Exposure Assessment Measurement Uncertainty

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	$c_i^1 (1-g)$	$c_i^1 (10-g)$	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	•3	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	•3	•cp	•cp	4.4	4.4
Boundary Effect	1.0	rectangular	•3	1	1	0.6	0.6
Linearity	4.7	rectangular	•3	1	1	2.7	2.7
Detection Limit	1.0	rectangular	•3	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	•3	1	1	0.5	0.5
Integration Time	1.7	rectangular	•3	1	1	1.0	1.0
RF Ambient Condition	3.0	rectangular	•3	1	1	1.7	1.7
Probe Positioner Mech.	0.4	rectangular	•3	1	1	0.2	0.2
Restriction							
Probe Positioning with respect to Phantom Shell	2.9	rectangular	•3	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	•3	1	1	2.1	2.1
Test Sample Positioning	4.0	normal	1	1	1	4.0	4.0
Device Holder Uncertainty	2.0	normal	1	1	1	2.0	2.0
Drift of Output Power	1.7	rectangular	•3	1	1	1.0	1.0
Phantom and Setup							
Phantom Uncertainty(shape & thickness tolerance)	3.4	rectangular	•3	1	1	2.0	2.0
Liquid Conductivity(target)	5.0	rectangular	•3	0.7	0.5	2.0	1.4
Liquid Conductivity(meas.)	1.4	normal	1	0.7	0.5	0.0	0.0
Liquid Permittivity(target)	5.0	rectangular	•3	0.6	0.5	1.7	1.4
Liquid Permittivity(meas.)	1.4	normal	1	0.6	0.5	0.0	0.0
Combined Uncertainty		RSS				9.3	9.1
Combined Uncertainty (coverage factor=2)		Normal (k=2)				18.6	18.3



SAR-Z Axis
 at Hotspot x:-4.94 y:-7.98

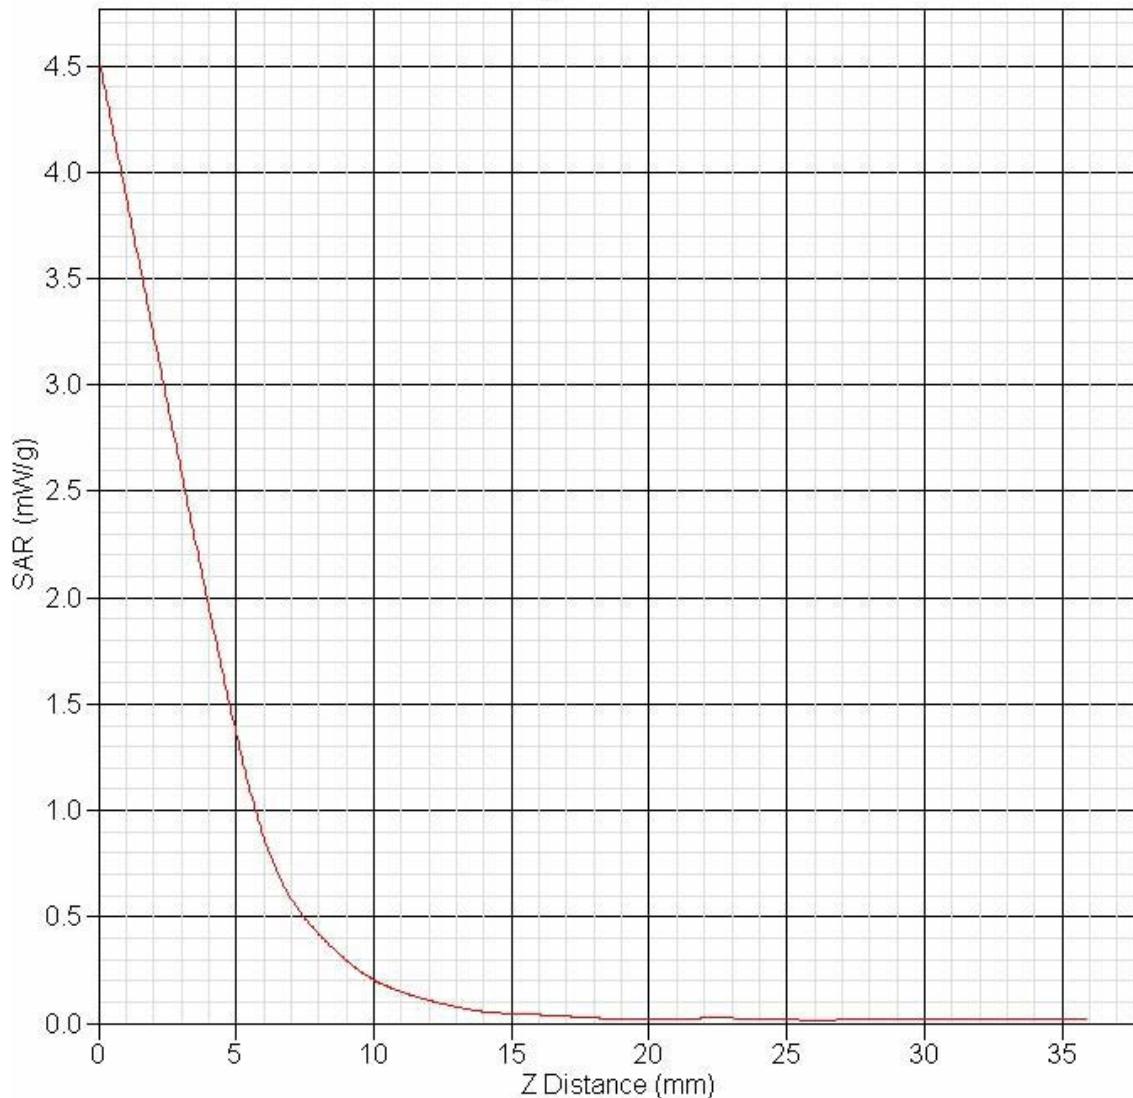

SAR Test Report

Report Date : 29-Jan-2007
 By Operator : 123
 Measurement Date : 29-Jan-2007
 Starting Time : 29-Jan-2007 09:29:23 AM
 End Time : 29-Jan-2007 10:17:29 AM
 Scanning Time : 2886 secs

Product Data
 Device Name : Motion
 Serial No. : IDX80010016007
 Type : Other
 Model : tablet pc
 Frequency : 5200.00 MHz
 Max. Transmit Pwr : 55 W
 Drift Time : 0 min(s)
 Length : 100 mm
 Width : 20 mm
 Depth : 20 mm
 Antenna Type : Internal
 Orientation : Touch
 Power Drift-Start : 2.064 W/kg
 Power Drift-Finish: 1.812 W/kg
 Power Drift (%) : -1.205
 Picture : C:\alsas\bitmap\Device-5.bmp

Phantom Data
 Name : APREL-Uni
 Type : Uni-Phantom
 Size (mm) : 280 x 280 x 200
 Serial No. : User Define
 Location : Center
 Description : U

Tissue Data
 Type : IEC
 Serial No. : 5200
 Frequency : 5200.00 MHz
 Last Calib. Date : 25-Jan-2007
 Temperature : 20.00 °C
 Ambient Temp. : 20.00 °C
 Humidity : 15.00 RH%
 Epsilon : 33.50 F/m
 Sigma : 4.45 S/m
 Density : 1000.00 kg/cu. m



Probe Data

Name : APREL
 Model : E-020
 Type : E-Field Triangle
 Serial No. : 225
 Last Calib. Date : 22-Jan-2007
 Frequency : 5200.00 MHz
 Duty Cycle Factor: 1
 Conversion Factor: 6.24
 Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point: 95.00 mV
 Offset : 1.56 mm


Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 22.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 29-Jan-2007
 Set-up Time : 9:23:24 AM
 Area Scan : 9x6x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 9x9x17 : Measurement x=4mm, y=4mm, z=2mm

Other Data

DUT Position : Touch
 Separation : 0
 Channel : Mid

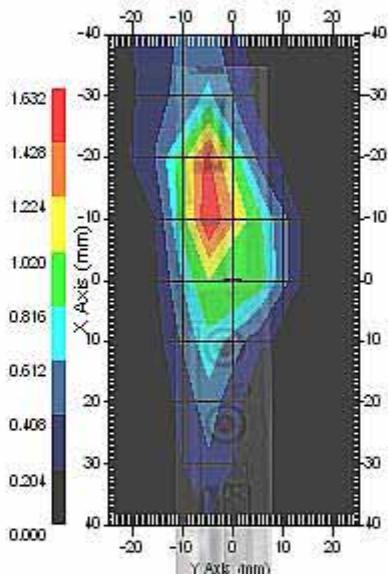

Area Scan

1 gram SAR value : 1.395 W/kg
 Zoom Scan Peak SAR : 4.273 W/kg




Exposure Assessment Measurement Uncertainty

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	$c_i^1 (1-g)$	$c_i^1 (10-g)$	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	•3	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	•3	•cp	•cp	4.4	4.4
Boundary Effect	1.0	rectangular	•3	1	1	0.6	0.6
Linearity	4.7	rectangular	•3	1	1	2.7	2.7
Detection Limit	1.0	rectangular	•3	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	•3	1	1	0.5	0.5
Integration Time	1.7	rectangular	•3	1	1	1.0	1.0
RF Ambient Condition	3.0	rectangular	•3	1	1	1.7	1.7
Probe Positioner Mech.	0.4	rectangular	•3	1	1	0.2	0.2
Restriction							
Probe Positioning with respect to Phantom Shell	2.9	rectangular	•3	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	•3	1	1	2.1	2.1
Test Sample Positioning	4.0	normal	1	1	1	4.0	4.0
Device Holder Uncertainty	2.0	normal	1	1	1	2.0	2.0
Drift of Output Power	12.2	rectangular	•3	1	1	7.0	7.0
Phantom and Setup							
Phantom Uncertainty(shape & thickness tolerance)	3.4	rectangular	•3	1	1	2.0	2.0
Liquid Conductivity(target)	5.0	rectangular	•3	0.7	0.5	2.0	1.4
Liquid Conductivity(meas.)	1.4	normal	1	0.7	0.5	0.0	0.0
Liquid Permittivity(target)	5.0	rectangular	•3	0.6	0.5	1.7	1.4
Liquid Permittivity(meas.)	1.4	normal	1	0.6	0.5	0.0	0.0
Combined Uncertainty		RSS				11.6	11.5
Combined Uncertainty (coverage factor=2)		Normal (k=2)				23.2	22.9



SAR-Z Axis
 at Hotspot x:-0.90 y:0.03

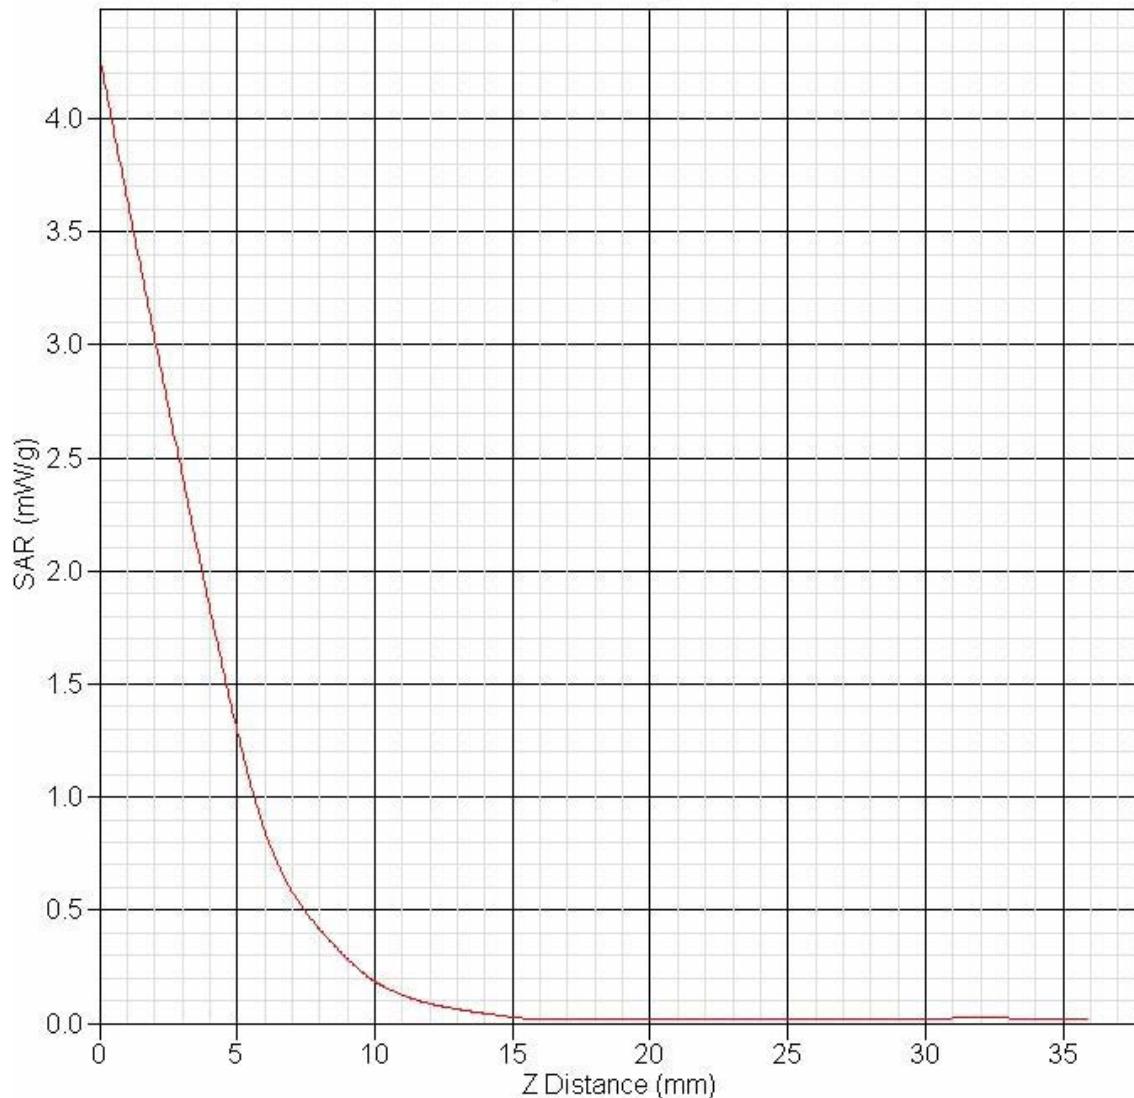

SAR Test Report

Report Date : 29-Jan-2007
 By Operator : 123
 Measurement Date : 29-Jan-2007
 Starting Time : 29-Jan-2007 10:41:07 AM
 End Time : 29-Jan-2007 11:28:56 AM
 Scanning Time : 2869 secs

Product Data
 Device Name : Motion
 Serial No. : IDX80010016007
 Type : Other
 Model : tablet pc
 Frequency : 5200.00 MHz
 Max. Transmit Pwr : 55 W
 Drift Time : 0 min(s)
 Length : 100 mm
 Width : 20 mm
 Depth : 20 mm
 Antenna Type : Internal
 Orientation : Touch
 Power Drift-Start : 1.907 W/kg
 Power Drift-Finish: 1.841 W/kg
 Power Drift (%) : -3.467
 Picture : C:\alsas\bitmap\Device-5.bmp

Phantom Data
 Name : APREL-Uni
 Type : Uni-Phantom
 Size (mm) : 280 x 280 x 200
 Serial No. : User Define
 Location : Center
 Description : U

Tissue Data
 Type : IEC
 Serial No. : 5200
 Frequency : 5200.00 MHz
 Last Calib. Date : 25-Jan-2007
 Temperature : 20.00 °C
 Ambient Temp. : 20.00 °C
 Humidity : 15.00 RH%
 Epsilon : 33.50 F/m
 Sigma : 4.45 S/m
 Density : 1000.00 kg/cu. m



Probe Data

Name : APREL
 Model : E-020
 Type : E-Field Triangle
 Serial No. : 225
 Last Calib. Date : 22-Jan-2007
 Frequency : 5200.00 MHz
 Duty Cycle Factor: 1
 Conversion Factor: 6.24
 Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point: 95.00 mV
 Offset : 1.56 mm


Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 22.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 29-Jan-2007
 Set-up Time : 10:39:56 AM
 Area Scan : 9x6x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 9x9x17 : Measurement x=4mm, y=4mm, z=2mm

Other Data

DUT Position : Touch
 Separation : 0
 Channel : Mid

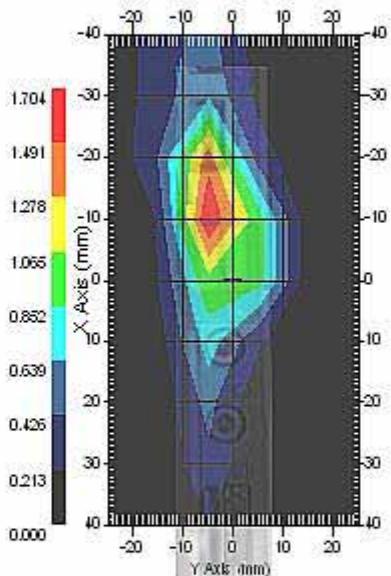

Area Scan

1 gram SAR value : 1.336 W/kg
 Zoom Scan Peak SAR : 4.363 W/kg




Exposure Assessment Measurement Uncertainty

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	$c_i^1 (1-g)$	$c_i^1 (10-g)$	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	•3	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	•3	•cp	•cp	4.4	4.4
Boundary Effect	1.0	rectangular	•3	1	1	0.6	0.6
Linearity	4.7	rectangular	•3	1	1	2.7	2.7
Detection Limit	1.0	rectangular	•3	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	•3	1	1	0.5	0.5
Integration Time	1.7	rectangular	•3	1	1	1.0	1.0
RF Ambient Condition	3.0	rectangular	•3	1	1	1.7	1.7
Probe Positioner Mech.	0.4	rectangular	•3	1	1	0.2	0.2
Restriction							
Probe Positioning with respect to Phantom Shell	2.9	rectangular	•3	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	•3	1	1	2.1	2.1
Test Sample Positioning	4.0	normal	1	1	1	4.0	4.0
Device Holder Uncertainty	2.0	normal	1	1	1	2.0	2.0
Drift of Output Power	3.5	rectangular	•3	1	1	2.0	2.0
Phantom and Setup							
Phantom Uncertainty(shape & thickness tolerance)	3.4	rectangular	•3	1	1	2.0	2.0
Liquid Conductivity(target)	5.0	rectangular	•3	0.7	0.5	2.0	1.4
Liquid Conductivity(meas.)	1.4	normal	1	0.7	0.5	0.0	0.0
Liquid Permittivity(target)	5.0	rectangular	•3	0.6	0.5	1.7	1.4
Liquid Permittivity(meas.)	1.4	normal	1	0.6	0.5	0.0	0.0
Combined Uncertainty		RSS				9.4	9.3
Combined Uncertainty (coverage factor=2)		Normal (k=2)				18.9	18.6



SAR-Z Axis

at Hotspot x:-0.89 y:0.02

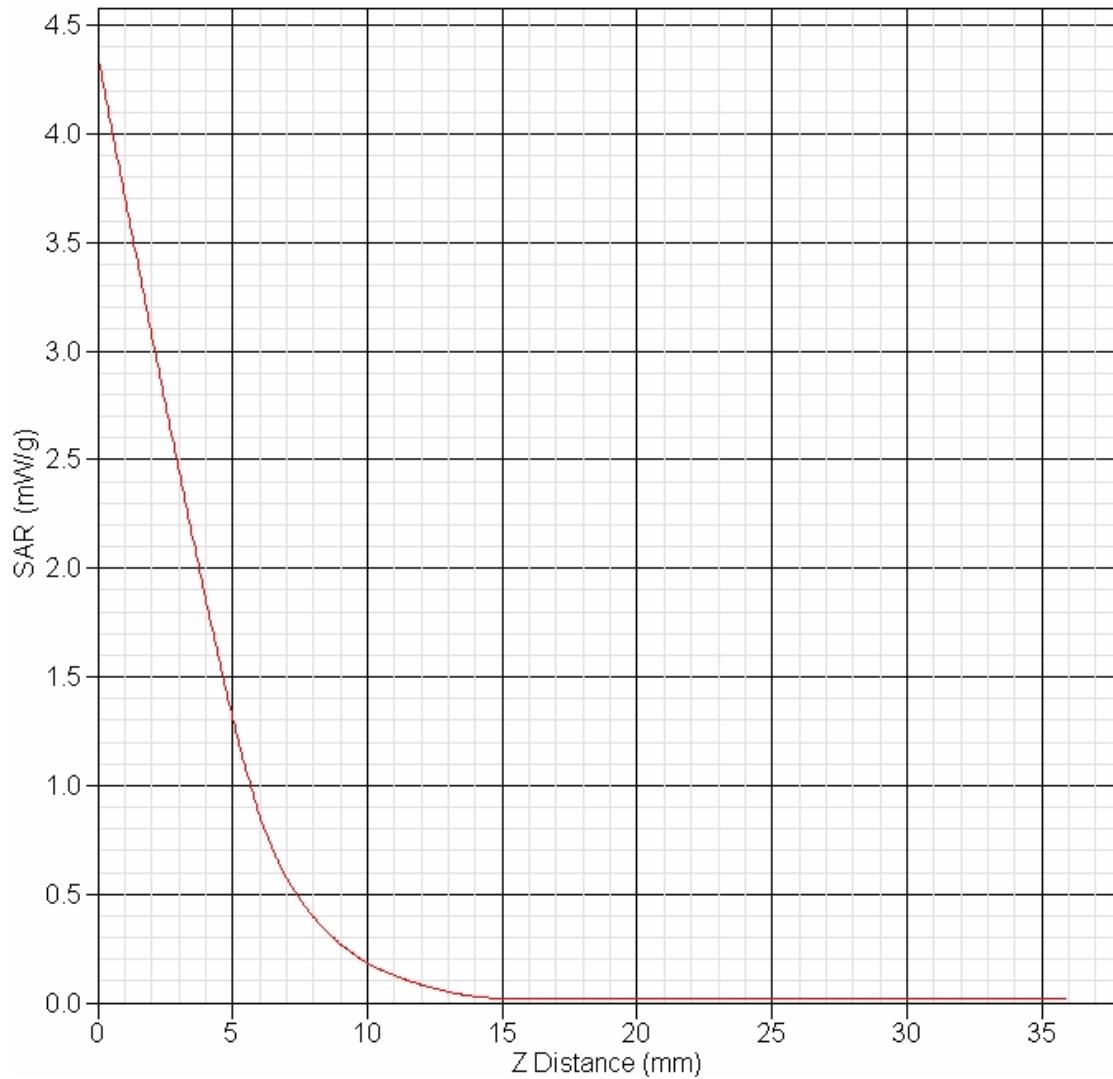

SAR Test Report

Report Date : 30-Jan-2007
 By Operator : 123
 Measurement Date : 30-Jan-2007
 Starting Time : 30-Jan-2007 11:38:26 AM
 End Time : 30-Jan-2007 12:03:45 PM
 Scanning Time : 1519 secs

Product Data
 Device Name : Motion
 Serial No. : IDX80010016007
 Type : Other
 Model : tablet pc
 Frequency : 5200.00 MHz
 Max. Transmit Pwr : 55 W
 Drift Time : 0 min(s)
 Length : 100 mm
 Width : 20 mm
 Depth : 20 mm
 Antenna Type : Internal
 Orientation : Touch
 Power Drift-Start : 1.821 W/kg
 Power Drift-Finish: 1.828 W/kg
 Power Drift (%) : 0.415
 Picture : C:\alsas\bitmap\Device-5.bmp

Phantom Data
 Name : APREL-Uni
 Type : Uni-Phantom
 Size (mm) : 280 x 280 x 200
 Serial No. : User Define
 Location : Center
 Description : U

Tissue Data
 Type : IEC
 Serial No. : 5200
 Frequency : 5200.00 MHz
 Last Calib. Date : 30-Jan-2007
 Temperature : 20.00 °C
 Ambient Temp. : 20.00 °C
 Humidity : 15.00 RH%
 Epsilon : 33.50 F/m
 Sigma : 4.45 S/m
 Density : 1000.00 kg/cu. m



Probe Data

Name : APREL
 Model : E-020
 Type : E-Field Triangle
 Serial No. : 225
 Last Calib. Date : 22-Jan-2007
 Frequency : 5200.00 MHz
 Duty Cycle Factor: 1
 Conversion Factor: 6.24
 Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point: 95.00 mV
 Offset : 1.56 mm


Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 22.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 30-Jan-2007
 Set-up Time : 11:36:28 AM
 Area Scan : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 9x9x17 : Measurement x=4mm, y=4mm, z=2mm

Other Data

DUT Position : Touch
 Separation : 0
 Channel : High



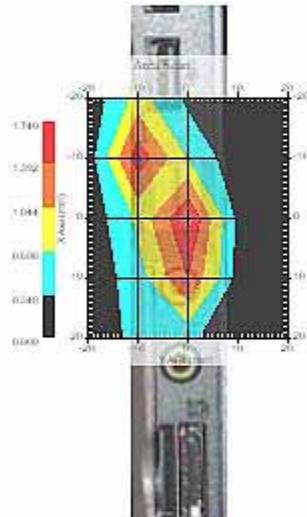

1 gram SAR value : 1.422 W/kg
 Zoom Scan Peak SAR : 4.463 W/kg




Exposure Assessment Measurement Uncertainty

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	$c_i^1 (1-g)$	$c_i^1 (10-g)$	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	•3	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	•3	•cp	•cp	4.4	4.4
Boundary Effect	1.0	rectangular	•3	1	1	0.6	0.6
Linearity	4.7	rectangular	•3	1	1	2.7	2.7
Detection Limit	1.0	rectangular	•3	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	•3	1	1	0.5	0.5
Integration Time	1.7	rectangular	•3	1	1	1.0	1.0
RF Ambient Condition	3.0	rectangular	•3	1	1	1.7	1.7
Probe Positioner Mech.	0.4	rectangular	•3	1	1	0.2	0.2
Restriction							
Probe Positioning with respect to Phantom Shell	2.9	rectangular	•3	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	•3	1	1	2.1	2.1
Test Sample Positioning	4.0	normal	1	1	1	4.0	4.0
Device Holder Uncertainty	2.0	normal	1	1	1	2.0	2.0
Drift of Output Power	0.4	rectangular	•3	1	1	0.2	0.2
Phantom and Setup							
Phantom Uncertainty(shape & thickness tolerance)	3.4	rectangular	•3	1	1	2.0	2.0
Liquid Conductivity(target)	5.0	rectangular	•3	0.7	0.5	2.0	1.4
Liquid Conductivity(meas.)	1.4	normal	1	0.7	0.5	0.0	0.0
Liquid Permittivity(target)	5.0	rectangular	•3	0.6	0.5	1.7	1.4
Liquid Permittivity(meas.)	1.4	normal	1	0.6	0.5	0.0	0.0
Combined Uncertainty		RSS				9.2	9.1
Combined Uncertainty (coverage factor=2)		Normal (k=2)				18.5	18.1



SAR-Z Axis

at Hotspot x:-4.92 y:-2.97

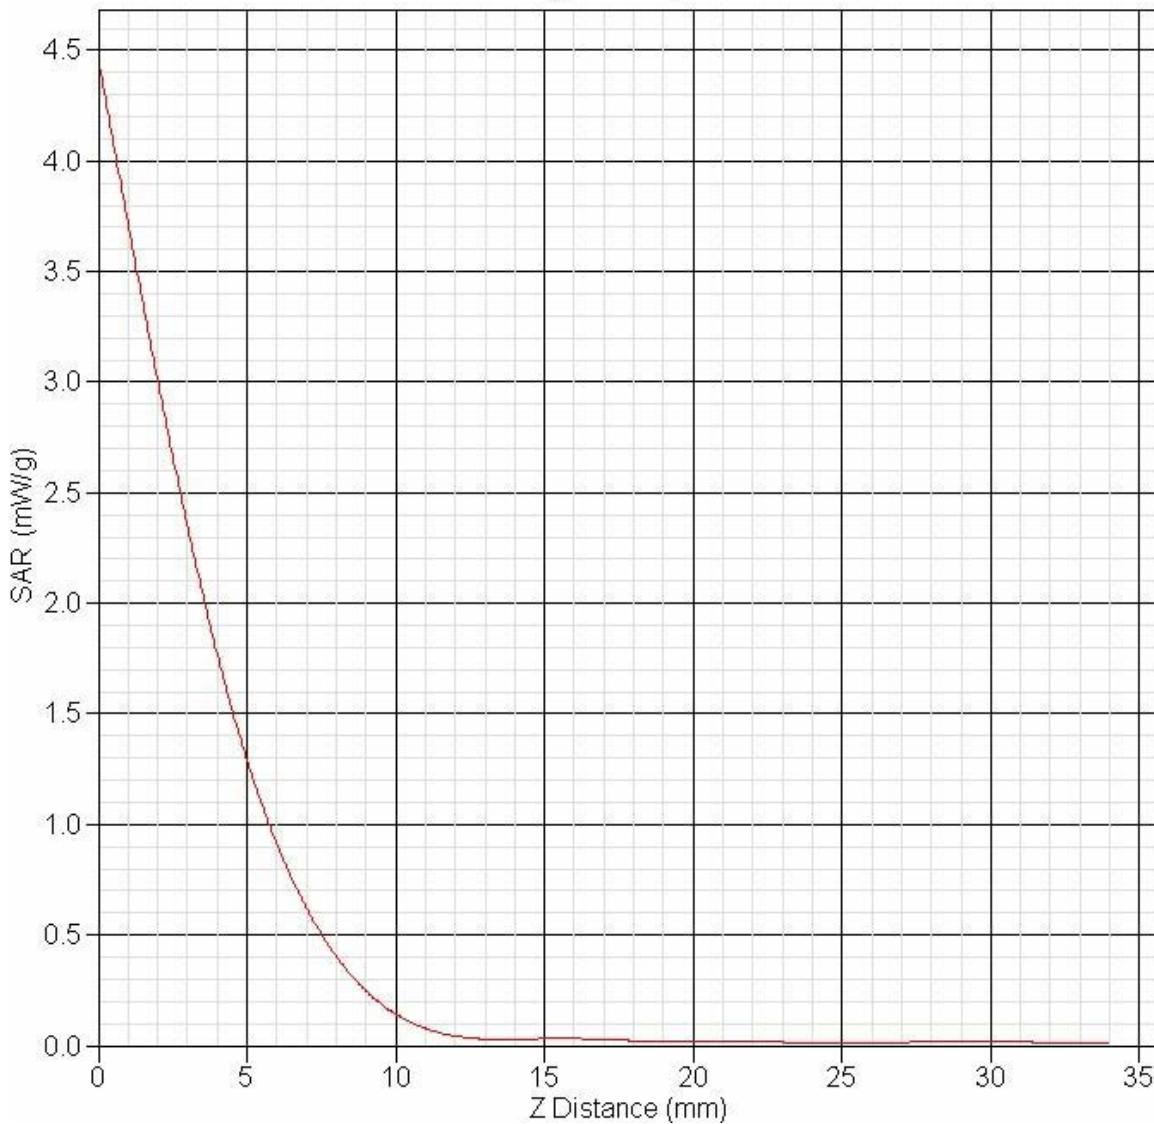

SAR Test Report

Report Date : 31-Jan-2007
 By Operator : 123
 Measurement Date : 31-Jan-2007
 Starting Time : 31-Jan-2007 10:03:34 AM
 End Time : 31-Jan-2007 10:53:21 AM
 Scanning Time : 2987 secs

Product Data
 Device Name : Motion
 Serial No. : IDX80010016007
 Type : Other
 Model : tablet pc
 Frequency : 5200.00 MHz
 Max. Transmit Pwr : 55 W
 Drift Time : 0 min(s)
 Length : 100 mm
 Width : 20 mm
 Depth : 20 mm
 Antenna Type : Internal
 Orientation : Touch
 Power Drift-Start : 1.125 W/kg
 Power Drift-Finish: 1.067 W/kg
 Power Drift (%) : -5.118
 Picture : C:\alsas\bitmap\Device-5.bmp

Phantom Data
 Name : APREL-Uni
 Type : Uni-Phantom
 Size (mm) : 280 x 280 x 200
 Serial No. : User Define
 Location : Center
 Description : U

Tissue Data
 Type : IEC
 Serial No. : 5800
 Frequency : 5800.00 MHz
 Last Calib. Date : 26-Jan-2007
 Temperature : 22.00 °C
 Ambient Temp. : 23.00 °C
 Humidity : 50.00 RH%
 Epsilon : 31.94 F/m
 Sigma : 5.72 S/m
 Density : 1000.00 kg/cu. m



Probe Data

Name : APREL
 Model : E-020
 Type : E-Field Triangle
 Serial No. : 225
 Last Calib. Date : 22-Jan-2007
 Frequency : 5200.00 MHz
 Duty Cycle Factor: 1
 Conversion Factor: 6.24
 Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point: 95.00 mV
 Offset : 1.56 mm

Measurement Data


Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 22.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 31-Jan-2007
 Set-up Time : 10:03:05 AM
 Area Scan : 9x6x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 9x9x17 : Measurement x=4mm, y=4mm, z=2mm

Other Data

DUT Position : Touch
 Separation : 0
 Channel : Low



Area Scan

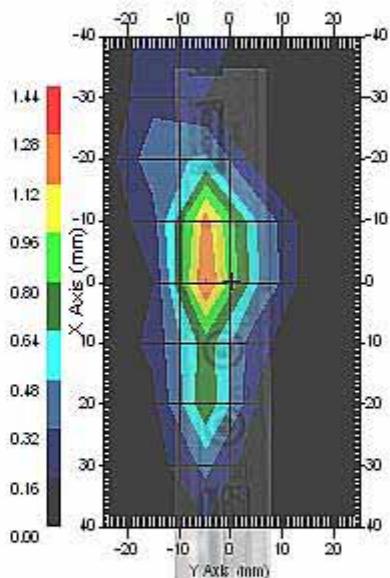

1 gram SAR value : 1.271 W/kg
 Zoom Scan Peak SAR : 3.763 W/kg




Exposure Assessment Measurement Uncertainty

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	$c_i^1 (1-g)$	$c_i^1 (10-g)$	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	•3	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	•3	•cp	•cp	4.4	4.4
Boundary Effect	1.0	rectangular	•3	1	1	0.6	0.6
Linearity	4.7	rectangular	•3	1	1	2.7	2.7
Detection Limit	1.0	rectangular	•3	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	•3	1	1	0.5	0.5
Integration Time	1.7	rectangular	•3	1	1	1.0	1.0
RF Ambient Condition	3.0	rectangular	•3	1	1	1.7	1.7
Probe Positioner Mech.	0.4	rectangular	•3	1	1	0.2	0.2
Restriction							
Probe Positioning with respect to Phantom Shell	2.9	rectangular	•3	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	•3	1	1	2.1	2.1
Test Sample Positioning	4.0	normal	1	1	1	4.0	4.0
Device Holder Uncertainty	2.0	normal	1	1	1	2.0	2.0
Drift of Output Power	5.1	rectangular	•3	1	1	3.0	3.0
Phantom and Setup							
Phantom Uncertainty(shape & thickness tolerance)	3.4	rectangular	•3	1	1	2.0	2.0
Liquid Conductivity(target)	5.0	rectangular	•3	0.7	0.5	2.0	1.4
Liquid Conductivity(meas.)	1.4	normal	1	0.7	0.5	0.0	0.0
Liquid Permittivity(target)	5.0	rectangular	•3	0.6	0.5	1.7	1.4
Liquid Permittivity(meas.)	1.4	normal	1	0.6	0.5	0.0	0.0
Combined Uncertainty		RSS				9.7	9.6
Combined Uncertainty (coverage factor=2)		Normal (k=2)				19.4	19.1



SAR-Z Axis

at Hotspot x:5.07 y:0.03

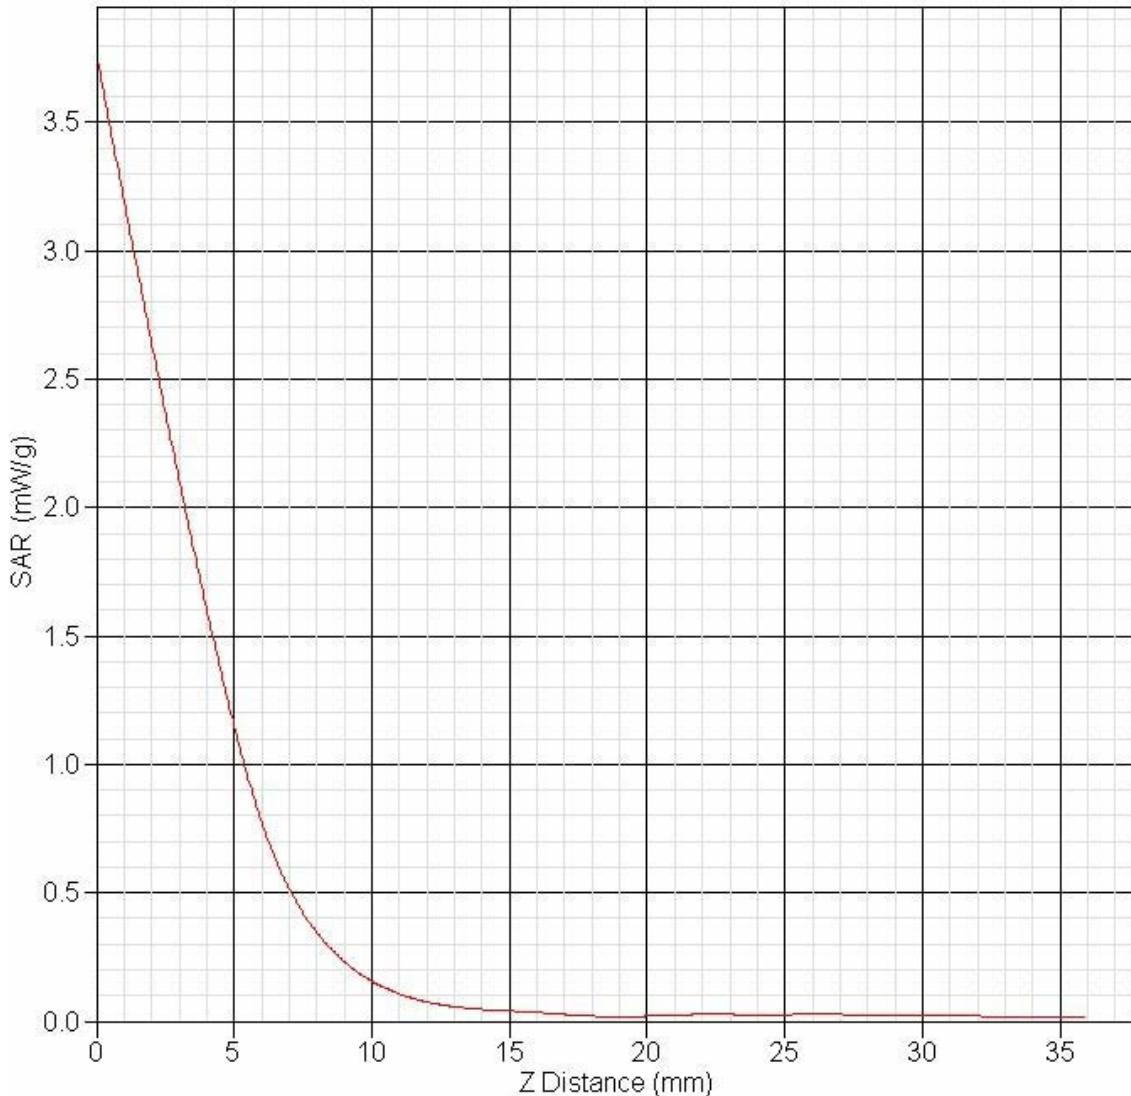

SAR Test Report

Report Date : 31-Jan-2007
 By Operator : 123
 Measurement Date : 31-Jan-2007
 Starting Time : 31-Jan-2007 12:34:29 PM
 End Time : 31-Jan-2007 01:24:28 PM
 Scanning Time : 2999 secs

Product Data
 Device Name : Motion
 Serial No. : IDX80010016007
 Type : Other
 Model : tablet pc
 Frequency : 5200.00 MHz
 Max. Transmit Pwr : 55 W
 Drift Time : 0 min(s)
 Length : 100 mm
 Width : 20 mm
 Depth : 20 mm
 Antenna Type : Internal
 Orientation : Touch
 Power Drift-Start : 1.129 W/kg
 Power Drift-Finish: 1.122 W/kg
 Power Drift (%) : -0.659
 Picture : C:\alsas\bitmap\Device-5.bmp

Phantom Data
 Name : APREL-Uni
 Type : Uni-Phantom
 Size (mm) : 280 x 280 x 200
 Serial No. : User Define
 Location : Center
 Description : U

Tissue Data
 Type : IEC
 Serial No. : 5800
 Frequency : 5800.00 MHz
 Last Calib. Date : 26-Jan-2007
 Temperature : 22.00 °C
 Ambient Temp. : 23.00 °C
 Humidity : 50.00 RH%
 Epsilon : 31.94 F/m
 Sigma : 5.72 S/m
 Density : 1000.00 kg/cu. m



Probe Data

Name : APREL
 Model : E-020
 Type : E-Field Triangle
 Serial No. : 225
 Last Calib. Date : 22-Jan-2007
 Frequency : 5800.00 MHz
 Duty Cycle Factor: 1
 Conversion Factor: 6.3
 Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point: 95.00 mV
 Offset : 1.56 mm


Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 22.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 31-Jan-2007
 Set-up Time : 12:34:02 PM
 Area Scan : 9x6x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 9x9x17 : Measurement x=4mm, y=4mm, z=2mm

Other Data

DUT Position : Touch
 Separation : 0
 Channel : Mid

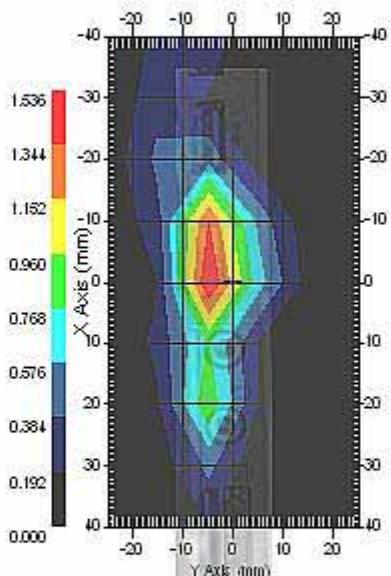

Area Scan

1 gram SAR value : 1.462 W/kg
 Zoom Scan Peak SAR : 4.553 W/kg




Exposure Assessment Measurement Uncertainty

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	$c_i^1 (1-g)$	$c_i^1 (10-g)$	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	•3	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	•3	•cp	•cp	4.4	4.4
Boundary Effect	1.0	rectangular	•3	1	1	0.6	0.6
Linearity	4.7	rectangular	•3	1	1	2.7	2.7
Detection Limit	1.0	rectangular	•3	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	•3	1	1	0.5	0.5
Integration Time	1.7	rectangular	•3	1	1	1.0	1.0
RF Ambient Condition	3.0	rectangular	•3	1	1	1.7	1.7
Probe Positioner Mech.	0.4	rectangular	•3	1	1	0.2	0.2
Restriction							
Probe Positioning with respect to Phantom Shell	2.9	rectangular	•3	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	•3	1	1	2.1	2.1
Test Sample Positioning	4.0	normal	1	1	1	4.0	4.0
Device Holder Uncertainty	2.0	normal	1	1	1	2.0	2.0
Drift of Output Power	0.7	rectangular	•3	1	1	0.4	0.4
Phantom and Setup							
Phantom Uncertainty(shape & thickness tolerance)	3.4	rectangular	•3	1	1	2.0	2.0
Liquid Conductivity(target)	5.0	rectangular	•3	0.7	0.5	2.0	1.4
Liquid Conductivity(meas.)	1.4	normal	1	0.7	0.5	0.0	0.0
Liquid Permittivity(target)	5.0	rectangular	•3	0.6	0.5	1.7	1.4
Liquid Permittivity(meas.)	1.4	normal	1	0.6	0.5	0.0	0.0
Combined Uncertainty		RSS				9.2	9.1
Combined Uncertainty (coverage factor=2)		Normal (k=2)				18.5	18.2



SAR-Z Axis

at Hotspot x:5.12 y:0.03

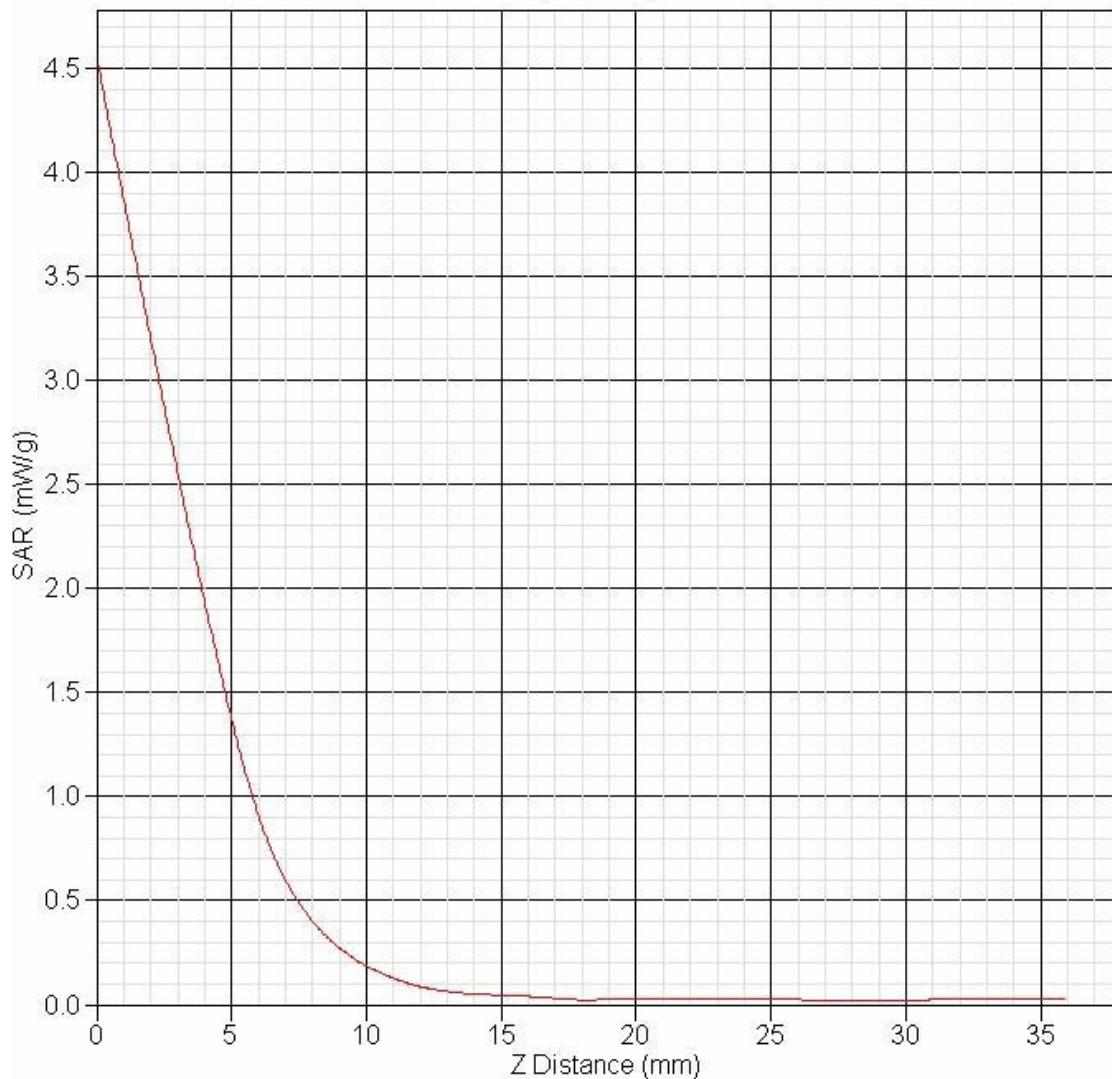

SAR Test Report

Report Date : 31-Jan-2007
 By Operator : 123
 Measurement Date : 31-Jan-2007
 Starting Time : 31-Jan-2007 03:19:36 PM
 End Time : 31-Jan-2007 03:45:12 PM
 Scanning Time : 1536 secs

Product Data
 Device Name : Motion
 Serial No. : IDX80010016007
 Type : Other
 Model : tablet pc
 Frequency : 5200.00 MHz
 Max. Transmit Pwr : 55 W
 Drift Time : 0 min(s)
 Length : 100 mm
 Width : 20 mm
 Depth : 20 mm
 Antenna Type : Internal
 Orientation : Touch
 Power Drift-Start : 1.372 W/kg
 Power Drift-Finish: 1.375 W/kg
 Power Drift (%) : 0.242
 Picture : C:\alsas\bitmap\Device-5.bmp

Phantom Data
 Name : APREL-Uni
 Type : Uni-Phantom
 Size (mm) : 280 x 280 x 200
 Serial No. : User Define
 Location : Center
 Description : U

Tissue Data
 Type : IEC
 Serial No. : 5800
 Frequency : 5800.00 MHz
 Last Calib. Date : 31-Jan-2007
 Temperature : 22.00 °C
 Ambient Temp. : 23.00 °C
 Humidity : 50.00 RH%
 Epsilon : 31.94 F/m
 Sigma : 5.72 S/m
 Density : 1000.00 kg/cu. m



Probe Data

Name : APREL
 Model : E-020
 Type : E-Field Triangle
 Serial No. : 225
 Last Calib. Date : 22-Jan-2007
 Frequency : 5800.00 MHz
 Duty Cycle Factor: 1
 Conversion Factor: 6.3
 Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point: 95.00 mV
 Offset : 1.56 mm


Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 22.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 31-Jan-2007
 Set-up Time : 3:18:59 PM
 Area Scan : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 9x9x17 : Measurement x=4mm, y=4mm, z=2mm

Other Data

DUT Position : Touch
 Separation : 0
 Channel : High



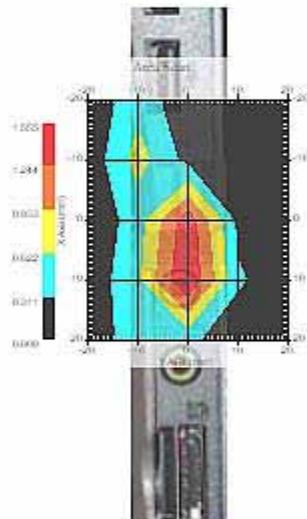

1 gram SAR value : 1.497 W/kg
 Zoom Scan Peak SAR : 4.713 W/kg



Exposure Assessment Measurement Uncertainty

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	$c_i^1 (1-g)$	$c_i^1 (10-g)$	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	•3	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	•3	•cp	•cp	4.4	4.4
Boundary Effect	1.0	rectangular	•3	1	1	0.6	0.6
Linearity	4.7	rectangular	•3	1	1	2.7	2.7
Detection Limit	1.0	rectangular	•3	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	•3	1	1	0.5	0.5
Integration Time	1.7	rectangular	•3	1	1	1.0	1.0
RF Ambient Condition	3.0	rectangular	•3	1	1	1.7	1.7
Probe Positioner Mech.	0.4	rectangular	•3	1	1	0.2	0.2
Restriction							
Probe Positioning with respect to Phantom Shell	2.9	rectangular	•3	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	•3	1	1	2.1	2.1
Test Sample Positioning	4.0	normal	1	1	1	4.0	4.0
Device Holder Uncertainty	2.0	normal	1	1	1	2.0	2.0
Drift of Output Power	0.2	rectangular	•3	1	1	0.1	0.1
Phantom and Setup							
Phantom Uncertainty(shape & thickness tolerance)	3.4	rectangular	•3	1	1	2.0	2.0
Liquid Conductivity(target)	5.0	rectangular	•3	0.7	0.5	2.0	1.4
Liquid Conductivity(meas.)	1.4	normal	1	0.7	0.5	0.0	0.0
Liquid Permittivity(target)	5.0	rectangular	•3	0.6	0.5	1.7	1.4
Liquid Permittivity(meas.)	1.4	normal	1	0.6	0.5	0.0	0.0
Combined Uncertainty		RSS				9.2	9.1
Combined Uncertainty (coverage factor=2)		Normal (k=2)				18.5	18.1



SAR-Z Axis

at Hotspot x:5.08 y:-2.97

