

## DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION

### Test Lab

**CELLTECH LABS INC.**  
Testing and Engineering Services  
1955 Moss Court  
Kelowna, B.C.  
Canada V1Y 9L3  
Phone: 250-448-7047  
Fax: 250-448-7046  
e-mail: info@celltechlabs.com  
web site: www.celltechlabs.com

### Applicant Information

**MOTION COMPUTING INC.**  
9433 Bee Caves Road  
Building 1, Suite 250  
Austin, Texas 78733

<b>Rule Part(s):</b>	<b>FCC 47 CFR §2.1093; IC RSS-102 Issue 1 (Provisional)</b>
<b>Test Procedure(s):</b>	<b>FCC OET Bulletin 65, Supplement C (Edition 01-01)</b>
<b>FCC Device Classification:</b>	<b>Digital Transmission System (DTS)</b>
<b>FCC IDENTIFER:</b>	<b>Q3QM1400T003</b>
<b>Model(s):</b>	<b>M1400 (T003)</b>
<b>Device Type:</b>	<b>Tablet PC with WLAN &amp; Bluetooth Transmitters</b>
<b>Modulation(s):</b>	<b>WLAN DSSS (Direct Sequence Spread Spectrum) Bluetooth ODFM (Orthogonal Frequency Division Multiplexing)</b>
<b>Tx Frequency Range(s):</b>	<b>2412 - 2462 MHz (WLAN) 2402 - 2480 MHz (Bluetooth)</b>
<b>RF Output Power Tested:</b>	<b>22.3 dBm - WLAN Peak Conducted - Primary Antenna (2437 MHz) 22.4 dBm - WLAN Peak Conducted - Auxiliary Antenna (2437 MHz) 4.0 dBm - Bluetooth Peak Conducted (2441 MHz)</b>
<b>Antenna Type(s) Tested:</b>	<b>Internal (Primary WLAN, Auxiliary WLAN, Bluetooth)</b>
<b>Battery Type(s) Tested:</b>	<b>Lithium-ion 11.1V (1800 mAh, 3600 mAh)</b>
<b>Max. SAR Measured:</b>	<b>0.312 W/kg (WLAN &amp; Bluetooth Simultaneous Transmit)</b>

Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6. The device was tested in accordance with the measurement standards and procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01), and Industry Canada RSS-102 Issue 1 (Provisional) for the General Population / Uncontrolled Exposure environment. All measurements were performed in accordance with the SAR system manufacturer recommendations.

I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.. The results and statements contained in this report pertain only to the device(s) evaluated.



**Russell Pipe**  
Senior Compliance Technologist  
Celltech Labs Inc.



<b>TABLE OF CONTENTS</b>		
<b>1.0</b>	<b>INTRODUCTION.....</b>	<b>3</b>
<b>2.0</b>	<b>DESCRIPTION OF DUT.....</b>	<b>3</b>
<b>3.0</b>	<b>SAR MEASUREMENT SYSTEM.....</b>	<b>4</b>
<b>4.0</b>	<b>MEASUREMENT SUMMARY.....</b>	<b>5</b>
<b>5.0</b>	<b>DETAILS OF SAR EVALUATION.....</b>	<b>6</b>
<b>6.0</b>	<b>EVALUATION PROCEDURES.....</b>	<b>6</b>
<b>7.0</b>	<b>SYSTEM PERFORMANCE CHECK.....</b>	<b>7</b>
<b>8.0</b>	<b>SIMULATED EQUIVALENT TISSUES.....</b>	<b>8</b>
<b>9.0</b>	<b>SAR SAFETY LIMITS.....</b>	<b>8</b>
<b>10.0</b>	<b>ROBOT SYSTEM SPECIFICATIONS.....</b>	<b>9</b>
<b>11.0</b>	<b>PROBE SPECIFICATION.....</b>	<b>10</b>
<b>12.0</b>	<b>SAM PHANTOM V4.0C.....</b>	<b>10</b>
<b>13.0</b>	<b>PLANAR PHANTOM.....</b>	<b>10</b>
<b>14.0</b>	<b>DEVICE HOLDER.....</b>	<b>10</b>
<b>15.0</b>	<b>TEST EQUIPMENT LIST.....</b>	<b>11</b>
<b>16.0</b>	<b>MEASUREMENT UNCERTAINTIES.....</b>	<b>12-13</b>
<b>17.0</b>	<b>REFERENCES.....</b>	<b>14</b>
	<b>APPENDIX A - SAR MEASUREMENT DATA.....</b>	<b>15</b>
	<b>APPENDIX B - SYSTEM PERFORMANCE CHECK DATA.....</b>	<b>16</b>
	<b>APPENDIX C - SYSTEM VALIDATION.....</b>	<b>17</b>
	<b>APPENDIX D - PROBE CALIBRATION.....</b>	<b>18</b>
	<b>APPENDIX E - MEASURED FLUID DIELECTRIC PARAMETERS.....</b>	<b>19</b>
	<b>APPENDIX F - SAM PHANTOM CERTIFICATE OF CONFORMITY.....</b>	<b>20</b>
	<b>APPENDIX G - PLANAR PHANTOM CERTIFICATE OF CONFORMITY.....</b>	<b>21</b>
	<b>APPENDIX H - SAR TEST SETUP &amp; DUT PHOTOGRAPHS.....</b>	<b>22</b>

## 1.0 INTRODUCTION

This measurement report demonstrates that the MOTION COMPUTING INC. Model: M1400 (T003) Tablet PC with co-located WLAN & Bluetooth Transmitters FCC ID: Q3QM1400T003 complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]), and Health Canada Safety Code 6 (see reference [2]) for the General Population / Uncontrolled Exposure environment. The test procedures described in FCC OET Bulletin 65, Supplement C (Edition 01-01) (see reference [3]) and IC RSS-102 Issue 1 (Provisional) (see reference [4]), were employed. A description of the product, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used, and the various provisions of the rules are included within this test report.

## 2.0 DESCRIPTION OF DEVICE UNDER TEST (DUT)

<b>FCC Rule Part(s)</b>	47 CFR §2.1093			
<b>IC Rule Part(s)</b>	IC RSS-102 Issue 1 (Provisional)			
<b>Test Procedure(s)</b>	FCC OET Bulletin 65, Supplement C (01-01)			
<b>FCC Device Classification</b>	Digital Transmission System (DTS)			
<b>Device Type</b>	Tablet PC with co-located WLAN & Bluetooth Transmitters			
<b>FCC ID</b>	Q3QM1400T003			
<b>Model(s)</b>	M1400 (T003)			
<b>Serial No.</b>	102520300013 (Identical Prototype)			
<b>Modulation(s)</b>	WLAN DSSS (Direct Sequence Spread Spectrum)			
	Bluetooth ODFM (Orthogonal Frequency Division Multiplexing)			
<b>Tx Frequency Range</b>	2412 - 2462 MHz (WLAN)			
	2402 - 2480 MHz (Bluetooth)			
<b>Max. RF Output Power Tested</b>	WLAN	22.3 dBm	Primary Antenna	Peak Conducted
		22.4 dBm	Auxiliary Antenna	
	Bluetooth	4.0 dBm		Peak Conducted
<b>Antenna Type(s) Tested</b>	Primary WLAN Internal	Auxiliary WLAN Internal	Bluetooth Internal	
<b>Battery Type(s) Tested</b>	Lithium-ion	11.1V, 3600mAh	P/N: BAT0016	
	Lithium-ion	11.1V, 1800mAh	P/N: BAT0013	

### 3.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.



**DASY4 SAR Measurement System with Planar phantom**



**DASY4 SAR Measurement System with SAM phantom**

## 4.0 MEASUREMENT SUMMARY

### BODY SAR MEASUREMENT RESULTS

Transmit Type	Test Mode	Freq. (MHz)	Chan.	Conducted Power Before (dBm)	Battery		Antenna Tested	DUT Test Position	Measured SAR 1g (W/kg)	SAR Drift dBm	Scaled SAR 1g (W/kg)
					Type	mAh					
WLAN	DSSS	2437	Mid	22.3	Li-ion	3600	WLAN Primary	Back Side	0.137	0.719	0.137
WLAN	DSSS	2437	Mid	22.4	Li-ion	3600	WLAN Auxiliary	Back Side	0.082	-0.368	0.089
WLAN	DSSS	2437	Mid	22.3	Li-ion	3600	WLAN Primary	Top Side	0.172	-0.466	0.191
WLAN	DSSS	2437	Mid	22.4	Li-ion	3600	WLAN Auxiliary	Right Side	0.092	-0.246	0.097
WLAN	DSSS	2437	Mid	22.3	Li-ion	3600	WLAN Primary	Top Side	0.219	-0.419	0.241
Bluetooth	OFDM	2441	Mid	4.0	Li-ion	3600	Bluetooth				
WLAN	DSSS	2437	Mid	22.3	Li-ion	1800	WLAN Primary	Top Side	0.254	-0.896	0.312
Bluetooth	OFDM	2441	Mid	4.0	Li-ion	1800	Bluetooth				

**ANSI / IEEE C95.1 1992 - SAFETY LIMIT**  
**BODY: 1.6 W/kg (averaged over 1 gram)**  
**Spatial Peak - Uncontrolled Exposure / General Population**

<b>Test Date(s)</b>	03/03/04		<b>Relative Humidity</b>	30 %
<b>Measured Fluid Type</b>	2450MHz Body		<b>Atmospheric Pressure</b>	102.3 kPa
<b>Dielectric Constant</b> $\epsilon_r$	<b>IEEE Target</b>	<b>Measured</b>	<b>Ambient Temperature</b>	24.1 °C
	52.7 ±5%	50.4	<b>Fluid Temperature</b>	23.4 °C
<b>Conductivity</b> $\sigma$ (mho/m)	<b>IEEE Target</b>	<b>Measured</b>	<b>Fluid Depth</b>	≥ 15 cm
	1.95 ±5%	2.04	<b><math>\rho</math> (Kg/m<sup>3</sup>)</b>	1000

Note(s):

- The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
- If the SAR measurements performed at the mid channel of the frequency band were  $\geq 3$ dB below the SAR limit; SAR evaluation for the low and high channels was optional (per FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3])).
- Co-located simultaneous transmit tests were performed with both WLAN & Bluetooth transmitters for the worst-case single transmit WLAN configuration (Top Side of DUT with WLAN Primary Antenna).
- The DUT was evaluated for SAR with 11.1V 3600mAh Li-ion battery pack (P/N: BAT0016). An additional evaluation was performed for the highest SAR level configuration (Top Side of DUT with WLAN Primary Antenna & Bluetooth simultaneous transmit) with the 11.1V 1800mAh Li-ion battery pack (P/N: BAT0013).
- The power drifts measured by the DASY system for the duration of the SAR evaluations were  $>5\%$ . The drifts were subsequently added to the measured SAR levels to report scaled SAR results as shown in the above table.
- A SAR versus time power drift evaluation was performed for the duration of the area scan measurement in the test configuration that reported the highest SAR level (Top Side of DUT with WLAN Primary Antenna & Bluetooth simultaneous transmit). See Appendix A (SAR Test Plots) for SAR versus Time drift evaluation plot.
- The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluation. The temperatures listed in the table above were consistent for all measurement periods.
- The dielectric properties of the simulated body fluid were measured prior to the evaluation using an 85070C Dielectric Probe Kit and an 8753E Network Analyzer (see attached printout of measured fluid dielectric parameters).

## 5.0 DETAILS OF SAR EVALUATION

The MOTION COMPUTING INC. Model: M1400 (T003) Tablet PC with co-located WLAN & Bluetooth Transmitters FCC ID: Q3QM1400T003 was found to be compliant for localized Specific Absorption Rate (Uncontrolled Exposure) based on the test provisions and conditions described below. The detailed test setup photographs are shown in Appendix H.

1. The DUT was tested for body SAR with back of the device placed parallel to, and touching, the outer surface of the planar phantom. Both primary and auxiliary WLAN antennas were evaluated.
2. The DUT was tested for body SAR with the top side of the device (primary WLAN antenna and Bluetooth antenna locations) placed parallel to, and touching, the outer surface of the planar phantom.
3. The DUT was tested for body SAR with the right side of the device (auxiliary WLAN antenna location) placed parallel to, and touching, the outer surface of the planar phantom. .
4. Co-located simultaneous transmit tests were performed with both WLAN & Bluetooth transmitters for the worst-case single transmit WLAN configuration (Top Side of DUT with WLAN Primary Antenna).
5. The DUT was tested with a fully charged battery for each test. The DUT was evaluated for SAR with 11.1V 3600mAh Li-ion battery pack (P/N: BAT0016). An additional evaluation was performed for the highest SAR level configuration (Top Side of DUT with WLAN Primary Antenna & Bluetooth simultaneous transmit) with the 11.1V 1800mAh Li-ion battery pack (P/N: BAT0013).
6. The peak conducted power levels were measured before the evaluation using a Gigatronics 8652A Universal Power Meter according to the procedures described in FCC 47 CFR §2.1046.
7. The power drifts measured by the DASY system during the SAR evaluations were > 5%. The drifts were subsequently added to the measured SAR levels to report scaled SAR results as shown in the test data table (page 5). A SAR versus Time drift evaluation was performed for the duration of the area scan measurement in the test configuration that reported the highest SAR level. See Appendix A (SAR Test Plots) for SAR versus Time drift evaluation plot.
8. The DUT was placed in test mode via test software from a second Tablet PC. The DUT was tested at maximum power in modulated DSSS continuous transmit mode.
9. Due to the dimensions of the DUT, a stack of low-density, low-loss dielectric foamed polystyrene was used in place of the device holder.

## 6.0 EVALUATION PROCEDURES

- a. (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.  
(ii) For body-worn and face-held devices a planar phantom was used.
- b. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.

An area scan was determined as follows:

- c. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- d. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.

A 1g and 10g spatial peak SAR was determined as follows:

- e. Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix D). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- f. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- g. A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

## 7.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluation a system check was performed in the planar section of the SAM phantom with a 2450MHz dipole (see Appendix C for system validation procedures). The dielectric parameters of the simulated brain tissue were measured prior to the system performance check using an 85070C Dielectric Probe Kit and an 8753E Network Analyzer (see Appendix E for printout of measured fluid dielectric parameters). A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of  $\pm 10\%$  (see Appendix B for system performance check test plot).

SYSTEM PERFORMANCE CHECK													
Test Date	2450MHz Equiv. Tissue	SAR 1g (W/kg)		Dielectric Constant $\epsilon_r$		Conductivity $\sigma$ (mho/m)		$\rho$ (Kg/m <sup>3</sup> )	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		IEEE Target	Measured	IEEE Target	Measured	IEEE Target	Measured						
03/03/04	Brain	13.1 $\pm 10\%$	12.9 (-1.5%)	39.2 $\pm 5\%$	37.3	1.80 $\pm 5\%$	1.86	1000	24.5	23.9	$\geq 15$	30	101.4

**Note(s):**

1. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the system performance check. The temperatures listed in the table above were consistent for all measurement periods.

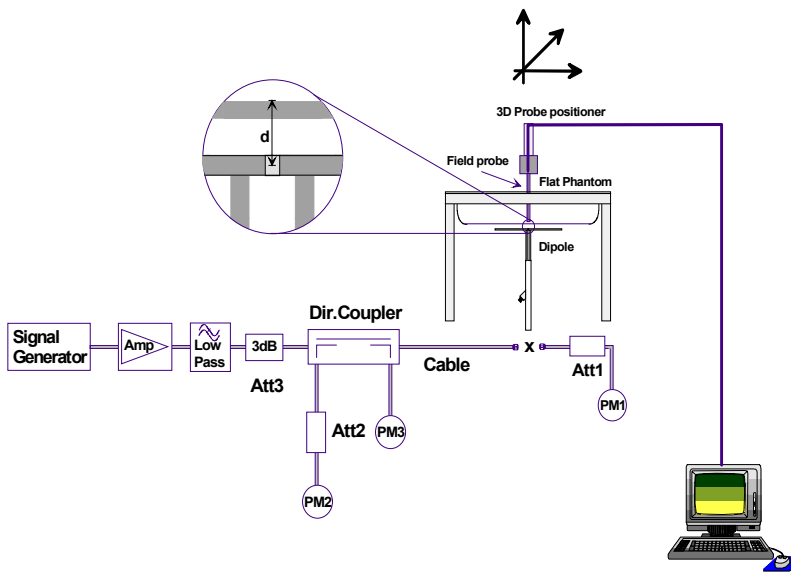


Figure 1. System Performance Check Setup Diagram



2450MHz Dipole Setup

## 8.0 SIMULATED EQUIVALENT TISSUES

The 2450MHz brain and body simulated tissue mixtures consist of Glycol-monobutyl, water, and salt (body mixture only). The fluid was prepared according to standardized procedures and measured for dielectric parameters (permittivity and conductivity).

SIMULATED TISSUE MIXTURES		
INGREDIENT	2450MHz Brain (System Check)	2450MHz Body (DUT Evaluation)
Water	52.00 %	69.98 %
Glycol Monobutyl	48.00 %	30.00 %
Salt	-	0.02 %

## 9.0 SAR SAFETY LIMITS

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.



## 10.0 ROBOT SYSTEM SPECIFICATIONS

### Specifications

**POSITIONER:** Stäubli Unimation Corp. Robot Model: RX60L  
**Repeatability:** 0.02 mm  
**No. of axis:** 6

### Data Acquisition Electronic (DAE) System

#### Cell Controller

**Processor:** AMD Athlon XP 2400+  
**Clock Speed:** 2.0 GHz  
**Operating System:** Windows XP Professional

#### Data Converter

**Features:** Signal Amplifier, multiplexer, A/D converter, and control logic  
**Software:** DASY4 software  
**Connecting Lines:** Optical downlink for data and status info.  
 Optical uplink for commands and clock

### DASY4 Measurement Server

**Function:** Real-time data evaluation for field measurements and surface detection  
**Hardware:** PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM  
**Connections:** COM1, COM2, DAE, Robot, Ethernet, Service Interface

### E-Field Probe

**Model:** ET3DV6  
**Serial No.:** 1590  
**Construction:** Triangular core fiber optic detection system  
**Frequency:** 10 MHz to 6 GHz  
**Linearity:**  $\pm 0.2$  dB (30 MHz to 3 GHz)

### Phantom(s)

#### Evaluation Phantom

**Type:** Planar Phantom  
**Shell Material:** Fiberglass  
**Thickness:** 2.0  $\pm$  0.1 mm  
**Volume:** Approx. 72 liters

#### Validation Phantom

**Type:** SAM V4.0C  
**Shell Material:** Fiberglass  
**Thickness:** 2.0  $\pm$  0.1 mm  
**Volume:** Approx. 20 liters

## 11.0 PROBE SPECIFICATION (ET3DV6)

Construction:	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g. glycol)
Calibration:	In air from 10 MHz to 2.5 GHz In brain simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$ )
Frequency:	10 MHz to <6 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 3 GHz)
Directivity:	$\pm 0.2$ dB in brain tissue (rotation around probe axis) $\pm 0.4$ dB in brain tissue (rotation normal to probe axis)
Dynamic Range:	5 $\mu$ W/g to <100 mW/g; Linearity: $\pm 0.2$ dB
Surface. Detection:	$\pm 0.2$ mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions:	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
Application:	General dosimetry up to 3 GHz Compliance tests of mobile phone



ET3DV6 E-Field Probe

## 12.0 SAM PHANTOM V4.0C

The SAM phantom V4.0C is a fiberglass shell phantom with a 2.0 mm (+/-0.2 mm) shell thickness for left and right head and flat planar area integrated in a wooden table. The shape of the fiberglass shell corresponds to the phantom defined by SCC34-SC2. The device holder positions are adjusted to the standard measurement positions in the three sections (see Appendix F for specifications of the SAM phantom V4.0C).



SAM Phantom

## 13.0 PLANAR PHANTOM

The planar phantom is a fiberglass shell phantom with a 2.0 mm (+/-0.2mm) thick device measurement area at the center of the phantom for SAR evaluations of devices with a larger surface area than the planar section of the SAM phantom. The planar phantom is integrated in a wooden table (see Appendix G for dimensions and specifications of the planar phantom).



Planar Phantom

## 14.0 DEVICE HOLDER

The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.



Device Holder

## 15.0 TEST EQUIPMENT LIST

TEST EQUIPMENT	SERIAL NO.	CALIBRATION DATE
Schmid & Partner DASY4 System	-	-
DASY4 Measurement Server	1078	N/A
-Robot	599396-01	N/A
-ET3DV6 E-Field Probe	1590	May 2003
-300MHz Validation Dipole	135	Oct 2003
-450MHz Validation Dipole	136	Nov 2003
-900MHz Validation Dipole	054	June 2003
-1800MHz Validation Dipole	247	June 2003
-2450MHz Validation Dipole	150	Sept 2003
-SAM Phantom V4.0C	1033	N/A
-Barski Planar Phantom	03-01	N/A
HP 85070C Dielectric Probe Kit	N/A	N/A
Gigatronics 8651A Power Meter	8650137	April 2003
Gigatronics 8652A Power Meter	1835267	April 2003
Power Sensor 80701A	1833542	April 2003
Power Sensor 80701A	1834350	April 2003
HP E4408B Spectrum Analyzer	US39240170	Dec 2003
HP 8594E Spectrum Analyzer	3543A02721	April 2003
HP 8753E Network Analyzer	US38433013	May 2003
HP 8648D Signal Generator	3847A00611	May 2003
Amplifier Research 5S1G4 Power Amplifier	26235	N/A

## 16.0 MEASUREMENT UNCERTAINTIES

UNCERTAINTY BUDGET FOR DEVICE EVALUATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	C <sub>i</sub> 1g	Standard Uncertainty ±% (1g)	v <sub>i</sub> or v <sub>eff</sub>
<b>Measurement System</b>						
Probe calibration	± 4.5	Normal	1	1	± 4.5	∞
Axial isotropy of the probe	± 4.7	Rectangular	√3	(1-c <sub>p</sub> )	± 1.9	∞
Spherical isotropy of the probe	± 9.6	Rectangular	√3	(c <sub>p</sub> )	± 3.9	∞
Spatial resolution	± 0.0	Rectangular	√3	1	± 0.0	∞
Boundary effects	± 5.5	Rectangular	√3	1	± 3.2	∞
Probe linearity	± 4.7	Rectangular	√3	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	√3	1	± 0.6	∞
Readout electronics	± 1.0	Normal	1	1	± 1.0	∞
Response time	± 0.8	Rectangular	√3	1	± 0.5	∞
Integration time	± 1.4	Rectangular	√3	1	± 0.8	∞
RF ambient conditions	± 3.0	Rectangular	√3	1	± 1.7	∞
Mech. constraints of robot	± 0.4	Rectangular	√3	1	± 0.2	∞
Probe positioning	± 2.9	Rectangular	√3	1	± 1.7	∞
Extrapolation & integration	± 3.9	Rectangular	√3	1	± 2.3	∞
<b>Test Sample Related</b>						
Device positioning	± 6.0	Normal	√3	1	± 6.7	12
Device holder uncertainty	± 5.0	Normal	√3	1	± 5.9	8
Power drift	± 5.0	Rectangular	√3		± 2.9	∞
<b>Phantom and Setup</b>						
Phantom uncertainty	± 4.0	Rectangular	√3	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid conductivity (measured)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid permittivity (target)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid permittivity (measured)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
<b>Combined Standard Uncertainty</b>					<b>± 13.2</b>	
<b>Expanded Uncertainty (k=2)</b>					<b>± 26.4</b>	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

## MEASUREMENT UNCERTAINTIES (Cont.)

UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	C <sub>i</sub> 1g	Standard Uncertainty ±% (1g)	v <sub>i</sub> or v <sub>eff</sub>
<b>Measurement System</b>						
Probe calibration	± 4.5	Normal	1	1	± 4.5	∞
Axial isotropy of the probe	± 4.7	Rectangular	√3	(1-c <sub>p</sub> )	± 1.9	∞
Spherical isotropy of the probe	± 9.6	Rectangular	√3	(c <sub>p</sub> )	± 3.9	∞
Spatial resolution	± 0.0	Rectangular	√3	1	± 0.0	∞
Boundary effects	± 5.5	Rectangular	√3	1	± 3.2	∞
Probe linearity	± 4.7	Rectangular	√3	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	√3	1	± 0.6	∞
Readout electronics	± 1.0	Normal	1	1	± 1.0	∞
Response time	± 0.8	Rectangular	√3	1	± 0.5	∞
Integration time	± 1.4	Rectangular	√3	1	± 0.8	∞
RF ambient conditions	± 3.0	Rectangular	√3	1	± 1.7	∞
Mech. constraints of robot	± 0.4	Rectangular	√3	1	± 0.2	∞
Probe positioning	± 2.9	Rectangular	√3	1	± 1.7	∞
Extrapolation & integration	± 3.9	Rectangular	√3	1	± 2.3	∞
<b>Dipole</b>						
Dipole Axis to Liquid Distance	± 2.0	Rectangular	√3	1	± 1.2	∞
Input Power	± 4.7	Rectangular	√3	1	± 2.7	∞
<b>Phantom and Setup</b>						
Phantom uncertainty	± 4.0	Rectangular	√3	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid conductivity (measured)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid permittivity (target)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid permittivity (measured)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
<b>Combined Standard Uncertainty</b>					<b>± 9.8</b>	
<b>Expanded Uncertainty (k=2)</b>					<b>± 19.6</b>	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

Test Report S/N:	021204-475Q3Q
Test Date(s):	March 03, 2004
Test Type:	FCC/IC SAR Evaluation

## 17.0 REFERENCES

- [1] Federal Communications Commission, "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093: 1999.
- [2] Health Canada, "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6.
- [3] Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada, "Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields", Radio Standards Specification RSS-102 Issue 1 (Provisional): September 1999.
- [5] IEEE Standard 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

Test Report S/N:	021204-475Q3Q
Test Date(s):	March 03, 2004
Test Type:	FCC/IC SAR Evaluation

## APPENDIX A - SAR MEASUREMENT DATA

## Body-Worn SAR - Back Side of DUT - Primary WLAN Antenna - Single Transmit

Date Tested: 03/03/04

DUT: Motion Computing Model: M1400 (T003); Type: Tablet PC with WLAN & Bluetooth; Serial: 102520300013

Ambient Temp: 24.1 °C; Fluid Temp: 23.4 °C; Barometric Pressure: 102.3 kPa; Humidity: 30%

Communication System: DSSS WLAN

Frequency: 2437 MHz; Duty Cycle: 1:1

RF Output Power: 22.3 dBm (Peak Conducted)

**Li-ion 11.1V, 3600mAh Battery Pack (P/N: BAT0016)**

Medium: M2450 ( $\sigma = 2.04$  mho/m;  $\epsilon_r = 50.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>)

- Probe: ET3DV6 - SN1590; ConvF(4.4, 4.4, 4.4); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Fiberglass Planar; Type: Barski Industries; Serial: 03-01
- Measurement SW: DASY4, V4.2 Build 12; Postprocessing SW: SEMCAD, V1.8 Build 94

### Body-Worn - Back Side of DUT - 0.0 cm Separation Distance - Mid Ch/Area Scan (19x24x1):

Measurement grid: dx=15mm, dy=15mm

### Body-Worn - Back Side of DUT - 0.0 cm Separation Distance - Mid Ch/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.298 W/kg

**SAR(1 g) = 0.137 mW/g; SAR(10 g) = 0.066 mW/g**

Reference Value = 0.731 V/m

Power Drift = 0.719 dB

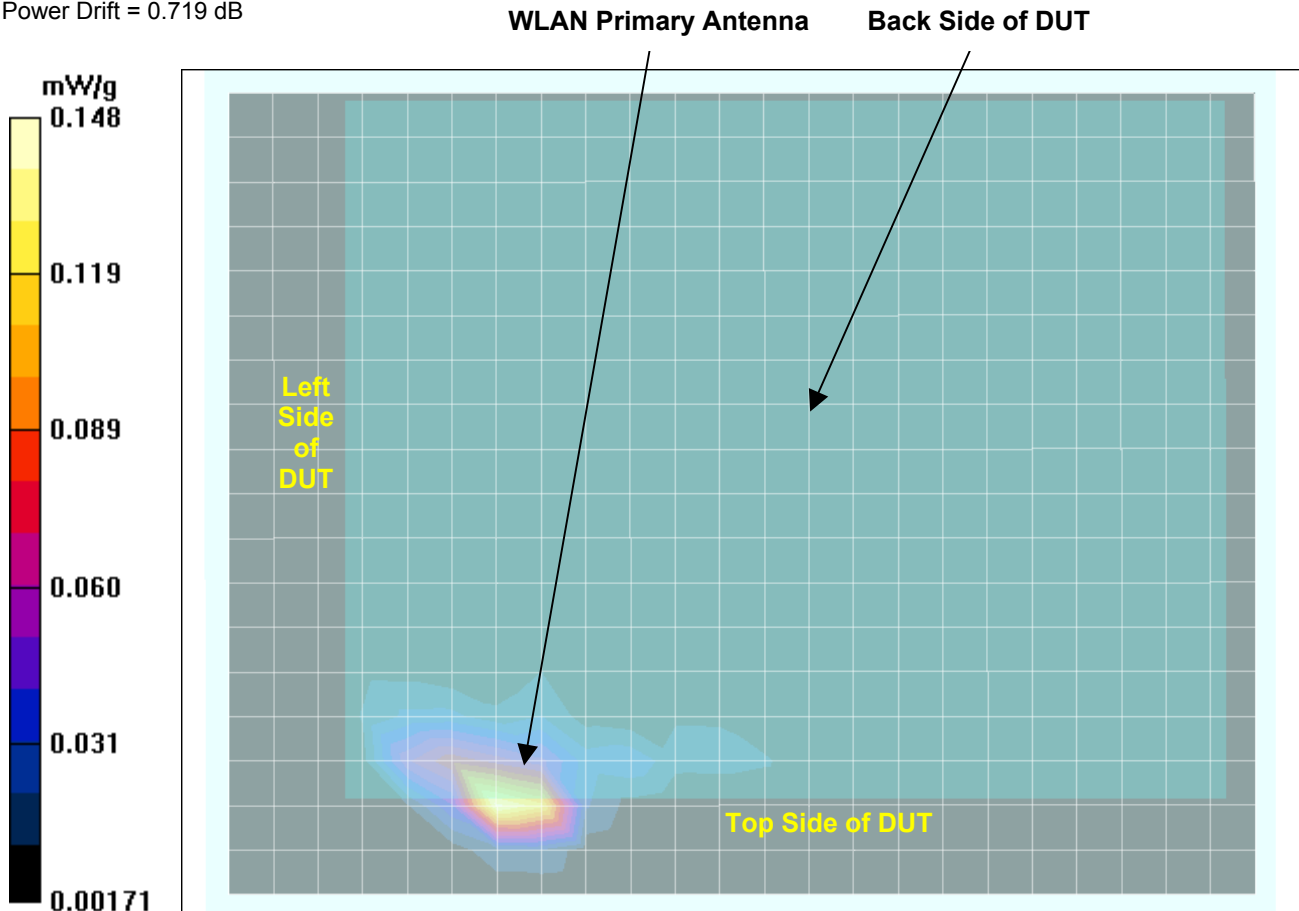



## Body-Worn SAR - Back Side of DUT - Auxiliary WLAN Antenna - Single Transmit

Date Tested: 03/03/04

DUT: Motion Computing Model: M1400 (T003); Type: Tablet PC with WLAN & Bluetooth; Serial: 102520300013

Ambient Temp: 24.1 °C; Fluid Temp: 23.4 °C; Barometric Pressure: 102.3 kPa; Humidity: 30%

Communication System: DSSS WLAN

Frequency: 2437 MHz; Duty Cycle: 1:1

RF Output Power: 22.4 dBm (Peak Conducted)

**Li-ion 11.1V, 3600mAh Battery Pack (P/N: BAT0016)**

Medium: M2450 ( $\sigma = 2.04$  mho/m;  $\epsilon_r = 50.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>)

- Probe: ET3DV6 - SN1590; ConvF(4.4, 4.4, 4.4); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Fiberglass Planar; Type: Barski Industries; Serial: 03-01
- Measurement SW: DASY4, V4.2 Build 12; Postprocessing SW: SEMCAD, V1.8 Build 94

### Body-Worn - Back Side of DUT - 0.0 cm Separation Distance - Mid Ch/Area Scan (19x24x1):

Measurement grid: dx=15mm, dy=15mm

### Body-Worn - Back Side of DUT - 0.0 cm Separation Distance - Mid Ch/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.287 W/kg

**SAR(1 g) = 0.082 mW/g; SAR(10 g) = 0.029 mW/g**

Reference Value = 3.27 V/m

Power Drift = -0.368 dB

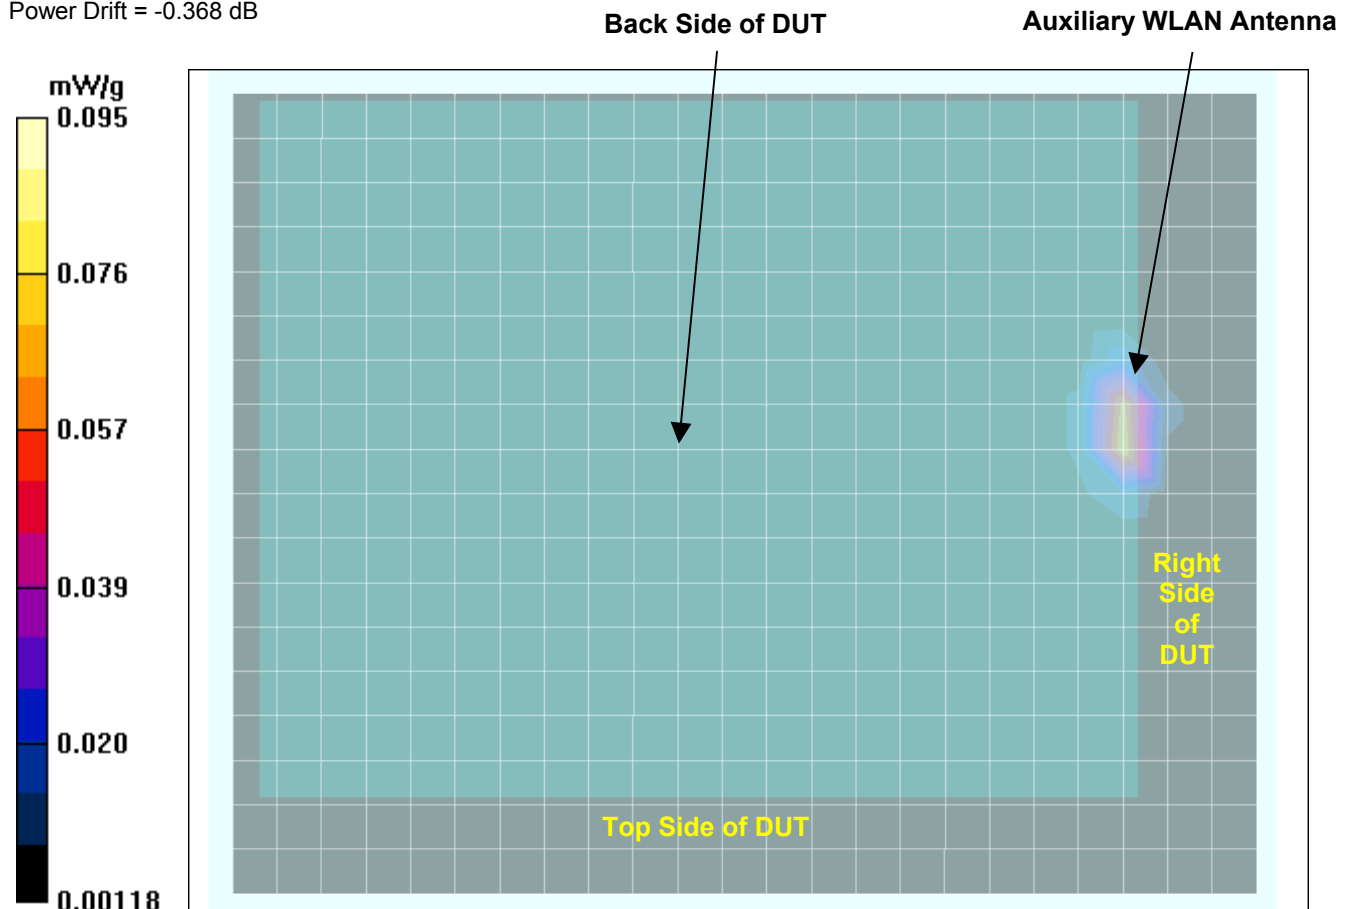

## Body-Worn SAR - Top Side of DUT - Primary WLAN Antenna - Single Transmit

Date Tested: 03/03/04

DUT: Motion Computing Model: M1400 (T003); Type: Tablet PC with WLAN & Bluetooth; Serial: 102520300013

Ambient Temp: 24.1 °C; Fluid Temp: 23.4 °C; Barometric Pressure: 102.3 kPa; Humidity: 30%

Communication System: DSSS WLAN

Frequency: 2437 MHz; Duty Cycle: 1:1

RF Output Power: 22.3 dBm (Peak Conducted)

**Li-ion 11.1V, 3600mAh Battery Pack (P/N: BAT0016)**

Medium: M2450 ( $\sigma = 2.04$  mho/m;  $\epsilon_r = 50.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>)

- Probe: ET3DV6 - SN1590; ConvF(4.4, 4.4, 4.4); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Fiberglass Planar; Type: Barski Industries; Serial: 03-01
- Measurement SW: DASY4, V4.2 Build 12; Postprocessing SW: SEMCAD, V1.8 Build 94

### Body-Worn - Top Side of DUT - 0.0 cm Separation Distance - Mid Ch/Area Scan (6x23x1):

Measurement grid: dx=15mm, dy=15mm

### Body-Worn - Top Side of DUT - 0.0 cm Separation Distance - Mid Ch/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.562 W/kg

**SAR(1 g) = 0.172 mW/g; SAR(10 g) = 0.067 mW/g**

Reference Value = 2.66 V/m

Power Drift = -0.466 dB

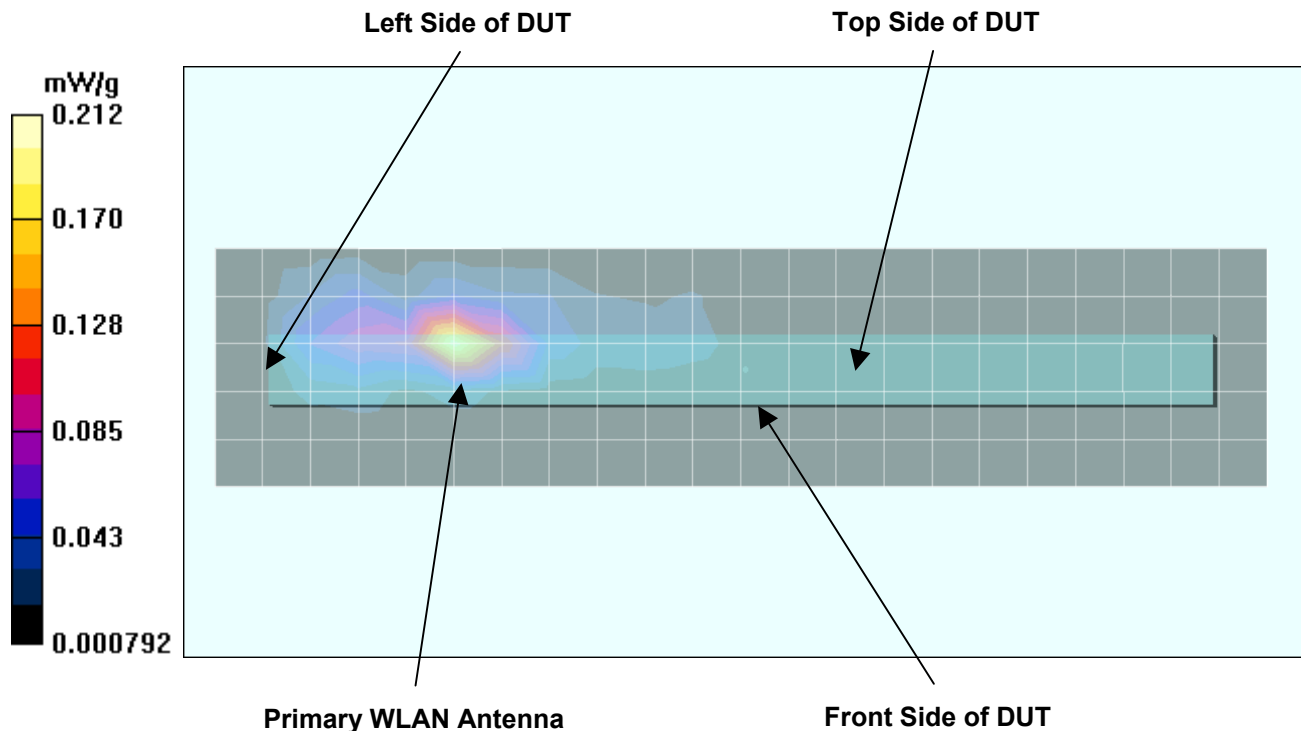

## Body-Worn SAR - Right Side of DUT - Auxiliary WLAN Antenna - Single Transmit

Date Tested: 03/03/04

DUT: Motion Computing Model: M1400 (T003); Type: Tablet PC with WLAN & Bluetooth; Serial: 102520300013

Ambient Temp: 24.1 °C; Fluid Temp: 23.4 °C; Barometric Pressure: 102.3 kPa; Humidity: 30%

Communication System: DSSS WLAN

Frequency: 2437 MHz; Duty Cycle: 1:1

RF Output Power: 22.4 dBm (Peak Conducted)

**Li-ion 11.1V, 3600mAh Battery Pack (P/N: BAT0016)**

Medium: M2450 ( $\sigma = 2.04$  mho/m;  $\epsilon_r = 50.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>)

- Probe: ET3DV6 - SN1590; ConvF(4.4, 4.4, 4.4); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Fiberglass Planar; Type: Barski Industries; Serial: 03-01
- Measurement SW: DASY4, V4.2 Build 12; Postprocessing SW: SEMCAD, V1.8 Build 94

### Body-Worn - Right Side of DUT - 0.0 cm Separation Distance - Mid Ch/Area Scan (6x19x1):

Measurement grid: dx=15mm, dy=15mm

### Body-Worn - Right Side of DUT - 0.0 cm Separation Distance - Mid Ch/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.315 W/kg

**SAR(1 g) = 0.092 mW/g; SAR(10 g) = 0.032 mW/g**

Reference Value = 3.24 V/m

Power Drift = -0.246 dB

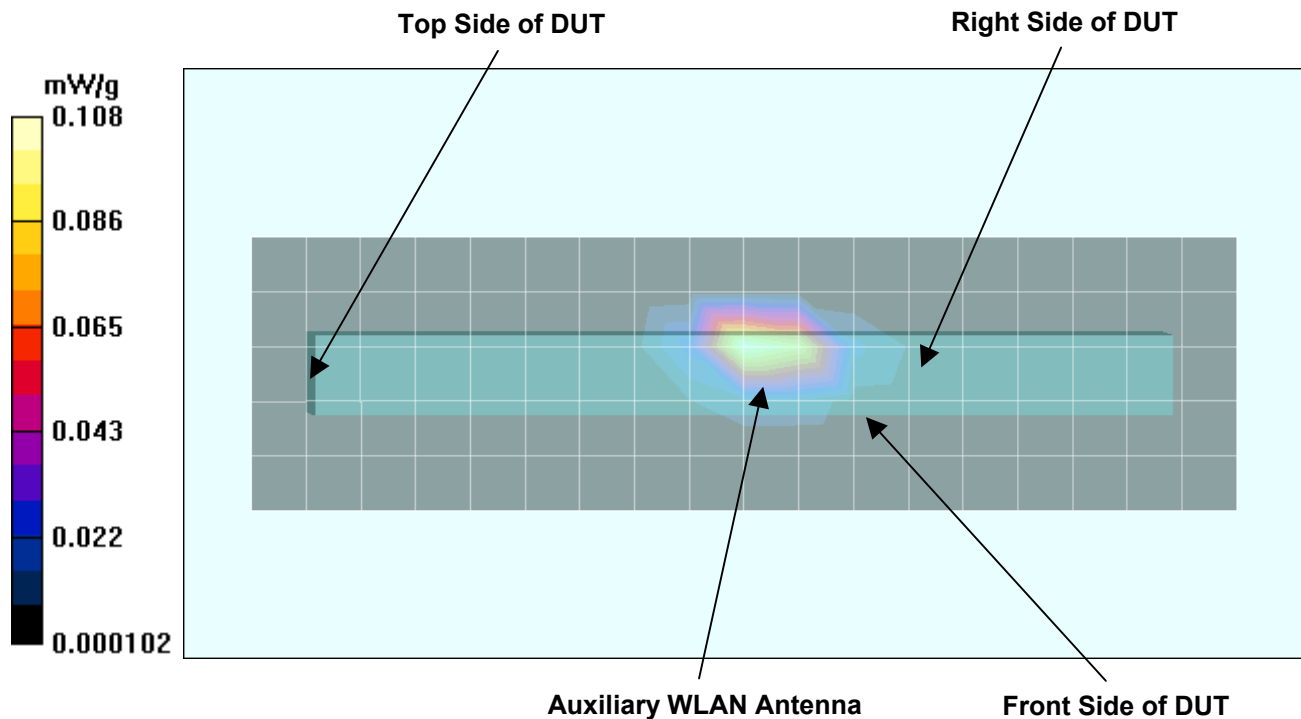

## Body-Worn SAR - Top Side of DUT - Primary WLAN Antenna - Simultaneous Transmit

Date Tested: 03/03/04

DUT: Motion Computing Model: M1400 (T003); Type: Tablet PC with WLAN & Bluetooth; Serial: 102520300013

Ambient Temp: 24.1 °C; Fluid Temp: 23.4 °C; Barometric Pressure: 102.3 kPa; Humidity: 30%

Communication System: DSSS WLAN / OFDM Bluetooth  
 Frequency: 2437 MHz WLAN / 2441 MHz Bluetooth; Duty Cycle: 1:1  
 RF Output Power: 22.3 dBm WLAN (Peak Conducted)  
 RF Output Power: 4.0 dBm Bluetooth (Peak Conducted)  
**Li-ion 11.1V, 3600mAh Battery Pack (P/N: BAT0016)**  
 Medium: M2450 ( $\sigma = 2.04 \text{ mho/m}$ ;  $\epsilon_r = 50.4$ ;  $\rho = 1000 \text{ kg/m}^3$ )


- Probe: ET3DV6 - SN1590; ConvF(4.4, 4.4, 4.4); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Fiberglass Planar; Type: Barski Industries; Serial: 03-01
- Measurement SW: DASy4, V4.2 Build 12; Postprocessing SW: SEMCAD, V1.8 Build 94

### Body-Worn - Top Side of DUT - 0.0 cm Separation Distance - Mid Ch/Area Scan (6x23x1):

Measurement grid: dx=15mm, dy=15mm

### Body-Worn - Top Side of DUT - 0.0 cm Separation Distance - Mid Ch/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Peak SAR (extrapolated) = 0.721 W/kg  
**SAR(1 g) = 0.219 mW/g; SAR(10 g) = 0.083 mW/g**  
 Reference Value = 3 V/m  
 Power Drift = -0.419 dB

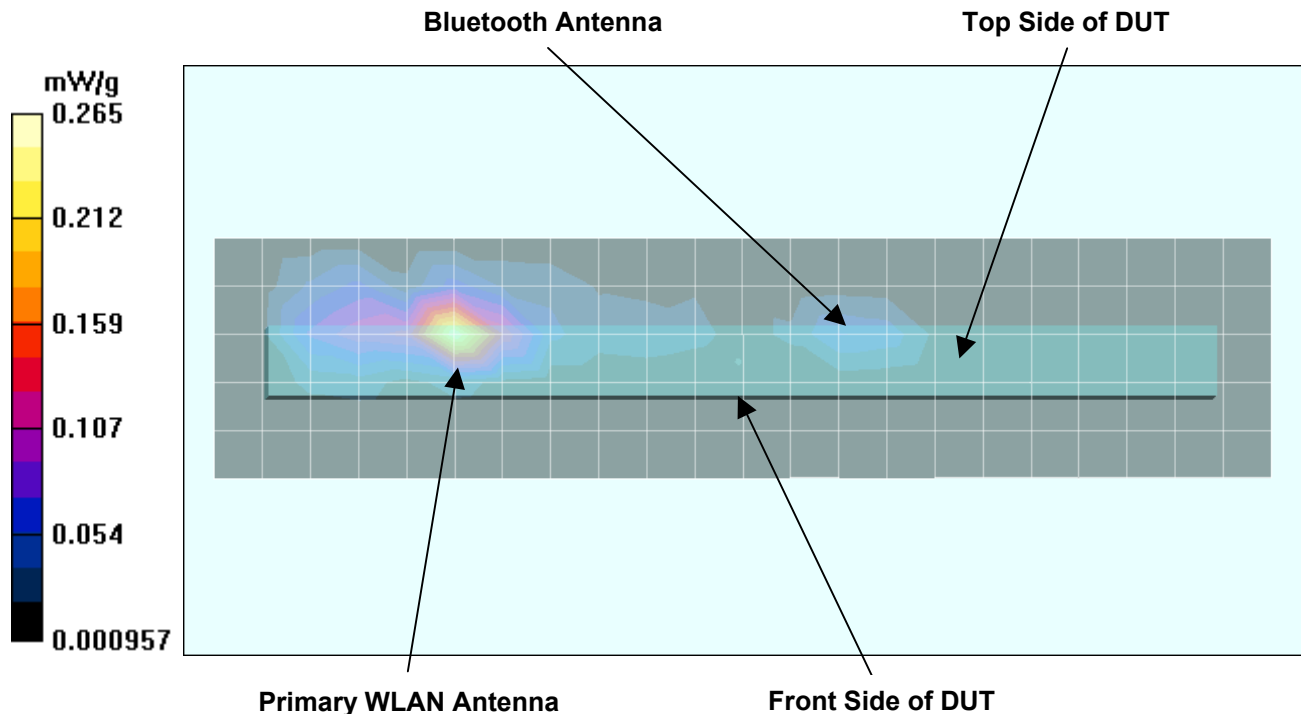

## Body-Worn SAR - Top Side of DUT - Primary WLAN Antenna - Simultaneous Transmit

Date Tested: 03/03/04

DUT: Motion Computing Model: M1400 (T003); Type: Tablet PC with WLAN & Bluetooth; Serial: 102520300013

Ambient Temp: 24.1 °C; Fluid Temp: 23.4 °C; Barometric Pressure: 102.3 kPa; Humidity: 30%

Communication System: DSSS WLAN / OFDM Bluetooth  
 Frequency: 2437 MHz WLAN / 2441 MHz Bluetooth; Duty Cycle: 1:1  
 RF Output Power: 22.3 dBm WLAN (Peak Conducted)  
 RF Output Power: 4.0 dBm Bluetooth (Peak Conducted)  
**Li-ion 11.1V, 1800mAh Battery Pack (P/N: BAT0013)**  
 Medium: M2450 ( $\sigma = 2.04$  mho/m;  $\epsilon_r = 50.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>)


- Probe: ET3DV6 - SN1590; ConvF(4.4, 4.4, 4.4); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Fiberglass Planar; Type: Barski Industries; Serial: 03-01
- Measurement SW: DASY4, V4.2 Build 12; Postprocessing SW: SEMCAD, V1.8 Build 94

### Body-Worn - Top Side of DUT - 0.0 cm Separation Distance - Mid Ch/Area Scan (6x23x1):


Measurement grid: dx=15mm, dy=15mm

### Body-Worn - Top Side of DUT - 0.0 cm Separation Distance - Mid Ch/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Peak SAR (extrapolated) = 0.821 W/kg  
**SAR(1 g) = 0.254 mW/g; SAR(10 g) = 0.098 mW/g**  
 Reference Value = 3.51 V/m  
 Power Drift = -0.896 dB

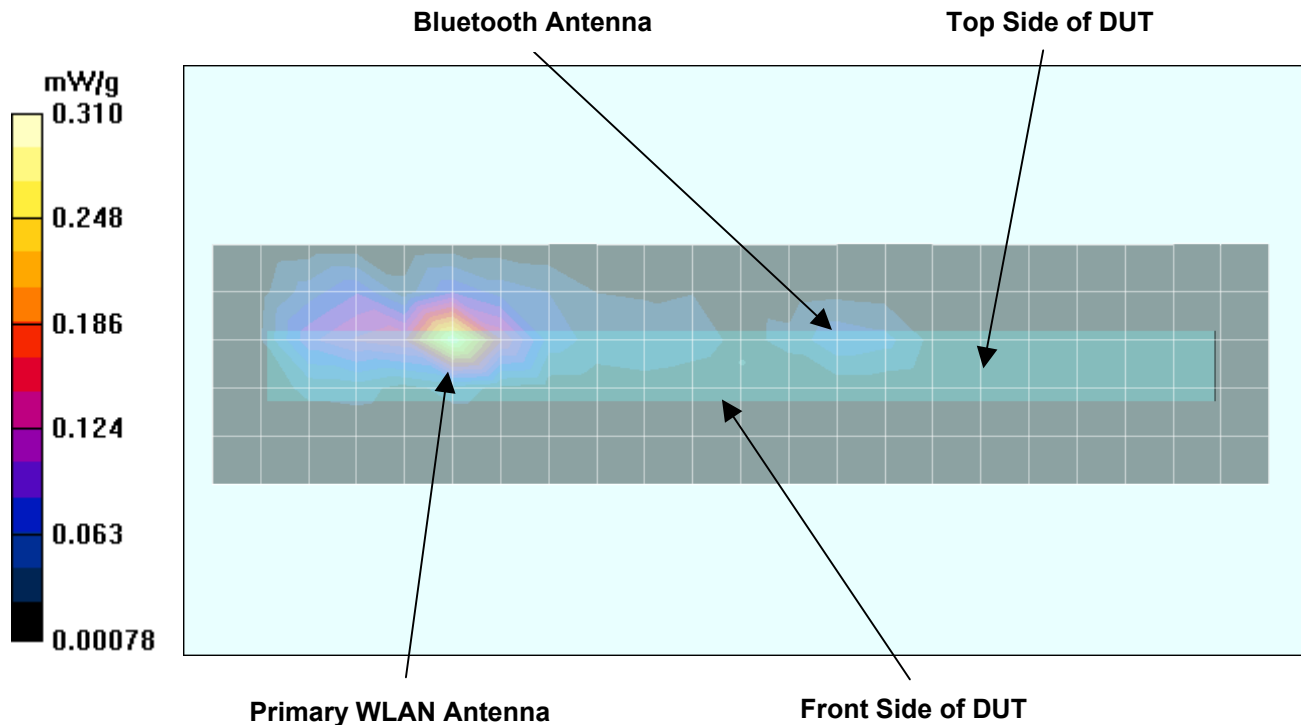

### Z-Axis Scan

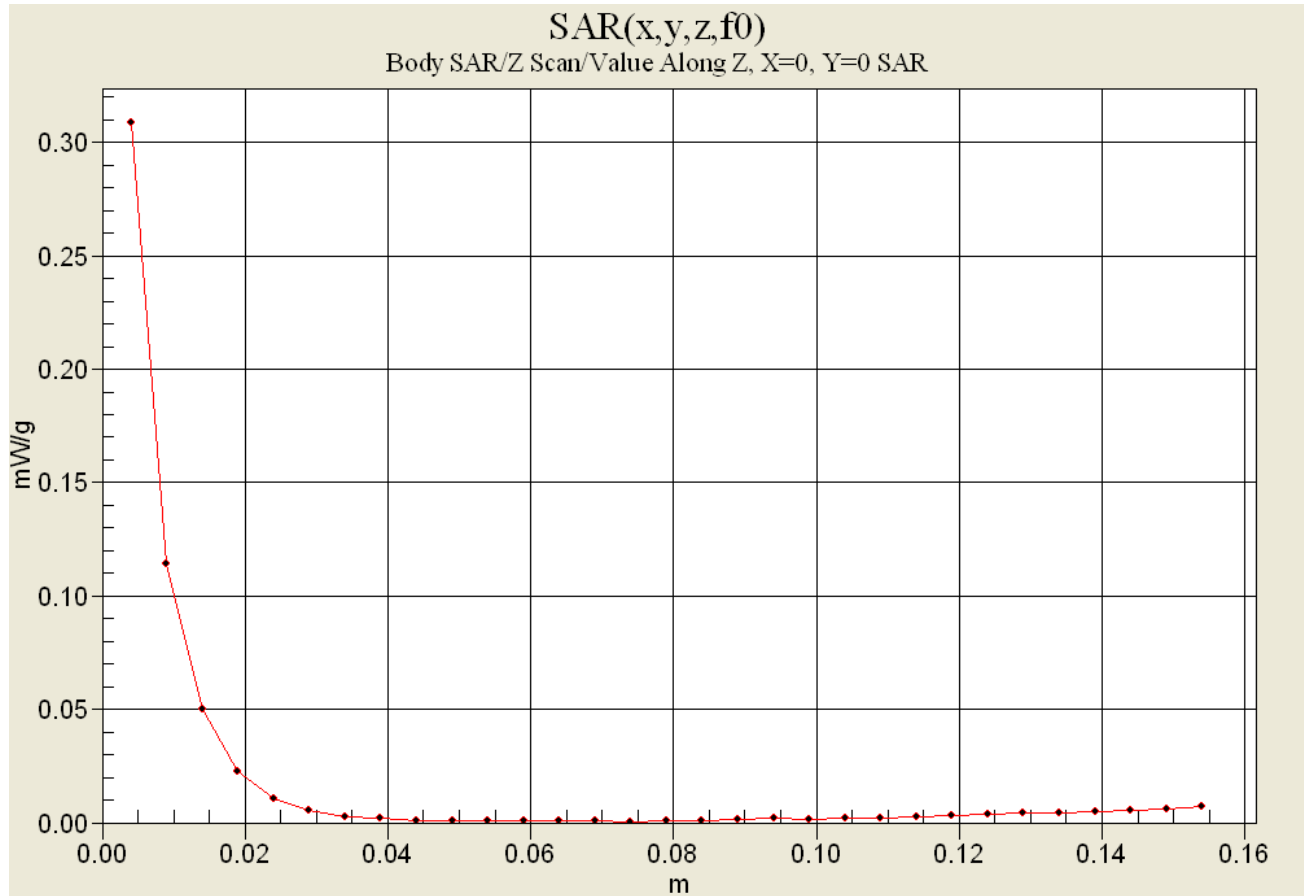

**SAR versus Time - 40 Minutes - 11.1V 1800mAh Li-ion Battery Pack**

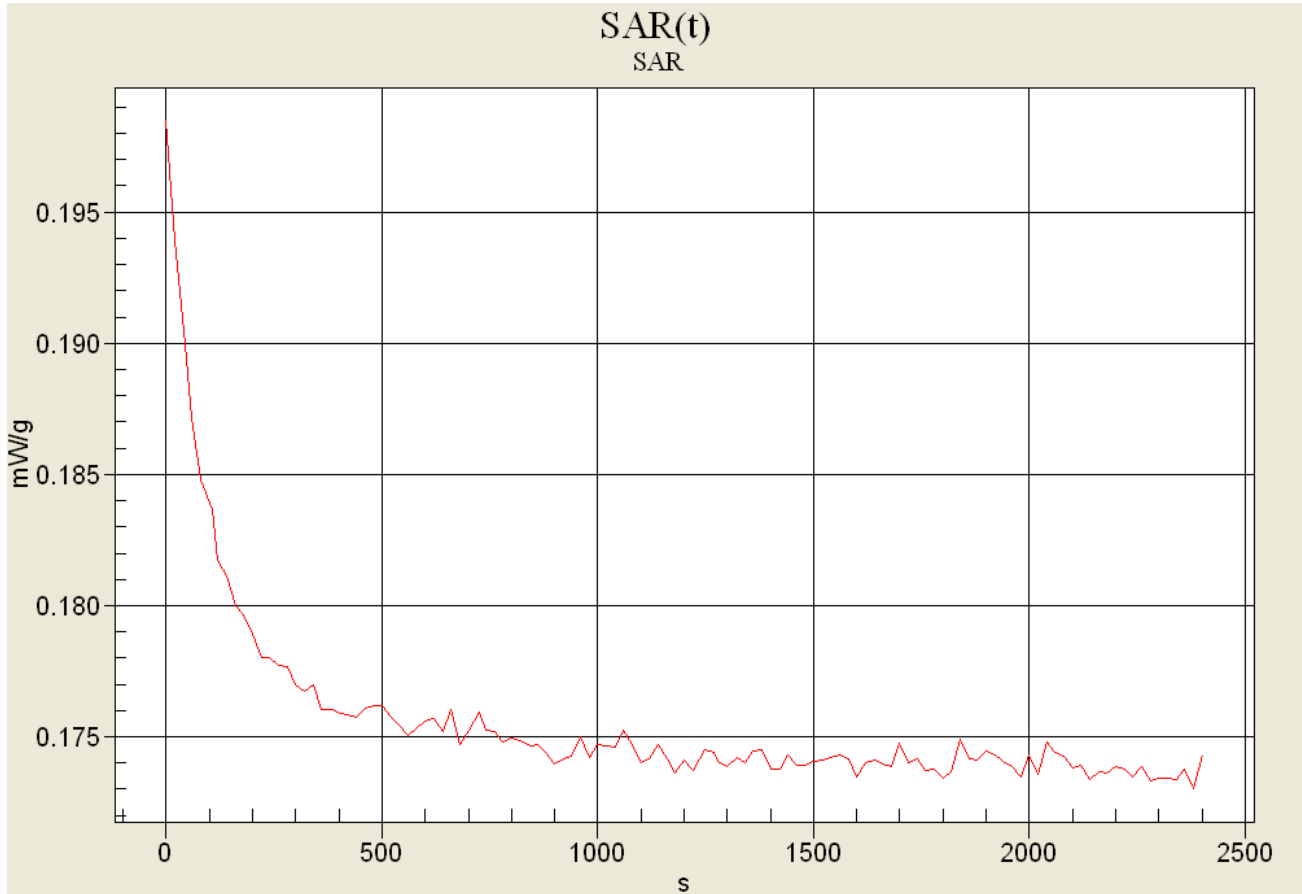

Initial SAR Value: 0.198 mW/g - Start  
 13 min. SAR Value: 0.175 mW/g (-0.536 dB drift) - Zoom Scan Duration  
 End SAR Value: 0.174 mW/g (-0.561 dB drift) - Area Scan Duration

Test Report S/N:	021204-475Q3Q
Test Date(s):	March 03, 2004
Test Type:	FCC/IC SAR Evaluation

## APPENDIX B - SYSTEM PERFORMANCE CHECK DATA



## System Performance Check - 2450 MHz Dipole

Date Tested: 03/03/04

DUT: Dipole 2450 MHz; Model: D2450V2; Type: System Performance Check; Serial: 150

Ambient Temp: 24.5 °C; Fluid Temp: 23.9 °C; Barometric Pressure: 101.4 kPa; Humidity: 30%

Communication System: CW  
 Forward Conducted Power: 250 mW  
 Frequency: 2450 MHz; Duty Cycle: 1:1  
 Medium: HSL2450 ( $\sigma = 1.86 \text{ mho/m}$ ;  $\epsilon_r = 37.3$ ;  $\rho = 1000 \text{ kg/m}^3$ )

- Probe: ET3DV6 - SN1590; ConvF(5, 5, 5); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: SAM front; Type: SAM 4.0; Serial: 1033
- Measurement SW: DASy4, V4.2 Build 12; Postprocessing SW: SEMCAD, V1.8 Build 94

### 2450 MHz System Performance Check/Area Scan (6x10x1):

Measurement grid: dx=10mm, dy=10mm

### 2450 MHz System Performance Check/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 27.1 W/kg


**SAR(1 g) = 12.9 mW/g; SAR(10 g) = 6.03 mW/g**

Reference Value = 92 V/m

Power Drift = -0.1 dB

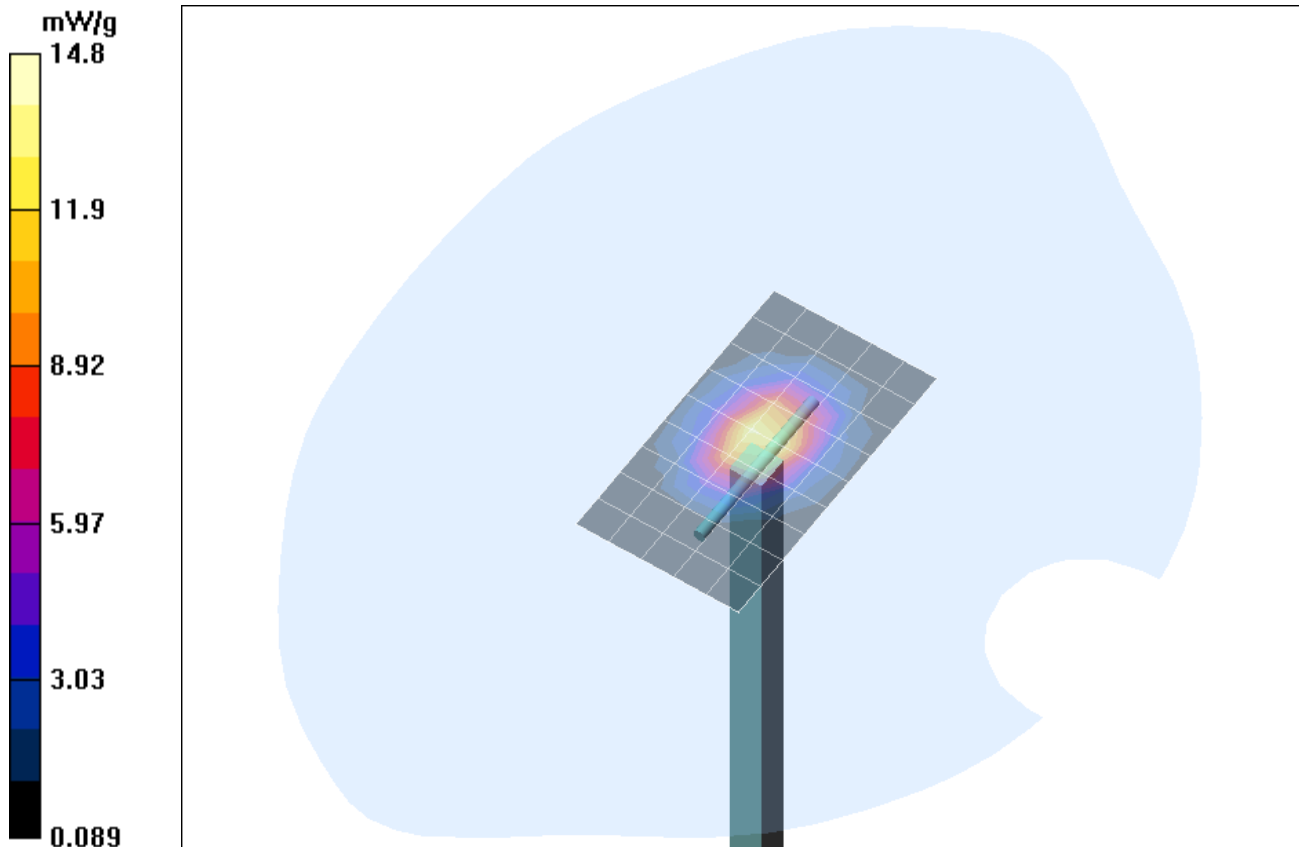

### Z-Axis Scan

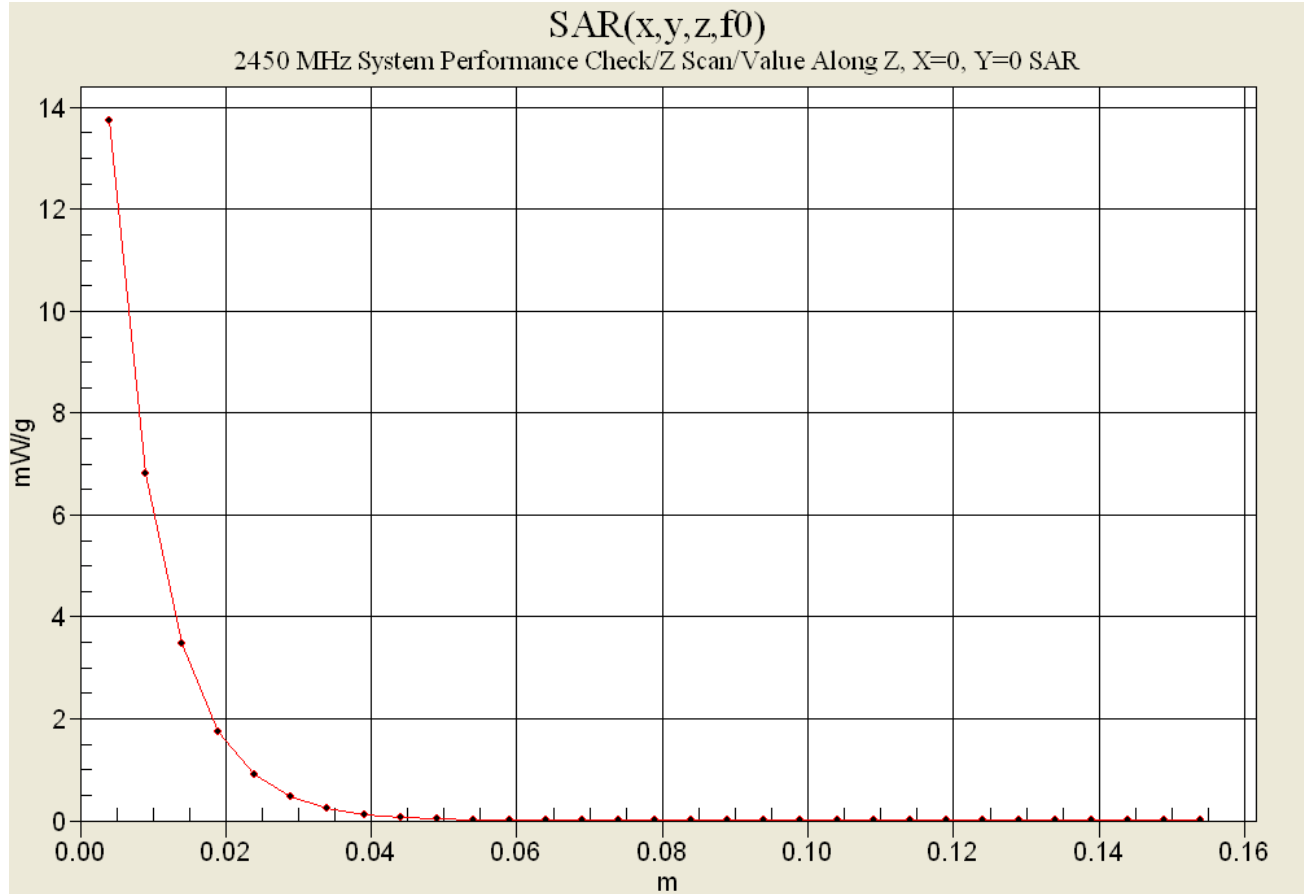

Test Report S/N:	021204-475Q3Q
Test Date(s):	March 03, 2004
Test Type:	FCC/IC SAR Evaluation

## APPENDIX C - SYSTEM VALIDATION

## 2450MHz SYSTEM VALIDATION DIPOLE

Type:

**2450MHz Validation Dipole**

Serial Number:

**150**

Place of Calibration:

**Celltech Labs Inc.**

Date of Calibration:

**September 17, 2003**

Celltech Labs Inc. hereby certifies that this device has been calibrated on the date indicated above.

Calibrated by:

*Spencer Watson*


Approved by:

*Russell W. Pipe*

## 1. Dipole Construction & Electrical Characteristics

The validation dipole was constructed in accordance with the IEEE Std “Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques”. The electrical properties were measured using an HP 8753E Network Analyzer. The network analyzer was calibrated to the validation dipole N-type connector feed point using an HP85032E Type N calibration kit. The dipole was placed parallel to a planar phantom at a separation distance of 10.0mm from the simulating fluid using a loss-less dielectric spacer. The measured input impedance is:

Feed point impedance at 2450MHz	$\text{Re}\{Z\} = 44.488\Omega$ $\text{Im}\{Z\} = -2.4883\Omega$
Return Loss at 2450MHz	-25.322 dB

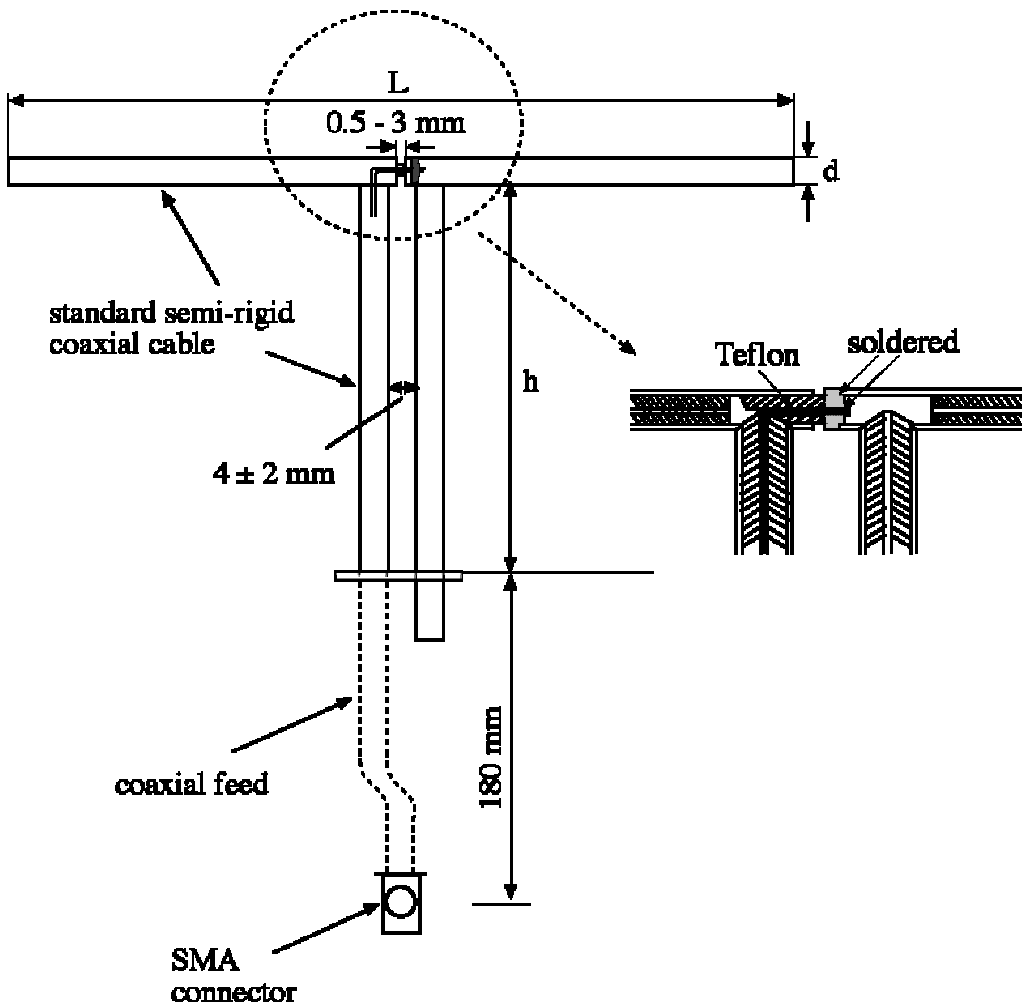

17 Sep 2003 11:17:40

CH1 S11 1 U FS

1: 44.488  $\Omega$  -2.4883  $\Omega$  26.107 pF


2 450.000 000 MHz

PRm

MARKER 1  
2.45 GHz

Cor

↑

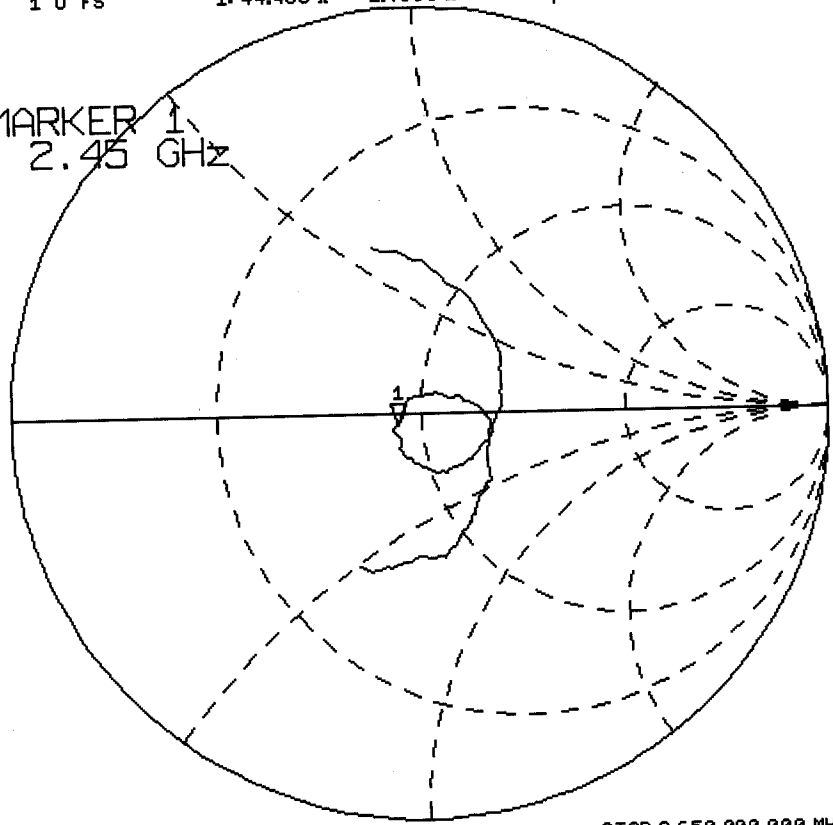


START 2 250.000 000 MHz

STOP 2 650.000 000 MHz

17 Sep 2003 11:16:48

CH1 S11 LOG 10 dB/REF 0 dB

1:-25.322 dB 2 450.000 000 MHz

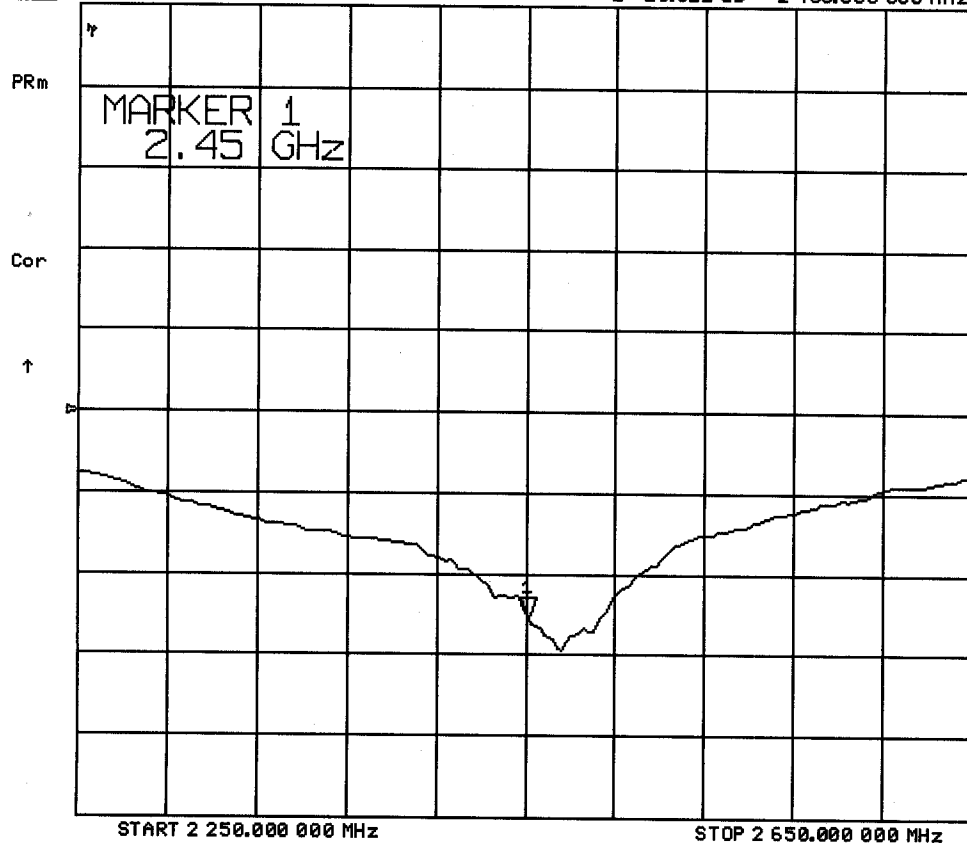

## Validation Dipole Dimensions

Frequency (MHz)	L (mm)	h (mm)	d (mm)
300	420.0	250.0	6.2
450	288.0	167.0	6.2
835	161.0	89.8	3.6
900	149.0	83.3	3.6
1450	89.1	51.7	3.6
1800	72.0	41.7	3.6
1900	68.0	39.5	3.6
2000	64.5	37.5	3.6
2450	51.8	30.6	3.6
3000	41.5	25.0	3.6

## 2. Validation Phantom

The validation phantom is the SAM (Specific Anthropomorphic Mannequin) phantom manufactured by Schmid & Partner Engineering AG. The SAM phantom is a Fiberglass shell integrated in a wooden table. The shape of the shell corresponds to the phantom defined by SCC34-SC2. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

**Shell Thickness:** 2.0 ± 0.1 mm  
**Filling Volume:** Approx. 20 liters  
**Dimensions:** 50 cm (W) x 100 cm (L)



## 2450MHz Dipole Calibration



## 2450MHz Dipole Calibration



### **3. Measurement Conditions**

The planar phantom was filled with brain simulating tissue having the following electrical parameters at 2450MHz:


Relative Permittivity:	37.3
Conductivity:	1.88 mho/m
Ambient Temperature:	21.6°C
Fluid Temperature:	23.9°C
Fluid Depth:	≥ 15cm

The 2450MHz simulating tissue consists of the following ingredients:

<b>Ingredient</b>	<b>Percentage by weight</b>
Water	52.00%
Glycol Monobutyl	48.00%
Target Dielectric Parameters at 22°C	$\epsilon_r = 39.2 (+/-5\%)$ $\sigma = 1.80 \text{ S/m } (+/-5\%)$

#### 4. SAR Measurement

The SAR measurement was performed with the E-field probe in mechanical detection mode only. The setup and determination of the forward power into the dipole was performed using the following procedures.

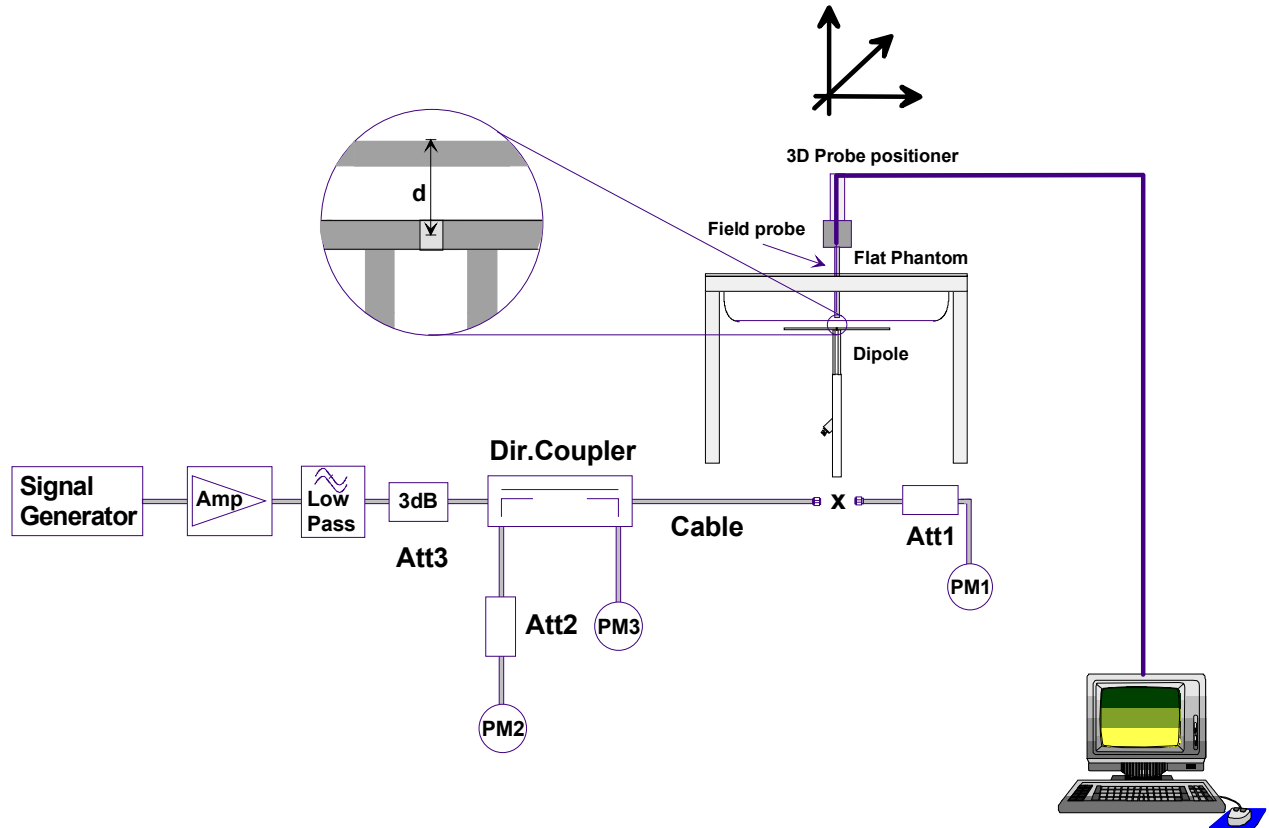

First, the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the attenuation of Att1) as read by power meter PM2. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2. If the signal generator does not allow adjustment in 0.01dB steps, the remaining difference at PM2 must be taken into consideration. PM3 records the reflected power from the dipole to ensure that the value is not changed from the previous value. The reflected power should be 20dB below the forward power.

Ten SAR measurements were performed in order to achieve repeatability and to establish an average target value.

### Validation Dipole SAR Test Results

Validation Measurement	SAR @ 0.25W Input averaged over 1g	SAR @ 1W Input averaged over 1g	SAR @ 0.25W Input averaged over 10g	SAR @ 1W Input averaged over 10g	Peak SAR @ 0.25W Input
Test 1	13.9	55.6	6.27	25.08	29.5
Test 2	13.9	55.6	6.25	25.00	29.1
Test 3	13.9	55.6	6.24	24.96	28.9
Test 4	14.0	56.0	6.31	25.24	29.1
Test 5	14.0	56.0	6.27	25.08	29.7
Test 6	13.8	55.2	6.25	25.00	29.3
Test 7	13.9	55.6	6.22	24.88	29.3
Test 8	13.9	55.6	6.24	24.96	29.4
Test 9	14.0	56.0	6.29	25.16	30.0
Test10	13.8	55.2	6.17	24.68	29.3
Average Value	13.91	55.64	6.251	25.00	29.36

The results have been normalized to 1W (forward power) into the dipole.

Averaged over 1cm (1g) of tissue: 55.64 mW/g

Averaged over 10cm (10g) of tissue: 25.00 mW/g

Test Date: 09/17/03

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:150**


Ambient Temp: 22.2C; Fluid Temp: 23.8C  
Barometric Pressure: 101.9 kPa; Humidity: 52%


Communication System: CW  
Frequency: 2450 MHz; Duty Cycle: 1:1  
Medium: HSL2450 ( $\sigma = 1.88$  mho/m,  $\epsilon_r = 37.3$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

- Probe: ET3DV6 - SN1387; ConvF(5, 5, 5); Calibrated: 26/02/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 19/05/2003
- Phantom: SAM front; Type: SAM 4.0; Serial: 1033
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 116

**Probe SN1387 Validation at 2450 MHz/Area Scan (6x10x1):** Measurement grid: dx=10mm, dy=10mm

**Probe SN1387 Validation at 2450 MHz/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Peak SAR (extrapolated) = 29.5 W/kg  
**SAR(1 g) = 13.9 mW/g; SAR(10 g) = 6.27 mW/g**  
Reference Value = 96.7 V/m  
Power Drift = -0.08 dB

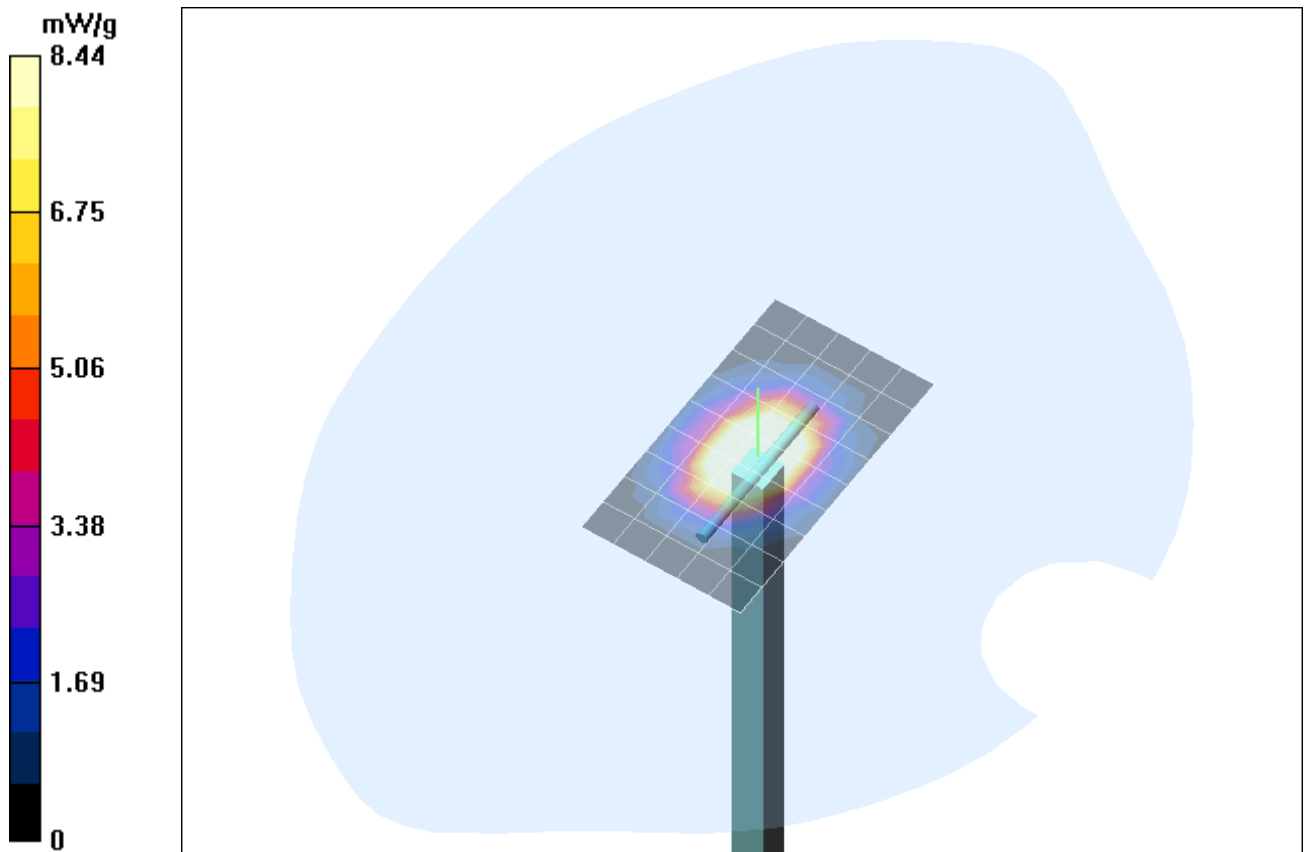

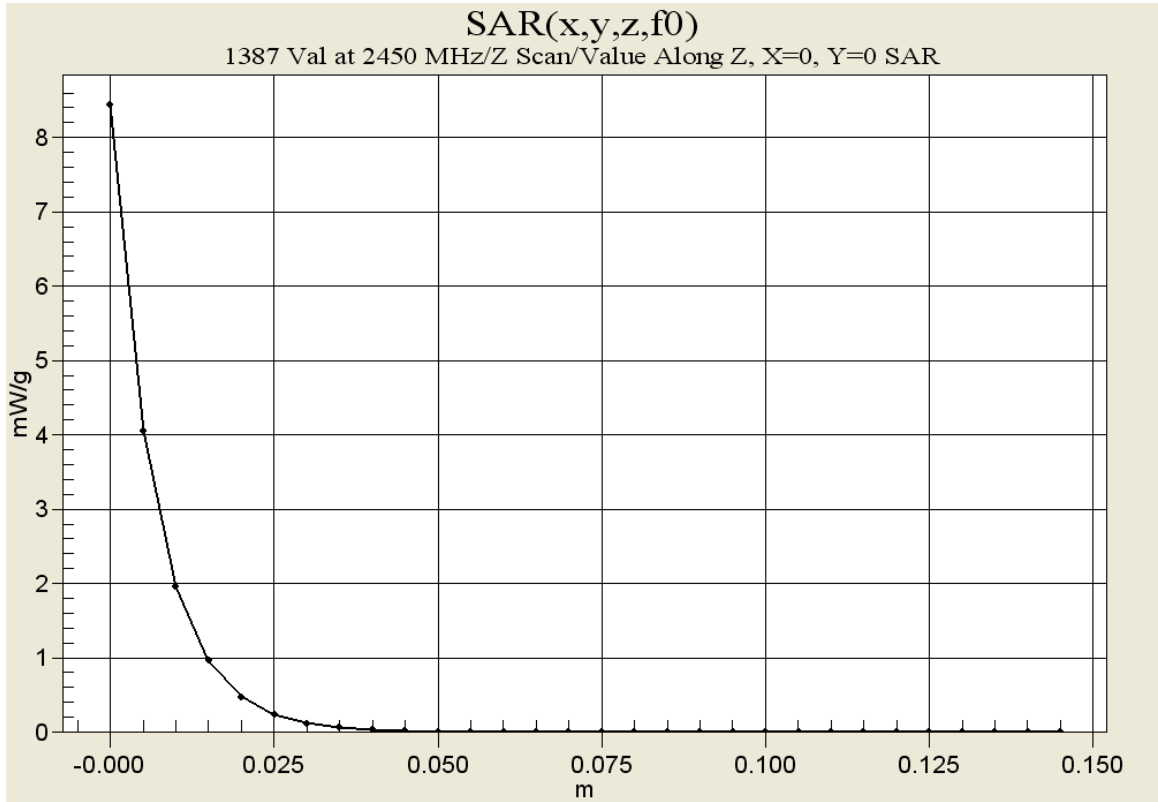

# 2450MHz System Validation

## Measured Fluid Dielectric Parameters (Brain)

September 17, 2003



Frequency	$\epsilon'$	$\epsilon''$
2.350000000 GHz	37.7457	13.5170
2.360000000 GHz	37.7101	13.5534
2.370000000 GHz	37.6951	13.5903
2.380000000 GHz	37.6613	13.6228
2.390000000 GHz	37.6411	13.6368
2.400000000 GHz	37.5853	13.6598
2.410000000 GHz	37.5236	13.6742
2.420000000 GHz	37.4573	13.7091
2.430000000 GHz	37.4063	13.7484
2.440000000 GHz	37.3419	13.7798
2.450000000 GHz	37.2875	13.8226
2.460000000 GHz	37.2447	13.8618
2.470000000 GHz	37.2198	13.8951
2.480000000 GHz	37.1940	13.9293
2.490000000 GHz	37.1679	13.9423
2.500000000 GHz	37.1333	13.9571
2.510000000 GHz	37.0990	13.9745
2.520000000 GHz	37.0410	14.0116
2.530000000 GHz	36.9938	14.0375
2.540000000 GHz	36.9185	14.0546
2.550000000 GHz	36.8657	14.0912



Test Report S/N:	021204-475Q3Q
Test Date(s):	March 03, 2004
Test Type:	FCC/IC SAR Evaluation

## APPENDIX D - PROBE CALIBRATION

Client **Celltech Labs**

CALIBRATION CERTIFICATE			
Object(s)	ET3DV6 - SN:1590		
Calibration procedure(s)	QA CAL-01.v2 Calibration procedure for dosimetric E-field probes		
Calibration date:	May 15, 2003		
Condition of the calibrated item	In Tolerance (according to the specific calibration document)		
This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.			
All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.			
Calibration Equipment used (M&TE critical for calibration)			
Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
RF generator HP 8684C	US3642U01700	4-Aug-99 (SPEAG, in house check Aug-02)	In house check: Aug-05
Power sensor E4412A	MY41495277	2-Apr-03 (METAS, No 252-0250)	Apr-04
Power sensor HP 8481A	MY41092180	18-Sep-02 (Agilent, No. 20020918)	Sep-03
Power meter EPM E4419B	GB41293874	2-Apr-03 (METAS, No 252-0250)	Apr-04
Network Analyzer HP 8753E	US38432426	3-May-00 (Agilent, No. 8702K094602)	In house check: May 03
Fluke Process Calibrator Type 702	SN: 6295803	3-Sep-01 (ELCAL, No.2360)	Sep-03
Calibrated by:	Name Nicola Vetterli	Function Technician	Signature 
Approved by:	Name Katja Polovic	Function Laboratory Director	Signature 
Date issued: May 15, 2003			
This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.			

# Probe ET3DV6

SN:1590

Manufactured:	March 19, 2001
Last calibration:	April 26, 2002
Recalibrated:	May 15, 2003

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

**DASY - Parameters of Probe: ET3DV6 SN:1590****Sensitivity in Free Space**

NormX	<b>1.76</b> $\mu\text{V}/(\text{V}/\text{m})^2$
NormY	<b>1.91</b> $\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	<b>1.66</b> $\mu\text{V}/(\text{V}/\text{m})^2$

**Diode Compression**

DCP X	<b>92</b>	mV
DCP Y	<b>92</b>	mV
DCP Z	<b>92</b>	mV

**Sensitivity in Tissue Simulating Liquid**

Head                      900 MHz                       $\epsilon_r = 41.5 \pm 5\%$                        $\sigma = 0.97 \pm 5\%$  mho/m

Valid for f=800-1000 MHz with Head Tissue Simulating Liquid according to EN 50361, P1528-200X

ConvF X	<b>7.0</b> $\pm 9.5\%$ (k=2)	Boundary effect:
ConvF Y	<b>7.0</b> $\pm 9.5\%$ (k=2)	Alpha <b>0.33</b>
ConvF Z	<b>7.0</b> $\pm 9.5\%$ (k=2)	Depth <b>2.56</b>

Head                      1800 MHz                       $\epsilon_r = 40.0 \pm 5\%$                        $\sigma = 1.40 \pm 5\%$  mho/m

Valid for f=1710-1910 MHz with Head Tissue Simulating Liquid according to EN 50361, P1528-200X

ConvF X	<b>5.5</b> $\pm 9.5\%$ (k=2)	Boundary effect:
ConvF Y	<b>5.5</b> $\pm 9.5\%$ (k=2)	Alpha <b>0.44</b>
ConvF Z	<b>5.5</b> $\pm 9.5\%$ (k=2)	Depth <b>2.69</b>

**Boundary Effect**

Head                      900 MHz                      Typical SAR gradient: 5 % per mm

Probe Tip to Boundary		<b>1 mm</b>	<b>2 mm</b>
SAR <sub>be</sub> [%]	Without Correction Algorithm	8.7	5.0
SAR <sub>be</sub> [%]	With Correction Algorithm	0.3	0.5





Head                      1800 MHz                      Typical SAR gradient: 10 % per mm



Probe Tip to Boundary		<b>1 mm</b>	<b>2 mm</b>
SAR <sub>be</sub> [%]	Without Correction Algorithm	12.3	8.5
SAR <sub>be</sub> [%]	With Correction Algorithm	0.2	0.1

**Sensor Offset**


Probe Tip to Sensor Center	<b>2.7</b>	mm
Optical Surface Detection	<b>1.4 <math>\pm</math> 0.2</b>	mm

### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

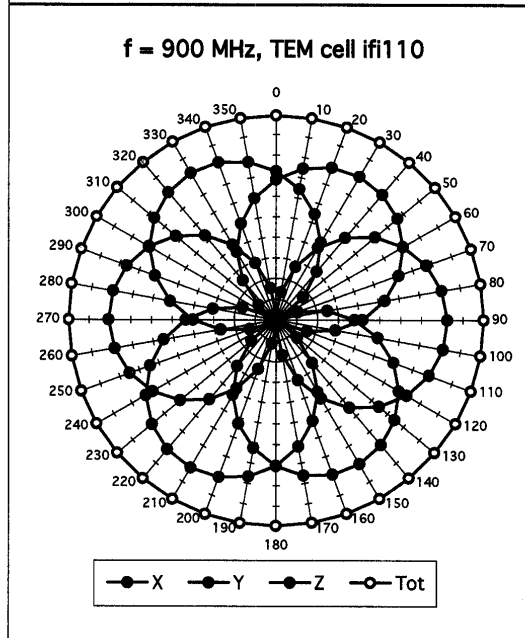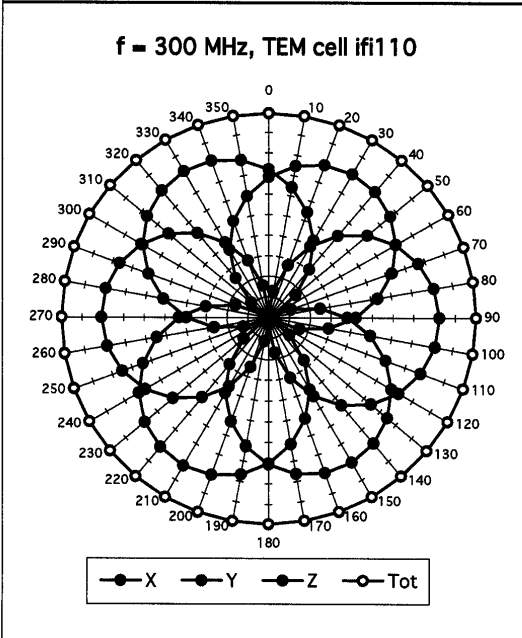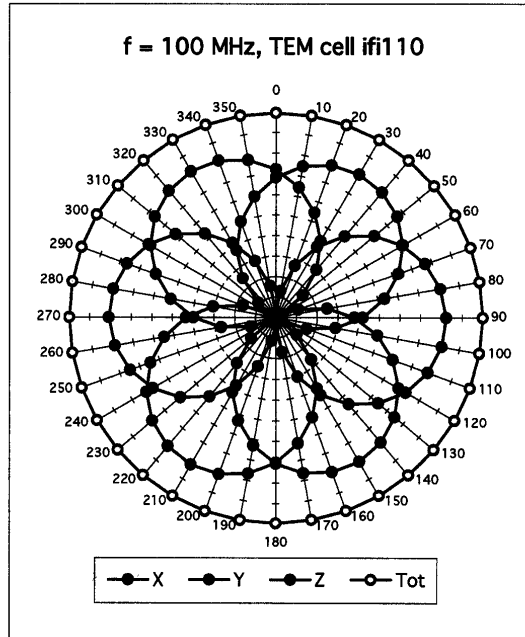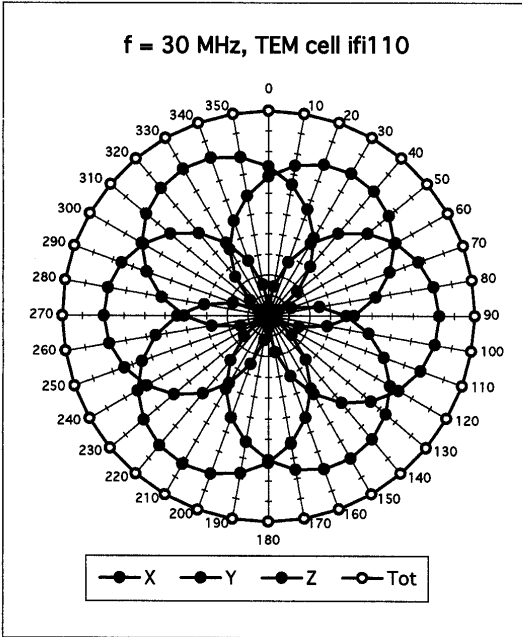

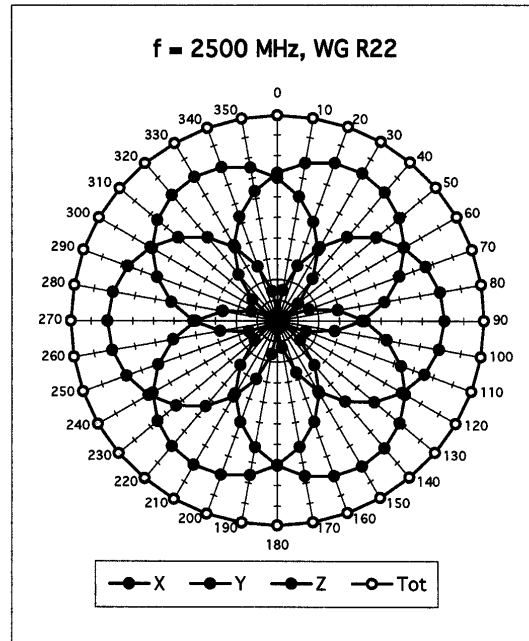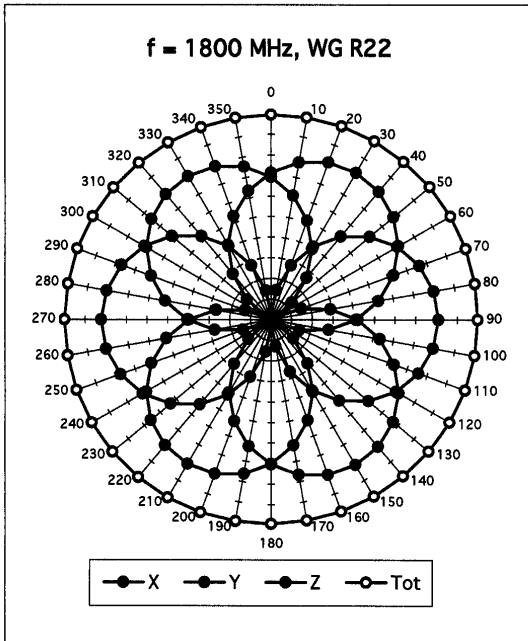


**Isotropy Error ( $\phi$ ),  $\theta = 0^\circ$**

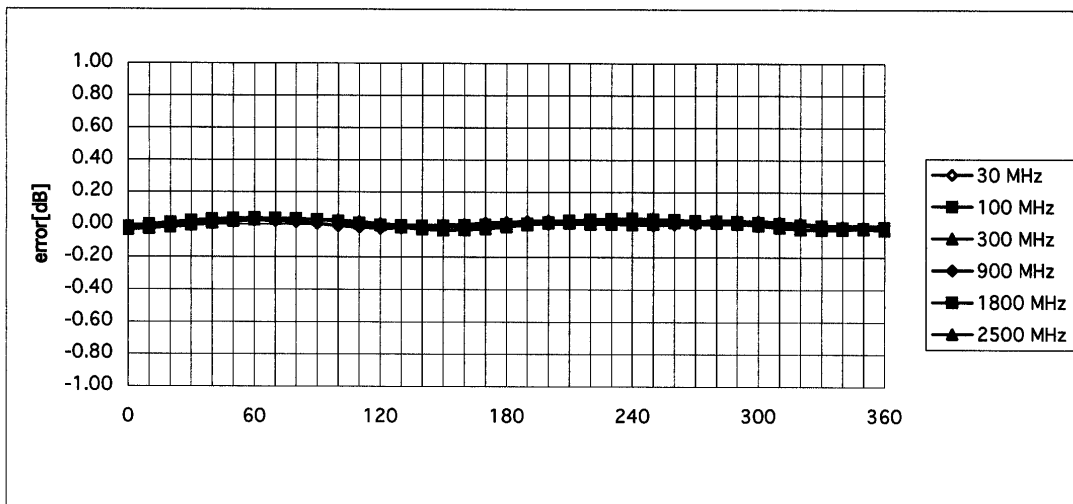



### Frequency Response of E-Field

( TEM-Cell:ifi110, Waveguide R22)

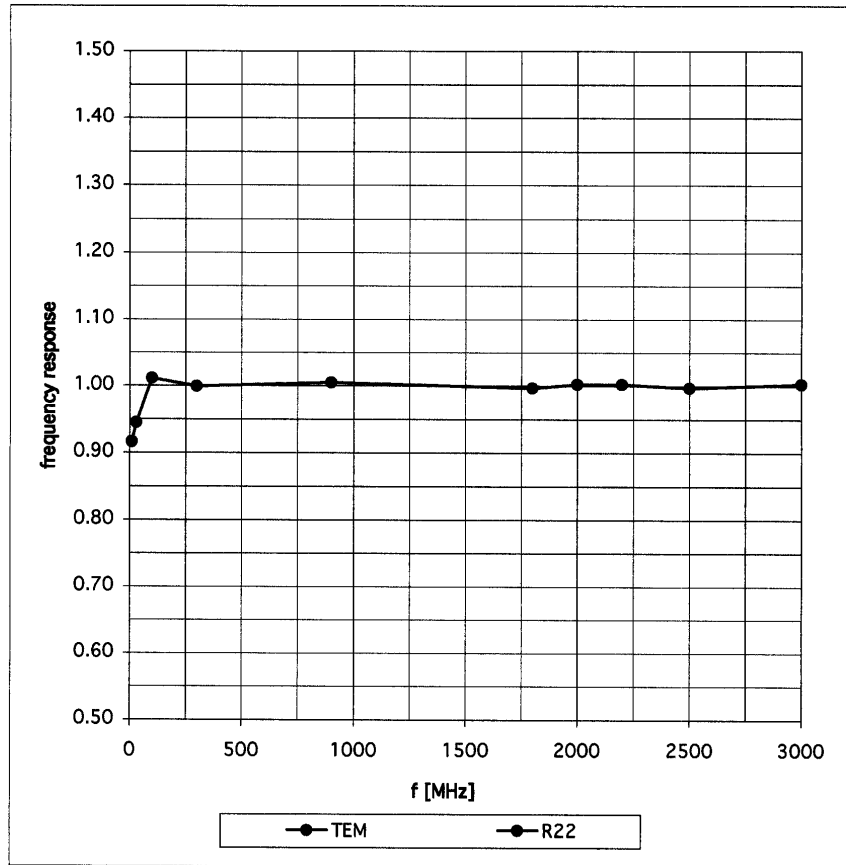


### Dynamic Range f(SAR<sub>brain</sub>)

( Waveguide R22 )

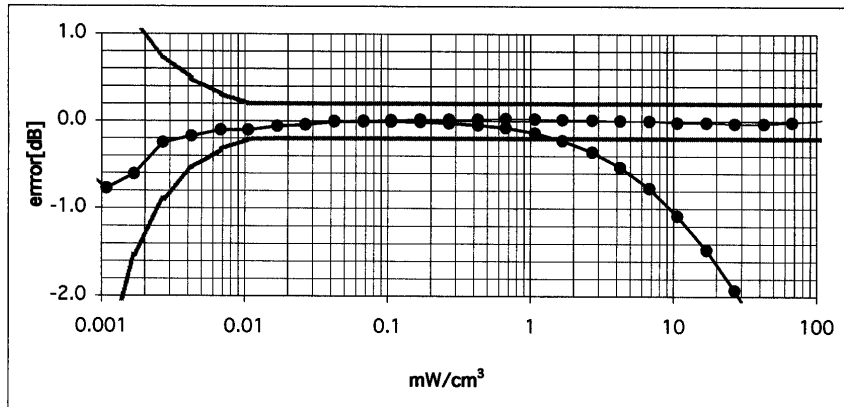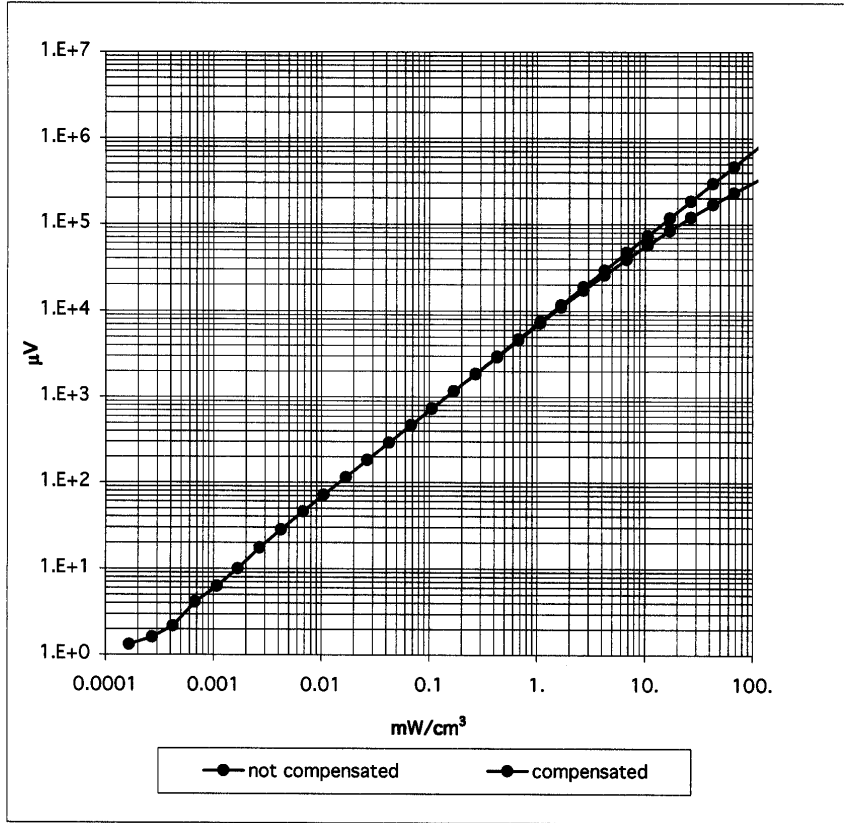



### Conversion Factor Assessment

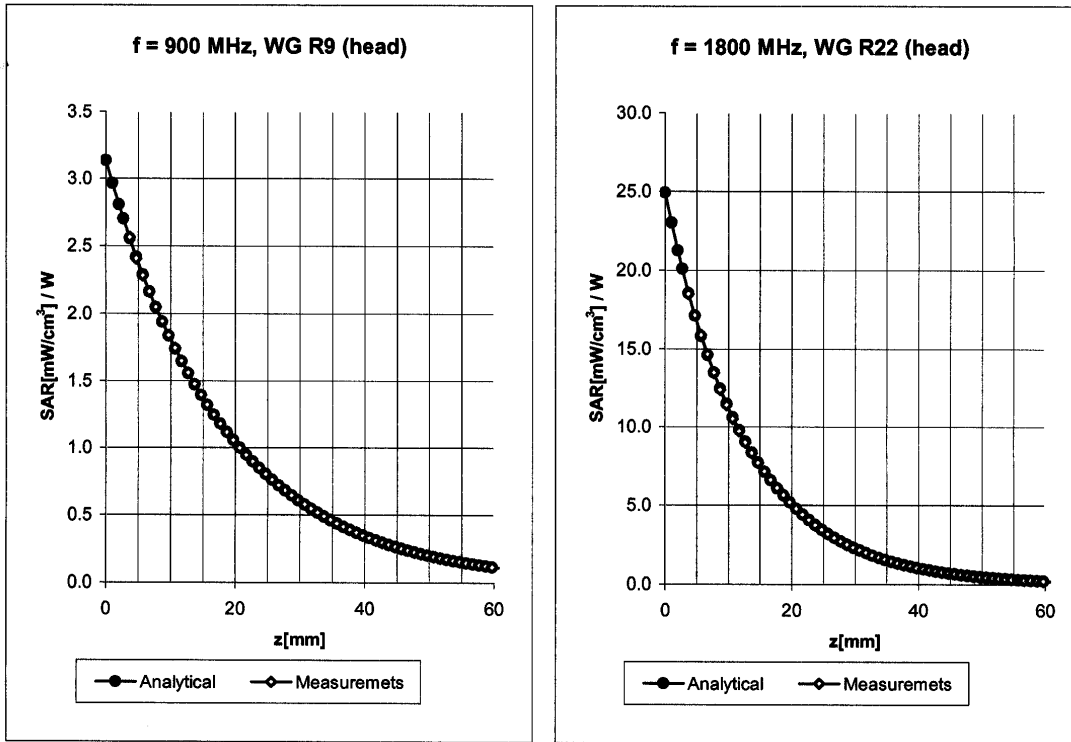

Head                      900 MHz                       $\epsilon_r = 41.5 \pm 5\%$                        $\sigma = 0.97 \pm 5\%$  mho/m

Valid for f=800-1000 MHz with Head Tissue Simulating Liquid according to EN 50361, P1528-200X


ConvF X	7.0 ± 9.5% (k=2)	Boundary effect:
ConvF Y	7.0 ± 9.5% (k=2)	Alpha <b>0.33</b>
ConvF Z	7.0 ± 9.5% (k=2)	Depth <b>2.56</b>

Head                      1800 MHz                       $\epsilon_r = 40.0 \pm 5\%$                        $\sigma = 1.40 \pm 5\%$  mho/m

Valid for f=1710-1910 MHz with Head Tissue Simulating Liquid according to EN 50361, P1528-200X

ConvF X	5.5 ± 9.5% (k=2)	Boundary effect:
ConvF Y	5.5 ± 9.5% (k=2)	Alpha <b>0.44</b>
ConvF Z	5.5 ± 9.5% (k=2)	Depth <b>2.69</b>

### Conversion Factor Assessment

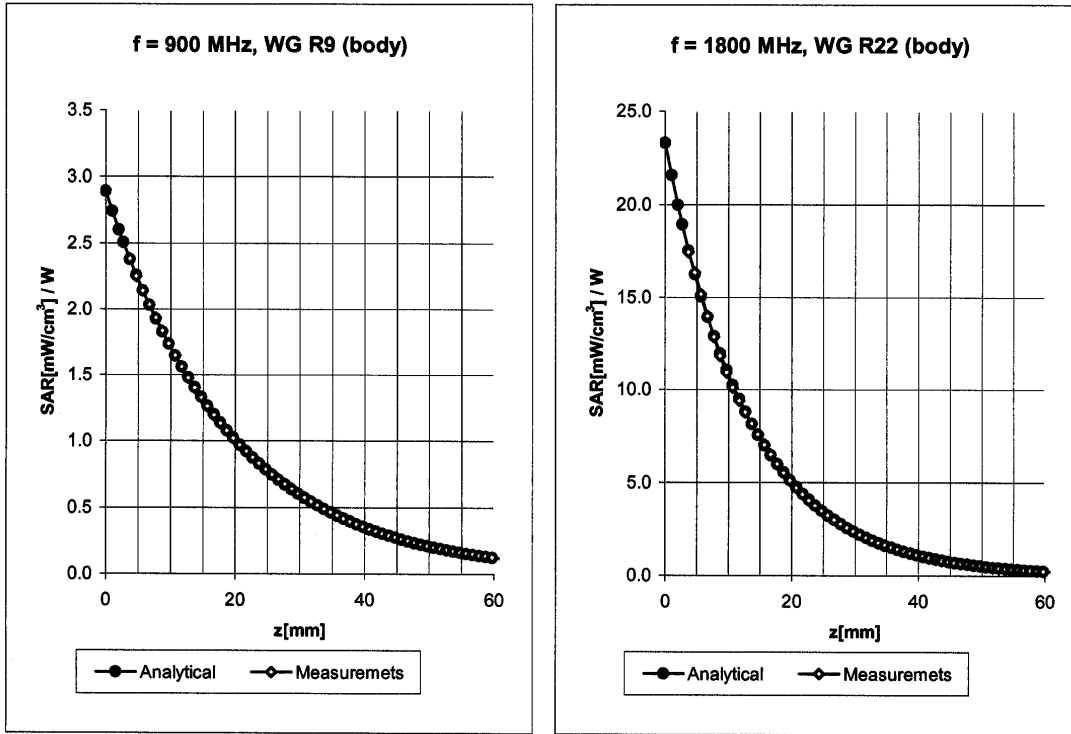

Body                      900 MHz                       $\epsilon_r = 55.0 \pm 5\%$                        $\sigma = 1.05 \pm 5\%$  mho/m

Valid for f=800-1000 MHz with Body Tissue Simulating Liquid according to OET 65 Suppl. C


ConvF X	<b>6.8</b> $\pm 9.5\%$ (k=2)	Boundary effect:
ConvF Y	<b>6.8</b> $\pm 9.5\%$ (k=2)	Alpha <b>0.34</b>
ConvF Z	<b>6.8</b> $\pm 9.5\%$ (k=2)	Depth <b>2.61</b>

Body                      1800 MHz                       $\epsilon_r = 53.3 \pm 5\%$                        $\sigma = 1.52 \pm 5\%$  mho/m

Valid for f=1710-1910 MHz with Body Tissue Simulating Liquid according to OET 65 Suppl. C

ConvF X	<b>5.0</b> $\pm 9.5\%$ (k=2)	Boundary effect:
ConvF Y	<b>5.0</b> $\pm 9.5\%$ (k=2)	Alpha <b>0.52</b>
ConvF Z	<b>5.0</b> $\pm 9.5\%$ (k=2)	Depth <b>2.69</b>

### Conversion Factor Assessment

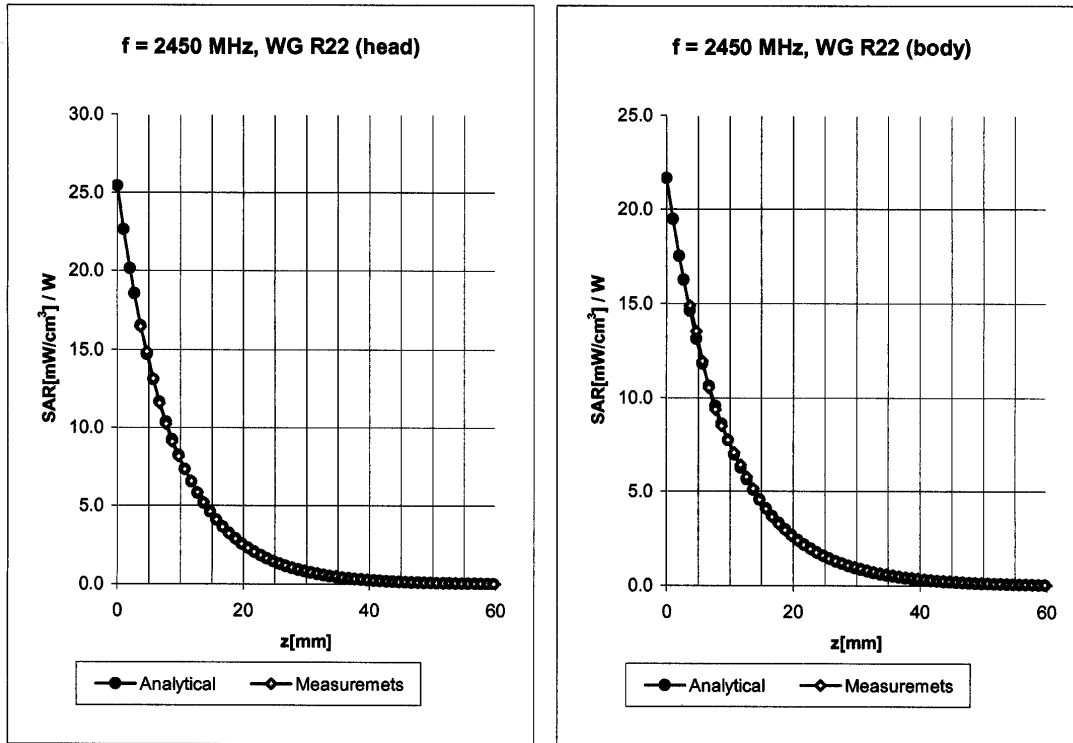

Head      2450      MHz       $\epsilon_r = 39.2 \pm 5\%$        $\sigma = 1.80 \pm 5\%$  mho/m

Valid for f=2400-2500 MHz with Head Tissue Simulating Liquid according to EN 50361, P1528-200X

ConvF X	5.0 ± 8.9% (k=2)	Boundary effect:	
ConvF Y	5.0 ± 8.9% (k=2)	Alpha	<b>0.88</b>
ConvF Z	5.0 ± 8.9% (k=2)	Depth	<b>1.92</b>


Body      2450      MHz       $\epsilon_r = 52.7 \pm 5\%$        $\sigma = 1.95 \pm 5\%$  mho/m

Valid for f=2400-2500 MHz with Body Tissue Simulating Liquid according to OET 65 Suppl. C

ConvF X	4.4 ± 8.9% (k=2)	Boundary effect:	
ConvF Y	4.4 ± 8.9% (k=2)	Alpha	<b>0.90</b>
ConvF Z	4.4 ± 8.9% (k=2)	Depth	<b>1.87</b>

### Deviation from Isotropy in HSL

Error ( $\theta, \phi$ ),  $f = 900$  MHz

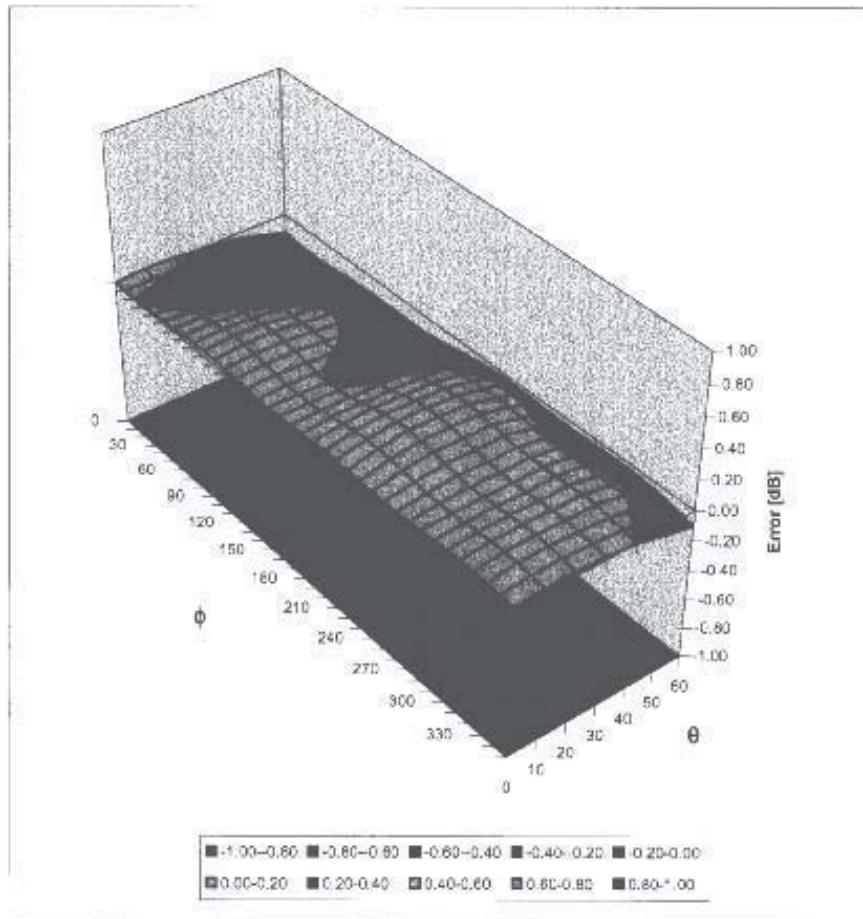

## Additional Conversion Factors for Dosimetric E-Field Probe

Type:

**ET3DV6**

Serial Number:

**1590**

Place of Assessment:

**Zurich**

Date of Assessment:


**May 19, 2003**

Probe Calibration Date:

**May 15, 2003**

Schmid & Partner Engineering AG hereby certifies that conversion factor(s) of this probe have been evaluated on the date indicated above. The assessment was performed using the FDTD numerical code SEMCAD of Schmid & Partner Engineering AG. Since the evaluation is coupled with measured conversion factors, it has to be recalculated yearly, i.e., following the re-calibration schedule of the probe. The uncertainty of the numerical assessment is based on the extrapolation from measured value at 900 MHz or at 1800 MHz.

Assessed by:



## Dosimetric E-Field Probe ET3DV6 SN:1590

Conversion factor ( $\pm$  standard deviation)

150 MHz	ConvF	9.6 $\pm$ 8%	$\epsilon_r = 52.3 \pm 5\%$ $\sigma = 0.76 \pm 5\%$ mho/m (head tissue)
300 MHz	ConvF	8.3 $\pm$ 8%	$\epsilon_r = 45.3 \pm 5\%$ $\sigma = 0.87 \pm 5\%$ mho/m (head tissue)
450 MHz	ConvF	7.9 $\pm$ 8%	$\epsilon_r = 43.5 \pm 5\%$ $\sigma = 0.87 \pm 5\%$ mho/m (head tissue)
150 MHz	ConvF	9.2 $\pm$ 8%	$\epsilon_r = 61.9 \pm 5\%$ $\sigma = 0.80 \pm 5\%$ mho/m (body tissue)
450 MHz	ConvF	8.1 $\pm$ 8%	$\epsilon_r = 56.7 \pm 5\%$ $\sigma = 0.94 \pm 5\%$ mho/m (body tissue)

Test Report S/N:	021204-475Q3Q
Test Date(s):	March 03, 2004
Test Type:	FCC/IC SAR Evaluation

**APPENDIX E - MEASURED FLUID DIELECTRIC PARAMETERS**

# 2450 MHz System Performance Check

## Measured Fluid Dielectric Parameters (Brain)

March 03, 2004

Frequency	$\epsilon'$	$\epsilon''$
2.400000000 GHz	37.5166	13.5246
2.405000000 GHz	37.4880	13.5348
2.410000000 GHz	37.4590	13.5373
2.415000000 GHz	37.4327	13.5567
2.420000000 GHz	37.4138	13.5784
2.425000000 GHz	37.4001	13.5961
2.430000000 GHz	37.3833	13.6164
2.435000000 GHz	37.3732	13.6313
2.440000000 GHz	37.3568	13.6378
2.445000000 GHz	37.3259	13.6531
2.450000000 GHz	37.3038	13.6724
2.455000000 GHz	37.2911	13.7031
2.460000000 GHz	37.2782	13.7232
2.465000000 GHz	37.2684	13.7436
2.470000000 GHz	37.2483	13.7507
2.475000000 GHz	37.2278	13.7636
2.480000000 GHz	37.2221	13.7782
2.485000000 GHz	37.2028	13.7956
2.490000000 GHz	37.1925	13.8139
2.495000000 GHz	37.1647	13.8034
2.500000000 GHz	37.1374	13.8167



# 2450 MHz DUT Evaluation (Body)

## Measured Fluid Dielectric Parameters (Muscle)

March 03, 2004

Frequency	$\epsilon'$	$\epsilon''$
2.400000000 GHz	50.5841	14.7836
2.405000000 GHz	50.5612	14.8037
2.410000000 GHz	50.5362	14.8338
2.415000000 GHz	50.5312	14.8438
2.420000000 GHz	50.5153	14.8779
2.425000000 GHz	50.4818	14.8968
2.430000000 GHz	50.4826	14.9076
2.435000000 GHz	50.4609	14.9237
2.440000000 GHz	50.4475	14.9373
2.445000000 GHz	50.4346	14.9540
2.450000000 GHz	50.4113	14.9799
2.455000000 GHz	50.4092	14.9838
2.460000000 GHz	50.3861	15.0062
2.465000000 GHz	50.3726	15.0242
2.470000000 GHz	50.3570	15.0341
2.475000000 GHz	50.3451	15.0469
2.480000000 GHz	50.3292	15.0501
2.485000000 GHz	50.3033	15.0657
2.490000000 GHz	50.2859	15.0820
2.495000000 GHz	50.2767	15.0958
2.500000000 GHz	50.2543	15.1224

Test Report S/N:	021204-475Q3Q
Test Date(s):	March 03, 2004
Test Type:	FCC/IC SAR Evaluation

## APPENDIX F - SAM PHANTOM CERTIFICATE OF CONFORMITY

# Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

## Certificate of conformity / First Article Inspection

Item	SAM Twin Phantom V4.0
Type No	QD 000 P40 BA
Series No	TP-1002 and higher
Manufacturer / Origin	Untersee Composites Hauptstr. 69 CH-8559 Fruthwilen Switzerland

### Tests

The series production process used allows the limitation to test of first articles. Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

Test	Requirement	Details	Units tested
Shape	Compliance with the geometry according to the CAD model.	IT'IS CAD File (*)	First article, Samples
Material thickness	Compliant with the requirements according to the standards	2mm +/- 0.2mm in specific areas	First article, Samples
Material parameters	Dielectric parameters for required frequencies	200 MHz – 3 GHz Relative permittivity < 5 Loss tangent < 0.05.	Material sample TP 104-5
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards	Liquid type HSL 1800 and others according to the standard.	Pre-series, First article

### Standards

- [1] CENELEC EN 50361
- [2] IEEE P1528-200x draft 6.5
- [3] IEC PT 62209 draft 0.9

(\*) The IT'IS CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

### Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date 18.11.2001

Signature / Stamp



**Schmid & Partner  
Engineering AG**



Zeughausstrasse 43, CH-8004 Zurich  
Tel. +41 1 245 97 00, Fax +41 1 245 97 79

Test Report S/N:	021204-475Q3Q
Test Date(s):	March 03, 2004
Test Type:	FCC/IC SAR Evaluation

## APPENDIX G - PLANAR PHANTOM CERTIFICATE OF CONFORMITY

2378 Westlake Road  
Kelowna, B.C. Canada  
V1Z-2V2



Ph. # 250-769-6848  
Fax # 250-769-6334  
E-mail: [barskiind@shaw.ca](mailto:barskiind@shaw.ca)  
Web: [www.bcfiberglass.com](http://www.bcfiberglass.com)

## FIBERGLASS FABRICATORS

### Certificate of Conformity

Item : Flat Planar Phantom Unit # 03-01  
Date: June 16, 2003  
Manufacturer: Barski Industries (1985 Ltd)

Test	Requirement	Details
Shape	Compliance to geometry according to drawing	Supplied CAD drawing
Material Thickness	Compliant with the requirements	2mm +/- 0.2mm in measurement area
Material Parameters	Dielectric parameters for required frequencies Based on Dow Chemical technical data	100 MHz-5 GHz Relative permittivity < 5 Loss Tangent < 0.05

#### Conformity

Based on the above information, we certify this product to be compliant to the requirements specified.

Signature: 

Daniel Chailier



**Fiberglass Planar Phantom - Top View**



**Fiberglass Planar Phantom - Front View**




**Fiberglass Planar Phantom - Back View**



**Fiberglass Planar Phantom - Bottom View**

## Dimensions of Fiberglass Planar Phantom

(Manufactured by Barski Industries Ltd. - Unit# 03-01)

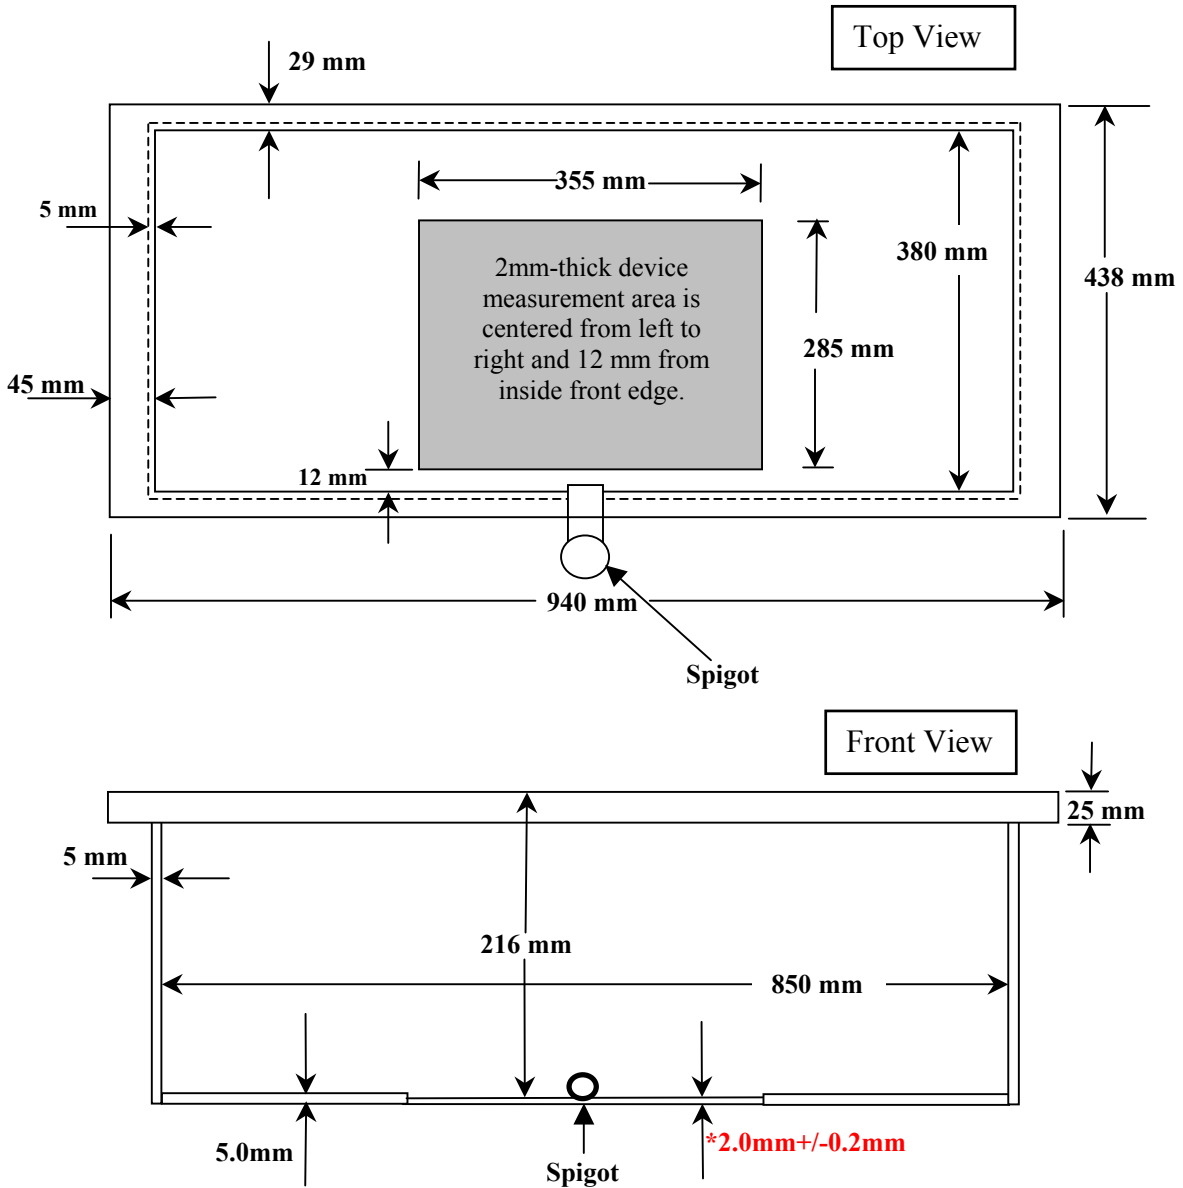



**Note: Measurements that aren't repeated for the opposite sides are the same as the side measured.  
This drawing is not to scale.**

Test Report S/N:	021204-475Q3Q
Test Date(s):	March 03, 2004
Test Type:	FCC/IC SAR Evaluation

## APPENDIX H - SAR TEST SETUP & DUT PHOTOGRAPHS



**BODY SAR TEST SETUP PHOTOGRAPHS**  
**Back Side of Tablet PC Touching Planar Phantom**  
**Primary WLAN Antenna**

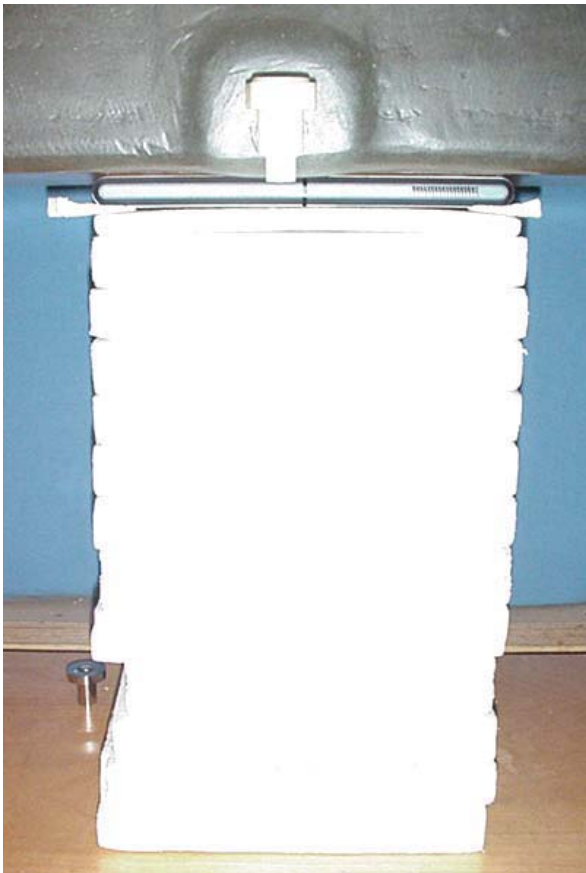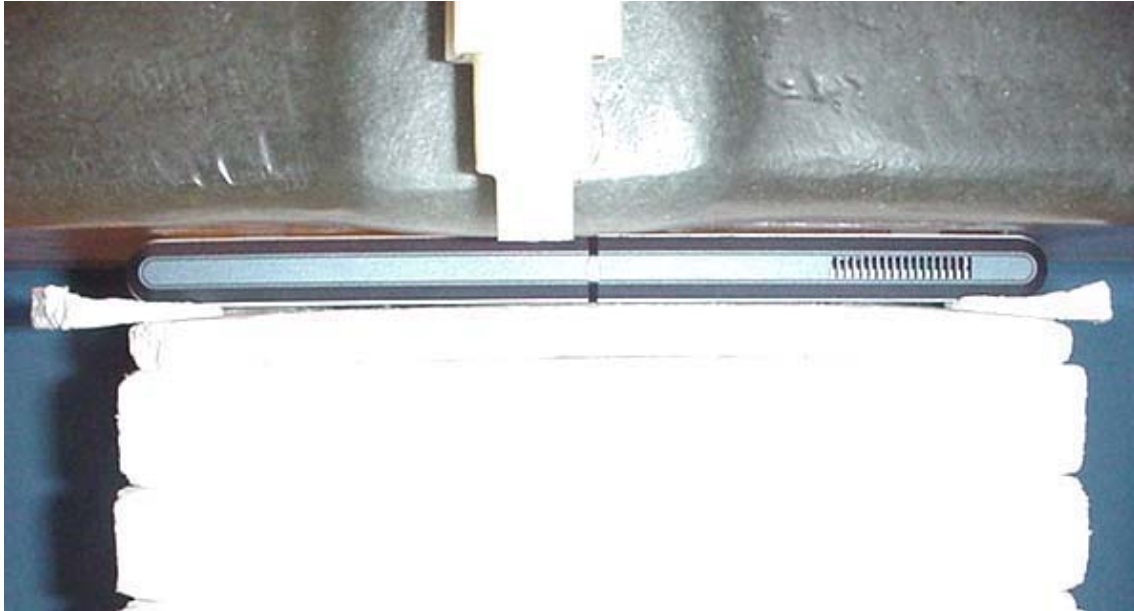


**BODY SAR TEST SETUP PHOTOGRAPHS**  
Back Side of Tablet PC Touching Planar Phantom  
Auxiliary WLAN Antenna



**BODY SAR TEST SETUP PHOTOGRAPHS**  
**Top Side of Tablet PC Touching Planar Phantom**  
**Primary WLAN Antenna & Bluetooth Antenna**



**BODY SAR TEST SETUP PHOTOGRAPHS**  
Right Side of Tablet PC Touching Planar Phantom  
Auxiliary WLAN Antenna

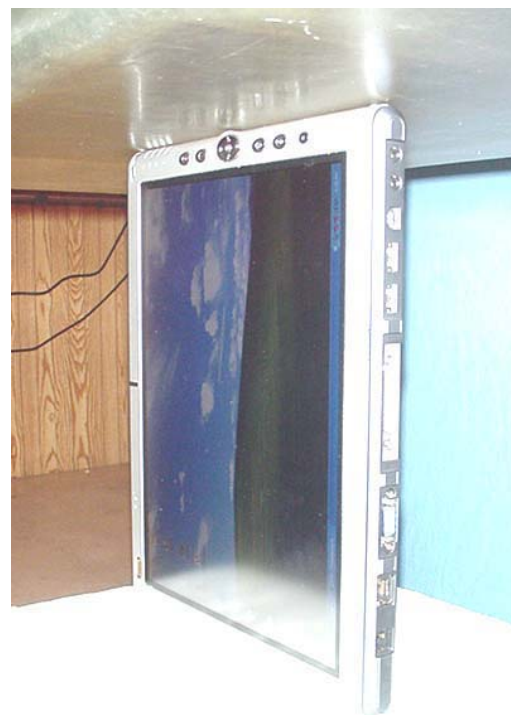


**DUT PHOTOGRAPHS**



**Front Side of DUT**

**DUT PHOTOGRAPHS**

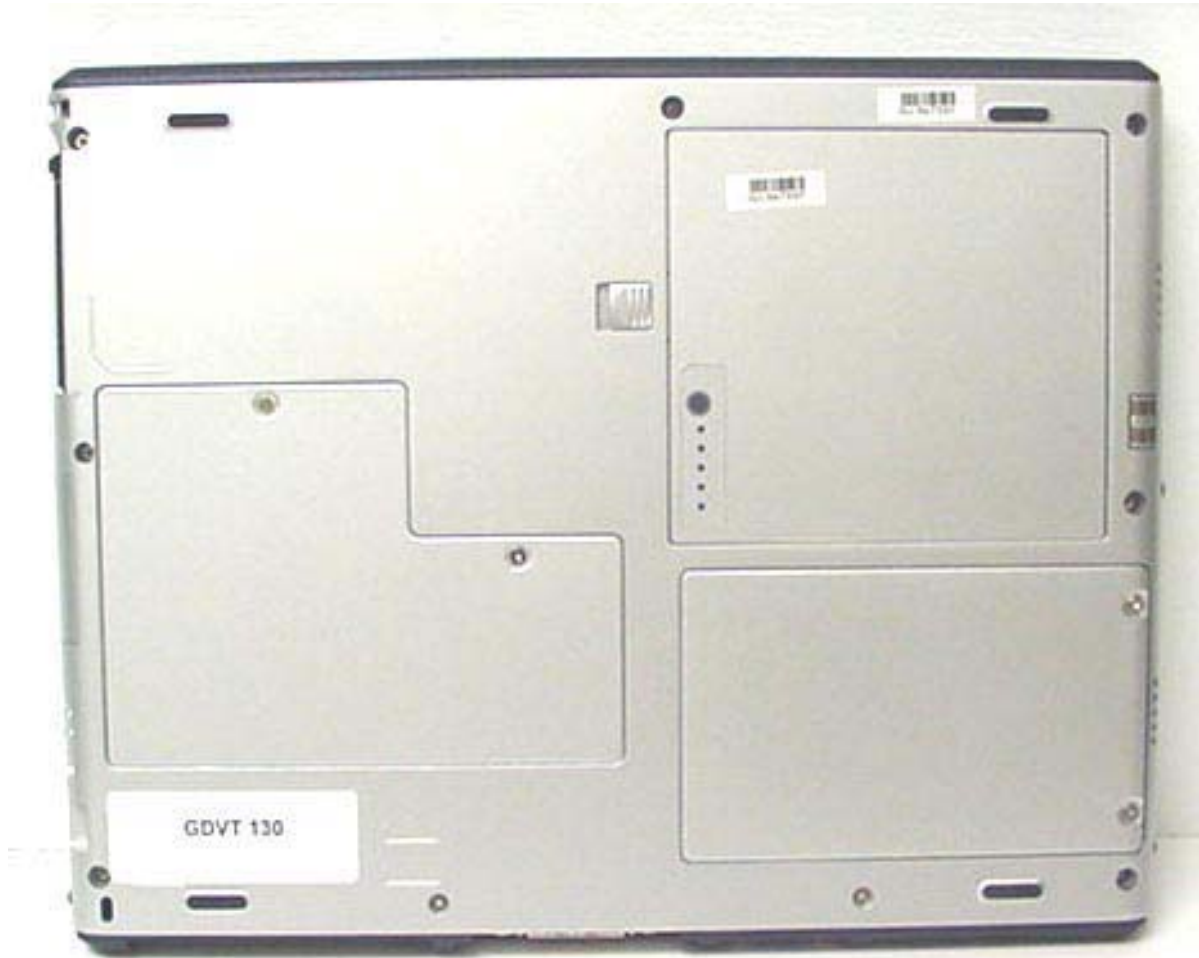

**Back Side of DUT**

**DUT PHOTOGRAPHS**



**Left Side of DUT**



**Right Side of DUT**

## DUT PHOTOGRAPHS



**Back Side of DUT with Battery Removed**



**11.1V, 1800mAH Li-ion Battery Pack**



**11.1V, 3600mAh Li-ion Battery Pack**