

Test Laboratory: Compliance Certification Services Inc.

D2450V2-SN 728-Body

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:728

Communication System: CW2450; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 50.8$; $\rho = 1000$ kg/m³

Air Temperature: 25.5 deg C; Liquid Temperature: 24.4 deg C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.14, 6.14, 6.14); Calibrated: 11/19/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 8/24/2004
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Pin=250mW,d=10mm/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 9.49 mW/g

Pin=250mW,d=10mm/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 22.0 mW/g



Pin=250mW,d=10mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 88.9 V/m; Power Drift = 0.123 dB

Peak SAR (extrapolated) = 30.6 W/kg


SAR(1 g) = 13.5 mW/g; SAR(10 g) = 5.86 mW/g

Maximum value of SAR (measured) = 15.1 mW/g

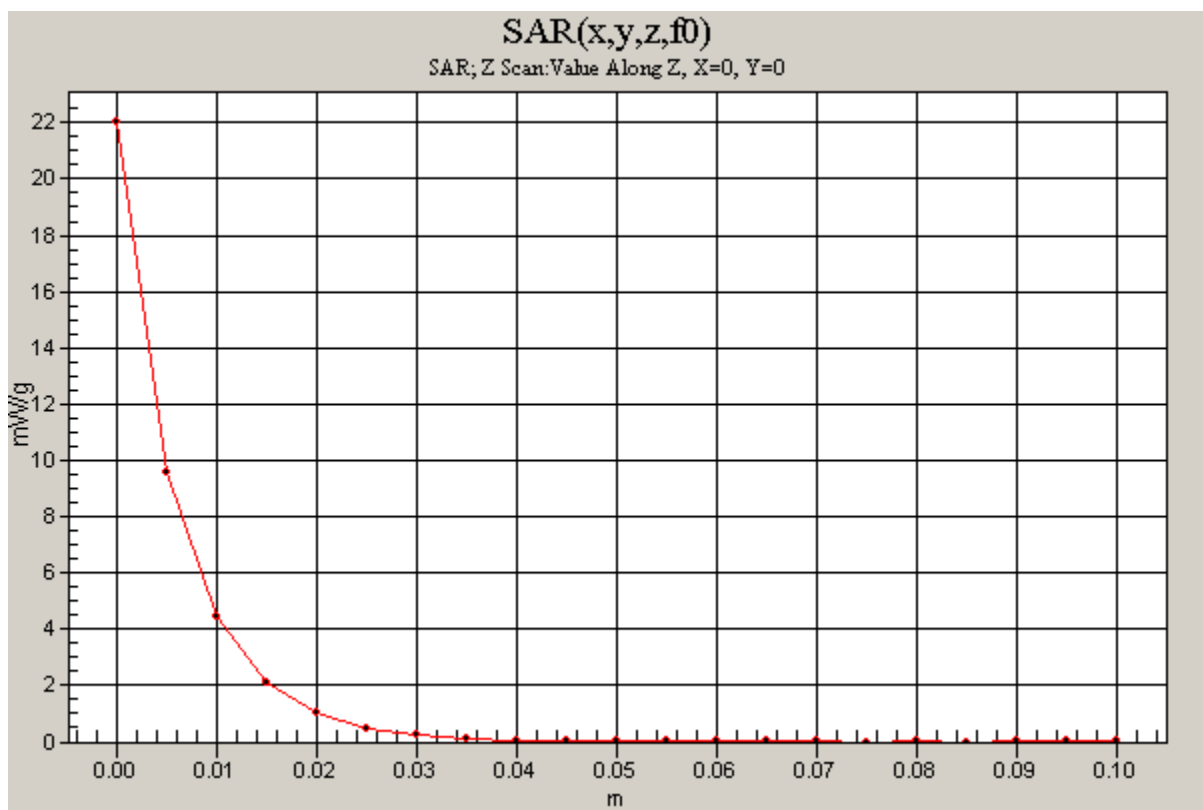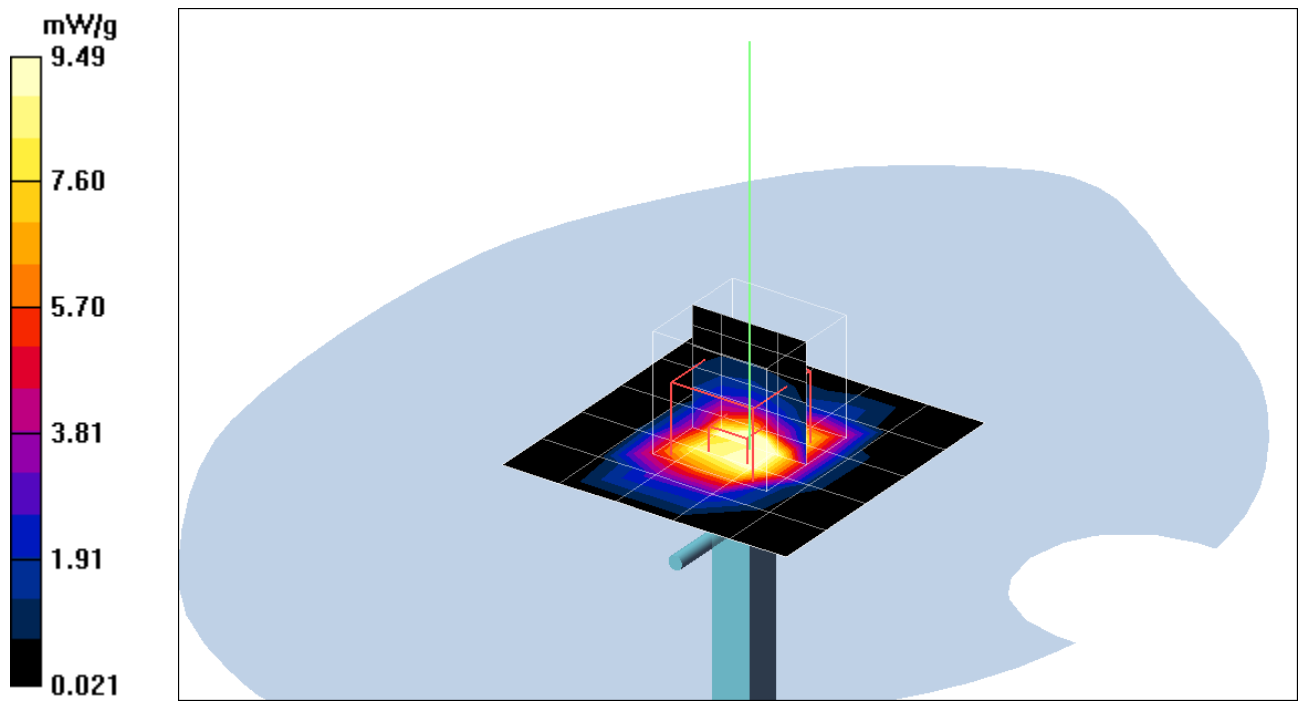

Test Laboratory: Compliance Certification Services Inc.

Test Configuration-1

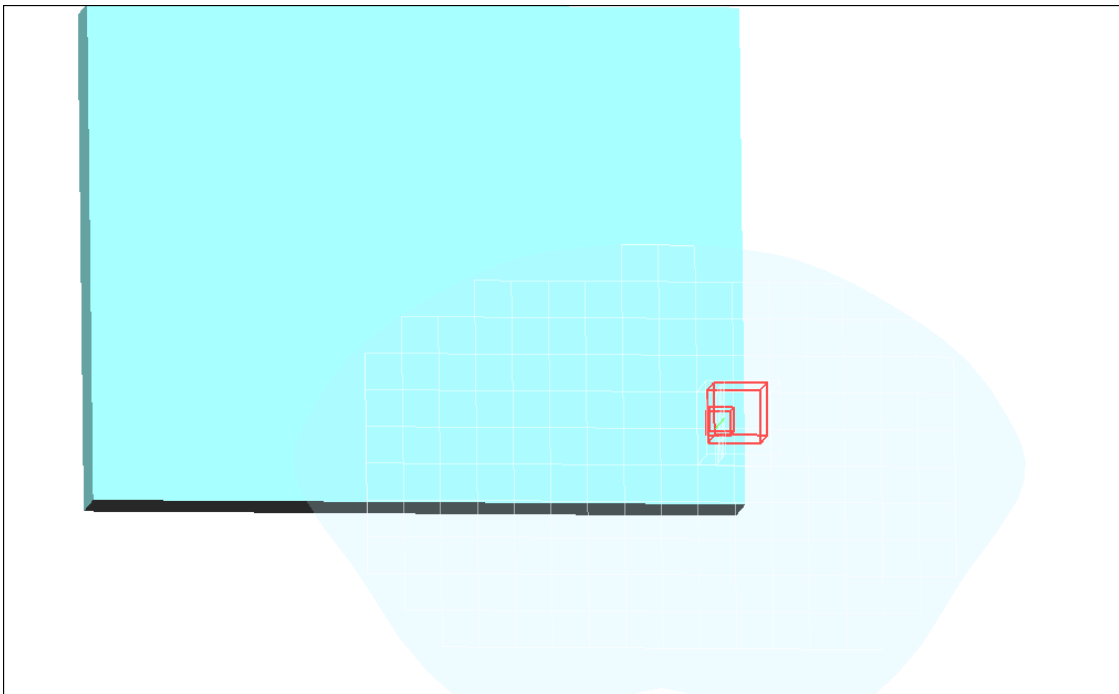

Test Laboratory: Compliance Certification Services Inc.

802.11b Touch mode-Main Ant

DUT: FD10; Type: Notebook built-in (Intel 802.11g); Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 50.8$; $\rho = 1000$ kg/m³

Air Temperature: 25.5 deg C; Liquid Temperature: 24.4 deg C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.14, 6.14, 6.14); Calibrated: 11/19/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 8/24/2004
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Middle CH Rate=1M bit/Area Scan (12x17x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.01 mW/g

Middle CH Rate=1M bit/Z Scan (1x1x101): Measurement grid: dx=20mm, dy=20mm, dz=1mm

Maximum value of SAR (measured) = 0.017 mW/g



Middle CH Rate=1M bit 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 0.993 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 0.01 W/kg

SAR(1 g) = 0.000169 mW/g; SAR(10 g) = 1.87e-005 mW/g

Maximum value of SAR (measured) = 0.014 mW/g

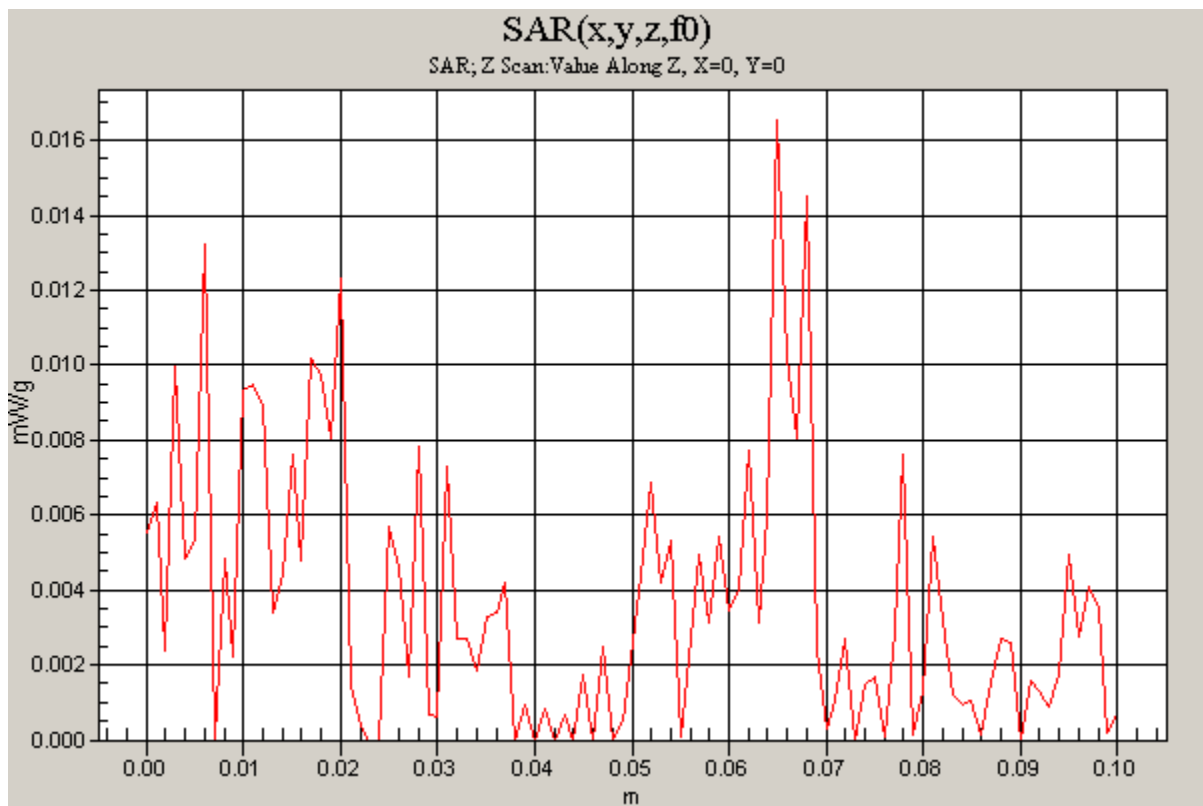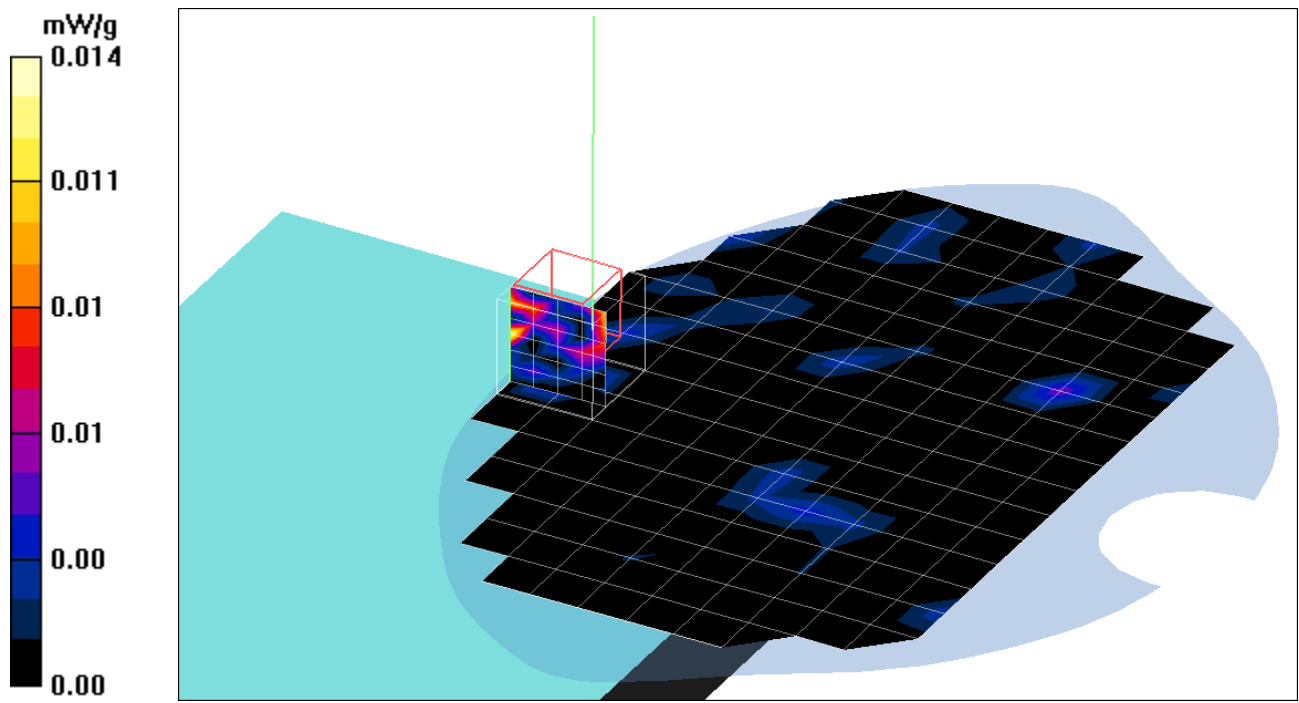

Test Laboratory: Compliance Certification Services Inc.

802.11g Touch mode-Main Ant

DUT: FD10; Type: Notebook built-in (Intel 802.11g); Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 50.8$; $\rho = 1000$ kg/m³

Air Temperature: 25.5 deg C; Liquid Temperature: 24.4 deg C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.14, 6.14, 6.14); Calibrated: 11/19/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 8/24/2004
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Middle CH Rate=6M bit/Area Scan (12x17x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.01 mW/g

Middle CH Rate=6M bit/Z Scan (1x1x101): Measurement grid: dx=20mm, dy=20mm, dz=1mm

Maximum value of SAR (measured) = 0.010 mW/g



Middle CH Rate=6M bit/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 1.505 V/m; Power Drift = 0.2 dB

Peak SAR (extrapolated) = 0.022 W/kg


SAR(1 g) = 0.000675 mW/g; SAR(10 g) = 7.95e-005 mW/g

Maximum value of SAR (measured) = 0.022 mW/g

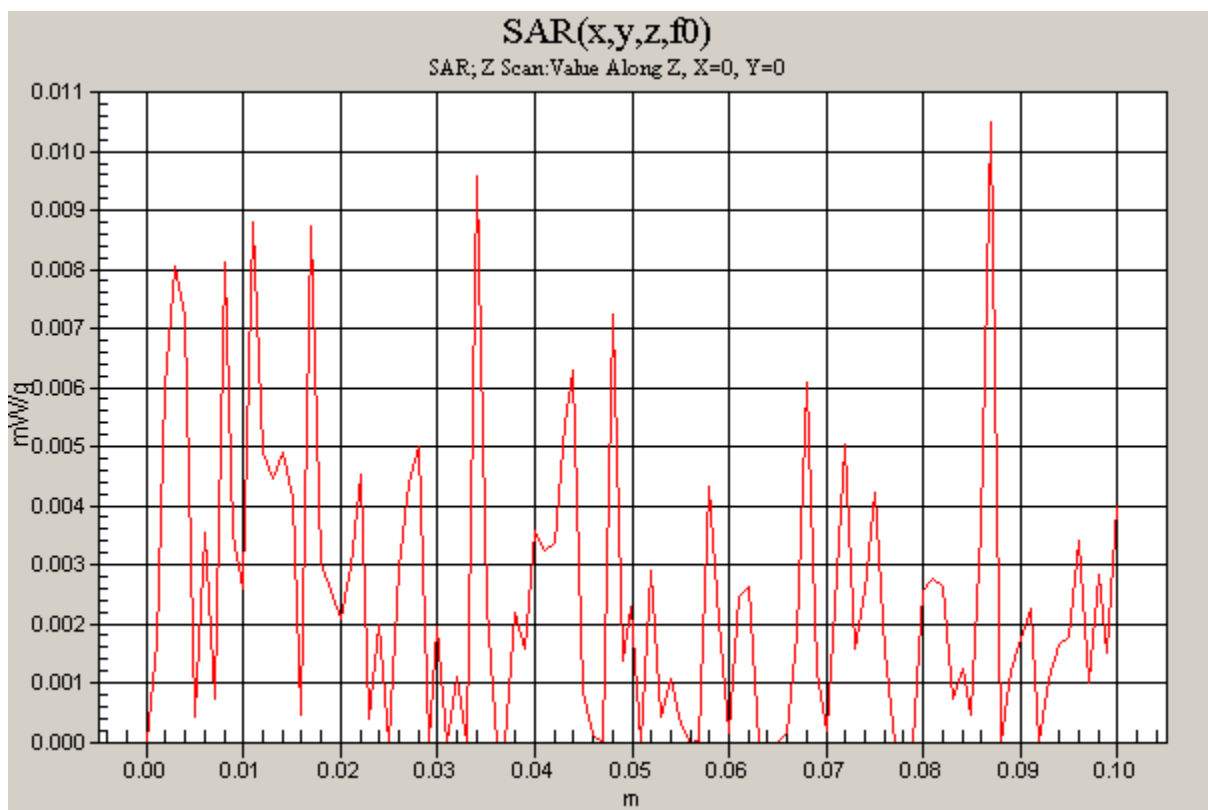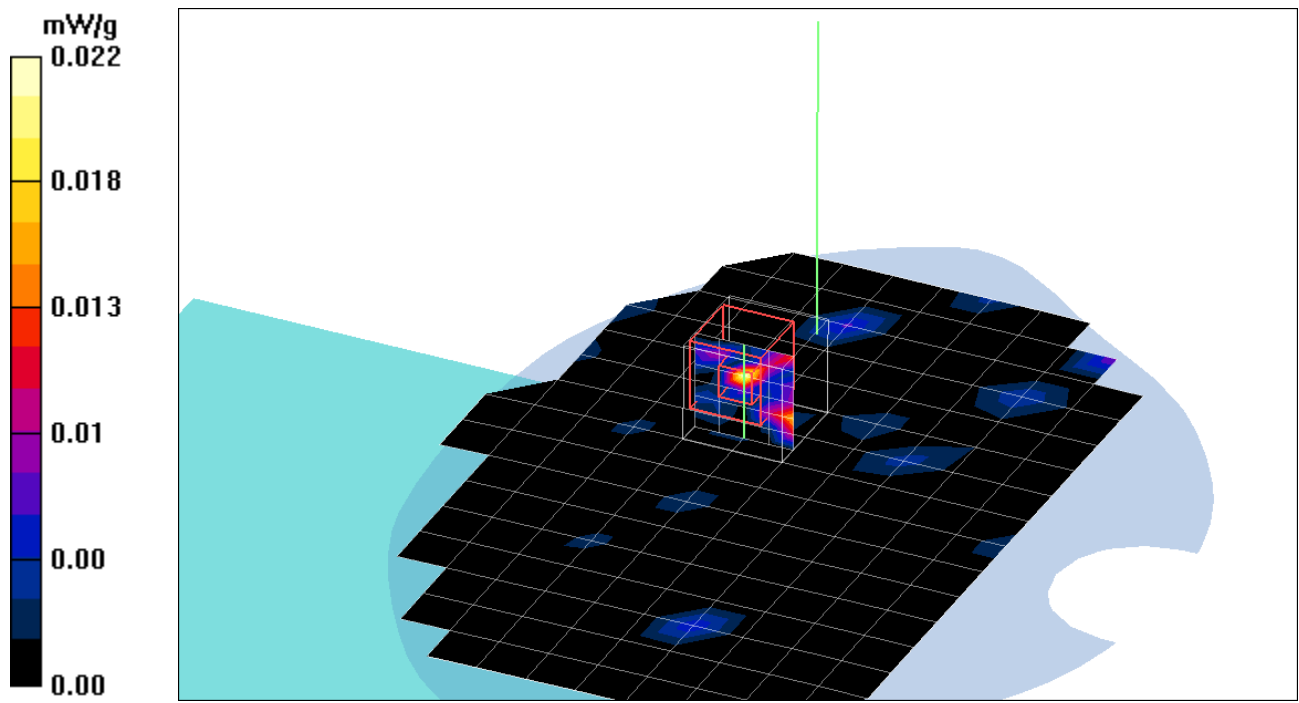

Test Laboratory: Compliance Certification Services Inc.

Test Configuration-2

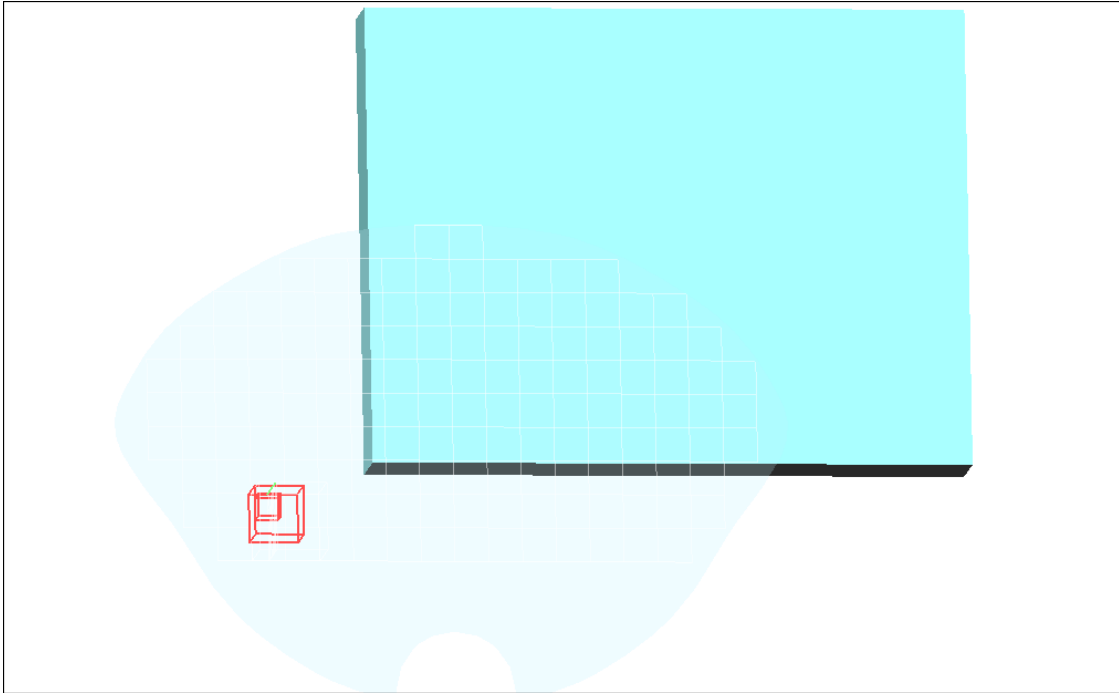

Test Laboratory: Compliance Certification Services Inc.

802.11b Touch mode-Aux Ant

DUT: FD10; Type: Notebook built-in (Intel 802.11g); Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 50.8$; $\rho = 1000$ kg/m³

Air Temperature: 25.5 deg C; Liquid Temperature: 24.4 deg C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.14, 6.14, 6.14); Calibrated: 11/19/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 8/24/2004
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Middle CH Rate=1M bit/Area Scan (11x21x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.01 mW/g

Middle CH Rate=1M bit/Z Scan (1x1x101): Measurement grid: dx=20mm,

dy=20mm, dz=1mm

Maximum value of SAR (measured) = 0.01 mW/g

Middle CH Rate=1M bit/Zoom Scan (5x5x7)/Cube 0: Measurement grid:



dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 0.882 V/m; Power Drift = 0.2 dB

Peak SAR (extrapolated) = 0.01 W/kg

SAR(1 g) = 0.000160 mW/g; SAR(10 g) = 2.98e-005 mW/g

Maximum value of SAR (measured) = 0.013 mW/g

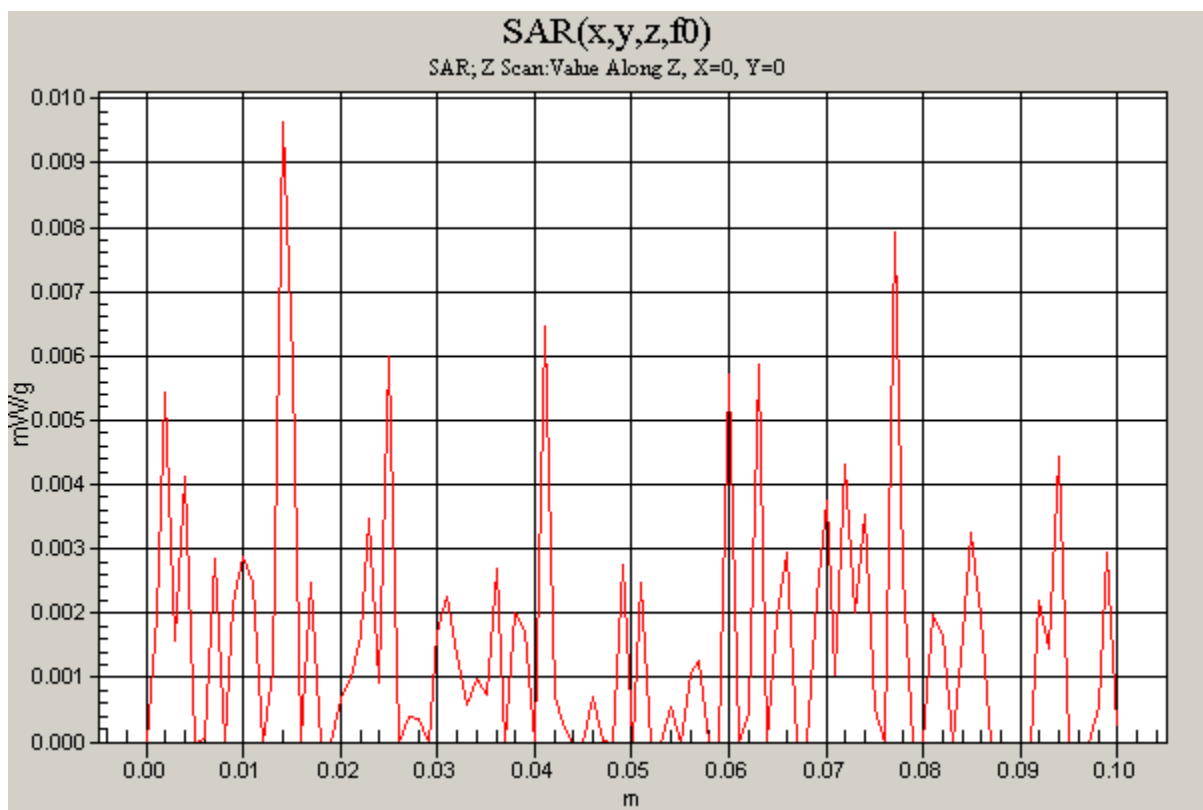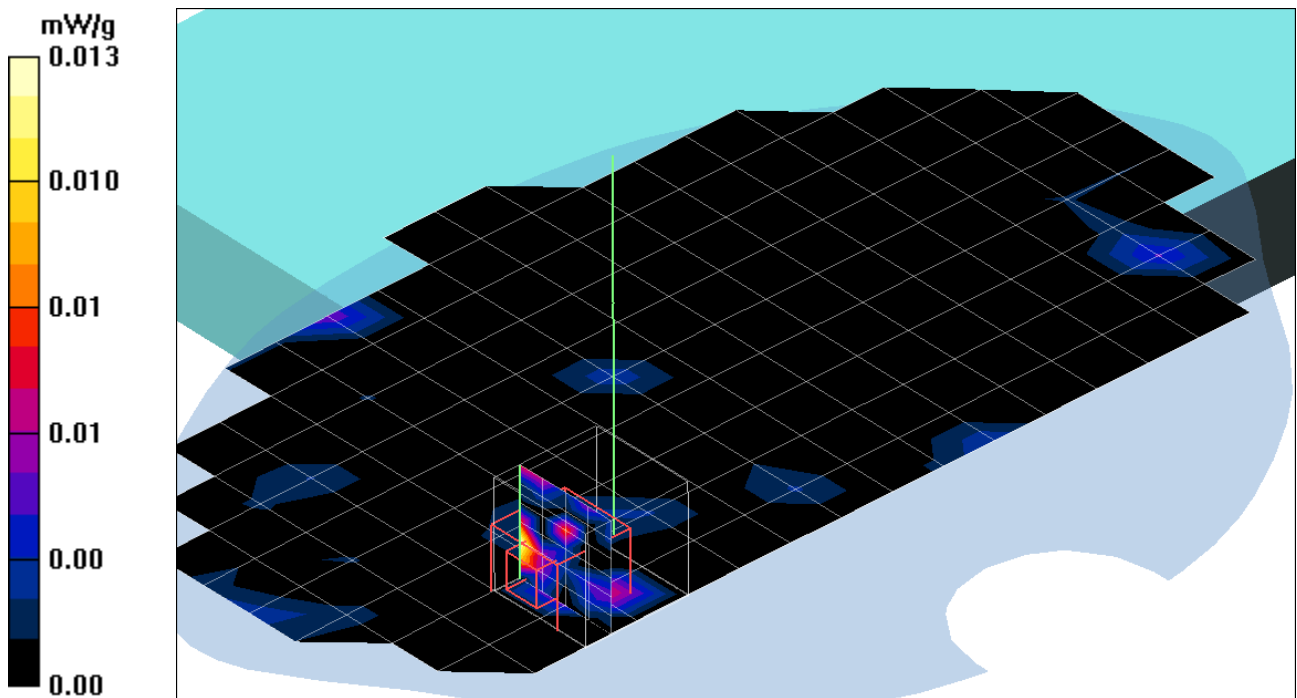

Test Laboratory: Compliance Certification Services Inc.

802.11g Touch mode-Aux Ant

DUT: FD10; Type: Notebook built-in (Intel 802.11g); Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 50.8$; $\rho = 1000$ kg/m³

Air Temperature: 25.5 deg C; Liquid Temperature: 24.4 deg C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.14, 6.14, 6.14); Calibrated: 11/19/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 8/24/2004
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Middle CH Rate=1M bit/Area Scan (12x19x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.01 mW/g

Middle CH Rate=1M bit/Z Scan (1x1x101): Measurement grid: dx=20mm, dy=20mm, dz=1mm

Maximum value of SAR (measured) = 0.014 mW/g

Middle CH Rate=1M bit/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 1.43 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 0.016 W/kg

SAR(1 g) = 0.000471 mW/g; SAR(10 g) = 0.000156 mW/g

Maximum value of SAR (measured) = 0.016 mW/g

