

Page 1 of 17

Applicant:	New-Ray Toys C Unit 9, 12/F., Ho Kowloon, Hong H	uston Centre, 63 Mody Roa	ad, T.S.T. East,
Description of Samples:	Model name: Model no.: Brand name: FCC ID:	Radio Control Vehicles 87853 New-Ray Q4S87853	
Date Samples Received:	2006-10-11		
Date Tested:	2006-10-16		
Investigation Requested:	FCC Part 15 Sub	opart C	
Conclusions:	Federal Commu Regulations Pa	roduct <u>COMPLIED</u> with the unications Commission [F rt 15. The tests were the standards described s Test Report.	CC] Rules and performed in
Remarks:			
	ORAThe	LEE Kam Chuen, E For and on behalf Hong Kong Standards and T	of

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org This report shall not be reproduced unless with prior written approval from the Hong Kong Standards and Testing Centre Ltd. For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of Homepage.



Page 2 of 17

	Cover Content	Page 1 of 17 Page 2-3 of 17
<u>1.0</u>	General Details	
1.1	Test Laboratory	Page 4 of 17
1.2	Applicant Details Applicant HKSTC Code Number for Applicant Manufacturer	Page 4 of 17
1.3	Equipment Under Test [EUT] Description of EUT operation	Page 5 of 17
1.4	Date of Order	Page 5 of 17
1.5	Submitted Samples	Page 5 of 17
1.6	Test Duration	Page 5 of 17
1.7	Country of Origin	Page 5 of 17
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 6 of 17
2.2	Test Standards and Results Summary	Page 6 of 17
<u>3.0</u>	Test Results	
3.1	Emission	Page 7-10 of 17
3.2	Bandwidth Measurement	Page 11-12 of 17

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 3 of 17

Appendix A

List of Measurement Equipment

Appendix B

Duty Cycle Correction During 100 msec

Appendix C

Photographs

Page 16-17 of 17

Page 14-15 of 17

Page 13 of 17





The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 4 of 17

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

Telephone:852 2666 1888Fax:852 2664 4353

1.2 Applicant Details

Applicant

New-Ray Toys Co., Ltd. Unit 9, 12/F., Houston Centre, 63 Mody Road, T.S.T. East, Kowloon, Hong Kong.

Manufacturer

New-Ray Toys Co., Ltd. Unit 9, 12/F., Houston Centre, 63 Mody Road, T.S.T. East, Kowloon, Hong Kong.



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date : 2006-10-17

No. : HM157543

Page 5 of 17


1.3 Equipment Under Test [EUT] Description of Sample Model Name: Radio Control Vehicles Manufacturer: New-Ray Toys Co., Ltd. Brand Name: New-Ray Model Number: 87853 Rating: 9Vd.c ("6F22" size battery x 1)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a New-Ray Toys Co., Ltd., Radio Control Vehicles. The transmitter is a 2 button transmitter. The EUT continues to transmit while button is being pressed, It is pulse transmitter, Modulation by IC, and type is pulse modulation.

1.4 Date of Order

2006-10-11

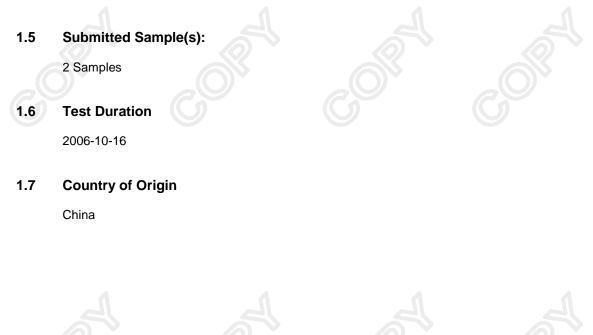



Page 6 of 17

2.0 Technical Details

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 and ANSI C63.4:2003 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary						
Test Condition	Test Requirement	Test Method	Class /	Т	est Resu	lt
			Severity	Pass	Failed	N/A
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.227	ANSI C63.4:2003	N/A	\boxtimes		
Radiated Emissions	FCC 47CFR 15.209	ANSI C63.4:2003	N/A	\boxtimes		
Conducted Emissions on AC, 0.15MHz to 30MHz	FCC 47CFR 15.207	ANSI C63.4:2003	N/A			

Note: N/A - Not Applicable





Page 7 of 17

- 3.0 Test Results
- 3.1 Emission
- 3.1.1 Radiated Emissions (30 1000MHz)


Test Requirement: Test Method: Test Date: Mode of Operation:

FCC 47CFR 15.227 ANSI C63.4:2003 2006-05-09 Tx mode

Test Method:

The sample was placed 0.8m above the ground plane of semi-anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

Semi-anechoic chamber located on the G/F of HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

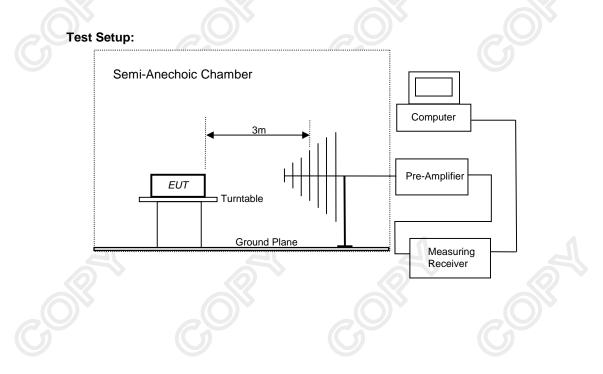



Page 8 of 17

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.227]:

Field Strength of	Field Strength of
Fundamental Emission	Fundamental Emission
[Peak]	[Average]
[µV/m]	[µV/m]
100,000	10,000
	Fundamental Emission [Peak] [μV/m]

Results:

Field Strength of Fundamental Emissions Peak Value								
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field		
	Level @3m Factor Strength Strength Polarity							
MHz	dBµV	dB/m	dBµV/m	μV/m	μV/m			
27.15	59.60	10.3	69.9	3,126.1	100,000	Vertical		

Field Strength of Fundamental Emissions Average							
Frequency	Measured	Adjusted by			Field	Limit @3m	E-Field
riequoney		Duty Cycle		Strength	Strength		Polarity
MHz	dBµV	dB	dB/m	dBµV/m	μV/m	μV/m	
27.15	52.7	-6.9	10.3	63.0	1,412.5	10,000	Vertical

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation. Calculated measurement uncertainty : 30MHz to 1GHz ±4.1dB

> The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 9 of 17

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range	Quasi-Peak Limits
[MHz]	[µV/m]
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results :

Radiated Emissions Quasi-Peak									
Frequency		asured el @3m	Correction Factor	s	Field trength		Field trength	Limit @3m	E-Field Polarity
MHz	d	BμV	dB/m	d	BµV/m	4	μV/m	µV/m	
54.29	<	1.0	10.1	<	11.1	<	3.6	100	Vertical
81.44	<	1.0	9.5	<	10.5	<	3.3	100	Vertical
108.58	<	1.0	10.7	<	11.7	<	3.8	150	Vertical
135.73	<	1.0	10.2	<	11.2	<	3.6	200	Vertical
162.87	<	1.0	11.9	<	12.9	<	4.4	200	Vertical
190.02	<	1.0	12.4	<	13.4	<	4.7	200	Vertical
217.16	<	1.0	13.2	<	14.2	<	5.1	200	Vertical
244.31	<	1.0	15.0	<	16.0	<	6.3	200	Vertical
271.45	<	1.0	16.1	<	17.1	<	7.2	200	Vertical

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation. Calculated measurement uncertainty : 30MHz to 1GHz ±4.1dB









The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 10 of 17

3.1.1 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement:	FCC 47CFR 15.207
Test Method:	ANSI C63.4:2003
Test Date:	N/A
Mode of Operation:	N/A
Results: N/A	

The EUT is operated by a single source of internal battery power [located in the battery compartment], therefore power line conducted emission was deemed unnecessary.



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 11 of 17

3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: Test Method: Test Date: Mode of Operation:

FCC 47 CFR 15.227 ANSI C63.4:2003 (Section 13.1.7) 2006-10-16 On mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.







Page 12 of 17

Limits for 20dB Bandwidth of Fundamental Emission: FCC Limits 20dB Bandwidth **Frequency Range** [MHz] [KHz] [MHz] 27.146 26.4 within 26.96-27.28 20dB Bandwidth of Fundamental Emission 10 STOP 27.2808 MHz ACTV PEAK DET: DETI QP AVG 27.1464 MHz 75.61 dBµV MKR L06 10 dB/ #ATN 0 dB REF 81.0 dBpV VA SB SC FC Corr 27.2800 MHz WP 107 msec START 26.9600 MHz #IF BW 3.0 kHz STOP AVG BW 3 kHz SWP MARKER A 26.4 kHz ACTV DET: PEAK MEAS DET: PEAK QP AVG 26.4 kHz 2 dB .22 dB MKRA 22 L06 10 dB/ REF 81.0 dBµV #ATN 0 dB VA SB SC FC CORR 27.2800 MHz SWP 107 msec START 26.9600 #IF BW 3 MHz .0 kHz STOP AVG BW 3 kHz

> The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Appendix A

List of Measurement Equipment

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.
EM007	SPECTRUM ANALYZER	HEWLETT PACKARD	HP85660B	3144A21192
EM008	SPECTRUM ANALYZER DISPLAY	HEWLETT PACKARD	HP85662A	3144A20514
EM009	QUASI PEAK ADAPTOR	HEWLETT PACKARD	HP85650A	3303A01702
EM010	RF PRESELECTOR	HEWLETT PACKARD	HP85685A	3221A01410
EM011	ATTENUATOR/SWITCH	HEWLETT PACKARD	HP11713A	2508A10595
EM012	PRE-AMPLIFIER	HEWLETT PACKARD	HP8449B	3008A00262
EM020	HORN ANTENNA	ETS-Linggren	3115	4032
EM022	LOOP ANTENNA	ETS-Linggren	6502	1189-2424
EM072	SIGNAL GENERATOR	HEWLETT PACKARD	8640B	1948A11892
EM083	OPEN AREA TEST SITE	HKSTC	N/A	N/A
EM131	EMC ANALYZER	HEWLETT PACKARD	8595EM	3710A00155
EM145	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESCS 30	830245/021
EM195	ANTENNA POSITIONING MAST	ETS-Linggren	2075	2368
EM196	MULTI-DEVICE CONTROLLER	ETS-Linggren	2090	1662
EM215	MULTIDEVICE CONTROLER	ETS-Linggren	2090	00024676
EM216	MINI MAST SYSTEM	ETS-Linggren	2075	00026842
EM217	ELECTRIC POWERED TURNTABLE	ETS-Linggren	2088	00029144
EM218	ANECHOIC CHAMBER	ETS-Linggren	FACT-3	
EM219	BICONILOG ANTENNA	ETS-Linggren	3142C	00029071
EM229	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB40	100248

Line Conducted

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.
EM078	VARIAC	SHANGHAI VOLTAGE	TDGC-3/0.5	N/A
EM081	SMALL SCREENED ROOM	MIKO INST HK	N/A	N/A
EM119	LISN	ROHDE & SCHWARZ	ESH3-Z5	0831.5518.52
EM127	ISOLATION TRANSFORMER 220 TO 300V	WING SUN	N/A	N/A
EM233	PULSE LIMITER	ROHDE & SCHWARZ	ESH3-Z2	100314
EM181	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB7	100072
EM154	SHIELDING ROOM	SIEMENA MATSUSHITA COMPONENTS	N/A	803-740-057-99A
EM197	LISN	ETS-Linggren	4825/2	1193
EM213	DIGITAL POWER METER	VICNOBL	VIP120	00277

Remarks:-

- **Corrective Maintenance** СМ
- Not Applicable or Not Available N/A
- To Be Determined TBD

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 14 of 17


Appendix B

Duty Cycle Correction During 100msec

Each function key sends a different series of characters, but each packet period (45.5msec) never exceeds a series of 6 long (2.2msec) and 10 short (735.0µsec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered 6x2.2msec+10x735.0µsec per 45.5msec=45.1% duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

Remarks:

Duty Cycle Correction = 20Log(0.451) =-6.9dB

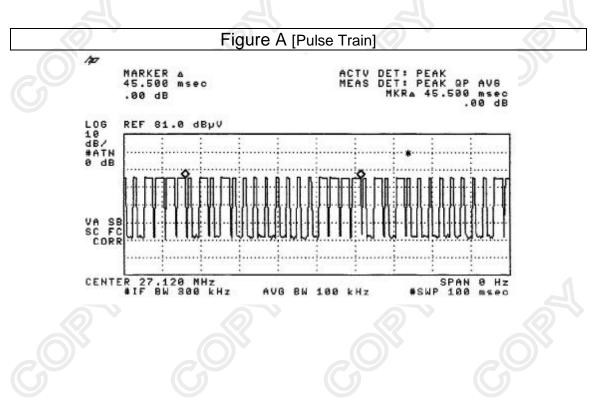

The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.



Page 15 of 17

Figure B [Long Pulse] 10 MARKER & 2.2040 msec ACTV Meas DET: PEAK DET: PEAK QP MKRA 2.2040 QP AVG 40 msec -.23 dB -.23 dB LOG REF 81.0 dBµV 10 dB/ #ATN 0 dB VA SB SC FC CORR CENTER 27.120 MHz #IF BW 300 kHz SPAN 73.5 0 Hz msec AVG BW 100 kHz #SWP Figure C [Short Pulse] 10 MARKER A 735.00 µsec ACTV DET: DET: EAK 735 Q P 0 0 P AVG -.14 dB MKRA 00 µsec -.14 dB L06 10 dB/ #ATN 0 dB REF 81.0 dBpV VA SB SC FC CORR R 27.120 MHz #IF BW 300 kHz SPAN 73.5 0 Hz msec CENTER 100 kHz #SHP AVG BW


> The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 16 of 17



Inner Circuit Bottom View

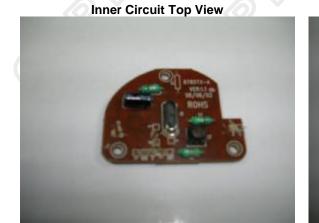






The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 17 of 17

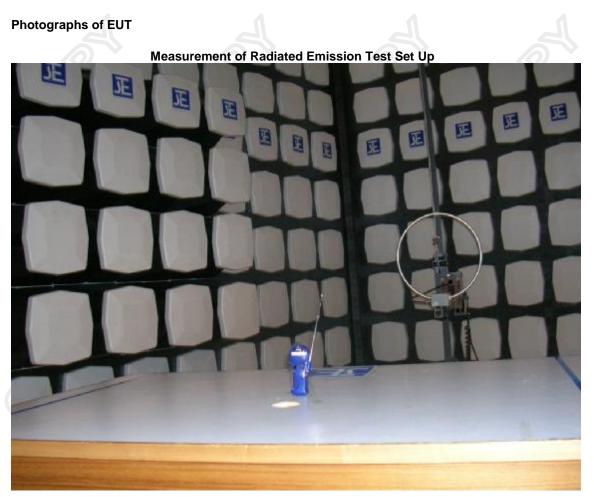

***** End of Test Report *****



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org