

Page 1 of 17

Applicant (NER001):	NEW-RAY TOYS CO., LTD.					
		OUSTON CENTRE,				
	63 MODY ROAI	D, T.S.T. EAST, KOWLOON, H.K.				
Manufacturer:	NEW-RAY TOY	S CO., LTD.				
	UNIT 9, 12/F., H	OUSTON CENTRE,				
	63 MODY ROAL	D, T.S.T. EAST, KOWLOON, H.K.				
Description of Samples:	Product:	B/O Radio Control Ford F-150 STX (2006)				
	Brand Name:	New-Ray				
	Model Number:	87885				
	FCC ID:	Q4S87885				
Date Samples Received:	2007-05-18					
Date Tested:	2007-05-29					
Investigation Requested:	accordance with	Magnetic Interference measurement in FCC 47CFR [Codes of Federal Regulations] ANSI C63.4:2003 for FCC Certification.				
Conclusions:	Federal Commun Regulations Part	oduct <u>COMPLIED</u> with the requirements of ications Commission [FCC] Rules and 15. The tests were performed in accordance s described above and on Section 2.2 in this				
Demoster						

Remarks:

LEE Kam Chuen, ElectroMagnetic Compatibility Department For and on behalf of The Hong Kong Standards and Testing Centre Ltd.

 The Hong Kong Standards and Testing Centre Ltd.

 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

 Tel: (852) 2666 1888
 Fax: (852) 2664 4353

 Homepage:
 www.hkstc.org


 E-mail: hkstc@hkstc.org

 This report shall not be reproduced unless with prior written approval from the Hong Kong Standards and Testing Centre

 Ltd.

 For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of Homepage.



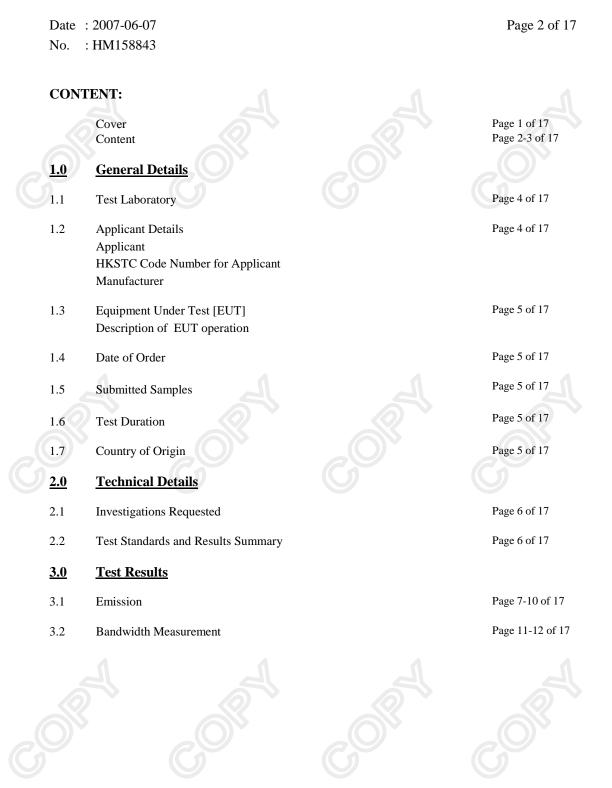

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 3 of 17

Page 13 of 17

Appendix A

List of Measurement Equipment

Appendix B

Duty Cycle Correction During 100 msec

Appendix C

Photographs

Page 16-17 of 17

Page 14-15 of 17





The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



No. : HM158843

Page 4 of 17

<u>1.0</u> General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

Telephone:	852 2666 1888
Fax:	852 2664 4353

1.2 Applicant Details

Applicant

NEW-RAY TOYS CO., LTD. UNIT 9, 12/F., HOUSTON CENTRE, 63 MODY ROAD, T.S.T. EAST, KOWLOON, H.K.

Manufacturer

NEW-RAY TOYS CO., LTD. UNIT 9, 12/F., HOUSTON CENTRE, 63 MODY ROAD, T.S.T. EAST, KOWLOON, H.K.



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



No. : HM158843

Page 5 of 17

1.3 Equipment Under Test [EUT] Description of Sample

Product: Manufacturer: Brand Name: Model Number: Rating: B/O Radio Control Ford F-150 STX (2006) NEW-RAY TOYS CO., LTD. New-Ray 87885 9Vd.c. ("6F22" size battery x 1)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a NEW-RAY TOYS CO., LTD., B/O Radio Control Ford F-150 STX (2006). The transmitter is a 1 joystick transmitter. The EUT continues to transmit while Joystick is being pressed, It is Pulse transmitter, Modulation by IC, and type is Pulse modulation.

1.4 Date of Order

2007-05-18

1.5 Submitted Sample(s):

1 Sample

1.6 Test Duration

2007-05-29

1.7 Country of Origin

China



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



No. : HM158843

Page 6 of 17

2.0 <u>Technical Details</u>

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2006 and ANSI C63.4:2003 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary							
Test Condition	Test Requirement	Test Method	Class /	Г	Test Result		
			Severity	Pass	Failed	N/A	
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.227	ANSI C63.4:2003	N/A	\boxtimes			
Radiated Emissions	FCC 47CFR 15.209	ANSI C63.4:2003	N/A	\boxtimes			
Conducted Emissions on AC, 0.15MHz to 30MHz	FCC 47CFR 15.207	ANSI C63.4:2003	N/A				

Note: N/A - Not Applicable



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 7 of 17

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions (30 – 1000MHz)

Test Requirement: Test Method: Test Date: Mode of Operation:


FCC 47CFR 15.227 ANSI C63.4:2003 2007-05-29 Tx mode

Test Method:

*•

The sample was placed 0.8m above the ground plane on a standard radiated emission test site. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. In the frequency range of 9kHz to 30MHz, The center of the loop antenna shall be 1 meter above the ground and rotated loop axis for maximum reading. The emissions worst-case are shown in Test Results of the following pages.

Semi-anechoic chamber located on the G/F of HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

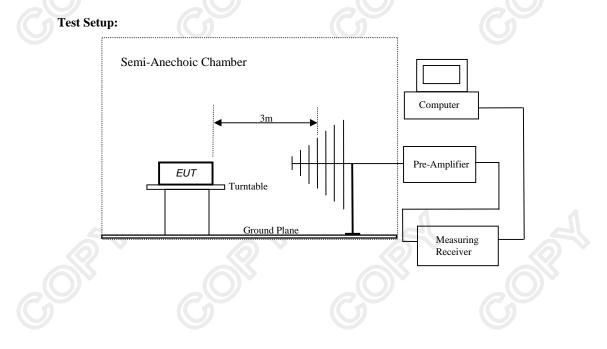

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



No. : HM158843

Page 8 of 17

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.227]:

1		F' 11.04 d. C	F: 11.0;
	Frequency Range of	Field Strength of	Field Strength of
	Fundamental	Fundamental Emission	Fundamental Emission
		[Peak]	[Average]
	[MHz]	[µV/m]	[µV/m]
	26.96-27.28	100,000	10,000

Results of Tx Mode: PASS

Field Strength of Fundamental Emissions								
	Peak Value							
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field		
	Level @3m	Factor	Strength	Strength		Polarity		
MHz	dBµV	dB/m	dBµV/m	μV/m	μV/m	-		
27.145	43.20	19.3	62.5	1,333.5	100,000	Vertical		

Field Strength of Fundamental Emissions Average									
Frequency	Frequency Measured Adjusted by Correction Field Field Limit @3m E-Field								
	Level @3m	Duty Cycle	Factor	Strength	Strength		Polarity		
MHz	dBµV	dB	dB/m	dBµV/m	μV/m	μV/m			
27.145	39.0	-4.2	19.3	58.3	822.2	10,000	Vertical		

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation. Calculated measurement uncertainty: 30MHz to 1GHz ±5.2dB



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



No. : HM158843

Page 9 of 17

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

	Frequency Range [MHz]	Quasi-Peak Limits [µV/m]
	30-88	100
	88-216	150
a	216-960	200
C	Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of Tx Mode: PASS

	Radiated Emissions								
	Quasi-Peak								
Frequency	Me	easured	Correction		Field		Field	Limit @3m	E-Field
	Lev	el @3m	Factor	S	trength	S	trength		Polarity
MHz	d	BμV	dB/m	dB	3μV/m	- 1	µV/m	μV/m	
54.29	<	1.0	8.9	<	9.9	<	3.1	100	Vertical
81.44	<	1.0	8.1	<	9.1	<	2.9	100	Vertical
108.58	<	1.0	10.7	<	11.7	<	3.8	150	Vertical
135.73	<	1.0	10.2	<	11.2	<	3.6	150	Vertical
162.87	<	1.0	11.9	<	12.9	<	4.4	150	Vertical
190.02	<	1.0	12.4	<	13.4	<	4.7	150	Vertical
217.16	<	1.0	12.8	<	13.8	<	4.9	200	Vertical
244.31	<	1.0	15.0	<	16.0	<	6.3	200	Vertical
271.45	<	1.0	16.1	<	17.1	<	7.2	200	Vertical

Remarks:

No further spurious emissions found between lowest internal frequency and 30MHz Correction Factor includes Antenna Factor and Cable Attenuation. Calculated measurement uncertainty: 30MHz to 1GHz ±5.2dB



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 10 of 17

3.1.1	Conducted Emissio	ons (0.15MHz to 30MHz)	
	Test Requirement: Test Method: Test Date: Mode of Operation:	FCC 47CFR 15.207 ANSI C63.4:2003 N/A N/A	
Results	:: N/A		

The EUT is operated by a single source of internal battery power [located in the battery compartment], therefore power line conducted emission was deemed unnecessary.



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 11 of 17

3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: Test Method: Test Date: Mode of Operation: FCC 47 CFR 15.227 ANSI C63.4:2003 (Section 13.1.7) 2007-05-29 On mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Limits for 20dB Bandwidth of Fundamental Emission: 20dB Bandwidth Frequency Range FCC Limits [MHz] [KHz] [MHz] 27.145 92.8 within 26.96-27.28 **20dB Bandwidth of Fundamental Emission** MKRA -92.8 kHz .13 dB REF 99.0 dBµV AT 10 dB PEAK L06 10 dB/ MARKER ۵ 2.8 kHz 3 dB VA SB SC FC Corr .9600 MHz BW 10 kHz START T 26 #RES 27.2800 MHz SWP 30.0 msec STOP VBW 10 kHz



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



No. : HM158843

Appendix A

List of Measurement Equipment

Radiated Emission							
EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.			
EM007	SPECTRUM ANALYZER	HEWLETT PACKARD	HP85660B	3144A21192			
EM008	SPECTRUM ANALYZER DISPLAY	HEWLETT PACKARD	HP85662A	3144A20514			
EM009	QUASI PEAK ADAPTOR	HEWLETT PACKARD	HP85650A	3303A01702			
EM010	RF PRESELECTOR	HEWLETT PACKARD	HP85685A	3221A01410			
EM011	ATTENUATOR/SWITCH	HEWLETT PACKARD	HP11713A	2508A10595			
EM012	PRE-AMPLIFIER	HEWLETT PACKARD	HP8449B	3008A00262			
EM020	HORN ANTENNA	ETS-Linggren	3115	4032			
EM022	LOOP ANTENNA	ETS-Linggren	6502	1189-2424			
EM072	SIGNAL GENERATOR	HEWLETT PACKARD	8640B	1948A11892			
EM083	OPEN AREA TEST SITE	HKSTC	N/A	N/A			
EM131	EMC ANALYZER	HEWLETT PACKARD	8595EM	3710A00155			
EM145	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESCS 30	830245/021			
EM195	ANTENNA POSITIONING MAST	ETS-Linggren	2075	2368			
EM196	MULTI-DEVICE CONTROLLER	ETS-Linggren	2090	1662			
EM215	MULTIDEVICE CONTROLER	ETS-Linggren	2090	00024676			
EM216	MINI MAST SYSTEM	ETS-Linggren	2075	00026842			
EM217	ELECTRIC POWERED TURNTABLE	ETS-Linggren	2088	00029144			
EM218	ANECHOIC CHAMBER	ETS-Linggren	FACT-3	-			
EM219	BICONILOG ANTENNA	ETS-Linggren	3142C	00029071			
EM229	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB40	100248			

Line Conducted

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.
EM078	VARIAC	SHANGHAI VOLTAGE	TDGC-3/0.5	N/A
EM081	SMALL SCREENED ROOM	MIKO INST HK	N/A	N/A
EM119	LISN	ROHDE & SCHWARZ	ESH3-Z5	0831.5518.52
EM127	ISOLATION TRANSFORMER 220 TO 300V	WING SUN	N/A	N/A
EM233	PULSE LIMITER	ROHDE & SCHWARZ	ESH3-Z2	100314
EM181	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB7	100072
EM154	SHIELDING ROOM	SIEMENA MATSUSHITA COMPONENTS	N/A	803-740-057-99A
EM197	LISN	ETS-Linggren	4825/2	1193

Remarks:-

- CM Corrective Maintenance
- N/A Not Applicable or Not Available
- TBD To Be Determined

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.

For Conditions of Issuance of this test report, please refer to the overleaf or Homepage

Page 13 of 17



Page 14 of 17


Appendix B

Duty Cycle Correction During 100msec

Each function key sends a different series of characters, but each packet period never exceeds a series of 4 long (1.6msec) and 10 short (550 μ sec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered (1600 μ sec x 4) + (550 μ secx10) per 19.5msec=61% duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

Remarks:

Duty Cycle Correction = 20Log(0.61) =-4.2dB

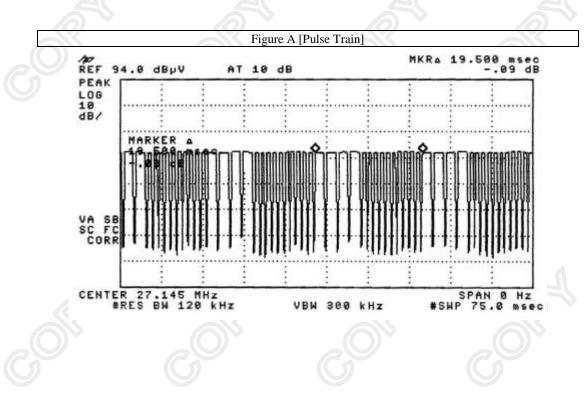


The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 15 of 17

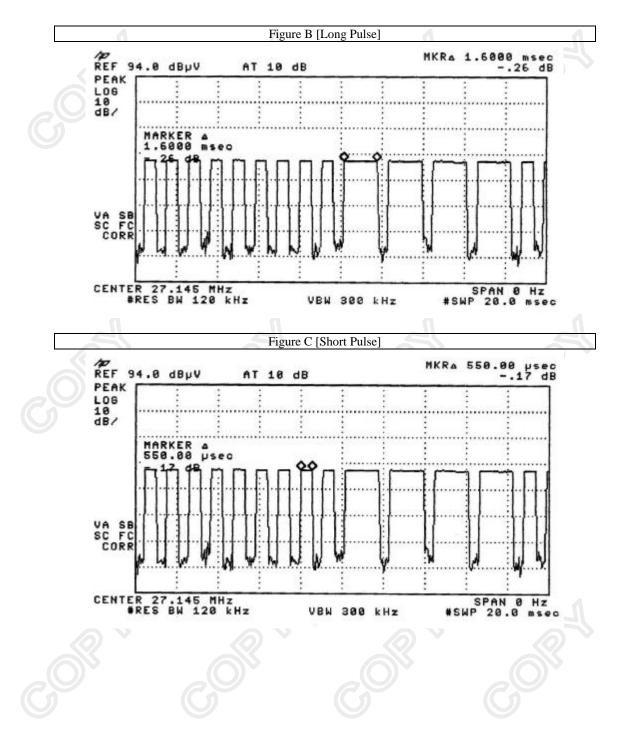

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 16 of 17






The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 17 of 17

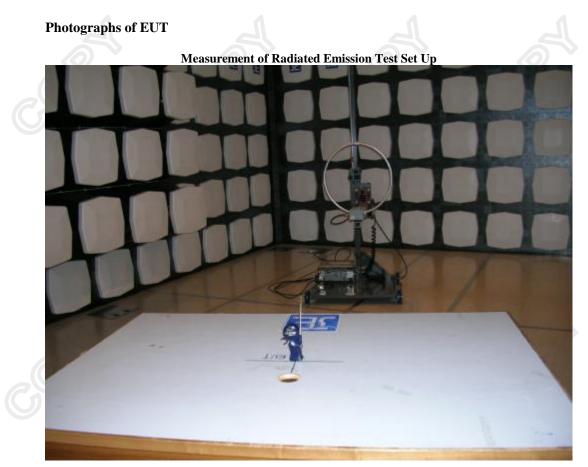

***** End of Test Report *****



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org