No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Report No.: SZEM120500267401

Email: ee.shenzhen@sgs.com Page: 1 of 14

FCC REPORT

Application No.: SZEM1205002674ET (SGS HK NO.: HKHL1205004556EL)

Applicant: NEW-RAY TOYS CO LTD

Product Name: RADIO CONTROL, WIRE CONTROL, BATTERY OPERATED

MODEL SERIES (CARS, TRUCKS, OFF-ROAD TRUCK, TANK,

BOAT, MOTORCYCLE, ATV, PLANE, SNOWMOBILE,

FORKLIFT, CONSTRUCTION & FARM VEHICLES, TRACTORS, LONG HAULER, TRAIN, FIRE ENGINE, MONSTER TRUCK,

WILD HUNTING RIFLE, WILD ADVENTURE SET)

 Item No.(EUT):
 87563

 Add Item No.:
 87573

FCC ID: Q4S89923

Standards: FCC CFR Title 47 Part 15 (2010)

Date of Receipt: 2012-05-21

Date of Test: 2012-05-21 to 2012-05-23

Date of Issue: 2012-06-15

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

Report No.: SZEM120500267401

Page: 2 of 14

2 Test Summary

Test Item	Test Requirement	Test method	Result	
Radiated Emission	adiated Emission FCC CFR Title 47 Part 15C		PASS	
(25MHz to 1GHz)	Section 15.227	ANSI C63.10 (2009)	FA33	
Occupied Bandwidth	FCC CFR Title 47 Part 15C	ANSI C63.10 (2009)	DACC	
Occupied Bandwidth	Section 15.215	ANSI C63.10 (2009)	PASS	

Remark:

Item No.: 87563/87573

Only the item 87563 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above items, with difference being model name and color.

P.O./Ref No.:

87563/87573/87533/87543/89645A/83645B/89655A/89703A/83703B/89695A/83695B/89935/88373/85 353/88583/87955/87775/88605/89565/89555/89685A/83685B/89713A/83713B/SS-89585/SS-83585/SS-89715/89675A/83675B/01973/01983/01985/88643/85383A/85383B/88473/88203/86283/ 86253/86263/86273/87293/86163/86173/86183/86196/88525/88515/87875/88215A/88215B/88653/87 943/88023/87913/87863/88185/88103/88063/87563/87533/87543/87573/88613/88573/88683A/88683 B/88195/87833A/87833B/88003A/88003B/01663/01673/88553/01683/01693/01953/00843A/00843B/S S-00963/67925/01793A/01793B/01643A/01643B/01643C/08023/08163/08143/08123/08503/08443/ 08463/08605/01063/00783/32005/32035/32045/32015/32025/01013A/01013B/01033/33705/01043/01 715/01785/05605/01053/00817/00827/00645/SS-88553A/89933/87773/87953/05605AST/05605/ 33705/SS-00645B/00655A/61395/61505/61515/61525/89663A/83663B/89425A/83425B/89695A/ 83695B/89935/88373/85353/88585/87955/87775/88605/89565/89555/88693/88673/88473/83685B/88 704/88643/85383/86253A/86263/86273/86163/86173/86183/86193/87563/87533/87543/87573/88515/ 88525/88215/87943/88714/87865/87863/87913/88103/88185/88573/88623/88613/88684/88195/8800 3/88595/83595/88453A/88463B/88233I/88233R/05763/01663/88553/01683/01693/01953/05633/0564 3/05653/05675/00664/00843/01053/67925/01643/08023/08163/08143/08123/08503/08443/08463/086 05/01063/00783/01013/01043/01785/00695/00827/00645/20013B/20023B/01913I/00814/89425A/896 95A/89703A/B/88605/88585/87775/85353/83685B/88693/88673/88473/88704/88643/85383/88613/88 573/88595/83595/88233R/88653/SS-87943/SS-87933B/88714/88525/87843/86253/86263/86273/ 87563/87533/87543/87573/87913/88103/88185/87865/88195/01663/01693/88553/00664/01013/0103 3/61395I/00817/08403/08443/58003I/01963/SS-00675B/89425/89695/SS-89705A/88373/88605/ 895551/88585/877751/88653/88503/SS-15655/85353/88704/88643/88595/83595/88613/88693/ 88673/88473/88714/88023/88515/88525/88215/87943/87843/86263/86273/86283/88103/87913/8818 5/88063/87865/88003/01013/87833/88195/88553/01953/01663/01673/01693/05633/05653/05763/056 75/00664/08605/08483/08503/SS-08513/SS-00675B/00695/00645/00655/00845/89425A/89663A/ 89695A/88603I/SS-89705A/SS-83705B/88373/88653/88025/15763/46793/88585/87775I/85353/ 88033I/89555I/88643/85383I/50155I/71066/01793/89685A/83685B/87933/00783/13083/88023/16813/ 15613IA/87843/01653/88553/01953/05653/01693/05633/88063/87913/33253I/58003I/AS-87955/AS-89753/AS-89935/AS-88595/AS-86193/SS-87063/SS-87073/SS-20013A/SS-66085/SS-86303D/SS-00670B/SS-86180/SS-86190/88315I/40003I/01913I/01963/86163/86173/86183/86193/88704/88643/ 88525/88573/88613/88623/88684/88003/87865/87913/88103/87943/88714/88195/88273I/01683/0167 3/88553/01953/05633/05643/05763/05675C/05675D/08023/08163/08143/08123/00664/SS-00963/ 00827/01013/01063/00695/01913A/01923A/20013B/20023B

Report No.: SZEM120500267401

Page: 3 of 14

3 Contents

_	^	OOVER RACE	Page
1	C	COVER PAGE	I
2	Т	TEST SUMMARY	2
3	С	CONTENTS	3
4	G	GENERAL INFORMATION	4
	4.1	CLIENT INFORMATION	4
	4.2	GENERAL DESCRIPTION OF EUT	
	4.3	TEST ENVIRONMENT AND MODE	4
	4.4	DESCRIPTION OF SUPPORT UNITS	4
	4.5	TEST LOCATION	5
	4.6	TEST FACILITY	5
	4.7	DEVIATION FROM STANDARDS	
	4.8	ABNORMALITIES FROM STANDARD CONDITIONS	5
	4.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	4.10	TEST INSTRUMENTS LIST	6
5	Т	EST RESULT & MEASUREMENT DATA	7
	5.1	Antenna requirment	7
	5.2	RADIATED EMISSIONS	
	5.3	OCCUPIED BANDWIDTH	13-14

Report No.: SZEM120500267401

Page: 4 of 14

4 General Information

4.1 Client Information

Applicant:	NEW-RAY TOYS CO LTD
Address of Applicant:	UNIT 4, 9-11, 12/F, Houston Centre, No.63 Mody Road, TST East, Kowloon,
	Hong Kong

4.2 General Description of EUT

Name:	RADIO CONTROL, WIRE CONTROL, BATTERY OPERATED MODEL SERIES (CARS, TRUCKS, OFF-ROAD TRUCK, TANK, BOAT, MOTORCYCLE, ATV, PLANE, SNOWMOBILE, FORKLIFT, CONSTRUCTION & FARM VEHICLES, TRACTORS, LONG HAULER, TRAIN, FIRE ENGINE, MONSTER TRUCK, WILD HUNTING RIFLE, WILD ADVENTURE SET)
Item No.:	87563/87573
Labeled Age Grading:	3+
Country of Origin:	CHINA
Sample Type:	Portable production
Operation Frequency:	27.145MHz
Channel Number:	1
Antenna Type:	Dedicated
Power Supply:	9.0V DC (9.0V x 1 "6F22" Size Battery)

4.3 Test Environment and Mode

Operating Environment	Operating Environment:			
Temperature:	24.0 °C			
Humidity:	50 % RH			
Atmospheric Pressure:	1006 mbar			
Test mode:				
Transmitting mode:	Keep the EUT in transmitting mode.			

4.4 Description of Support Units

The EUT has been tested independent unit.

Report No.: SZEM120500267401

Page: 5 of 14

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

4.7 Deviation from Standards

None.

4.8 Abnormalities from Standard Conditions

None

4.9 Other Information Requested by the Customer

None.

Report No.: SZEM120500267401

Page: 6 of 14

4.10 Test Instruments List

RE i	RE in Chamber								
Item	Test Equipment	Manufacturer Model No.		Inventory No.	Cal.Due date (yyyy-mm-dd)				
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2013-06-10				
2	EMI Test Receiver	Rohde & Schwarz	& Schwarz ESIB26 SEL0023		2013-05-17				
3	EMI Test software	AUDIX	E3	SEL0050	N/A				
4	Coaxial cable	SGS	N/A	SEL0028	2013-05-29				
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2012-10-29				
6	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2012-10-29				
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2013-05-17				
8	Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	2012-10-28				

RF c	RF conducted									
Item	Test Equipment	Manufacturer	Model No.		Cal.Due date (yyyy-mm-dd)					
1	Spectrum Analyzer	Rohde & Schwarz	FSP 30	SEL0154	2012-10-23					
2	Coaxial cable	SGS	N/A	SEL0028	2013-05-29					

General used equipment							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0102 to SEL0103	2012-10-27		
2	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0101	2012-10-27		
3	Barometer	ChangChun	DYM3	SEL0088	2013-05-17		

Report No.: SZEM120500267401

Page: 7 of 14

5 Test Result & Measurement Data


5.1 Antenna requirment

Standard requirement: FCC Part15 C Section 15.203

15.203 Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

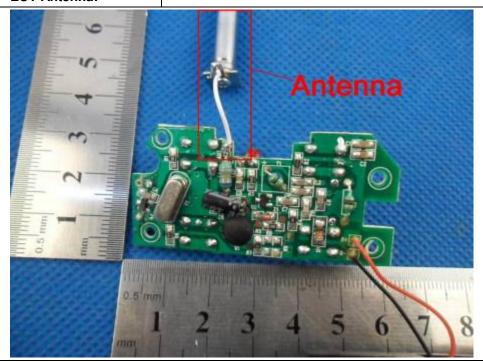

Report No.: SZEM120500267401

Page: 8 of 14

5.2 Radiated Emissions

Test Requirement:	FCC Part15 C Sec	FCC Part15 C Section 15.227							
Test Method:	ANSI C63.10: 2009								
Measurement Distance:	3m (Semi-Anechoic Chamber)								
ERP Limit:	Carrier Power will	not excee	d 80dl	BuV/m at 3r	m (Averag	ıe).			
Out of Band Emissions	Out of band emiss	ions shall	not ex	ceed:					
Limit:	Frequenc	;y	Lim	it (dBuV/m	@3m)	Remark			
	30MHz-88MHz 40.0 Quasi-peak Value								
	88MHz-216MHz 43.5 Quasi-peak Value								
	216MHz-960MHz 46.0 Quasi-peak Valu								
	960MHz-10	GHz		54.0		Quasi-peak Value			
	Above 1G	Ш -э		54.0		Average Value			
	Above IG	ПΖ		74.0		Peak Value			
Receiver Setup:	Frequency	Detect	or	RBW	VBW	Remark			
	25MHz- 30MHz	IHz- 30MHz Quasi-p		9kHz	30kHz	Quasi-peak Value			
	30MHz-1GHz	1GHz Quasi-p		100kHz	300kHz	Quasi-peak Value			
	Above 1GHz	Peak	(1MHz	3MHz	Peak Value			

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."


Report No.: SZEM120500267401

Page: 9 of 14

Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case. Only the test worst case mode is recorded in the report.

Test Setup:






Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

Test Mode:	Fransmitting mode				
Instruments Used:	Refer to section 4.10 for details				
Test Result:	Pass				

Report No.: SZEM120500267401

Page: 10 of 14

27.145MHz Mode

Test Procedure: For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.10: 2009. The center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

Test Result:

Intentional emission

Test Frequency	Peak (d	Peak (dBμV/m)		Margin (dB)	
(MHz)	Vertical	Horizontal	(dBµV/m)	Vertical	Horizontal
27.145	75.16	66.67	100.00	24.84	33.33

Remark:


As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

Report No.: SZEM120500267401

Page: 11 of 14

Out of Band Emissions

Vertical

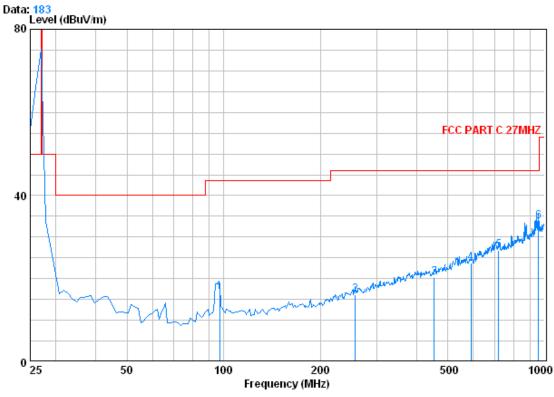

Condition : FCC PART C 27MHZ 3m 0042673 VERTICAL


Job No. : 2674RF Mode : TX ON

		Cable	intenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	97.150	1.17	8.99	27.20	33.92	16.88	43.50	-26.62
2	257.050	1.71	12.45	26.51	28.43	16.08	46.00	-29.92
3	453.025	2.43	16.96	27.46	28.32	20.25	46.00	-25.75
4	589.525	2.69	19.51	27.56	29.23	23.87	46.00	-22.13
5	718.225	2.96	21.60	27.39	29.67	26.84	46.00	-19.16
6	958.075	3.66	23.50	26.51	33.05	33.70	46.00	-12.30

Report No.: SZEM120500267401

Page: 12 of 14

Horizontal

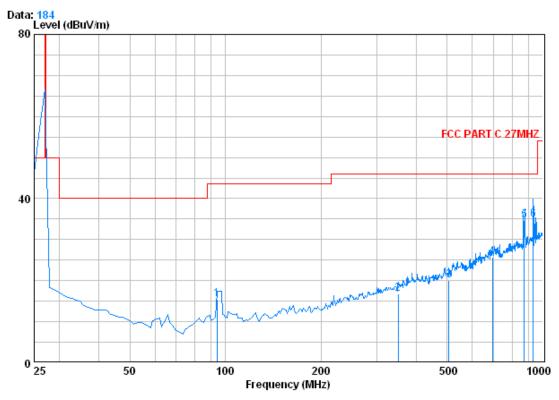

Condition : FCC PART C 27MHZ 3m 0042673 HORIZONTAL

Job No. : 2674RF Mode : TX ON

		Cablei	lntenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	94.225	1.14	8.88	27.21	32.66	15.47	43.50	-28.03
2	350.650	2.06	15.43	26.79	25.98	16.69	46.00	-29.31
3	506.650	2.61	18.02	27.69	27.19	20.13	46.00	-25.87
4	693.850	2.89	21.56	27.42	28.60	25.63	46.00	-20.37
5	874.225	3.50	23.00	26.89	35.12	34.74	46.00	-11.26
6 @	932.725	3.63	23.30	26.61	34.59	34.92	46.00	-11.08

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

Report No.: SZEM120500267401

Page: 13 of 14

5.3 Occupied Bandwidth

Test Requirement:	FCC Part 15 C Section 15.215 (C)					
Test Method:	ANSI C63.10: 2009					
Limit:	Operation within the band 26.960 – 27.280 MHz					
Requirement :	Intentional radiators operating under the alternative provisions to the general					
	emission limits, as contained in §§15.217 through 15.257 and in subpart E					
	of this part, must be designed to ensure that 20dB bandwidth of the					
	emission, or whatever bandwidth may otherwise be specified in the specific					
	rule section under which the equip compliance with the 20dB attenuation					
	specification may base on measurement at the intentional radiator's					
	antenna output terminal unless the intentional radiator uses a permanently					
	attached antenna, in which case compliance shall be deomonstrated by					
	measuring the radiated emissions.					
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane					
Test Mode:	Transmitting mode					
Instruments Used:	Refer to section 4.10 for details					
Test Result:	Pass					

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Report No.: SZEM120500267401

Page: 14 of 14

Test Result:

