
FCC Part 90 Test Report

Report No.: AGC20X120801F2

TEST NAME : FCC Part 90
FCC ID : Q5EPT6700
PRODUCT DESIGNATION : Two-way Radio
BRAND NAME : Kirisun
TEST MODEL NAME : PT6700
CLIENT : Kirisun Communications Co., Ltd
DATE OF ISSUE : Aug. 24, 2012
STANDARD(S) : FCC Part 90 Rules

Attestation of Global Compliance (Shenzhen) Co., Ltd.

CAUTION: This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

VERIFICATION OF COMPLIANCE

Applicant:	Kirisun Communications Co., Ltd
	5Flr, ROBETA Building, No.1, QiMin Road, Song Ping Shan Area, Science & Industry Park, Nanshan District, Shenzhen City, China
Manufacturer:	Kirisun Communications Co., Ltd
	5Flr, ROBETA Building, No.1, QiMin Road, Song Ping Shan Area, Science & Industry Park, Nanshan District, Shenzhen City, China
Product Description:	Two-way Radio
Brand Name:	Kirisun
Model Name:	PT6700
File Number:	AGC20X120801F2
Date of Test:	Aug.16,2012 to Aug.22,2012

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2003 and TIA/EIA 603. The sample tested as described in this report is in compliance with the FCC Rules Part 90 requirements.

The test results of this report relate only to the tested sample identified in this report.

Tested By 

Bart Xie Aug. 24, 2012

Reviewed By 

Forrest Lei Aug. 24, 2012

Approved By 

Solger Zhang Aug. 24, 2012

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION.....	4
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 SPECIAL ACCESSORIES	5
1.6 EQUIPMENT MODIFICATIONS.....	5
2. SYSTEM TEST CONFIGURATION	6
2.1 EUT CONFIGURATION.....	6
2.2 EUT EXERCISE.....	6
2.3 GENERAL TECHNICAL REQUIREMENTS.....	6
2.4 CONFIGURATION OF TESTED SYSTEM.....	6
3. SUMMARY OF TEST RESULTS	7
4. DESCRIPTION OF TEST MODES	8
5. CONDUCTED LIMITS	9
5.1 PROVISIONS APPLICABLE.....	9
5.2 MEASUREMENT PROCEDURE.....	9
5.3 TEST SETUP BLOCK DIAGRAM.....	10
5.4 TEST EQUIPMENT USED	10
5.5 TEST RESULT	11
6. FREQUENCY TOLERANCE	13
6.1 PROVISIONS APPLICABLE.....	13
6.2 MEASUREMENT PROCEDURE.....	13
6.3 TEST SETUP BLOCK DIAGRAM.....	14
6.4 TEST EQUIPMENT USED:	14
6.5 TEST RESULT	14
7. EMISSION BANDWIDTH	17
7.1 PROVISIONS APPLICABLE.....	18
7.2 MEASUREMENT PROCEDURE.....	18
7.3 TEST SETUP BLOCK DIAGRAM.....	18
7.4 MEASUREMENT EQUIPMENT USED:	18
7.5 MEASUREMENT RESULT:	19
8. UNWANTED RADIATION	20
8.1 PROVISIONS APPLICABLE.....	20
8.2 MEASUREMENT PROCEDURE.....	20

8.3 TEST SETUP BLOCK DIAGRAM.....	21
8.4 MEASUREMENT EQUIPMENT USED:.....	23
8.5 MEASUREMENT RESULTS:.....	23
8.6 EMISSION MASK PLOT	25
9. MODULATION CHARACTERISTICS	26
9.1 PROVISIONS APPLICABLE.....	26
9.2 MEASUREMENT METHOD	26
9.3 MEASUREMENT INSTRUMENTS.....	26
9.4 MEASUREMENT RESULT	27
10.1 PROVISIONS APPLICABLE.....	30
10.2 TEST PROCEDURE.....	30
10.3 TEST INSTRUMENTS.....	30
10.4 TEST RESULT.....	31
10.4 CONDUCT SPURIOUS PLOT	32
11. TRANSMITTER FREQUENCY BEHAVIOR	33
11.1 PROVISIONS APPLICABLE	33
11.2 TEST METHOD	33
11.3 TEST INSTRUMENTS	33
12. RADIATED EMISSION ON RECEIVING MODE	37
12.1 PROVISIONS APPLICABLE	37
12.2 TEST METHOD.....	37
12.3 TEST INSTRUMENTS	37
12.4 MEASURE RESULT (MEASURED AT 3M USING FCC PART15 B LIMITS).....	38
13. AUDIO LOW PASS FILTER RESPONSE	40
13.1 LIMITS	40
13.2. METHOD OF MEASUREMENTS.....	40
13.3 TEST DATA	40
APPENDIX I	43
PHOTOGRAPHS OF SETUP	43
APPENDIX II	45
EXTERNAL VIEW OF EUT.....	45

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

The EUT is a single channel Two-way Radio designed for voice communication. It is designed by way of utilizing the FM modulation achieves the system operating.

A major technical description of EUT is described as following:

Communication Type	Voice / Tone only
Modulation	FM
Emission Type	F3E
Channel Separation:	12.5KHz
Emission Bandwidth	10.35KHz
Peak Frequency Deviation	1.82KHz
Audio Frequency Response	10.83dB
Maximum Transmitter Power	35.75dBm
Antenna Designation	Detachable
Power Supply	DC 7.4V,2000mA by battery
Limiting Voltage	DC 6.29V
Operation Frequency Range and Channel	Frequency Range: 400MHz to 470MHz Channel Separation: 12.5KHz
	400MHz to 470MHz Bottom Channel: 400.025MHz, Centre Channel: 435.325MHz, Top Channel: 469.975MHz,
Frequency Tolerance	1.217ppm

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: Q5EPT6700**, filing to comply with the FCC Part 90 requirements.

1.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2009; TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

1.4 TEST FACILITY

The test site used to collect the radiated data is located on the address of Attestation of Global Compliance (Shenzhen) Co., Ltd. 2F., No.2 Building, Huafeng No.1 Technical Industrial Park, Sanwei, Xixiang, Baoan District, Shenzhen. The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 .

FCC register No.: 259865

1.5 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

1.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission’s requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

2.3 GENERAL TECHNICAL REQUIREMENTS

- (1). Section 15.207: Conducted Limits
- (2). Section 90.205: Maximum ERP is dependent upon the station’s antenna HAAT and required service area
- (3). Section 90.207: Modulation Characteristic
- (4). Section 90.209: Occupied Bandwidth
- (5). Section 90.210: Emission Mask
- (6). Section 90.213: Frequency Tolerance
- (7). Section 90.214: Transient Frequency Behavior
- (8). Section 15.109: Radiated Emission

2.4 CONFIGURATION OF TESTED SYSTEM

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

Item	Equipment	Model No.	Identifier	Note
1	Two-way Radio	PT6700	FCC ID: Q5EPT6700	EUT
2	Charger	KTC-50D1	N/A	Accessory
3	Battery	M063680-KB-78B	N/A	Accessory

3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.107	Conducted Emission	Compliant
§90.205	Maximum Transmitter Power	Compliant
§90.207	Modulation Characteristic	Compliant
§90.209	Occupied Bandwidth	Compliant
§90.210	Emission Mask	Compliant
§90.213	Frequency Tolerance	Compliant
§90.214	Transient Frequency Behavior	Compliant
§15.109	Radiated Emission	Compliant

4. DESCRIPTION OF TEST MODES

RF TEST MODES

The EUT (Handheld two way radio) has been tested under normal operating condition.

(The top channel, the middle channel and the bottom channel) are chosen for testing at each channel separation (12.5 KHz).

No.	TEST MODES	CHANNEL SEPARATION
1	Low Channel	12.5 KHz
2	Middle Channel	12.5 KHz
3	High Channel	12.5 KHz

EMC TEST MODES

No.	TEST MODES
1	Standby Mode + (Charging)

Note: only the result of the worst case was recorded in the report.

5. CONDUCTED LIMITS

5.1 PROVISIONS APPLICABLE

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the, the radio frequency voltage that is conducted back onto the AC power line on any frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50uH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.


Frequency of Emission (MHz)	Conducted Limit(dBuV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50

* Decreases with the logarithm of the frequency.

5.2 MEASUREMENT PROCEDURE

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per ANSI C63.4.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- (4) The EUT received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- (5) All support equipments received AC power from a second LISN, if any.
- (6) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (7) Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
During the above scans, the emissions were maximized by cable manipulation.

5.3 TEST SETUP BLOCK DIAGRAM

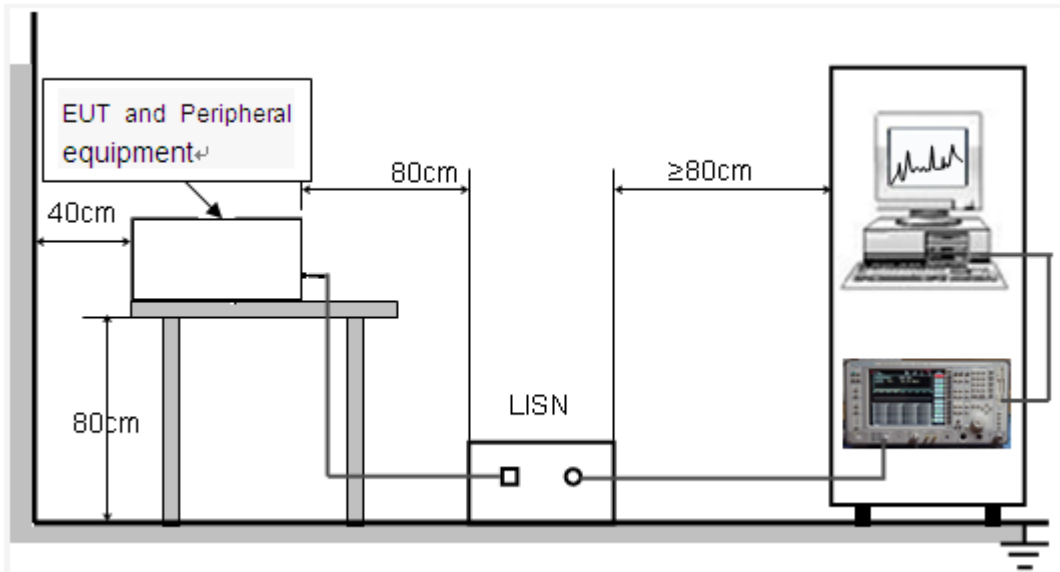


5.4 TEST EQUIPMENT USED

Conducted Emission Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Cal. Date
TEST RECEIVER	R&S	ESCI	N/A	2013.07.17
LISN	R&S	ESH3-Z5	N/A	2013.07.17

5.5 TEST RESULT

LINE CONDUCTED EMISSION TEST-L

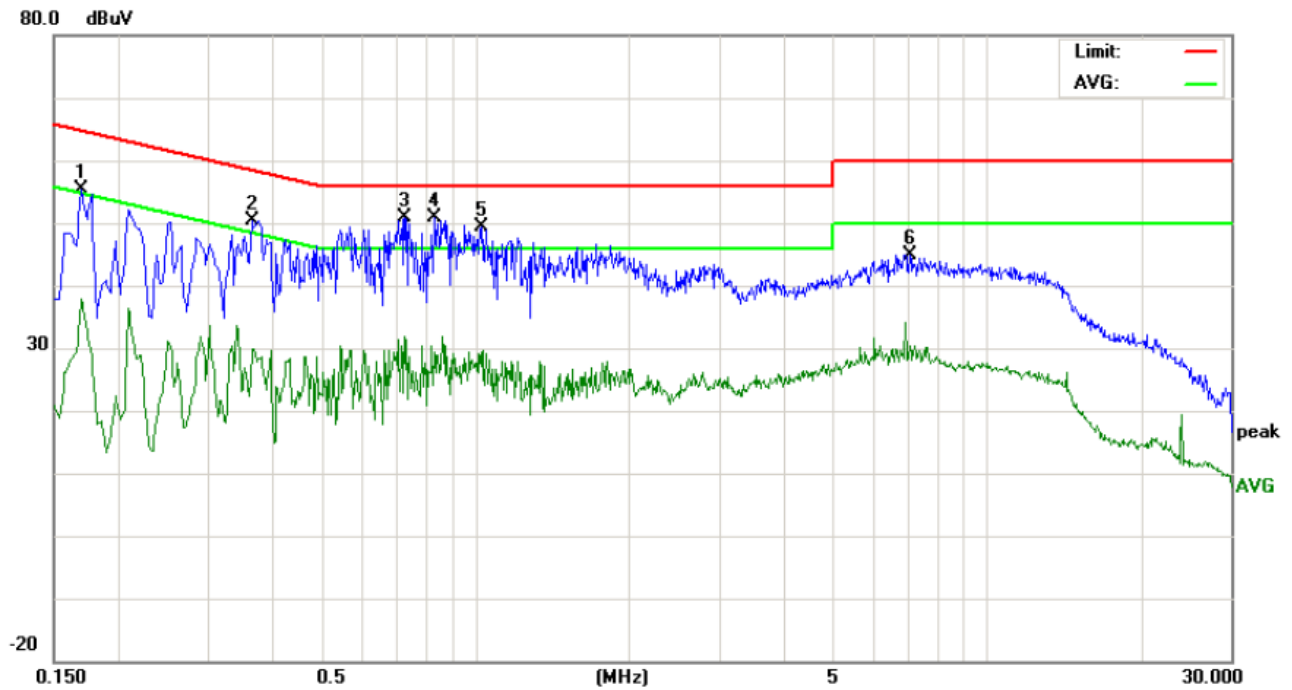


Site: Conduction
 Limit: FCC Class B Conduction(QP)
 EUT: Two-way Radio
 M/N: PT6700
 Mode: Charging
 Note:

Phase: **L1**
 Power: AC 120V/60Hz

Temperature: 26
 Humidity: 60 %

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1700	45.24		27.64	10.18	55.42		37.82	64.96	54.96	-9.54	-17.14	P	
2	0.3660	40.16		19.43	10.32	50.48		29.75	58.59	48.59	-8.11	-18.84	P	
3	0.7300	40.56		21.47	10.33	50.89		31.80	56.00	46.00	-5.11	-14.20	P	
4	0.8340	40.51		18.96	10.32	50.83		29.28	56.00	46.00	-5.17	-16.72	P	
5	1.0300	38.97		18.95	10.37	49.34		29.32	56.00	46.00	-6.66	-16.68	P	
6	7.0900	34.63		20.06	10.35	44.98		30.41	60.00	50.00	-15.02	-19.59	P	

LINE CONDUCTED EMISSION TEST-N

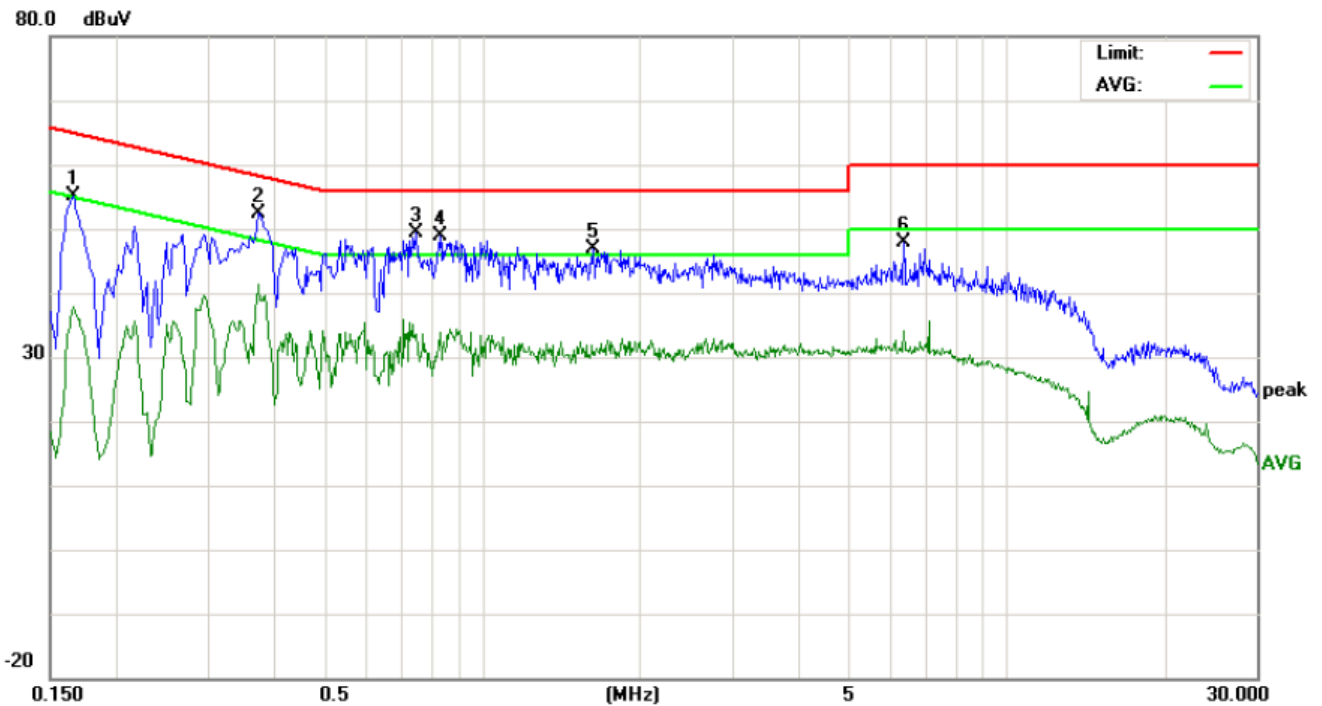

Site: Conduction Phase: **N** Temperature: 26
 Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %
 EUT: Two-way Radio
 M/N: PT6700
 Mode: Charging
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1660	44.87		27.67	10.18	55.05		37.85	65.15	55.15	-10.10	-17.30	P	
2	0.3740	42.14		31.13	10.32	52.46		41.45	58.41	48.41	-5.95	-6.96	P	
3	0.7500	39.14		23.44	10.31	49.45		33.75	56.00	46.00	-6.55	-12.25	P	
4	0.8340	38.48		23.51	10.32	48.80		33.83	56.00	46.00	-7.20	-12.17	P	
5	1.6300	36.46		19.96	10.34	46.80		30.30	56.00	46.00	-9.20	-15.70	P	
6	6.3700	37.57		23.72	10.29	47.86		34.01	60.00	50.00	-12.14	-15.99	P	

6. FREQUENCY TOLERANCE

6.1 PROVISIONS APPLICABLE

- a). According to FCC Part 2 Section 2.1055(a)(1), the frequency stability shall be measured with variation of ambient temperature from -30°C to $+50^{\circ}\text{C}$ centigrade.
- b). According to FCC Part 2 Section 2.1055(d)(2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacturer.
- c). According to FCC Part 90 Section 90.213, the frequency tolerance must be maintained within 2.5 ppm in the 421–512 MHz band.

6.2 MEASUREMENT PROCEDURE

6.2.1 Frequency stability versus environmental temperature

1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1 KHz and Frequency Span to 50KHz. Record this frequency as reference frequency.
3. Set the temperature of chamber to 50°C . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measured frequencies on each temperature step.

6.2.2 Frequency stability versus input voltage

1. Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15°C to 25°C . Otherwise, an environment chamber set for a temperature of 20°C shall be used. The EUT shall be powered by DC 7.4V
2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1 KHz. Record this frequency as reference frequency.
3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

6.3 TEST SETUP BLOCK DIAGRAM

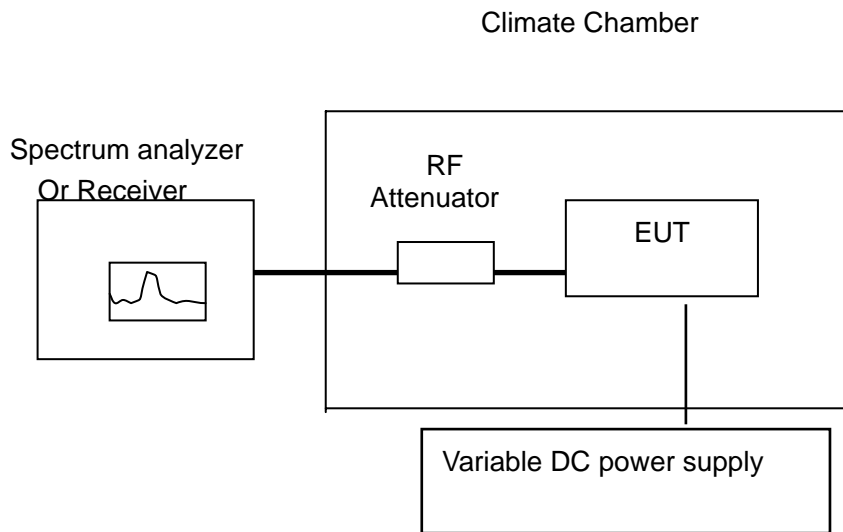


Figure 1

6.4 TEST EQUIPMENT USED:

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
Receiver	R&S	ESCI	N/A	2013.07.17
Climate Chamber	EXPERY	TN-400	N/A	2013.07.17

6.5 TEST RESULT

(1) Frequency stability versus input voltage (Supply nominal voltage is DC 7.4V)

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	400.025 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 7.4V	400.025485	1.212
40	DC 7.4V	400.025363	0.907
30	DC 7.4V	400.025314	0.785
20	DC 7.4V	400.025243	0.607
10	DC 7.4V	400.025224	0.560
0	DC 7.4V	400.025255	0.637
-10	DC 7.4V	400.025284	0.710
-20	DC 7.4V	400.025323	0.807
-30	DC 7.4V	400.025462	1.155

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	435.325 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 7.4V	435.325513	1.178
40	DC 7.4V	435.325463	1.064
30	DC 7.4V	435.325414	0.951
20	DC 7.4V	435.325356	0.818
10	DC 7.4V	435.325323	0.742
0	DC 7.4V	435.325336	0.772
-10	DC 7.4V	435.325354	0.813
-20	DC 7.4V	435.325363	0.834
-30	DC 7.4V	435.325386	0.887

Top Channel @ 12.5KHz Channel Separation

Reference Frequency:	469.975 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 7.4V	469.975534	1.136
40	DC 7.4V	469.975475	1.011
30	DC 7.4V	469.975413	0.879
20	DC 7.4V	469.975323	0.687
10	DC 7.4V	469.975238	0.506
0	DC 7.4V	469.975242	0.515
-10	DC 7.4V	469.975325	0.692
-20	DC 7.4V	469.975346	0.736
-30	DC 7.4V	469.975362	0.770

(2) Frequency stability versus input voltage (Battery limiting voltage is DC 6.29V)

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	400.025 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29V	400.025487	1.217
40	DC 6.29V	400.025472	1.180
30	DC 6.29V	400.025463	1.157
20	DC 6.29V	400.025435	1.087
10	DC 6.29V	400.025333	0.832
0	DC 6.29V	400.025323	0.807
-10	DC 6.29V	400.025435	1.087
-20	DC 6.29V	400.025462	1.155
-30	DC 6.29V	400.025464	1.160

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	435.325 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29V	435.325489	1.123
40	DC 6.29V	435.325451	1.036
30	DC 6.29V	435.325425	0.976
20	DC 6.29V	435.325372	0.855
10	DC 6.29V	435.325346	0.795
0	DC 6.29V	435.325328	0.753
-10	DC 6.29V	435.325362	0.832
-20	DC 6.29V	435.325383	0.880
-30	DC 6.29V	435.325454	1.043

Top Channel @ 12.5KHz Channel Separation

Reference Frequency:	469.975 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29V	469.975483	1.028
40	DC 6.29V	469.975444	0.945
30	DC 6.29V	469.975415	0.883
20	DC 6.29V	469.975384	0.817
10	DC 6.29V	469.975382	0.813
0	DC 6.29V	469.975375	0.798
-10	DC 6.29V	469.975423	0.900
-20	DC 6.29V	469.975434	0.923
-30	DC 6.29V	469.975445	0.947

(3) Frequency stability versus input voltage (Battery Fully Charged voltage is DC 8.51V)

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	400.025 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51V	400.025484	1.210
40	DC 8.51V	400.025464	1.160
30	DC 8.51V	400.025457	1.142
20	DC 8.51V	400.025443	1.107
10	DC 8.51V	400.025335	0.837
0	DC 8.51V	400.025342	0.855
-10	DC 8.51V	400.025434	1.085
-20	DC 8.51V	400.025441	1.102
-30	DC 8.51V	400.025467	1.167

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	435.325 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51V	435.325482	1.107
40	DC 8.51V	435.325452	1.038
30	DC 8.51V	435.32524	0.551
20	DC 8.51V	435.325374	0.859
10	DC 8.51V	435.325335	0.770
0	DC 8.51V	435.325327	0.751
-10	DC 8.51V	435.325352	0.809
-20	DC 8.51V	435.325365	0.838
-30	DC 8.51V	435.325456	1.047

Top Channel @ 12.5KHz Channel Separation

Reference Frequency:	469.975 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51V	469.975483	1.028
40	DC 8.51V	469.975432	0.919
30	DC 8.51V	469.975414	0.881
20	DC 8.51V	469.975395	0.840
10	DC 8.51V	469.975397	0.845
0	DC 8.51V	469.975374	0.796
-10	DC 8.51V	469.975422	0.898
-20	DC 8.51V	469.975436	0.928
-30	DC 8.51V	469.975445	0.947

7. EMISSION BANDWIDTH


7.1 PROVISIONS APPLICABLE

According to FCC Part 90 Section 90.209: The authorized bandwidth shall be 11.25 KHz for 12.5 KHz.

7.2 MEASUREMENT PROCEDURE

- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). The EUT was modulated by 3.0 KHz Sine wave audio signal, The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing) .
- 3). Set SPA Center Frequency = fundamental frequency, RBW=VBW= 300 Hz, Span =50 KHz.
- 4). Set SPA Max hold. Mark peak, -26 dB.

7.3 TEST SETUP BLOCK DIAGRAM

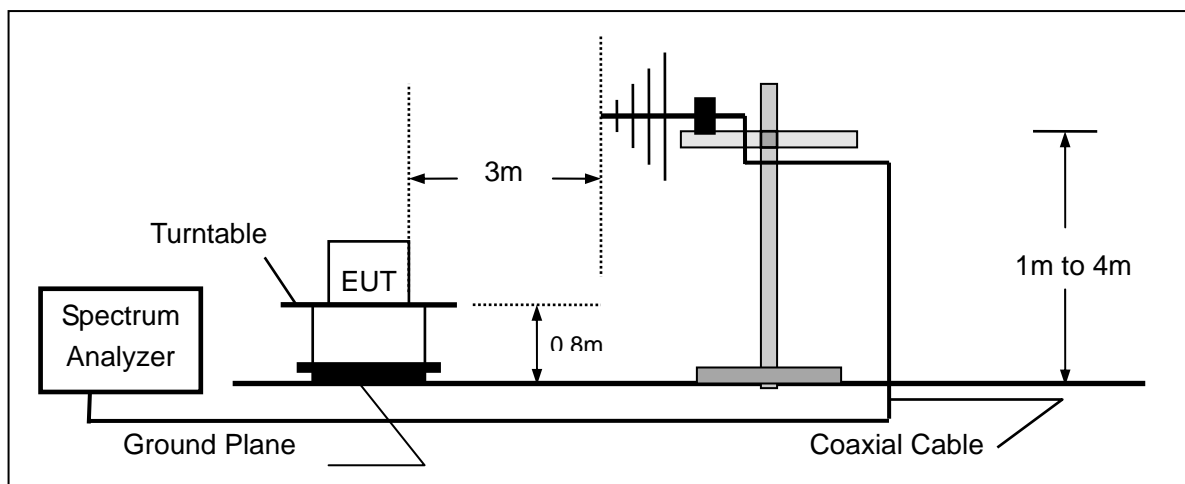


7.4 MEASUREMENT EQUIPMENT USED:

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
SPECTRUM ANALYZER	AGILENT	E4440A	US44300399	2013.07.17
MODULATION ANALYZER	HP	8920B	3104A03367	2013.07.17
BROADBAND ANT.	A.H.	SAS-521-4	9163-194	2013.07.17

7.5 MEASUREMENT RESULT:

26 dB Bandwidth Measurement Result			
Operating Frequency	12.5 KHz Channel Separation		
	Test Data	Limits	Result
400.025MHz	10.27 KHz	11.25 KHz	Pass
435.325MHz	10.35KHz	11.25 KHz	Pass
469.975MHz	10.31 KHz	11.25 KHz	Pass

Occupied bandwidth of Middle Channel (Maximum)

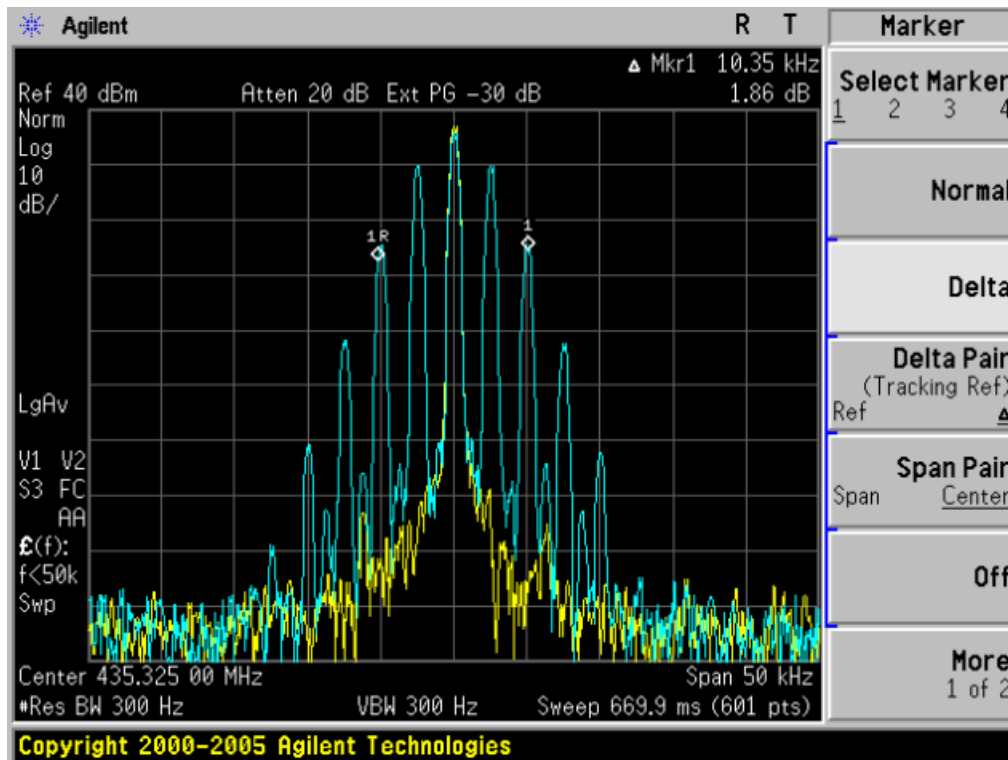

8. UNWANTED RADIATION

8.1 PROVISIONS APPLICABLE

8.1.1 According to Section 90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with 12.5 KHz channel bandwidth:

- (1). On any frequency removed from the center of the authorized bandwidth f_0 to 5.625 KHz removed from f_0 : Zero dB
- (2). On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (f_d in KHz) f_0 of more than 5.625 KHz but no more than 12.5 KHz: At least $7.27(f_d - 2.88 \text{ KHz})$ dB
- (3). On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (f_d in KHz) f_0 of more than 12.5 KHz: At least $50 + 10 \log(P)$ dB or 70 dB, whichever is lesser attenuation.

8.2 MEASUREMENT PROCEDURE

- (1) On a test site, the EUT shall be placed on a turntable and in the position closest to the normal use as declared by the user.
- (2) The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3) The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4) The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5) The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7) The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.

- (8) The maximum signal level detected by the measuring receiver shall be noted.
- (9) The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10) Replace the antenna with a proper Antenna (substitution antenna).
- (11) The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12) The substitution antenna shall be connected to a calibrated signal generator.
- (13) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.


(14) The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.

(15) The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.

(16) The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.


(17) The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

8.3 TEST SETUP BLOCK DIAGRAM

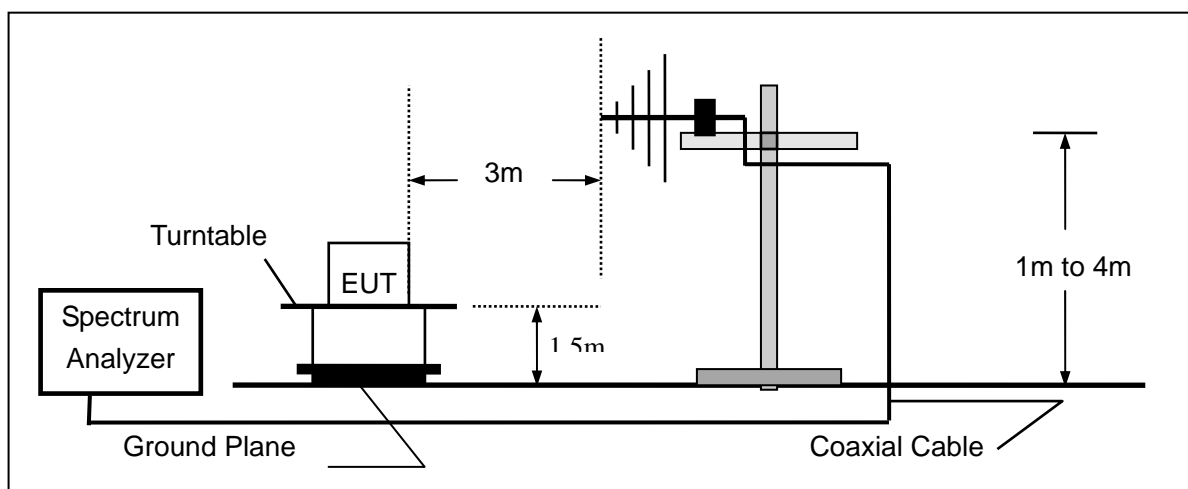


SUBSTITUTION METHOD: (Radiated Emissions)

Radiated Below 1GHz

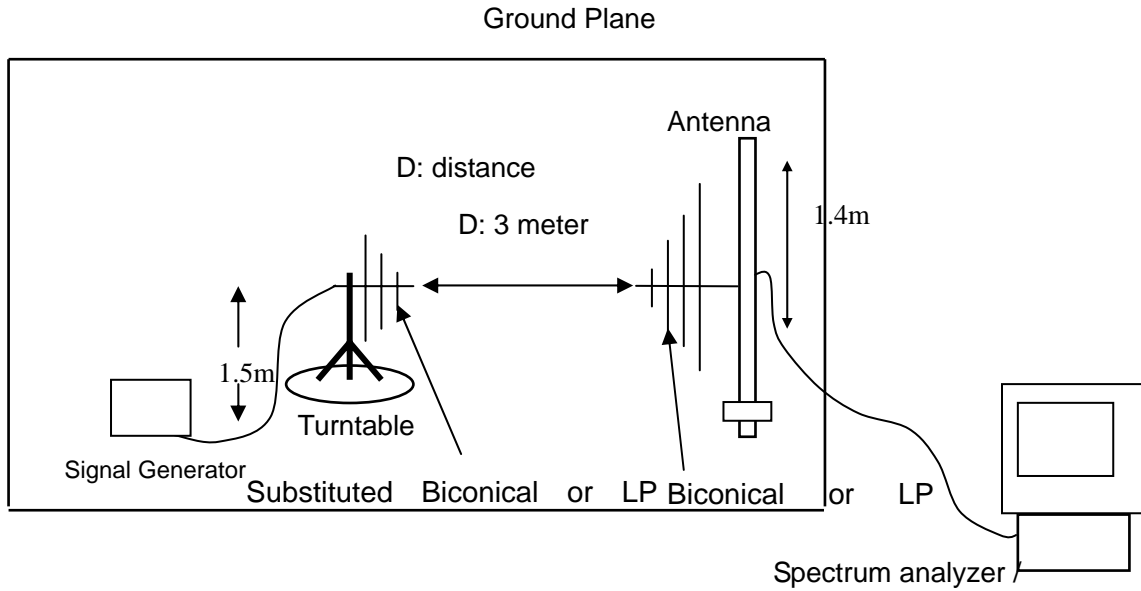

Radiated Above 1 GHz

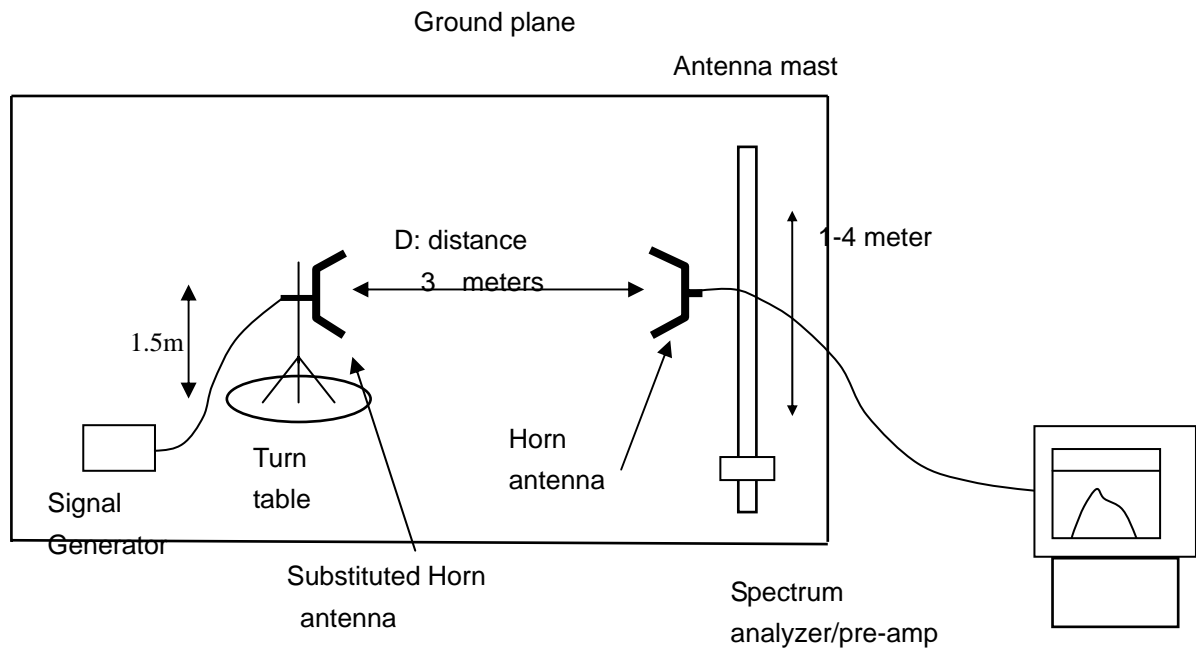

8.4 MEASUREMENT EQUIPMENT USED:

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
SPECTRUM ANALYZER	AGILENT	E4440A	US44300399	2013.07.17
TEST RECEIVER	R&S	ESCI	N/A	2013.07.17
LOOP ANTENNA	A.H.	SAS-562B	N/A	2013.07.17
HORN ANTENNA	EM	EM-AH-10180	N/A	2013.07.17
BROADBAND ANT.	A.H.	SAS-521-4	N/A	2013.07.17

8.5 MEASUREMENT RESULTS:

Measurement Result for 12.5 KHz Channel Separation-5W

On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (f_d in KHz) f_o of more than 12.5 KHz: At least $50+10 \log(P)$ dB or 70 dB, which ever is lesser attenuation.

Limit: At least $50+10 \log (P) =50+10\log(5)=57(\text{dBc})$

Measurement Result for 12.5 KHz Channel Separation @ 400.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
400.025	v	0		pass
800.050	v	66.73(-29.73dBm)	57	pass
1200.08	v	75.42(-38.42dBm)	57	pass
1600.100	v	78.33	57	pass
2000.125	v	81.73	57	pass
2400.150	v	84.32	57	pass
2800.175	v	85.54	57	pass
3200.200	v	88.81	57	pass
3600.225	v	90.37	57	pass
4000.250	v	90.42	57	pass

Measurement Result for 12.5 KHz Channel Separation @ 435.325MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
435.325	v	0		pass
870.650	v	72.34(-35.34dBm)	57	pass
1305.975	v	77.52	57	pass
1741.300	v	79.34	57	pass
2176.625	v	80.37	57	pass
2611.950	v	83.13	57	pass
3047.275	v	89.35	57	pass
3482.600	v	90.14	57	pass
3917.925	v	90.56	57	pass
4353.250	v	91.15	57	pass

Measurement Result for 12.5 KHz Channel Separation @ 469.975MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
469.075	v	0		pass
938.150	v	72.27(-35.27dBm)	57	pass
1407.225	v	75.63	57	pass
1876.300	v	80.56	57	pass
2345.375	v	83.42	57	pass
2814.450	v	89.75	57	pass
3283.525	v	90.27	57	pass
3752.600	v	91.33	57	pass
4221.675	v	91.72	57	pass
4690.750	v	92.16	50	pass


Notes: The emissions were scanned from 30 MHz to 10th harmonics;

8.6 EMISSION MASK PLOT

The detailed procedure employed for Emission Mask measurements are specified as following:

- The transmitter shall be modulated by a 2.5 KHz audio signal,
- The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 KHz (12.5 KHz channel spacing) .

The Worst Emission Mask for 12.5 KHz channel Separation (4W)

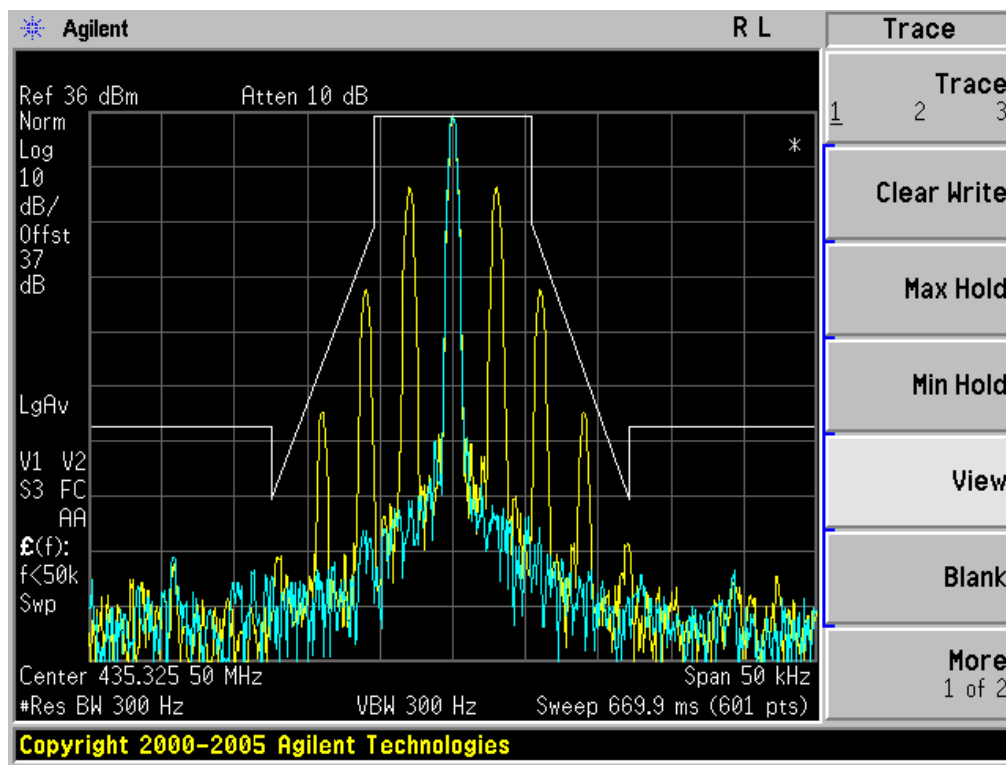

9. MODULATION CHARACTERISTICS

9.1 PROVISIONS APPLICABLE

According to CFR 47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

9.2 MEASUREMENT METHOD

9.2.1 Modulation Limit

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1KHz using this level as a reference (0dB) and vary the input level from -20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

9.2.2 Audio Frequency Response

- (1). Configure the EUT as shown in figure 1.
- (2). Adjust the audio input for 20% of rated system deviation at 1 KHz using this level as a reference (0 dB).
- (3). Vary the Audio frequency from 100 Hz to 10 KHz and record the frequency deviation.
- (4). Audio Frequency Response = $20\log_{10}(\text{Deviation of test frequency}/\text{Deviation of 1 KHz reference})$.

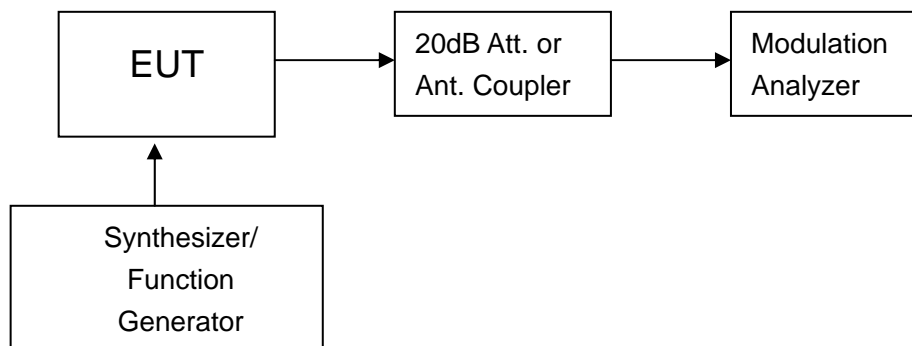


Figure 1: Modulation characteristic measurement configuration

9.3 MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
Modulation Analyzer	HP	8920B	N/A	2013-07-17


NOTE: 8920B can generate audio modulation frequency.

9.4 MEASUREMENT RESULT

(a). Modulation Limit:

Middle Channel @ 12.5 KHz Channel Separations

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz (KHz)	Peak Freq. Deviation At 1000 Hz (KHz)	Peak Freq. Deviation At 1500 Hz (KHz)	Peak Freq. Deviation At 3000 Hz (KHz)
-20	0.13	0.86	0.93	0.96
-15	0.11	0.93	0.95	0.99
-10	0.24	1.25	1.26	1.33
-5	0.31	1.35	1.36	1.41
0	0.37	1.51	1.54	1.58
5	0.49	1.78	1.79	1.82
10	0.43	1.74	1.76	1.79
15	0.35	1.68	1.73	1.76
20	0.25	1.59	1.62	1.69

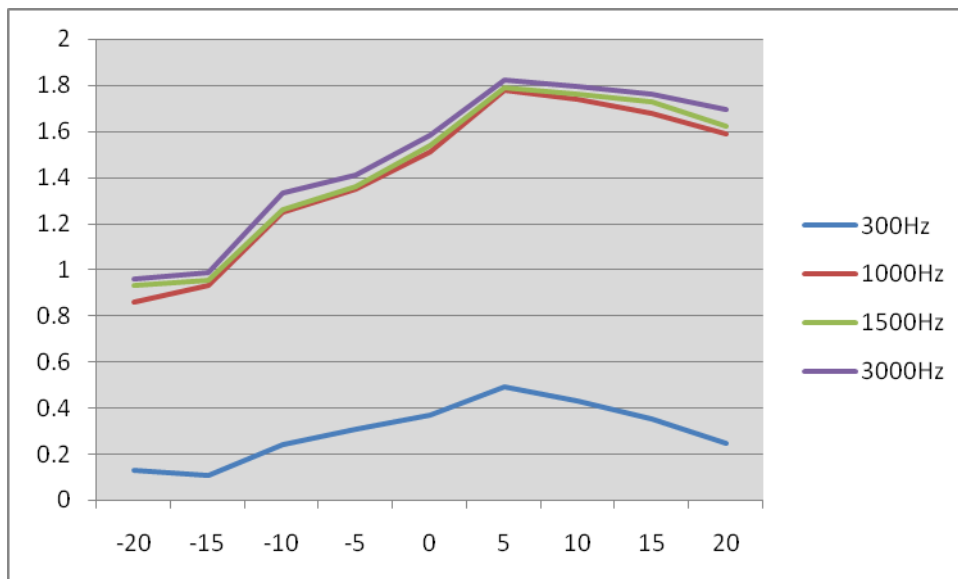


(b). Audio Frequency Response:

12.5 KHz Middle Channel Separations (Worst)

Frequency (Hz)	Deviation (KHz)	Audio Frequency Response(dB)
100	--	--
200	--	--
300	0.15	-10.46
400	0.17	-9.37
500	0.21	-7.54
600	0.23	-6.74
700	0.27	-5.35
800	0.33	-3.61
900	0.42	-1.51
1000	0.5	0.00
1200	0.55	0.83
1400	0.67	2.54
1600	0.79	3.97
1800	0.87	4.81
2000	0.96	5.67
2400	1.29	8.23
2500	1.42	9.07
2800	1.64	10.32
3000	1.73	10.78
3200	1.74	10.83
3600	1.55	9.83
4000	1.08	6.69
4500	0.84	4.51
5000	0.75	3.52
5500	0.42	-1.51
6000	0.14	-11.06
6500	0.05	-20.00
7000	0.02	-27.96
7500	0.01	-33.98
9000	--	--
10000	--	--
14000	--	--
18000	--	--
20000	--	--
30000	--	--

Frequency Response of Middle Channel

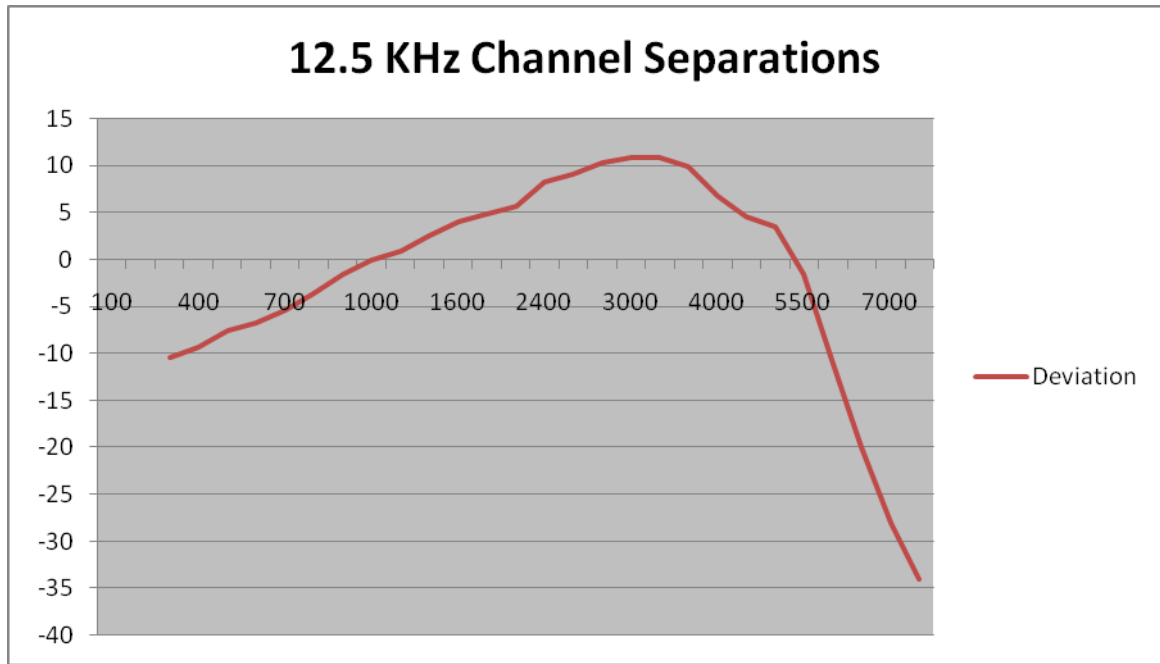

10. MAXIMUM TRANSMITTER POWER (CONDUCTED OUTPUT POWER) AND CONDUCTED SPURIOUS EMISSION

10.1 PROVISIONS APPLICABLE

Per FCC §2.1046 and §90.205: Maximum ERP is dependent upon the station's antenna HAAT and required service area.

RS-119 and §5.4: The output power shall be within ± 1.0 dB of the manufacturer's rated power.

10.2 TEST PROCEDURE

The RF output of Two-way Radio was connected to a spectrum analyzer through an appropriate attenuator.

The transmitter shall be modulated by a 2.5 KHz audio signal,


The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 KHz (12.5 KHz channel spacing)

Measure and record the transmitter output power, using a measurement (resolution) bandwidth at least two to three times the occupied bandwidth for transmitters equipped to capture the true peak emission of the equipment under test.

10.3 TEST INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
SPECTRUM ANALYZER	AGILENT	E4440A	N/A	2013.07.17

10.4 TEST CONFIGURATION

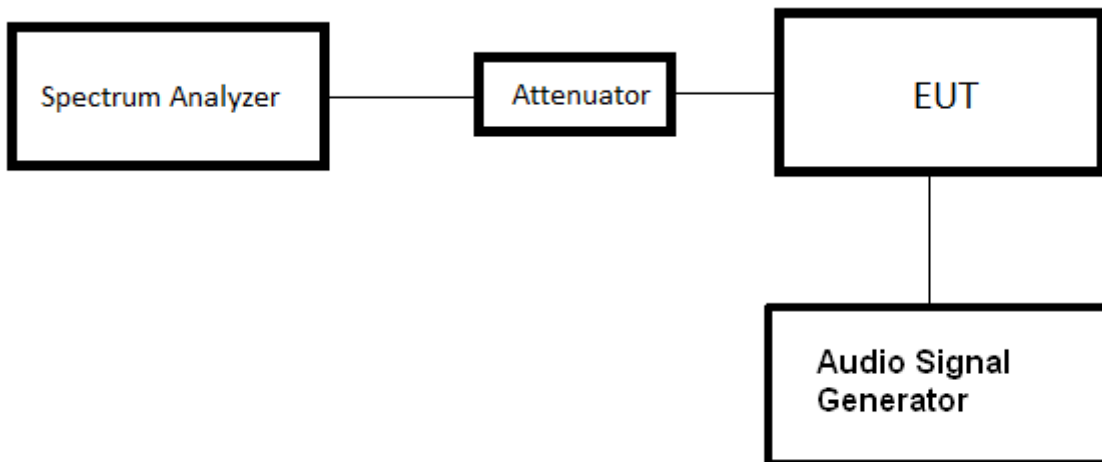


10.5 TEST RESULT

The maximum Conducted Power (CP) is
4 W for 12.5 KHz Channel Separation


Conducted Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 36dBm(4W)
12.5 KHz	Bottom(400.025MHz)	35.63
	Middle(435.325MHz)	35.75
	Top (469.975MHz)	35.73

10.7 CONDUCT SPURIOUS PLOT

Conducted Spurious Emission(worst) @ 435.325MHz (30MHz-1GHz)

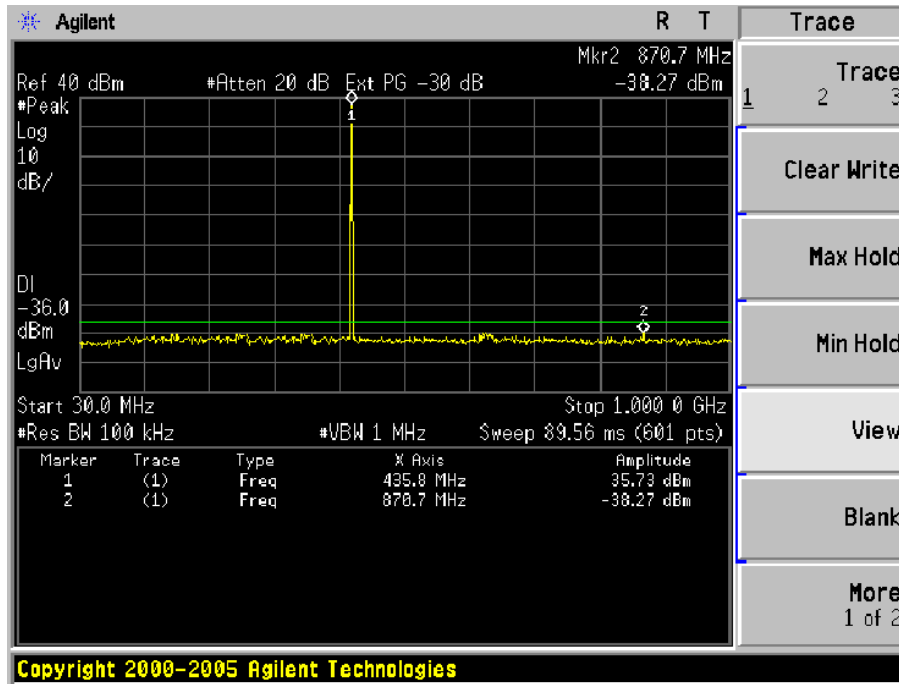

Conduct Spurious Emission(worst) @ 435.325MHz (1GHz-12.75GHz)

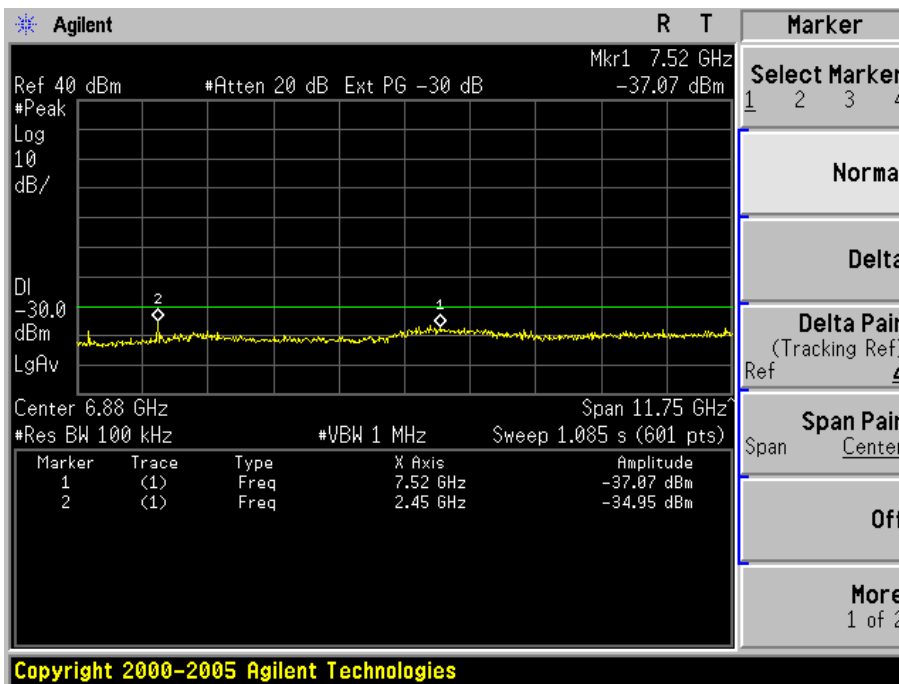

11. TRANSMITTER FREQUENCY BEHAVIOR

11.1 PROVISIONS APPLICABLE

Section 90.214

Time intervals ^{1, 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t ₁ ⁴	± 25.0 kHz	5.0 ms	10.0 ms
t ₂	± 12.5 kHz	20.0 ms	25.0 ms
t ₃ ⁴	± 25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t ₁ ⁴	± 12.5 kHz	5.0 ms	10.0 ms
t ₂	± 6.25 kHz	20.0 ms	25.0 ms
t ₃ ⁴	± 12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t ₁ ⁴	± 6.25 kHz	5.0 ms	10.0 ms
t ₂	± 3.125 kHz	20.0 ms	25.0 ms
t ₃ ⁴	± 6.25 kHz	5.0 ms	10.0 ms

¹ t_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t₁ is the time period immediately following t_{on}.

t₂ is the time period immediately following t₁.

t₃ is the time period from the instant when the transmitter is turned off until t_{off}.

t_{off} is the instant when the 1 kHz test signal starts to rise.

² During the time from the end of t₂ to the beginning of t₃, the frequency difference must not exceed the limits specified in §90.213.

³ Difference between the actual transmitter frequency and the assigned transmitter frequency.

⁴ If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

11.2 TEST METHOD

TIA/EIA-603 2.2.19

11.3 TEST INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
Signal Generator	R&S	SMT02	A0304261	2013.07.17
Storage Oscilloscope	Tektronix	TDS3052	B017447	2013.07.17

11.4 DESCRIBE LIMIT LINE OF TRANSMITTER FREQUENCY BEHAVIOR


ton: The switch-on instant t_{on} of a transmitter is defined by the condition when the output power, measured at the antenna terminal, exceeds 0,1 % of the full output power (-30 dBc).


t1: period of time starting at t_{on} and finishing according to above 11.1

t2: period of time starting at the end of t_1 and finishing according to above 11.1

toff: switch-off instant defined by the condition when the output power falls below 0,1 % of the full output power (-30 dBc).


t3: period of time that finishing at t_{off} and starting according to above 11.1

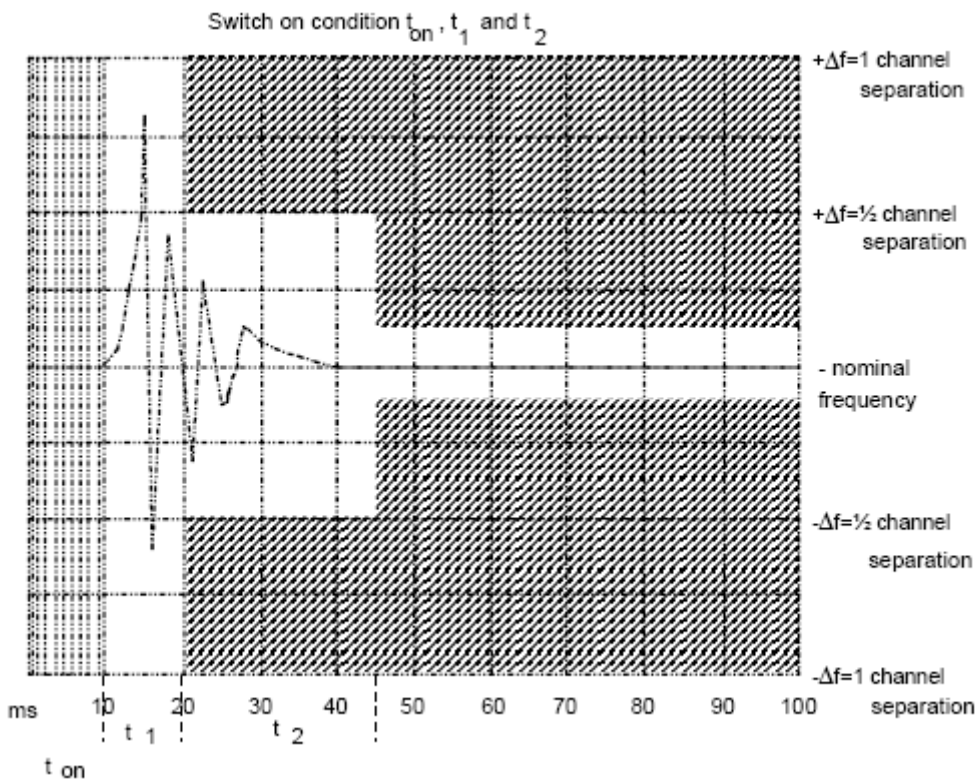

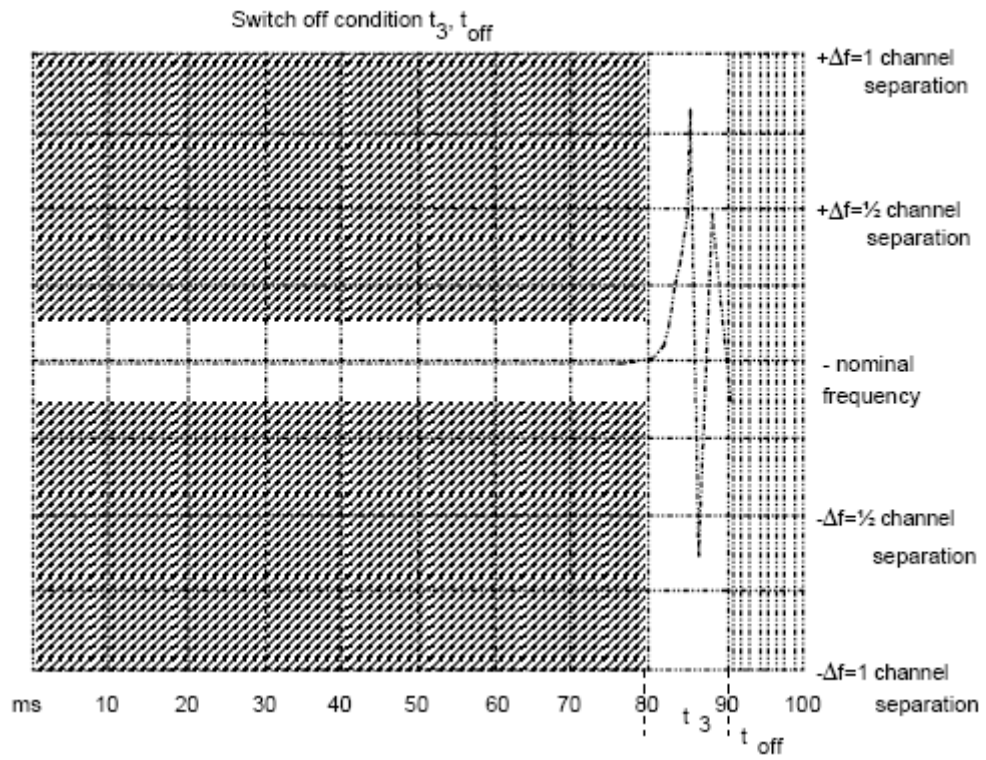


11.5 MEASURE RESULT

Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation--Off to On

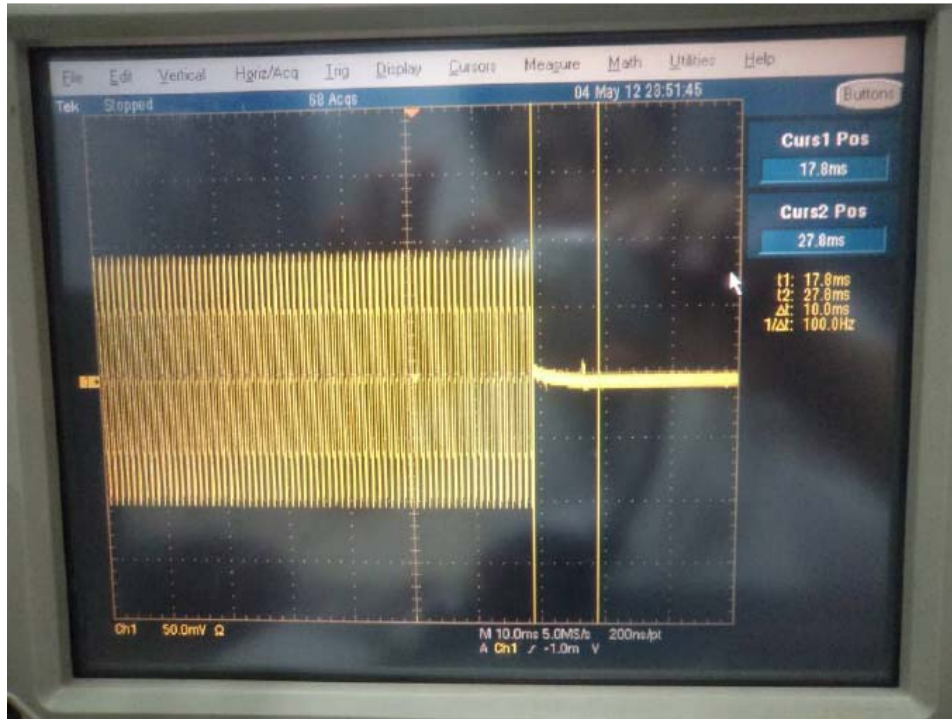

Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation--On to Off

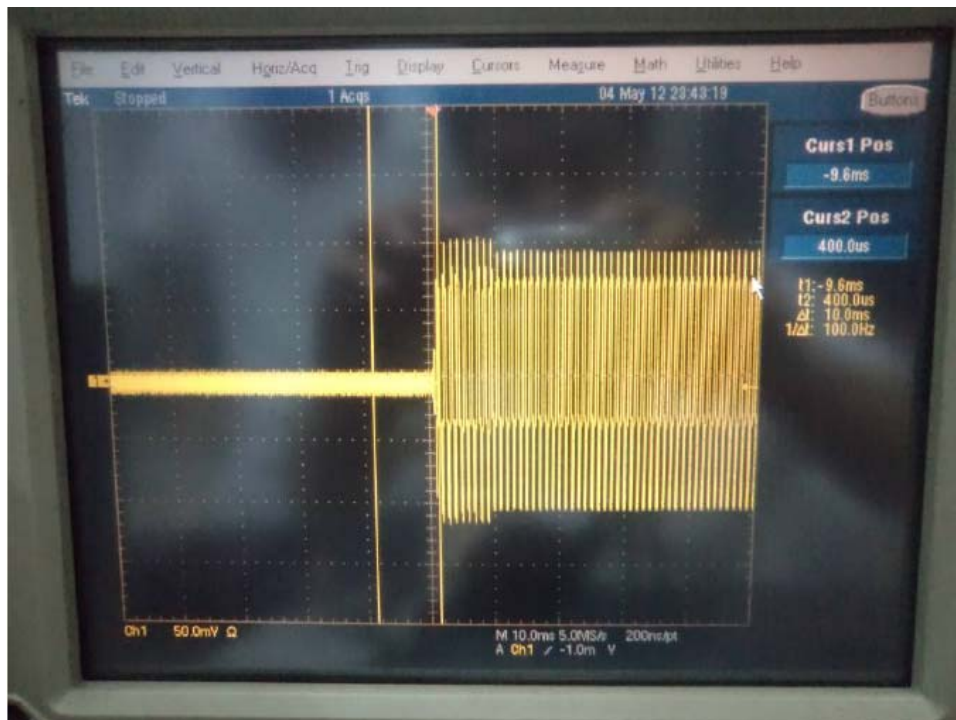

12. RADIATED EMISSION ON RECEIVING MODE

12.1 PROVISIONS APPLICABLE

FCC Part 15 Subpart B Section 15.109


12.2 TEST METHOD

ANSI C 63.4: 2003

12.3 TEST INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
SPECTRUM ANALYZER	AGILENT	E4440A	N/A	2013.07.17
TEST RECEIVER	R&S	ESCI	N/A	2013.07.17
LOOP ANTENNA	A.H.	SAS-562B	A0304220	2013.07.17
HORN ANT.	EM	EM-AH-10180	N/A	2013.07.17
BROADBAND ANT.	A.H.	SAS-521-4	A0304224	2013.07.17

12.4 MEASURE RESULT (MEASURED AT 3M USING FCC PART15 B LIMITS)
RADIATED EMISSION TEST RESULTS – HORIZONTAL

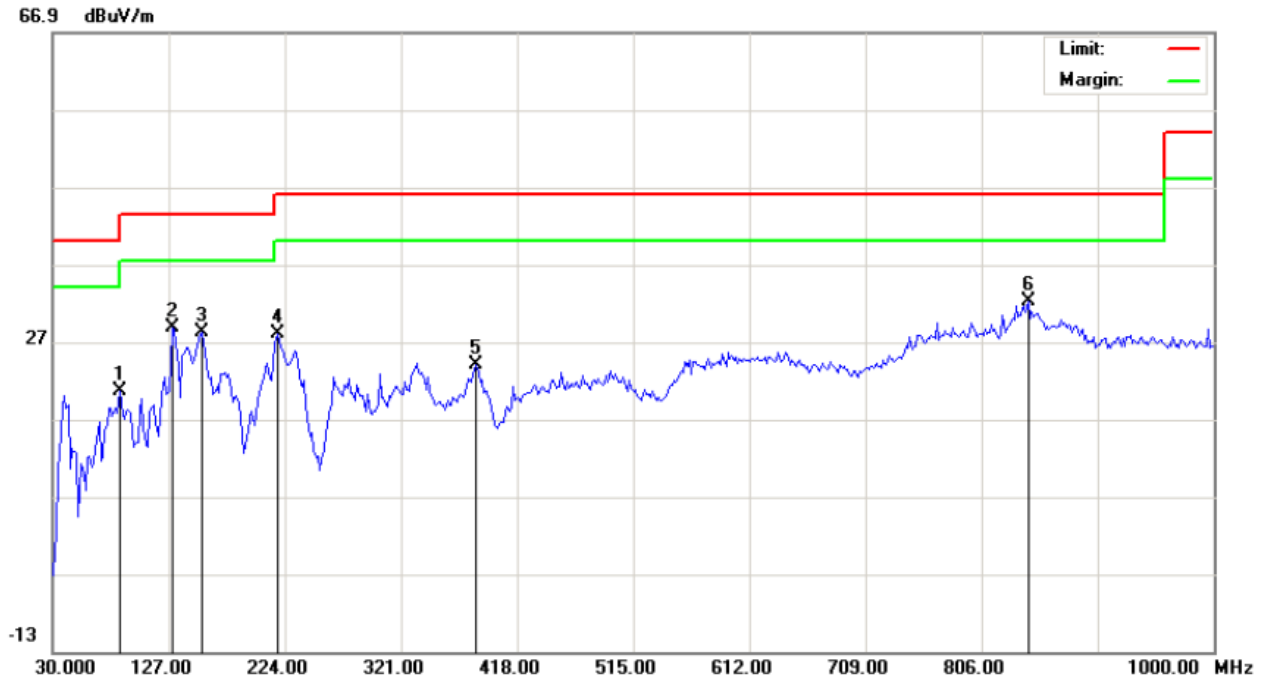

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Two-way Radio
M/N: PT6700
Mode: Receiving
Note:

Polarization: *Horizontal*
Power: AC 120V/60Hz
Distance: 3m

Temperature: 26
Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		86.5833	5.72	14.95	20.67	40.00	-19.33	peak			
2		130.2332	14.40	14.35	28.75	43.50	-14.75	peak			
3		154.4832	14.51	13.63	28.14	43.50	-15.36	peak			
4		217.5333	16.49	11.54	28.03	46.00	-17.97	peak			
5		384.0500	5.51	18.55	24.06	46.00	-21.94	peak			
6	*	844.8000	1.33	30.81	32.14	46.00	-13.86	peak			

RADIATED EMISSION TEST RESULTS – VERTICAL



Site: site #1
 Limit: FCC Class B 3M Radiation
 EUT: Two-way Radio
 M/N: PT6700
 Mode: Receiving
 Note:

Polarization: **Vertical**
 Power: AC 120V/60Hz
 Distance: 3m

Temperature: 26
 Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		70.4167	24.05	3.12	27.17	40.00	-12.83	peak			
2		131.8500	17.16	14.04	31.20	43.50	-12.30	peak			
3		151.2500	18.96	13.41	32.37	43.50	-11.13	peak			
4	*	170.6500	21.54	10.97	32.51	43.50	-10.99	peak			
5		217.5333	18.78	11.54	30.32	46.00	-15.68	peak			
6		838.3333	0.50	31.08	31.58	46.00	-14.42	peak			

13. Audio Low Pass Filter Response

13.1 LIMITS

2.1047(a): Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

90.242(b)(8): Recommended audio filter attenuation characteristics are given below:

Audio band	Minimum Attenuation Rel. to 1 KHz Attenuation
3 –20 KHz 20 – 30 KHz	$60 \log_{10}(f/3)$ dB where f is in KHz 50dB

13.2. METHOD OF MEASUREMENTS


The rated audio input signal was applied to the input of the audio low-pass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal were then measured and recorded using the FFT Digital Spectrum Analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 KHz.

13.3 TEST DATA

12.5 KHz Channel Spacing, F3E, Frequency of All Modulation States

Frequency (KHz)	Audio In (dBV)	Audio out (dBV)	Attenuation (Out_In) dB	Attenuation Rel. to 3 KHz (dB)	Recommended Attenuation (dB)
0.1	-75.79	-30.25	45.6	-36.7	
0.2	-75.79	-18.83	57.1	-25.5	
0.4	-75.79	-5.27	70.4	-12.0	
0.6	-75.79	0.24	76.1	-6.4	
0.8	-75.79	4.08	79.7	-2.6	
1.0	-75.79	6.67	82.6	0.0	
1.5	-75.79	8.74	84.3	2.1	
2.0	-75.79	8.54	84.4	1.9	
2.5	-75.79	7.12	82.9	0.5	
3.0	-75.79	5.33	81.2	-1.3	0
3.5	-75.79	2.02	77.8	-4.2	-4
4.0	-75.79	-2.62	73.2	-9.5	-7
4.5	-75.79	-8.41	67.5	-15.2	-11
5.0	-75.79	-14.05	61.7	-20.5	-13
6.0	-75.79	-22.68	53.2	-29.4	-18
7.0	-75.79	-30.62	45.4	-37.5	-22
8.0	-75.79	-38.95	36.7	-45.5	-26
9.0	-75.79	-60.00	15.8	-66.7	-29
10.0	-75.79	-60.00	15.8	-66.7	-31
12.0	-75.79	-60.00	15.8	-66.7	-36
14.0	-75.79	-60.00	15.8	-66.7	-40
16.0	-75.79	-60.00	15.8	-66.7	-44
18.0	-75.79	-60.00	15.8	-66.7	-47
20.0	-75.79	-60.00	15.8	-66.7	-50
25.0	-75.79	-60.00	15.8	-66.7	-50
30.0	-75.79	-60.00	15.8	-66.7	-50
35.0	-75.79	-60.00	15.8	-66.7	-50
40.0	-75.79	-60.00	15.8	-66.7	-50
45.0	-75.79	-60.00	15.8	-66.7	-50
50.0	-75.79	-60.00	15.8	-66.7	-50

Note: Due to the difficulty of measuring the Frequency Response of the internal low-pass filter, the Frequency Response of All Modulation States is performed to show the roll-off at 3 KHz in comparison with the recommended audio filter attenuation.

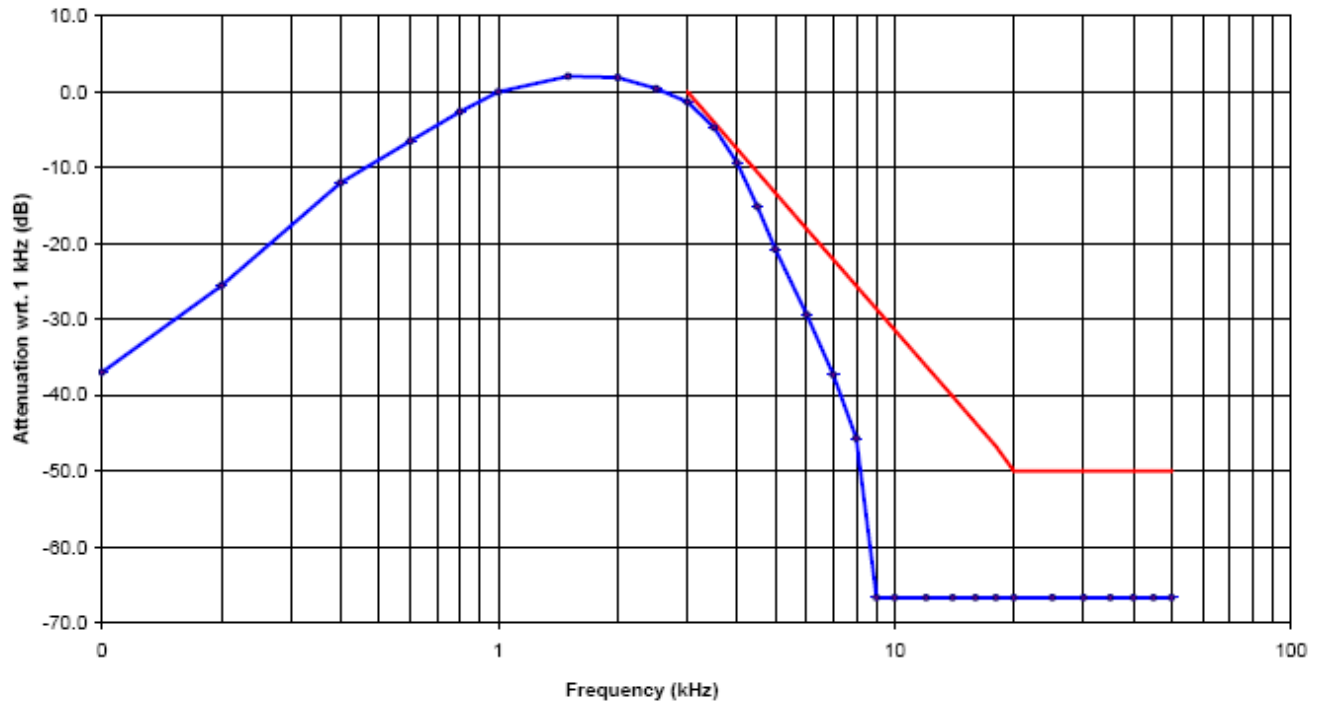


APPENDIX I

PHOTOGRAPHS OF SETUP

CONDUCTED EMISSION TEST SETUP



RADIATED TEST SETUP

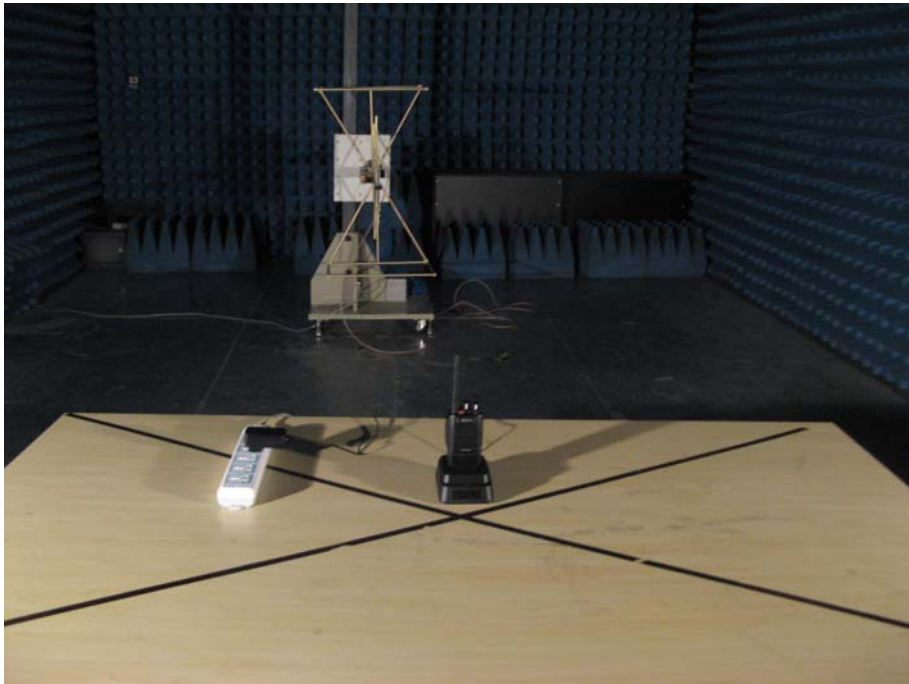

APPENDIX II

EXTERNAL VIEW OF EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT




RIGHT VIEW OF EUT




OPEN VIEW OF EUT




INTERNAL VIEW OF EUT - 1

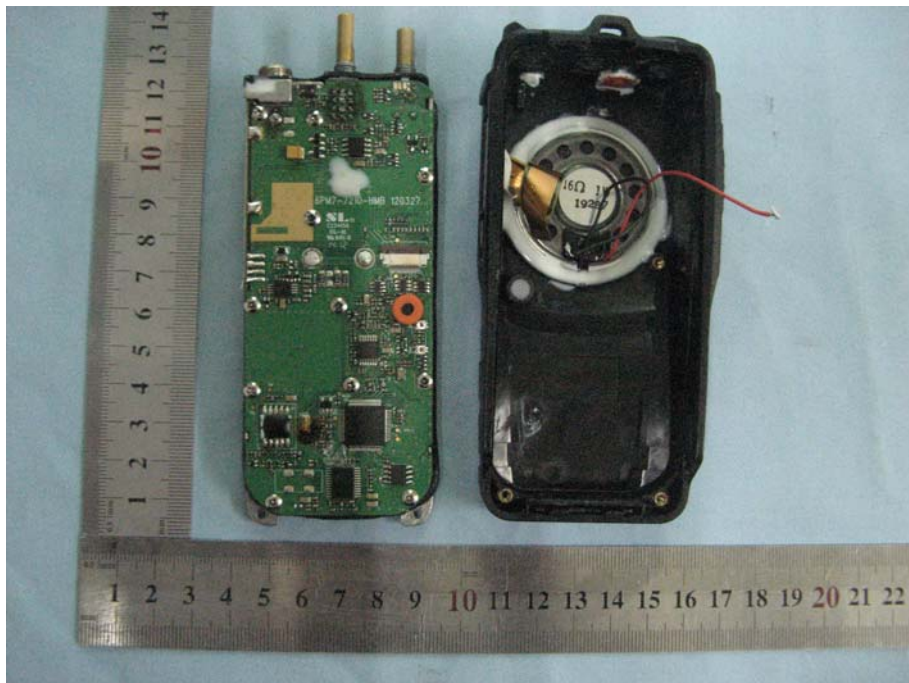

INTERNAL VIEW OF EUT - 2

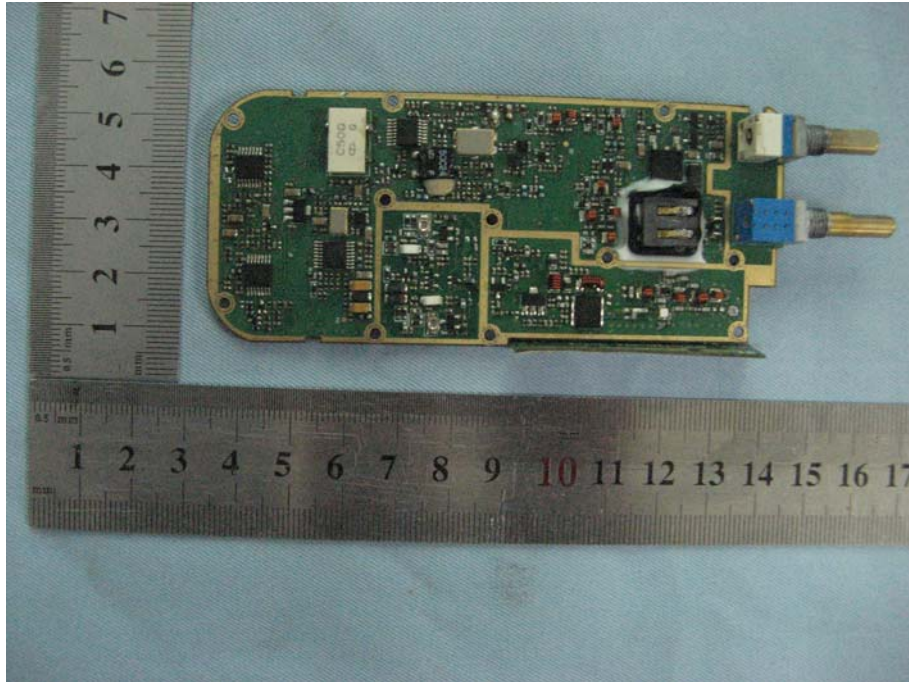

INTERNAL VIEW OF EUT - 3

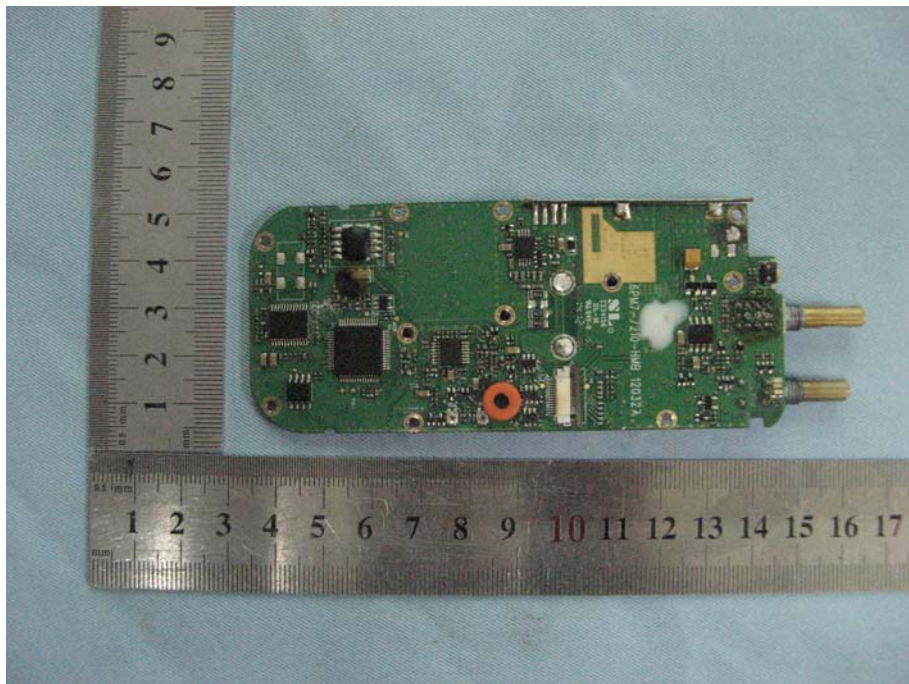

----END OF REPORT----