



FCC PART 22 and 90 TEST REPORT

For

Kirisun Communications Co.,Ltd.

*****3-6'Flqqr,ROBETA Building, No. 1, QiMin Road, Song Ping Shan Area, Science & Industry Park,
P cpuj cp'District. Shenzhen, Guangdong, China

FCC ID: Q5ETM840

Report Type: Original Report	Product Type: DMR Mobile Radio
Test Engineer: Leon Chen	<i>leon chen</i>
Report Number: RDG140721006-00	
Report Date: 2014-07-22	
Reviewed By: Jerry Zhang EMC Manager	<i>Jerry Zhang</i>
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	8
APPLICABLE STANDARD	8
FCC §2.1046 & § 22.727 & §90.205- RF OUTPUT POWER	9
APPLICABLE STANDARD	9
TEST PROCEDURE	9
TEST EQUIPMENT LIST AND DETAILS.....	9
TEST DATA	9
FCC §2.1047 & §90.207 - MODULATION CHARACTERISTIC.....	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST DATA	11
FCC §2.1049& §22.357 & § 22.731 & §90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK	17
APPLICABLE STANDARD	17
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST DATA	18
FCC §2.1051& §22.861 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	28
APPLICABLE STANDARD	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST PROCEDURE	28
TEST DATA	29
FCC §2.1053 & §22.861 & §90.210 - RADIATED SPURIOUS EMISSIONS.....	36
APPLICABLE STANDARD	36
TEST EQUIPMENT LIST AND DETAILS.....	36
TEST PROCEDURE	36
TEST DATA	37
FCC §2.1055 & § 22.355 & §90.213- FREQUENCY STABILITY	38
APPLICABLE STANDARD	38
TEST EQUIPMENT LIST AND DETAILS.....	38
TEST PROCEDURE	38

TEST DATA38

FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR.....40

 APPLICABLE STANDARD40

 TEST EQUIPMENT LIST AND DETAILS.....40

 TEST PROCEDURE40

 TEST DATA41

DECLARATION OF SIMILARITY44

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Kirisun Communications Co.,Ltd.*'s product, model: *TM840G (FCC ID: Q5ETM840)* (the "EUT") in this report is a *DMR Mobile Radio*, which was measured approximately: 17.2 cm (L) x 19.5 cm (H) x 5.8 cm (T), rated input voltage: 13.6 VDC.

Note: The series product, model TM840, TM840G are electrically identical, the difference between them is just the model name, we selected TM840G for fully testing, and the details was explained in the attached declaration letter.

** All measurement and test data in this report was gathered from production sample serial number: 409914020000001(Assigned by the Applicant). The EUT was received on 2014-07-21.*

Objective

This test report is prepared on behalf of *Kirisun Communications Co.,Ltd.* in accordance with Part 2, and Part 90 of the Federal Communications Commission's rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Part 22 – Public Mobile Service
Part 90 – Private Land Mobile Radio Service

Applicable Standards: TIA 603-D and ANSI 63.4-2003.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Dongguan) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 500069-0).



The current scope of accreditations can be found at <http://ts.nist.gov/standards/scopes/5000690.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a test mode.

EUT Specification:

Operating Frequency Band	400-470MHz
Modulation Mode	FM, 4FSK
Channel Separation	12.5 kHz
Transmitter Power	Highest power level: 25 W Lowest power level: 5 W


Equipment Modifications

No modifications were made to the unit tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Pro instrument	DC Power Supply	pps3300	N/A

Block Diagram of Test Setup

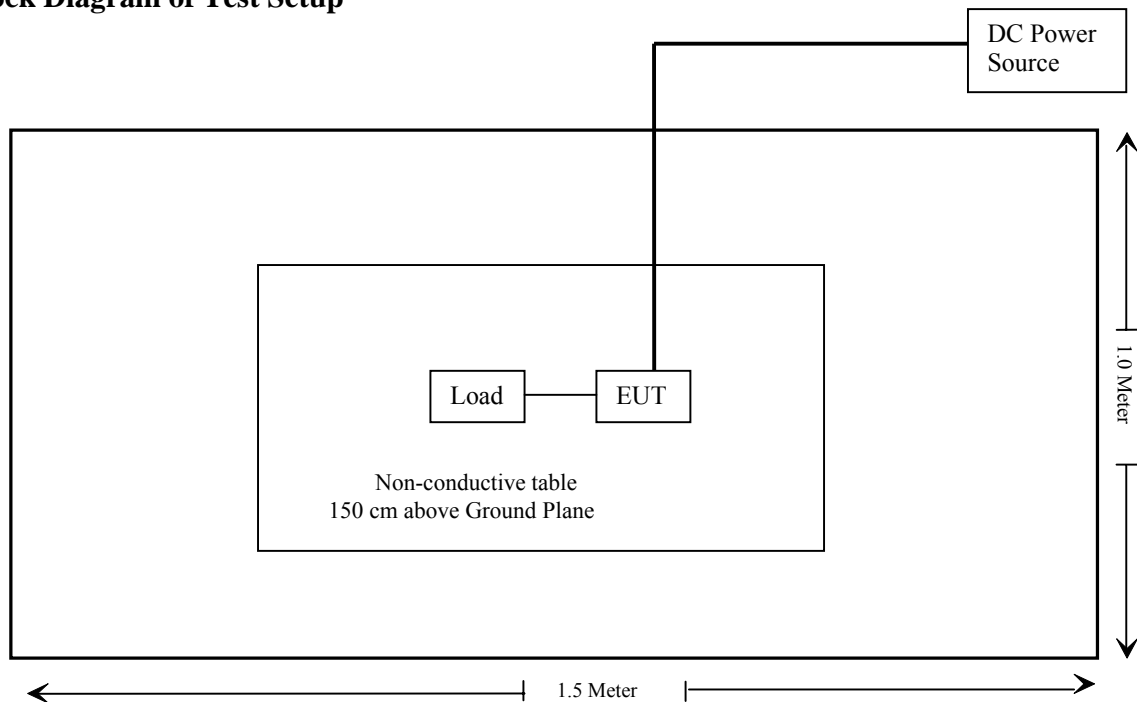

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§2.1091	Maximum Permissible Exposure	Compliance
§2.1046; § 22.727;§90.205	RF Output Power	Compliance
§2.1047;§90.207	Modulation Characteristic	Compliance
§2.1049;§22.357;§ 22.731;§90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliance
§2.1051; §22.861;§90.210	Spurious Emission at Antenna Terminal	Compliance
§2.1053; §22.861;§90.210	Spurious Radiated Emissions	Compliance
§2.1055; § 22.355;§90.213	Frequency Stability	Compliance
§90.214	Transient Frequency Behavior	Compliance

FCC §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for Maximum Permissible Exposure (MPE)

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Frequency	Output Power	Duty Cycle	Cable Loss		Typical Antenna		Distance	Power Density	Power Density
			dB	numeric	dBi	numeric			
MHz	mW						cm	mW/cm ²	mW/cm ²
435	26000	50%	2	1.58	0	1	50	0.26	0.29

Note: the maximum output power is 26 Watts.

Result: The device meet FCC MPE at 50 cm distance

FCC §2.1046 & § 22.727 & §90.205- RF OUTPUT POWER

Applicable Standard

FCC §2.1046, § 22.727 and §90. 205.

Test Procedure

Conducted RF Output Power:

TIA-603-D section 2.2.1

Radiated method:

TIA 603-D section 2.2.17

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Spectrum Analyzer setting:

RBW	Video B/W
100 kHz	300 kHz

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	30.4 °C
Relative Humidity:	64 %
ATM Pressure:	99.8 kPa

The testing was performed by Leon Chen on 2014-07-22.

Test Mode: Transmitting

Test Result: Compliance.

Please refer to following table.

Modulation Mode	Channel Separation	f_c	Highest Power Level	Lowest Power Level	Note
		MHz	W	W	
FM	12.5K	400.0125	25.27	5.05	Not for FCC Review
	12.5K	435	25.36	5.21	For FCC Part 90
	12.5K	469.9875	25.18	5.12	
	12.5K	454.5	25.19	5.18	For FCC Part 22
	12.5K	458	25.04	5.22	
4FSK	12.5K	400.0125	25.22	5.37	Not for FCC Review
	12.5K	435	25.05	5.25	For FCC Part 90
	12.5K	469.9875	25.19	5.13	
	12.5K	454.5	25.24	5.15	For FCC Part 22
	12.5K	458	25.32	5.32	

FCC §2.1047 & §90.207 - MODULATION CHARACTERISTIC

Applicable Standard

FCC§2.1047 & §90.207:

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

Test Procedure

Test Method: TIA/EIA-603 2.2.3

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
HP	RF Communications Test Set	8920A	00 235	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	30.4 °C
Relative Humidity:	64 %
ATM Pressure:	99.8 kPa

The testing was performed by Leon Chen on 2014-07-22.

MODULATION LIMITING

Carrier Frequency: 435 MHz, Channel Separation = 12.5 kHz, high power level

Audio Input Level [dB]	Frequency Deviation (kHz)			FCC Limit [kHz]
	@ 300 Hz	@ 1kHz	@ 3 kHz	
20.0	2.200	2.190	2.189	2.5
15.0	2.036	2.164	2.168	2.5
10.0	1.240	2.159	2.133	2.5
5.0	0.950	2.140	2.131	2.5
0.0	0.536	1.320	2.120	2.5
-5.0	0.505	0.821	2.097	2.5
-10.0	0.375	0.628	1.521	2.5
-15.0	0.240	0.459	0.873	2.5
-20.0	0.240	0.296	0.502	2.5

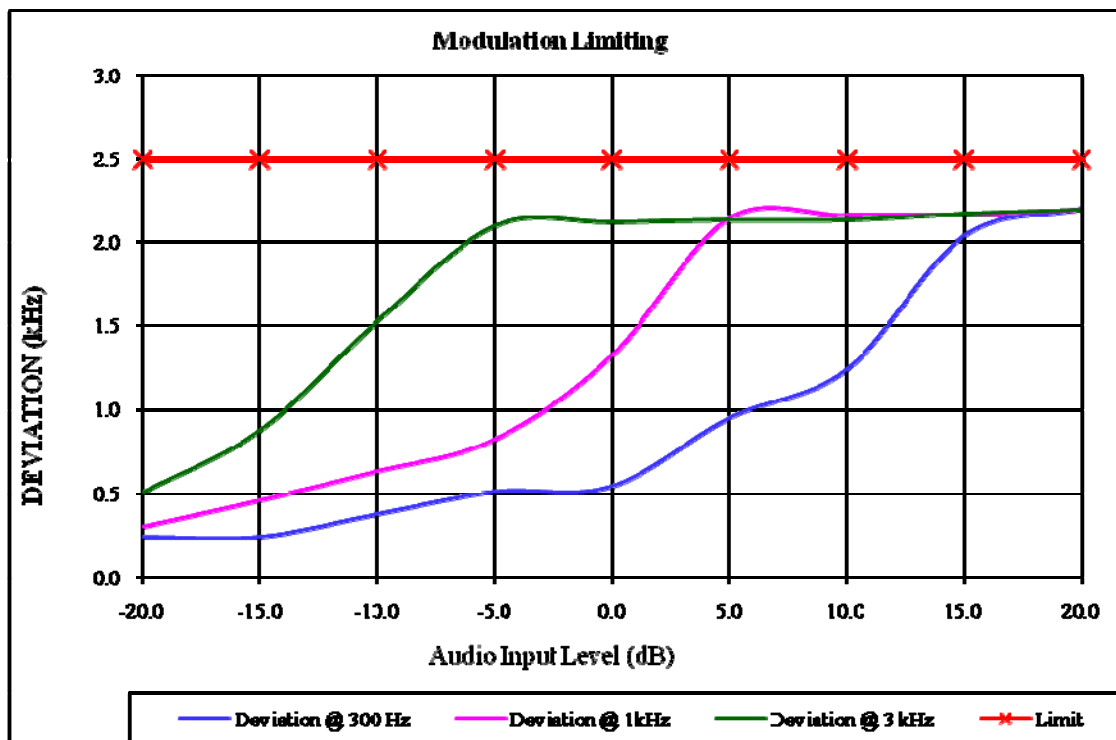


Note: the maximum frequency deviation is 2.2 kHz, which was declared by the manufactory.

MODULATION LIMITING

Carrier Frequency: 435 MHz, Channel Separation = 12.5 kHz, low power level

Audio Input Level [dB]	Frequency Deviation (kHz)			FCC Limit [kHz]
	@ 300 Hz	@ 1kHz	@ 3 kHz	
20.0	2.180	2.188	2.189	2.5
15.0	2.091	2.185	2.148	2.5
10.0	1.312	2.170	2.123	2.5
5.0	1.062	2.151	2.102	2.5
0.0	0.543	1.320	2.095	2.5
-5.0	0.508	0.837	2.033	2.5
-10.0	0.411	0.772	1.658	2.5
-15.0	0.391	0.561	1.027	2.5
-20.0	0.366	0.402	0.633	2.5

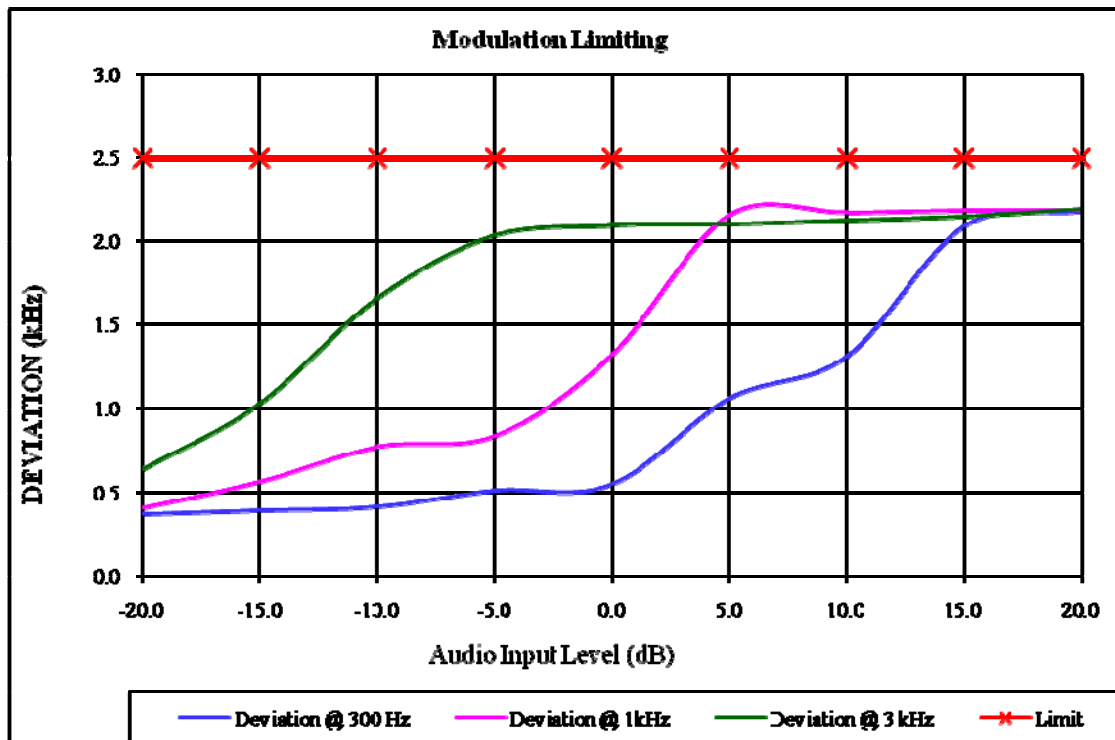


Note: the maximum frequency deviation is 2.2 kHz, which was declared by the manufactory.

Audio Frequency Response

Carrier Frequency: 435 MHz, Channel Separation = 12.5 kHz, high power level


Audio Frequency (Hz)	Response Attenuation (dB)
300	-12.22
400	-8.27
500	-5.62
600	-4.15
700	-2.75
800	-1.69
900	-0.44
1000	0.55
1200	0.28
1400	2.03
1600	2.12
1800	2.55
2000	3.58
2200	4.14
2400	5.18
2600	6.12
2800	7.35
3000	6.99

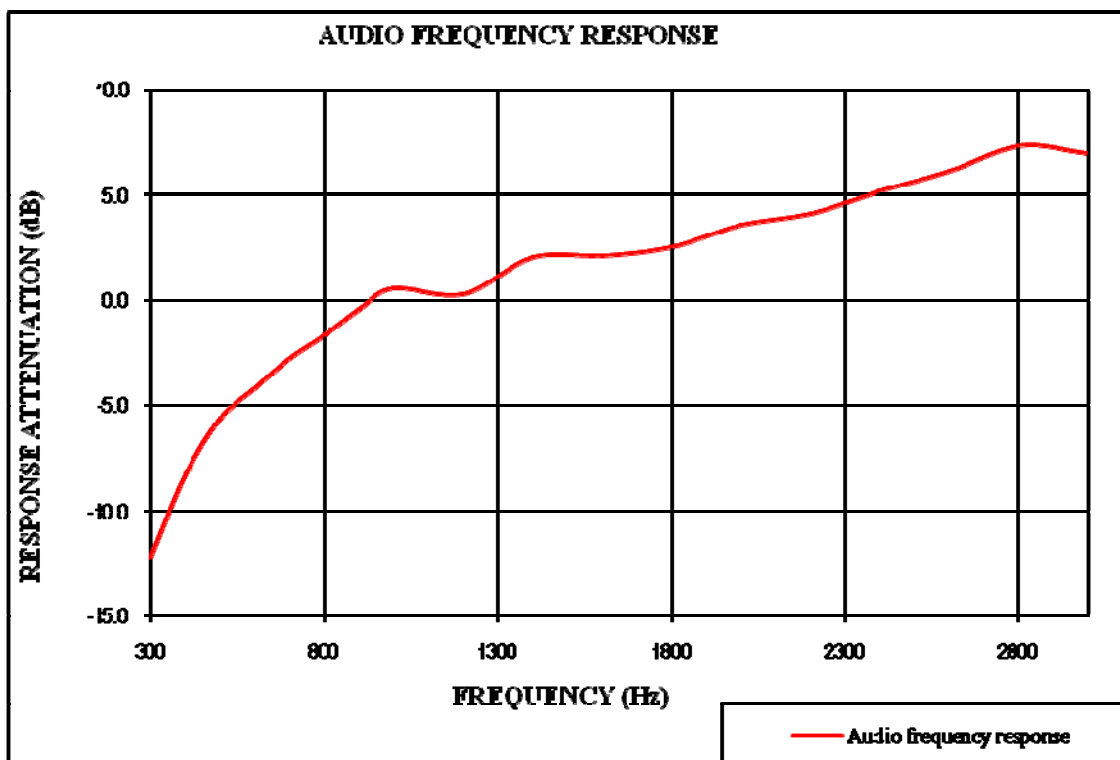

Audio Frequency Response


Carrier Frequency: 435 MHz, Channel Separation = 12.5 kHz, low power level

Audio Frequency (Hz)	Response Attenuation (dB)
300	-10.78
400	-7.05
500	-6.20
600	-3.67
700	-3.22
800	-1.37
900	0.24
1000	1.30
1200	1.41
1400	1.51
1600	2.66
1800	2.88
2000	3.46
2200	4.39
2400	4.47
2600	5.63
2800	6.77
3000	7.28

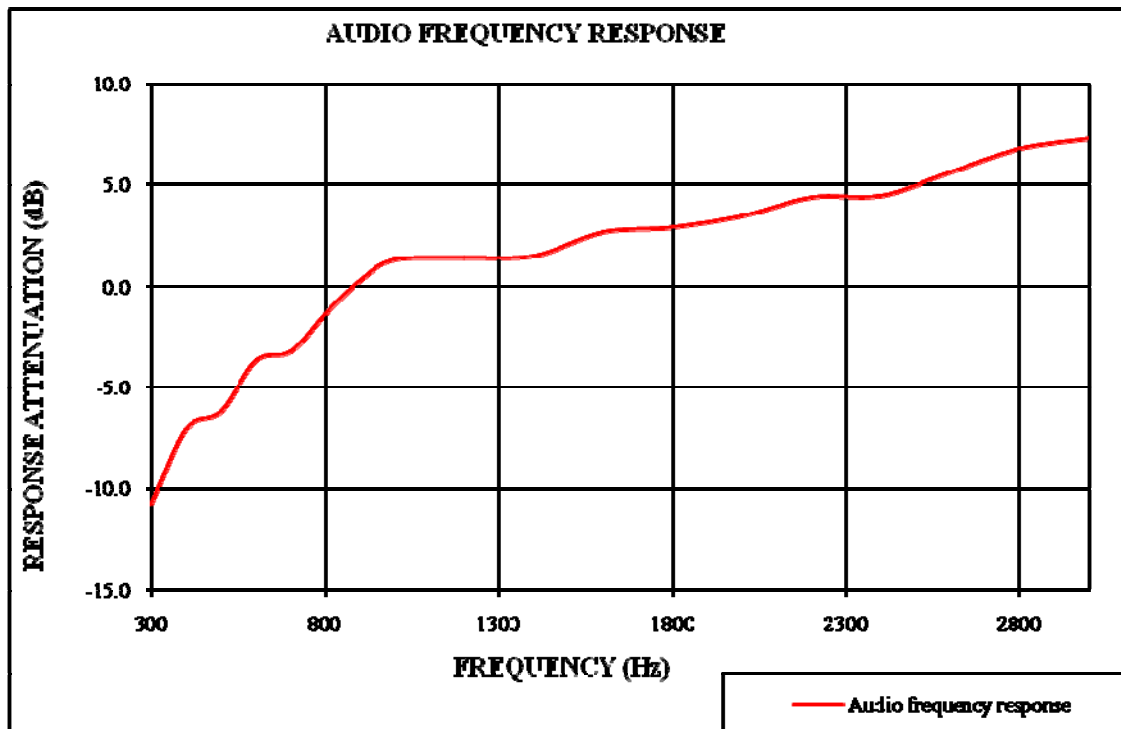

Audio Frequency Low Pass Filter Response

Audio Frequency	Response Attenuation	Limit
kHz	dB	dB
3.0	-2.5	0.0
3.5	-8.9	-6.7
4.0	-14.4	-12.5
5.0	-30.7	-22.2
7.0	-40.8	-36.8
10.0	-56.3	-52.3
15.0	-78.8	-69.9
20.0	-84.2	-82.5
30.0	-84.3	-82.5
50.0	-84.5	-82.5
70.0	-84.5	-82.5

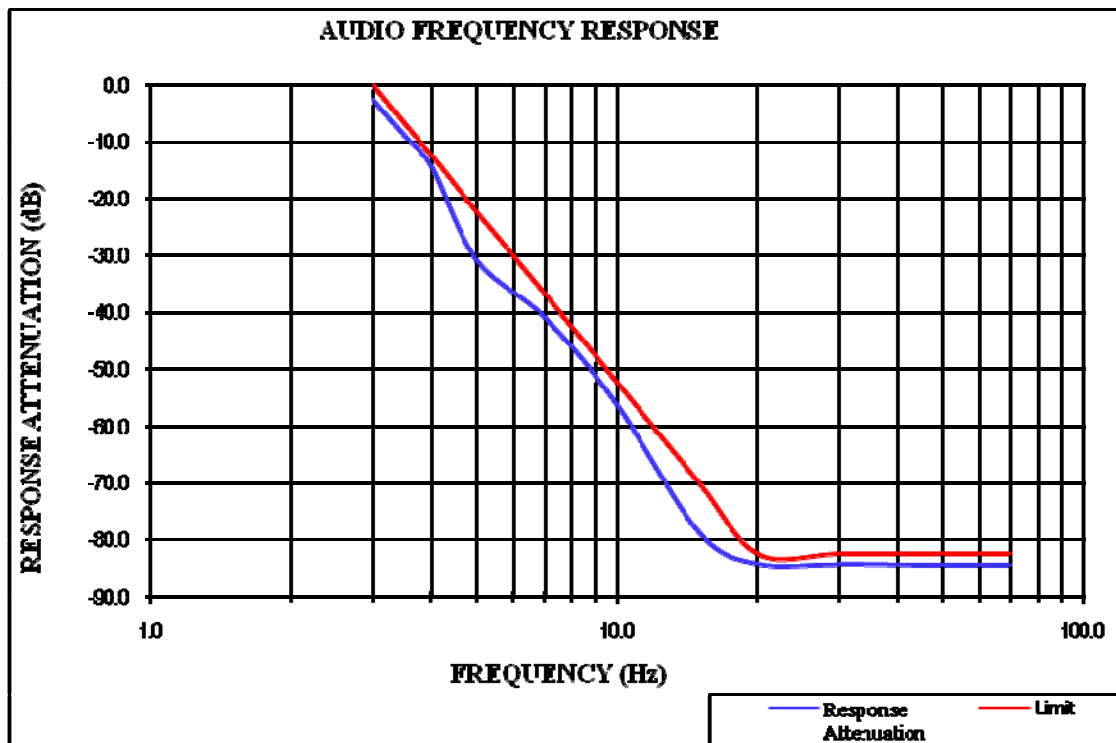

FCC §2.1049 & §22.357 & § 22.731 & §90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK

Applicable Standard

FCC §2.1049, §22.357, § 22.731, §90.209 and §90.210

Applicable Emission Masks

Frequency band (MHz)	Mask for equipment with audio low pass filter	Mask for equipment without audio low pass filter
Below 25	A or B	A or C
25-50	B	C
72-76	B	C
150-174	B, D, or E	C, D or E
150 paging only	B	C
220-222	F	F
421-512	B, D, or E	C, D, or E
450 paging only	B	G
806-809/851-854	B	H
809-824/854-869	B	G
896-901/935-940	I	J
902-928	K	K
929-930	B	G
4940-4990 MHz	L or M	L or M
5850-5925		
All other bands	B	C

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log(P)$ dB or 70 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
HP	RF Communications Test Set	8920A	00 235	2014-05-09	2015-05-09
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	30.4 °C
Relative Humidity:	64 %
ATM Pressure:	99.8 kPa

The testing was performed by Leon Chen on 2014-07-22.

Test Mode: Transmitting

Test Result: Compliance.

Please refer to following tables.

For FCC Part 90


Modulation Mode	Channel Separation (KHz)	Frequency (MHz)	99% Occupied Bandwidth (kHz)	Output Power
FM	12.5	435	10.30	Low Power Level
FM	12.5	435	10.30	High Power Level
4FSK	12.5	435	9.09	Low Power Level
4FSK	12.5	435	9.00	High Power Level

For FCC Part 22


Modulation Mode	Channel Separation (KHz)	Frequency (MHz)	99% Occupied Bandwidth (kHz)	Output Power
FM	12.5	454.5	10.30	Low Power Level
FM	12.5	458	10.30	Low Power Level
FM	12.5	454.5	10.30	High Power Level
FM	12.5	458	10.30	High Power Level
4FSK	12.5	454.5	9.50	Low Power Level
4FSK	12.5	458	9.51	Low Power Level
4FSK	12.5	454.5	9.40	High Power Level
4FSK	12.5	458	9.00	High Power Level

Part 90:


Occupied Bandwidth – FM (Low Power Level)

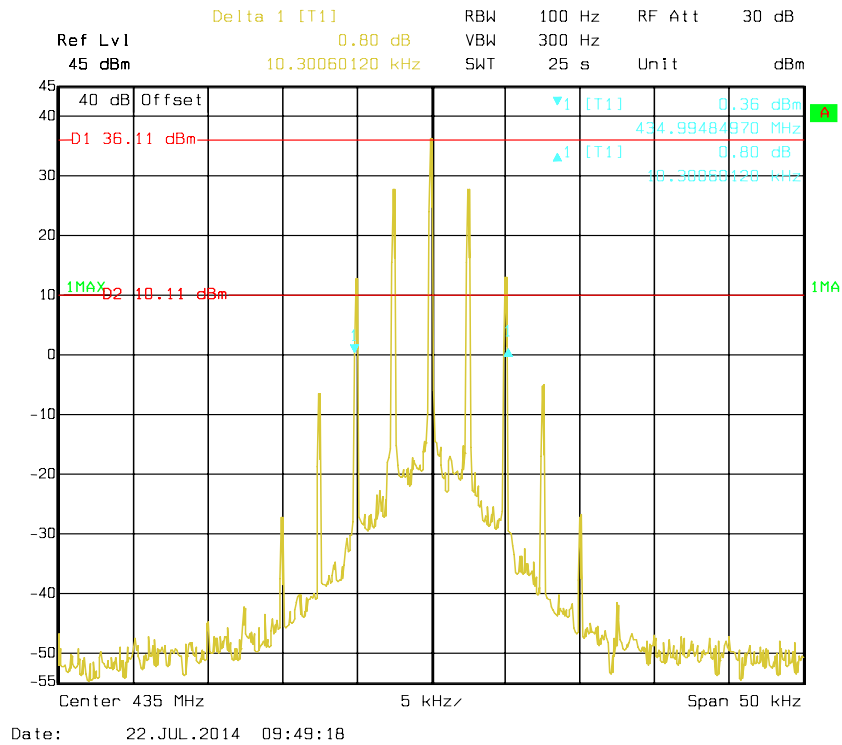


Emission Mask - Type D

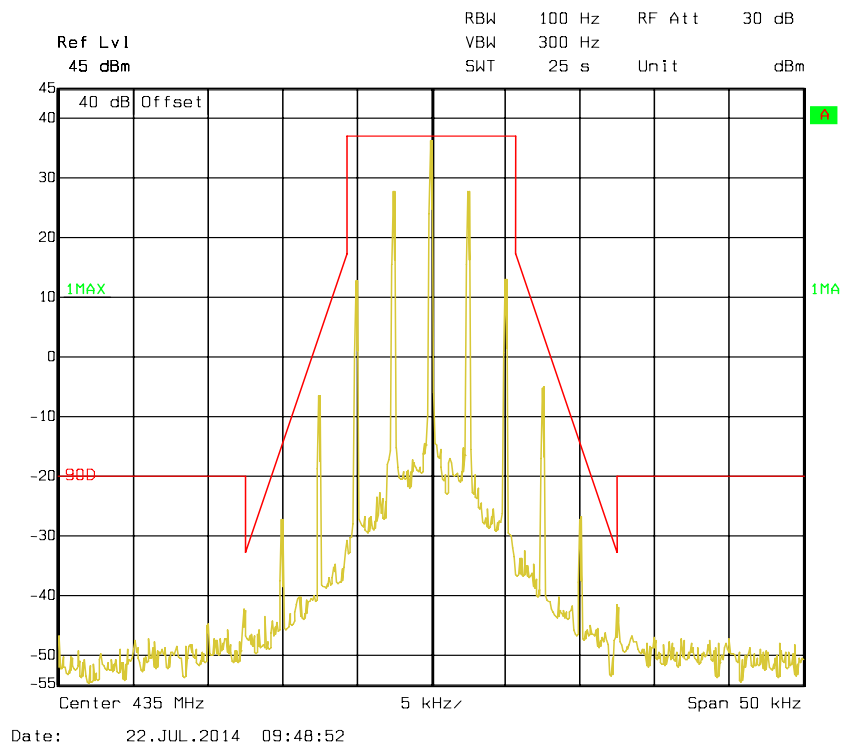


Occupied Bandwidth – FM (High Power Level)

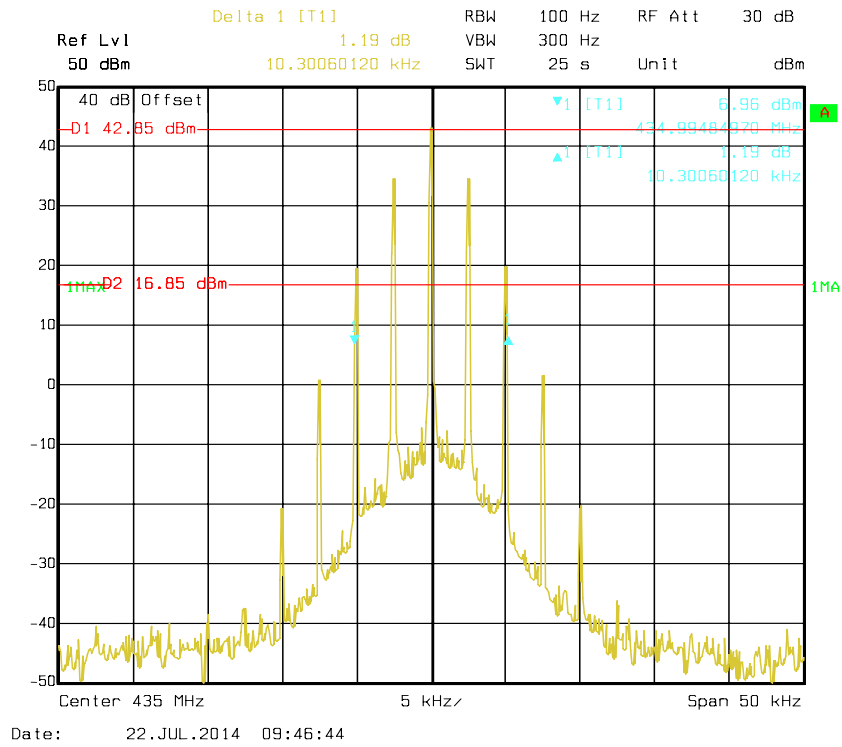


Emission Mask - Type D

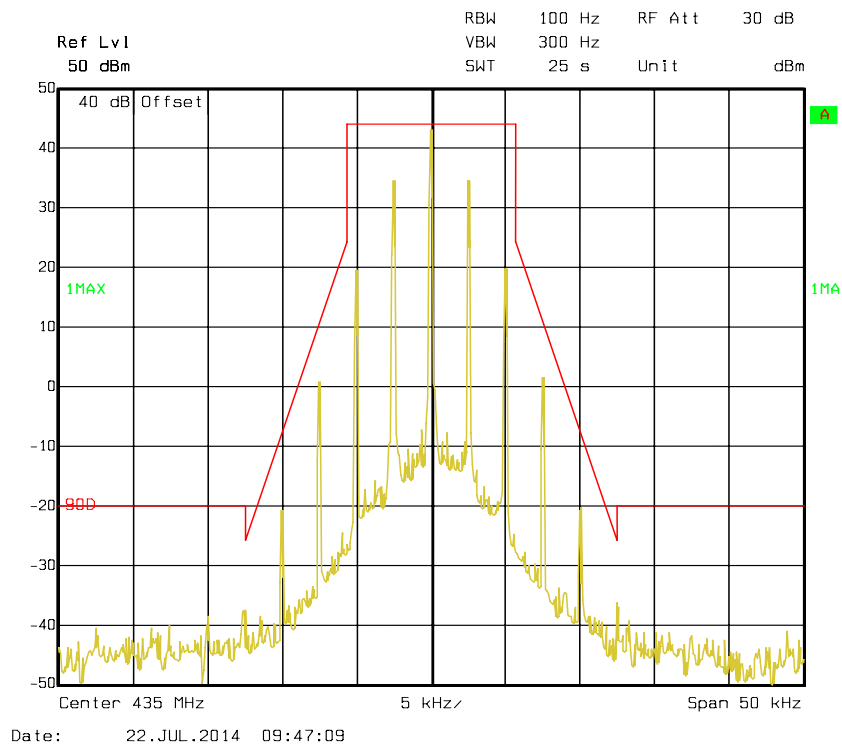


Occupied Bandwidth – 4FSK (Low Power Level)

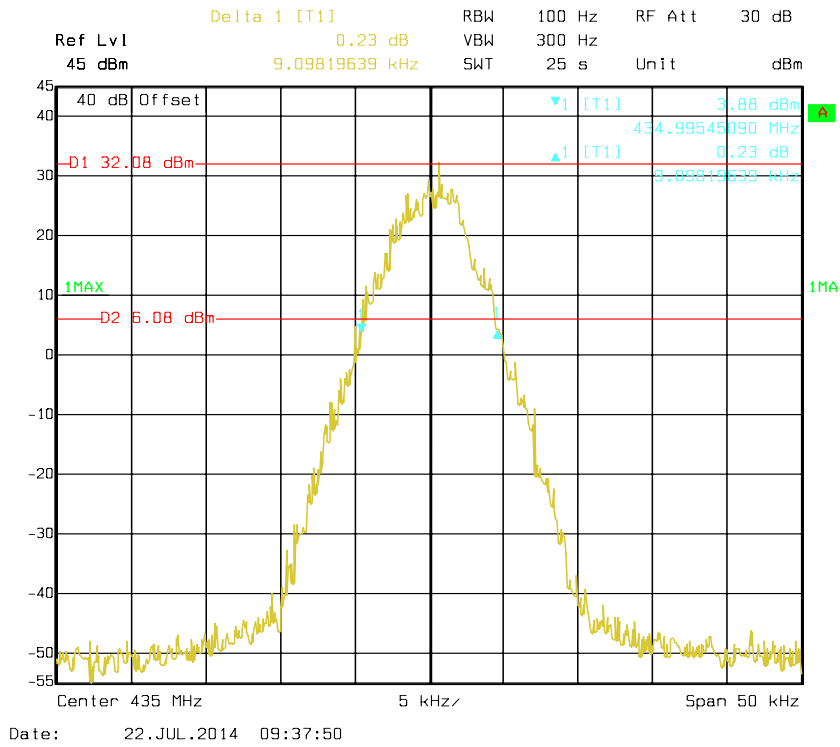


Emission Mask - Type D

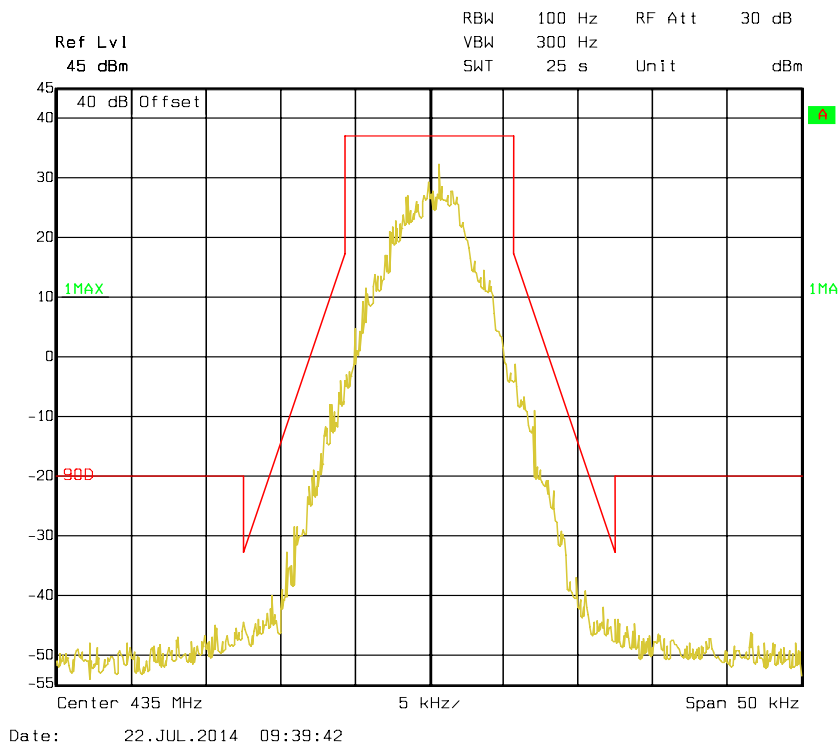

Occupied Bandwidth –4FSK (Highest Power Level)

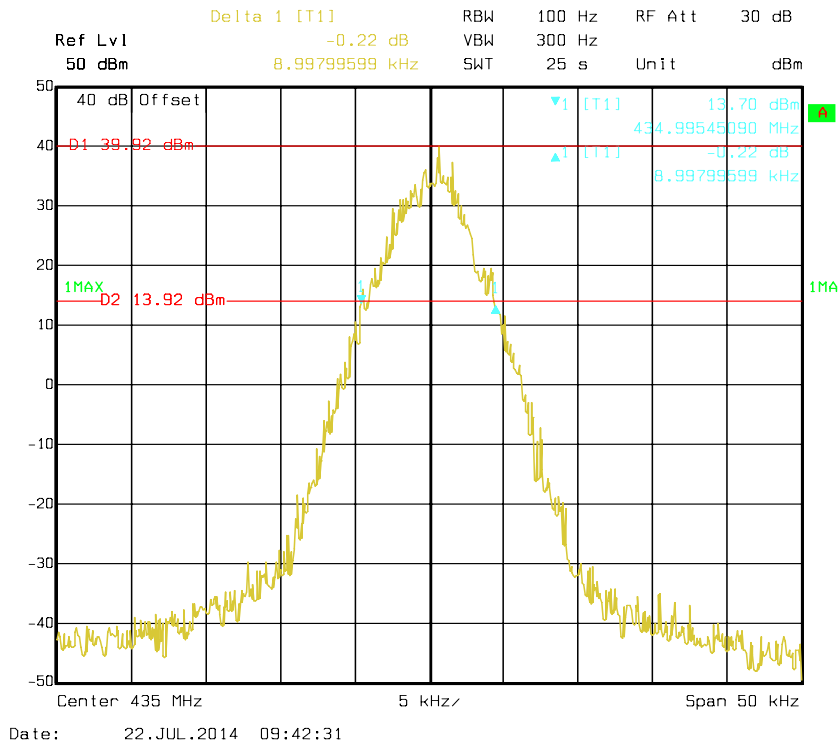


Emission Mask - Type D

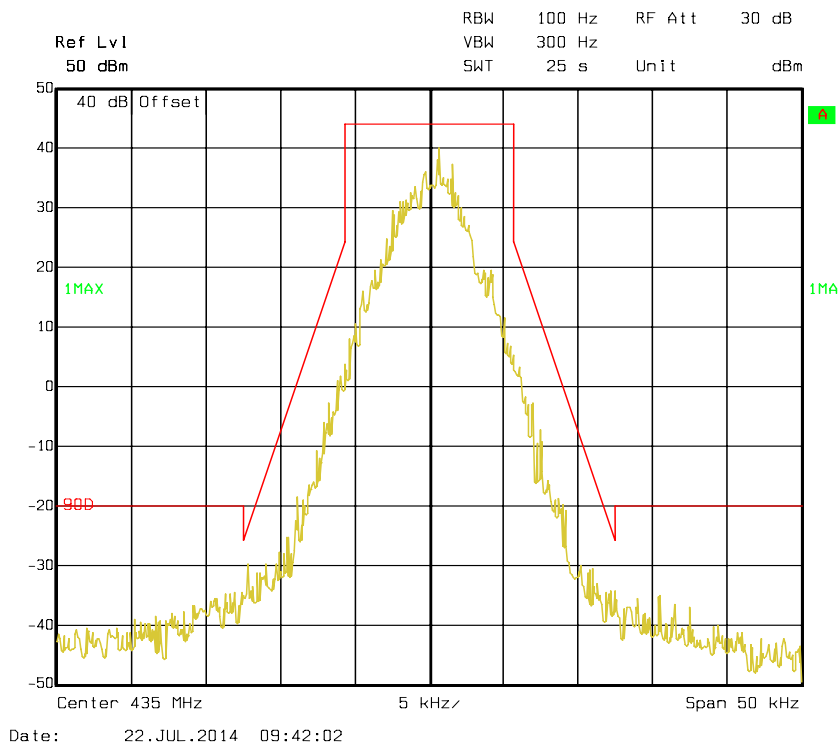


Part 22:

Occupied Bandwidth – FM, 454.5 MHz, Low Power Level

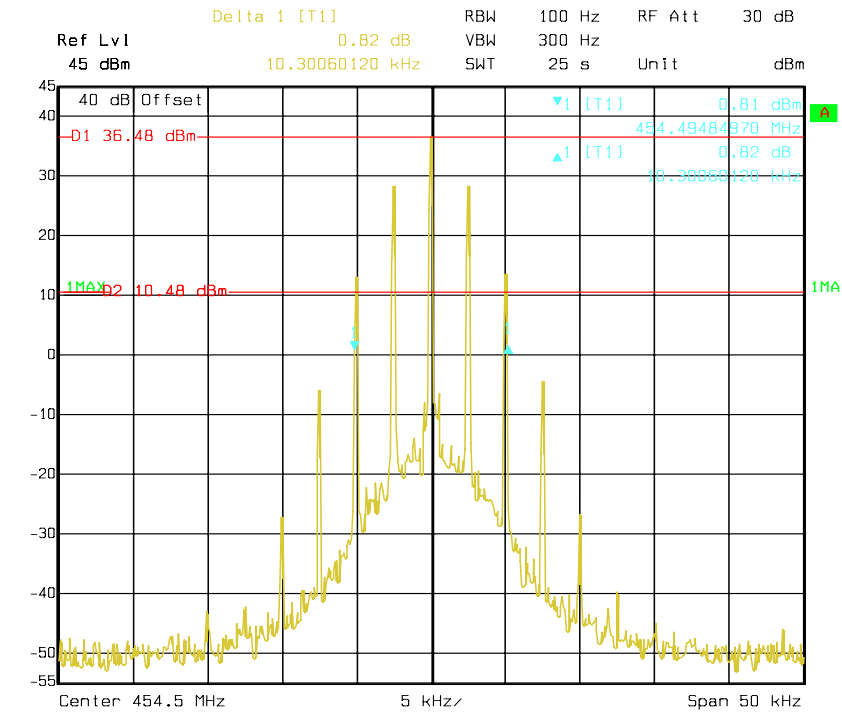


Date: 22.JUL.2014 09:53:03

Occupied Bandwidth – FM, 458 MHz, Low Power Level

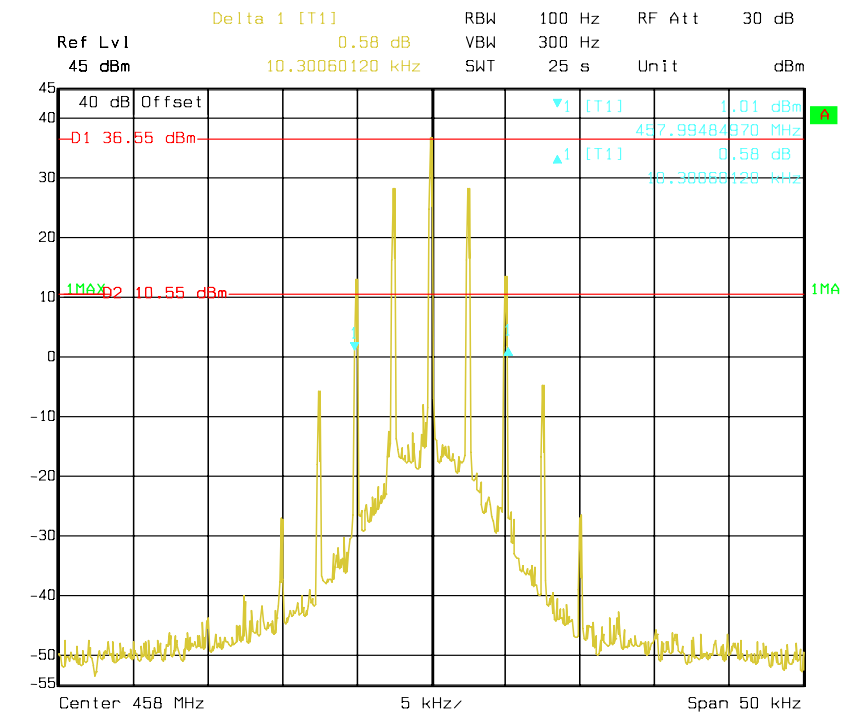


Date: 22.JUL.2014 09:58:43


Occupied Bandwidth – FM, 454.5 MHz, High Power Level

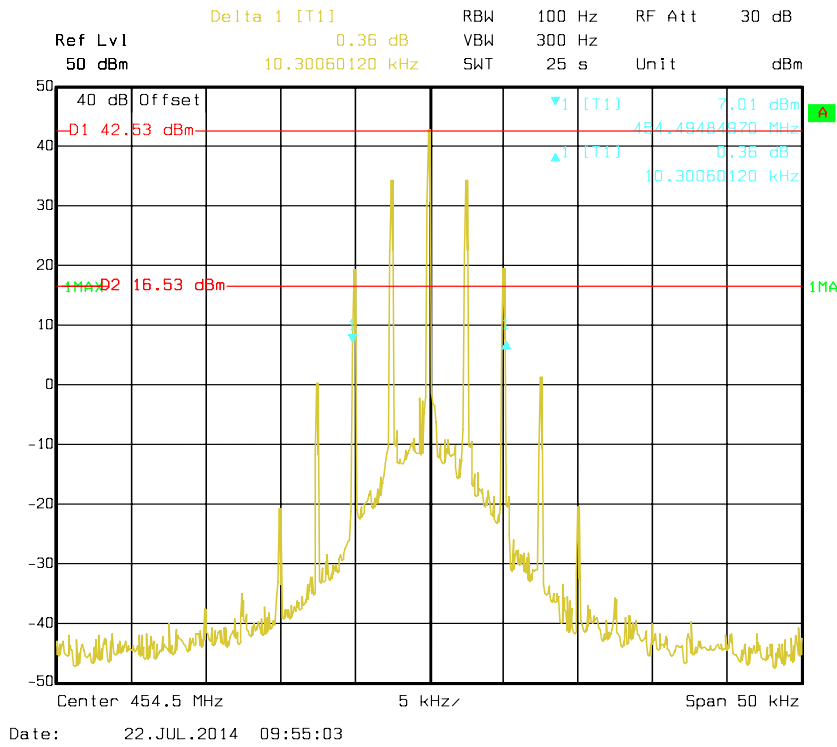


Occupied Bandwidth – FM, 458MHz, High Power Level

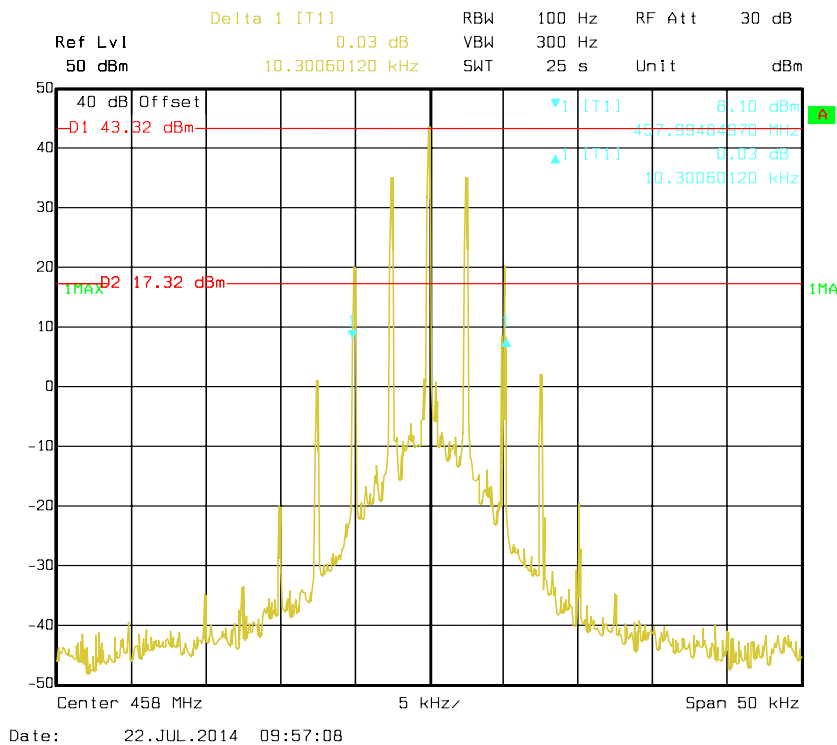


Occupied Bandwidth – 4FSK, 454.5 MHz, Low Power Level

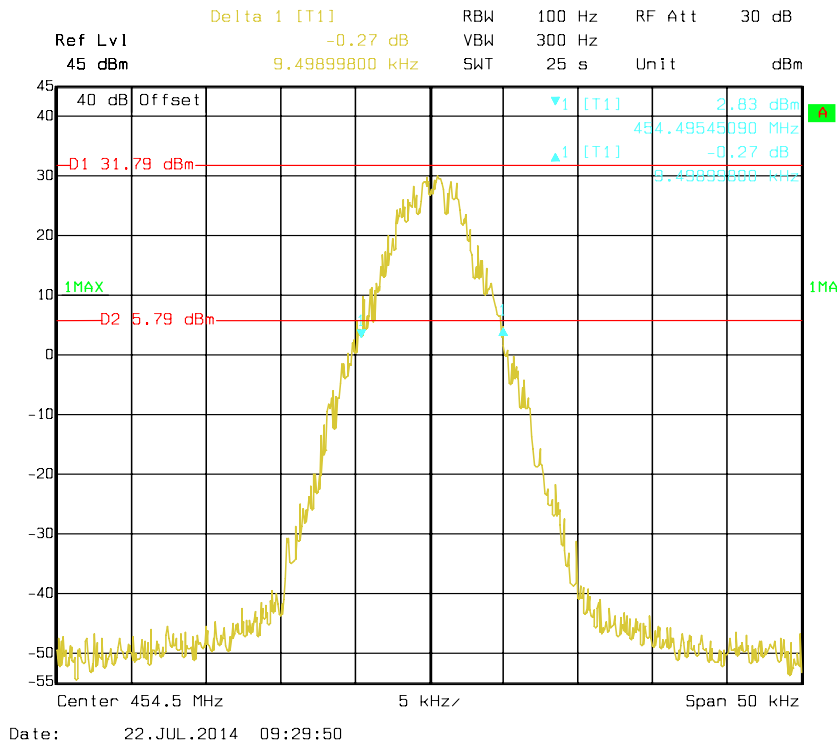


Occupied Bandwidth – 4FSK, 458 MHz, Low Power Level

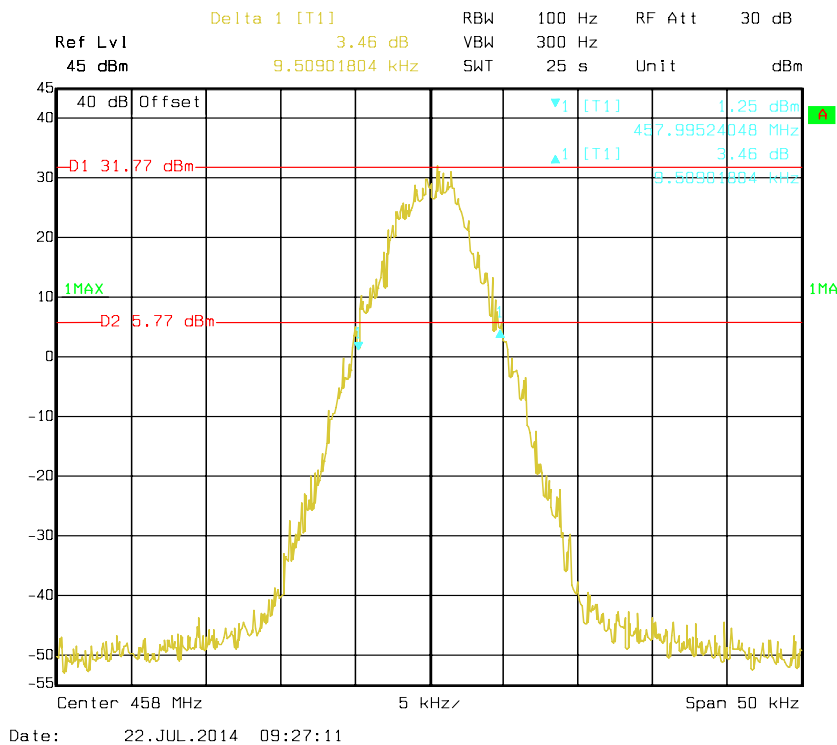

Occupied Bandwidth –4FSK, 454.5MHz, Highest Power Level

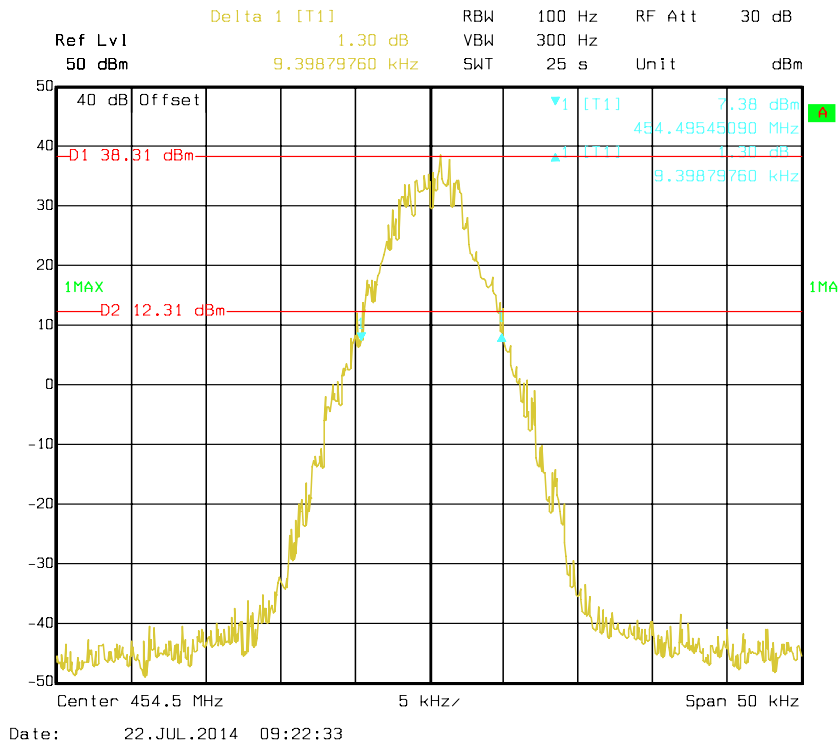

Occupied Bandwidth –4FSK, 458MHz, Highest Power Level

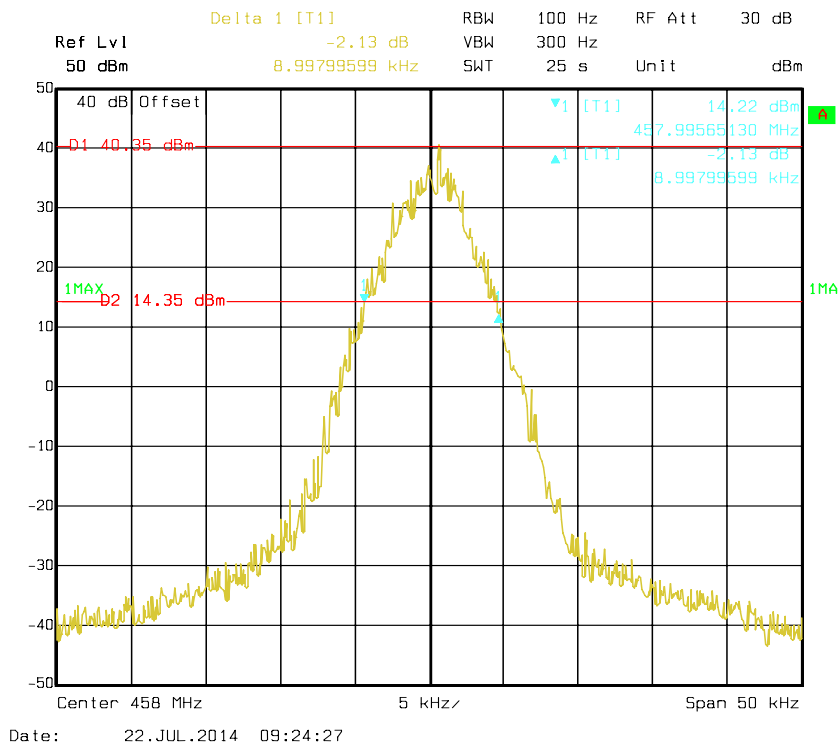

FCC §2.1051& §22.861 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log(P)$ dB or 70 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
HP	RF Communications Test Set	8920A	00 235	2014-05-09	2015-05-09
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

Adjust the spectrum analyzer for the following settings:

- 1) Resolution Bandwidth = 100 kHz for spurious emissions below 1 GHz, and 1 MHz for spurious emissions above 1 GHz.
- 2) Video Bandwidth ≥ 3 times the resolution bandwidth.
- 3) Sweep Speed ≤ 2000 Hz per second.
- 4) Detector Mode = mean or average power.

Test Data


Environmental Conditions

Temperature:	30.4 °C
Relative Humidity:	64 %
ATM Pressure:	99.8 kPa


The testing was performed by Leon Chen on 2014-07-22.

Please refer to the following plots.


435 MHz – FM Mode

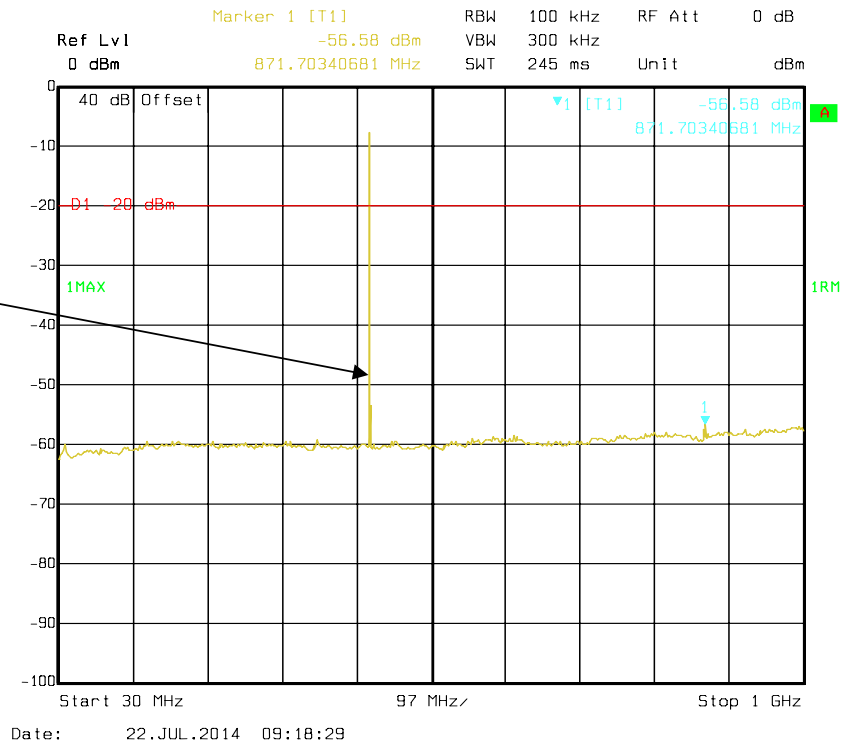


Fundamental test with Band Reject Filter

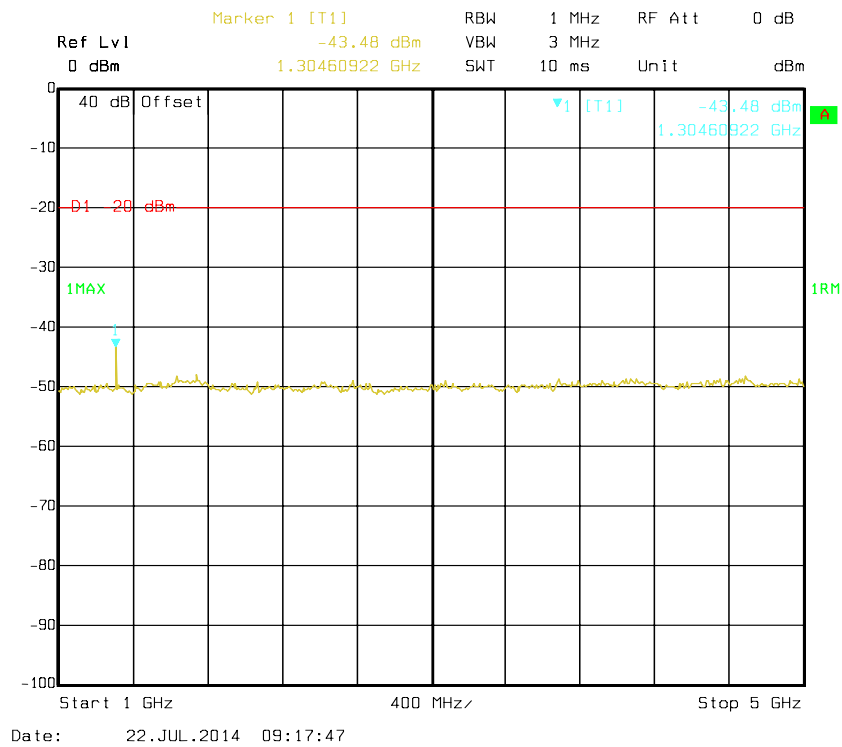


454.5 MHz – FM Mode

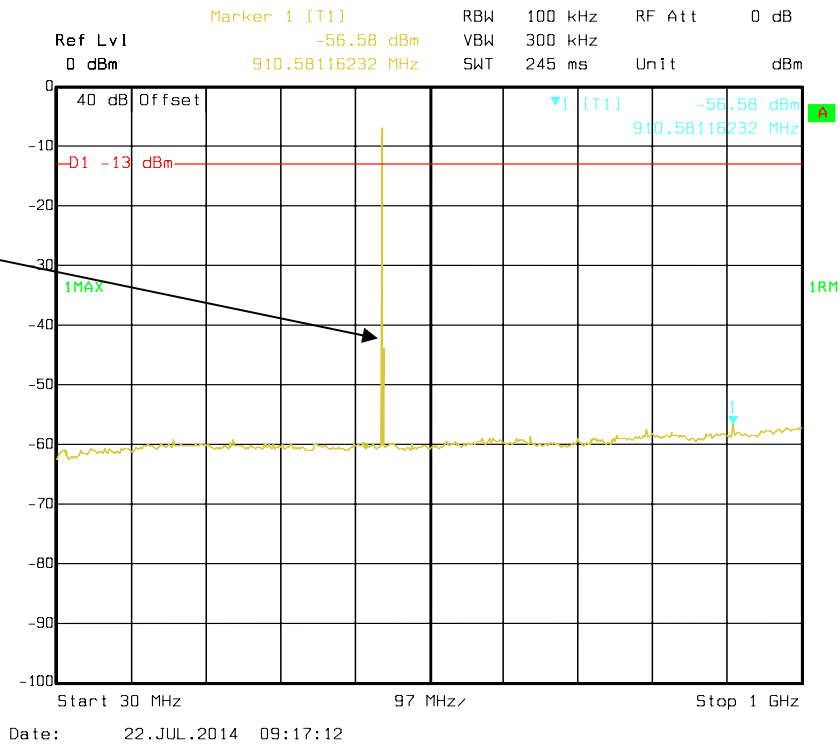


Fundamental test with Band Reject Filter

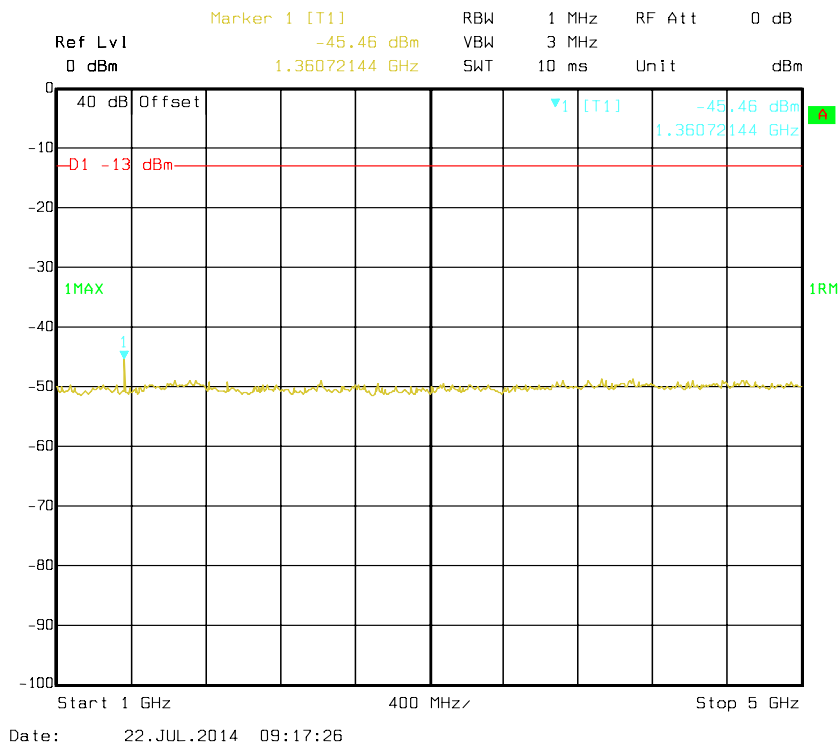

458 MHz – FM Mode


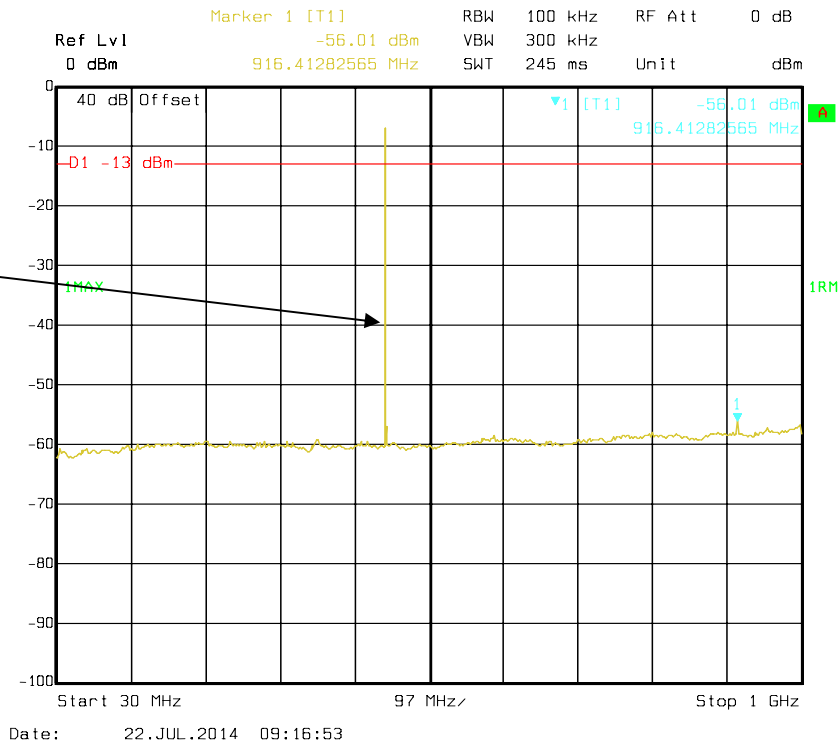


Fundamental test with Band Reject Filter


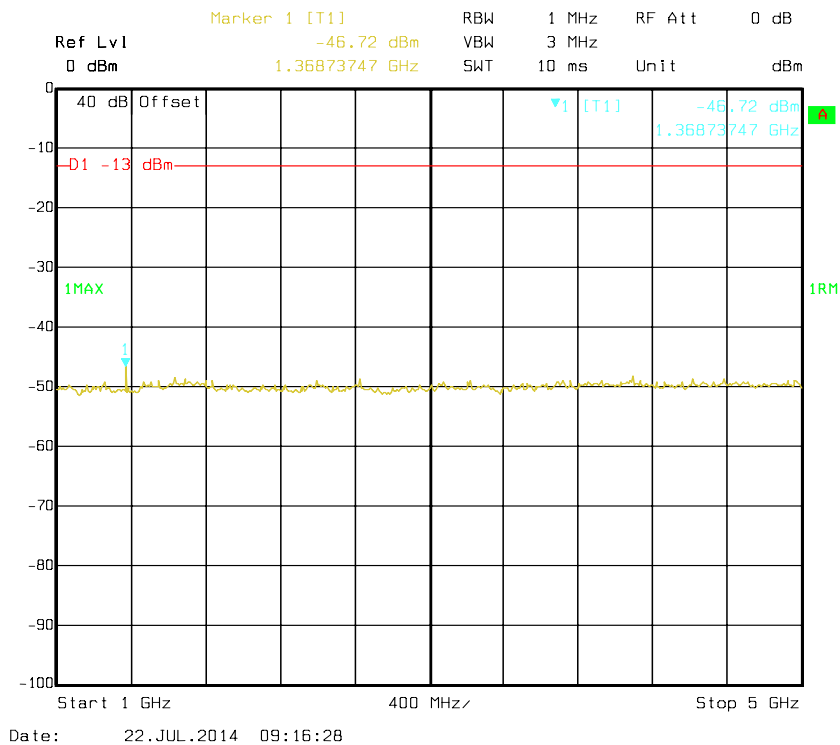


435 MHz – 4FSK Mode


Fundamental test with Band Reject Filter

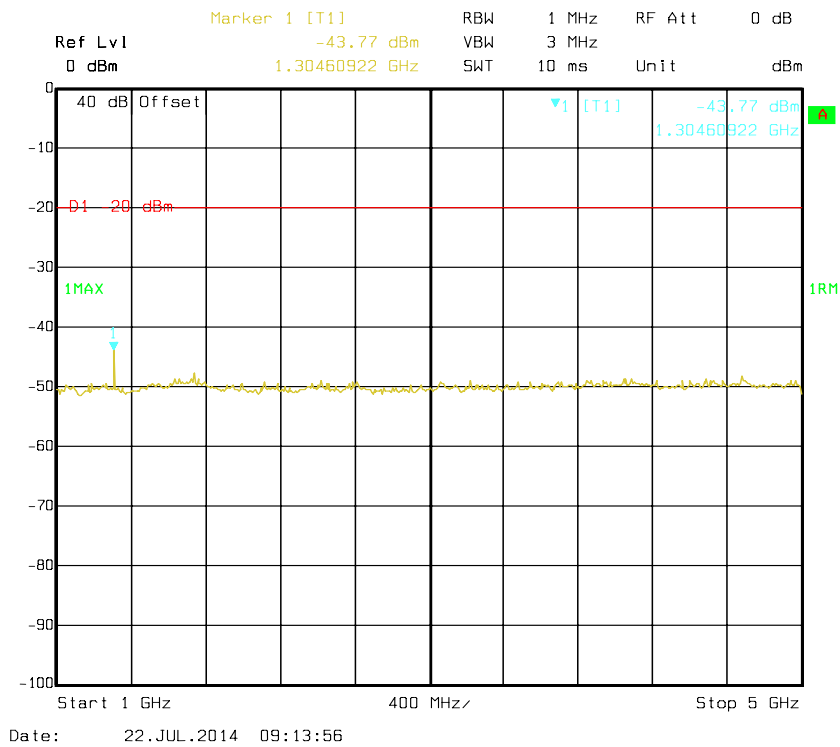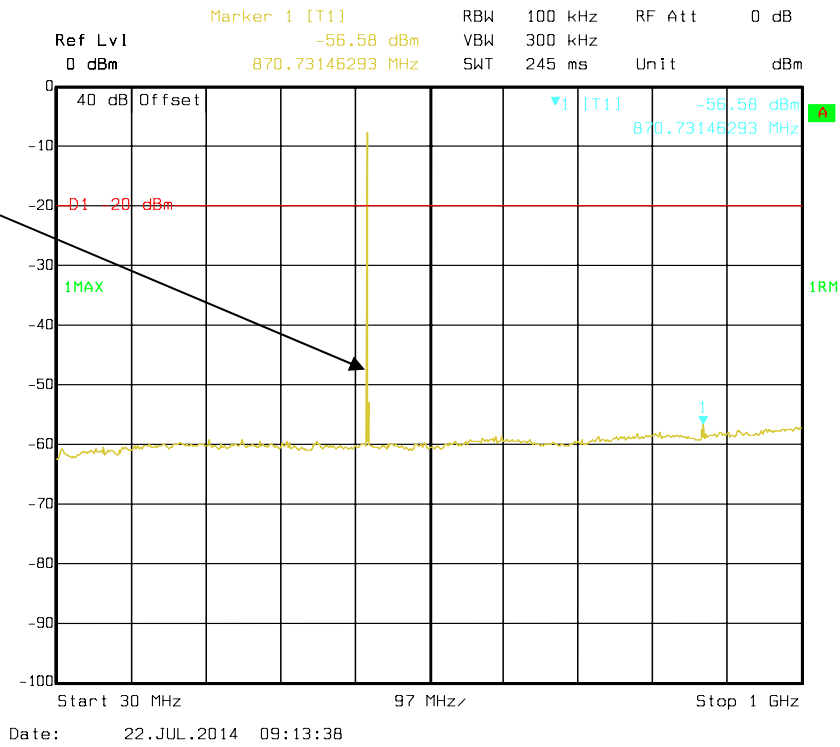



454.5 MHz – 4FSK Mode

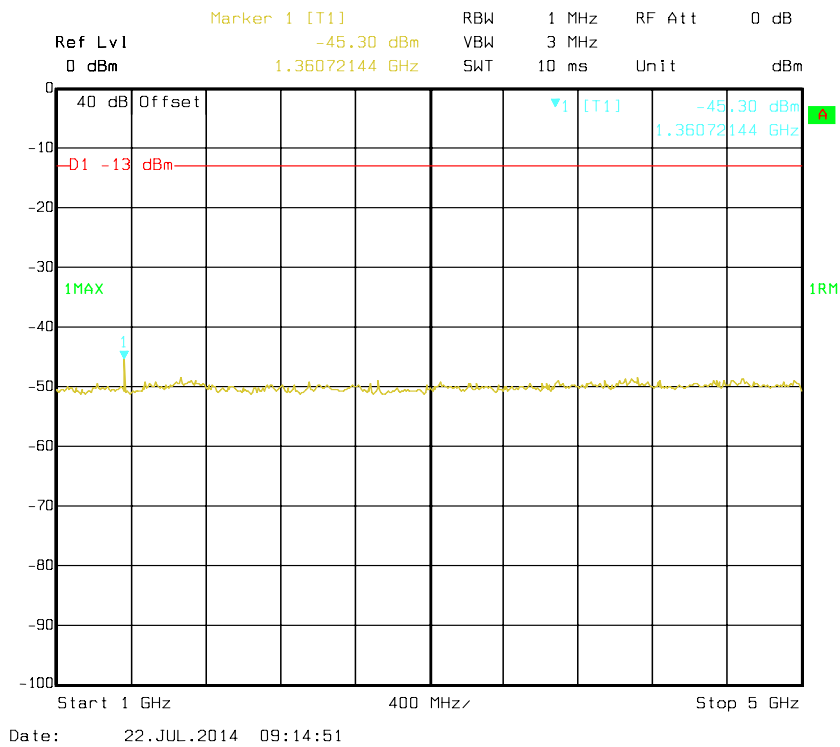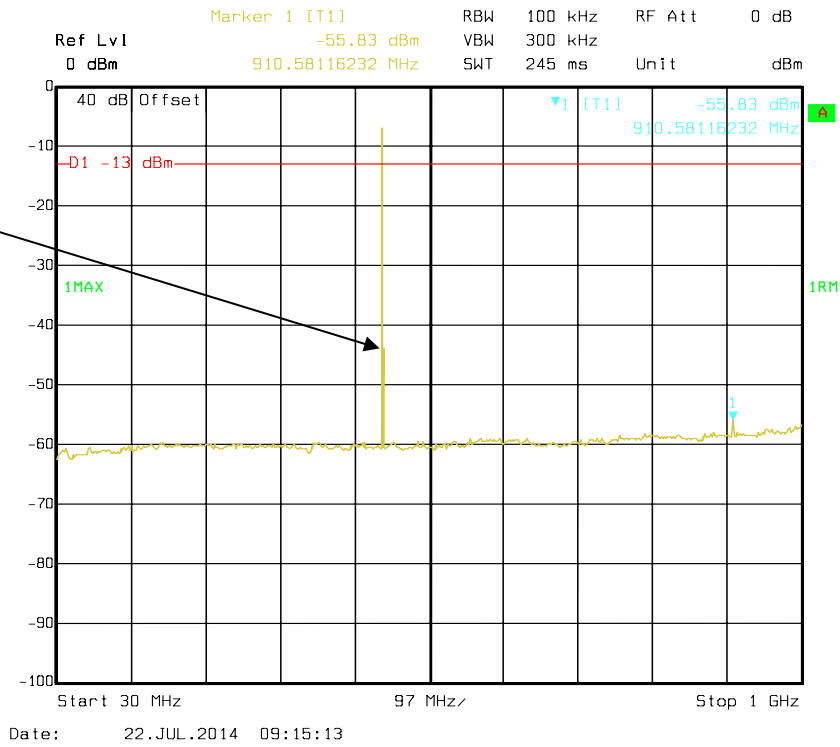

458 MHz – 4FSK Mode

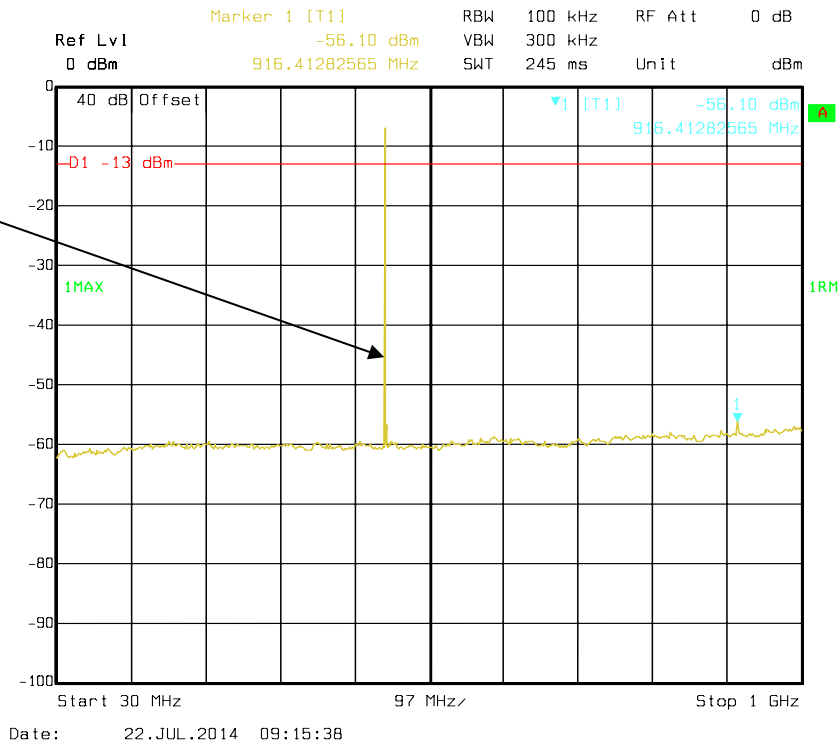

Fundamental test with Band Reject Filter

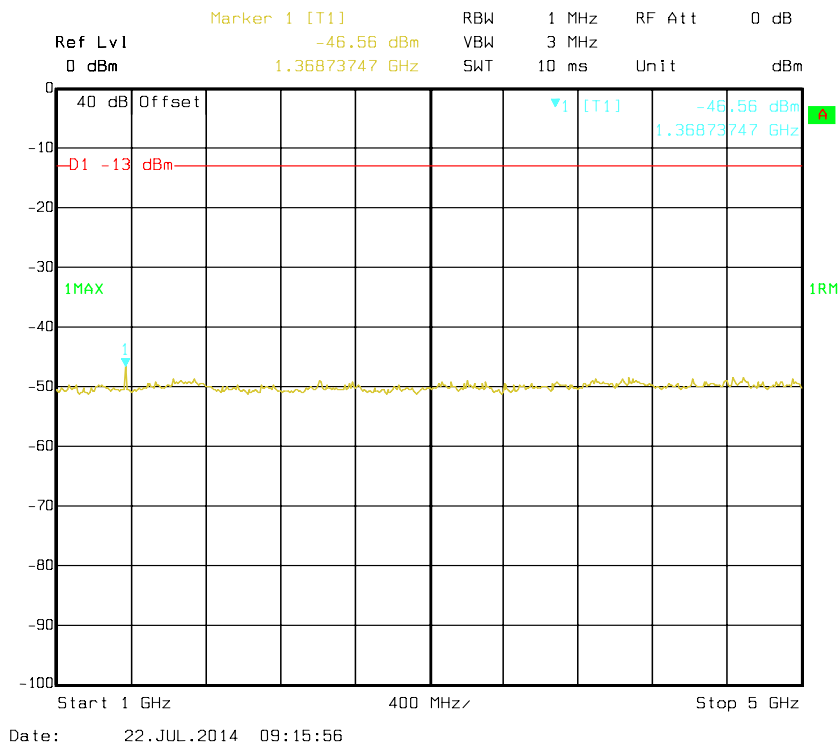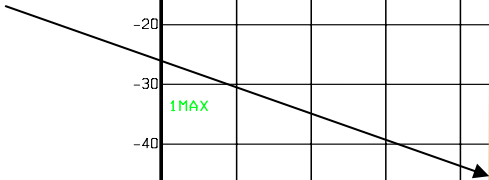

FCC §2.1053 & §22.861 & §90.210 - RADIATED SPURIOUS EMISSIONS**Applicable Standard**

FCC §2.1053, §22.861 and §90.210

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
HP	Signal Generator	8648A	3426A00831	2013-11-06	2014-11-06
Sunol Sciences	Antenna	JB3	A060611-1	2011-09-06	2014-09-05
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
HP	Amplifier	8447E	2434A02181	2013-09-06	2014-09-06
R&S	EMI Test Receiver	ESCI	100224	2014-05-09	2015-05-09
Agilent	Signal Generator	E8247C	MY43321350	2012-10-15	2014-10-15
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2014-02-19	2015-02-19
TDK RF	Horn Antenna	HRN-0118	130 084	2012-09-06	2015-09-06
ETS LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Test Data**Environmental Conditions**

Temperature:	30.9°C
Relative Humidity:	67 %
ATM Pressure:	100kPa

The testing was performed by Leon Chen on 2014-07-21

Test Mode: Transmitting(FM modulation mode for worst case)

Frequency	Polar	S.A. Reading	S.G. Level	Antenna Gain	Cable Loss	Absolute Level	Limit	Margin
MHz	H/V	dB μ V	dBm	dBd/dBi	dB	dBm	dBm	dB
f_c = 435.000MHz								
870.000	H	43.90	-48.1	0.0	1	-49.1	-20.0	29.1
870.000	V	43.91	-44.8	0.0	1	-45.8	-20.0	25.8
1305.000	H	52.46	-47.4	8.3	1.1	-40.2	-20.0	20.2
1305.000	V	47.58	-52.8	8.3	1.1	-45.6	-20.0	25.6
1740.000	H	36.16	-64.5	10.9	1.5	-55.1	-20.0	35.1
1740.000	V	41.27	-59.7	10.9	1.5	-50.3	-20.0	30.3
f_c = 454.500MHz								
909.000	H	43.65	-47.5	0.0	1	-48.5	-20.0	28.5
909.000	V	45.09	-42.6	0.0	1	-43.6	-20.0	23.6
1363.500	H	52.52	-47.9	8.7	1.2	-40.4	-20.0	20.4
1363.500	V	47.99	-52.3	8.7	1.2	-44.8	-20.0	24.8
1818.000	H	36.66	-63.3	11.2	1.4	-53.5	-20.0	33.5
1818.000	V	41.22	-59	11.2	1.4	-49.2	-20.0	29.2
f_c = 458.000MHz								
916.000	V	43.30	-43.9	0.0	1	-44.9	-13.0	31.9
916.000	V	44.59	-42.6	0.0	1	-43.6	-13.0	30.6
1374.000	V	51.33	-49	8.8	1.2	-41.4	-13.0	28.4
1374.000	V	47.32	-53	8.8	1.2	-45.4	-13.0	32.4
1832.000	V	35.25	-64.7	11.3	1.4	-54.8	-13.0	41.8
1832.000	V	41.62	-58.4	11.3	1.4	-48.5	-13.0	35.5

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = SG Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

FCC §2.1055 & § 22.355 & §90.213- FREQUENCY STABILITY

Applicable Standard

FCC §2.1055, § 22.355, §90.213

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09
Dongzhixu	High Temperature Test Chamber	DP1000	201105083-3	2013-08-01	2014-08-01

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

Test Data

Environmental Conditions

Temperature:	30.9°C
Relative Humidity:	67 %
ATM Pressure:	100kPa

The testing was performed by Leon Chen on 2014-07-21

Test Mode: Transmitting

Reference Frequency: 435 MHz				
Temperature	Voltage	Reading	Frequency Error	Limit
°C	V _{DC}	MHz	ppm	ppm
-30	13.6	435.000021	0.05	2.5
-20	13.6	435.000018	0.04	
-10	13.6	435.000022	0.05	
0	13.6	435.000019	0.04	
10	13.6	435.000024	0.06	
20	13.6	435.000033	0.08	
30	13.6	435.000029	0.07	
40	13.6	435.000024	0.06	
50	13.6	435.000022	0.05	
60	13.6	435.000027	0.06	
25	15.6	435.000025	0.06	
25	10.8	435.000027	0.06	

Reference Frequency: 454.5 MHz				
Temperature	Voltage	Reading	Frequency Error	Limit
°C	V _{DC}	MHz	ppm	ppm
-30	13.6	454.500182	0.40	2.5
-20	13.6	454.500173	0.38	
-10	13.6	454.500177	0.39	
0	13.6	454.500172	0.38	
10	13.6	454.500176	0.39	
20	13.6	454.500177	0.39	
30	13.6	454.500187	0.41	
40	13.6	454.500176	0.39	
50	13.6	454.500189	0.42	
60	13.6	454.500188	0.41	
25	15.6	454.500179	0.39	
25	10.8	454.500177	0.39	

FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR

Applicable Standard

Regulations: FCC §90.214
 Test method: ANSI/TIA-603-D 2010, section 2.2.19.3


Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
R&S	Spectrum analyzer	FSEM	DE31388	2014-05-07	2015-05-07
HP	Signal Generator	8648A	3426A00831	2013-11-06	2014-11-06

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

- a) Connect the EUT and test equipment as shown on the following block diagram.
- b) Set the Spectrum Analyzer to measure FM deviation, and tune the RF frequency to the transmitter assigned frequency.
- c) Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at ± 12.5 kHz deviation and set its output level to -100dBm.
- d) Turn on the transmitter.
- e) Supply sufficient attenuation via the RF attenuator to provide an input level to the Spectrum Analyzer that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the Spectrum Analyzer as P_0 .
- f) Turn off the transmitter.
- g) Adjust the RF level of the signal generator to provide RF power equal to P_0 . This signal generator RF level shall be maintained throughout the rest of the measurement.
- h) Remove the attenuation 1, so the input power to the Spectrum Analyzer is increased by 30 dB when the transmitter is turned on.
- i) Adjust the vertical amplitude control of the spectrum analyzer to display the 1000 Hz at ± 4 divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "trigger offset" to -10ms for turn on and -15ms for turn off.
- j) Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be t_{on} . The trace should be maintained within the allowed divisions during the period t_1 and t_2 .
- k) Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum Analyzer. The trace should be maintained within the allowed divisions during the period t_3 .

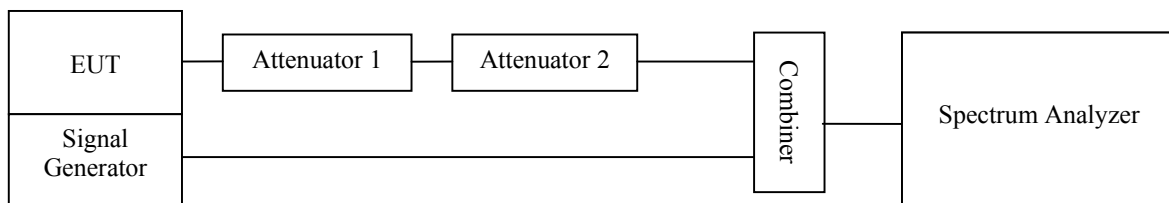

Test Data

Environmental Conditions


Temperature:	30.4°C
Relative Humidity:	64 %
ATM Pressure:	99.8kPa

The testing was performed by Leon Chen on 2014-07-22


Channel Separation (kHz)	Period (ms)	Maximum frequency difference	Result
12.5	<10 (t1)	± 12.5 kHz	Pass
	<25 (t2)	± 6.25 kHz	
	<10 (t3)	± 12.5 kHz	

Please refer to the following plots.


435MHz, Low Power, Turn On

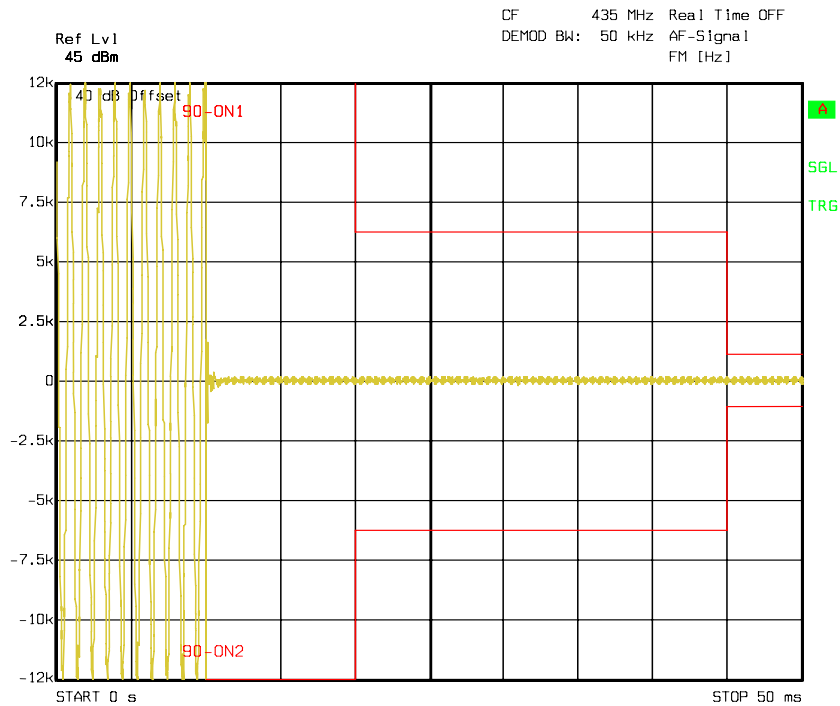


435MHz, Low Power, Turn Off

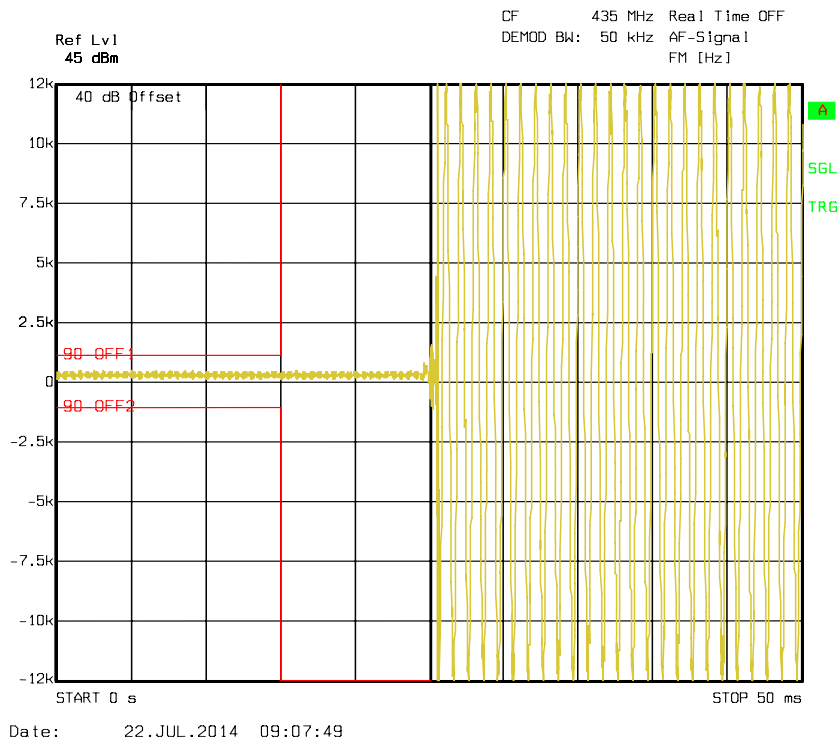

435MHz, High Power, Turn On

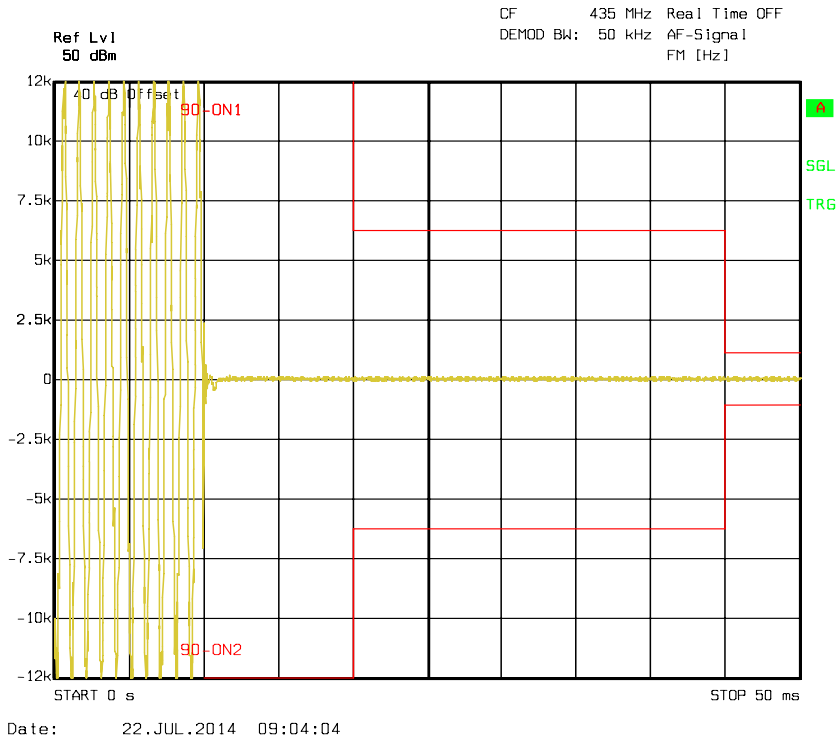

435MHz, High Power, Turn Off

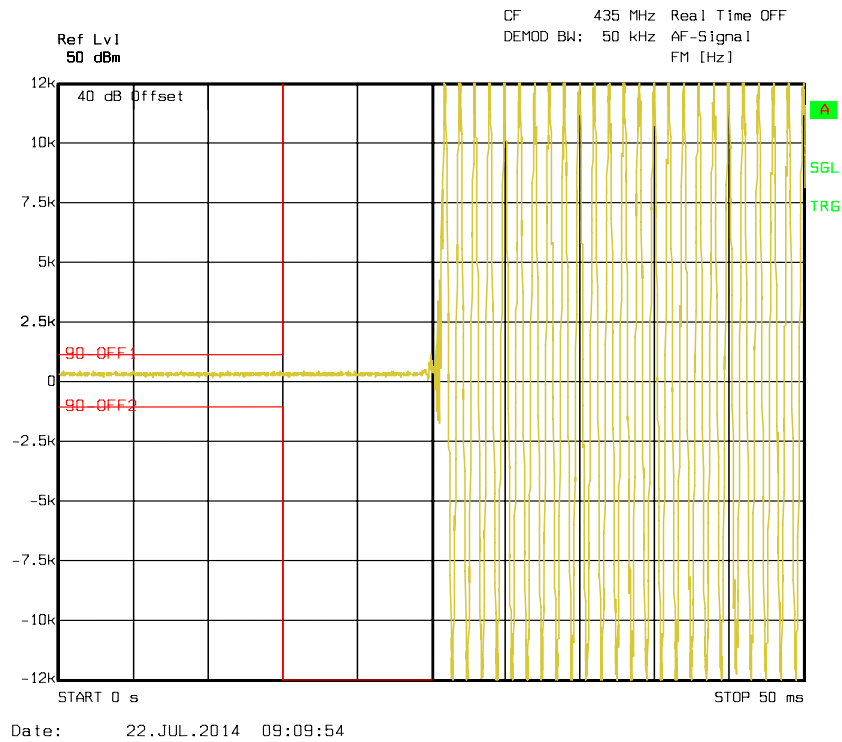

DECLARATION OF SIMILARITY



Kirisun Communications Co.,Ltd.

Add: 3-6Flrs,ROBETA Building, No. 1, QiMin Road, Song Ping Shan Area, Science & Industry Park,Nanshan District Shenzhen 518057 P.R. China

Tel: 0755-86095979 0755-86096018

DECLARATION OF SIMILARITY

2014-04-10

Dear Sir or Madam:

We, Kirisun Communications Co.,Ltd., hereby declare that our product: DMR Mobile Radio, model: TM840, TM840G are electrically identical with the same electromagnetic emissions and electromagnetic compatibility characteristics as model: TM840G that was test by BACL, the results of which are featured in BACL project.

A description of the differences between the tested model and those that are declared similar areas follows:

Models: TM840, TM840G. The only difference is the model name.

Please contact me should there be need for any additional clarification or information.

Best Regards,

Signature: *Jessica Wang*

Print Name: Jessica Wang

Title: Product Manager

******* END OF REPORT *******