



## MET Laboratories, Inc.

*Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13301 MCCALLEN PASS ! AUSTIN, TX 78753 ! PHONE (512) 287-2500 ! FAX (512) 287-2513

TenX Precision, LLC  
11824 Jollyville Road, Suite 102  
Austin, Texas 78759

November 22, 2011

Dear Daraius Hathiram,

Enclosed is the EMC test report for compliance testing of the TenX Precision, LLC, Echometer Wireless Base, tested to the requirements of Title 47 of the Code of Federal Regulations (CFR), Part 15 Subpart B, Section 15.101(a) and ICES-003, Issue 4 February 2004.

Based on these results, MET Laboratories, Inc. certifies that the Echometer Wireless Base, tested as configured, meets the requirements and interference limitations for a Class A Digital Devices under Title 47 of the CFR, Part 15 Subpart B, Section 15.107(a) and 15.109(a) and ICES-003, Issue 4 February 2004.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
MET LABORATORIES, INC.

Jennifer Warnell  
Documentation Department

Reference: (\TenX Precision, LLC\EMCA33149-FCC)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc. This letter of transmittal is not a part of the attached report.



## **MET Laboratories, Inc.**

*Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13301 MCCALLEN PASS ! AUSTIN, TX 78753 ! PHONE (512) 287-2500 ! FAX (512) 287-2513

### **Electromagnetic Compatibility Criteria Test Report**

For the

**TenX Precision, LLC  
Echometer Wireless Base**

**Title 47 of the Code of Federal Regulations (CFR),  
Part 15 Subpart B &  
ICES-003  
for a Class A Digital Device**

**MET Report: EMCA33149-FCC**

**November 22, 2011**

Prepared for:

**TenX Precision, LLC  
11824 Jollyville Road, Suite 102  
Austin, Texas 78759**

**Prepared By:  
MET Laboratories, Inc.  
914 W. Patapsco Ave.  
Baltimore, MD 21230**



TenX Precision, LLC  
Echometer Wireless Base

Electromagnetic Compatibility  
CFR Title 47, Part 15, Subpart B & ICES-003

## Electromagnetic Compatibility Criteria Test Report

For the

**TenX Precision, LLC  
Echometer Wireless Base**

**Title 47 of the Code of Federal Regulations (CFR),  
Part 15 Subpart B &  
ICES-003  
for a Class A Digital Device**

**MET Report: EMCA33149-FCC**

A handwritten signature in black ink, appearing to read "D. Tennakoon".

Dusmantha Tennakoon  
Project Engineer, Electromagnetic Compatibility Lab

A handwritten signature in black ink, appearing to read "Jennifer Warnell".

Jennifer Warnell  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the applicable limits. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Title 47 of the CFR, Part 15, Subpart B and Industry Canada standards ICES-003, Issue 4 February 2004 for a Class A Digital Device under normal use and maintenance.

A handwritten signature in black ink, appearing to read "Shawn McMillen".

Shawn McMillen,  
Wireless Manager, Electromagnetic Compatibility Lab



TenX Precision, LLC  
Echometer Wireless Base

Electromagnetic Compatibility  
CFR Title 47, Part 15, Subpart B & ICES-003

## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	November 22, 2011	Initial Issue.



## Table of Contents

<b>1.0 Testing Summary .....</b>	<b>1</b>
<b>2.0 Equipment Configuration.....</b>	<b>2</b>
<b>2.1 Overview.....</b>	<b>2</b>
<b>2.2 Test Site .....</b>	<b>3</b>
<b>2.3 Description of Test Sample .....</b>	<b>3</b>
<b>2.4 Equipment Configuration.....</b>	<b>3</b>
<b>2.5 Support Equipment .....</b>	<b>3</b>
<b>2.6 Ports and Cabling Information .....</b>	<b>4</b>
<b>2.7 Mode of Operation .....</b>	<b>4</b>
<b>2.8 Modifications .....</b>	<b>4</b>
<b>2.8.1 Modifications to EUT .....</b>	<b>4</b>
<b>2.8.2 Modifications to Test Standard .....</b>	<b>4</b>
<b>2.9 Disposition of EUT .....</b>	<b>4</b>
<b>3.0 Electromagnetic Compatibility Emission Criteria .....</b>	<b>5</b>
<b>3.1 Conducted Emission Limits .....</b>	<b>5</b>
<b>3.2 Radiated Emission Limits .....</b>	<b>10</b>
<b>4.0 Test Equipment .....</b>	<b>14</b>
<b>5.0 Compliance Information.....</b>	<b>15</b>
<b>5.1 Label and User's Manual Information .....</b>	<b>17</b>



## List of Tables

Table 1. Summary of Test Results .....	1
Table 2. EUT Overview .....	2
Table 3. Equipment Configuration .....	3
Table 4. Support Equipment.....	3
Table 5. Ports and Cabling Information .....	4
Table 6. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Section 15.107(a) (b) .....	5
Table 7. Conducted Emissions - Voltage, Worst Case Emissions, AC Power, Phase Line .....	7
Table 8. Conducted Emissions - Voltage, Worst Case Emissions, AC Power, Neutral Line.....	8
Table 9. Radiated Emissions Limits calculated from FCC Part 15, § 15.109 (a) (b) .....	10
Table 10. Radiated Emissions Limits, Test Results, FCC Limits.....	11
Table 11. Radiated Emissions Limits, Test Results, ICES-003 Limits .....	12
Table 12. Test Equipment .....	14

## List of Figures

No table of figures entries found.

## List of Photographs

Photograph 1. Conducted Emissions, Test Setup .....	9
Photograph 2. Radiated Emission Limits, Test Setup .....	13



## List of Terms and Abbreviations

<b>AC</b>	Alternating Current
<b>ACF</b>	Antenna Correction Factor
<b>Cal</b>	Calibration
<b>d</b>	Measurement Distance
<b>dB</b>	Deci Bels
<b>dB<math>\mu</math>V</b>	Deci-Bels above one <b>micro Volt</b>
<b>dB<math>\mu</math>V/m</b>	Deci-Bels above one <b>micro Volt per meter</b>
<b>DC</b>	Direct Current
<b>DCF</b>	Distance Correction Factor
<b>E</b>	Electric Field
<b>EUT</b>	Equipment Under Test
<b>f</b>	Frequency
<b>FCC</b>	Federal Communications Commission
<b>GHz</b>	Giga Hertz
<b>Hz</b>	Hertz
<b>kHz</b>	kilohertz
<b>kPa</b>	kilopascal
<b>LISN</b>	Line Impedance Stabilization Network
<b>MHz</b>	MegaHertz
<b><math>\mu</math>H</b>	<b>micro</b> Henry
<b><math>\mu</math>F</b>	<b>micro</b> Farad
<b><math>\mu</math>s</b>	<b>micro</b> seconds
<b>RF</b>	Radio Frequency
<b>RMS</b>	Root-Mean-Square



TenX Precision, LLC  
Echometer Wireless Base

Electromagnetic Compatibility  
Testing Summary  
CFR Title 47, Part 15, Subpart B & ICES-003

## 1.0 Testing Summary

<b>Title 47 of the CFR, Part 15, Subpart B, Reference and Test Description</b>	<b>IC Reference</b>	<b>Results</b>	<b>Comments</b>
15.107 (a) Conducted Emission Limits for a Class A Digital Device	ICES-003 Issue 4 February 2004	Compliant	Measured emissions were below applicable limits.
15.109 (a) Radiated Emission Limits for a Class A Digital Device	ICES-003 Issue 4 February 2004	Compliant	Measured emissions were below applicable limits.

**Table 1. Summary of Test Results**



## 2.0 Equipment Configuration

### 2.1 Overview

MET Laboratories, Inc. was contracted by TenX Precision, LLC to perform testing on the Echometer Wireless Base, under TenX Precision, LLC purchase order number 1053.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the TenX Precision, LLC, Echometer Wireless Base.

An EMC evaluation to determine compliance of the Echometer Wireless Base with the requirements of §15.101(a) for Class A Digital Devices was performed. (All references are to the most current version of Title 47 of the Code of Federal Regulations in effect). In accordance with §2.1075(a)(3), the following data is presented in support of the Declaration of Conformity of the Echometer Wireless Base. TenX Precision, LLC should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the Echometer Wireless Base has been permanently discontinued, as per §2.1075(c).

The results obtained relate only to the item(s) tested.

<b>Model(s) Tested:</b>	Echometer Wireless Base
<b>Model(s) Covered:</b>	Echometer Wireless Base
<b>Primary Power:</b>	120 VAC, 60 Hz
<b>Secondary Power:</b>	USB port on laptop
<b>Equipment Emissions Class:</b>	A
<b>Highest Clock Frequency:</b>	40 MHz
<b>Evaluated by:</b>	Dusmantha Tennakoon
<b>Report Date:</b>	November 22, 2011

**Table 2. EUT Overview**



## 2.2 Test Site

All testing was performed at MET Laboratories, Inc., 13301 McCallen Pass, Austin, TX 78753. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a semi-anechoic chamber. In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories. In accordance with §2.948(d), MET Laboratories has been accredited by the National Voluntary Laboratory Accreditation Program (Lab Code: 100273-0).

## 2.3 Description of Test Sample

The Echometer Wireless Base (Model WB100), Equipment Under Test (EUT), is used as a Base station to discover, configure, and control Echometer wireless sensors. It is attached to a computer via USB and transfers control information and data to/from the computer to/from the sensors.

## 2.4 Equipment Configuration

The EUT was set up as outlined in **Error! Reference source not found.** All equipment incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Part Number	Serial Number	Revision
N/A	Echometer Wireless Base	WB100	40-1202	1001	2

**Table 3. Equipment Configuration**

## 2.5 Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number	*Customer Supplied Calibration Data
	Laptop	Dell	WB100	NA

**Table 4. Support Equipment**

\* All 'customer supplied' support equipment will include the equipments calibration data. This column will be marked as either not applicable, not available, or will contain the calibration date supplied by the customer.



## 2.6 Ports and Cabling Information

Ref. ID	Port Name on EUT	Cable Description	Qty.	Length (m)	Shielded (Y/N)	Termination Point
1	Antenna1	Direct mount SMA Antenna	1	N/A	No	N/A
2	Antenna2	Direct mount SMA Antenna	1	N/A	No	N/A
3	USB	Standard USB 2.0 Cable	1	2	Y	N/A
4	Ext Bat	Hookup Wire	1	1	No	N/A

Table 5. Ports and Cabling Information

## 2.7 Mode of Operation

The device was connected to a laptop via USB port and turned on.

## 2.8 Modifications

### 2.8.1 Modifications to EUT

No modifications were made to the EUT.

### 2.8.2 Modifications to Test Standard

No modifications were made to the test standard.

## 2.9 Disposition of EUT

The test sample including all support equipment (if any), submitted to the Electro-Magnetic Compatibility Lab for testing was returned to TenX Precision, LLC upon completion of testing.



### 3.0 Electromagnetic Compatibility Emission Criteria

#### 3.1 Conducted Emission Limits

**Test Requirement(s):**

**15.107 (a)** “Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 6. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.”

**15.107 (b)** “For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 6. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.”

Frequency range (MHz)	15.107(b), Class A Limits (dB $\mu$ V)		15.107(a), Class B Limits (dB $\mu$ V)	
	Quasi-Peak	Average	Quasi-Peak	Average
* 0.15 – 0.5	79	66	66 - 56	56 - 46
0.5 - 5.0	73	60	56	46
5.0 – 30.0	73	60	60	50

Note 1 — The lower limit shall apply at the transition frequencies.  
Note 2 — The limit decreases linearly with the logarithm if the frequency in the range 0.15 MHz to 0.5 MHz.  
\* — The FCC issued a Recommended Opinion and Order (RO&O) 989-80 in May 2002, providing transition into the emission limits and frequency ranges shown above.

**Table 6. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Section 15.107(a) (b)**



TenX Precision, LLC  
Echometer Wireless Base

Electromagnetic Compatibility  
Emission Criteria  
CFR Title 47, Part 15, Subpart B & ICES-003

**Test Procedures:** The EUT was placed inside a shielded enclosure (See Photograph 1). The EUT was situated such that the back of the EUT was 0.4 m from one wall of the shielded enclosure, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface.

The EUT was powered from a 50 Ω/50 μH Line Impedance Stabilization Network (LISN).

The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with ANSI C63.4-2001 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The measurements were performed over the frequency range of 150 kHz to 30 MHz using a 50 Ω/50 μH LISN as the input transducer to an EMC field intensity meter.

**Test Results:** The EUT was compliant with the requirement(s) of this section. Measured emissions were below applicable limits.

**Test Engineer(s):** Ram Shrestha and Dusmantha Tennakoon

**Test Date(s):** 10/26/11




TenX Precision, LLC  
Echometer Wireless Base

Electromagnetic Compatibility  
Emission Criteria  
CFR Title 47, Part 15, Subpart B & ICES-003

### Conducted Emissions - Voltage, Worst Case Emissions, AC Power, Phase Line (120 VAC, 60 Hz)

Line	Freq. (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
120VAC 60 Hz Line	0.156	36.57	79	-42.43	Pass	22.98	66	-43.02	Pass
120VAC 60 Hz Line	3.57	34	73	-39	Pass	25.64	60	-34.36	Pass
120VAC 60 Hz Line	0.300	29.23	79	-49.77	Pass	20.25	66	-45.75	Pass

Table 7. Conducted Emissions - Voltage, Worst Case Emissions, AC Power, Phase Line

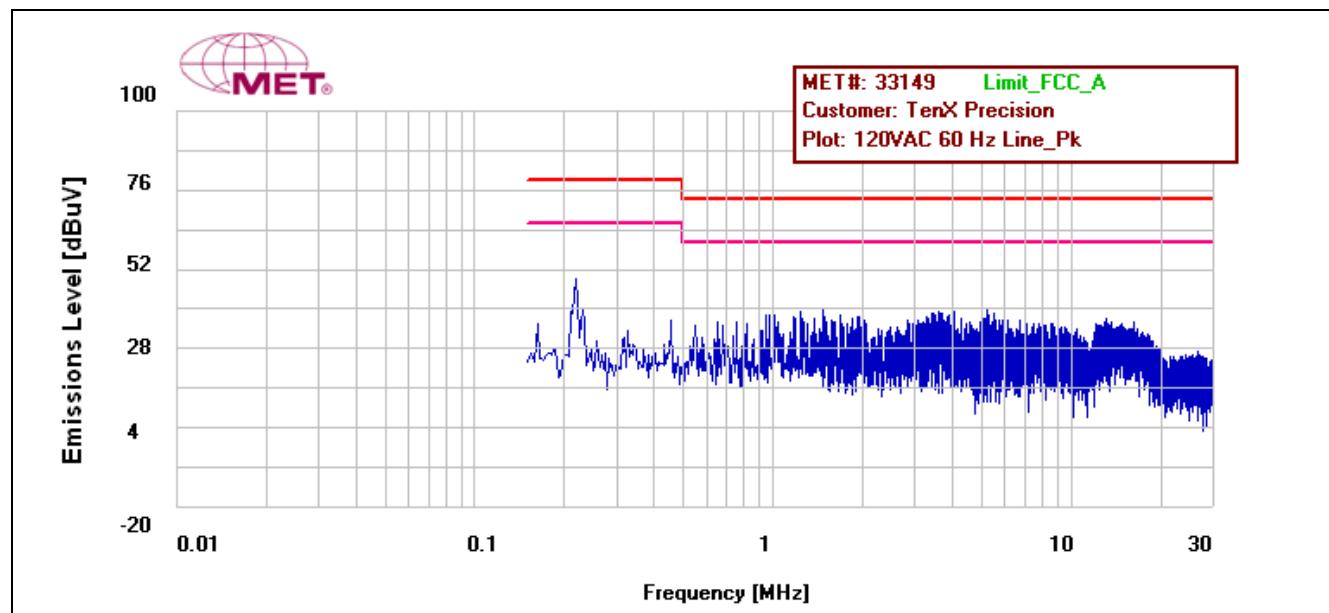

Plot 1. Conducted Emissions, Phase Line Plot




TenX Precision, LLC  
Echometer Wireless Base

Electromagnetic Compatibility  
Emission Criteria  
CFR Title 47, Part 15, Subpart B & ICES-003

### Conducted Emissions - Voltage, Worst Case Emissions, AC Power, Neutral Line, (120 VAC, 60 Hz)

Line	Freq. (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
120VAC 60 Hz Neutral	0.154	37.42	79	-41.58	Pass	22.89	66	-43.11	Pass
120VAC 60 Hz Neutral	0.239	46.89	79	-32.11	Pass	26.25	66	-39.75	Pass
120VAC 60 Hz Neutral	3.56	34.89	73	-38.11	Pass	25.24	60	-34.76	Pass

Table 8. Conducted Emissions - Voltage, Worst Case Emissions, AC Power, Neutral Line

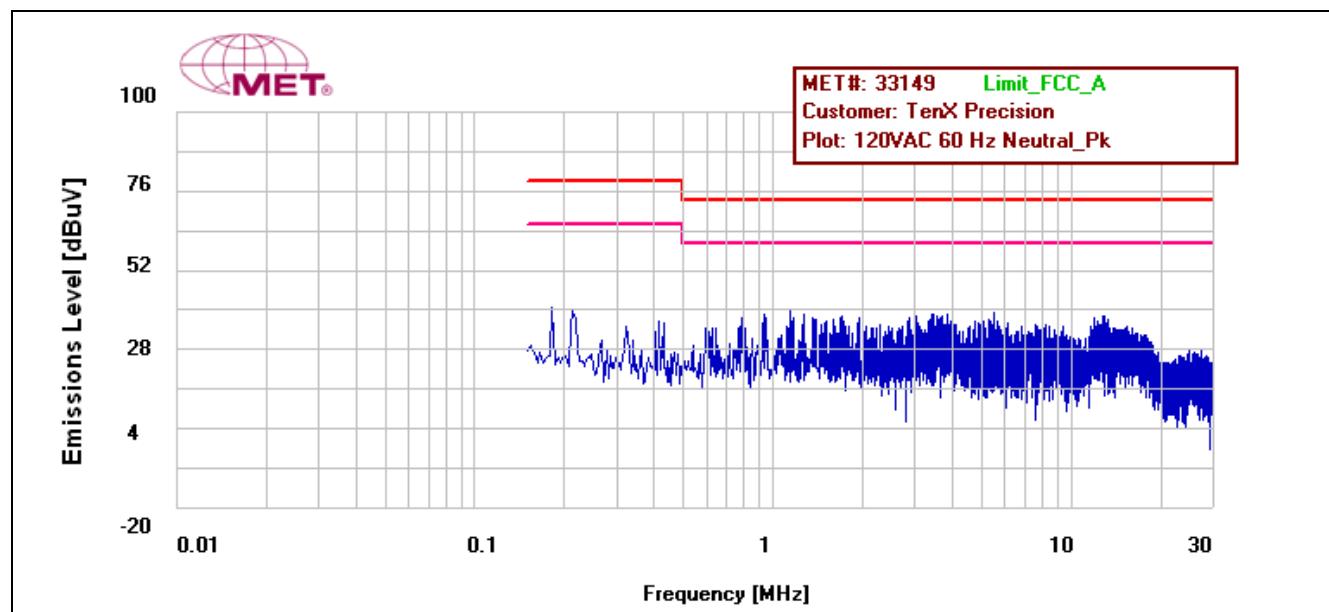




TenX Precision, LLC  
Echometer Wireless Base

Electromagnetic Compatibility  
Emission Criteria  
CFR Title 47, Part 15, Subpart B & ICES-003

## Conducted Emission Limits Test Setup

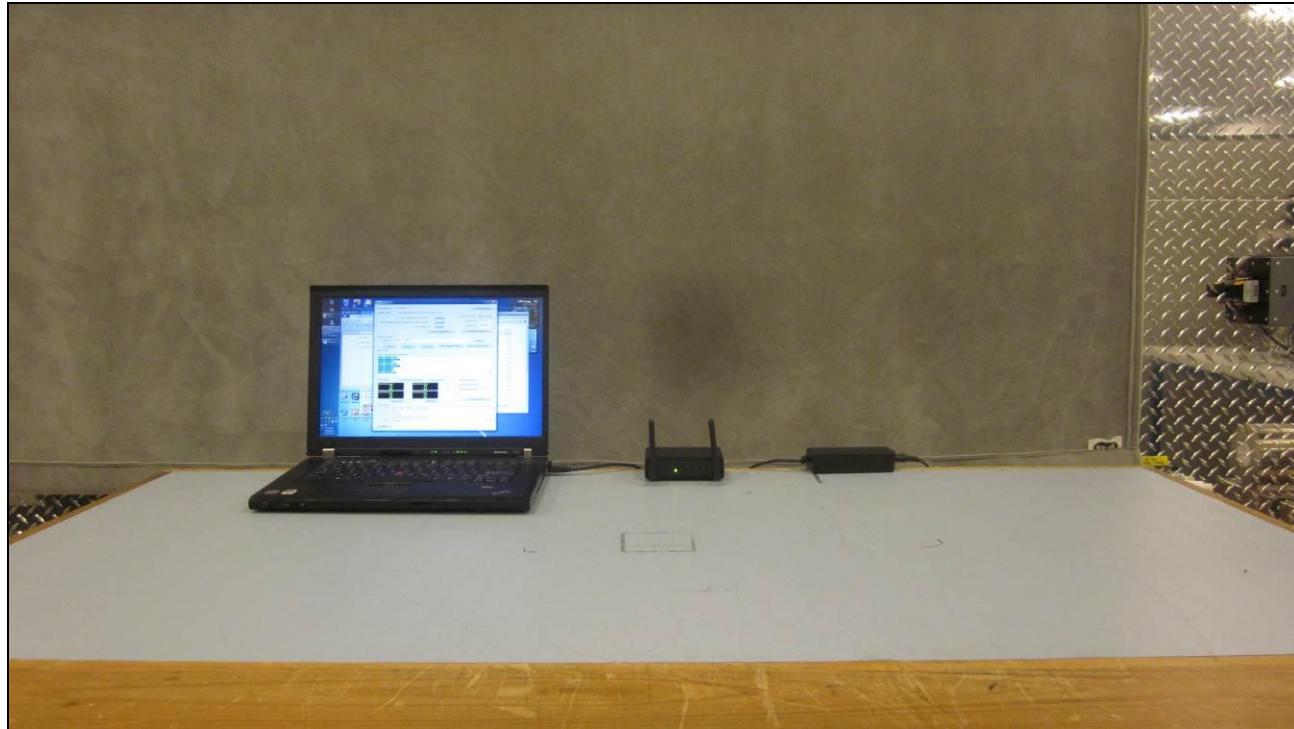

Photograph 1. Conducted Emissions, Test Setup



### 3.2 Radiated Emission Limits

**Test Requirement(s):** **15.109(a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 9.

**15.109 (b)** The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 9.

Frequency (MHz)	Field Strength (dB $\mu$ V/m)	
	§ 15.109 (b), Class A Limit (dB $\mu$ V) @ 10m	§ 15.109 (a), Class B Limit (dB $\mu$ V) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

**Table 9. Radiated Emissions Limits calculated from FCC Part 15, § 15.109 (a) (b)**

**Test Procedures:** For final radiated measurements, the EUT was placed in semi-anechoic chamber, and located 10 m from an adjustable antenna mast. For pre-scanning, the spectrum analyzer scanned the frequency range from 30 MHz to 1 GHz to obtain an emission profile of the EUT.

For each point of measurement, the turntable was rotated, and the antenna height was varied between 1 m and 4 m, in order to find the maximum radiated emissions. Measurements above 30 MHz were taken using this technique with the antenna in two polarizations: horizontal and vertical.

Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth for below 1 GHz. For above 1 GHz, measurements were made using an average detector with a 1 MHz Resolution bandwidth and 10 Hz Video bandwidth.

**Test Results:** The EUT was compliant with the requirement(s) of this section. Measured emissions were below applicable limits.

**Test Engineer(s):** Ram Shrestha

**Test Date(s):** 10/27/11




TenX Precision, LLC  
Echometer Wireless Base

Electromagnetic Compatibility  
Emission Criteria  
CFR Title 47, Part 15, Subpart B & ICES-003

## Radiated Emissions Limits Test Results, Class A

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBuV)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	DCF (dB)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
736.012	H	71	143	41.05	19.032	19.586	0.01	0	40.506	46.4	-5.894
672.005	H	93	137	40.02	18.394	19.484	0.01	0	38.94	46.4	-7.46
255.995	H	0	392	50.4	12.104	20.648	0.01	0	41.866	46.4	-4.534
287.979	V	128	156	42.54	12.613	20.622	0.01	0	34.541	46.4	-11.859
35.56	V	310	100	34.05	15.31	22.025	0.01	0	27.345	39	-11.655
256.018	V	64	100	45.69	12.104	20.648	0.01	0	37.156	46.4	-9.244

Table 10. Radiated Emissions Limits, Test Results, FCC Limits

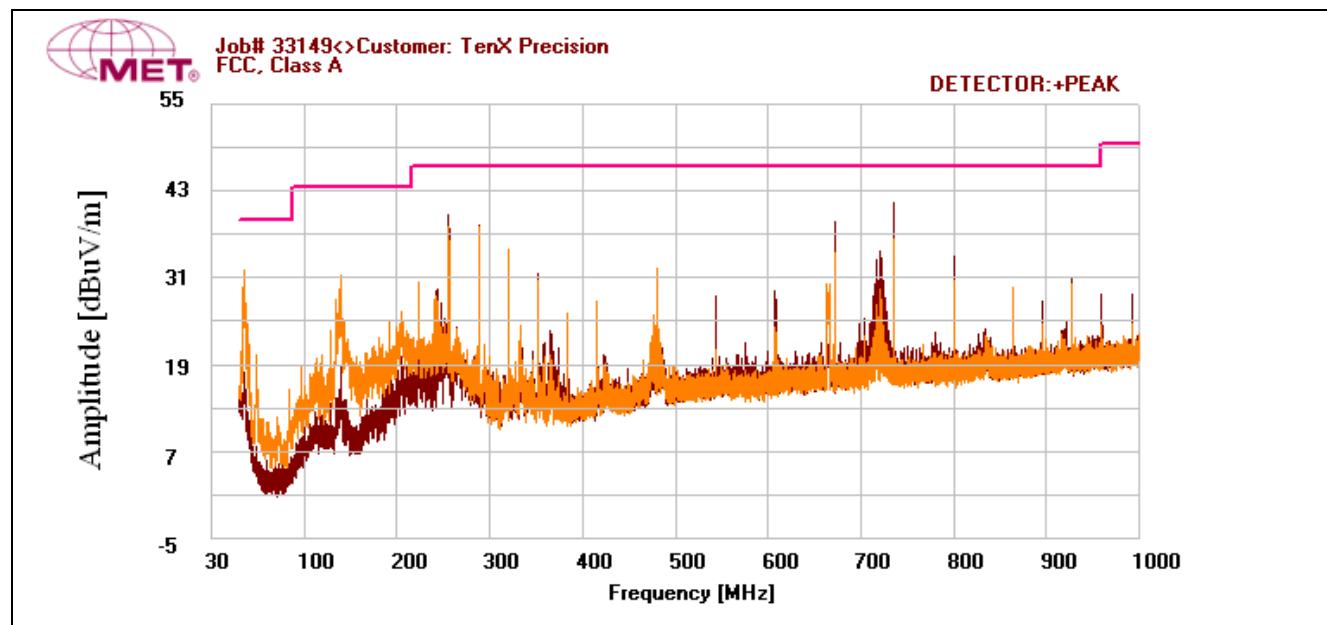


Plot 3. Radiated Emissions, Pre-Scan, FCC Limits



## Radiated Emissions Limits Test Results, Class A

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBuV)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	DCF (dB)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
736.012	V	71	143	41.05	19.032	19.586	0.01	0	40.506	47	-6.494
672.005	H	93	137	40.02	18.394	19.484	0.01	0	38.94	47	-8.06
255.995	H	0	392	50.4	12.104	20.648	0.01	0	41.866	47	-5.134
287.979	V	128	156	42.54	12.613	20.622	0.01	0	34.541	47	-12.459
35.56	V	310	100	34.05	15.31	22.025	0.01	0	27.345	40	-12.655
256.018	V	64	100	45.69	12.104	20.648	0.01	0	37.156	47	-9.844

Table 11. Radiated Emissions Limits, Test Results, ICES-003 Limits

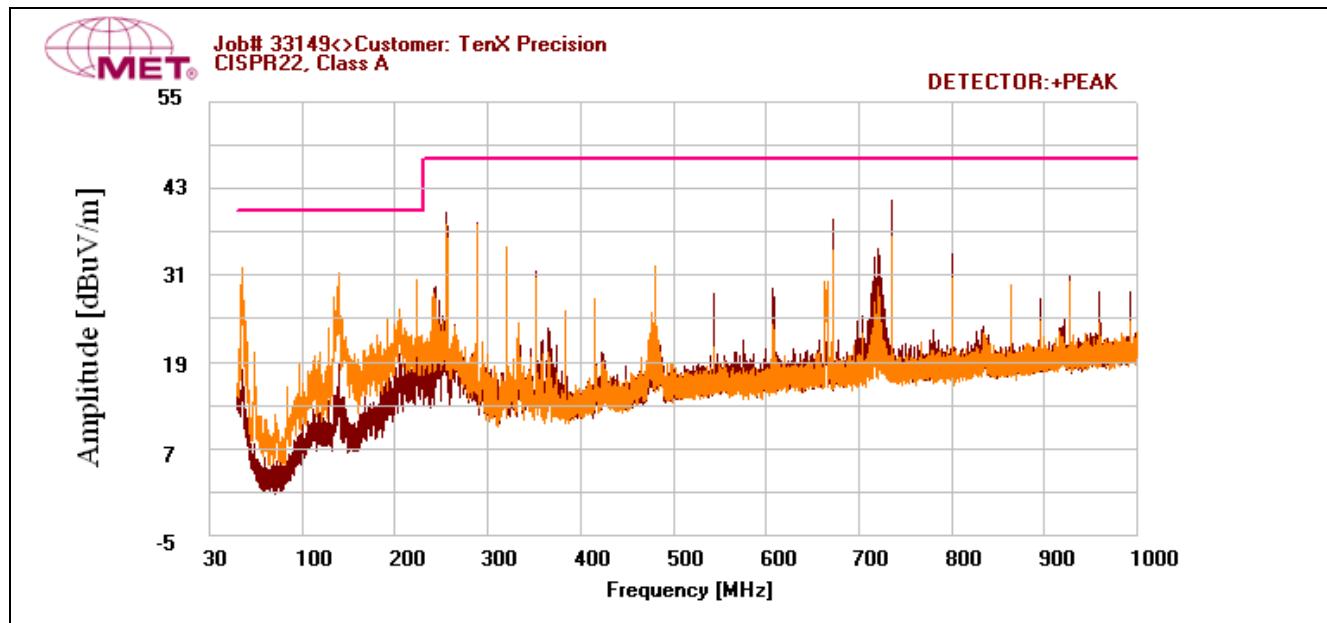

Plot 4. Radiated Emissions, Pre-Scan, ICES-003 Limits



TenX Precision, LLC  
Echometer Wireless Base

Electromagnetic Compatibility  
Emission Criteria  
CFR Title 47, Part 15, Subpart B & ICES-003

## Radiated Emission Limits Test Setup



Photograph 2. Radiated Emission Limits, Test Setup



## 4.0 Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

Test Name: Conducted Emissions			Test Date(s): 10/26/11		
MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date
1A1065	EMI RECEIVER	ROHDE & SCHWARZ	ESCI	12/15/2010	12/15/2011
1A1087	ATTENUATOR	ROHDE & SCHWARZ	ESH3Z2	03/11/2011	03/11/2012
1A1021	VOLTAGE DISPLAY	NEWPORT	Q9000-FUR6	09/15/2011	09/15/2012
1A1076	POWER TRANSFORMER	SUPERIOR ELECTRIC	POWERSTAT	SEE NOTE	
1A1019	ESH3-25 LISN (AE)	ROHDE & SCHWARZ	831-5518.2	SEE NOTE	
1A1119	CEV TEST AREA	CUSTOM MADE	N/A	03/28/2011	03/28/2012
1A1123	LISN	TESEQ	NNB 51	03/31/2011	3/31/2012
Test Name: Radiated Emissions			Test Date(s): 10/27/11		
MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date
1A1083	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESU40	2/22/2011	2/22/2012
1A1088	PRE-AMP	RHODE & SCHWARZ	TS-PR1	5/2/2011	5/2/2012
1A1050	BI-CONILOG ANTENNA (30MHZ TO 1GHZ)	SCHAFFNER	CBL6112D	4/22/2011	4/22/2012
1A1106	10M CHAMBER	ETS	SEMI-ANECHOIC	9/12/2011	9/12/2012

**Table 12. Test Equipment**

Note: Functionally verified test equipment is verified using calibrated instrumentation at the time of testing.



## 5.0 Compliance Information

The following text excerpts are from the Code of Federal Regulations, Title 47, Part 2 and 15.

### § 2.1073 Responsibilities

- (a) The responsible party, as defined in Section 2.909 of this part, must warrant that each unit of equipment marketed under a Declaration of Conformity is identical to the unit tested and found acceptable with the standards and that the records maintained by the responsible party continue to reflect the equipment being produced under the Declaration of Conformity within the variation that can be expected due to quantity production and testing on a statistical basis.
- (b) The responsible party, if different from the manufacturer, may upon receiving a written statement from the manufacturer that the equipment complies with the appropriate technical standard rely on the manufacturer or independent testing agency to determine compliance. However, the test records required in Section 2.1075 of this part shall be in the English language and shall be made available to the Commission upon a reasonable request in accordance with the provisions of Section 2.1076 of this part.
- (c) In the case of transfer of control of the equipment, as in the case of sale or merger of the responsible party, the new responsible party shall bear the responsibility of continued compliance of the equipment.
- (d) Equipment shall be retested to demonstrate continued compliance with the applicable technical standards if any modifications or changes that could adversely affect the emanation characteristics of the equipment are made by the responsible party. The responsible party bears responsibility for the continued compliance of subsequently produced equipment.
- (e) If any modifications or changes are made by anyone other than the responsible party for the Declaration of Conformity, the party making the modifications or changes, if located within the U.S., becomes the new responsible party. The new responsible party must comply with all the provisions for the Declaration of Conformity, including having test data on file demonstrating that the product continues to comply with all of the applicable technical standards.

### § 2.1074 Identification

Devices subject only to a Declaration of Conformity shall be uniquely identified by the responsible party. This identification shall not be of a format which could be confused with the FCC Identifier required on certified, notified, type accepted, or type approved equipment. The responsible party shall maintain adequate identification records to facilitate positive identification for each device.



## § 2.1077 Compliance information

- (a) If a product must be tested and authorized under a Declaration of Conformity, A COMPLIANCE INFORMATION STATEMENT SHALL BE SUPPLIED WITH THE PRODUCT AT THE TIME OF MARKETING OR IMPORTATION, containing the following information:
  - (1) Identification of the product, e.g., name and model number;
  - (2) A statement, similar to that contained in §15.19(a)(3) of this chapter, that the product complies with part 15 of this chapter; and
  - (3) The identification, by name, address, and telephone number, of the responsible party, as defined in §2.909. The responsible party for Declaration of Conformity must be located in the United States.
- (b) If a product is assembled from modular components that, by themselves, are authorized under a Declaration of Conformity and/or a grant of certification, and the assembled product is also subject to authorization under a Declaration of Conformity but, in accordance with the applicable regulations does not require additional testing, the product shall be supplied, at the time of marketing or importation, with a compliance information statement containing the following information:
  - (1) Identification of the assembled product, e.g., name and model number.
  - (2) Identification of the modular components used in the assembly. A modular component authorized under a Declaration of Conformity shall be identified as specified in paragraph (a)(1) of this section. A modular component authorized under a grant of certification shall be identified by name and model number (if applicable) along with the FCC Identifier number.
  - (3) A statement that the product complies with part 15 of this chapter.
  - (4) The identification, by name, address, and telephone number, of the responsible party who assembled the product from modular components, as defined in § 2.909. The responsible party for a Declaration of Conformity must be located within the United States.
  - (5) Copies of the compliance information statements for each modular components used in the system that is authorized under a Declaration of Conformity.
- (c) The compliance information statement shall be included in the user's manual or as a separate sheet.

## § 15.3 Definitions

- (a) Peripheral Device An input/output unit of a system that feeds data into and/or receives data from the central processing unity of a digital device. Peripherals to a digital device include any device that is connected external to the digital device, any device internal to the digital device that connects the digital device to an external device by wire or cable, and any circuit board designed for interchangeable mounting, internally or externally, that increases the operating or processing speed of a digital device, e.g., "turbo" cards and "enhancement" boards. Examples of peripheral devices include terminals, printers, external floppy disk drives and other data storage devices, video monitors, keyboards, interface boards, external memory expansion cards, and other input/output devices that may or may not contain digital circuitry. This definition does not include CPU boards, as defined in paragraph (bb) of this section, even though a CPU board may connect to an external keyboard or other components.
- (b) CPU Board A circuit board that contains a microprocessor, or frequency determining circuitry for the microprocessor, the primary function of which is to execute user-provided programming, but not including: (1) a circuit board that contains only a microprocessor intended to operate under the primary control or instruction of a microprocessor external to such a circuit board; or (2) a circuit board that is a dedicated controller for a storage or input/output device.



## 5.1 Label and User's Manual Information

### § 15.19 Labeling requirements

- (a) (4) Where a device is constructed in two or more sections connected by wires and marketed together, a statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.
- (5) When a device is so small or for such use this is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.
- (b) Products subject to authorization under the Declaration of Conformity shall be labeled as follows:
  - (1) The label shall be located in a conspicuous location on the device and shall contain the unique identification described in Section 2.1074 of this chapter and the following logo:
    - (i) If the product is authorized based on testing of the product or system (Label A):
    - (ii) If the product is authorized based on assembly using separately authorized components and the resulting product is not separately tested(Label B):
  - (2) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (b)(1) of this section on it, such as for a CPU board or a plug-in circuit board peripheral device, the text associated with the logo may be placed in a prominent location in the instruction manual or pamphlet supplied to the user. However, the unique identification (trade name and model number) and the logo must be display on the device.
  - (3) The label shall not be a stick-on, paper label. The label shall be permanently affixed to the product and shall be readily visible to the purchaser at the time of purchase. "Permanently affixed" means that the label is etched, engraved, stamped, silk-screened, indelibly printed or otherwise permanently marked on a permanent attached part of the equipment or on a nameplate of metal, plastic, or other material fastened to the equipment by welding, riveting or a permanent adhesive. The label must be designed to last the expected lifetime of the equipment in the environment in which the equipment may be operated and must not be readily detachable. Reference new Section 15.19(b)(3).



TenX Precision, LLC  
Echometer Wireless Base

Electromagnetic Compatibility  
Compliance Information  
CFR Title 47, Part 15, Subpart B & ICES-003

## DECLARATION OF CONFORMITY LABELLING REQUIREMENTS

The labeling requirements below apply only to personal computers and personal computer peripherals that are self-authorized under the Declaration of Conformity procedure.

### Required label formats

**Label A** is required if the device is authorized based on testing of the product or system. **Label B** is required if the device is authorized based on assembly using separately authorized components and the resulting device is not separately tested.



**Trade name**  
**Model number**

Label A

### Alternate label format for small devices

The FCC logo, trade name and model number must be shown on the product. The text shown in ***bold-face italics*** may be placed in a prominent location in the instruction manual or pamphlet supplied to the user. Refer to the new Section 15.19(b)(2).



***Tested To Comply***  
***With FCC Standards***



**Trade name**  
**Model number**

Assembled from tested components  
Complete system not tested

Label B



***Assembled From***  
***Tested Components***  
***(Complete System Not Tested)***



### § 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### § 15.32 Test Procedures for CPU boards and computer power supplies

Power supplies and CPU boards used with personal computers and for which separate authorizations are required to be obtained shall be tested as follows:

(a) CPU boards shall be tested as follows:

(1) Testing for radiated Emissions shall be performed with the CPU board installed in a typical enclosure but with the enclosure's cover removed so that the internal circuitry is exposed at the top and on at least two sides. Additional components, including a power supply, peripheral devices, and subassemblies, shall be added, as needed, to result in a complete personal computer system. If the oscillator and the microprocessor circuits are contained on separate circuit boards, both boards, typical of the combination that would normally be employed, must be used in the test. Testing shall be in accordance with the procedures specified in Section 15.31 of this part. Under these test conditions, the system under test shall not exceed the radiated emission limits specified in Section 15.109 of this part by more than 3dB.

(2) Unless the test in paragraph (a)(1) of this section demonstrates compliance with the limits in Section 15.109 of this part, a second test shall be performed using the same configuration described above but with the cover installed on the enclosure. Testing shall be in accordance with the procedures specified in Section 15.31 of this part. Under these test conditions, the system under test shall not exceed the radiated emission limits specified in Section 15.109 of this part.

(3) The test demonstrating compliance with the AC power line conducted limits specified in Section 15.107 of this part shall be performed in accordance with the procedures specified in Section 15.31 using an enclosure, peripherals, power supply, and subassemblies that are typical of the type with which the CPU board under test would normally be employed.

(b) The power supply shall be tested installed in an enclosure that is typical of the type within which it would normally be installed. Additional components, including peripheral devices, a CPU board, and subassemblies, shall be added, as needed, to result in a complete personal computer system. Testing shall be in accordance with the procedures specified in Section 15.31 and must demonstrate compliance with all of the standards contained in this part.

### § 15.105 Information to the user.

(a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in



TenX Precision, LLC  
Echometer Wireless Base

Electromagnetic Compatibility  
Compliance Information  
CFR Title 47, Part 15, Subpart B & ICES-003

accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

(b) For a Class B digital device or peripheral, the instructions furnished to the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

(c) The provisions of paragraphs (a) and (b) of this section do not apply to digital devices exempted from the technical standards under the provisions of § 15.103.

(d) For systems incorporating several digital devices, the statement shown in paragraph (a) or (b) of this section needs to be contained only in the instruction manual for the main control unit.