

TEST REPORT NO: RU1230/6896  
COPY NO: .2.....  
ISSUE NO: 1  
FCC ID: Q639505AC

**REPORT ON THE CERTIFICATION TESTING OF AN  
IRIDIUM SATELLITE LLC  
MONACO HANDSET  
WITH RESPECT TO  
THE FCC RULES CFR 47, PART 25**

TEST DATE: 2<sup>nd</sup> – 27<sup>th</sup> March 2006

TESTED BY: ..... D WINSTANLEY

APPROVED BY: ..... P GREEN  
PRODUCT MANAGER  
EMC

DATE: 12<sup>th</sup> April 2006 .....

Distribution:

- Copy Nos:
1. Cambridge Consultants Limited
  2. TCB: TRL Compliance Limited
  3. TRL Compliance Ltd

THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE

**TRL COMPLIANCE LTD**

LONG GREEN FORTHAMPTON GLOUCESTER GL19 4QH UNITED KINGDOM  
TELEPHONE +44 (0)1684 833818 FAX +44 (0)1684 833858  
E-MAIL [test@trlcompliance.com](mailto:test@trlcompliance.com) [www.trlcompliance.com](http://www.trlcompliance.com)

## CONTENTS

	<b>PAGE</b>		
CERTIFICATE OF CONFORMITY & COMPLIANCE	3		
APPLICANT'S SUMMARY	4		
EQUIPMENT TEST CONDITIONS	5		
TESTS REQUIRED	5		
PRODUCT DESCRIPTION & STANDARDS REFERENCES	6		
TEST RESULTS – Transmitter			
RF Output Power - Conducted	7		
Emissions Limitations - Conducted	8		
Spurious Emissions - Conducted	9		
Spurious Emissions - Radiated	10		
Frequency Stability -Temperature	11		
Frequency Stability -Voltage	12		
		<b>ANNEX</b>	
PHOTOGRAPHS		A	
APPLICANT'S SUBMISSION OF DOCUMENTATION LIST		B	
TEST EQUIPMENT LIST		C	
TEST COMMANDS		D	
DUTY CYCLE		E	
EMISSIONS LIMITATIONS		F	
TRANSMITTER SPURIOUS EMISSIONS – Conducted		G	
TRANSMITTER SPURIOUS EMISSIONS – Radiated		H	
FREQUENCY STABILITY – Temperature		I	
FREQUENCY STABILITY – Voltage		J	
EQUIPMENT CALIBRATION		K	
MEASUREMENT UNCERTAINTY		L	
<b>Notes:</b>			
1. Component failure during test		YES	<input type="checkbox"/>
		NO	<input checked="" type="checkbox"/>
2. If Yes, details of failure:			
3. The facilities used for the testing of the product contain in this report are FCC Listed.			

**CERTIFICATE OF CONFORMITY & COMPLIANCE**

FCC IDENTITY: Q639505AC

PURPOSE OF TEST: Certification

TEST SPECIFICATION: FCC Rules CFR 47, Part 25

TEST RESULT: Compliant to Specification

ITU EMISSIONS DESIGNATOR 41K7V7E

EQUIPMENT UNDER TEST: Monaco Handset

EQUIPMENT TYPE: Satellite Telephone

MAXIMUM OUTPUT 9.91dBW, 39.91dBm

ANTENNA TYPE: Part No: Radiated Antenna Type - C7032-GR082  
Conducted Antenna Type - C7032-GR080

CHANNEL SPACING: 41.667 kHz

NUMBER OF CHANNELS: 252

MODULATION TYPE: V7E

POWER SOURCE(s): +3.7 Vdc

TEST DATE(s): 2<sup>nd</sup> – 27<sup>th</sup> March 2006

ORDER No(s): 026623/MC3

APPLICANT: Iridium Satellite LLC

ADDRESS: 6701 Democracy Blvd.  
Suite 500  
Bethesda  
United States of America  
MD 20817

TESTED BY: \_\_\_\_\_ D WINSTANLEY

APPROVED BY: \_\_\_\_\_ P GREEN  
PRODUCT  
MANAGER EMC

## APPLICANT'S SUMMARY

EQUIPMENT UNDER TEST (EUT):	Monaco Handset
EQUIPMENT TYPE:	Satellite Telephone
PURPOSE OF TEST:	Certification
TEST SPECIFICATION(s):	FCC Rules CFR 47, Part 25
TEST RESULT:	COMPLIANT      Yes    [X] No    [ ]
APPLICANT'S CATEGORY:	MANUFACTURER      [X] IMPORTER             [ ] DISTRIBUTOR         [ ] TEST HOUSE          [ ] AGENT                  [ ]
APPLICANT'S CONTACT PERSON(s):	Mr C Geibel
E-mail address:	Conrad.geibel@iridium.com
APPLICANT:	Iridium Satellite LLC
ADDRESS:	6701 Democracy Blvd. Suite 500 Bethesda United States of America MD 20817
TEL:	+1 301 571 6277
FAX:	+1 301 571 6250
MANUFACTURER:	Iridium Satellite LLC
DEVELOPMENT AGENT:	Cambridge Consultants Limited
DEVELOPMENT AGENTS CONTACT PERSON(s):	Ms M Campbell
E-mail address:	marion.campbell@cambridgeconsultants.com
ADDRESS:	Science Park Milton Road Cambridge CB4 4DW United Kingdom
TEL:	+44 (0)1223 420024
FAX:	+44 (0)1223 423373
EUT(s) COUNTRY OF ORIGIN:	United States
TEST LABORATORY:	TRL EMC
UKAS ACCREDITATION No:	0728
TEST DATE(s)	2 <sup>nd</sup> – 27 <sup>th</sup> March 2006
TEST REPORT No:	RU1230/6896

**EQUIPMENT TEST / EXAMINATIONS REQUIRED**

1.	TEST/EXAMINATION	FCC Part 2	FCC Part 25	APPLICABILITY	RESULT
	RF Power Output	-	25.204 (a)	YES	PASS
	Emissions Limitations	-	25.202 (f)	YES	PASS
	Spurious Emissions at Antenna Terminals	2.1051	25.202 (f) 25.213	YES	PASS
	Protection of the Radio Navigation Satellite Service	-	25.216(c) 25.216(f)	YES	PASS
	Spurious Emissions Radiated	2.1053	25.202 (f) 25.213	YES	PASS
	Frequency Stability Temperature	2.1055	25.202 (d)	YES	PASS
	Frequency Stability Voltage	2.1055	25.202 (d)	YES	PASS

Note: The Monaco handset is subject to FCC Part 25 & Part 2 for FCC Certification for units marketed within the United States. The above tests, as specified in FCC Part 2, with limits as defined in FCC Part 25 were performed on the Monaco handset.

- 2. Product Use: Satellite Telephone and Data Communications
- 3. Emission Designator: 41k7V7E
- 4. Temperatures: Ambient (Tnom) 16°C
- 5. Supply Voltages: Vnom +3.7 Vdc

Note: Vnom voltages are as stated above unless otherwise shown on the test report page

- 6. Equipment Category: Single channel   
Two channel   
Multi-channel
- 7. Channel spacing: Narrowband  41.667 kHz  
Wideband
- 8. Test Location: TRL Compliance Limited  
Up Holland   
Long Green
- 9. Modifications made during test program No modifications were performed.

## Product Description

The satellite telephone consists of an L-Band Transceiver (LBT) capable of simultaneous transmit and receive (duplex) operation covering the frequency range of 1616MHz to 1626.5MHz. The frequency accesses used for duplex channels are organised into sub-bands each of which contains eight frequency accesses. Each sub-band, therefore occupies 333.33 kHz (i.e.  $8 \times 41.667\text{kHz}$ ). Up to 30 sub-bands containing 240 frequency accesses may be used for duplex channels.

## Standard References


- 47 CFR 2            Code of Federal Regulations, Title 47, Part 2, "Frequency allocations and Radio Telemetry Matters;  
10-1-03 Edition    General Rules and Regulations"
- 47 CFR 25          Code of Federal Regulations, Title 47, Part 25, "Sattelite Communications" Subpart C,  
10-1-03 Edition    "Technical Matters"
- C63.4-2003        American National Standards Institute (ANSI), "Methods of Measurement of Radio Noise Emissions  
from Low Voltage Electrical and Electronic Equipment in the Range 9 kHz to 40 GHz"

**COMPLIANCE TESTS**

**TRANSMITTER TESTS**

**RF OUTPUT POWER – CONDUCTED – PART 25.204 (a)**

Ambient temperature	=	16°C	Radio Laboratory
Relative humidity	=	41%	
Supply voltage	=	+3.7 Vdc	
Channel number	=	See test results	

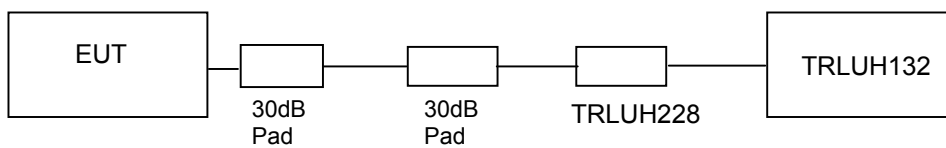

See Annex C for full list of test equipment

The test setup was as per the above diagram. The unit was tested on four channels. The unit was put into test mode and set to operate at maximum power and with a random modulating signal using the manual test command 27 XXX YY Z# (See Annex D for explanation of test command). The antenna gain, included in the table below, represents the highest gain of any antennas that are used with this system.

Frequency MHz	Attenuator and cable loss dB	Level at Power Meter dBm	Antenna Gain dB	Duty Cycle Factor dB (See Annex D)	Carrier power dBm	Carrier power dBW	Limit dBW
Channel 1	61.1	-34.59	3	10.4	39.91	9.91	40
Channel 75	61.1	-34.81	3	10.4	39.69	9.69	40
Channel 150	61.1	-34.71	3	10.4	39.79	9.79	40
Channel 240	61.1	-35.30	3	10.4	39.20	9.20	40


- Notes:
1. Duty Cycle Factor =  $10 \times \log(1/X)$  Where  $X = (T_{on} / T_{frame})$ . See Annex E for duty cycle plots
  2. Correction Factor for dBm to dBW = -30dB
  3. Antenna gain of 3dBi is the worst case gain over an isotropic antenna

**TRANSMITTER TESTS**

**EMISSIONS LIMITATIONS – CONDUCTED – PART 25.202 (f)**

Ambient temperature = 19°C  
 Relative humidity = 57%  
 Supply voltage = +3.7 Vdc

Radio Laboratory

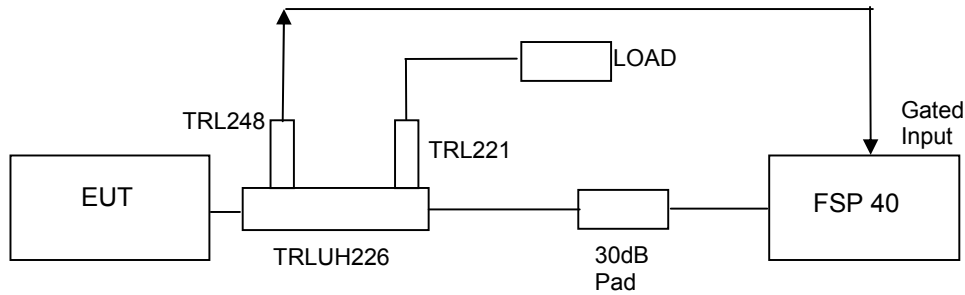

See Annex C for full list of test equipment

The test setup was as per the above diagram. The unit was tested on four channels. The unit was put into test mode and set to operate at maximum power and with a random modulating signal using the manual test command 27 XXX YY Z# (See Annex D for explanation of test command).

To enable an average measurement to be taken the gated input trigger of the spectrum analyser was used.

The Spurious limit is as follows:

On any frequency removed from the assigned frequency by the following percentage of the authorised bandwidth

±50%	-	100%	-25 dBc
±100%	-	250 %	-35 dBc
> ±250%			At least 43 + 10 log PdB

$$(10\log P_{\text{watts}}) - (43 + 10\log (P_{\text{watts}} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$$

Where the Authorised Bandwidth = 41.667 kHz

**Note**

1. The 3 kHz to 4 kHz bandwidth correction, cable and attenuator losses and antenna gain have been taken into account in the Ref level offset figure.

The Monaco handset was found to comply with the limits

See plots in Annex F.




## TRANSMITTER TESTS

### SPURIOUS EMISSIONS – CONDUCTED – PART 25.202 (f) & 25.213

Ambient temperature = 21°C  
 Relative humidity = 36%  
 Supply voltage = +3.7 Vdc

Radio Laboratory

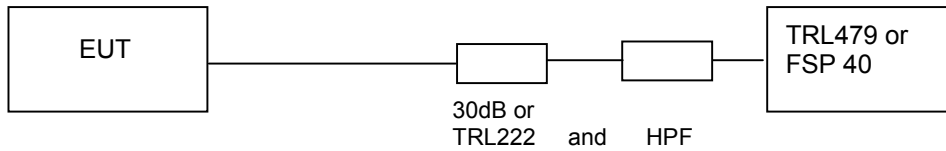

For measurements between 1559 MHz and the band edge of 1610MHz the same test setup as per emissions limitations test was used. For measurements below 1559 MHz and above the band edge of 1628.5MHz the above test setup was used. A 30 dB pad was used for measurements below 3GHz and a 10dB attenuator and high pass filter for measurements above 3GHz.

See Annex C for full list of test equipment

The test setup was as per the above diagram. The unit was tested on four channels. The unit was put into test mode and set to operate at maximum power and with a random modulating signal using the manual test command 27 XXX YY Z# (See Annex D for explanation of test command).

The Spurious limit was calculated as follows:

On any frequency removed from the assigned frequency by more than 250% of the authorised bandwidth

At least  $43 + 10 \log(P)$  dB

$$(10 \log P_{\text{watts}}) - (43 + 10 \log (P_{\text{watts}} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$$

## RESULTS

Frequency Range (MHz)	Ch N°	Freq. of Emission	Spectrum Analyser Level (dBm)	Attenuator & Cable Losses (dB)	Spurious Emission Level (dBm)	Limit dBm
30MHz – 1559MHz	No Significant emissions within 20 dB of the Limit					-13
1559MHz – 1605MHz	1 240	1604.448	-77.91	30.9	-47.01	-40
			-77.18	30.9	-46.28	
1605MHz – 1610MHz	1 240	1605.000	-77.31	30.9	-46.41	-40 (Note 4)
		1605.000	-77.57	30.9	-46.67	
1628.5MHz – 16.3 GHz	No Significant emissions within 20 dB of the Limit					-13

Notes :


1. Emissions Checked up to 10 times Fc
2. Reference level offset of Scan plots in Annex G already have approximate attenuator losses taken into account (30dB < 3GHz < 10 dB)
3. Average measurement in a carrier on state were taken in the bands 1599MHz to 1605MHz and 1605MHz -1610MHz. All other scans were peak hold for worst case.
4. -40 to -10 Linearly interpolated in dBm Vs frequency offset.
5. Correction Factor for dBm to dBW = -30dB.
6. Fully charged batteries were used for each channel.

The Monaco handset was found to comply with the limits. See Annex G for plots

## TRANSMITTER TESTS

### SPURIOUS EMISSIONS – RADIATED – PART 25.202 (f) & 25.213

Ambient temperature = 16°C  
 Relative humidity = 43%  
 Conditions = OATS  
 Supply voltage = +3.7 Vdc  
 Supply Frequency = N/A

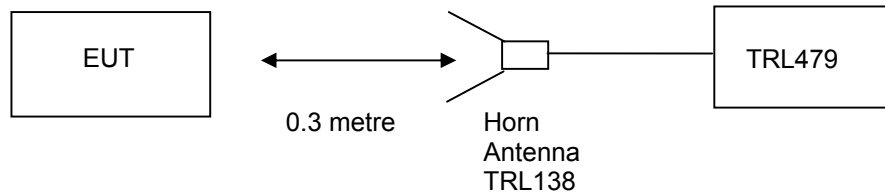

See Annex C for full list of test equipment

The test setup was as per the above diagram. The unit was tested on four channels. The unit was put into test mode and set to operate at maximum power and with a random modulating signal using the manual test command 27 XXX YY Z# (See Annex D for explanation of test command). The unit was mounted on a turntable and rotated through 360° to find the worst case emission.

The Spurious limit was calculated as follows:

On any frequency removed from the assigned frequency by more than 250% of the authorised bandwidth

At least 43 + 10 log PdB

$$(10\log P_{\text{watts}}) - (43 + 10\log (P_{\text{watts}} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$$

## RESULTS

FREQUENCY RANGE	CHANNEL NUMBER	FREQ. (MHz)	MEAS. Rx. (dBµV)	CABLE LOSS (dB)	ANT FACTOR	FIELD STRENGTH (dBµV/m)	CALCULATED ERP/EIRP (dBm)	LIMIT (dBm)
30MHz – 1559MHz	No Significant Emissions within 20 dBs of the Limit							-13
1559MHz – 1605MHz	No Significant Emissions within 20 dBs of the Limit							-40
1605MHz – 1610MHz	No Significant Emissions within 20 dBs of the Limit							-40 to 10 Note 4
1628.5MHz – 16.3 GHz	No Significant Emissions within 20 dBs of the Limit							-13

Notes :

1. Emissions Checked up to 10 times Fc.
2. Scan plots of channels 1 & 240 with receive antenna in vertical polarization in annex H.
3. The unit was mounted on a turntable and rotated through 360° and in 3 orthogonal planes to find the worst case emission.
4. -40 to -10 Linearly interpolated in dBm Vs frequency offset.
5. Correction Factor for dBm to dBW = -30dB.
6. Fully charged batteries were used for each channel.


The Monaco handset was found to comply with the limits. See annex H for plots

## TRANSMITTER TESTS

### FREQUENCY STABILITY – CONDUCTED – TEMPERATURE – PART 25.202 (d)

Ambient temperature = 22°C  
 Relative humidity = 37%  
 Supply voltage = +3.7 Vdc

Radio Laboratory

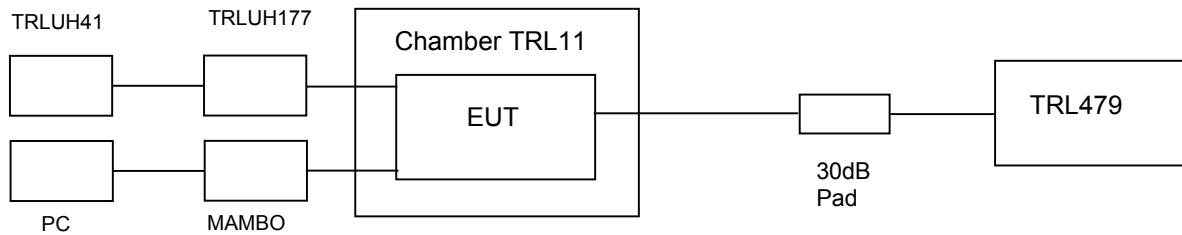

See Annex C for full list of test equipment

The test setup was as per the above diagram. The unit was tested on four channels. The unit was put into test mode and set to operate at maximum power and with a tone modulating signal using test commands sent from a PC via the MAMBO Box that were equivalent to the manual test command 27 XXX YY Z# (See Annex D for explanation of test command). The Analyser was set to max hold.

## RESULTS

TEMP	Frequency (MHz)			
	Channel 1	Channel 75	Channel 150	Channel 240
°C				
+60	1616.02720	1619.11030	1622.23570	1625.98550
+50	1616.02700	1619.11050	1622.23530	1625.98530
+40	1616.02680	1619.11010	1622.23550	1625.98550
+30	1616.02700	1619.11030	1622.23530	1625.98510
+20	1616.02450	1619.10810	1622.23320	1625.98330
+10	1616.02770	1619.11090	1622.23600	1625.98570
0	1616.02680	1619.11010	1622.23560	1625.98530
-10	1616.02680	1619.11030	1622.23540	1625.98530
-20	1616.02740	1619.10770	1622.23280	1625.98230
-30	1616.02400	1619.10890	1622.23360	1625.98350

Notes: 1.Limit  $\pm 10$ ppm (See Annex I for frequency stability plots verses limit)


The Monaco handset was found to comply with the limits

**TRANSMITTER TESTS**

**FREQUENCY STABILITY – CONDUCTED – VOLTAGE – PART 25.202 (d)**

Ambient temperature = 17°C  
 Relative humidity = 41%  
 Supply voltage = +3.7 Vdc

Radio Laboratory

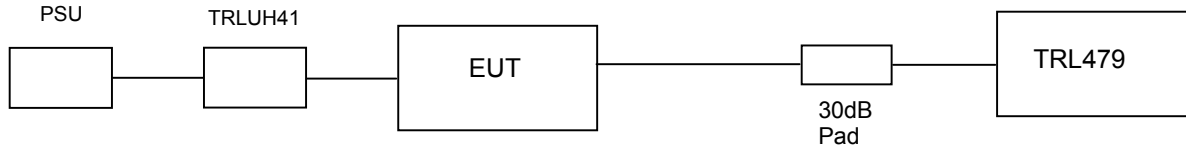

See Annex C for full list of test equipment

The test setup was as per the above diagram. The unit was tested on four channels .The unit was put into test mode and set to operate at maximum power and with a random modulating signal using the manual test command 27 XXX YY Z# (See Annex D for explanation of test command). The Analyser was set to max hold.

**RESULTS**

VOLTAGE	Frequency (MHz)			
	Channel 1	Channel 75	Channel 150	Channel 240
85	1616.02120	1619.10500	1622.23000	1625.98020
90	1616.02190	1619.10490	1622.23050	1625.97980
95	1616.02240	1619.10500	1622.23040	1625.98010
100	1616.02150	1619.10480	1622.23040	1625.98010
105	1616.02170	1619.10560	1622.22980	1625.98050
110	1616.02190	1619.10510	1622.23010	1625.98110
115	1616.02190	1619.10530	1622.22950	1625.98020

Notes: 1.Limit ± 10ppm (See Annex J for plots verses limit)

The Monaco handset was found to comply with the limits

**ANNEX A**  
**PHOTOGRAPHS**


PHOTOGRAPH 1.

**RADIATED TEST SETUP**



PHOTOGRAPH 2.

**CONDUCTED TEST SETUP**

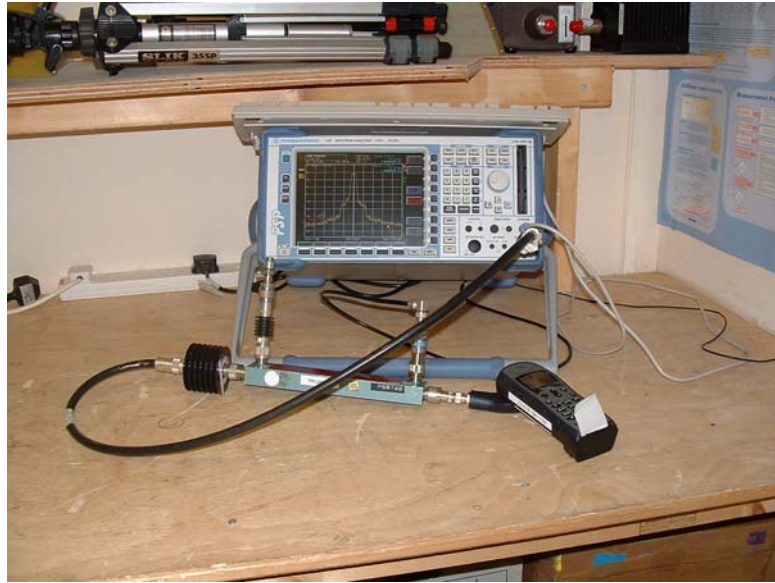

**ANNEX B**  
**APPLICANT'S SUBMISSION OF DOCUMENTATION LIST**



**APPLICANT'S SUBMISSION OF DOCUMENTATION LIST**

a.	TCB	-	APPLICATION	<input checked="" type="checkbox"/>
		-	FEE	<input checked="" type="checkbox"/>
b.	AGENT'S LETTER OF AUTHORISATION	-		<input checked="" type="checkbox"/>
c.	MODEL(s) vs IDENTITY	-		<input type="checkbox"/>
d.	ALTERNATIVE TRADE NAME DECLARATION(s)	-		<input type="checkbox"/>
e.	LABELLING	-	PHOTOGRAPHS	<input type="checkbox"/>
		-	DECLARATION	<input type="checkbox"/>
		-	DRAWINGS	<input type="checkbox"/>
f.	TECHNICAL DESCRIPTION	-		<input checked="" type="checkbox"/>
g.	BLOCK DIAGRAMS	-	Tx	<input checked="" type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
h.	CIRCUIT DIAGRAMS	-	Tx	<input type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
i.	COMPONENT LOCATION	-	Tx	<input type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
j.	PCB TRACK LAYOUT	-	Tx	<input type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
k.	BILL OF MATERIALS	-	Tx	<input type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
l.	USER INSTALLATION / OPERATING INSTRUCTIONS	-		<input checked="" type="checkbox"/>

**ANNEX C**  
**TEST EQUIPMENT LIST**

TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRL No
HORN	EMCO	3115	9010-3580	138
HORN	EMCO	3115	9010-3581	139
SIGNAL GENERATOR	MARCONI	2042	119388/080	176
10 dB ATTENUATOR	BIRD	8304-100-N	N/A	222
RF DIODE	SUHNER	H7	1001.17.A	248
6dB ATTENUATOR	BIRD	8304-0600N	N/A	246
CABLE	ROSENBERGER	MICRO COAX	N/A	280
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479
LOG PERIODIC ANTENNA	SCHWARZBECK	UHALP 9108	AC2404C/1	UH28
BICONICAL ANTENNA	SCHWARZBECK	VHBA 9123	N/A	UH29
MULTIMETER	AVOMeter	M3004	M3270006	UH41
PSU	MANSON	EP-603	60316619	UH177
BIDIRECTIONAL COUPLER	NARDA	3022	72622	UH226
CABLE	TRL	N/A	N/A	UH253
CABLE	TRL	N/A	N/A	UH254
SPECTRUM ANALYSER	R & S	FSP40	N/A	N/A
HIGH PASS FILTER	AFL	N/A	N/A	N/A
30 dB ATTENUATOR	NARDA	776C-30	577	N/A
50Ω LOAD	Suhner	N/A	N/A	N/A

**ANNEX D**  
**TEST COMMANDS**


## TEST COMMANDS

Command Function	Keypad Sequence
Enter Manual Test Mode	Press and Hold # Key for more than 3 seconds
Exit Manual Test Mode	01#
Turn on transmission selecting channel, power level and modulation type (random data or tone).	27 xxx yy z# xxx = Channel Number yy = power step z = Modulation
<u>Example 1</u> Channel number 001 (Min frequency), power setp 00 (Max) Modulation set to random data (z = 1, z = 0 is a tone)	27 001 00 1#
<u>Example 2</u> Channel number 240 (Max frequency), power level 08 (Min) Modulation set to tone (z = 0, z = 1 is random modulation)	27 240 08 0#
Turn off transmission	27#


Notes: To enter test mode a test sim card is required.

**ANNEX E**  
**DUTY CYCLE**

# Duty Cycle Plots

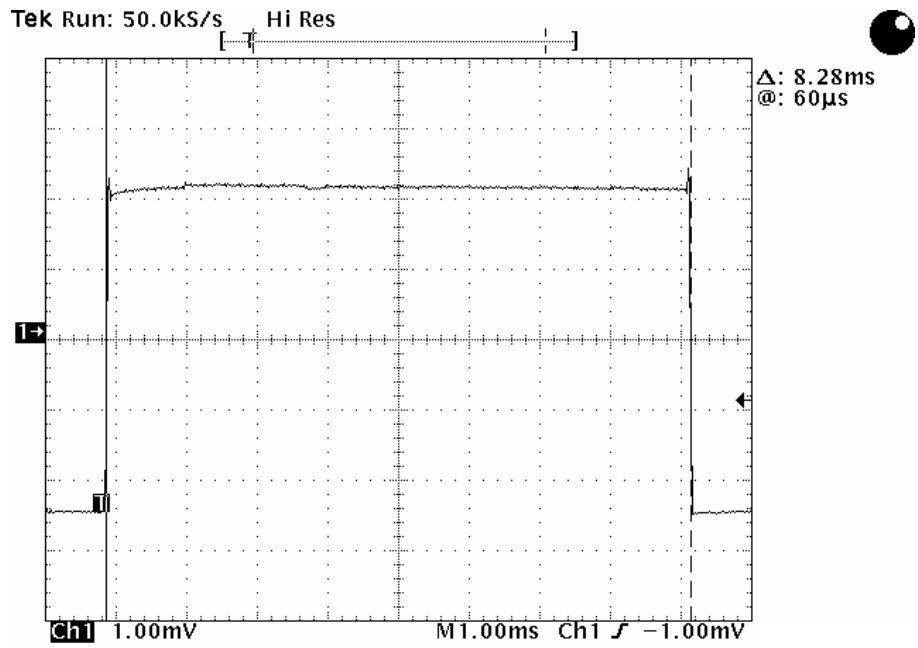


$T_{on} = 8.28mS$

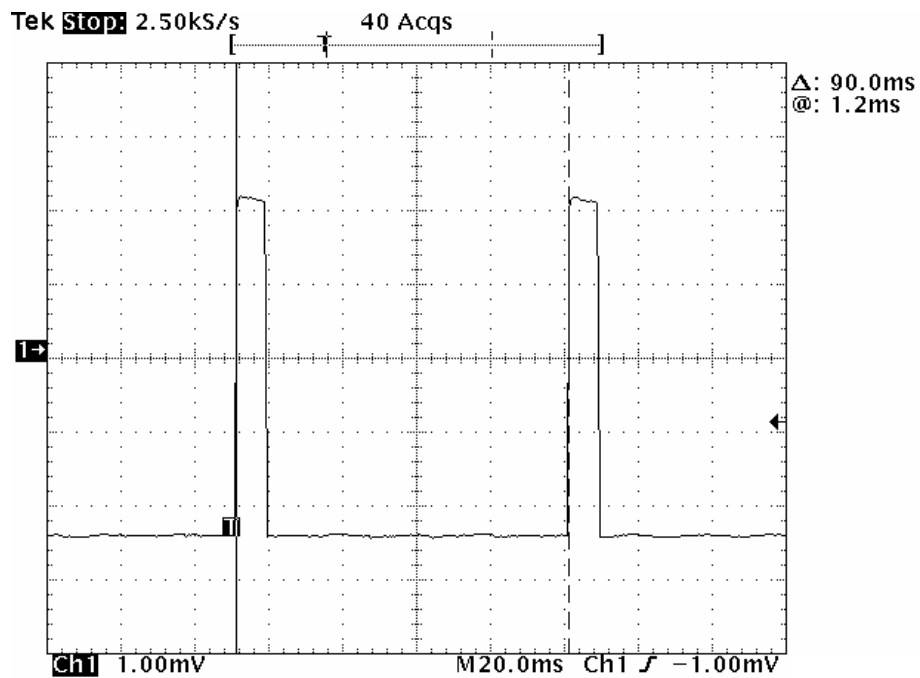

$T_{frame} = 90mS$


**ANNEX F**  
**EMISSIONS LIMITATIONS**



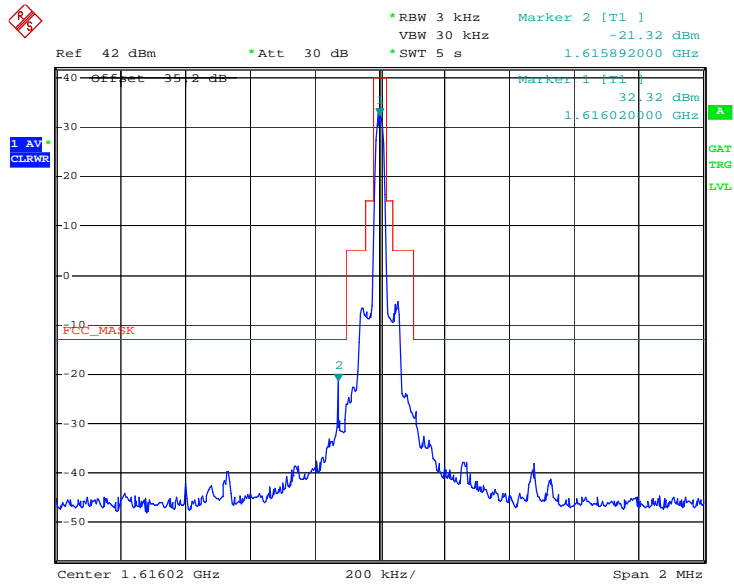


€  
 Date: 27.MAR.2006 11:03:50

### Channel 1

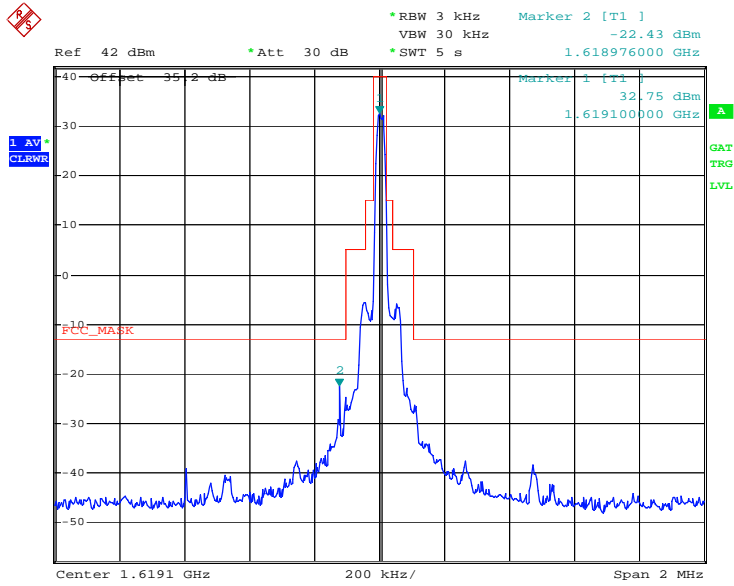


€  
 Date: 27.MAR.2006 10:54:54

### Channel 75

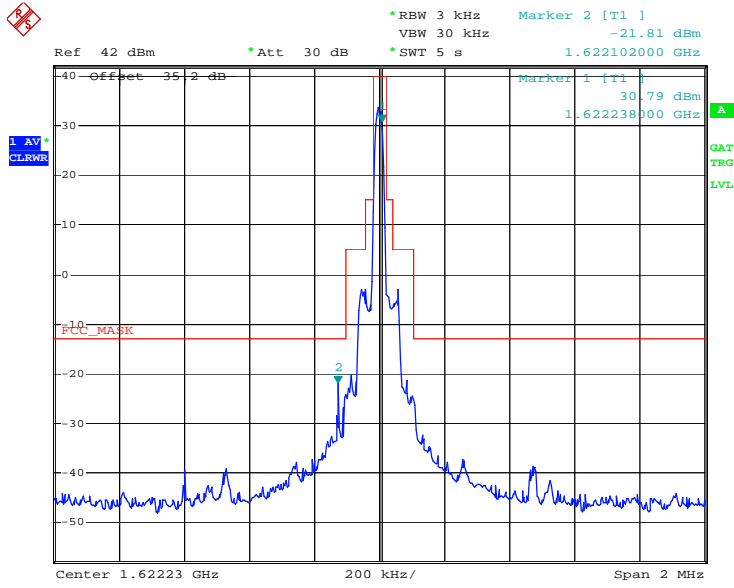

e  
 Date: 27.MAR.2006 10:52:04


### Channel 150

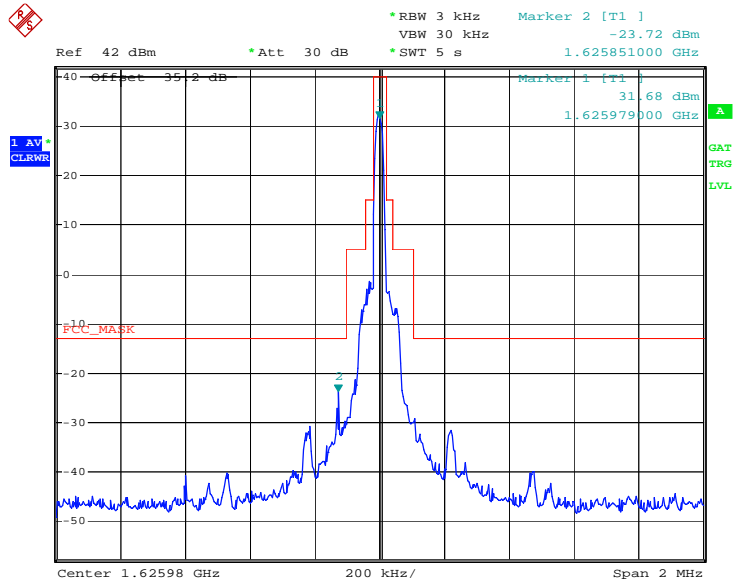


e  
 Date: 27.MAR.2006 10:42:12

### Channel 240


**ANNEX G**  
**TRANSMITTER SPURIOUS EMISSIONS – Conducted**

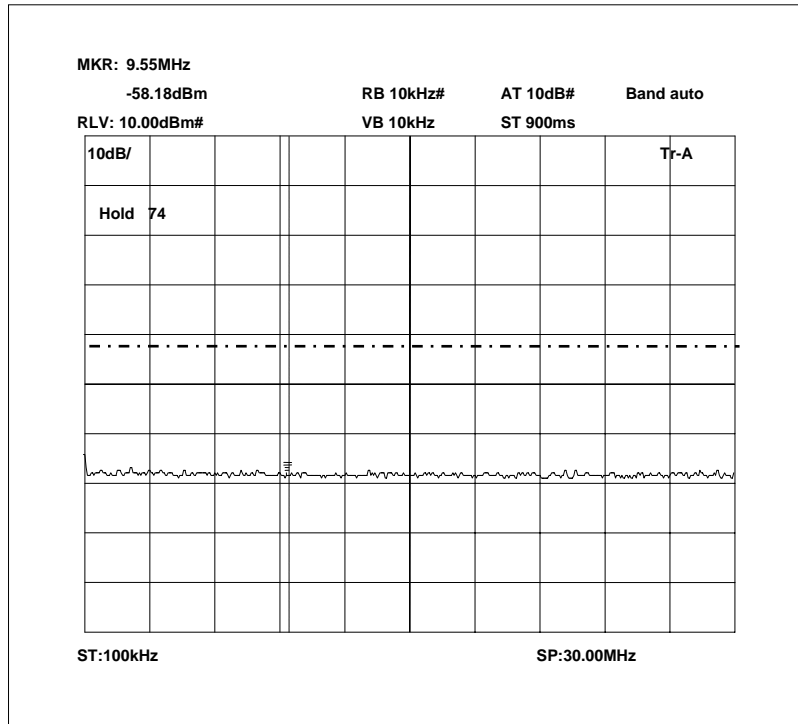


100 kHz – 30MHz

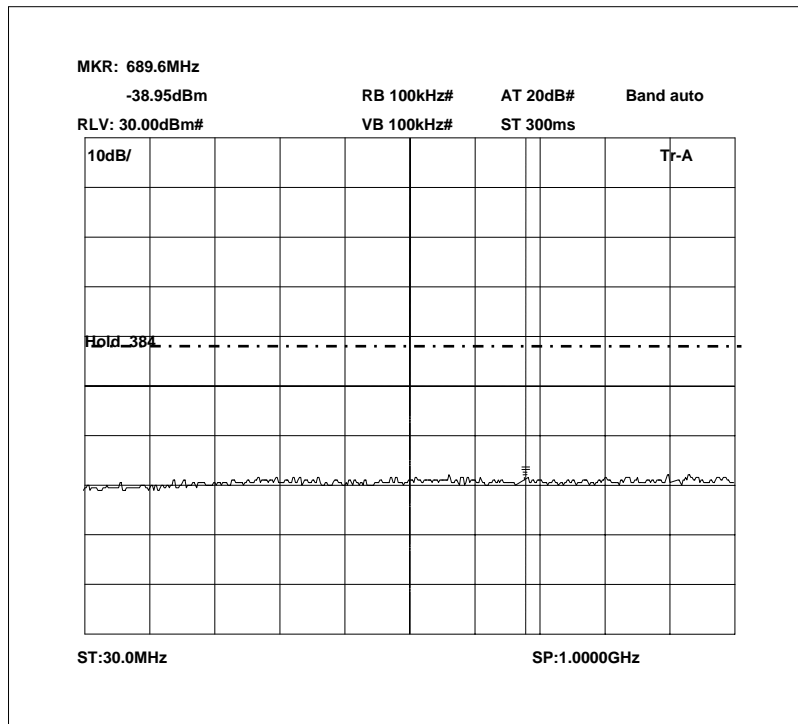

30MHz – 1000MHz

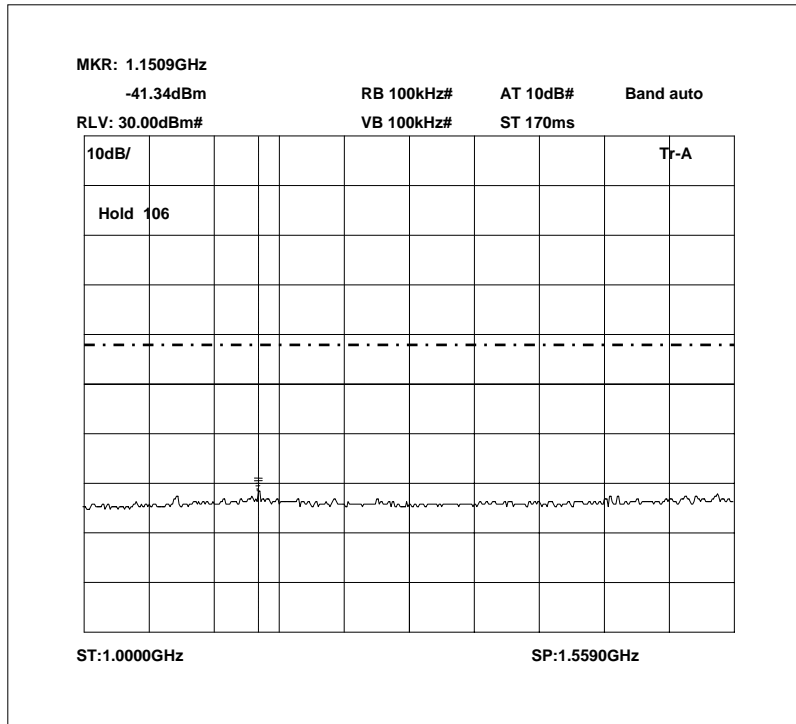


1000MHz – 1559MHz

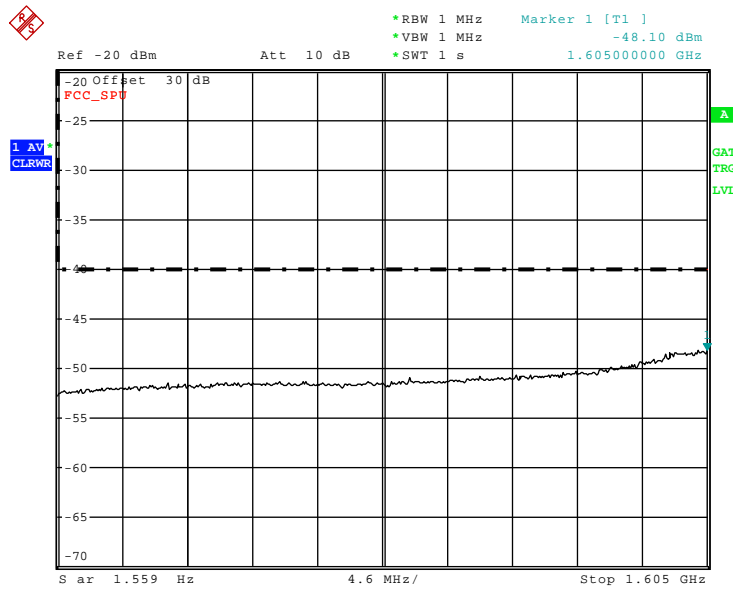


1559MHz – 1605MHz

TRANSMITTER SPURIOUS EMISSIONS – Conducted


Channel 1

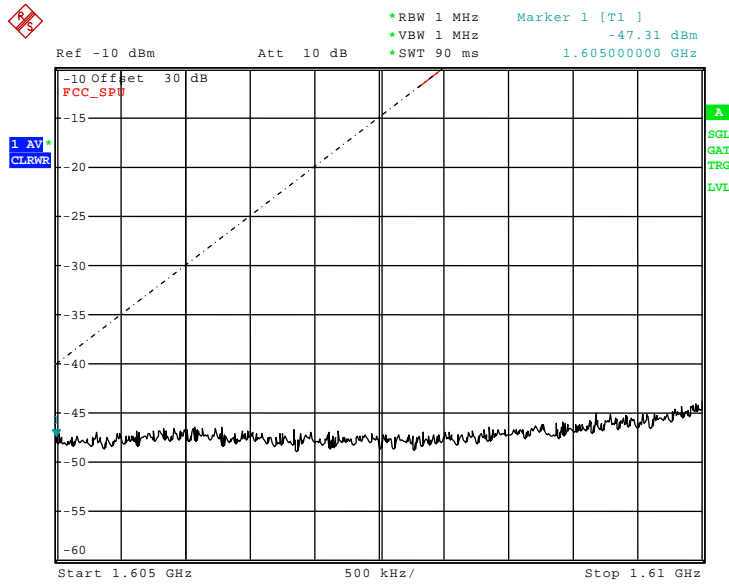


1605MHz – 1610MHz

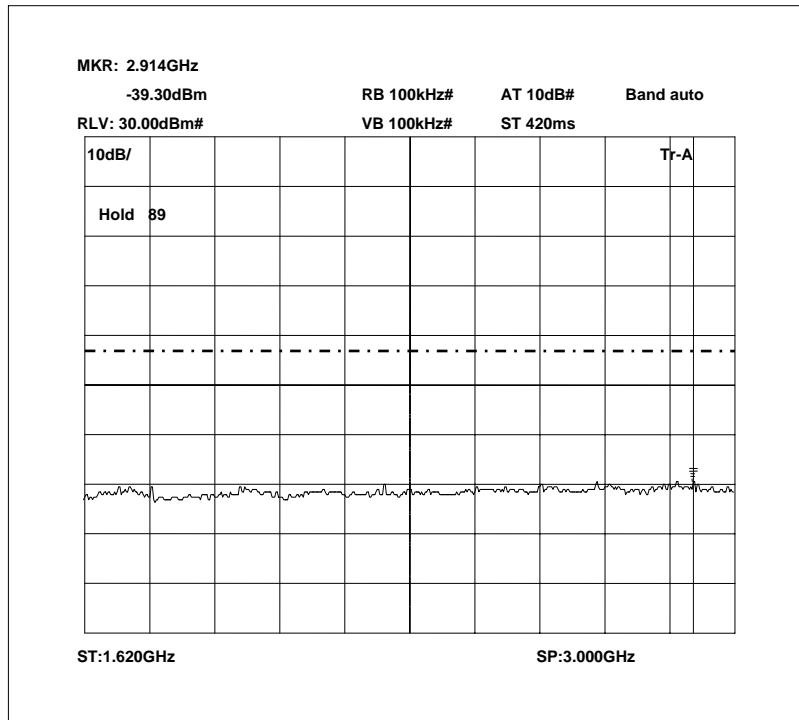


1628.5MHz – 3000MHz

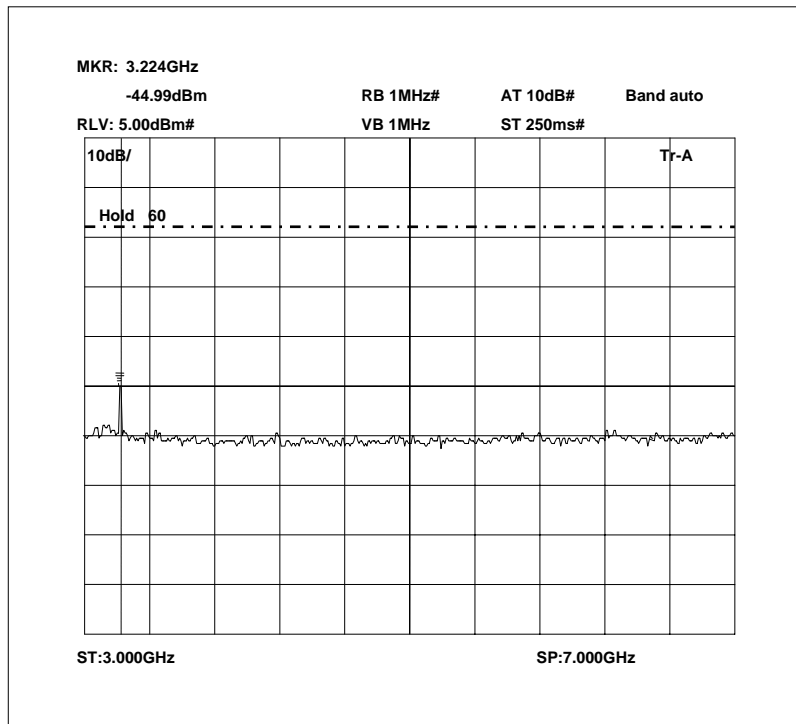


3GHz – 7GHz

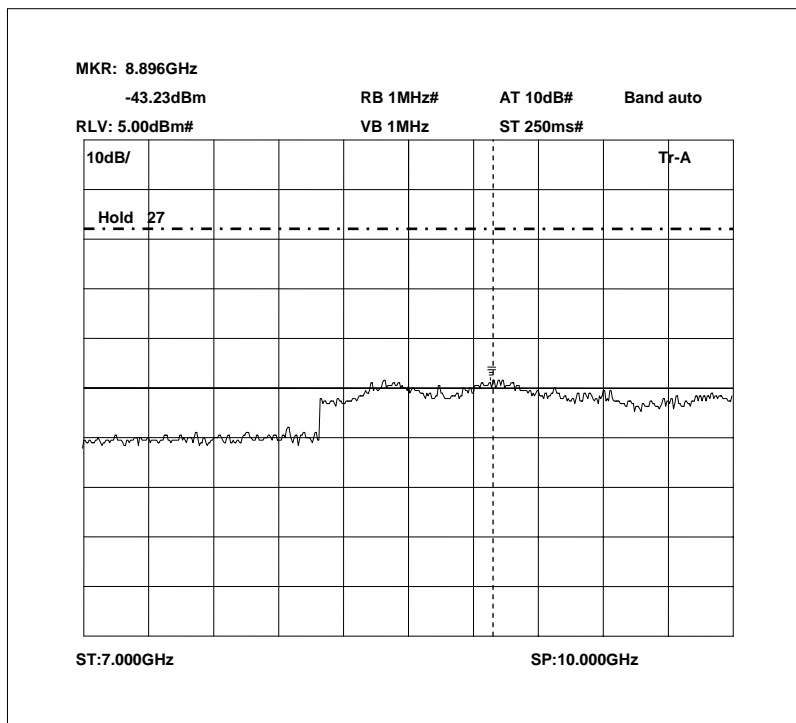

7GHz – 10GHz

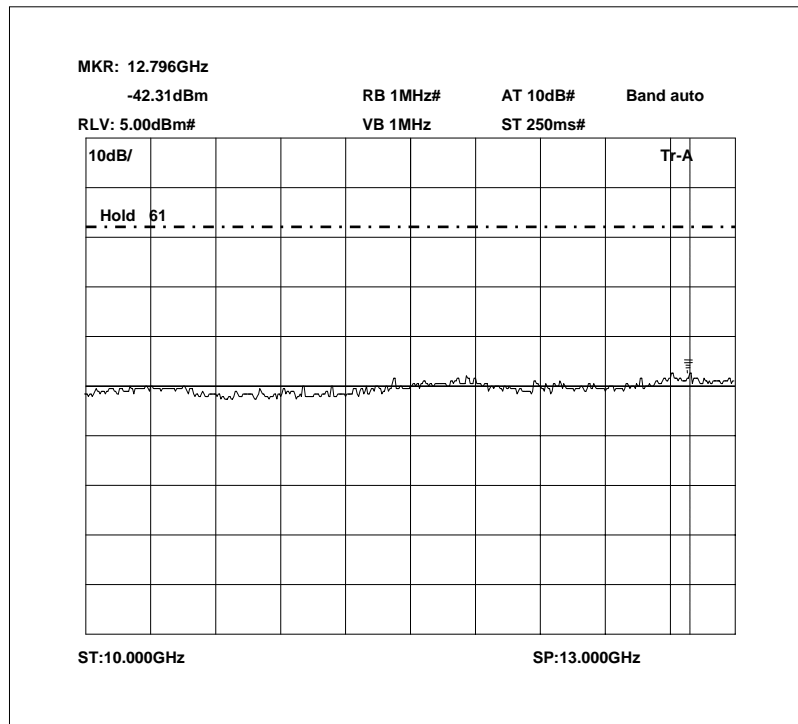


10GHz – 13GHz

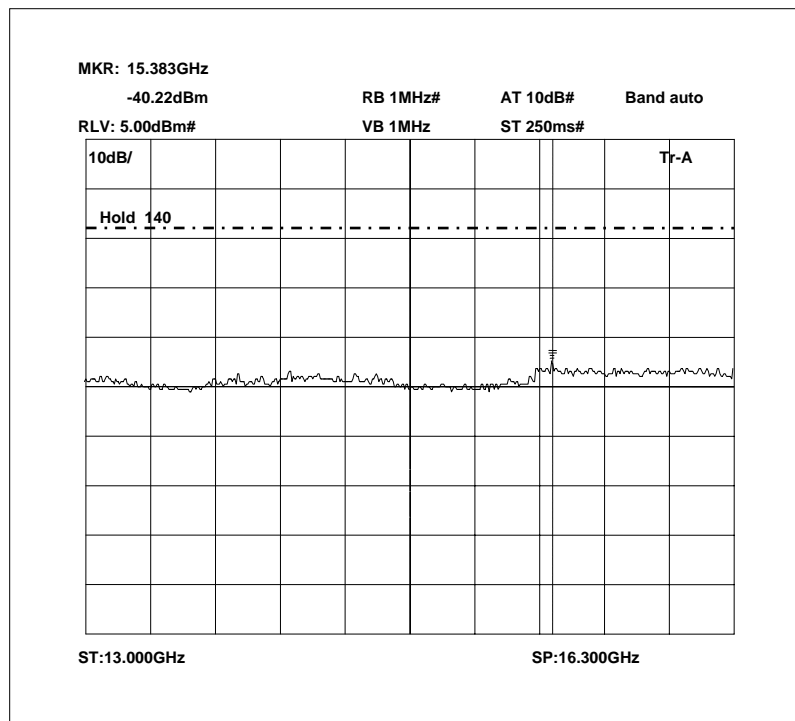


13GHz – 16.3GHz




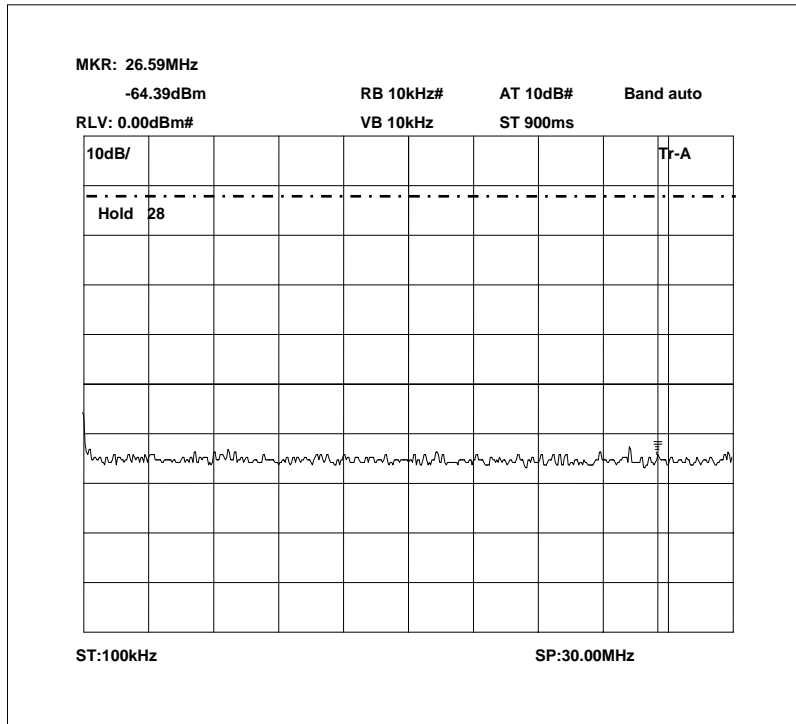


100 kHz – 30MHz

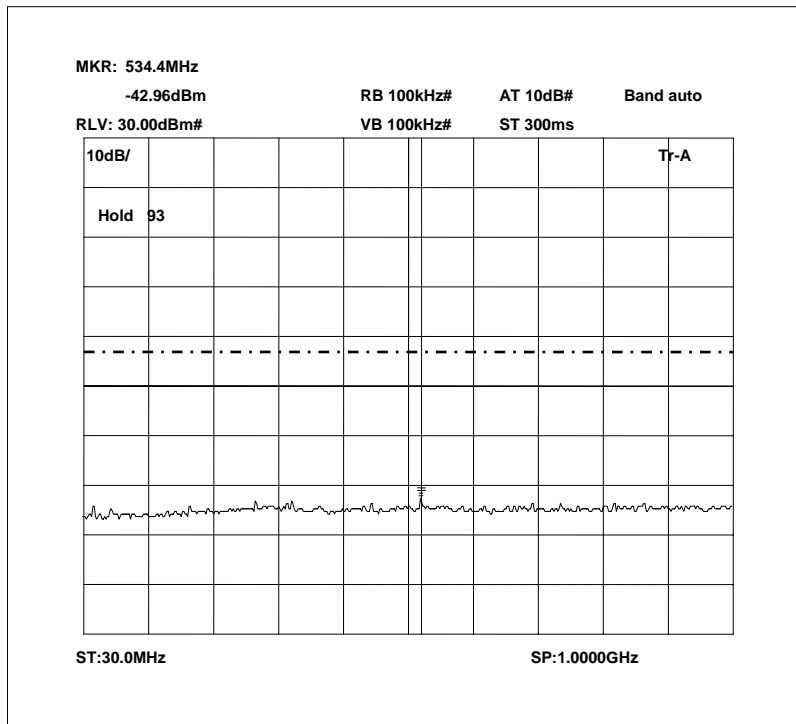


30MHz – 1000MHz

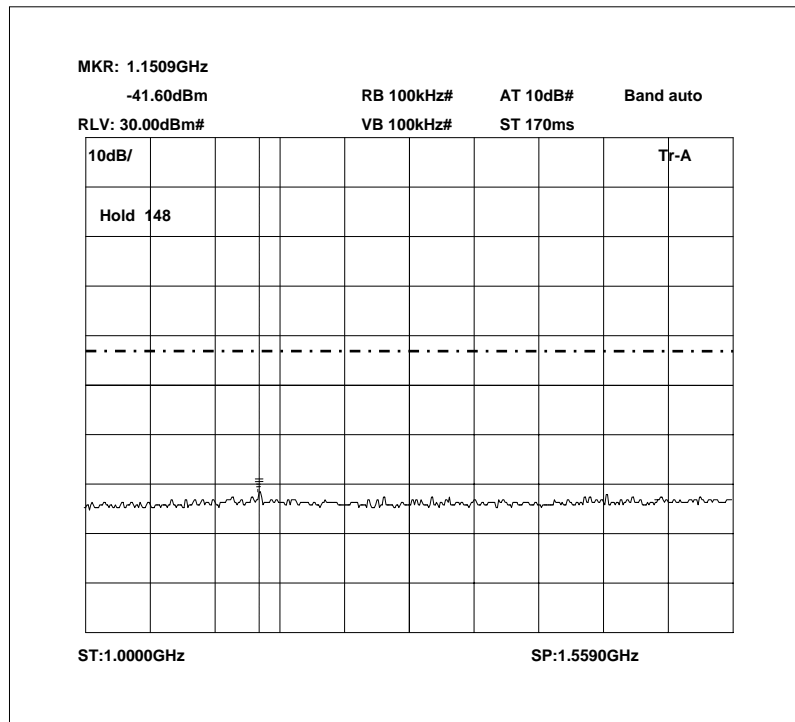


1000MHz – 1559MHz

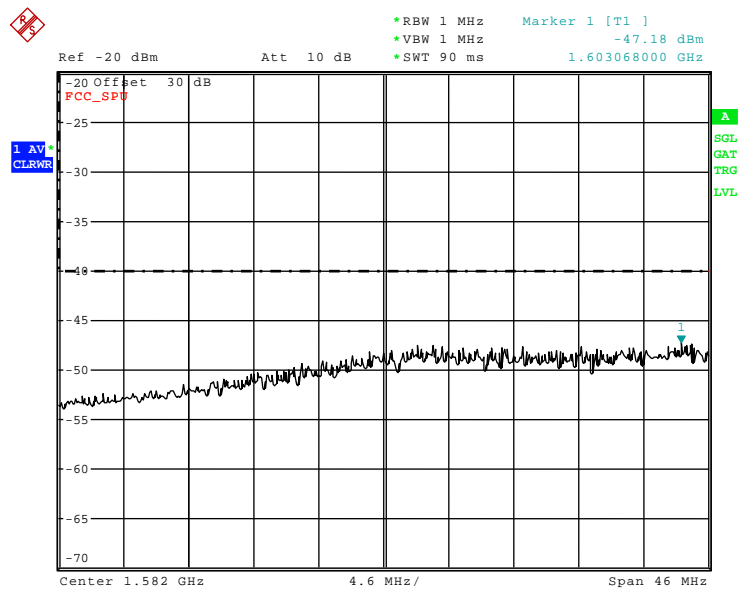


1559MHz – 1605MHz

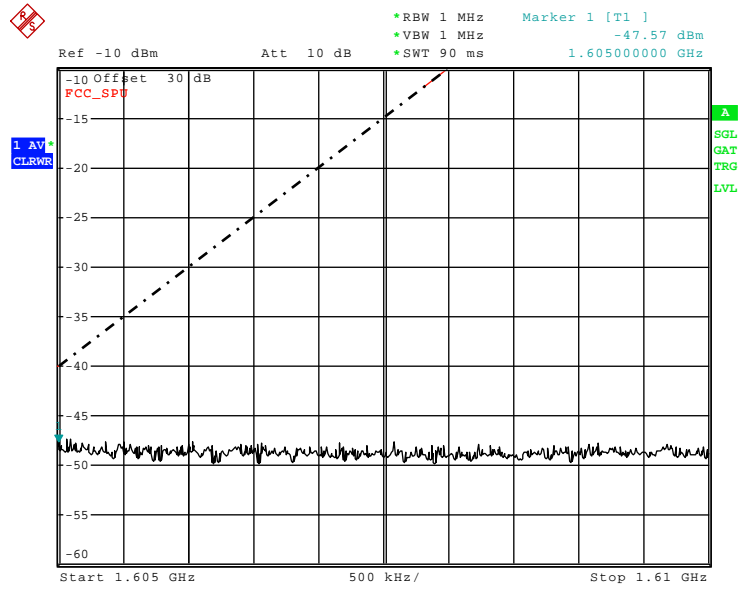


1605MHz – 1610MHz

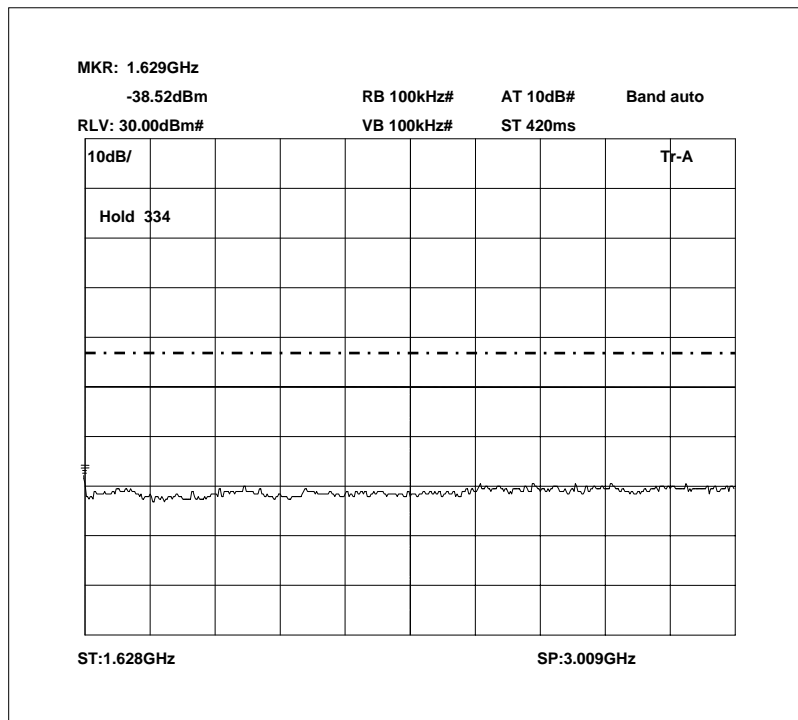


1628.5MHz – 3000MHz

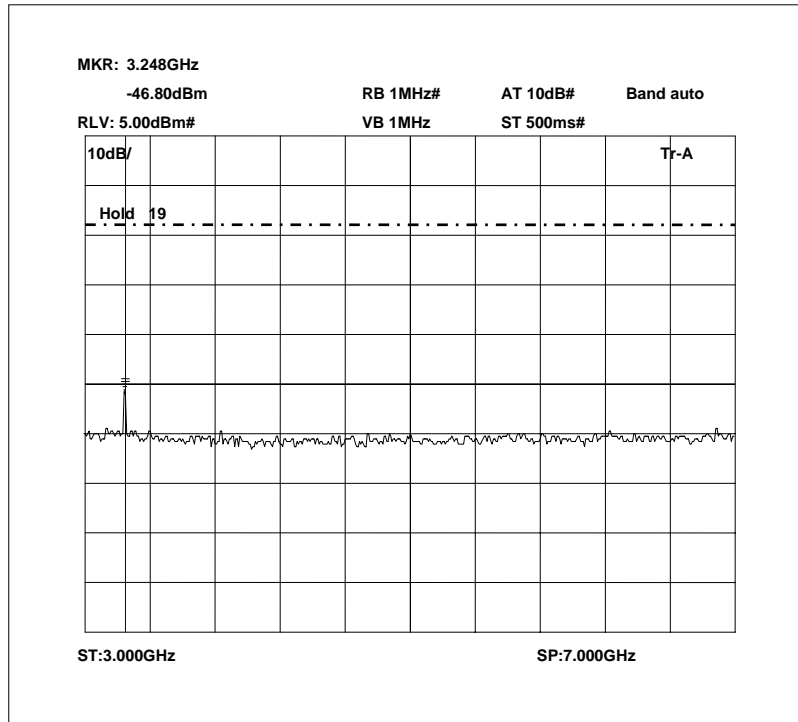


3GHz – 7GHz

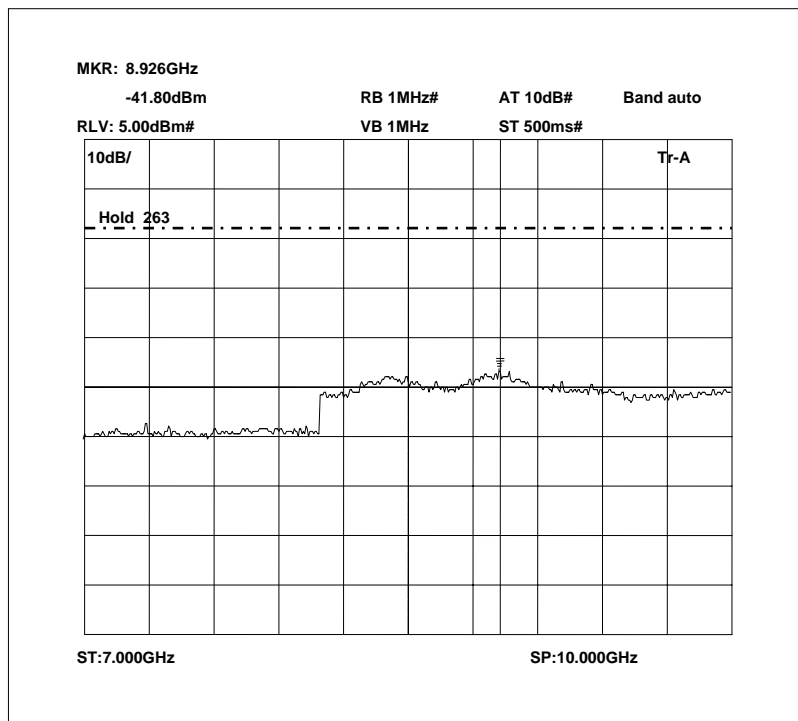

7GHz – 10GHz

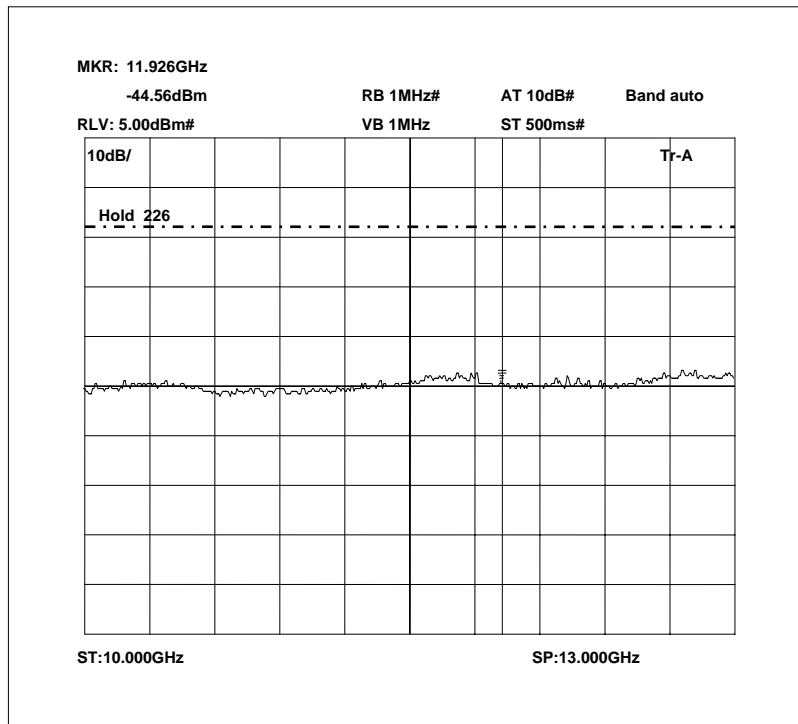


10GHz – 13GHz

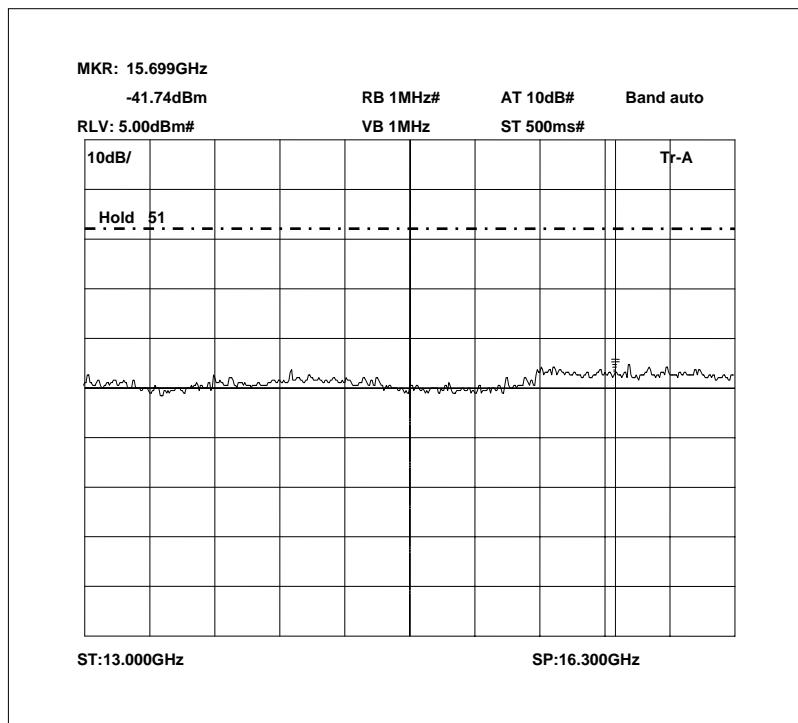


13GHz – 16.3GHz


**ANNEX H**  
**TRANSMITTER SPURIOUS EMISSIONS – Radiated**

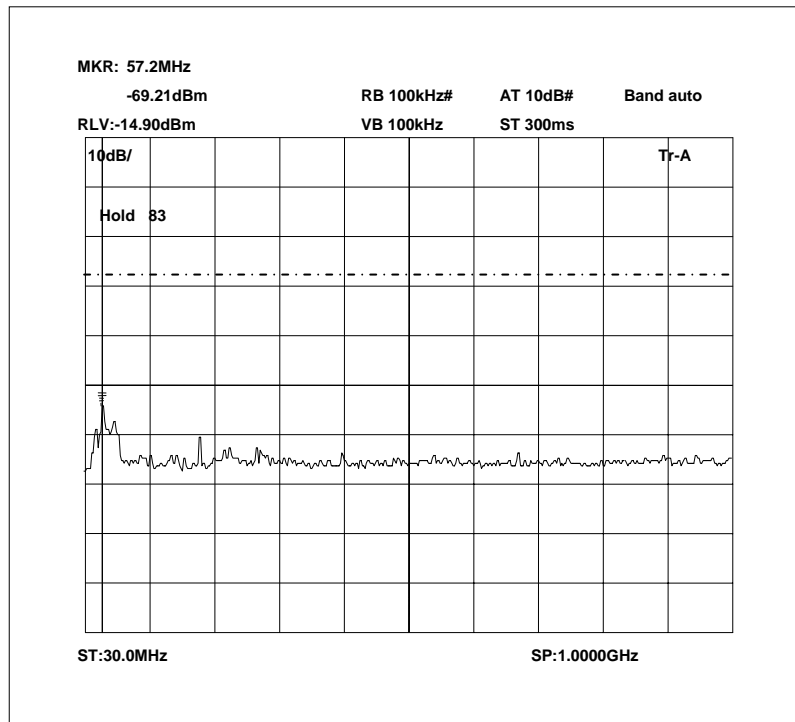


30MHz – 1000MHz

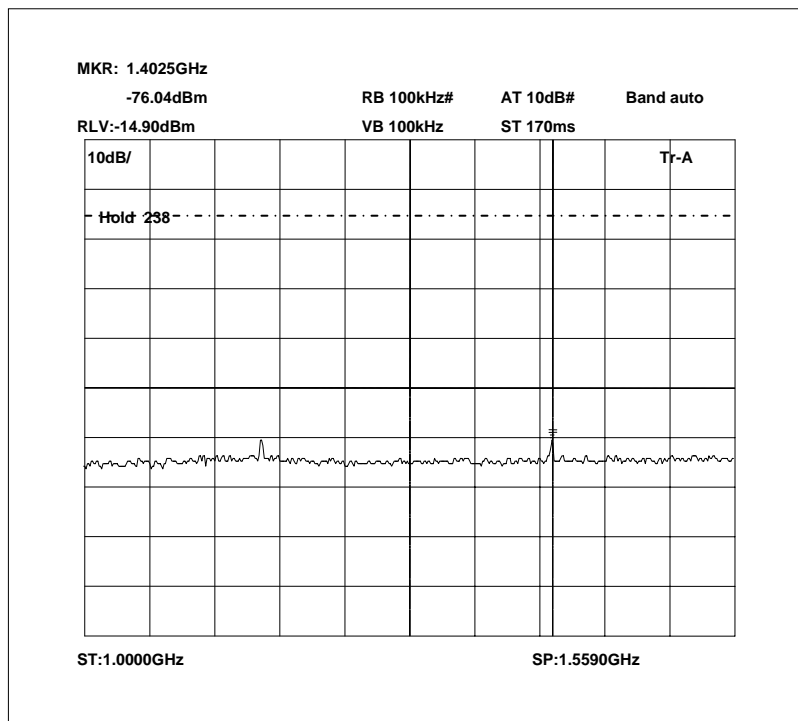

1000MHz – 1559MHz

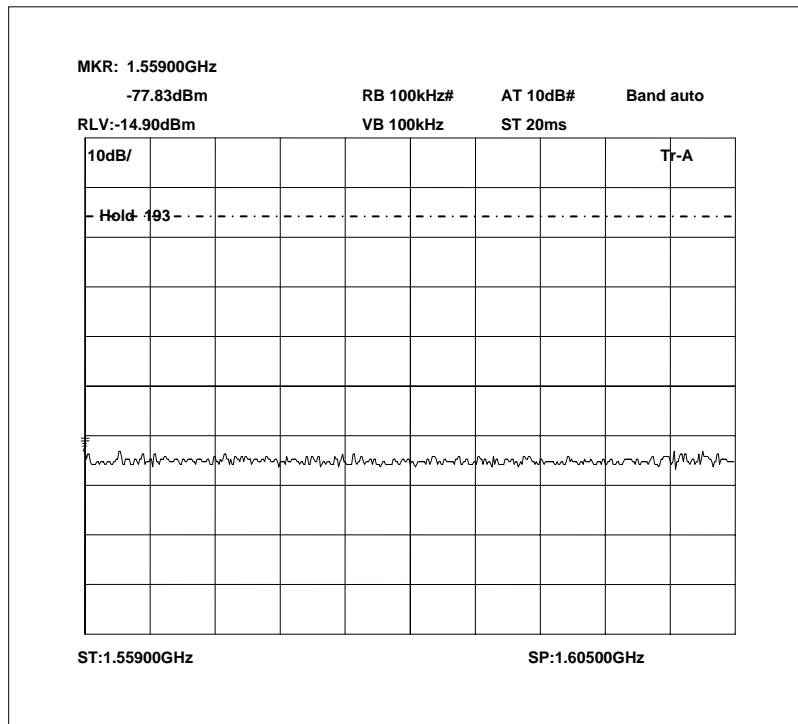


1559MHz – 1605MHz

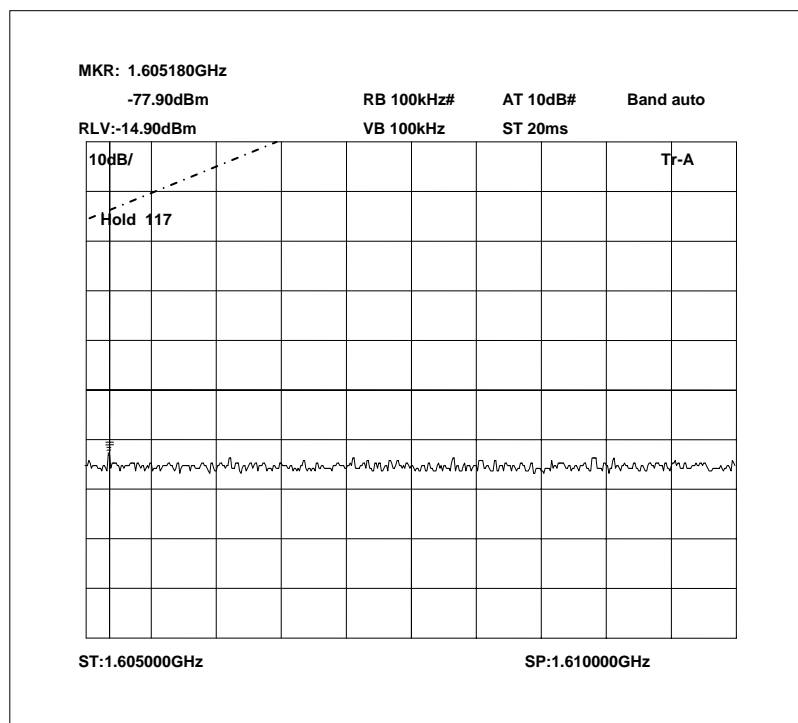


1605MHz – 1610MHz




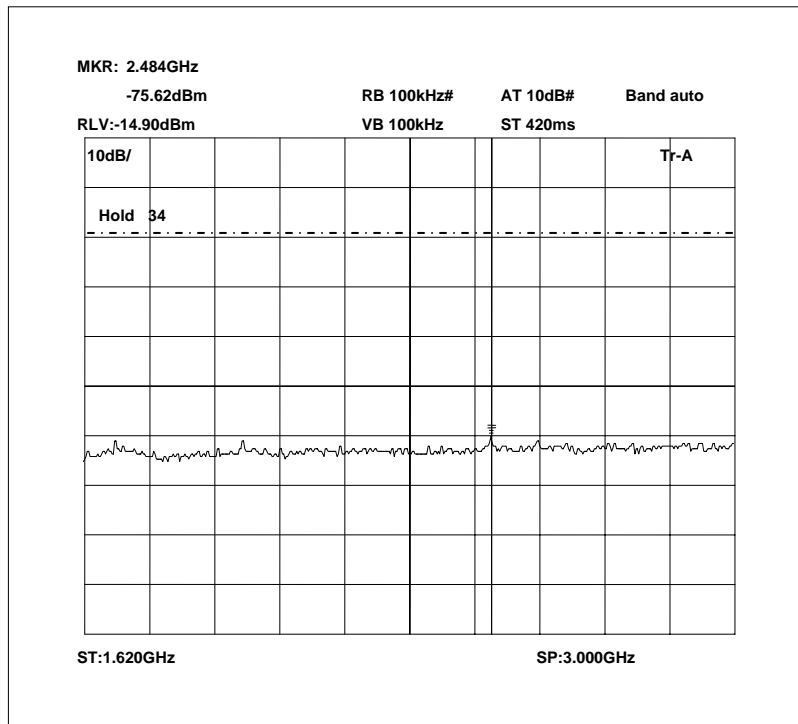


1628.5MHz – 3000MHz

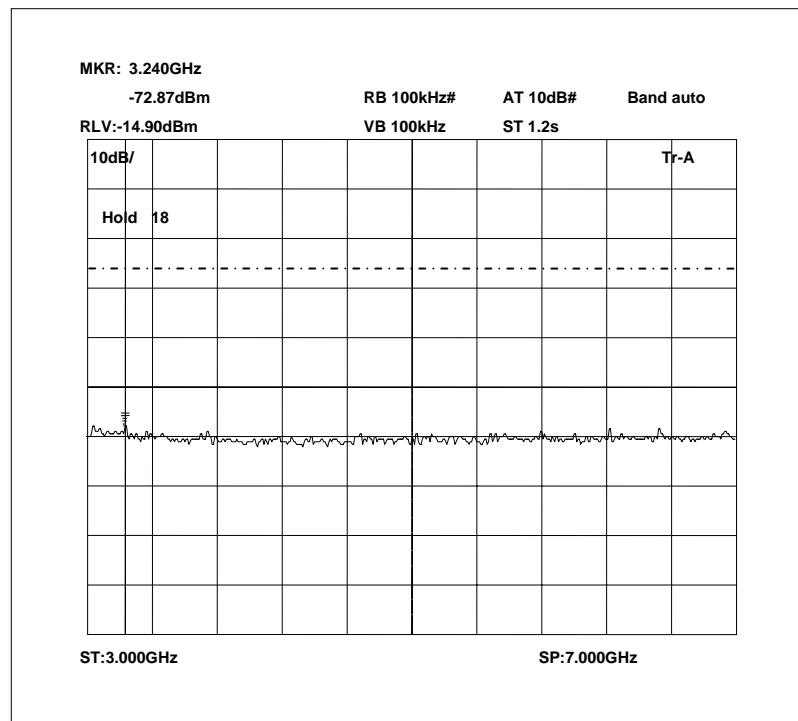


3GHz – 7GHz

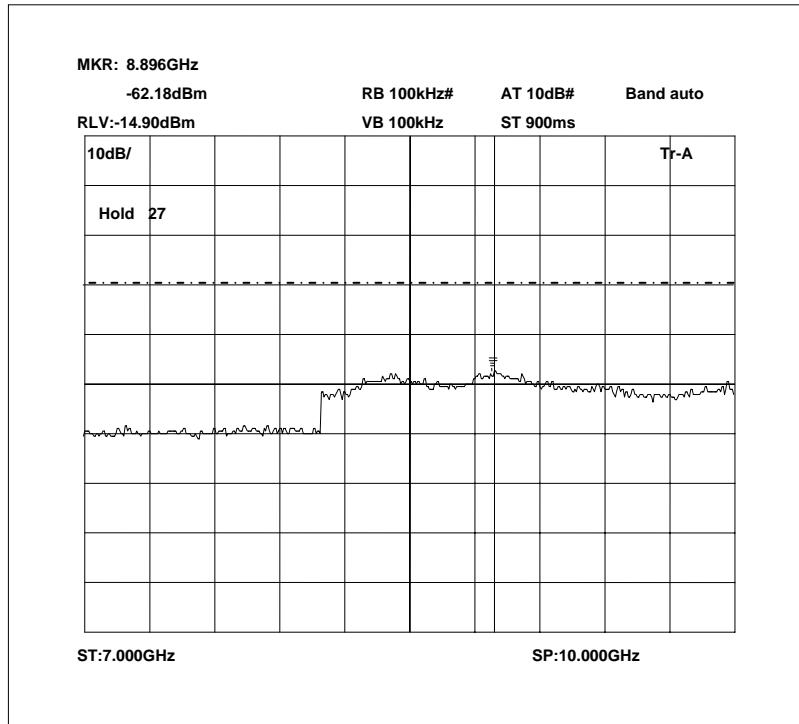


7GHz – 10GHz

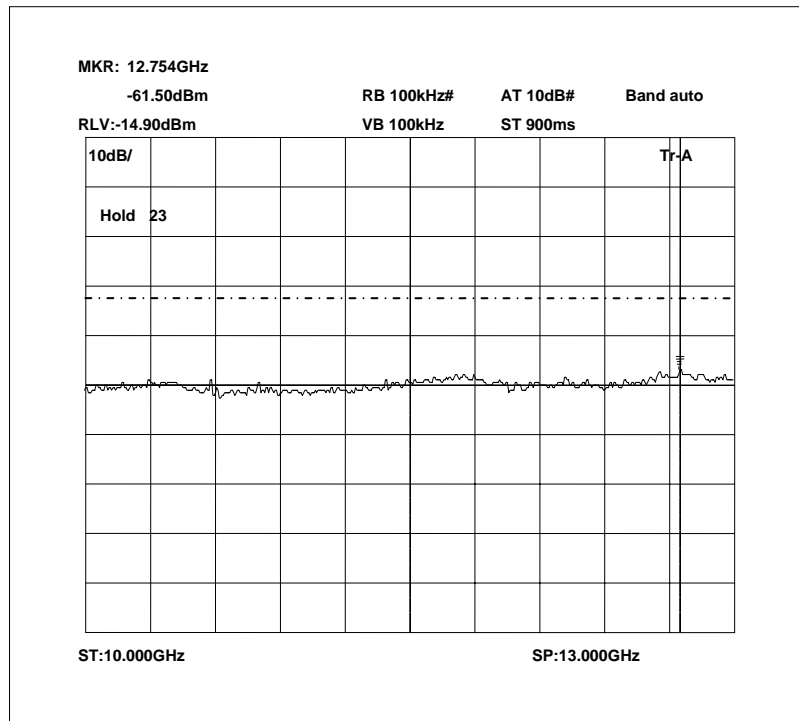


10GHz – 13GHz

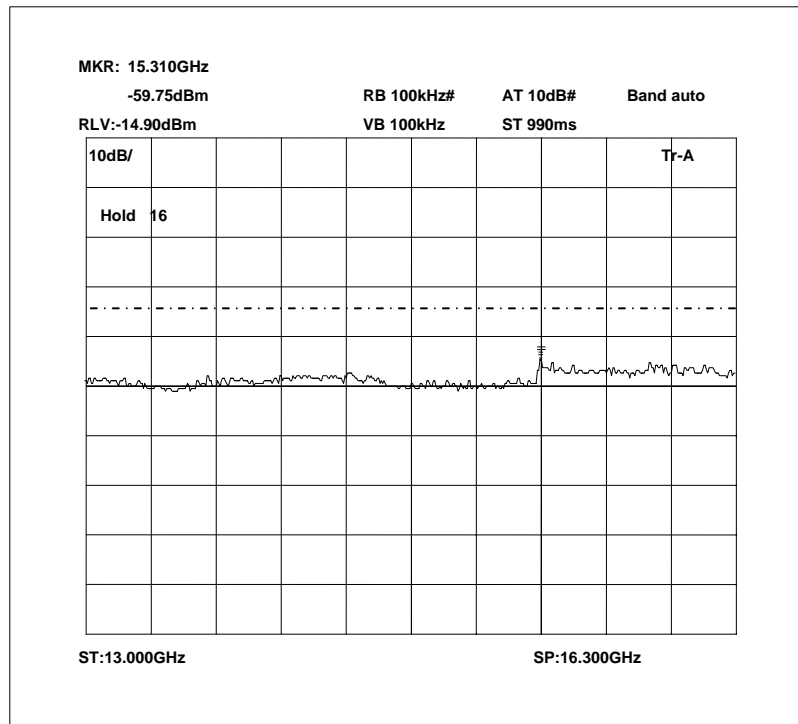


13GHz – 16.3GHz

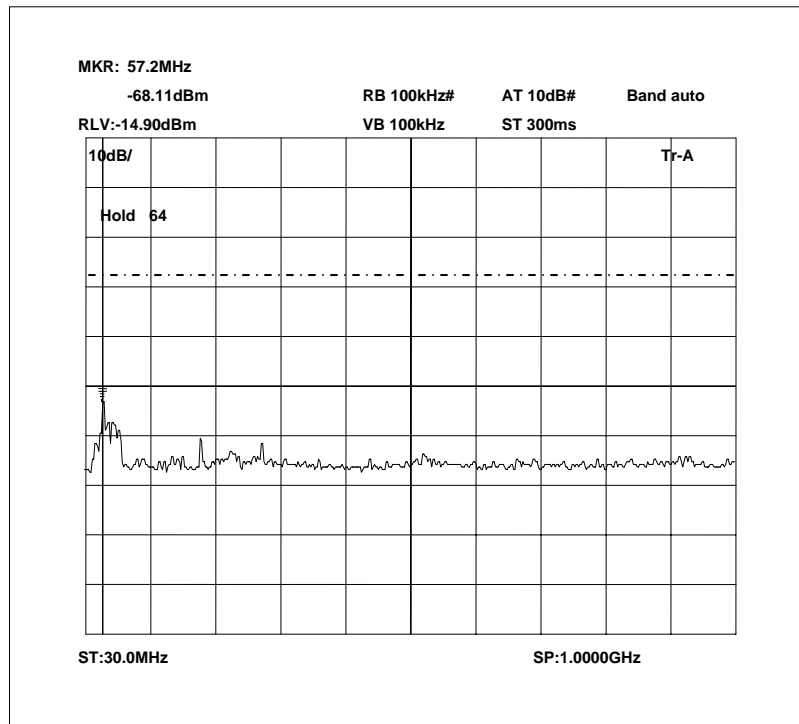


30MHz – 1000MHz

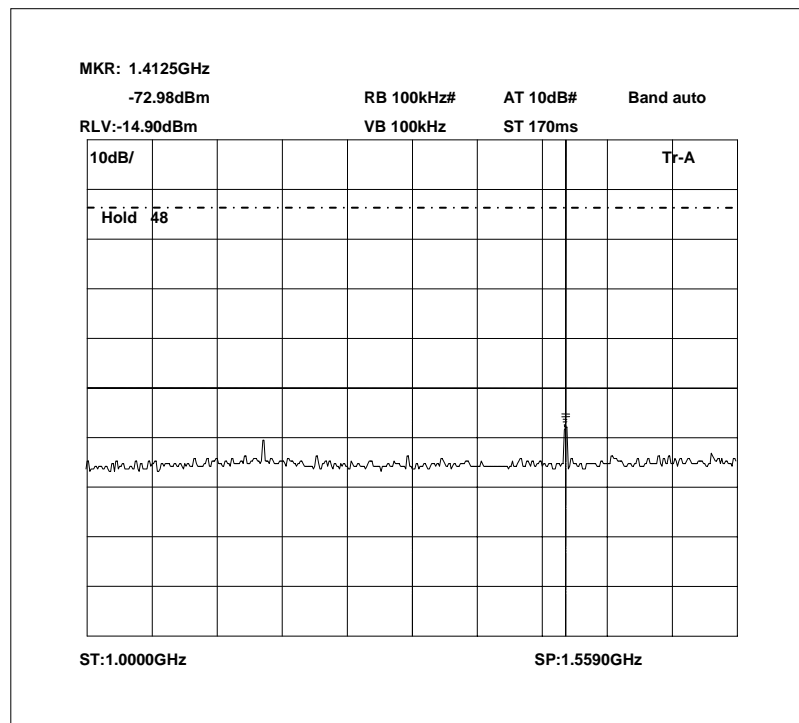


1000MHz – 1559MHz

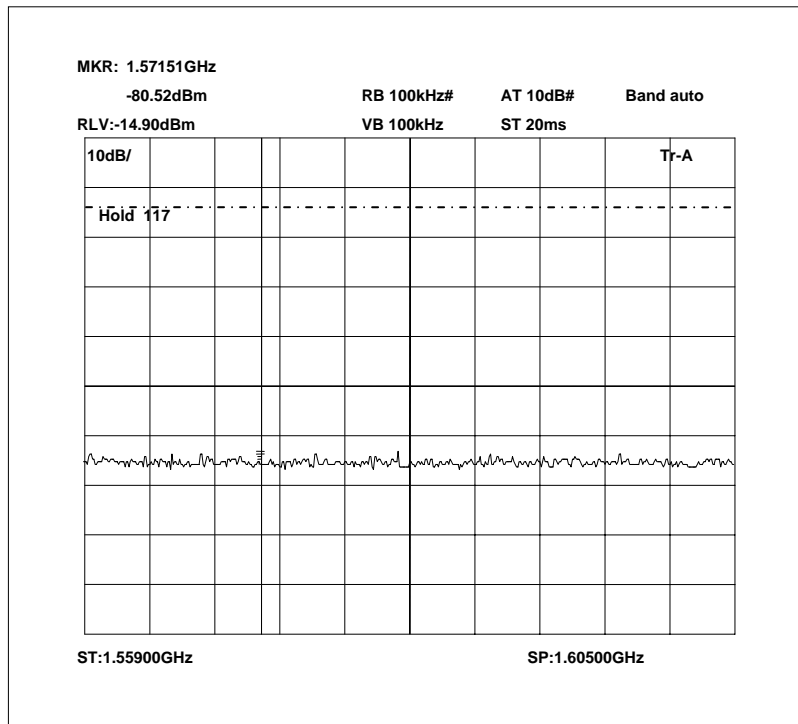


1559MHz – 1605MHz

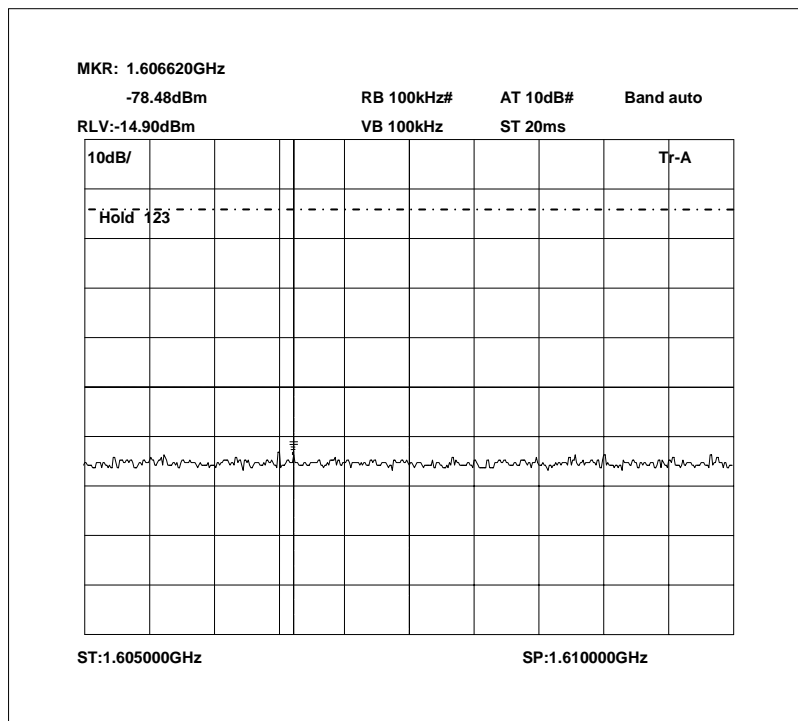


1605MHz – 1610MHz

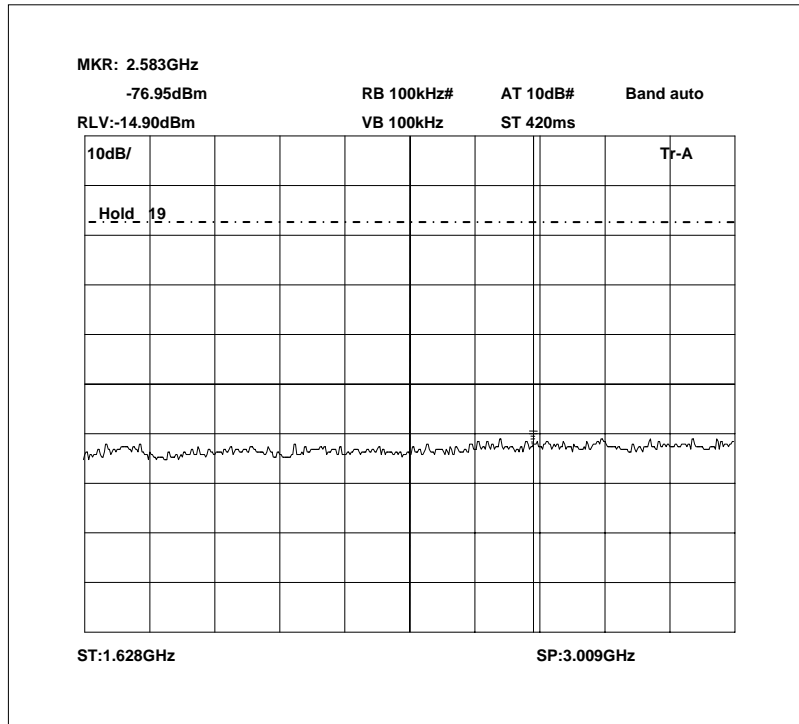


1628.5MHz – 3000MHz

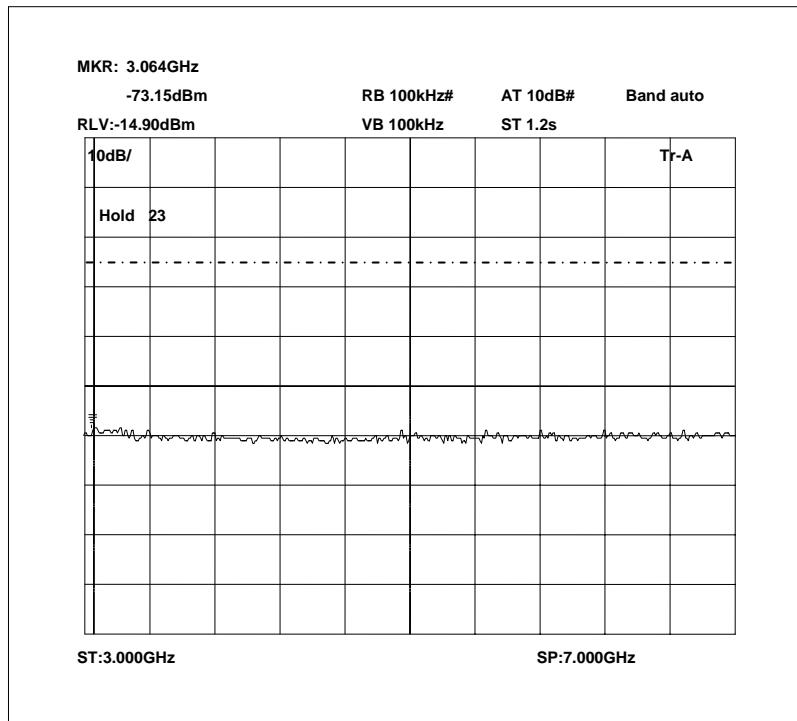


3GHz – 7GHz

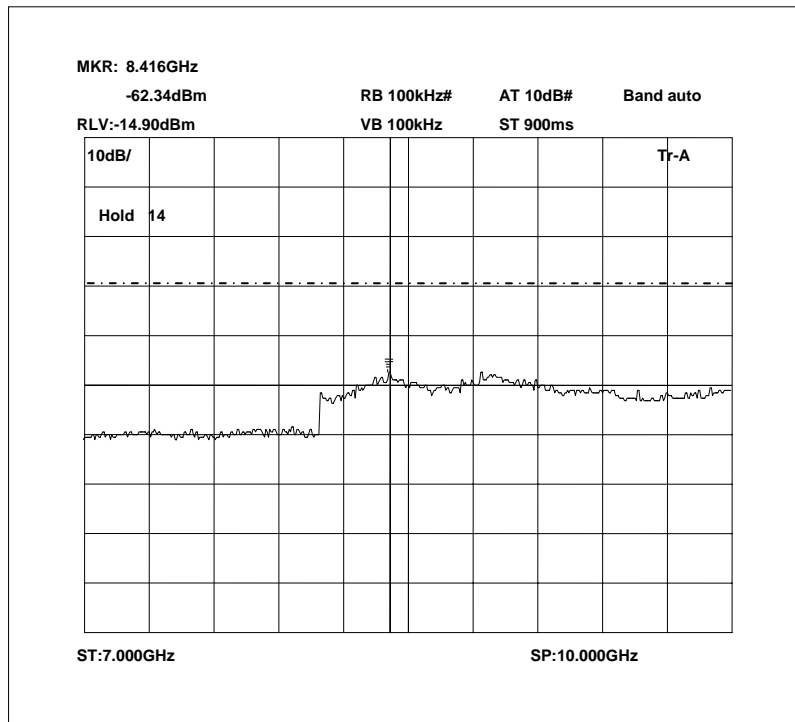

7GHz – 10GHz

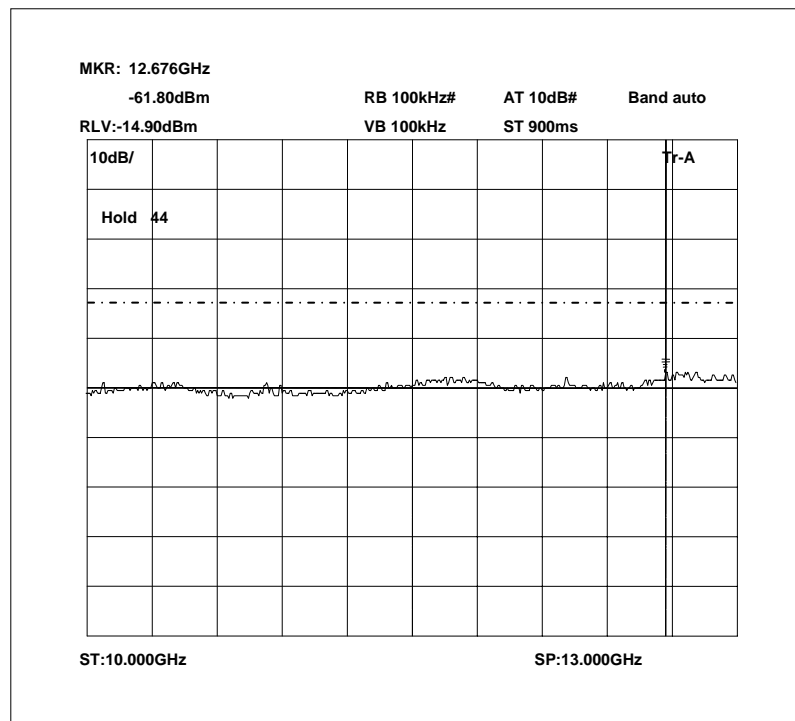

10GHz – 13GHz

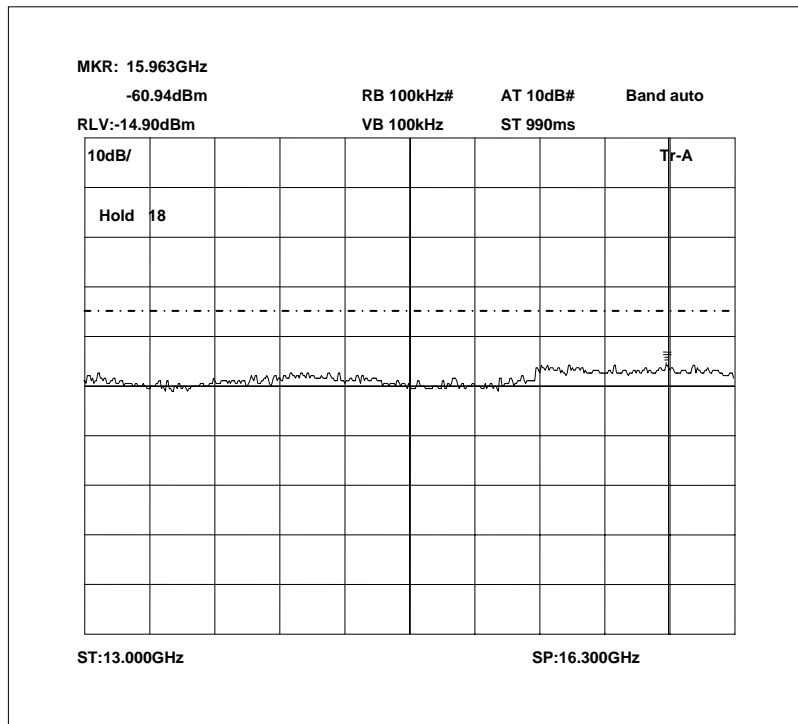


13GHz – 16.3GHz




**ANNEX I**  
**FREQUENCY STABILITY – Temperature**


Channel 1 Frequency Stability - Temperature

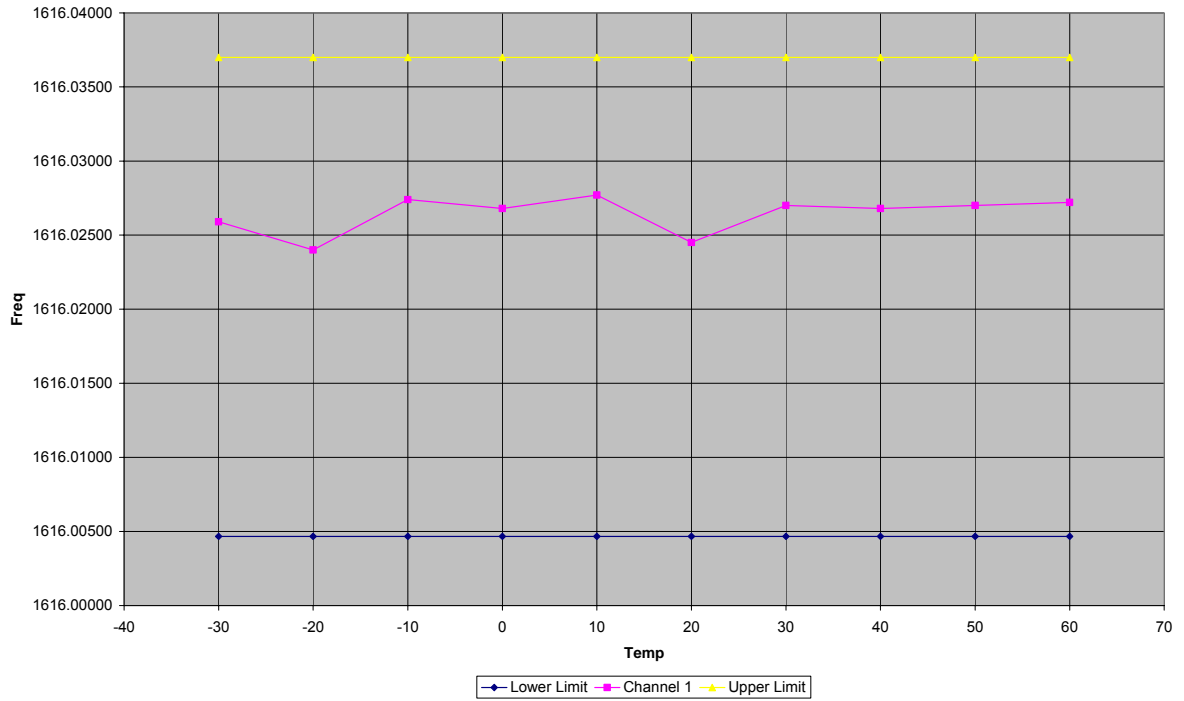


Channel 75 Frequency Stability - Temperature

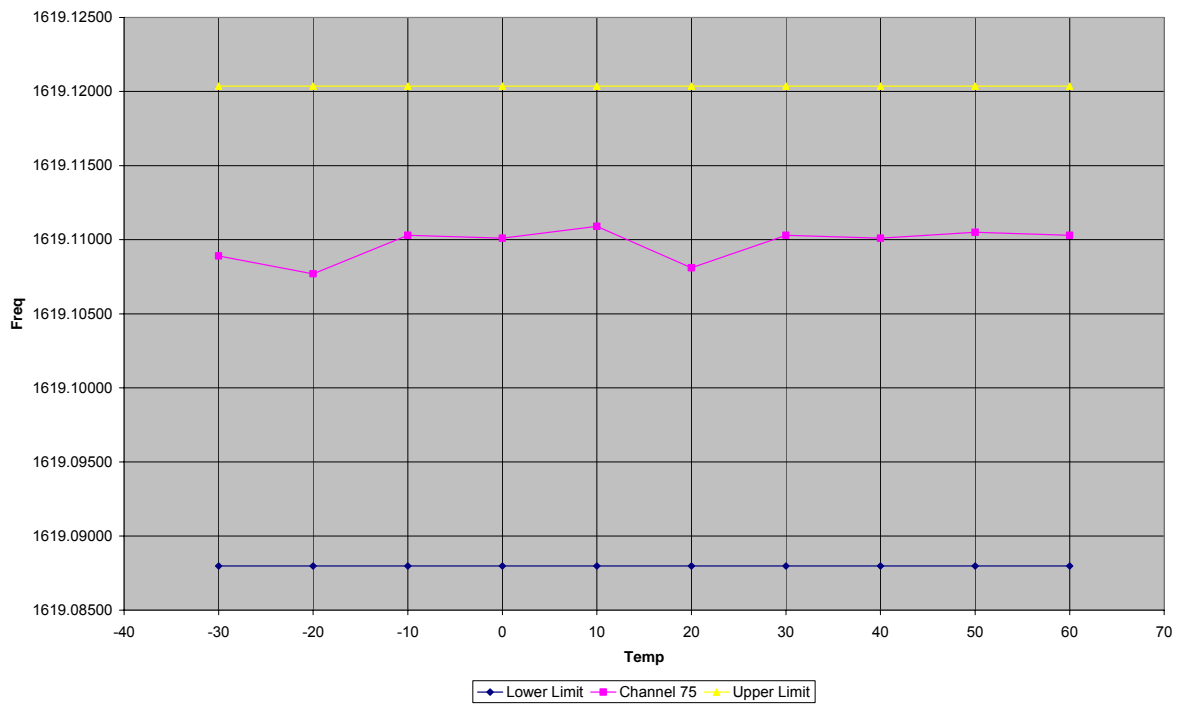

Channel 150 Frequency Stability - Temperature

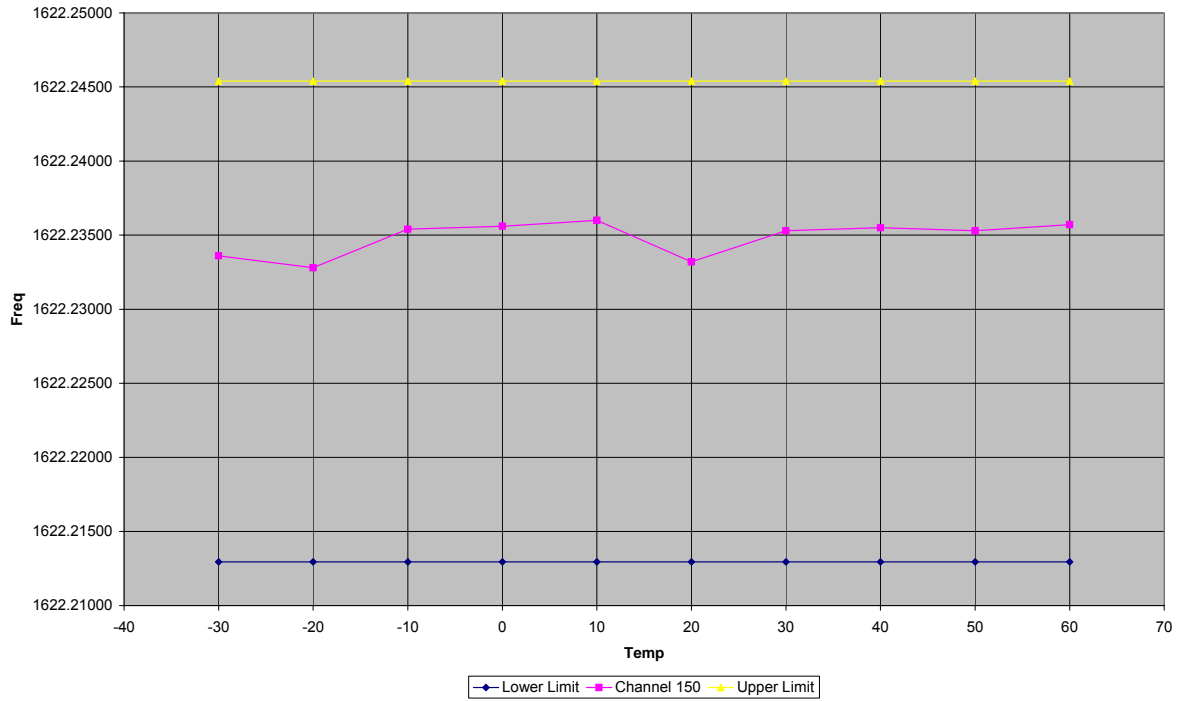


Channel 240 Frequency Stability - Temperature

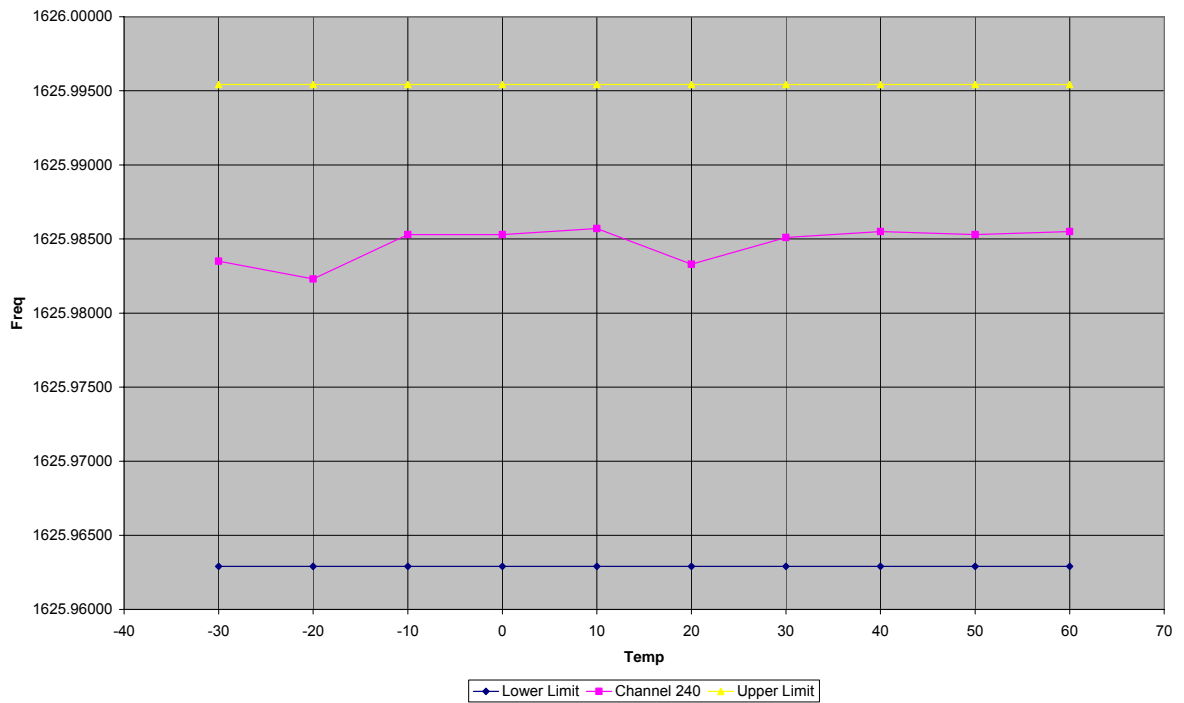


**ANNEX J**  
**FREQUENCY STABILITY – Voltage**


Channel 1 Frequency Stability - Voltage

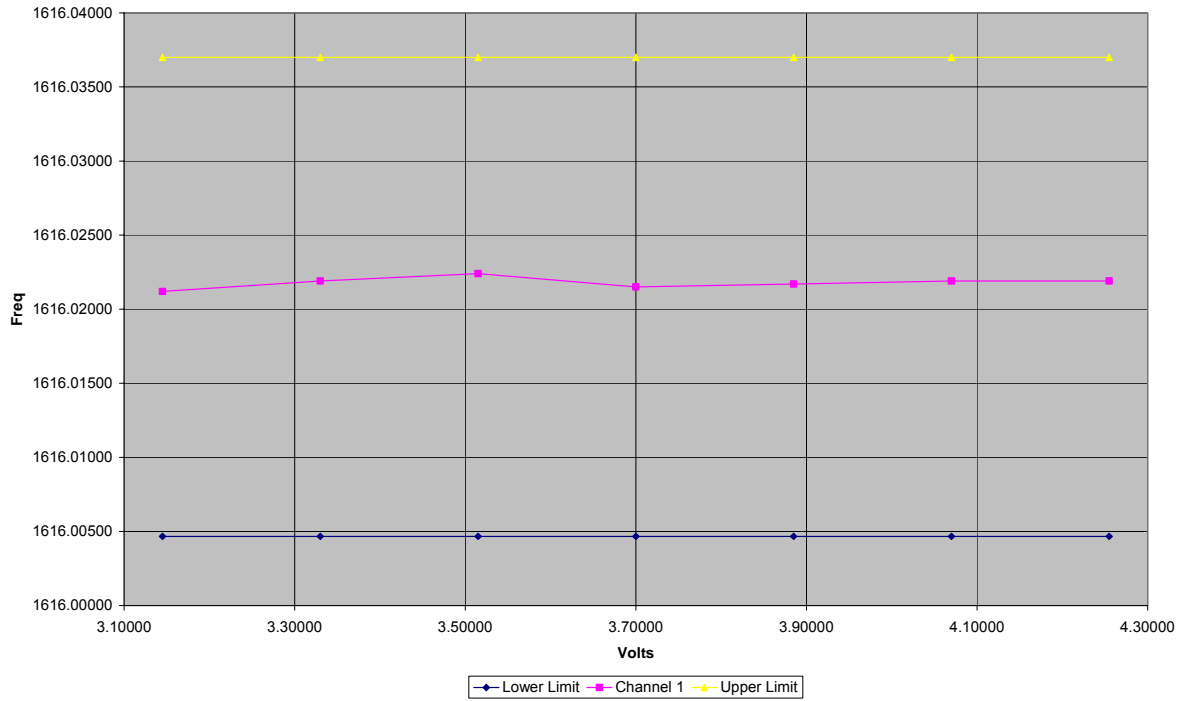


Channel 75 Frequency Stability - Voltage

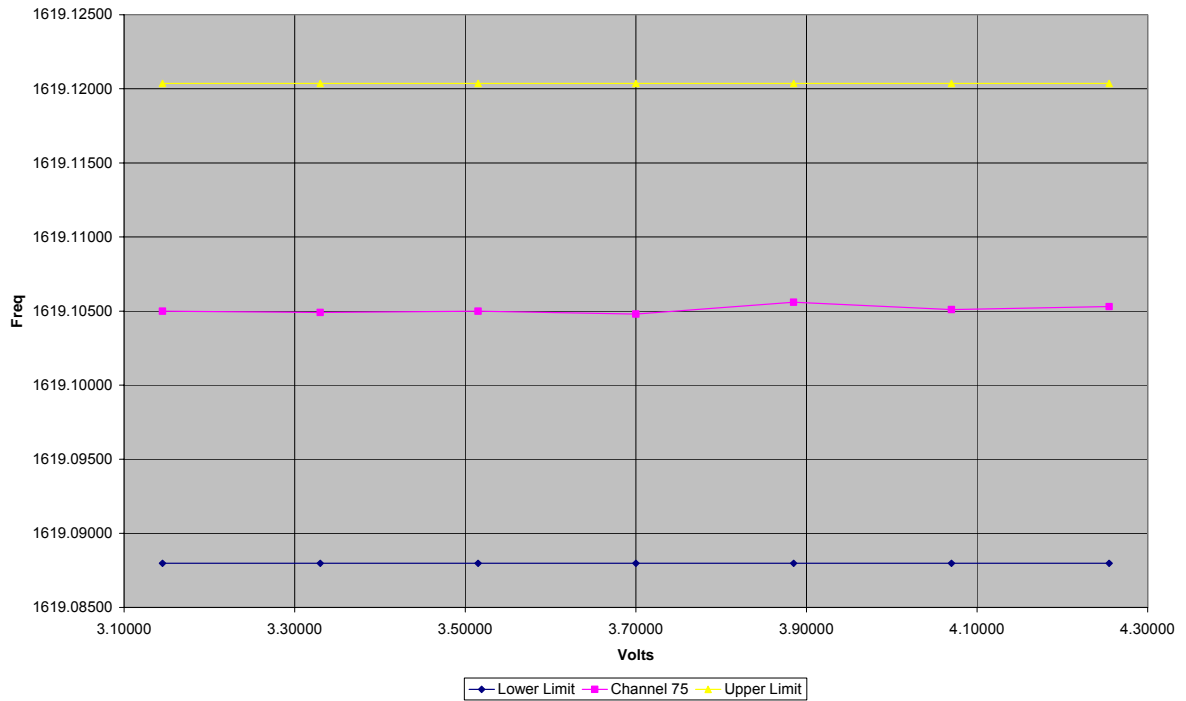

Channel 150 Frequency Stability - Voltage

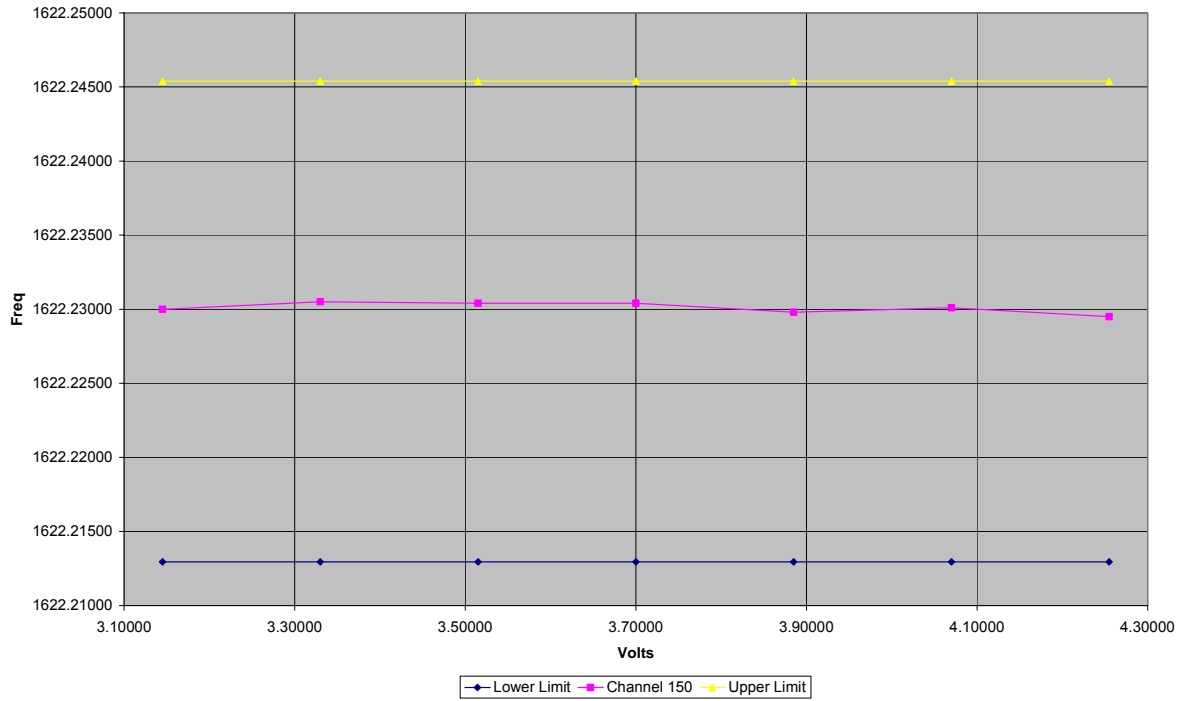

Channel 240 Frequency Stability - Voltage

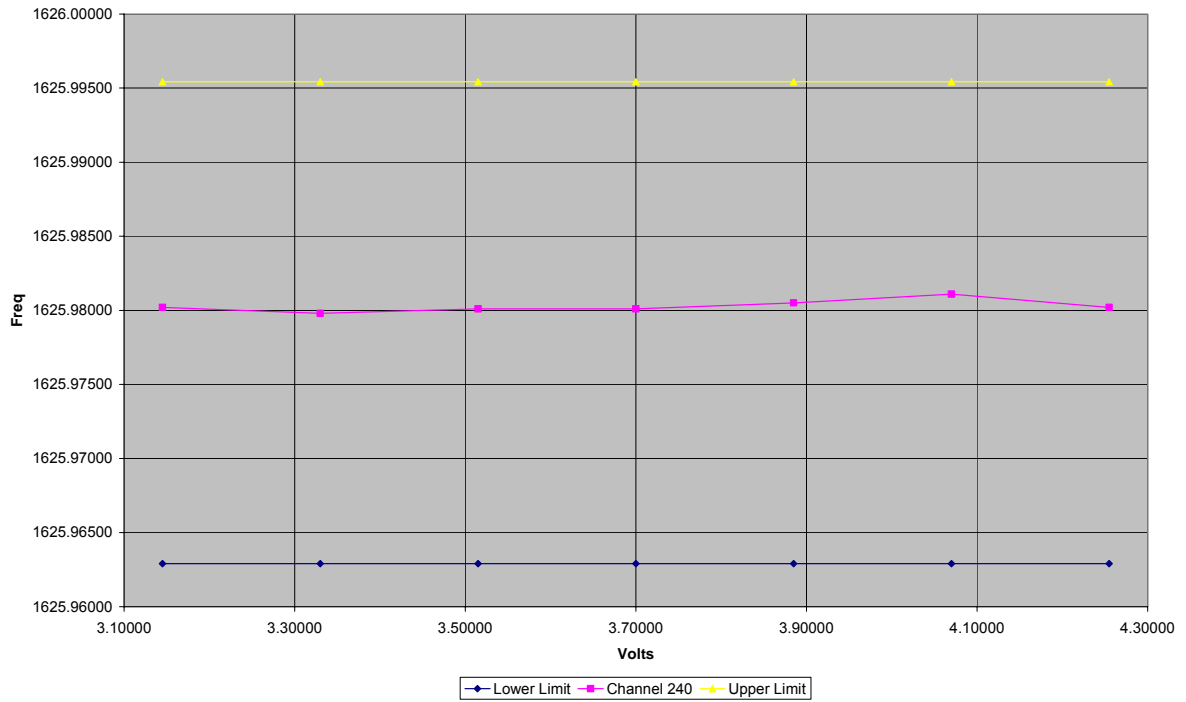

**ANNEX K**  
**EQUIPMENT CALIBRATION**

TRL Number	Equipment Type	Manufacturer	Last Cal Calibration	Calibration Period	Due For Calibration
UH006	3m Range ERP CAL	TRL	06/01/2006	12	06/01/2007
UH028	Log Periodic Ant	Schwarbeck	28/04/2005	24	28/04/2007
UH029	Bicone Antenna	Schwarbeck	27/04/2005	24	27/04/2007
UH041	Multimeter	AVOmeter	20/12/2005	12	20/12/2006
UH093	Bilog	Schaffner	19/08/2005	24	19/08/2007
UH120	Spectrum Analyser	Marconi	15/03/2005	12	15/03/2006
UH122	Oscilloscope	Tektronix	07/06/2005	24	07/06/2007
UH132	Power meter	Marconi	03/01/2006	12	03/01/2007
UH162	ERP Cable Cal	TRL	06/01/2006	12	06/01/2007
UH177	Power Supply	Manson	Use Calibrated Multimeter		
UH179	Power Sensor	Marconi	14/12/2004	12	14/12/2005
UH191	Bilog	York	16/04/2004	24	16/04/2006
UH226	Bidirectional Coupler	Narda	Calibrate in use		
UH228	Power Sensor	Marconi	03/01/2006	12	03/01/2007
UH253	1m Cable N type	TRL	05/01/2006	12	05/01/2007
UH254	1m Cable N type	TRL	05/01/2006	12	05/01/2007
UH265	Notch filer	Telonic	24/06/2005	12	24/06/2006
L005	CMTA	R&S	05/12/2005	12	05/12/2006
L007	Loop Antenna	R&S	29/03/2005	24	29/03/2007
L011	Temperature Chamber	Shartree	Use Calibrated Temperature Indicator		
L138	1-18GHz Horn	EMCO	15/04/2005	24	15/04/2007
L139	1-18GHz Horn	EMCO	03/05/2005	24	03/05/2007
L176	Signal Generator	Marconi	31/01/2005	12	31/01/2006
L193	Bicone Antenna	Chase	12/10/2003	24	12/10/2005
L203	Log Periodic Ant	Chase	21/10/2003	24	21/10/2005
L221	Attenuator	Bird	Calibrate in use		
L222	Attenuator	Bird	Calibrate in use		
L248	RF Diode	Suhner	Calibrate in use		
L280	18GHz Cable	Rosenberger	05/01/2006	12	05/01/2007
L343	CCIR Noise Filter	TRL	07/06/2005	12	07/06/2006
L426	Temperature Indicator	Fluke	04/01/2006	12	04/01/2007
L479	Analyser	Anritsu	18/11/2005	12	18/11/2006
L552	Signal Generator	Agilent	25/04/2005	12	25/04/2006
N/A	Analyser	R&S	N/A		
N/A	30dB Pad	Narda	Calibrate in use		
N/A	30dB Pad	JFW	Calibrate in use		
N/A	Mambo Box	CCL	Not applicable		
N/A	High Pass Filter	AFL	Calibrate in use		
N/A	Power Supply	Thurlby Thandar	Use Calibrated Multimeter		
N/A	50Ω Load	Suhner	Not applicable		



**ANNEX L**  
**MEASUREMENT UNCERTAINTY**

## Radio Testing – General Uncertainty Schedule

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95% confidence where no required test level exists.

### **[1] Adjacent Channel Power**

Uncertainty in test result = **1.86dB**

### **[2] Carrier Power**

Uncertainty in test result (Equipment - TRLUH120) = **2.18dB**

Uncertainty in test result (Equipment – TRL05) = **1.08dB**

Uncertainty in test result (Equipment – TRL479) = **2.48dB**

### **[3] Effective Radiated Power**

Uncertainty in test result = **4.71dB**

### **[4] Spurious Emissions**

Uncertainty in test result = **4.75dB**

### **[5] Maximum frequency error**

Uncertainty in test result (Equipment - TRLUH120) = **119ppm**

Uncertainty in test result (Equipment – TRL05) = **0.113ppm**

Uncertainty in test result (Equipment – TRL479) = **0.265ppm**

### **[6] Radiated Emissions, field strength OATS 14kHz-18GHz Electric Field**

Uncertainty in test result (14kHz – 30MHz) = **4.8dB**, Uncertainty in test result (30MHz – 1GHz) = **4.6dB**,

Uncertainty in test result (1GHz-18GHz) = **4.7dB**

### **[7] Frequency deviation**

Uncertainty in test result = **3.2%**

### **[8] Magnetic Field Emissions**

Uncertainty in test result = **2.3dB**

### **[9] Conducted Spurious**

Uncertainty in test result (Equipment TRL479) Up to 8.1GHz = **3.31dB**

Uncertainty in test result (Equipment TRL479) 8.1GHz – 15.3GHz = **4.43dB**

Uncertainty in test result (Equipment TRL479) 15.3GHz – 21GHz = **5.34dB**

Uncertainty in test result (Equipment TRLUH120) Up to 26GHz = **3.14dB**

### **[10] Channel Bandwidth**

Uncertainty in test result = **15.5%**

### **[11] Amplitude and Time Measurement – Oscilloscope**

Uncertainty in overall test level = **2.1dB**, Uncertainty in time measurement = **0.59%**, Uncertainty in Amplitude measurement = **0.82%**

### **[11] Power Line Conduction**

Uncertainty in test result = **3.4dB**