



**REPORT ON THE CERTIFICATION TESTING OF AN  
IRIDIUM SATELLITE LLC  
9602 TRANSCEIVER  
WITH RESPECT TO  
FCC RULES CFR 47, PART 25  
AND  
FCC RULES CFR 47, PART 15**

TEST REPORT NO: 0F3048WUS1  
COPY NO: 1  
ISSUE NO: 2  
FCC ID: Q639602

**REPORT ON THE CERTIFICATION TESTING OF AN  
IRIDIUM SATELLITE LLC  
9602 TRANSCEIVER  
WITH RESPECT TO  
FCC RULES CFR 47, PART 25  
AND  
FCC RULES CFR 47, PART 15**

TEST DATE: 24<sup>th</sup> February – 9<sup>th</sup> March 2010

testing regulatory and compliance



APPROVED BY: .....

J CHARTERS  
RADIO PRODUCT  
MANAGER

DATE: 22<sup>nd</sup> March 2010 .....

Distribution:

- Copy Nos:
1. Iridium Satellite LLC
  2. TCB: TRaC EMC & Safety
  3. TRaC Telecoms & Radio

THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE

The results herein relate only to the sample tested. Full results are contained in the relevant works order file.

**UP HOLLAND**

Moss View, Nipe Lane, Up Holland, West Lancashire, WN8 9PY, UK.  
T +44 (0)1695 556666 F +44 (0)1695 557077 E test@tracglobal.com  
www.tracglobal.com

## CONTENTS

	<b>PAGE</b>
CERTIFICATE OF CONFORMITY & COMPLIANCE	4
APPLICANT'S SUMMARY	5
EQUIPMENT TEST CONDITIONS	6
TESTS REQUIRED	6
PRODUCT DESCRIPTION & STANDARDS REFERENCES	7
TEST RESULTS – Transmitter	
RF Output Power - Conducted	8
Emissions Limitations - Conducted	9
Spurious Emissions - Conducted	10
Spurious Emissions - Radiated	11
Frequency Stability -Temperature	12
Frequency Stability -Voltage	13
TEST RESULTS – Unintentional Radiator	
Spurious Emissions - Radiated	14
Conducted Emissions –AC Powerline Conduction	15
	<b>ANNEX</b>
PHOTOGRAPHS	A
APPLICANT'S SUBMISSION OF DOCUMENTATION LIST	B
TEST EQUIPMENT LIST	C
EQUIPMENT CALIBRATION	D
MEASUREMENT UNCERTAINTY	E
DUTY CYCLE	F
EMISSIONS LIMITATIONS	G
TRANSMITTER SPURIOUS EMISSIONS – Conducted	H
TRANSMITTER SPURIOUS EMISSIONS – Radiated	I
FREQUENCY STABILITY – Temperature	J
FREQUENCY STABILITY – Voltage	K
UNINTENTIONAL RADIATED EMISSIONS	L
CONDUCTED EMISSIONS – AC POWERLINE CONDUCTION	M
<b>Notes:</b>	
1. Component failure during test	YES [ ] NO [X]
2. If Yes, details of failure:	
3. The facilities used for the testing of the product contain in this report are FCC Listed.	

**CERTIFICATE OF CONFORMITY & COMPLIANCE**

FCC IDENTITY: Q639602  
PURPOSE OF TEST: Certification  
TEST SPECIFICATION: FCC Rules CFR 47, Part 25 & Part 15  
TEST RESULT: Compliant to Specification  
ITU EMISSIONS DESIGNATOR 41K7Q7W  
EQUIPMENT UNDER TEST: 9602 Transceiver  
EQUIPMENT TYPE: Satellite Communications Module  
PEAK OUTPUT POWER: 1.51dBW, 1.41W  
MEAN OUTPUT POWER: -8.81dBw, 0.13mW  
CHANNEL SPACING: 41.667 kHz  
NUMBER OF CHANNELS: 252 (240 Transmit Channels)  
MODULATION TYPE: Q7W  
POWER SOURCE(s): +5Vdc  
TEST DATE(s): 24<sup>th</sup> February – 9<sup>th</sup> March 2010  
APPLICANT: Iridium Satellite LLC  
ADDRESS: 6707 Democracy Blvd.  
Suite 300  
Bethesda  
United States of America  
MD 20817  
TESTED BY: D WINSTANLEY

APPROVED BY:



J CHARTERS  
RADIO  
PRODUCT  
MANAGER

## APPLICANT'S SUMMARY

EQUIPMENT UNDER TEST (EUT): 9602 Transceiver

EQUIPMENT TYPE: Satellite Communications Module

PURPOSE OF TEST: Certification

TEST SPECIFICATION(s): FCC Rules CFR 47, Part 25 & Part 15

TEST RESULT: COMPLIANT Yes   
No

APPLICANT'S CATEGORY: MANUFACTURER   
IMPORTER   
DISTRIBUTOR   
TEST HOUSE   
AGENT

APPLICANT'S CONTACT PERSON(s): Donna Bethea-Murphy  
E-mail address: donna.bethea-murphyl@iridium.com

APPLICANT: Iridium Satellite LLC

ADDRESS: 6707 Democracy Blvd.  
Suite 300  
Bethesda  
United States of America  
MD 20817

TEL: +1 301 571 6277

FAX: +1 301 571 6250

MANUFACTURER: Iridium Satellite LLC

DEVELOPMENT AGENT: Cambridge Consultants Limited

DEVELOPMENT AGENTS CONTACT PERSON(s): Ms M Campbell  
E-mail address: marion.campbell@cambridgeconsultants.com

ADDRESS: Science Park  
Milton Road  
Cambridge  
CB4 4DW  
United Kingdom

TEL: +44 (0)1223 420024

FAX: +44 (0)1223 423373

EUT(s) COUNTRY OF ORIGIN: United States

TEST LABORATORY: TRaC Telecoms & Radio, Up Holland

UKAS ACCREDITATION No: 0971

TEST DATE(s): 24<sup>th</sup> February – 9<sup>th</sup> March 2010

TEST REPORT No: 0F3048WUS1

### EQUIPMENT TEST / EXAMINATIONS REQUIRED

1.	TEST/EXAMINATION	FCC Part 2	FCC Part 25	APPLICABILITY	RESULT
	RF Power Output	-	25.204 (a)	YES	PASS
	Emissions Limitations	-	25.202 (f)	YES	PASS
	Spurious Emissions at Antenna Terminals	2.1051	25.202 (f) 25.213	YES	PASS
	Protection of the Radio Navigation Satellite Service	-	25.216(c) 25.216(f)	YES	PASS
	Spurious Emissions Radiated	2.1053	25.202 (f) 25.213	YES	PASS
	Frequency Stability Temperature	2.1055	25.202 (d)	YES	PASS
	Frequency Stability Voltage	2.1055	25.202 (d)	YES	PASS

Note: The 9602 Transceiver is subject to FCC Part 25 & Part 2 for FCC Certification for units marketed within the United States. The above tests, as specified in FCC Part 2, with limits as defined in FCC Part 25 were performed on the 9602 Transceiver.

2. Product Use: Satellite Telephone and Data Communications

3. Emission Designator: 41k7Q7W

4. Temperatures: Ambient  
(Tnom) 20°C

5. Supply Voltages: Vnom +5Vdc

Note: Vnom voltages are as stated above unless otherwise shown on the test report page

6. Equipment Category: Single channel   
Two channel   
Multi-channel

7. Channel spacing: Narrowband   
Wideband  41.667 kHz

8. Test Location: TRaC Telecoms & Radio  
Up Holland   
Hull

9. Modifications made during test program No modifications were performed.

## Product Description

The satellite communications module consists of an L-Band Transceiver (LBT) capable of simultaneous transmit and receive (duplex) operation covering the frequency range of 1616MHz to 1626.5MHz. The frequency accesses used for duplex channels are organised into sub-bands each of which contains eight frequency accesses. Each sub-band, therefore occupies 333.33 kHz (i.e.  $8 \times 41.667\text{kHz}$ ). Up to 30 sub-bands containing 240 frequency accesses may be used for duplex channels.

## Standard References

- |                               |   |
|-------------------------------|---|
| 47 CFR 2<br>10-1-03 Edition   | Code of Federal Regulations, Title 47, Part 2, "Frequency allocations and Radio Telemetry Matters;<br>General Rules and Regulations"  |
| 47 CFR 25<br>10-1-03 Edition  | Code of Federal Regulations, Title 47, Part 25, "Satellite Communications" Subpart C, "Technical Matters"   |
| 47 CFR 15<br>20-09-07 Edition | Code of Federal Regulations, Title 47, Part 15, "Radio Frequency Devices" Subpart B, "Unintentional Radiators"  |
| C63.4-2003                    | American National Standards Institute (ANSI), "Methods of Measurement of Radio Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range 9 kHz to 40 GHz" |


**COMPLIANCE TESTS**

**TRANSMITTER TESTS**

**RF OUTPUT POWER – CONDUCTED – PART 25.204 (a)**

Ambient temperature = 16°C  
 Relative humidity = 51%  
 Supply voltage = +5Vdc  
 Channel number = See test results

Radio Laboratory

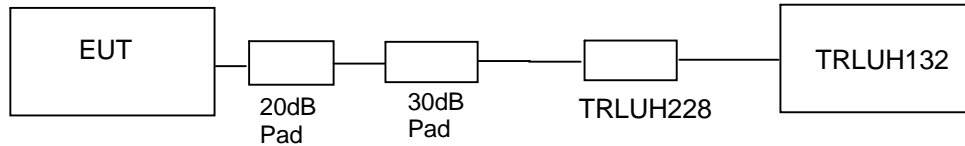

See Annex C for full list of test equipment

The test setup was as per the above diagram. The unit was tested on four channels. The unit was put into test mode and set to operate at maximum power and with a random modulating signal using test commands sent from a PC via the TIC PCB. The antenna gain, included in the table below, represents the highest gain of any antennas that are used with this system.

Frequency MHz	Attenuator and cable loss dB	Level at Power Meter dBm	Antenna Gain dB	Mean Carrier Power dBm	Duty Cycle Factor dB	Peak Carrier power dBm	Carrier power dBW	Limit dBW
Channel 1	50.6	-32.54	3	21.06	10.32	31.38	1.38	40
Channel 75	50.6	-32.52	3	21.08	10.32	31.40	1.40	40
Channel 150	50.6	-32.45	3	21.15	10.32	31.47	1.47	40
Channel 240	50.6	-32.41	3	21.19	10.32	31.51	1.51	40

- Notes:
1. Duty Cycle Factor =  $10 \times \log(1/X)$  Where  $X = (T_{on} / T_{frame})$ . See Annex E for duty cycle plots
  2. Correction Factor for dBm to dBW = -30dB
  3. Antenna gain of 3dBi is the worst case gain over an isotropic antenna




**TRANSMITTER TESTS**

**EMISSIONS LIMITATIONS – CONDUCTED – PART 25.202 (f)**

Ambient temperature = 16°C  
 Relative humidity = 51%  
 Supply voltage = +5Vdc

Radio Laboratory

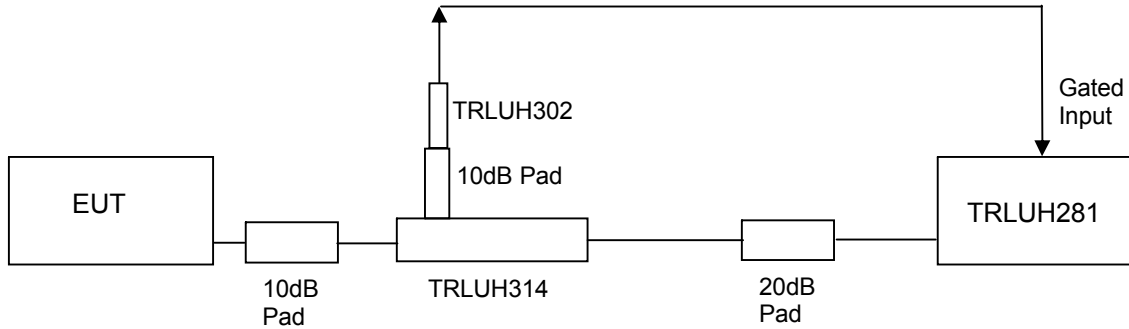

See Annex C for full list of test equipment

The test setup was as per the above diagram. The unit was tested on four channels. The unit was put into test mode and set to operate at maximum power and with a random modulating signal using test commands sent from a PC via the TIC PCB.

To enable an average measurement to be taken the gated input trigger of the spectrum analyser was used.

The Spurious limit is as follows:

On any frequency removed from the assigned frequency by the following percentage of the authorised bandwidth

±50%	-	100%	-25 dBc
±100%	-	250 %	-35 dBc
> ±250%			At least 43 + 10 log PdB

$$(10\log P_{\text{watts}}) - (43 + 10\log (P_{\text{watts}} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$$

Where the Authorised Bandwidth = 41.667 kHz

**Note**

1. The 3 kHz to 4 kHz bandwidth correction, cable and attenuator losses and antenna gain have been taken into account in the Ref level offset figure.

The 9602 Transceiver was found to comply with the limits


See plots in Annex G.

## TRANSMITTER TESTS

### SPURIOUS EMISSIONS – CONDUCTED – PART 25.202 (f) & 25.216

Ambient temperature = 14°C  
 Relative humidity = 46%  
 Supply voltage = +5Vdc

Radio Laboratory

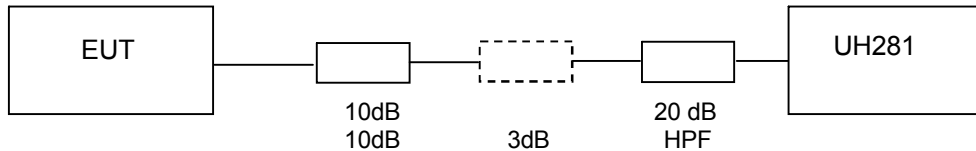

For measurements between 1559 MHz and the band edge of 1610MHz the same test setup as per emissions limitations test was used. For measurements below 1559 MHz and above the band edge of 1628.5MHz the above test setup was used. 10 dB and 20 dB attenuators was used for measurements below 3GHz and 10dB and 3dB attenuators and high pass filter for measurements above 3GHz.

See Annex C for full list of test equipment

The test setup was as per the above diagram. The unit was tested on two channels .The unit was put into test mode and set to operate at maximum power and with a random modulating signal using test commands sent from a PC via the TIC PCB.

The Spurious limit was calculated as follows:

On any frequency removed from the assigned frequency by more that 250% of the authorised bandwidth

At least  $43 + 10 \log (P) \text{dB}$

$(10 \log P_{\text{watts}}) - (43 + 10 \log (P_{\text{watts}} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$

## RESULTS

Frequency Range (MHz)	Ch N°	Freq. of Emission	Spectrum Analyser Level (dBm)	Attenuator & Cable Losses (dB)	Spurious Emission Level (dBm)	Limit dBm
30MHz – 1559MHz	No Significant emissions within 20 dB of the Limit					-13
1559MHz – 1605MHz	1	1600.666	-82.97	31.25	-51.54 (Note 7)	-40 (note 6)
1605MHz – 1610MHz	1 240	1605.000 1605.000	-85.27 -85.88	31.28 31.28	-53.99 -54.60	-40 (Note 4)
1628.5MHz – 16.3 GHz	1	3231.847	-52.83	15.41	-37.42	-13
	240	3252.196	-52.10	15.42	-36.68	-13
	1	4847.995	-59.54	16.98	-42.56	-13
	240	4878.062	-60.98	17.61	-43.37	-13
	1	6464.432	-59.99	18.39	-41.60	-13
	240	6503.190	-59.59	17.16	-42.43	-13

Notes :


1. Emissions Checked up to 10 times  $F_c$
2. Reference level offset of Scan plots in Annex H already have approximate attenuator losses taken into account
3. Average measurement in a carrier on state were taken in the bands 1599MHz to 1605MHz and 1605MHz -1610MHz. All other scans were peak hold for worst case.
4. -40 to -10 Linearly interpolated in dBm Vs frequency offset.
5. Correction Factor for dBm to dBW = -30dB.
6. This limit reduces to -50 dBm for discrete emissions of less than 700Hz bandwidth.
7. Spurious level meets the -50 dBm requirement.

The 9602 Transceiver was found to comply with the limits. See Annex H for plots

## TRANSMITTER TESTS

### SPURIOUS EMISSIONS – RADIATED – PART 25.202 (f) & 25.216

Ambient temperature	=	17°C
Relative humidity	=	38%
Conditions	=	OATS
Supply voltage	=	+5Vdc
Supply Frequency	=	N/A

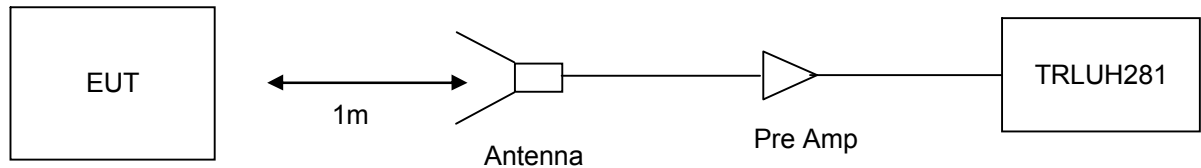

See Annex C for full list of test equipment

The test setup was as per the above diagram. The unit was tested on two channels. The unit was put into test mode and set to operate at maximum power and with a tone modulating signal using test commands sent from a PC via the TIC PCB. The unit was mounted on a turntable and rotated through 360° to find the worst case emission.

The Spurious limit was calculated as follows:

On any frequency removed from the assigned frequency by more than 250% of the authorised bandwidth

At least 43 + 10 log PdB

$$(10\log P_{\text{watts}}) - (43 + 10\log (P_{\text{watts}} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$$

## RESULTS

FREQUENCY RANGE	CHANNEL NUMBER	FREQ. (MHz)	ERP/EIRP (dBm)	LIMIT (dBm)
100kHz – 1559MHz	No Significant Emissions within 20 dBs of the Limit			-13
1559MHz – 1605MHz	No Significant Emissions within 20 dBs of the Limit			-40 Note 6
1605MHz – 1610MHz	No Significant Emissions within 20 dBs of the Limit			-40 to 10 Note 4
1628.5MHz – 16.3 GHz	3231.891	1	-36.9	-13
	3251.827	240	-36.6	-13
	4847.948	1	-38.2	-13
	4878.030	240	-39.1	-13
	6464.070	1	-31.7	-13
	6503.944	240	-32.5	-13

Notes :

1. Emissions Checked up to 10 times Fc.
2. Scan plots of channels 1 & 240 with receive antenna in vertical polarization in annex H.
3. The unit was mounted on a turntable and rotated through 360° and in 3 orthogonal planes to find the worst case emission.
4. -40 to -10 Linearly interpolated in dBm Vs frequency offset.
5. Correction Factor for dBm to dBW = -30dB.
6. This limit reduces to -50 dBm for discrete emissions of less than 700Hz bandwidth.


The 9602 Transceiver was found to comply with the limits. See annex I for plots

**TRANSMITTER TESTS**

**FREQUENCY STABILITY – CONDUCTED – TEMPERATURE – PART 25.202 (d)**

Ambient temperature = 20°C  
 Relative humidity = 54%  
 Supply voltage = +5Vdc

Radio Laboratory

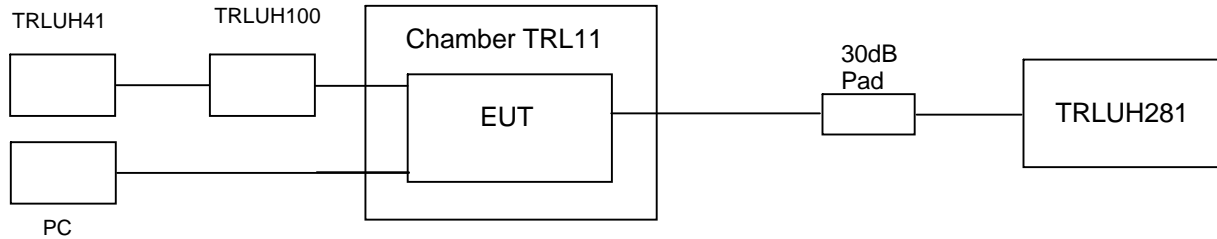

See Annex C for full list of test equipment

The test setup was as per the above diagram. The unit was tested on four channels .The unit was put into test mode and set to operate at maximum power and with a tone modulating signal using test commands sent from a PC via the TIC PCB. The Analyser was set to max hold.

**RESULTS**

TEMP °C	Frequency (MHz)			
	Channel 1	Channel 75	Channel 150	Channel 240
+60	1616.02351	1619.10688	1622.23184	1625.98192
+50	1616.02284	1619.10616	1622.23116	1625.98124
+40	1616.02265	1619.10599	1622.23052	1625.98092
+30	1616.02291	1619.10628	1622.23137	1625.98132
+20	1616.02369	1619.10739	1622.23243	1625.98205
+10	1616.02119	1619.10748	1622.22994	1625.98009
0	1616.02277	1619.10609	1622.23114	1625.98112
-10	1616.02268	1619.10590	1622.23076	1625.98079
-20	1616.02264	1619.10605	1622.23107	1625.98090
-30	1616.02221	1619.10561	1622.23060	1625.98068

Notes: 1.Limit ± 10ppm (See Annex J for frequency stability plots verses limit)


The 9602 Transceiver was found to comply with the limits

**TRANSMITTER TESTS**

**FREQUENCY STABILITY – CONDUCTED – VOLTAGE – PART 25.202 (d)**

Ambient temperature = 20°C  
 Relative humidity = 62%  
 Supply voltage = +5Vdc

Radio Laboratory

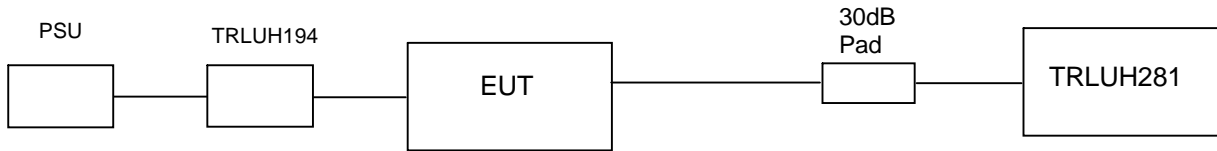

See Annex C for full list of test equipment

The test setup was as per the above diagram. The unit was tested on four channels .The unit was put into test mode and set to operate at maximum power and with a tone modulating signal using test commands sent from a PC via the MAMBO Box. The Analyser was set to max hold.

**RESULTS**

VOLTAGE	Frequency (MHz)			
	Channel 1	Channel 75	Channel 150	Channel 240
85	1616.02371	1619.10742	1622.23239	1625.98199
90	1616.02377	1619.10735	1622.23240	1625.98206
95	1616.02382	1619.10736	1622.23239	1625.98207
100	1616.02369	1619.10739	1622.23243	1625.98205
105	1616.02387	1619.10737	1622.23223	1625.98208
110	1616.02395	1619.10738	1622.23219	1625.98213
115	1616.02395	1619.10743	1622.23223	1625.98208

Notes: 1.Limit ± 10ppm (See Annex K for plots verses limit)

The 9602 Transceiver was found to comply with the limits

**UNINTENTIONAL TRANSMITTER TESTS**

**UNINTENTIONAL TRANSMITTER SPURIOUS EMISSIONS – RADIATED – PART 15.109**

Ambient temperature = 22°C(<1GHz) 3m measurements <1GHz [X]  
 Relative humidity = 65% (<1GHz), 3m measurements >1GHz [X]  
 Conditions = Open Area Test Site (OATS) 3m extrapolated from 1m [ ]  
 Supply voltage = +5Vdc

	FREQ. (MHz)	MEAS Rx (dBµV)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dBµV/m)	EXTRAP FACT (dB)	FIELD ST'GH (µV/m)	LIMIT (µV/m)
0.009MHz - 0.49MHz	<b>No Significant Emissions Within 20 dB of the limit.</b>								
0.49MHz - 1.705MHz									
1.705MHz - 30MHz									
30MHz - 88MHz									
88MHz - 216MHz									
216MHz - 960MHz									
960MHz - 1GHz									
1GHz - 16.3GHz	1399.118 1409.083	63.65 65.22	26.21 26.21	1.6 1.6	37.0 37.0	54.46 56.03	9.54 9.54	176.20 211.10	500 500
Limits	0.009 MHz to 0.49 MHz			2400/f(kHz) µV/m @ 300m					
	0.49 MHz to 1.705 MHz			24000/f(kHz) µV/m @ 30m					
	1.705MHz to 30MHz			30µV/m @ 30m					
	30MHz to 88MHz			100µV/m @ 3m					
	88MHz to 216MHz			150µV/m @ 3m					
	216MHz to 960MHz			200µV/m @ 3m					
	960MHz to 1GHz			500µV/m @ 3m					
	1GHz to 16.3GHz			500µV/m @ 3m					

- Notes:**
- 1 Emissions were searched to: (x) 1000MHz inclusive, as per Part 15.33a
  - 2 Extrapolation of 9.54 dB as per Part 15.
  - 3 Receiver detector <1GHz = CISPR, Quasi-Peak, 120kHz bandwidth
  - 4 Receiver detector >1GHz = Average, 1MHz resolution bandwidth
  - 5 Only emissions within 20 dB of the limit are recorded.
  - 6 See annex L for emissions plots

- Test Method:**
- 1 As per Radio – Noise Emissions, ANSI C63.4: 2003
  - 2 Measuring distances as Notes 1 to 4 above
  - 3 EUT 0.8 metre above ground plane
  - 4 Emissions maximised by rotation of EUT, on an automatic turntable.  
 Raising and lowering the receiver antenna between 1m & 4m.  
 Horizontal and vertical polarisations, of the receive antenna.  
 EUT orientation in three orthogonal planes.  
 Maximum results recorded.

**RECEIVER TESTS****CONDUCTED EMISSIONS – AC POWER LINE Part 15.107****SIGNIFICANT EMISSIONS**

FREQUENCY (MHz)	MEASUREMENT RECEIVER READING (dBµV)	DETECTOR	CONDUCTOR (L or N)	LIMIT (dBµV)
No Significant Emissions Within 20 dB of the Limit				

- Notes:**
- 1 See attached plots annex M
  - 2 EUT in normal operation mode.
  - 3 Worst case result recorded.

**Test Method:** 1 As per Radio – Noise Emissions, ANSI C63.4: 2003

The test equipment used for the Transmitter Conducted Emissions – AC Power Line Part 15.207 test was:


TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
RECEIVER	ROHDE & SCHWARZ	ESHS 10	830051/001	UH03	
LISN/AMN	ROHDE & SCHWARZ	ESH3-Z5	863906/018	UH05	
RECEIVER	ROHDE & SCHWARZ	ESHS 10	841429/012	UH187	
LISN/AMN	ROHDE & SCHWARZ	ESH3-Z5	8407 31/015	UH195	

**ANNEX A**  
**PHOTOGRAPHS**




PHOTOGRAPH 1.

**RADIATED TEST SETUP**

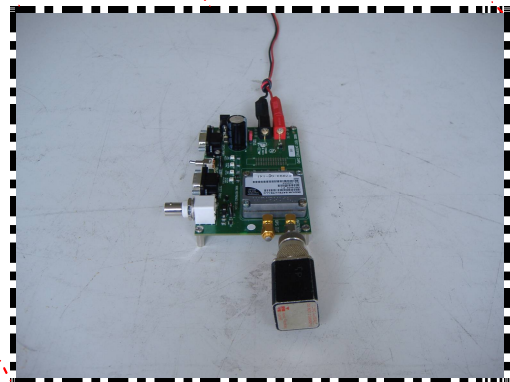

PHOTOGRAPH 2.

CONDUCTED TEST SETUP

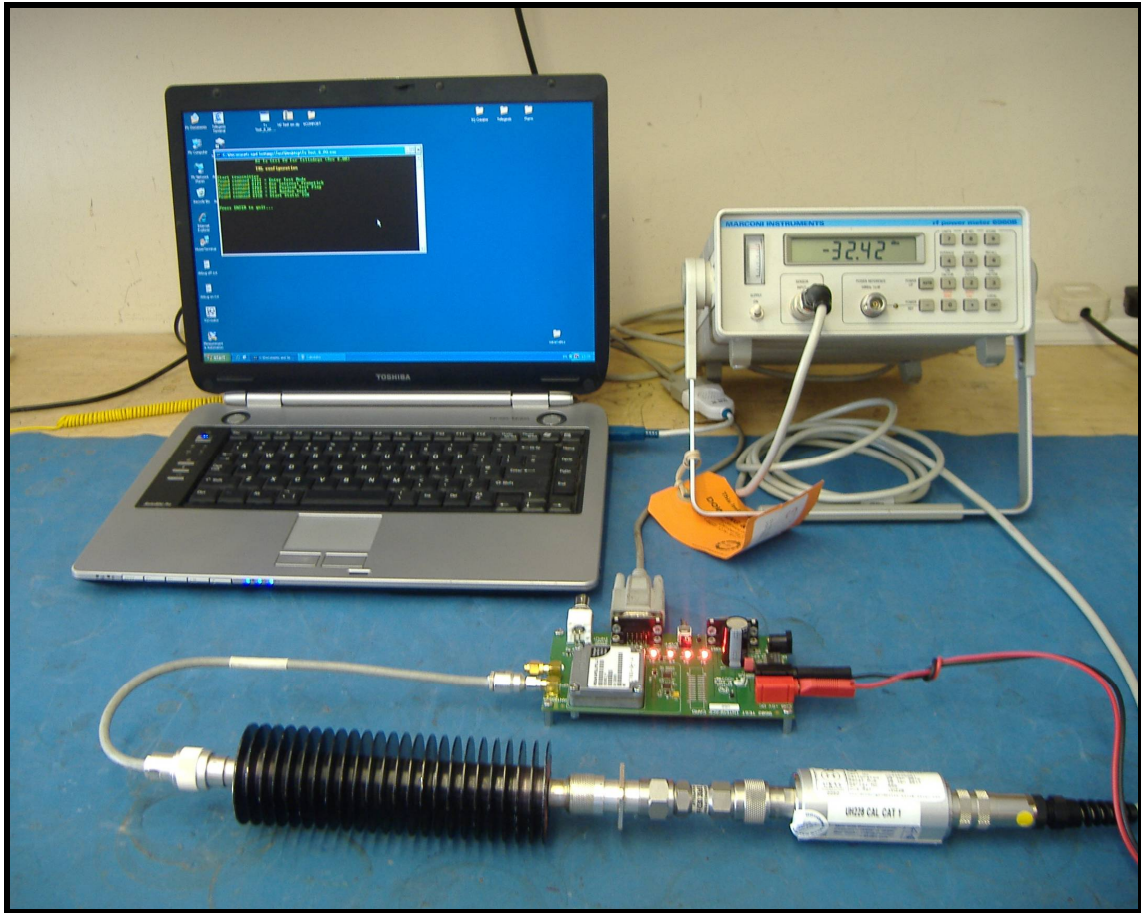

PHOTOGRAPH 3.

TOP OVERVIEW



PHOTOGRAPH 4.

**CONNECTOR OVERVIEW**



**ANNEX B**  
**APPLICANT'S SUBMISSION OF DOCUMENTATION LIST**

## APPLICANT'S SUBMISSION OF DOCUMENTATION LIST

a.	TCB	-	APPLICATION	<input checked="" type="checkbox"/>
		-	FEE	<input checked="" type="checkbox"/>
b.	AGENT'S LETTER OF AUTHORISATION	-		<input checked="" type="checkbox"/>
c.	MODEL(s) vs IDENTITY	-		<input type="checkbox"/>
d.	ALTERNATIVE TRADE NAME DECLARATION(s)	-		<input type="checkbox"/>
e.	LABELLING	-	PHOTOGRAPHS	<input type="checkbox"/>
		-	DECLARATION	<input type="checkbox"/>
		-	DRAWINGS	<input type="checkbox"/>
f.	TECHNICAL DESCRIPTION	-		<input checked="" type="checkbox"/>
g.	BLOCK DIAGRAMS	-	Tx	<input checked="" type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
h.	CIRCUIT DIAGRAMS	-	Tx	<input type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
i.	COMPONENT LOCATION	-	Tx	<input type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
j.	PCB TRACK LAYOUT	-	Tx	<input type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
k.	BILL OF MATERIALS	-	Tx	<input type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
l.	USER INSTALLATION / OPERATING INSTRUCTIONS	-		<input checked="" type="checkbox"/>

**ANNEX C**  
**TEST EQUIPMENT LIST**

TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRL No
ENVIRONMENTAL CHAMBER	SHARTREE	TCC 125-815P	CS 203	11
20dB ATTENUATOR	BIRD	8308-200	N/A	103
10dB ATTENUATOR	BIRD	8308-100	N/A	112
ATTENUATOR	SHUNER	68030.17.A	N/A	135
HORN	EMCO	3115	9010-3580	138
HORN	EMCO	3115	9010-3581	139
SIGNAL GENERATOR	MARCONI	2042	119388/080	176
TEMPERATURE INDICATOR	FLUKE	52 SERIES II	74700044	426
PRE AMPLIFIER	AGILENT	8449B	2118	572
MULTIMETER	AVOMeter	M3004	M3270006	UH41
ANTENNA	CHASE	CBL6112B	2803	UH93
PSU	THANDAR	PL32QMD	044749	UH100
POWER METER	MARCONI	6960B	237036/001	UH132
RECEIVER	R&S	ESVS10	841431/014	UH186
BILOG ANTENNA	YORK	CBL611/A	1618	UH191
POWER SENSOR	MARCONI	6920	1564	UH228
SPECTRUM ANALYSER	R&S	FSU 46	200034	UH281
CRYSTAL DETECTOR	HP	8472A	1822Z00897	UH302
DIRECTIONAL COUPLER	SINGER	117310	26	UH314
PRE AMPLIFIER	WATKINS JONSON	6201-69	2740	UH372
HIGH PASS FILTER	AFL	N/A	N/A	N/A



**ANNEX D**  
**TEST EQUIPMENT CALIBRATION**

REF Number	Equipment Type	Manufacturer	Last Cal Calibration	Calibration Period	Due For Calibration
UH06/07	IC OATS Submission	TRL	02/07/2009	24	02/07/2011
UH06/07	NSA Calibration	TRL	19/06/2009	12	19/06/2010
UH028	Log Periodic Ant	Schwarbeck	14/08/2009	24	14/08/2011
UH029	Bicone Antenna	Schwarbeck	13/08/2009	24	13/08/2011
UH041	Multimeter	AVometer	25/01/2010	12	25/01/2011
UH093	Bilog	Chase	03/06/2009	24	03/06/2011
UH100	PSU	Thandar	Use Calibrated Multimeter		
UH122	Oscilloscope	Tektronix	18/12/2009	24	18/12/2011
UH129	Power Sensor	Marconi	28/01/2010	12	28/01/2011
UH132	Power meter	Marconi	27/01/2010	12	27/01/2011
UH186	Receiver	R&S	10/12/2009	12	10/12/2010
UH191	Bilog	York	01/10/2008	24	01/10/2010
UH228	Power Sensor	Marconi	28/01/2010	12	28/01/2011
UH253	1m Cable N type	TRL	15/07/2009	12	15/07/2010
UH254	1m Cable N type	TRL	15/07/2009	12	15/07/2010
UH269	1m Cable N type	TRL	15/07/2009	12	15/07/2010
UH270	1m Cable N type	TRL	15/07/2009	12	15/07/2010
UH271	1.5m Cable N type	TRL	15/07/2009	12	15/07/2010
UH272	1.5m Cable N type	TRL	15/07/2009	12	15/07/2010
UH273	2m Cable N type	TRL	15/07/2009	12	15/07/2010
UH274	2m Cable N type	TRL	15/07/2009	12	15/07/2010
UH281	Spectrum Analyser	R&S	29/01/2010	12	29/01/2011
UH288	1m Cable N type	TRL	15/07/2009	12	15/07/2010
UH291	K-Type Cable	Succoflex	15/07/2009	12	15/07/2010
UH293	K-Type Cable	Megaphase	15/07/2009	12	15/07/2010
UH302	Crystal Detector	HP	For Information Only		
UH314	Bi-Directional Coupler	Narda	Calibrate In Use		
UH365	Harmonic Mixer (33-50)	Agilent	16/07/2008	24	16/07/2010
UH366	Harmonic Mixer (50-75)	Agilent	21/07/2008	24	21/07/2010
UH367	Harmonic Mixer (75-110)	Agilent	02/07/2008	24	02/07/2010
UH368	Horn (50-75)	Flann	02/07/2008	24	02/07/2010
UH369	Horn (75-110)	Flann	02/07/2008	24	02/07/2010
UH372	Pre Amplifier	Watkins Johnson	19/03/2009	24	19/03/2010
L011	Temperature Chamber	Shartree	Use Calibrated Temperature Indicator		
L103	Attenuator	Bird	Calibrate in Use		
L112	Attenuator	Bird	Calibrate in Use		
L135	Attenuator	Shuner	Calibrate in Use		
L138	1-18GHz Horn	EMCO	10/09/2009	24	10/09/2011
L139	1-18GHz Horn	EMCO	17/08/2009	24	17/08/2011
L176	Signal Generator	Marconi	23/06/2009	12	23/06/2010
L193	Bicone Antenna	Chase	06/05/2008	24	06/05/2010
L203	Log Periodic Ant	Chase	06/05/2008	24	06/05/2010
L426	Temperature Indicator	Fluke	25/01/2010	12	25/01/2011
L572	Pre Amp	Agilent	15/07/2009	12	15/07/2010
N/A	High Pass Filter	BSC	04/12/2009	12	04/12/2010

**ANNEX E**  
**MEASUREMENT UNCERTAINTY**

## Radio Testing – General Uncertainty Schedule

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95% confidence where no required test level exists.

### **[1] Adjacent Channel Power**

Uncertainty in test result = **1.86dB**

### **[2] Carrier Power**

Uncertainty in test result (Equipment - TRLUH120) = **2.18dB**

Uncertainty in test result (Equipment – TRL05) = **1.08dB**

Uncertainty in test result (Equipment – TRL479) = **2.48dB**

### **[3] Effective Radiated Power**

Uncertainty in test result = **4.71dB**

### **[4] Spurious Emissions**

Uncertainty in test result = **4.75dB**

### **[5] Maximum frequency error**

Uncertainty in test result (Equipment - TRLUH120) = **119ppm**

Uncertainty in test result (Equipment – TRL05) = **0.113ppm**

Uncertainty in test result (Equipment – TRL479) = **0.265ppm**

### **[6] Radiated Emissions, field strength OATS 14kHz-18GHz Electric Field**

Uncertainty in test result (14kHz – 30MHz) = **4.8dB**, Uncertainty in test result (30MHz – 1GHz) = **4.6dB**,

Uncertainty in test result (1GHz-18GHz) = **4.7dB**

### **[7] Frequency deviation**

Uncertainty in test result = **3.2%**

### **[8] Magnetic Field Emissions**

Uncertainty in test result = **2.3dB**

### **[9] Conducted Spurious**

Uncertainty in test result (Equipment TRL479) Up to 8.1GHz = **3.31dB**

Uncertainty in test result (Equipment TRL479) 8.1GHz – 15.3GHz = **4.43dB**

Uncertainty in test result (Equipment TRL479) 15.3GHz – 21GHz = **5.34dB**

Uncertainty in test result (Equipment TRLUH120) Up to 26GHz = **3.14dB**

### **[10] Channel Bandwidth**

Uncertainty in test result = **15.5%**

### **[11] Amplitude and Time Measurement – Oscilloscope**

Uncertainty in overall test level = **2.1dB**, Uncertainty in time measurement = **0.59%**, Uncertainty in Amplitude measurement = **0.82%**

### **[11] Power Line Conduction**

Uncertainty in test result = **3.4dB**

**[12] Spectrum Mask Measurements**

Uncertainty in test result = **2.59% (frequency)**  
Uncertainty in test result = **1.32dB (amplitude)**

**[13] Adjacent Sub Band Selectivity**

Uncertainty in test result = **1.24dB**

**[14] Receiver Blocking – Listen Mode, Radiated**

Uncertainty in test result = **3.42dB**

**[15] Receiver Blocking – Talk Mode, Radiated**

Uncertainty in test result = **3.36dB**

**[16] Receiver Blocking – Talk Mode, Conducted**

Uncertainty in test result = **1.24dB**

**[17] Receiver Threshold**


Uncertainty in test result = **3.23dB**

**[18] Transmission Time Measurement**

Uncertainty in test result = **7.98%**


**ANNEX F**  
**DUTY CYCLE**

# Duty Cycle Plots

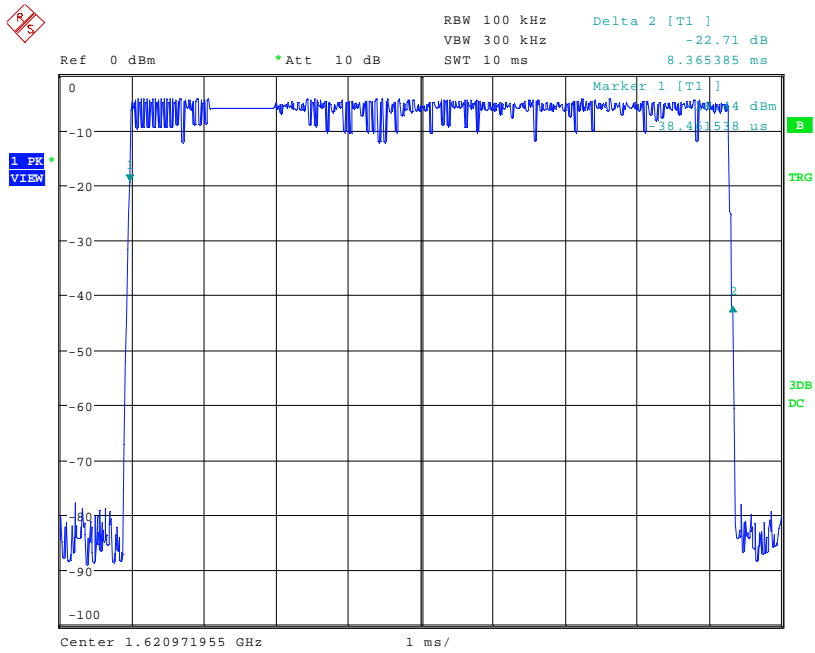

Date: 4.MAR.2010 11:13:28

$$T_{on} = 8.36\text{mS}$$

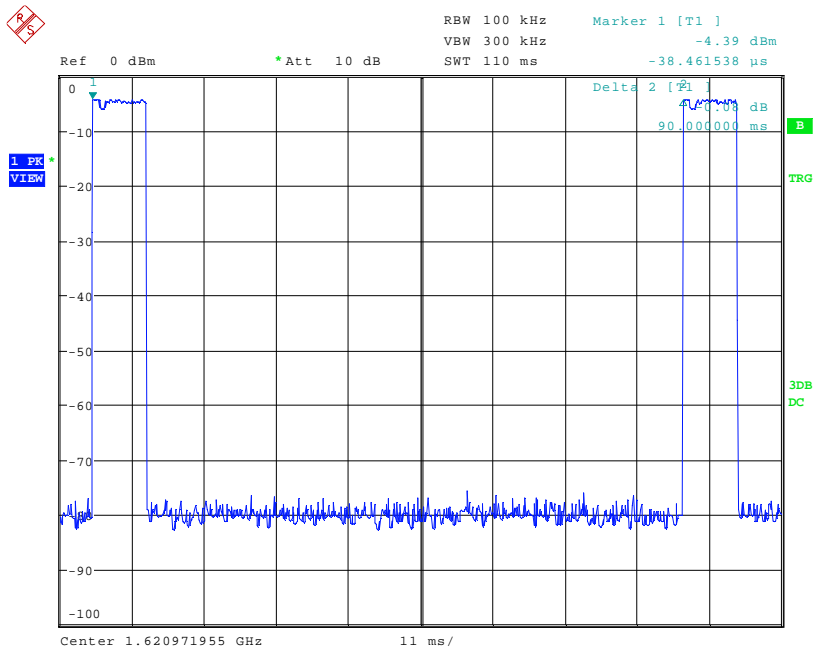


Date: 4.MAR.2010 11:17:44

$$T_{frame} = 90.00\text{mS}$$


**ANNEX G**  
**EMISSIONS LIMITATIONS**



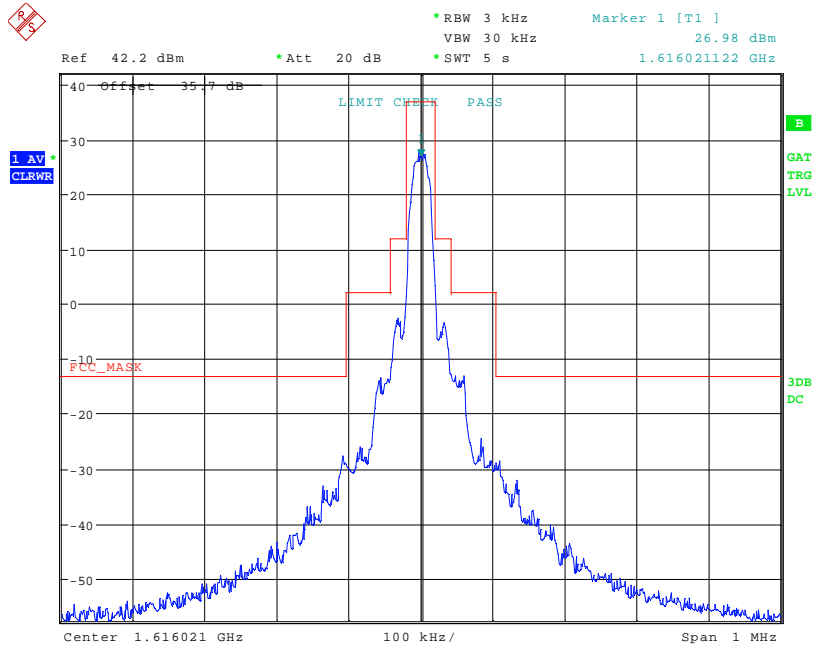


Date: 4.MAR.2010 15:38:00

### Channel 1

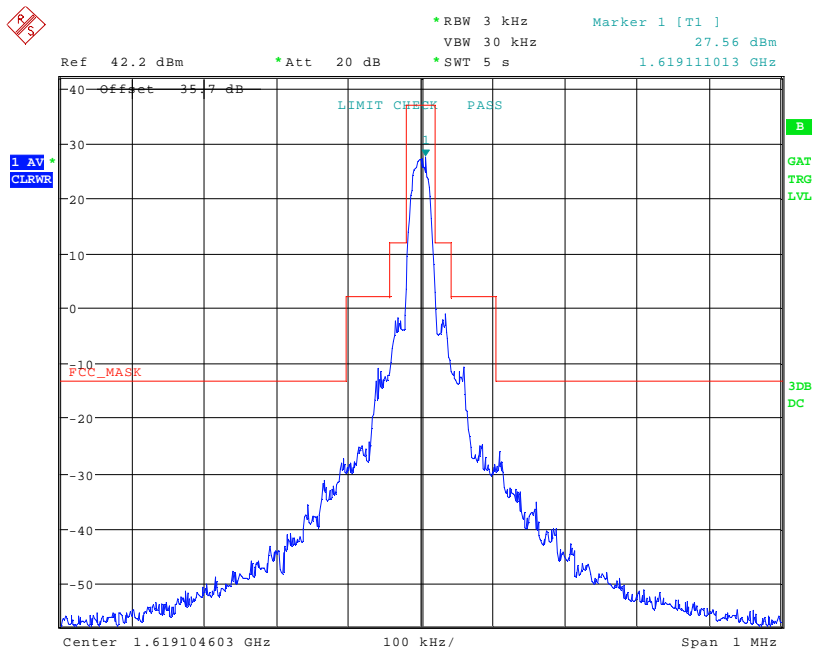


Date: 4.MAR.2010 15:14:52

### Channel 75

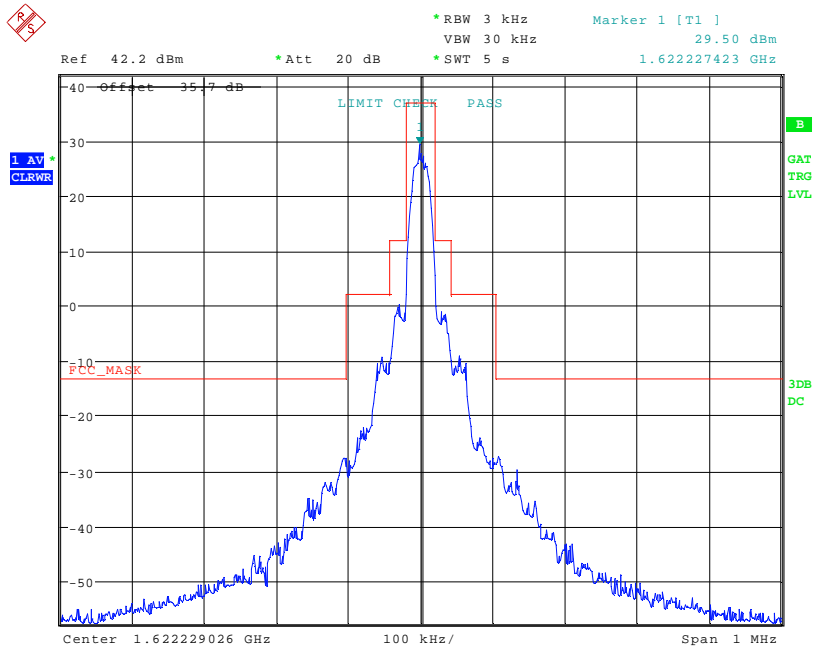

Date: 4.MAR.2010 15:29:39

### Channel 150

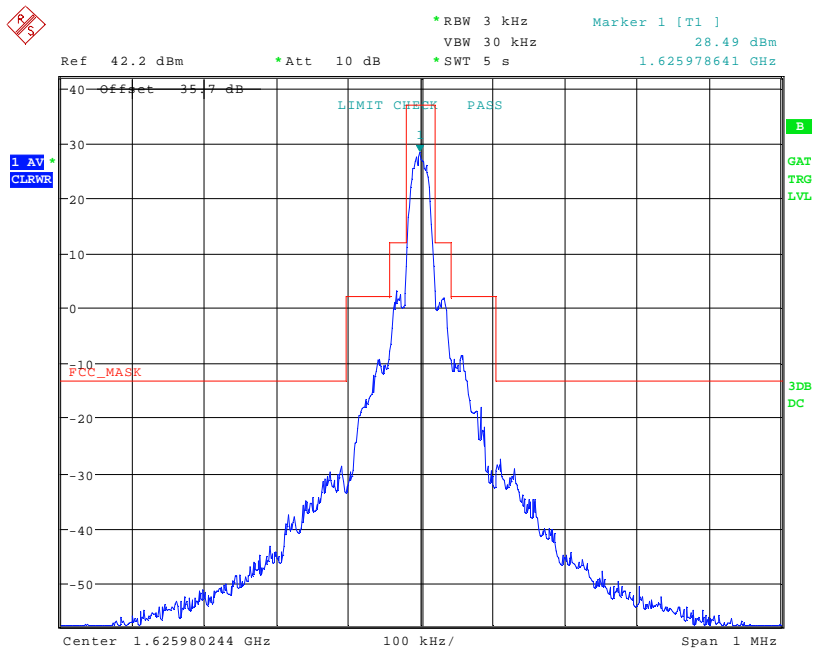


Date: 4.MAR.2010 14:52:57

### Channel 240

**ANNEX H**  
**TRANSMITTER SPURIOUS EMISSIONS – Conducted**


# TRANSMITTER SPURIOUS EMISSIONS – Conducted

Channel 1

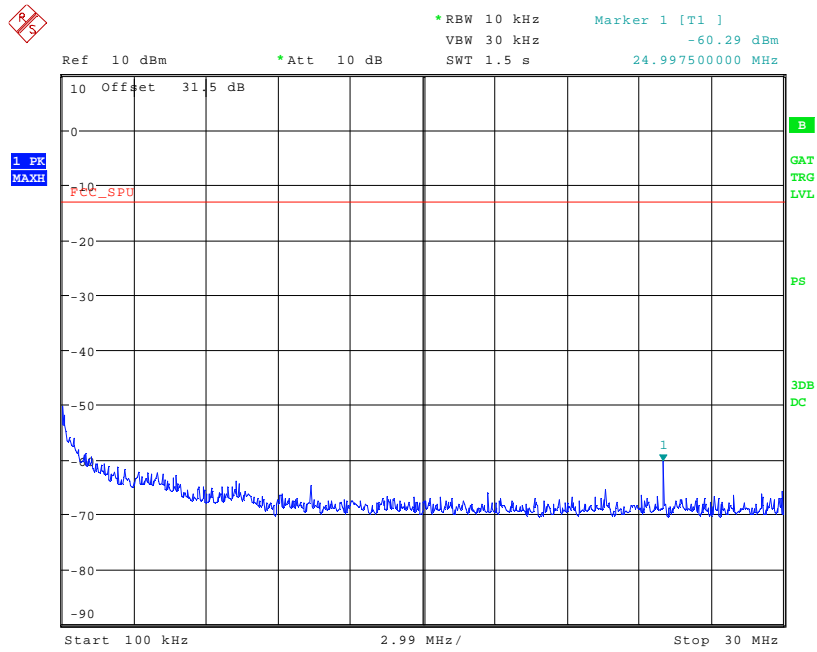

Date: 5.MAR.2010 12:13:41

## 100 kHz – 30MHz

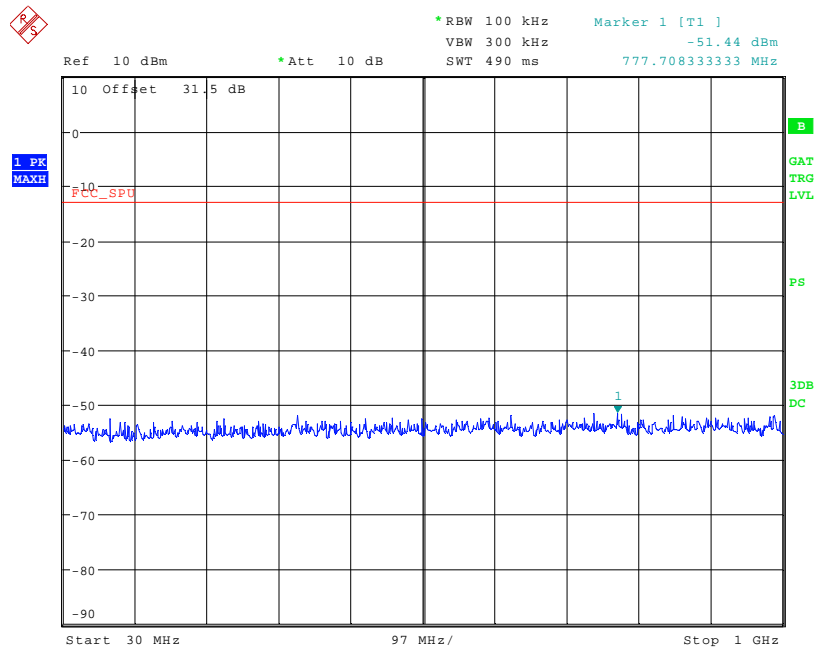


Date: 5.MAR.2010 12:14:05

## 30MHz – 1000MHz


TRANSMITTER SPURIOUS EMISSIONS – Conducted

Channel 1

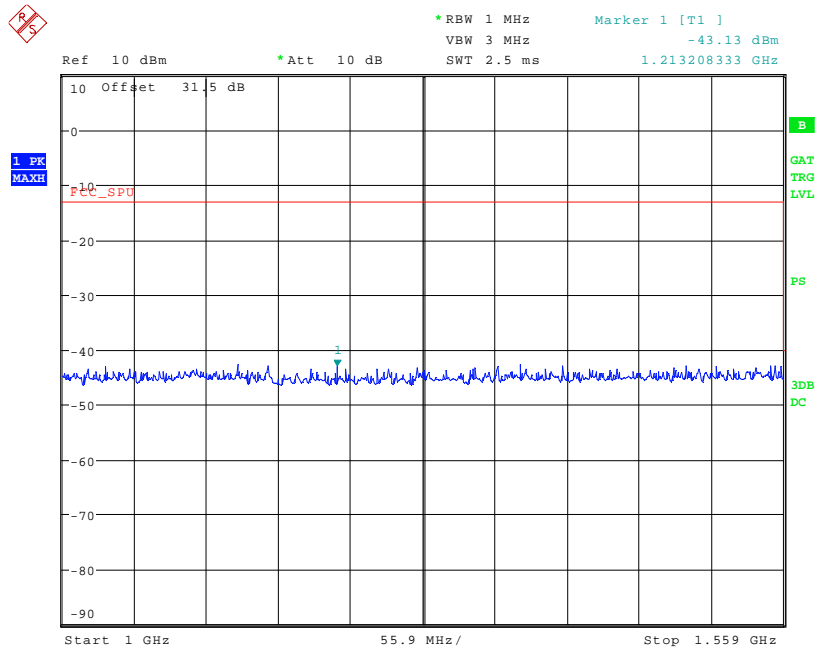

Date: 5.MAR.2010 12:14:24

1000MHz – 1559MHz

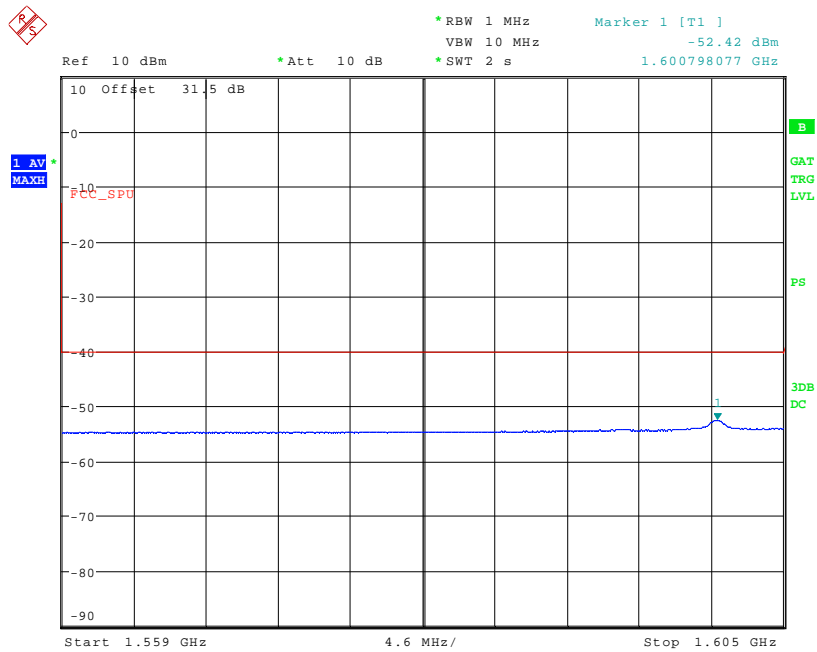


Date: 5.MAR.2010 12:11:30

1559MHz – 1605MHz


# TRANSMITTER SPURIOUS EMISSIONS – Conducted

Channel 1

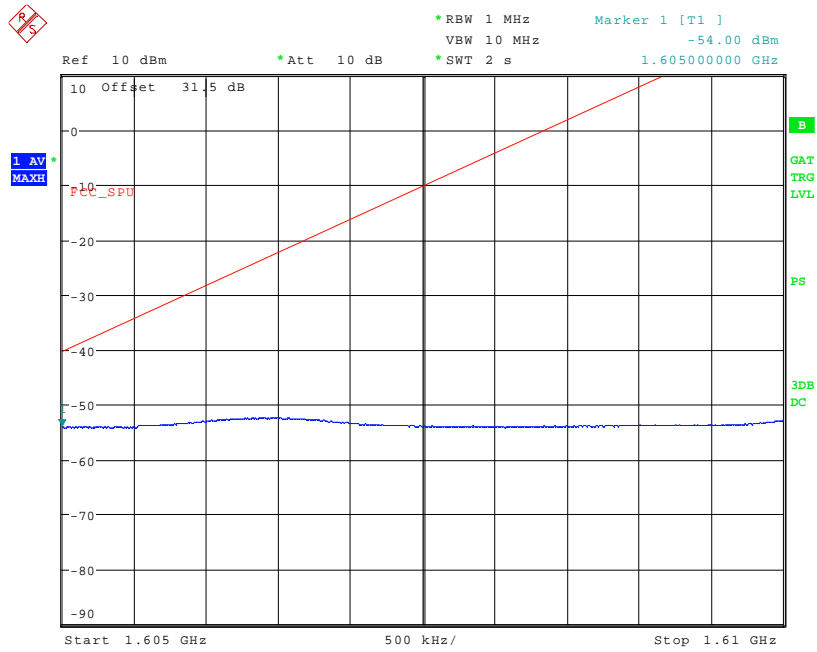

Date: 5.MAR.2010 12:09:16

## 1605MHz – 1610MHz

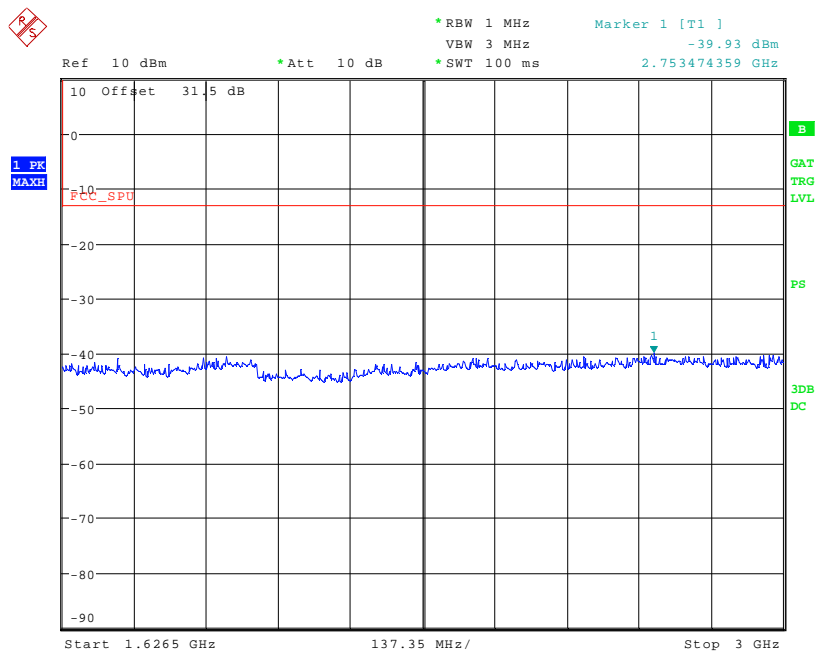


Date: 5.MAR.2010 12:15:26

## 1626.5MHz – 3000MHz


TRANSMITTER SPURIOUS EMISSIONS – Conducted

Channel 1

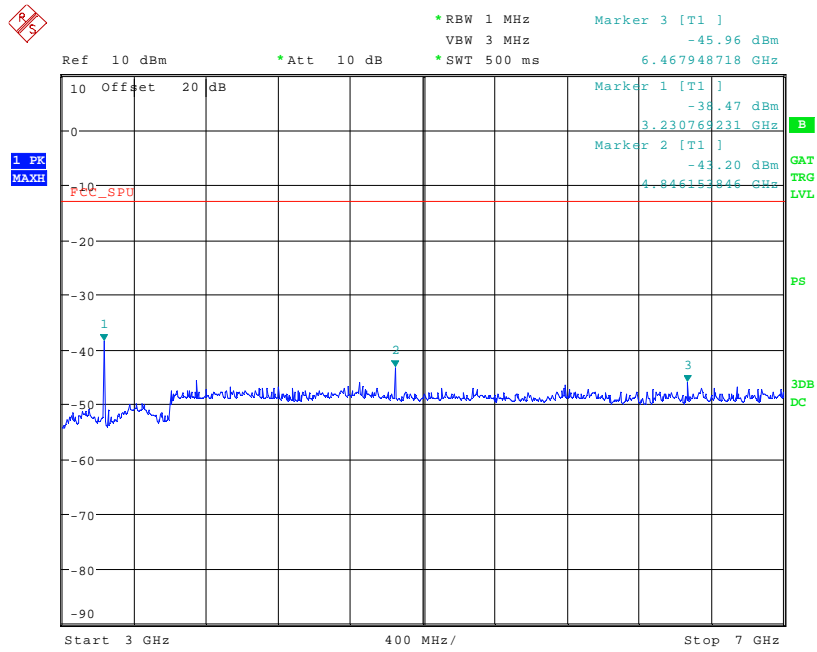

Date: 5.MAR.2010 12:34:14

3GHz – 7GHz

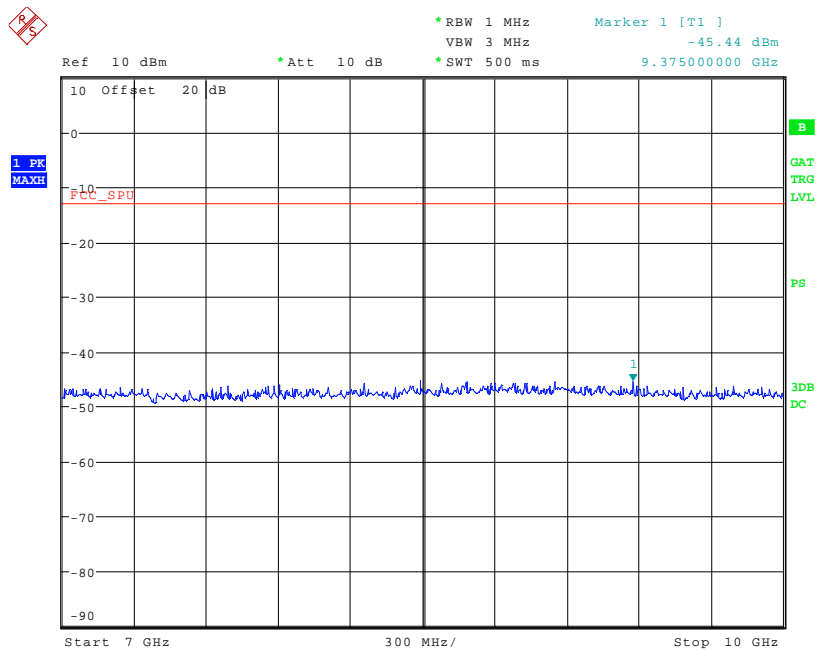


Date: 5.MAR.2010 12:33:41

7GHz – 10GHz


TRANSMITTER SPURIOUS EMISSIONS – Conducted

Channel 1

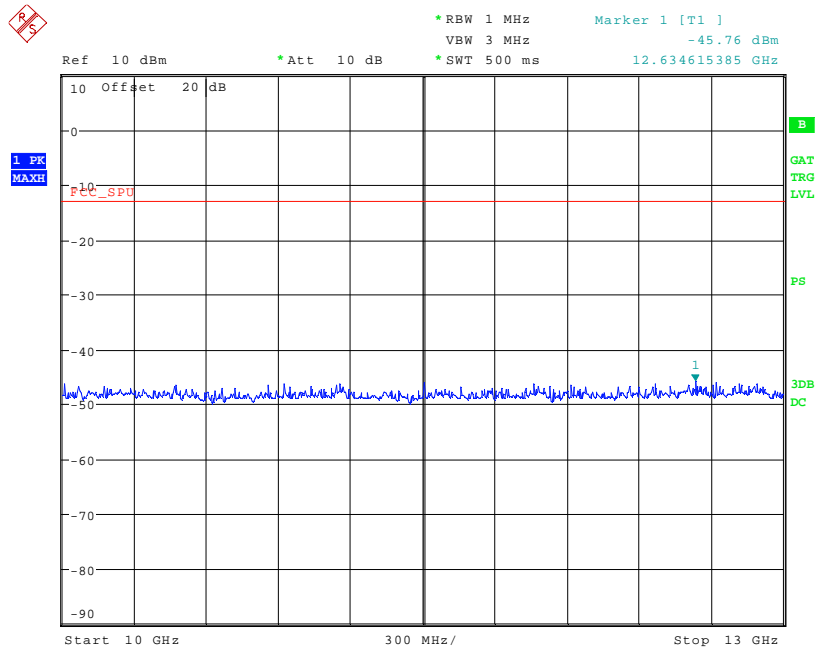

Date: 5.MAR.2010 12:33:02

10GHz – 13 GHz

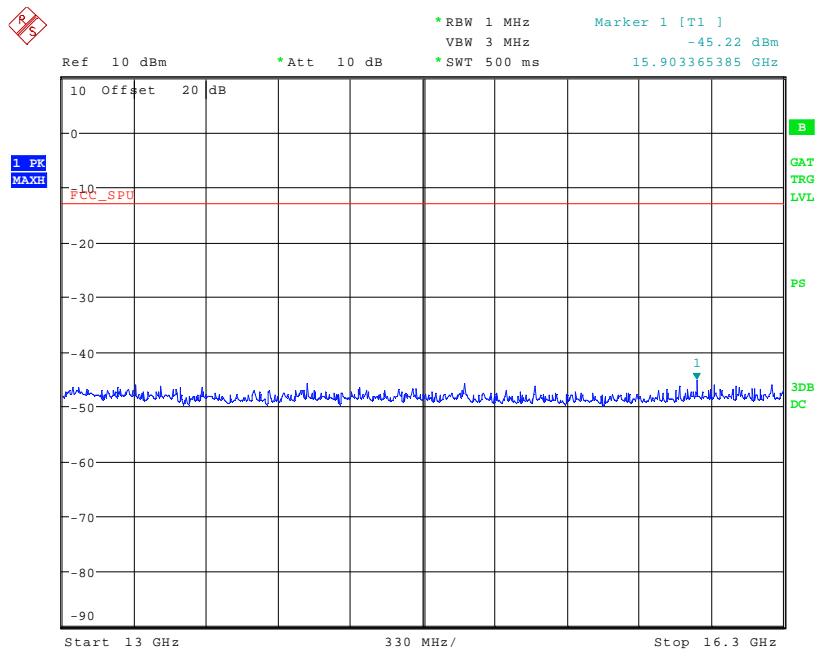


Date: 5.MAR.2010 12:32:35

13GHz – 16.3GHz




TRANSMITTER SPURIOUS EMISSIONS – Conducted

Channel 240

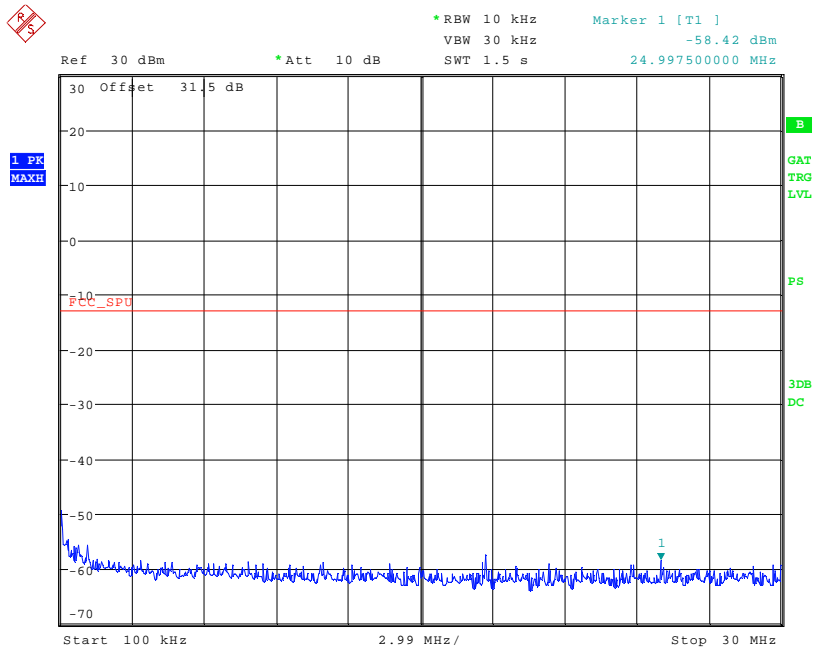

Date: 5.MAR.2010 12:21:29

100 kHz – 30MHz

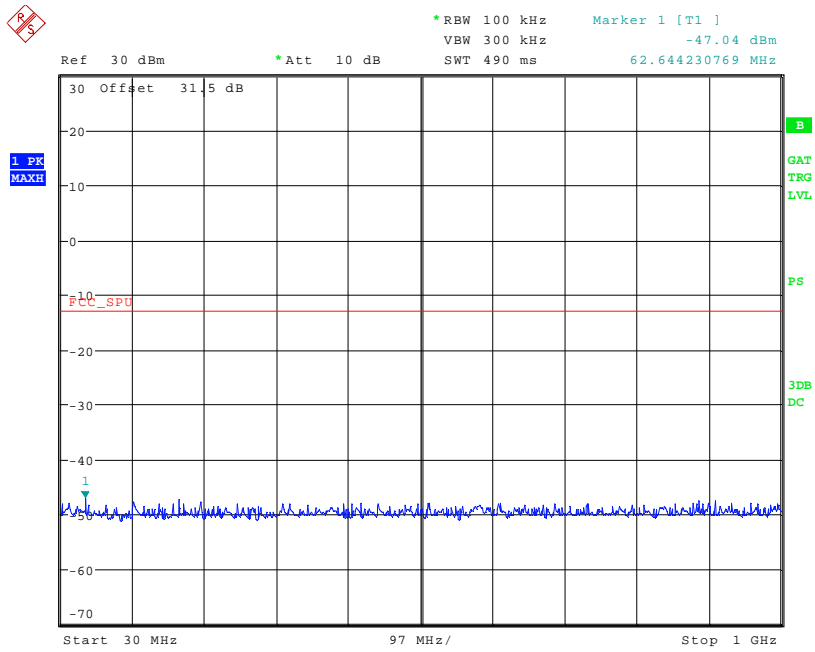


Date: 5.MAR.2010 12:23:03

30MHz – 1000MHz


TRANSMITTER SPURIOUS EMISSIONS – Conducted

Channel 240

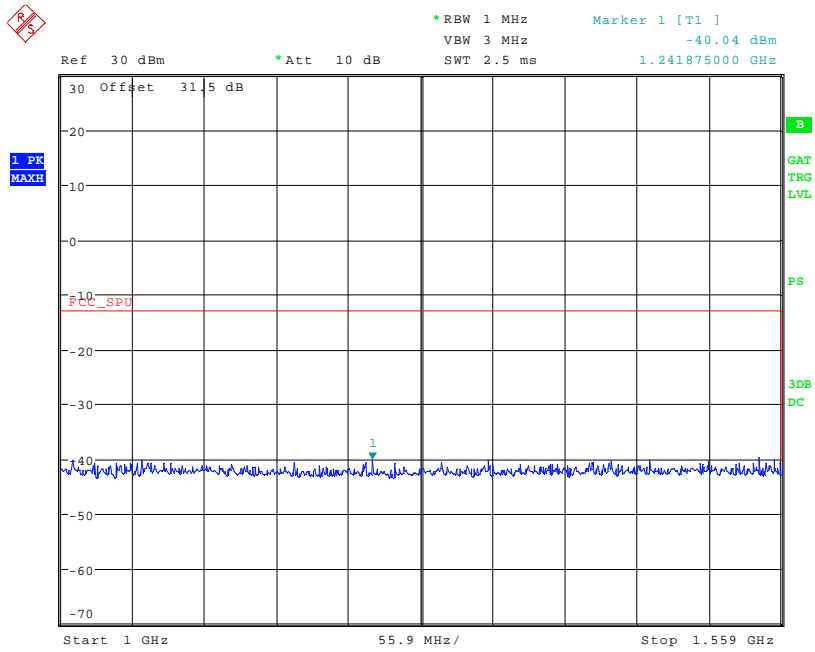

Date: 5.MAR.2010 12:23:21

1000MHz – 1559MHz

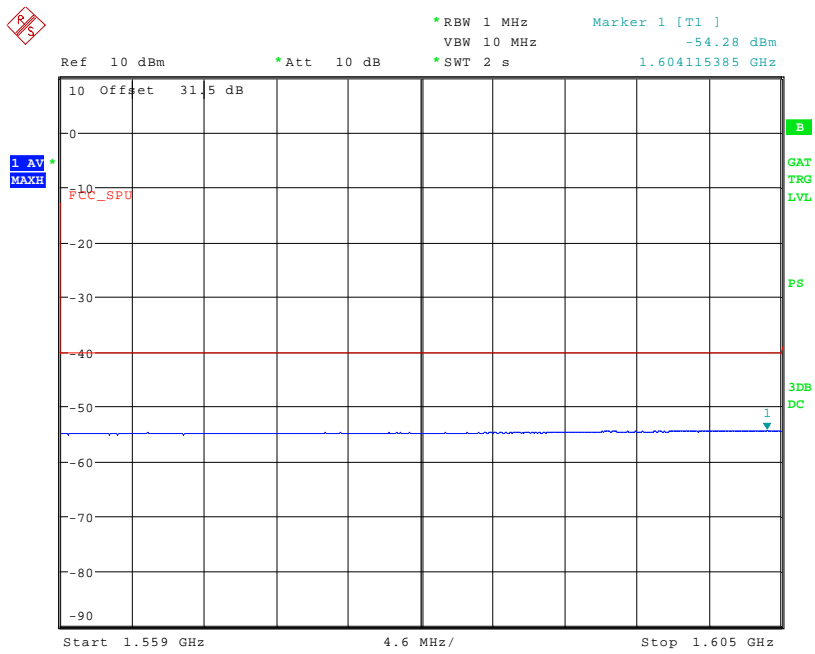


Date: 5.MAR.2010 12:05:50

1559MHz – 1605MHz


TRANSMITTER SPURIOUS EMISSIONS – Conducted

Channel 240

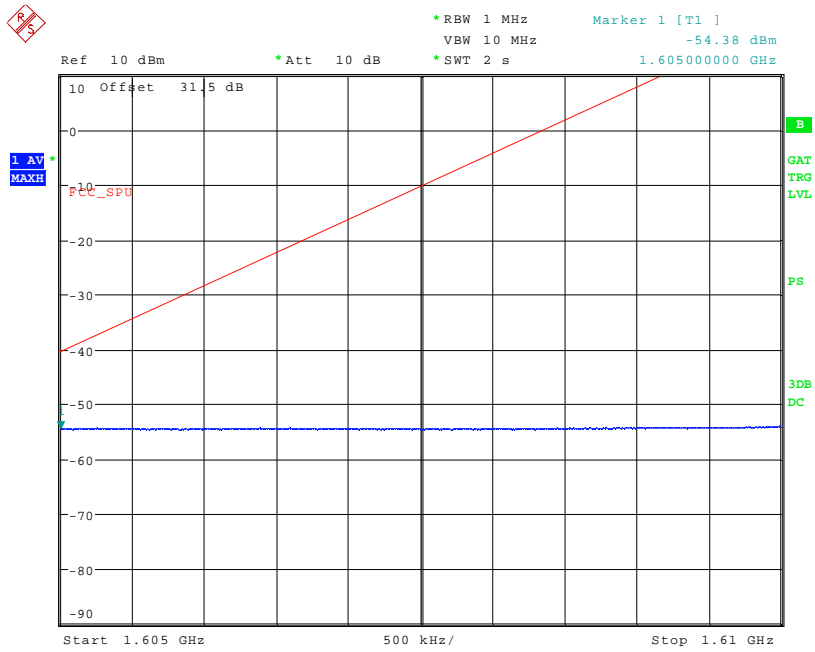

Date: 5.MAR.2010 12:07:15

1605MHz – 1610MHz

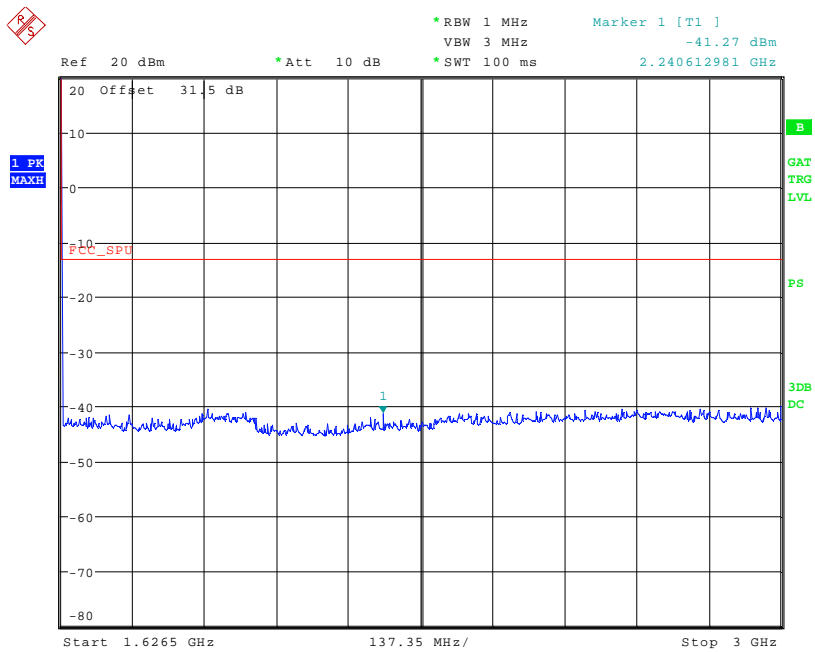


Date: 5.MAR.2010 12:16:21

1626.5MHz – 3000MHz


TRANSMITTER SPURIOUS EMISSIONS – Conducted

Channel 240

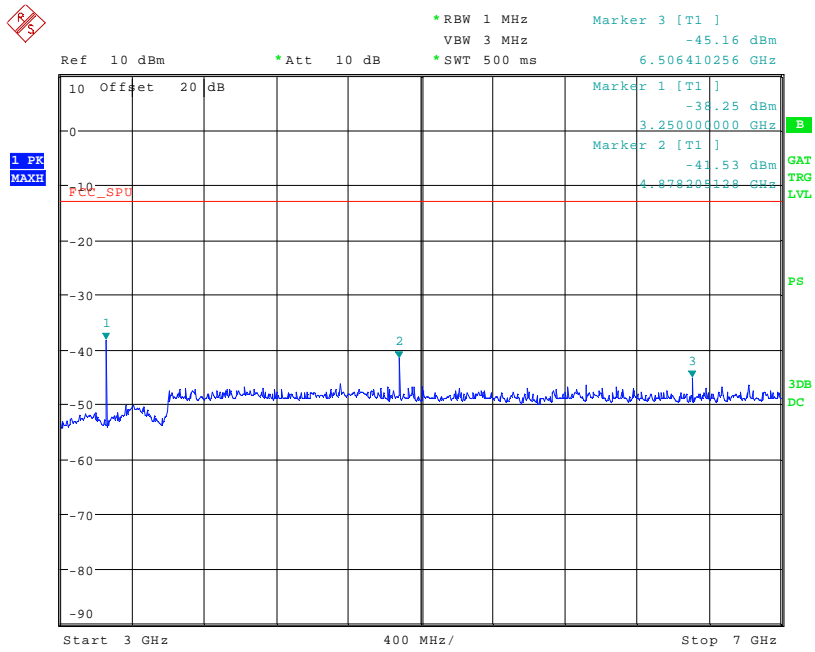

Date: 5.MAR.2010 12:30:24

3GHz – 7GHz

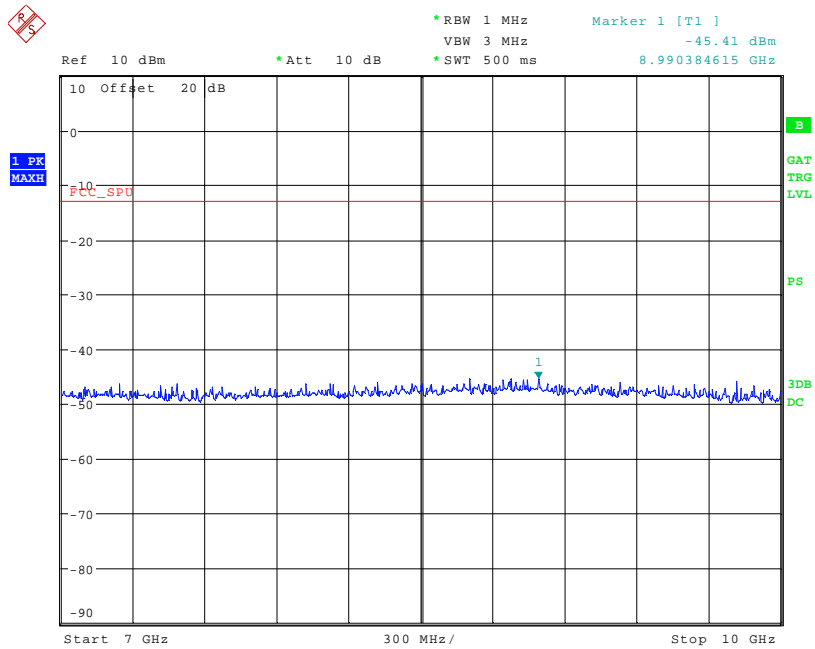


Date: 5.MAR.2010 12:30:51

7GHz – 10GHz


# TRANSMITTER SPURIOUS EMISSIONS – Conducted

Channel 240

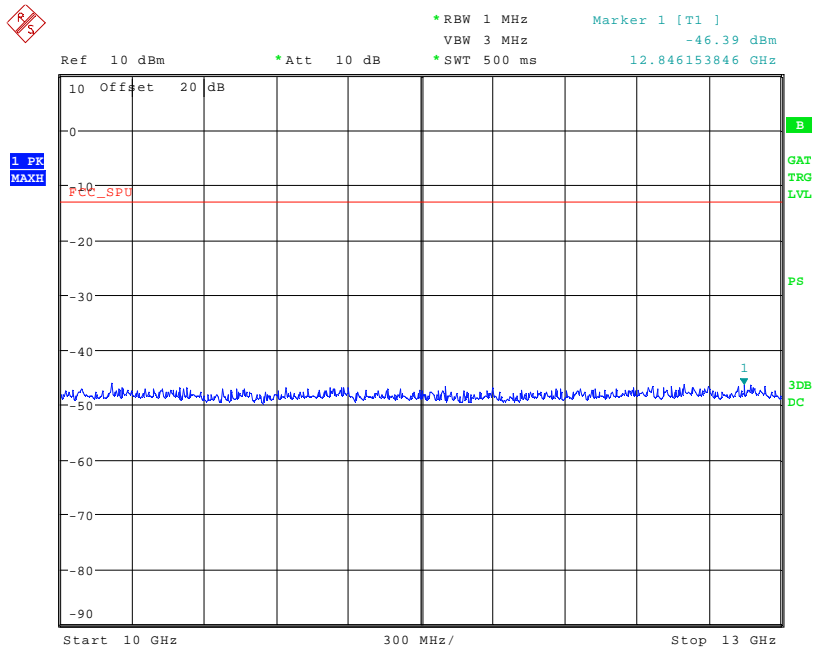

Date: 5.MAR.2010 12:31:17

## 10GHz – 13 GHz

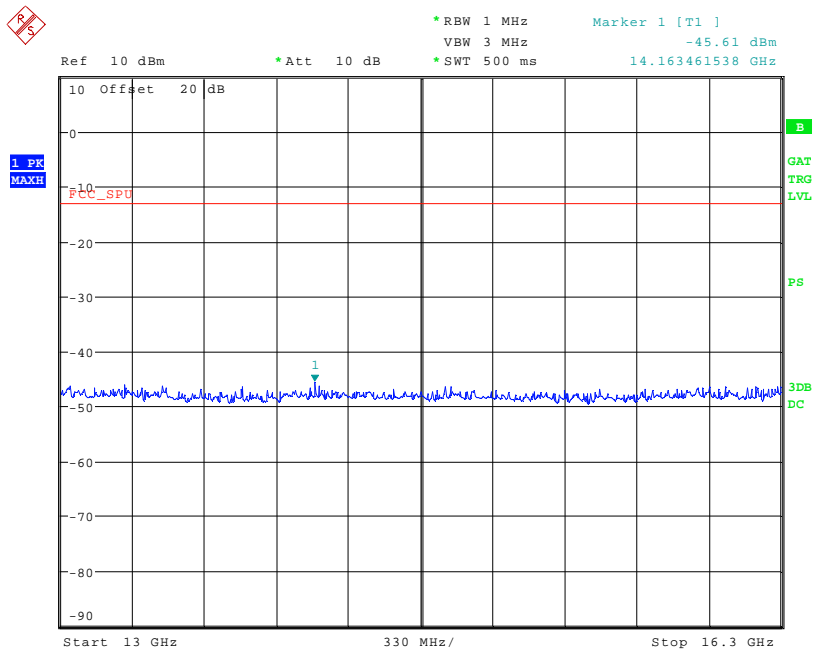


Date: 5.MAR.2010 12:31:50

## 13GHz – 16.3GHz


**ANNEX I**  
**TRANSMITTER SPURIOUS EMISSIONS – Radiated**

TRANSMITTER SPURIOUS EMISSIONS – Radiated

Channel 1

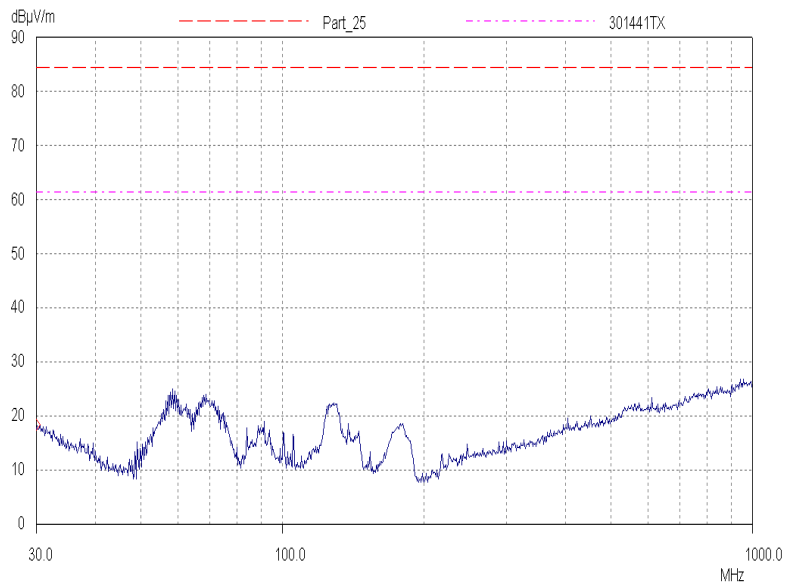

30MHz – 1000MHz

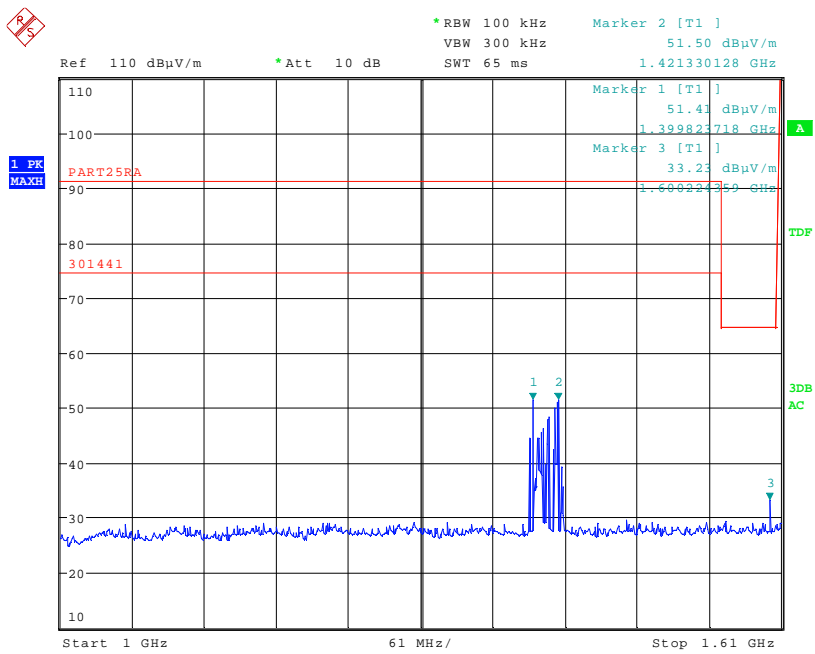


Date: 24.FEB.2010 16:34:47

1000MHz – 1610MHz


TRANSMITTER SPURIOUS EMISSIONS – Radiated

Channel 1

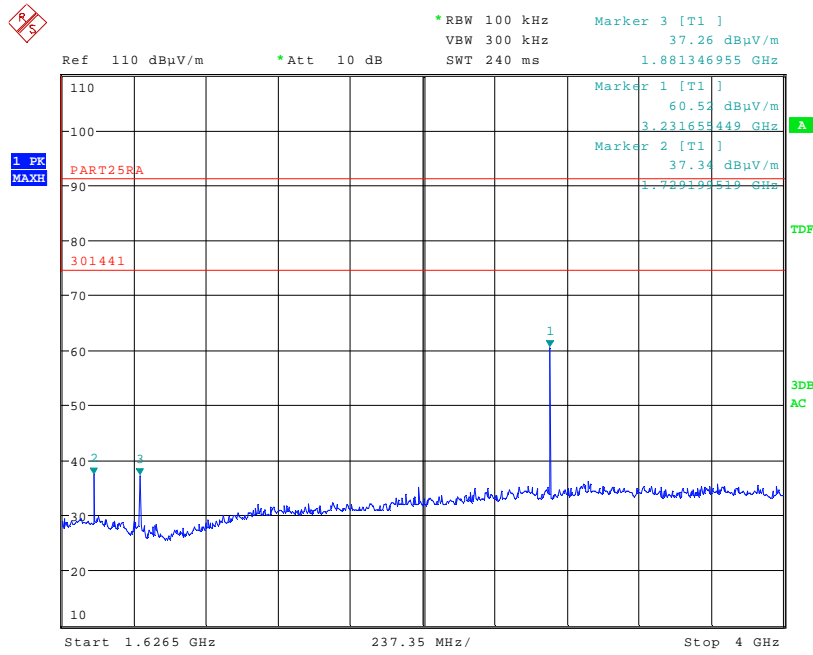

Date: 24.FEB.2010 16:29:18

1626.5MHz – 4000MHz

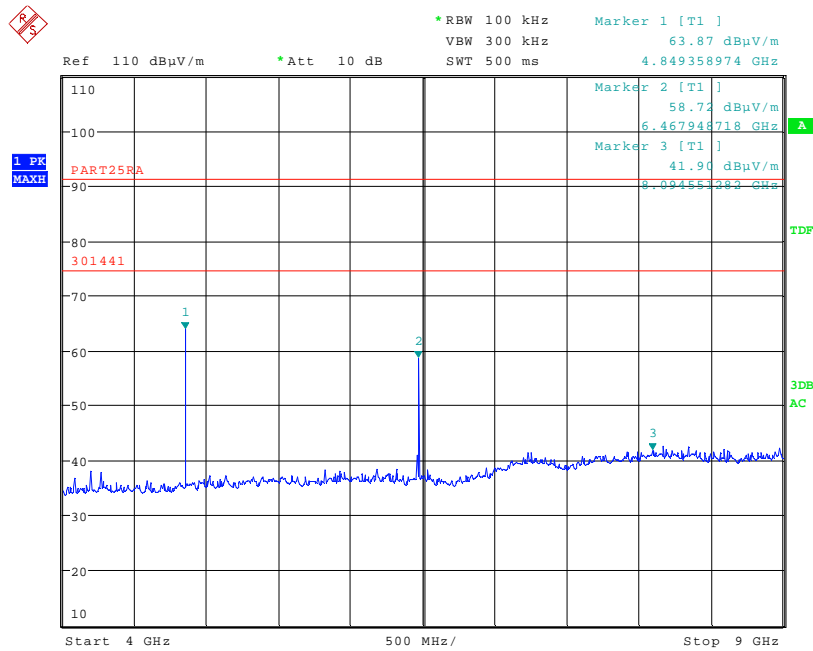


Date: 24.FEB.2010 16:33:48

4GHz – 9GHz




# TRANSMITTER SPURIOUS EMISSIONS – Radiated

Channel 1

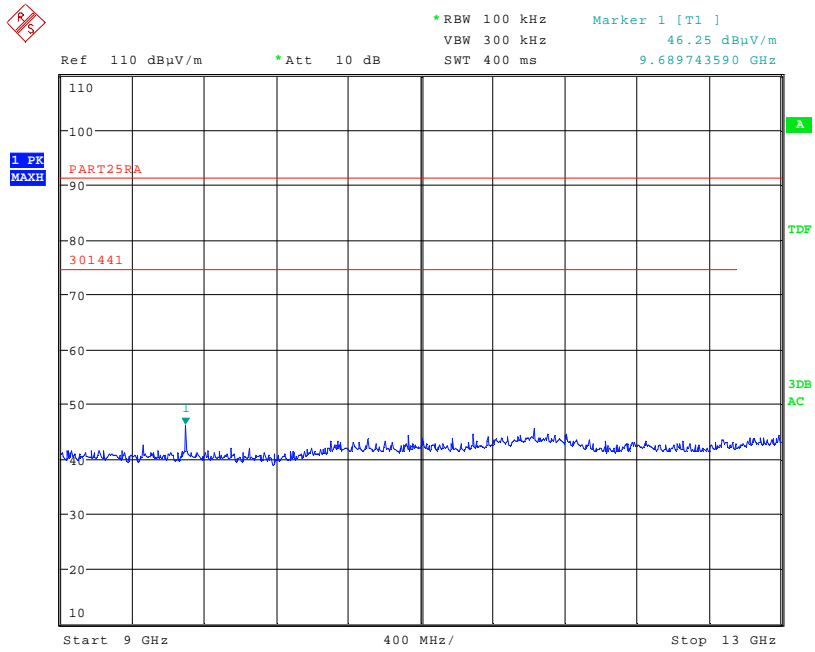


Date: 24.FEB.2010 16:31:04

## 9GHz – 13GHz

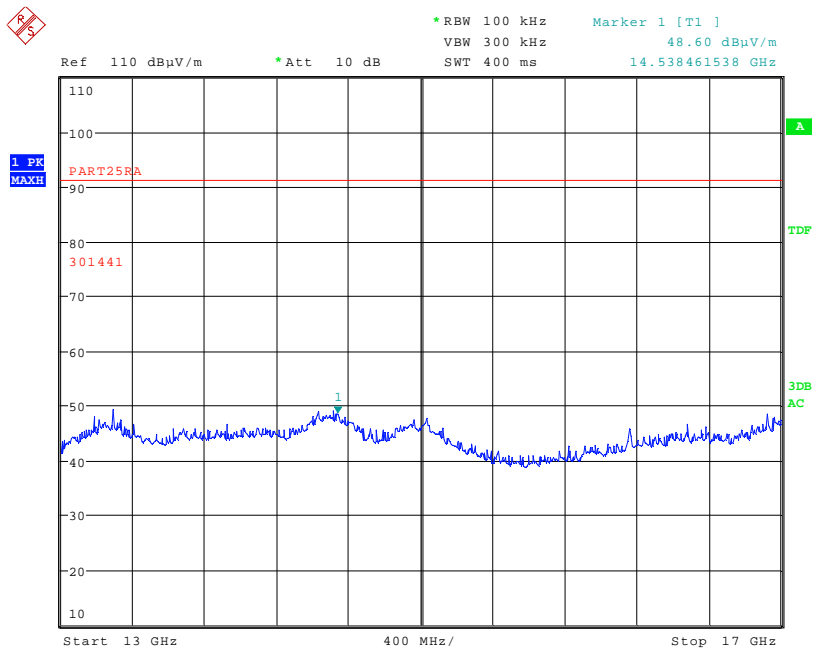


Date: 24.FEB.2010 16:32:09

## 13GHz – 16.3GHz

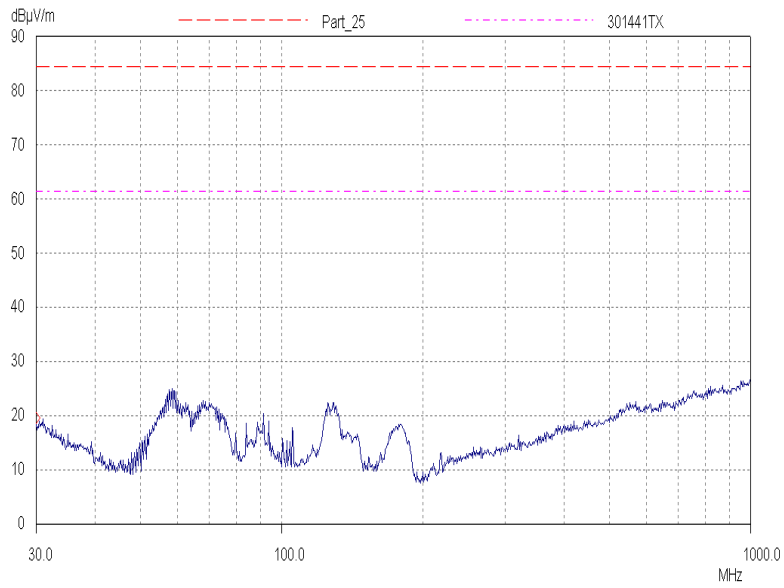

30MHz – 1000MHz

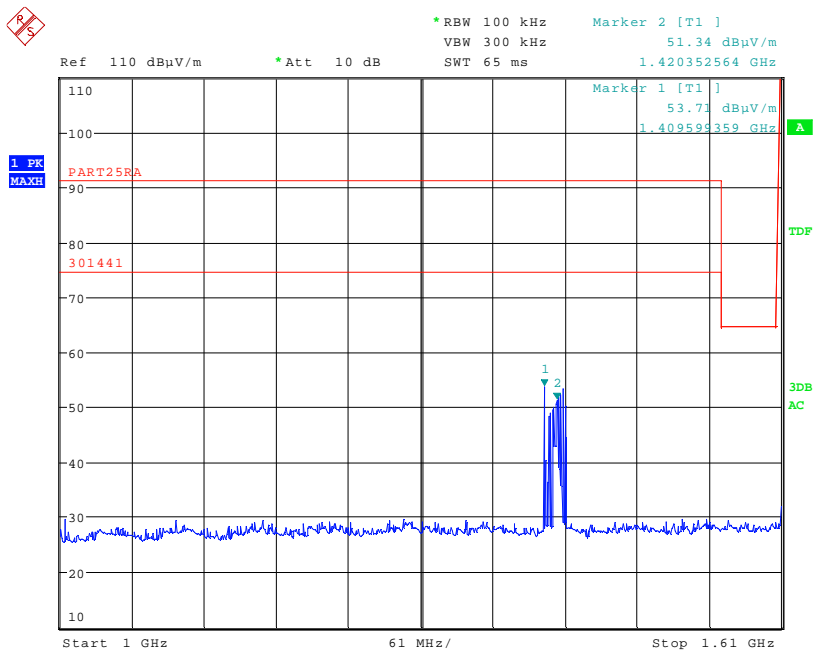


Date: 24.FEB.2010 16:19:31

1000MHz – 1610MHz


TRANSMITTER SPURIOUS EMISSIONS – Radiated

Channel 240

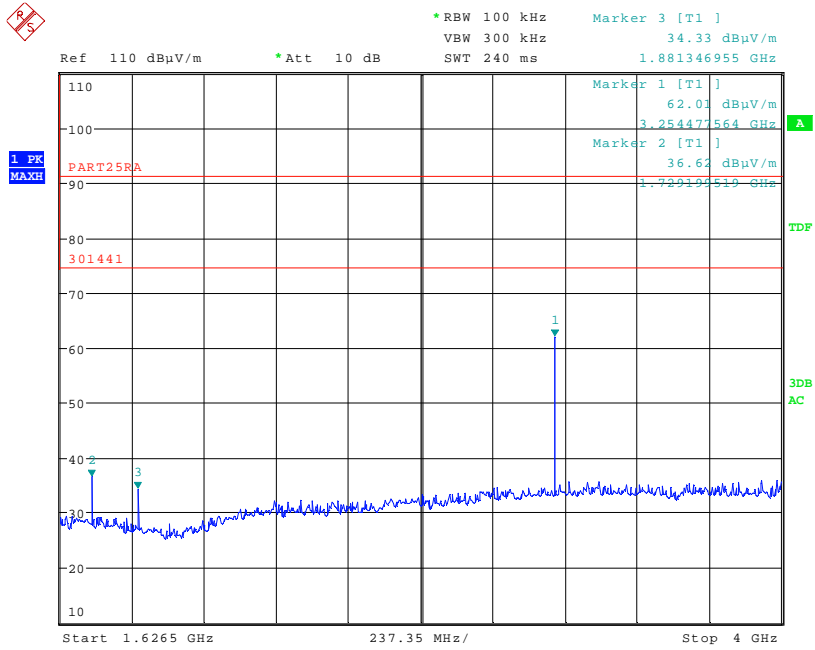

Date: 24.FEB.2010 16:27:03

1626.5MHz – 4000MHz

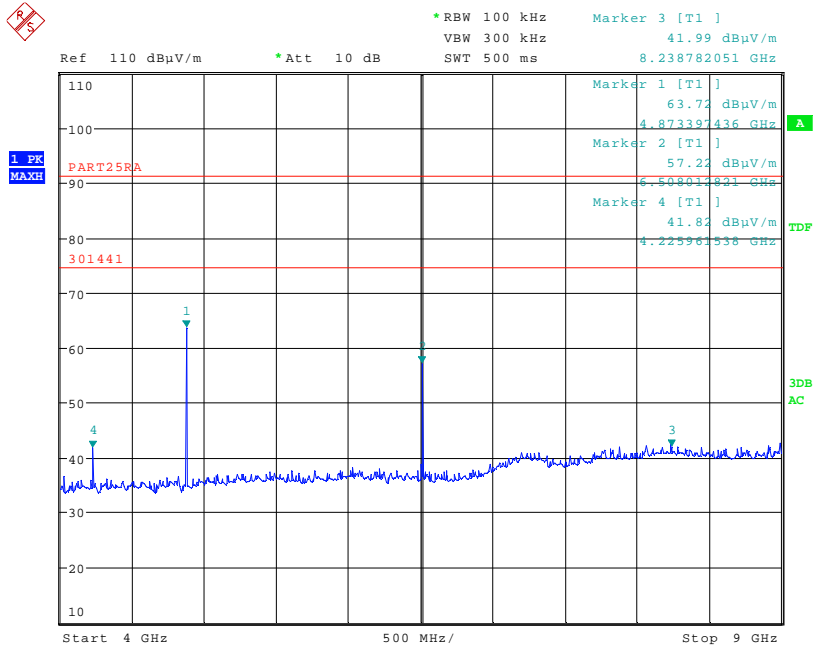


Date: 24.FEB.2010 16:21:43

4GHz – 9GHz


# TRANSMITTER SPURIOUS EMISSIONS – Radiated

Channel 240

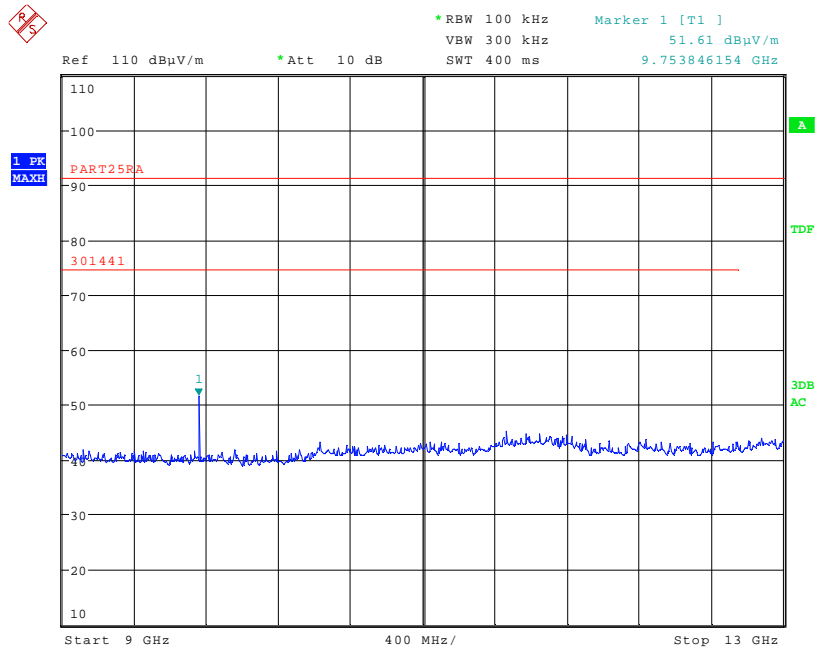

Date: 24.FEB.2010 16:22:10

## 9GHz – 13GHz

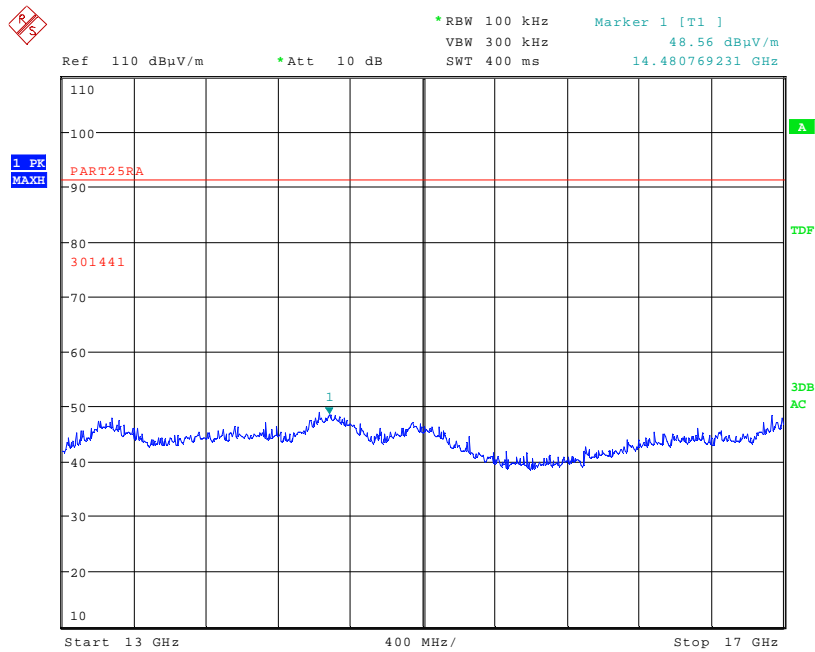


Date: 24.FEB.2010 16:23:14


## 13GHz – 17GHz

**ANNEX J**  
**FREQUENCY STABILITY – Temperature**


Channel 1 Frequency Stability - Temperature

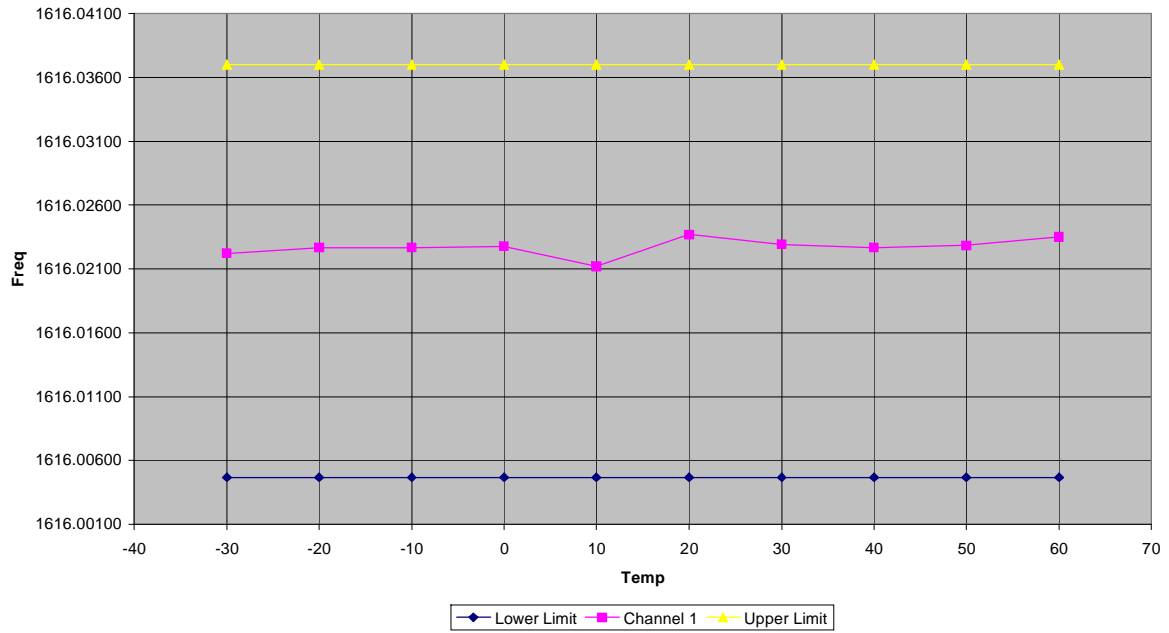


Channel 75 Frequency Stability - Temperature

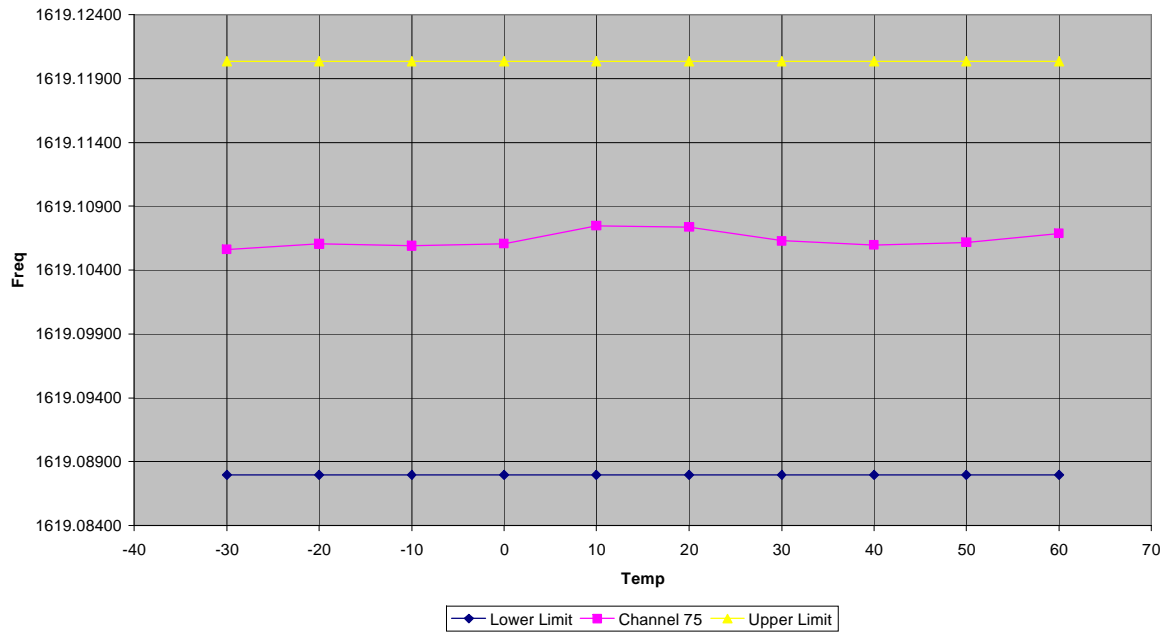

Channel 150 Frequency Stability - Temperature

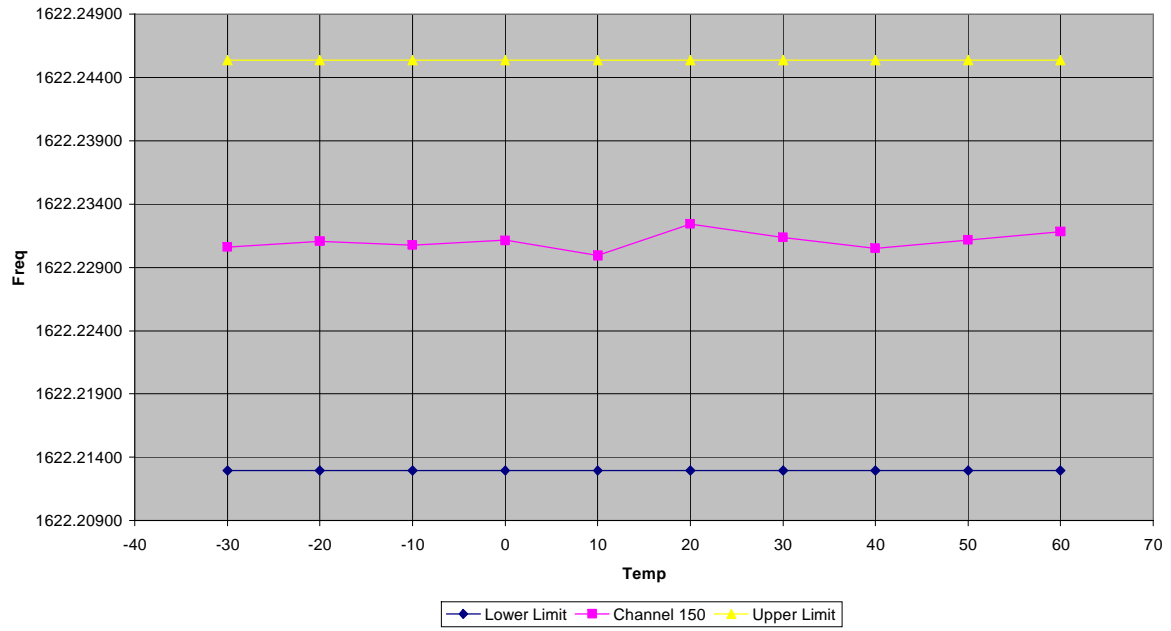


Channel 240 Frequency Stability - Temperature

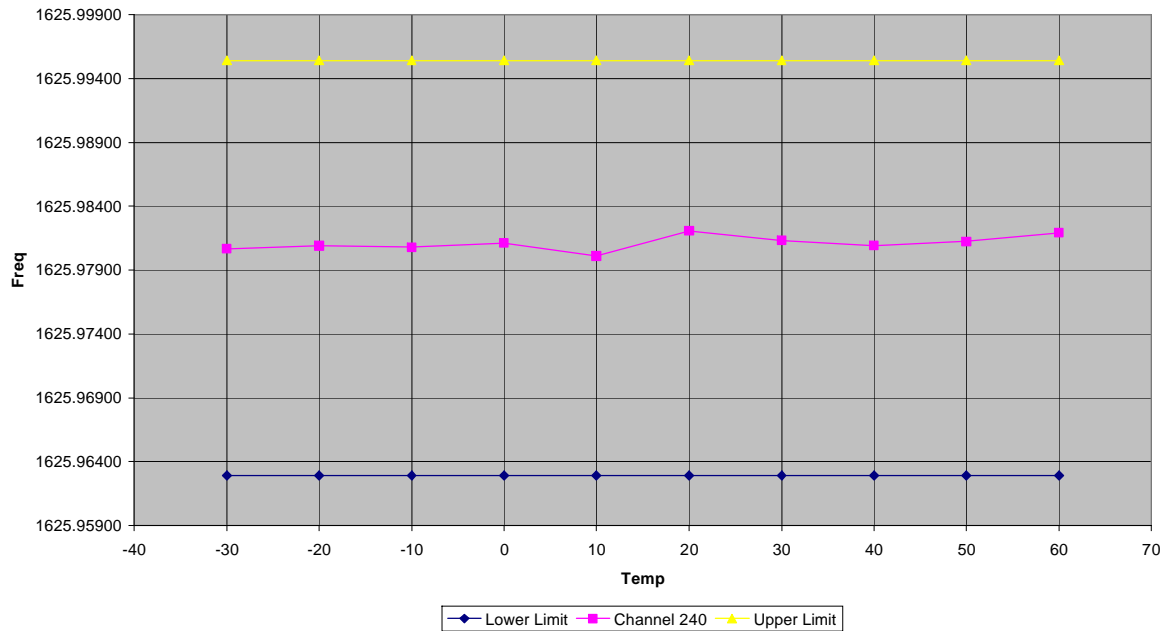


**ANNEX K**  
**FREQUENCY STABILITY – Voltage**




Channel 1 Frequency Stability - Voltage

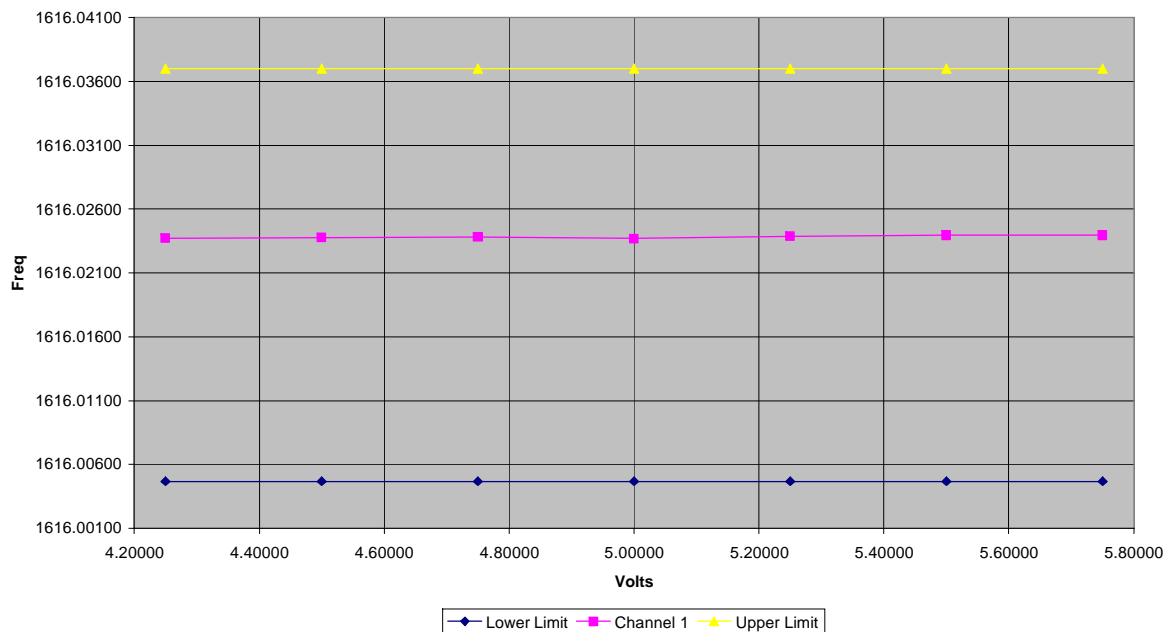


Channel 75 Frequency Stability - Voltage

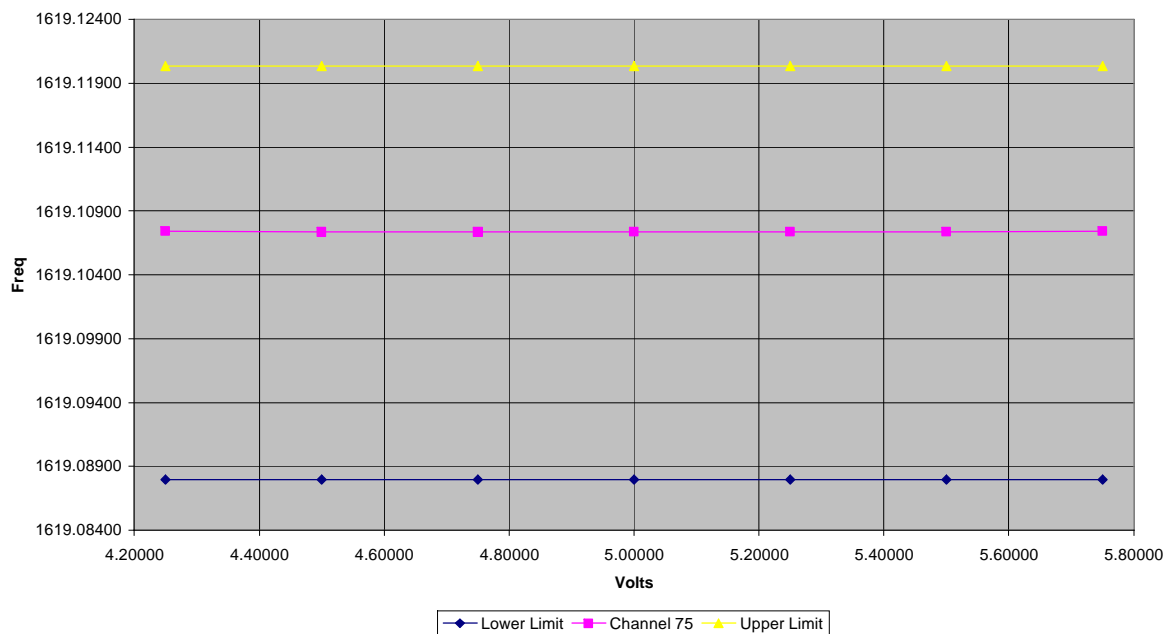

Channel 150 Frequency Stability - Voltage

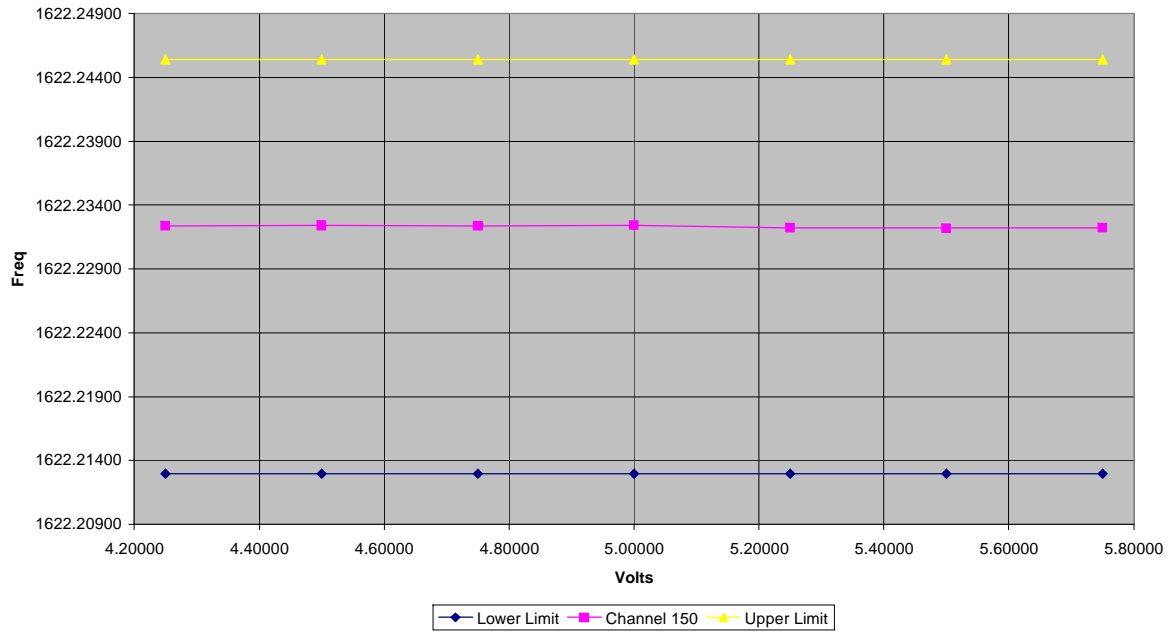


Channel 240 Frequency Stability - Voltage

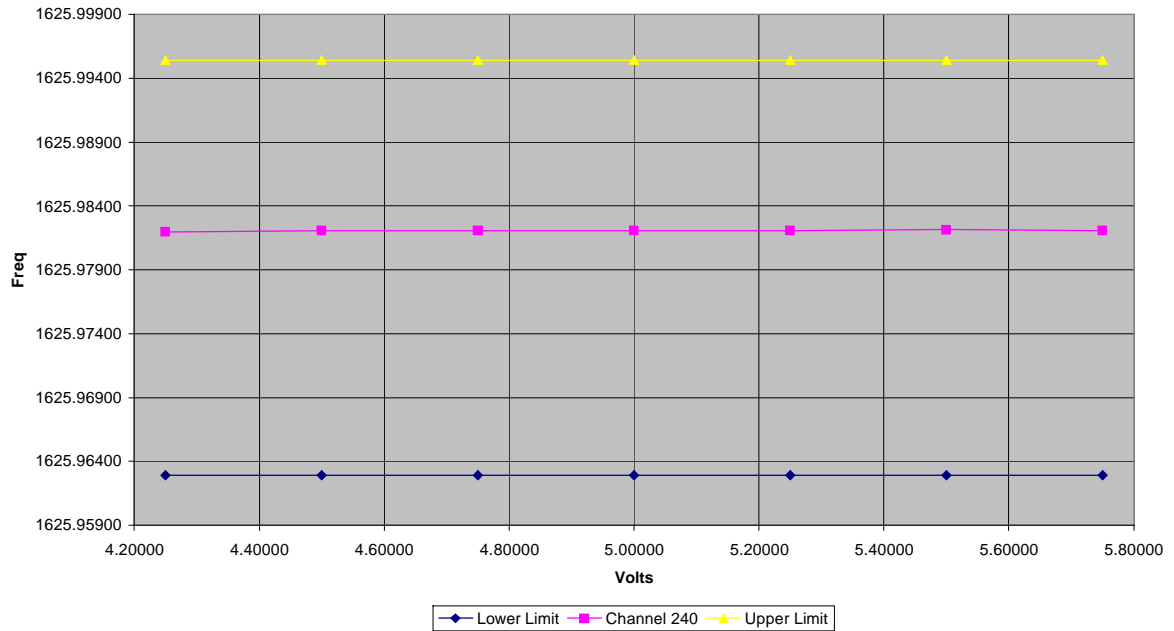


**ANNEX L**

**UNINTENTIONAL TRANSMITTER SPURIOUS EMISSIONS – Radiated**

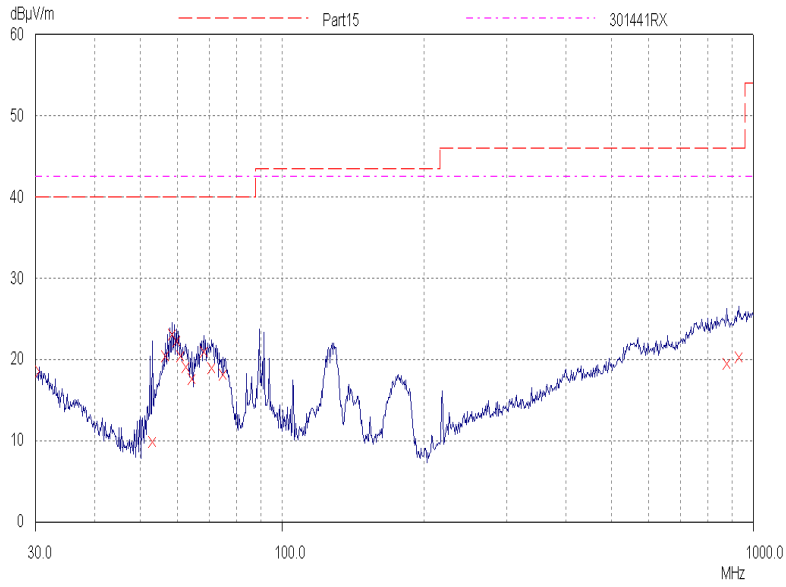


30MHz – 1000MHz

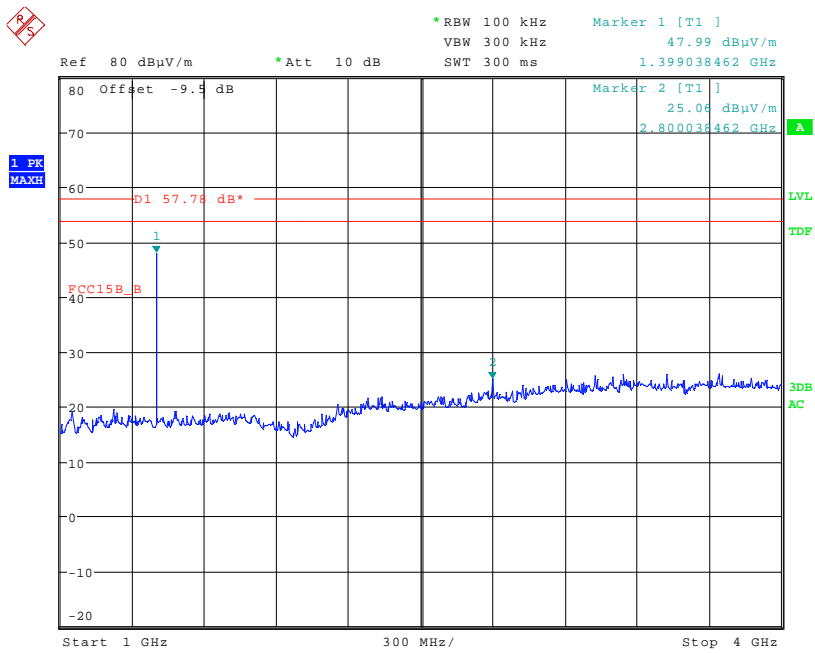


Date: 24.FEB.2010 15:36:55

1GHz – 4GHz

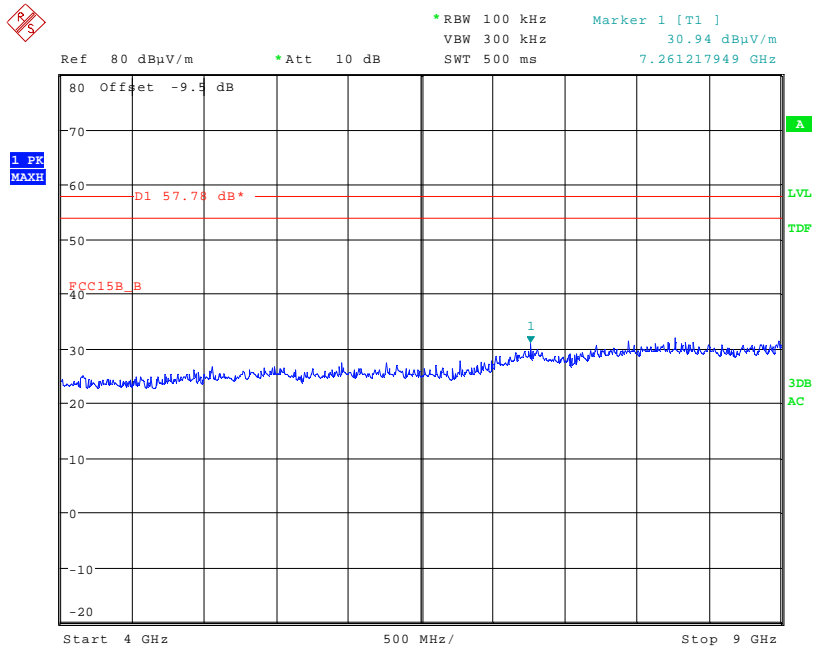


Date: 24.FEB.2010 15:40:02

### 4GHz – 9GHz

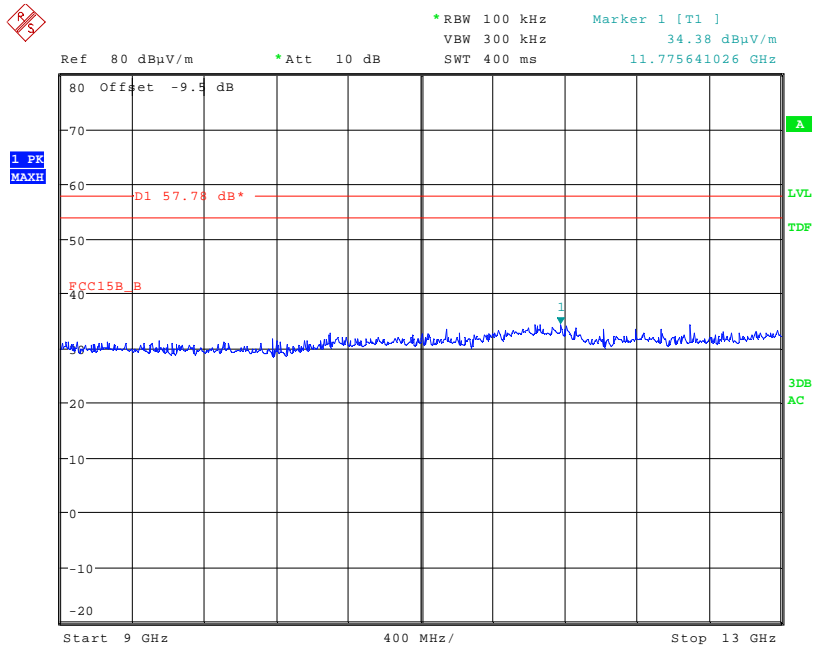

Date: 24.FEB.2010 15:39:42

### 9GHz – 13GHz

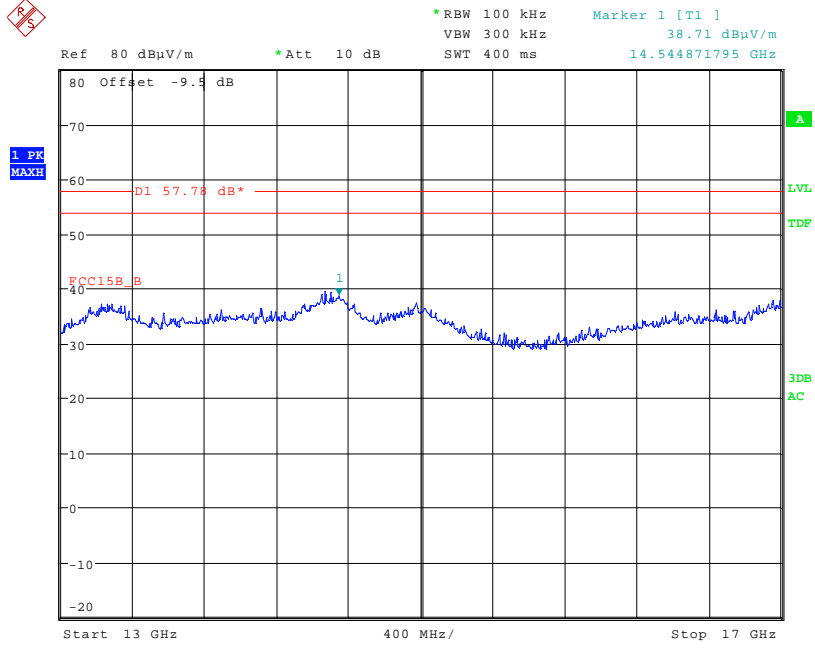


Date: 24.FEB.2010 15:38:42

13GHz – 17GHz

**ANNEX M**  
**CONDUCTED EMISSIONS – AC POWERLINE CONDUCTION**

TRaC EMC Emissions Software - Power line conducted emissions

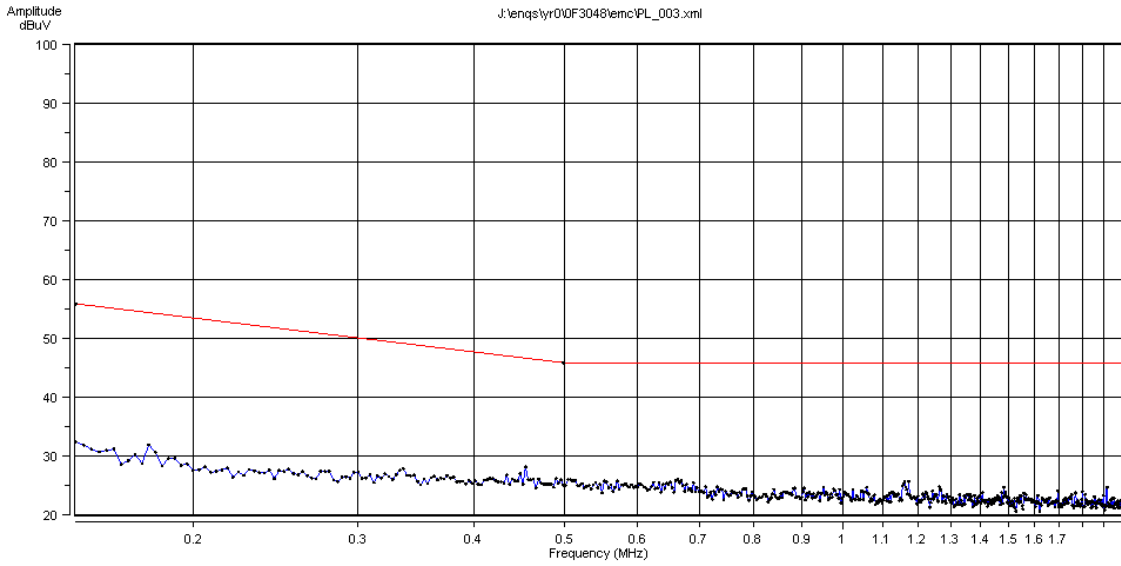


**Test Location:** EMC Ferrite  
**Analyser Type:** ESU40  
**Specification:** EN55022:2006\_B  
**Spec Distance (m):** 0.0  
**Measurement Dist (m):**  
**EUT Names:** 9602  
**Sample Numbers:** S01  
**Assessment:** Live and Neutral test

**Remote Drive Eq.:** HP dc Power Supply  
**Sample Numbers:** REF053  
**Mode/Config/Arrg:** Receive  
**Mod State:** 0  
**Engineer:** Martin Leach  
**Date/Time:** 07/04/2010 14:32:45  
**Job Number:** OF3048

Software Version: 1.9.1.0  
 Copyright © 2009, TRaC Global Ltd.

TRaC EMC Emissions Software - Power line conducted emissions

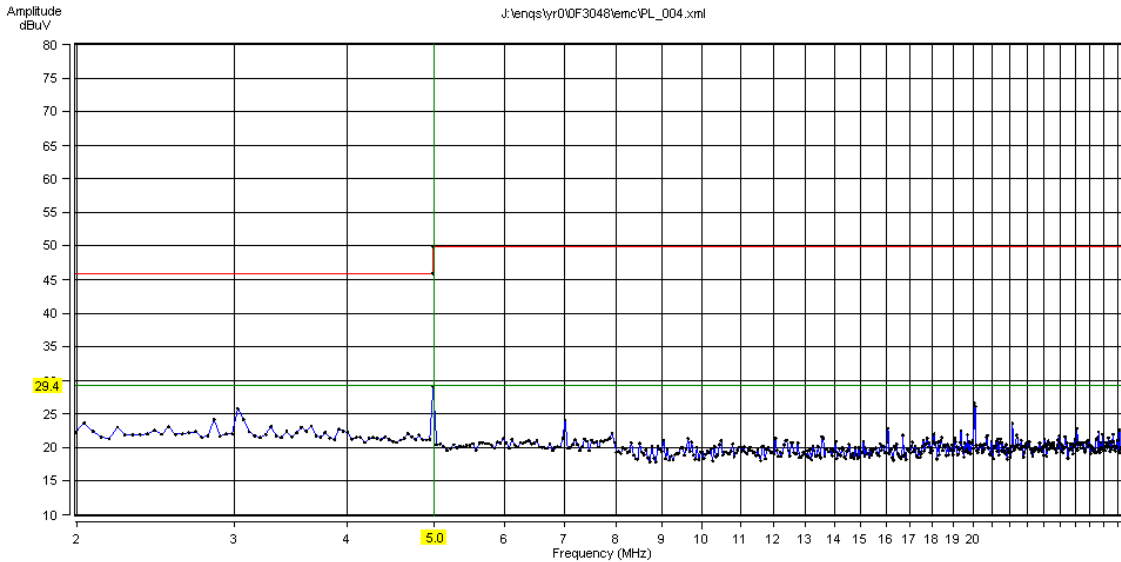

**Test Location:** EMC Ferrite  
**Analyser Type:** ESU40  
**Specification:** EN55022:2006\_B  
**Spec Distance (m):** 0.0  
**Measurement Dist (m):**  
**EUT Names:** 9602  
**Sample Numbers:** S01  
**Assessment:** Live and Neutral test

**Remote Drive Eq.:** HP dc Power Supply  
**Sample Numbers:** REF053  
**Mode/Config/Arrg:** Receive  
**Mod State:** 0  
**Engineer:** Martin Leach  
**Date/Time:** 07/04/2010 14:34:41  
**Job Number:** OF3048

Software Version: 1.9.1.0  
 Copyright © 2009, TRaC Global Ltd.