

CETECOM ICT Services GmbH

Radio Satellite Communication

Untertürkheimer Straße 6-10 . D-66117 Saarbrücken

Telefon: +49 (0)681 598-0

Telefax: -9075

RSC14

issue test report consist of

52 Pages

Page 1 (52)

Recognized by the
Federal Communications Commission
Anechoic chamber registration no: 90462 (FCC)
Anechoic chamber registration no: 3436 (IC)
TCB ID: DE 0001



Accredited by the
German Accreditation Council
DAR-Registration Number

TTL-P-G 166/98



Independent ETSI
compliance test house



Accredited Bluetooth™ Test Facility (BQTF)

Test Report No.:4-1105-01-03/03
FCC Part 15.247 / CANADA RSS-210
CTX 404E V.2
FCC ID: Q6DCTX404EV2

CETECOM – ICT Services GmbH
Untertürkheimerstr. 6-10
66117 Saarbrücken, Germany

Telephone: + 49 (0) 681 / 598-0
Fax: + 49 (0) 681 / 9075

Table of Contents

- 1 General information**
 - 1.1 Notes**
 - 1.2 Testing laboratory**
 - 1.3 Details of applicant**
 - 1.4 Application details**
 - 1.5 Test item**
 - 1.6 Test standards**
- 2 Technical test**
 - 2.1 Summary of test results**
 - 2.2 Test report**

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Telephone : + 49 681 598 - 9100

Telefax : + 49 681 598 - 9075

E-mail : Harro.Ames@ict.cetecom.de

Internet : www.cetecom.de

Accredited testing laboratory

DAR-registration number : TTI-P-G-166/98-30

Accredited Bluetooth™ Test Facility (BQTF)

BLUETOOTH™ is a trademark owned by Bluetooth SIG, Inc. and licensed to CETECOM

1.3 Details of applicant

Name : Creatix Polymedia Gesellschaft für Kommunikationssysteme GmbH
Street : Heinrich-Barth-Str. 3
City : 66115 Saarbrücken
Country : Germany
Telephone: +49 (0) 681 98 11-3 00
Telefax : +49 (0) 681 98 11-3 90
Contact : Herr Frank von Ehren
Telephone: +49 (0) 681 98 11-4 13

1.4 Application details

Date of receipt of application : 2003-08-19
Date of receipt of test item : 2003-08-19
Date of test : 2003-08-19

1.5 Test item

Type of equipment : 2.4 GHz WLAN PCI card 802.11b
Type designation : CTX 404E V.2
Manufacturer : -applicant -
Street :
City :
Country :
Serial number :
FCC ID : Q6DCTX404EV2
Hardware :
Software :

Additional information :

Frequency : 2412 – 2462 MHz
Type of modulation : 22M0P7D (DSSS) Ch.Sep. : 5 MHz
Number of channels : 11
Antenna : external rod antenna with inverted SMA connector
Power supply : 3.3 V via PC slot
Output power cond./rad. : 88.51 mW / 116.68 mW EIRP
Type of equipment : Class B
Temperature range : 0°C - +40°C
Field strength peak : 107.9 dB μ V/m
Occupied bandwidth : 11437 kHz
Transmitter spurious : 46.0 dB μ V/m at 2758.9 MHz
Receiver spurious : 37.5 dB μ /m at 4138 MHz
Temperature range : 0°C - +40°C

1.6 Test standards: FCC Part 15 §15.247 / CANADA RSS-210

Test set-ups:

The tests were performed with a special shielded PC with extender card to get free radiation of the test sample.

We also used special test software to set the samples in the required modes.

We also made a conducted measurement to show the reaction of the sample on the AC line.

2 Technical test

2.1 Summary of test results

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform with specifications ANSI C63.2-1987 clause 15 and ANSI C63.4-1992 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received.

The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-1992 clause 4.2.

Antennas are conform with ANSI C63.2-1996 item 15.

9 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

>1GHz: Average, RBW 1MHz, VBW 10 Hz, wave-guide horn

All measurement settings are according to FCC 15.35, 15.205, 15.209, 15.247 and the „Measurement guidelines for DSSS systems“.

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

The product fulfills also the requirements for CANADA RSS-210.

FINAL VERDICT : PASS

Technical responsibility for area of testing :

2003-08-26

RSC 8414 Ames H.

Date

Section

Name

Signature

Technical responsibility for area of testing :

2003-08-26

RSC8412 Hausknecht D.

Date

Section

Name

Signature

2.2 Test report

TEST REPORT

Test report no. : 4-1105-01-03/03

TEST REPORT REFERENCE

LIST OF MEASUREMENTS

PARAMETER TO BE MEASURED	PAGE
Antenna Gain SUBCLAUSE § 15.204	8
Spectrum Bandwith of a DSSS System §15.247(a)	9
MAXIMUM PEAK OUTPUT POWER SUBCLAUSE § 15.247 (b) (1)	13
MPE calculation	18
Power spectral density §15.247 (d)	19
Band-edge compliance of conducted emissions §15.247 (c)	23
EMISSION LIMITATIONS- Conducted (Transmitter) § 15.247 (c) (1)	29
SPURIOUS EMISSION (radiated) § 15.247 (c) (1)	33
Conducted emissions § 15.107/207	39
EMISSION LIMITATIONS- Receiver radiated § 15.209	41
TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	45
Test site	47
Photographs of the equipment	50

Antenna Gain SUBCLAUSE § 15.204

The antenna gain of the complete system is calculated by the difference of conducted power of the module and the radiated power in EIRP.

	low channel	mid channel	high channel
Conducted power	19.26 dBm	19.47 dBm	19.17 dBm
Radiated power (EIRP)	20.48 dBm	20.67 dBm	20.35 dBm
Gain	1.22 dBi	1.20 dB	1.18 dB

The calculated antenna gain is about 1.2 dBi for the dedicated antenna.

Spectrum Bandwith of a DSSS System

§15.247(a)

6 dB bandwidth

TEST CONDITIONS		6 dB BANDWIDTH (kHz)		
		2412	2437	2462
Frequency (MHz)		2412	2437	2462
T _{nom} (23.0)?C	V _{nom} (3.3)V	10621	11473	11373
Measurement uncertainty		±1kHz		

RBW / VBW as provided in the „Measurement Guidelines“ (DA 00-705, March 30, 2000)

LIMIT

SUBCLAUSE §15.247(a) (2)

The minimum 6dB bandwith shall be at least 500 KHz


Spectrum Bandwith of a DSSS System

§15.247(a)

6 dB bandwidth

Channel 1

	Delta 1 [T1]	RBW	100 kHz	RF Att	30 dB
	Ref Lvl	1.41 dB	VBW	100 kHz	
	3.1 dBm	10.62124248 MHz	SWT	6.5 ms	Unit

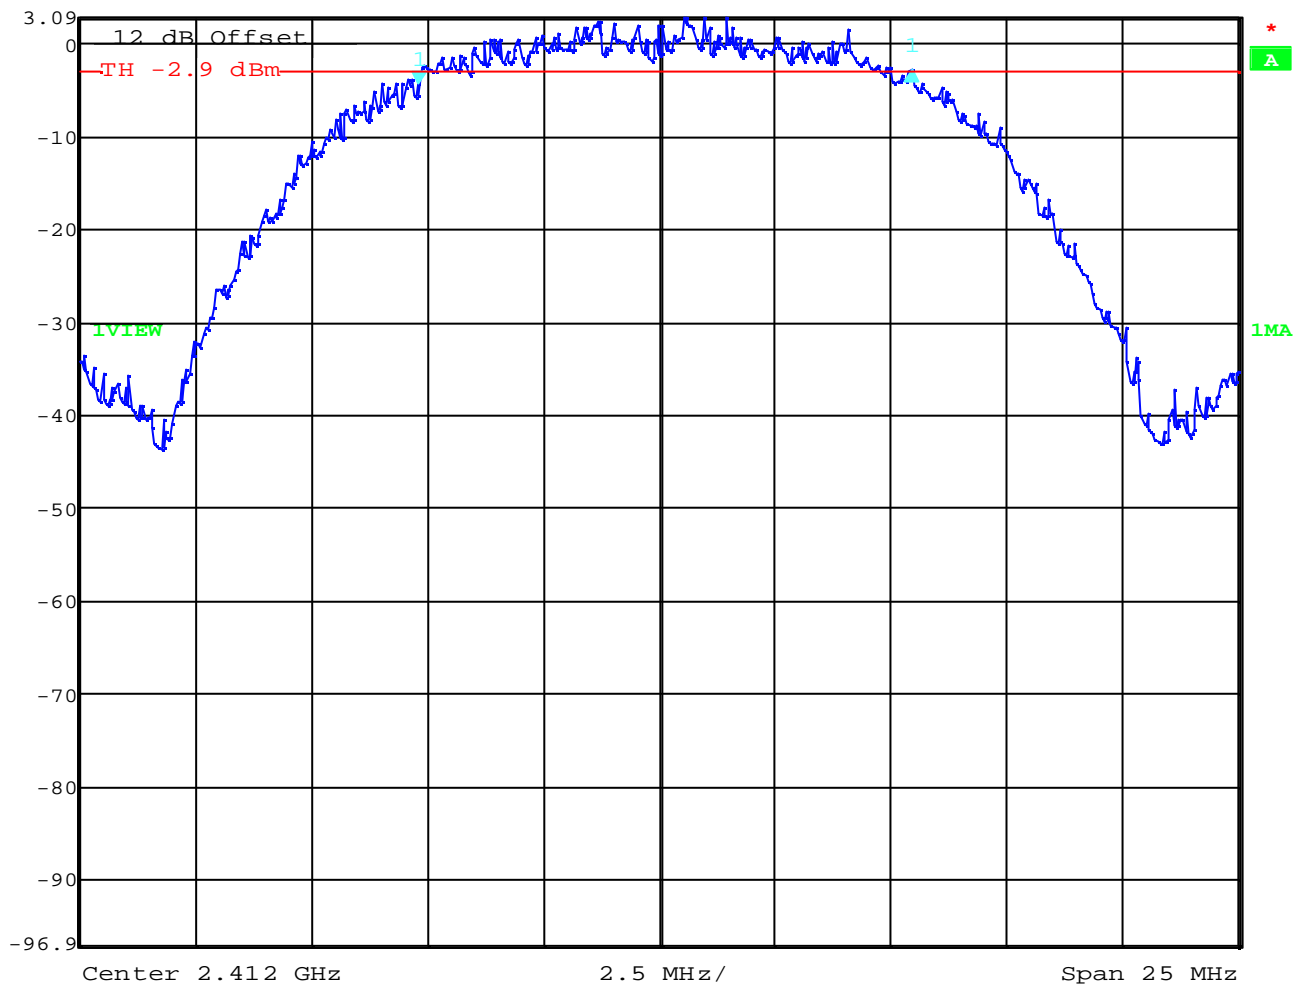

Date: 22.AUG.2003 08:51:54

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


Spectrum Bandwith of a DSSS System

§15.247(a)

6 dB bandwidth

Channel 6

	Delta 1 [T1]	RBW	100 kHz	RF Att	30 dB
	Ref Lvl	-0.17 dB	VBW	100 kHz	
	3 dBm	11.47294589 MHz	SWT	6.5 ms	Unit dBm

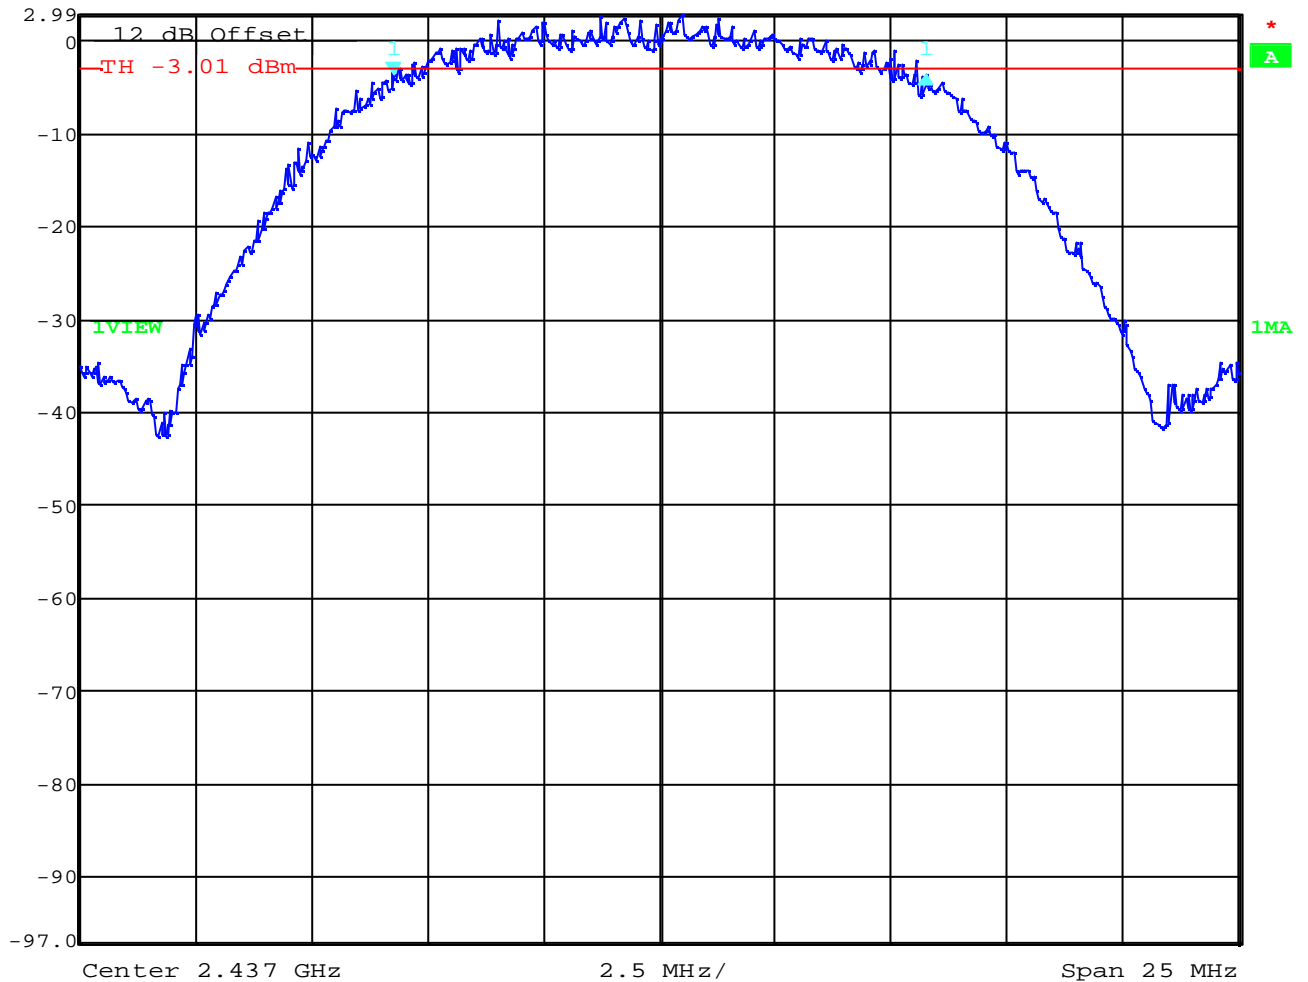

Date : 22.AUG.2003 08:53:36

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


Spectrum Bandwidth of a DSSS System

§15.247(a)

6 dB bandwidth

Channel 11:

	Delta 1 [T1]	RBW	100 kHz	RF Att	30 dB
	Ref Lvl	0.69 dB	VBW	100 kHz	
	2.4 dBm	11.37274549 MHz	SWT	6.5 ms	Unit dBm

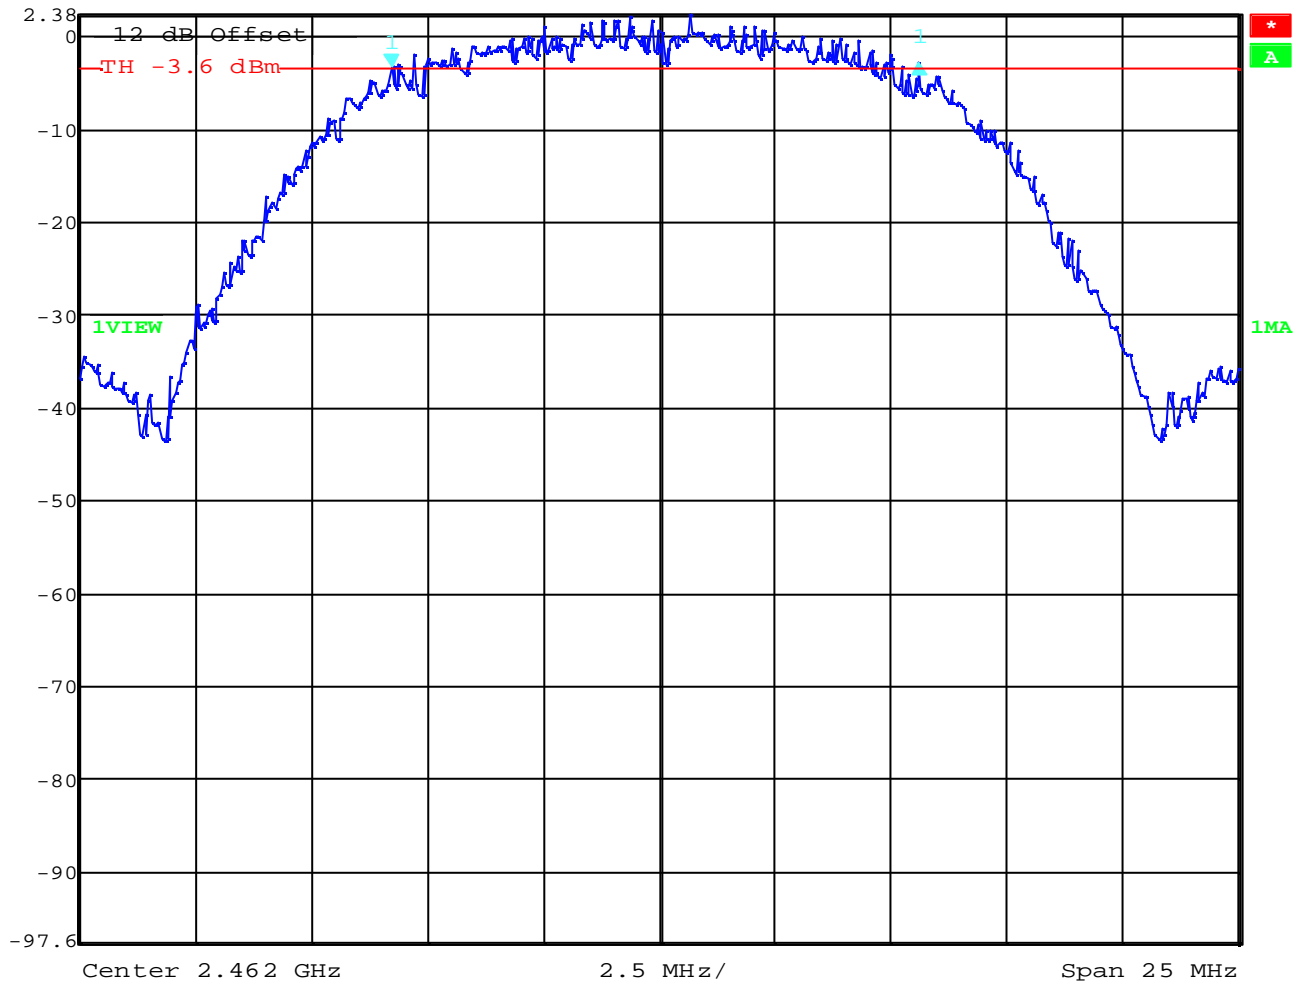

Date: 22.AUG.2003 08:54:53

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

**MAXIMUM PEAK OUTPUT POWER
(CONDUCTED)**

SUBCLAUSE § 15.247 (b) (1)

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
		2412	2437	2462
Frequency (MHz)				
T _{nom} (23.0)?C	V _{nom} (3.3)V	Peak :19.00 AV : 12.47	Peak :18.88 AV : 12.06	Peak :18.61 AV : 11.46
Correction factor		+0.26 dB	+0.59 dB	+0.56 dB
Final corrected result		Peak :19.26 AV : 12.73	Peak :19.47 AV : 12.65	Peak :19.17 AV : 12.02
Measurement uncertainty		±0.5dB		

RBW/VBW : 10 MHz

The correction factor is calculated by $10 \cdot \log (\text{measured BW} / \text{used BW})$ (dB)

LIMIT

SUBCLAUSE § 15.247 (b) (1)

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt/ 30dBm


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

**MAXIMUM PEAK OUTPUT POWER
(CONDUCTED)**

SUBCLAUSE § 15.247 (b) (1)

low channel peak

	Marker 1 [T1]	RBW	10 MHz	RF Att	30 dB
	Ref Lvl	19.00 dBm	VBW	10 MHz	
	25 dBm	2.41335271 GHz	SWT	5 ms	Unit
					dBm

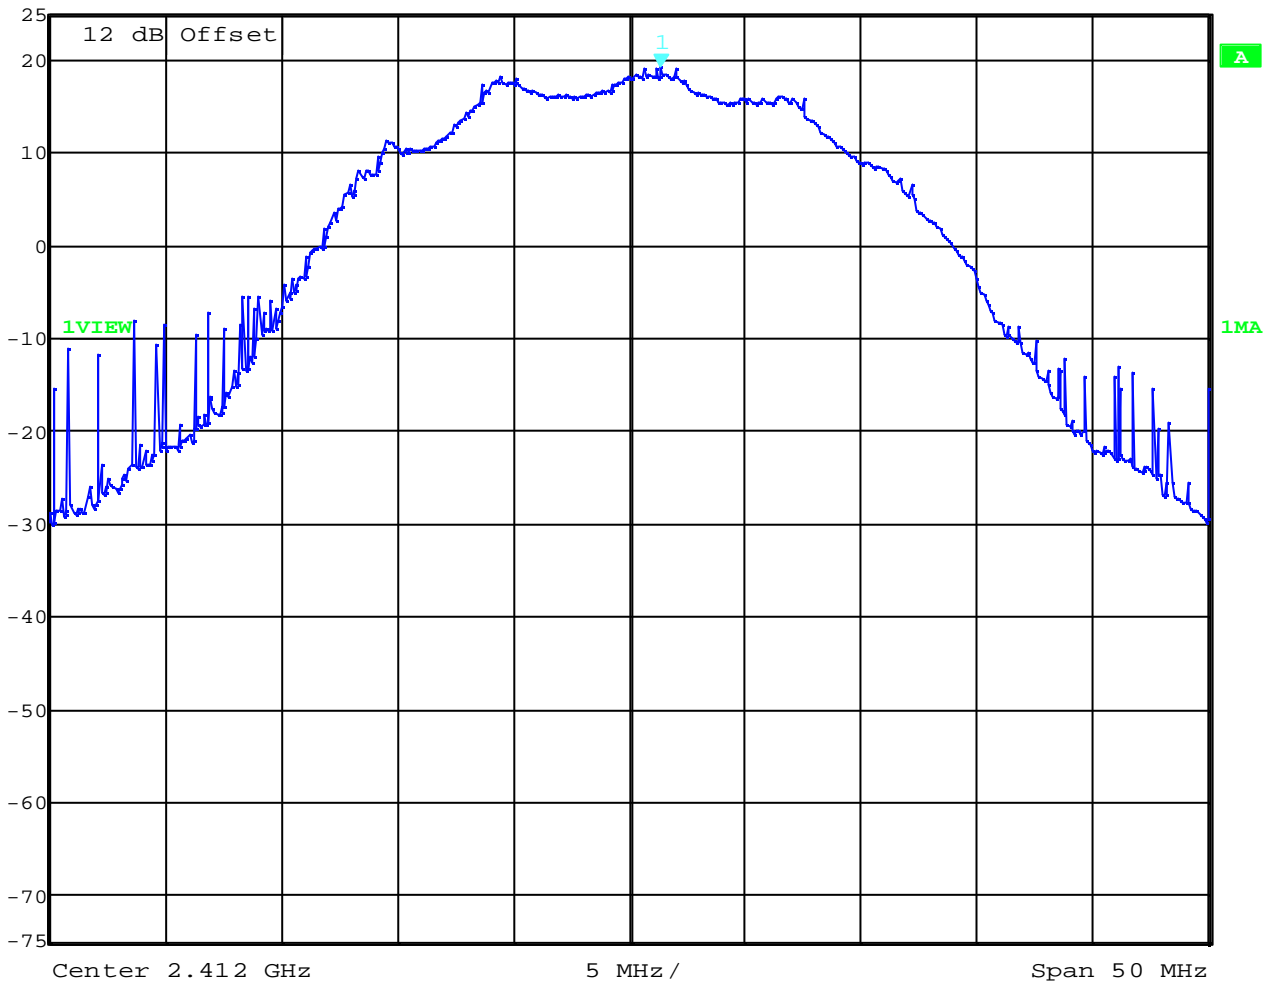


Date : 22.AUG.2003 08:59:11

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

**MAXIMUM PEAK OUTPUT POWER
(CONDUCTED)**

SUBCLAUSE § 15.247 (b) (1)

mid channel peak

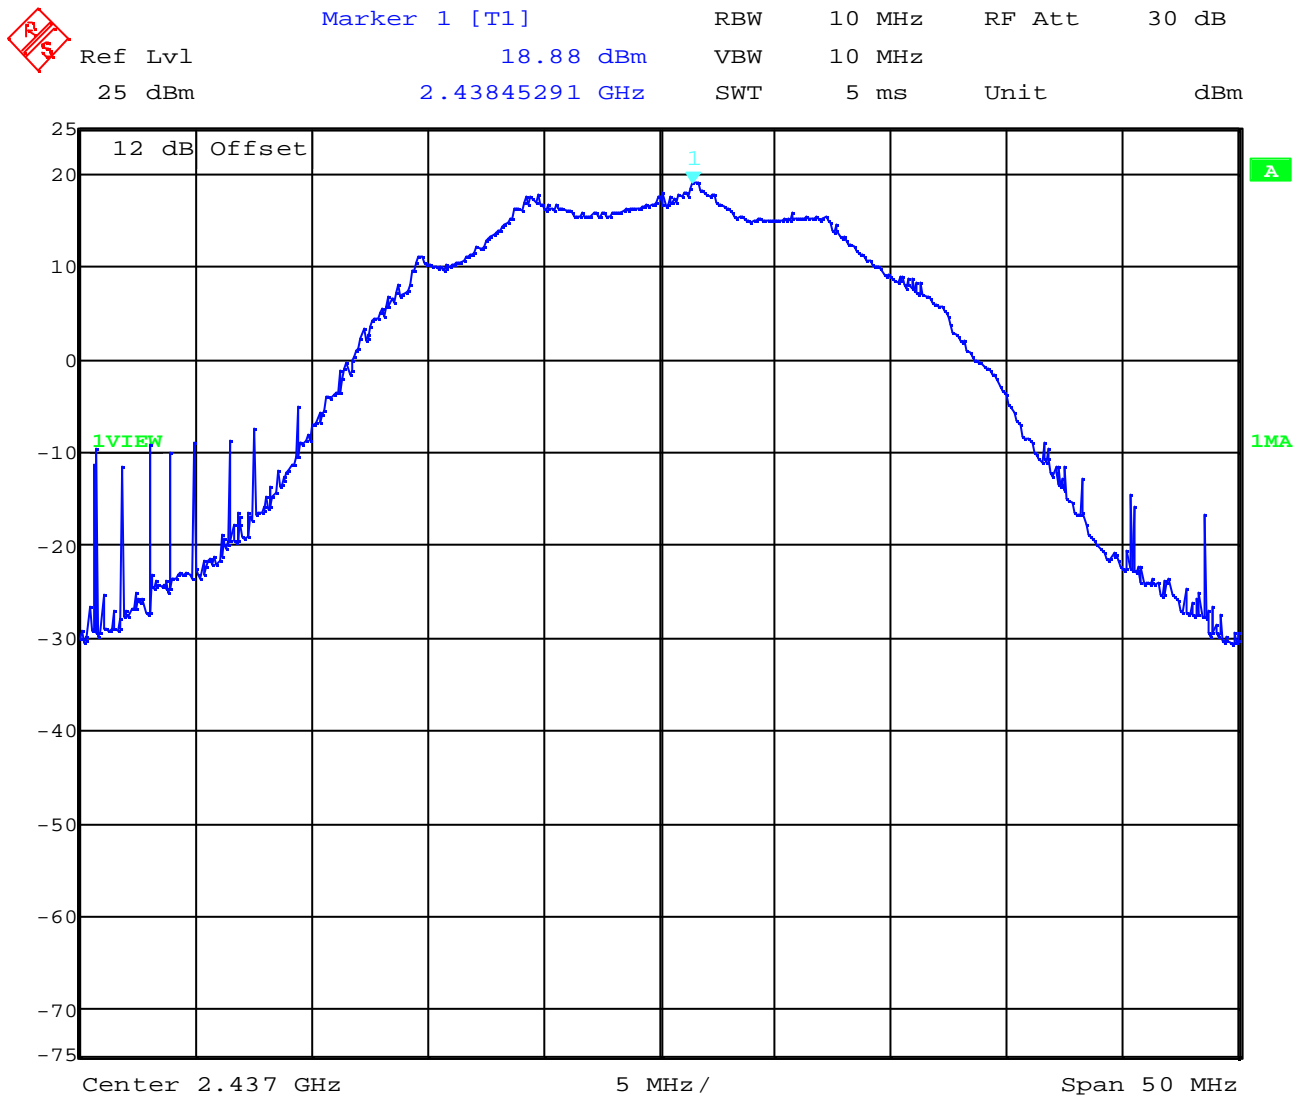

Date: 22.AUG.2003 09:00:21

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)**


**MAXIMUM PEAK OUTPUT POWER
(CONDUCTED)**

SUBCLAUSE § 15.247 (b) (1)

high channel peak



	Marker 1 [T1]	RBW	10 MHz	RF Att	30 dB
Ref Lvl	18.61 dBm	VBW	10 MHz		
25 dBm	2.46325251 GHz	SWT	5 ms	Unit	dBm

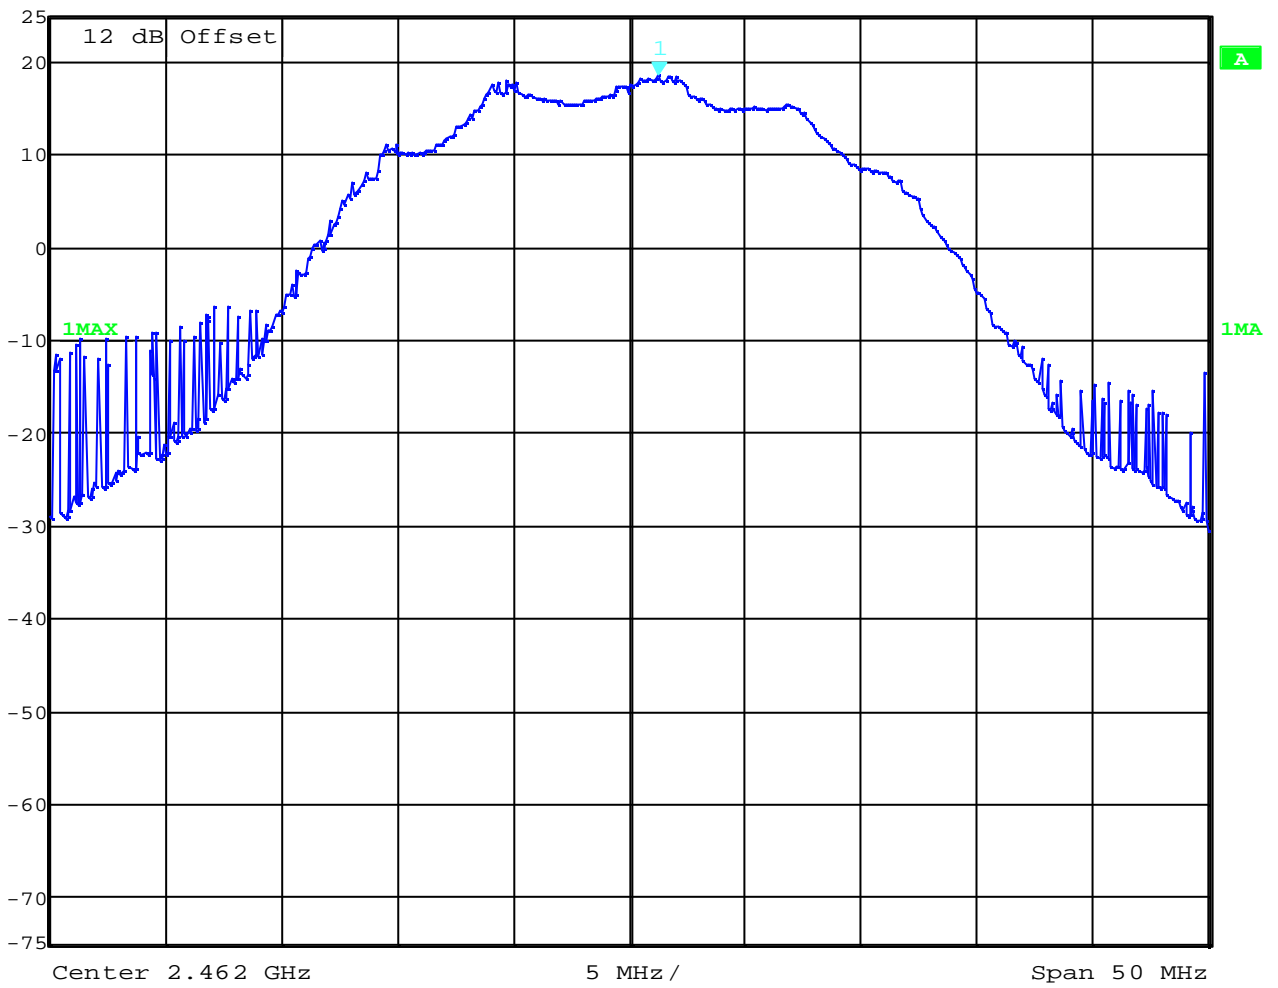

Date: 22.AUG.2003 09:01:30

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

**MAXIMUM PEAK OUTPUT POWER
(RADIATED)**

SUBCLAUSE § 15.247 (b) (1)

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (mW)		
		2412	2437	2462
Frequency (MHz)				
T _{nom} (23.0)?C	V _{nom} (3.3)V	105.20 mW 20.22 dBm	101.86 mW 20.08 dBm	95.28 mW 19.79 dBm
Correction factor		+0.26 dB	+0.59 dB	+0.56 dB
Final corrected result		111.69 mW 20.48 dBm	116.68 mW 20.67 dBm	108.39 mW 20.35 dBm
Measurement uncertainty		±3dB		

RBW/VBW : 10 MHz

The correction factor is calculated by $10 \cdot \log(\text{measured BW} / \text{used BW})$ (dB)

Measured at a distance of 3m

LIMIT

SUBCLAUSE § 15.247 (b) (1)

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt / 30 dBm

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

MPE calculation

These equations are generally accurate in the far field of an antenna but will over predict power density in the near field, where they could be used for making a “worst case” prediction.

$$S = PG/4\pi R^2$$

where S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units e.g. mW)

G = power gain of the antenna in the direction of interest relative to the isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units e.g. cm)

or,

$$S = EIRP/4\pi R^2$$

where EIRP = equivalent isotropically radiated power

Calculation:

(Calculated for max. EIRP)

EIRP: 20.67 dBm (116.68 mW)

calculated at distance of 20 cm

$$\begin{aligned} \text{power density} &= 116.68/4\pi 20^2 \\ &= 0.0232 \text{ mW/ cm}^2 \end{aligned}$$

Limit:

1mW/ cm² is the reference level for general public exposure according to the OET Bulletin 65, Edition 97-01 Table 1.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Power spectral density

§15.247 (d)

TEST CONDITIONS		RF POWER LEVEL IN 3 kHz BW		
		2412	2437	2462
Frequency (MHz)				
T _{nom} (22.4)?C	V _{nom} (3.3)V	-11.16 dBm	-12.49 dBm	-12.64 dBm
Measurement uncertainty		±3dB		

The measurement was performed with the power density funktion of the analyzer.

LIMIT

SUBCLAUSE §15.247(d)


The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band

POWER SPECTRAL DENSITY
2412 MHz

SUBCLAUSE § 15.247 (d)



Marker 1 [T1] RBW 3 kHz RF Att 30 dB
 Ref Lvl -11.16 dBm VBW 3 kHz
 25 dBm 2.41213978 GHz SWT 420 ms Unit dBm

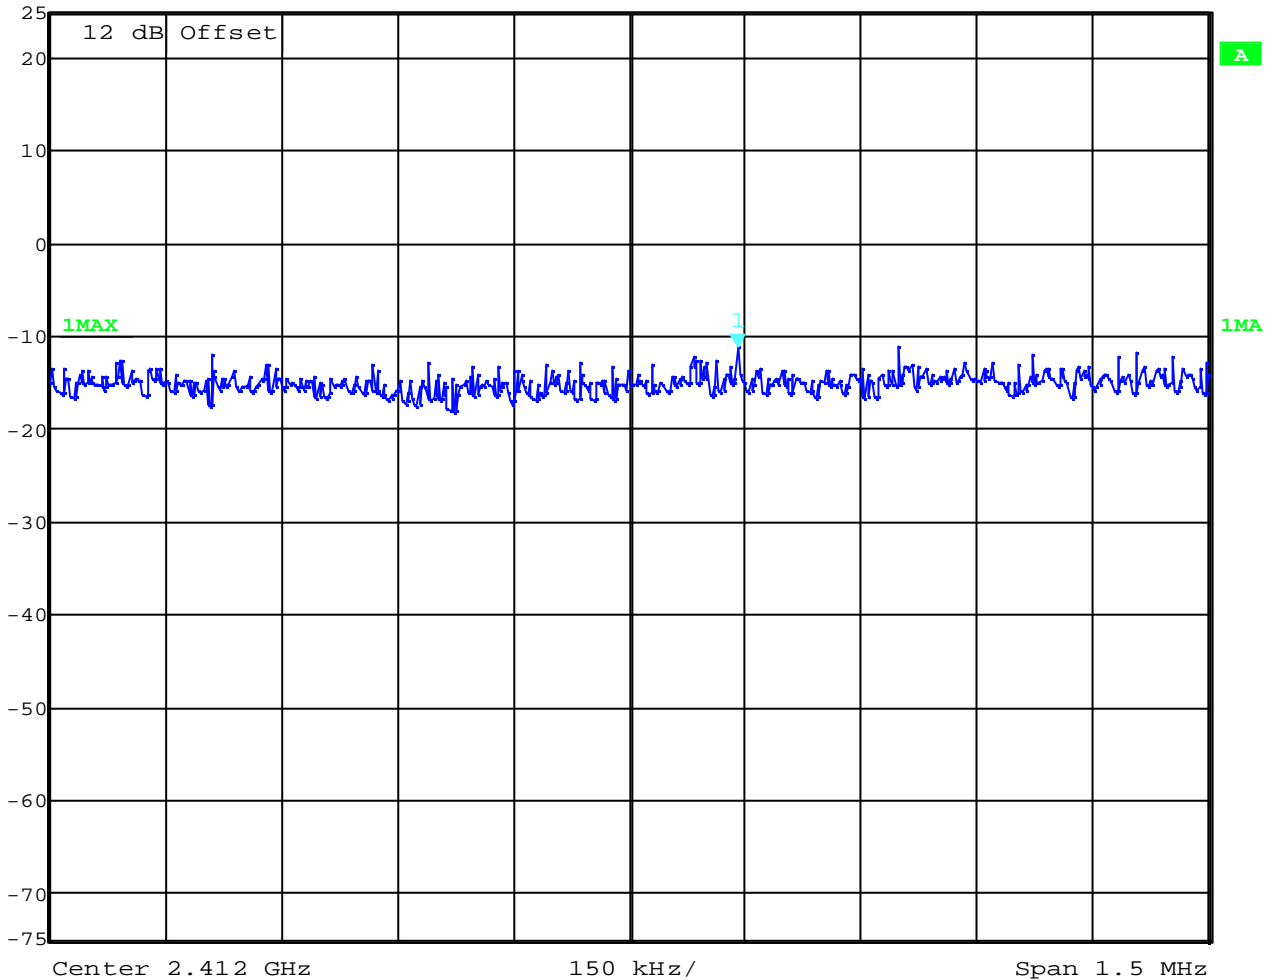

Date: 22.AUG.2003 09:08:48

LIMIT

SUBCLAUSE §15.247(d)

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

POWER SPECTRAL DENSITY
2437 MHz

SUBCLAUSE § 15.247 (d)



Marker 1 [T1] RBW 3 kHz RF Att 30 dB
 Ref Lvl -12.49 dBm VBW 3 kHz
 25 dBm 2.43634018 GHz SWT 420 ms Unit dBm

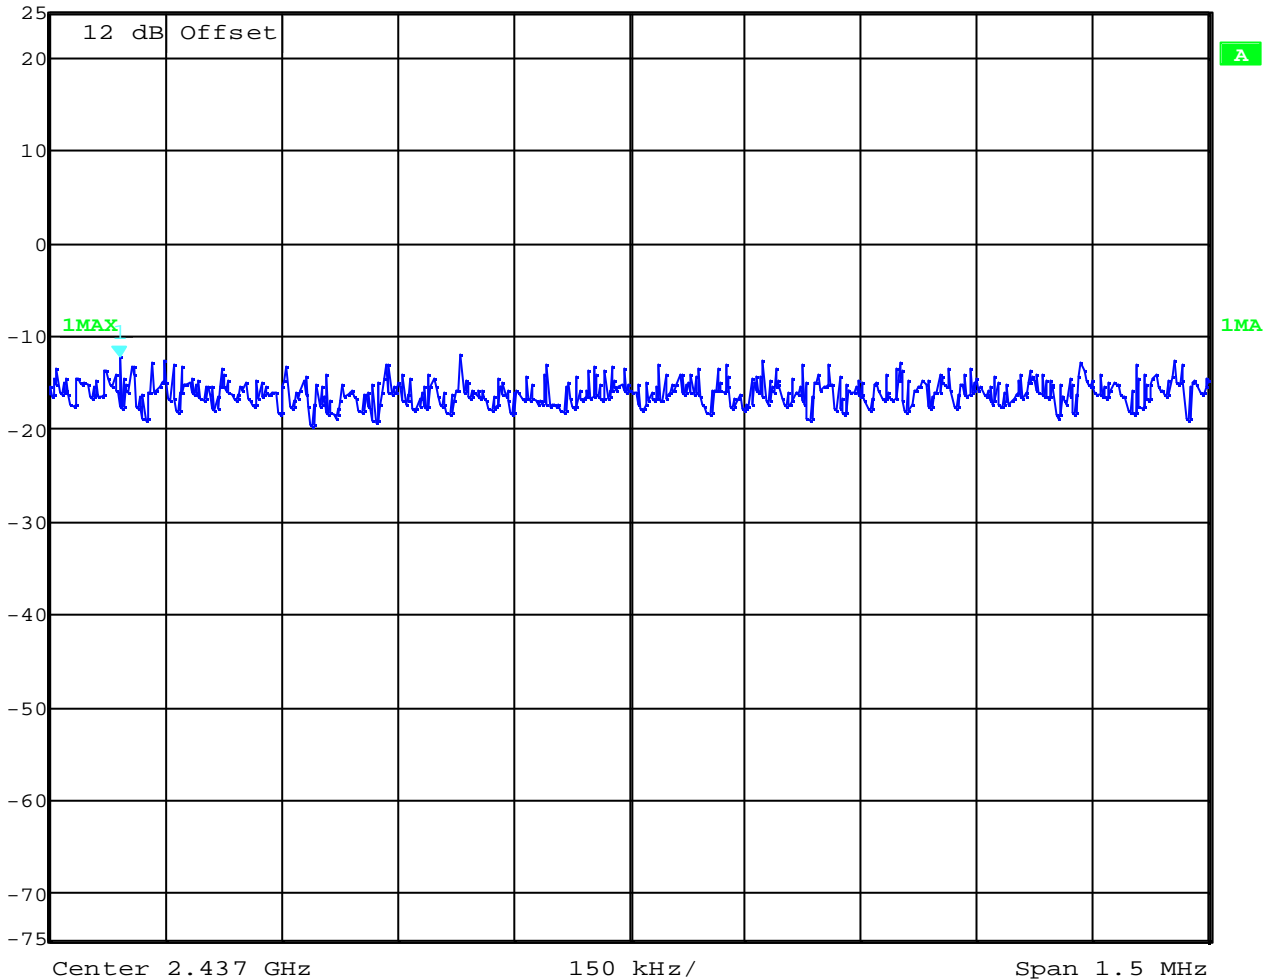

Date: 22.AUG.2003 09:09:38

LIMIT

SUBCLAUSE §15.247(d)

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

POWER SPECTRAL DENSITY

SUBCLAUSE § 15.247 (d)

2462 MHz



Marker 1 [T1]


RBW 3 kHz RF Att 30 dB

Ref Lvl -12.64 dBm

VBW 3 kHz

25 dBm 2.46222695 GHz

SWT 420 ms Unit dBm

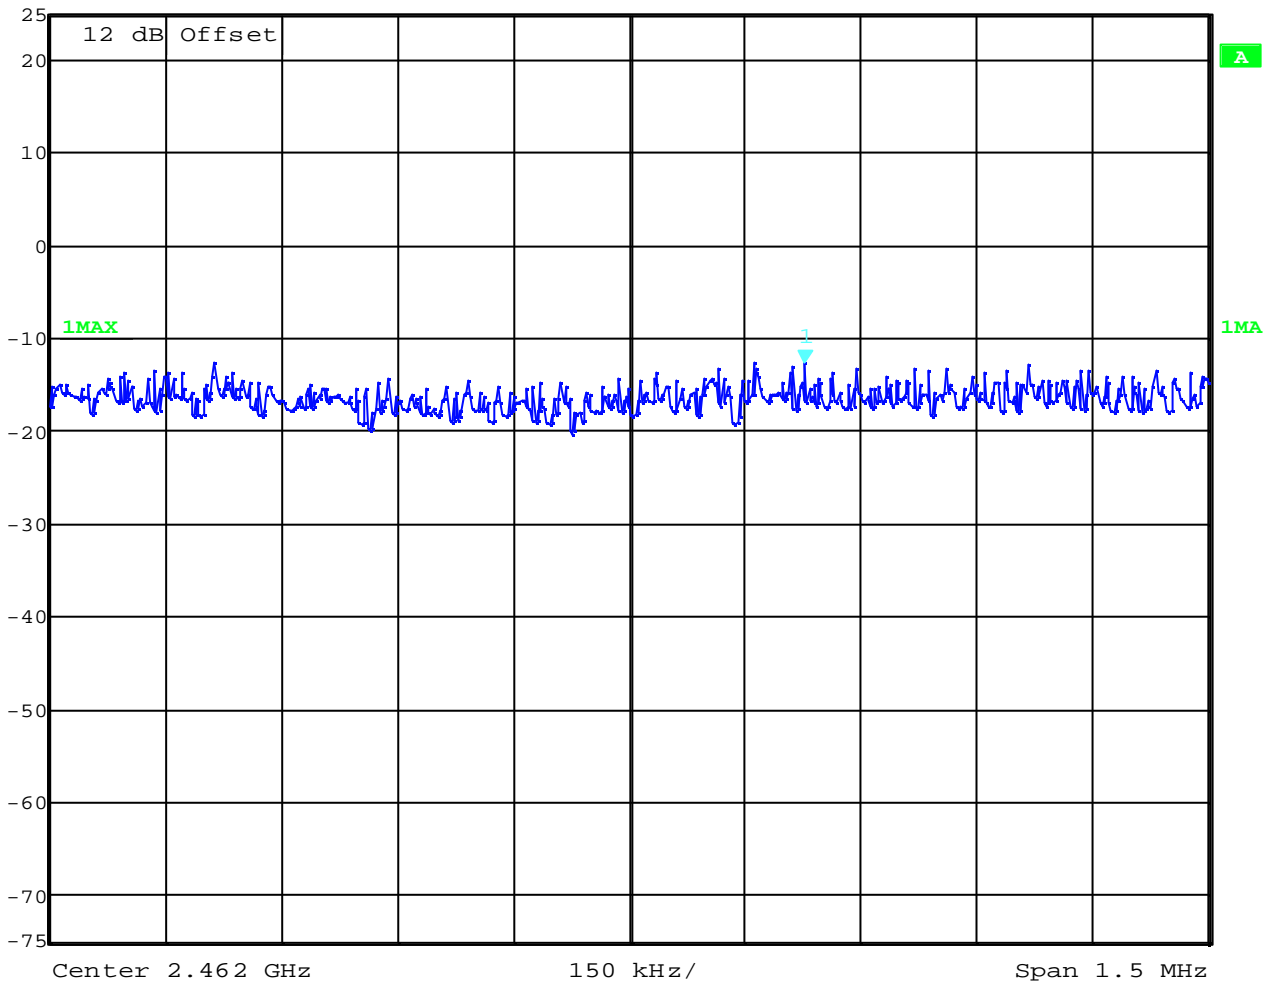

Date: 22.AUG.2003 09:10:28

LIMIT

SUBCLAUSE §15.247(d)


The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Band-edge compliance of conducted emissions

§15.247 (c)

Low channel

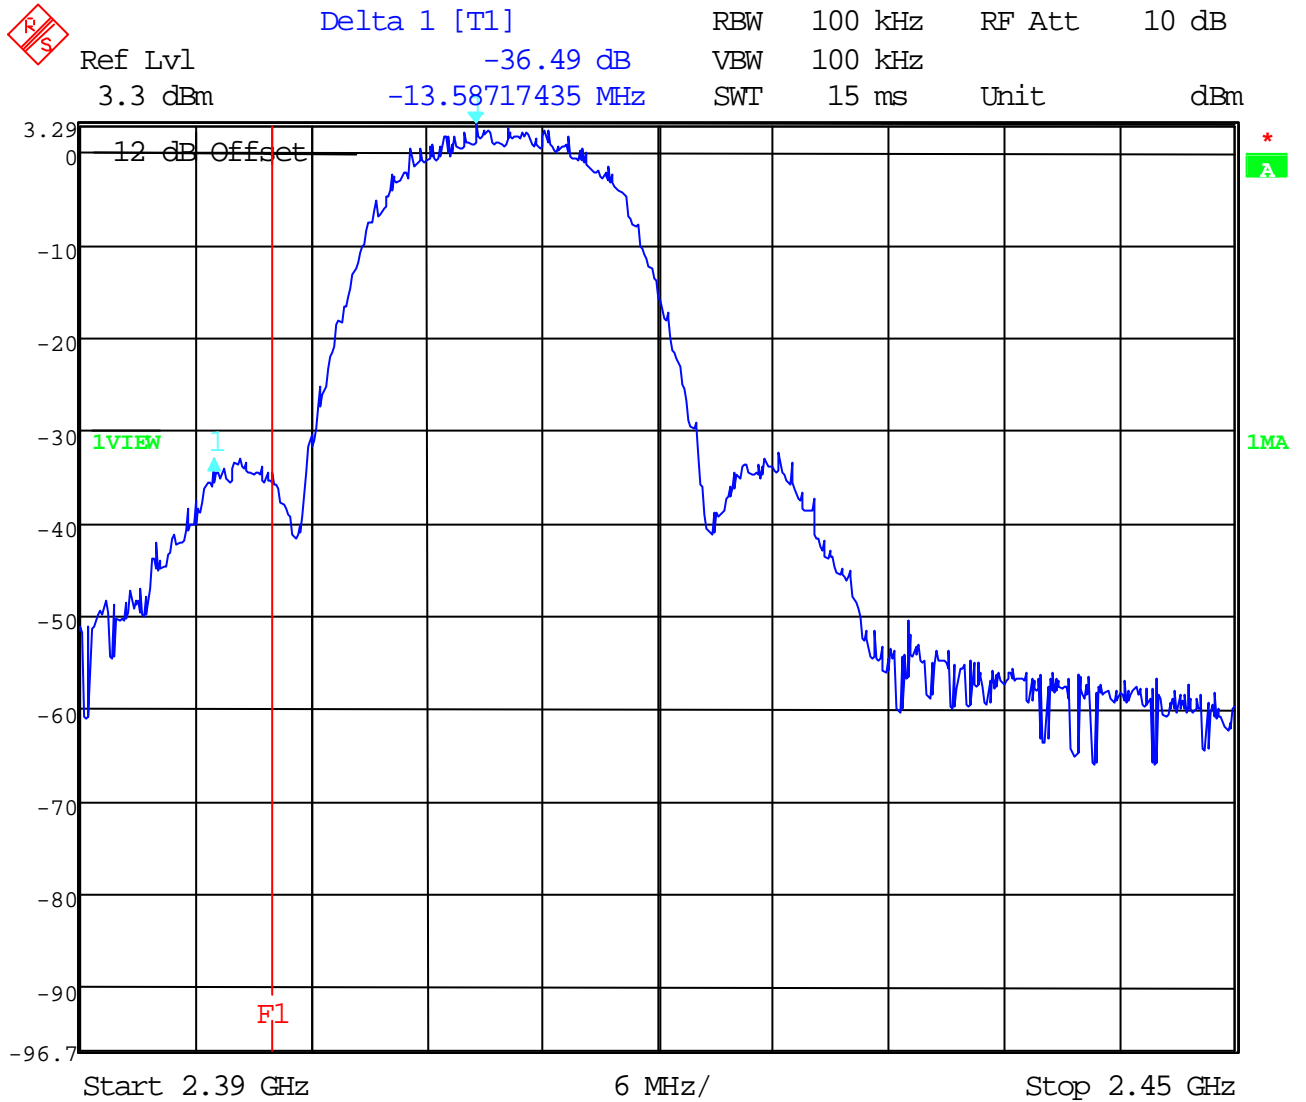

Date: 22.AUG.2003 09:12:48


Delta dB = 36.49 dB

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Band-edge compliance of conducted emissions

§15.247 (c)

high channel

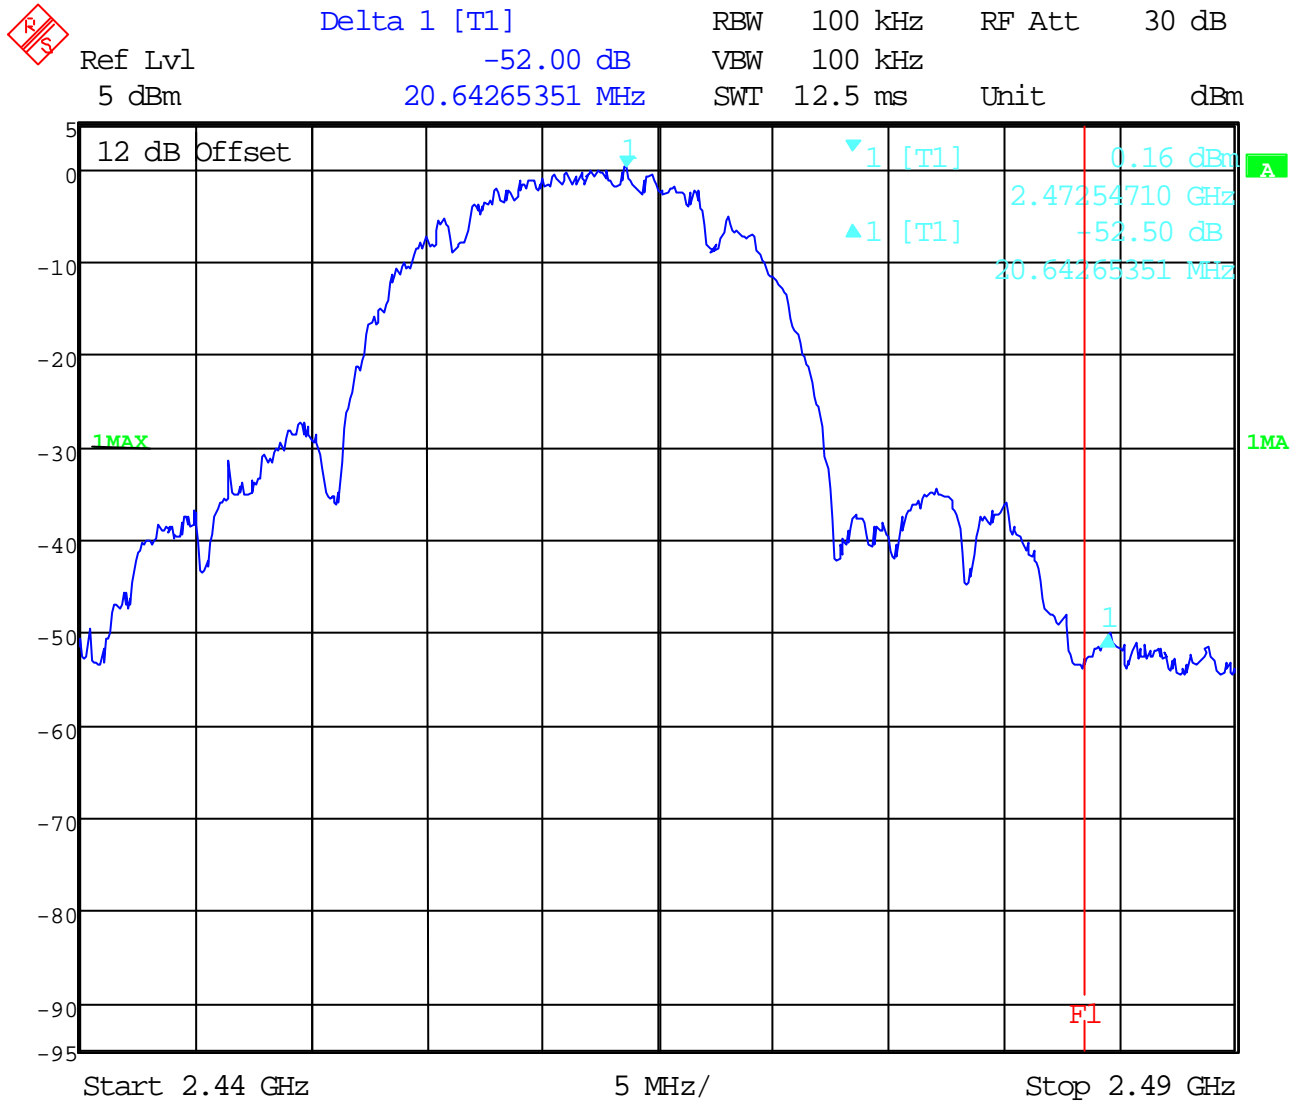

Date: 22.AUG.2003 09:18:10


Delta dB = 52.0 dB

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Band-edge compliance radiated

§15.247 (c)

Max. field strength in 3m distance average

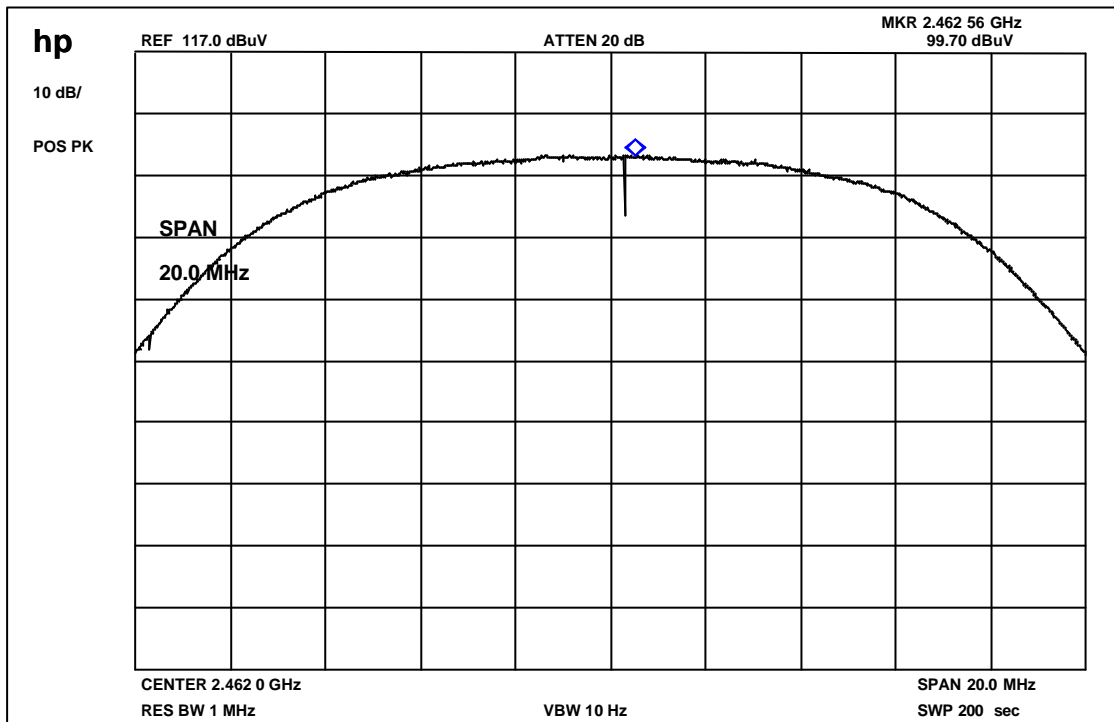


Frequency	Meter reading	Cable loss	Antenna factor	Results
2462 MHz	99.70 dB μ V	7.8 dB	-7.2	100.30 dB μ V/m

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Band-edge compliance radiated

§15.247 (c)

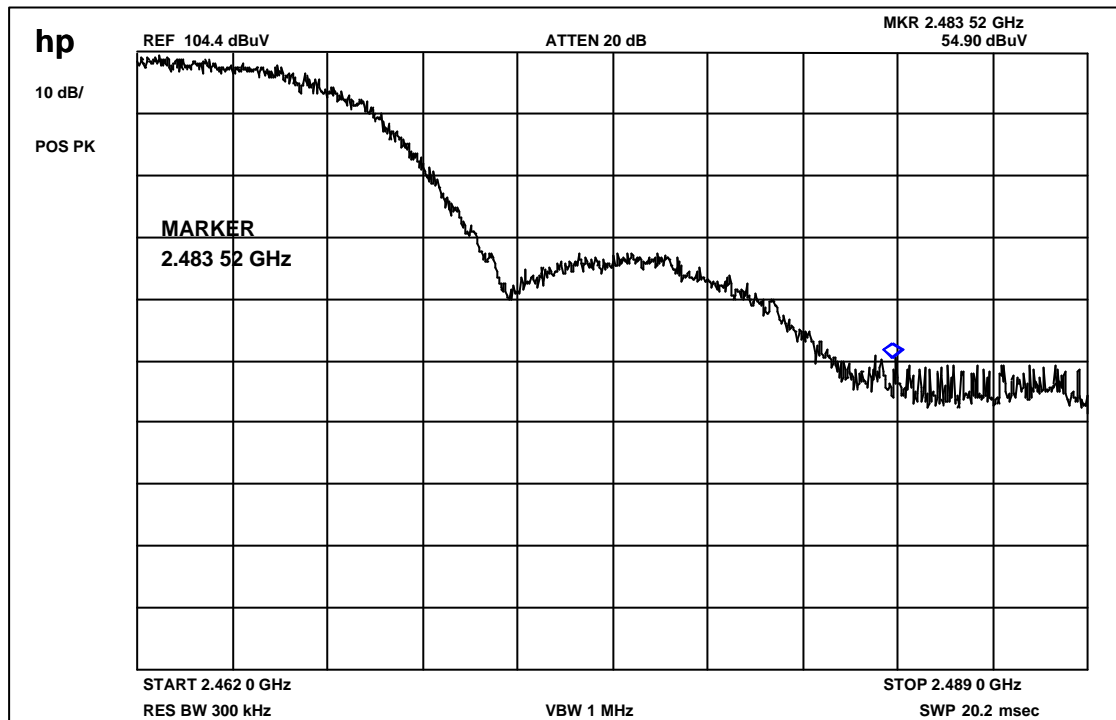


Delta dB = 49.5 dB

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Band-edge compliance radiated (restricted band 2483.5 – 2500 MHz)

§15.247 (c)

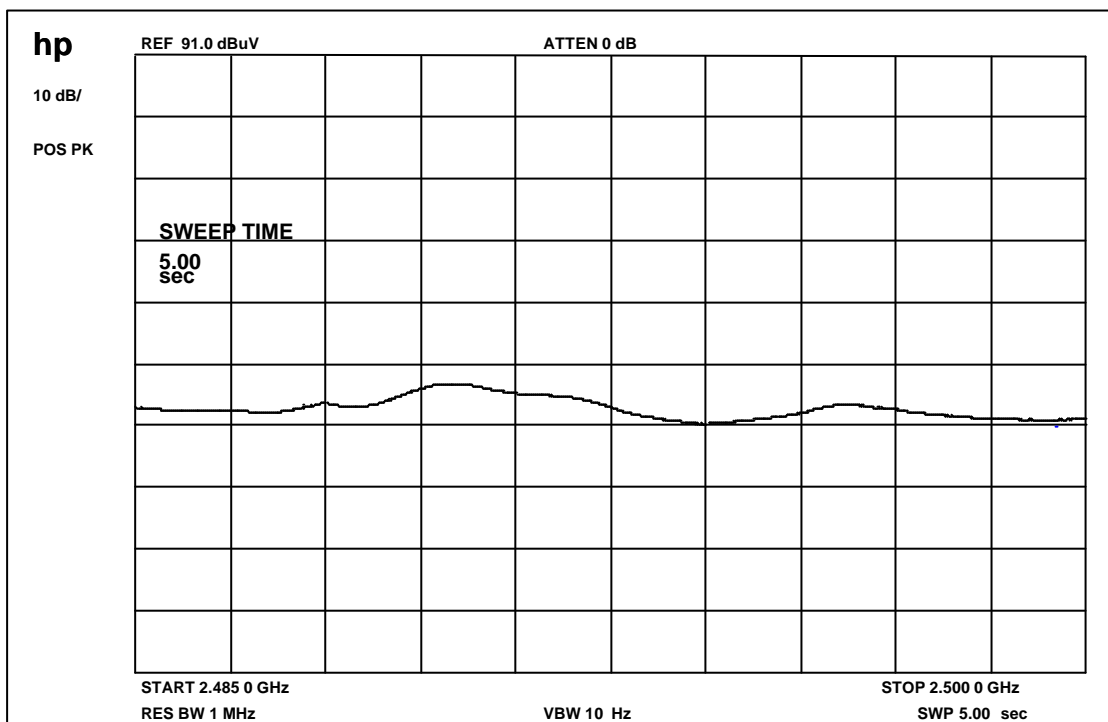

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Band-edge compliance of radiated emissions

§15.205

Radiated field strength

The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.

high channel	setup	measured value (3m)	correction factor (3m)	calculated value (3m)
Max. peak value	1 MHz RBW 1 MHz VBW	107.30 dB μ V/m	+0,6 dB	107.90 dB μ V/m
Max. average value	1 MHz RBW 10 Hz VBW	99.70	+0,6 dB	100.30 dB μ V/m
Delta value	Peak 300 kHz RBW/VBW	49.5 dB	-	-
Value at band edge	limit 54 dB μ V/m			50.80 dB μ V/m
Statement:				Complies

The product complies with the limit of the restricted bands.

Delta marker plots see above pages

EMISSION LIMITATIONS- Conducted (Transmitter)

§ 15.247 (c) (1)

EMISSION LIMITATIONS					
f (MHz)		amplitude of emission (dBm)	limit max. allowed emission power	actual attenuation below frequency of operation (dB)	results
2412		19.00	30 dBm	-	Operating frequency
100.2		-51.70	-20 dBc (-1.00 dBm)	70.70	complies
2437		18.88	30 dBm	-	Operating frequency
100.2		-51.00	-20 dBc (-1.12 dBm)	69.88	complies
2462		18.61	30 dBm		Operating frequency
100.2		-51.30	-20 dBc (-1.39 dBm)	69.91	complies
4901		-57.86		76.47	complies
7365		-55.16		73.77	complies
Measurement uncertainty		± 3dB			

RBW : 100 kHz

VBW: 100 kHz

For emissions that fall into restricted bands you find the radiated emissions later in the report.

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


SPURIOUS EMISSION LIMITATION CONDUCTED

§ 15.247 (c) (1)

No peak found < 20 dB below Limit (20dBc)

Low channel

Marker 2 [T1]
RBW 100 kHz
RF Att 10 dB
Ref Lvl 1.28 dBm
VBW 100 kHz
10 dBm
2.40481775 GHz
SWT 6.4 s
Unit dBm

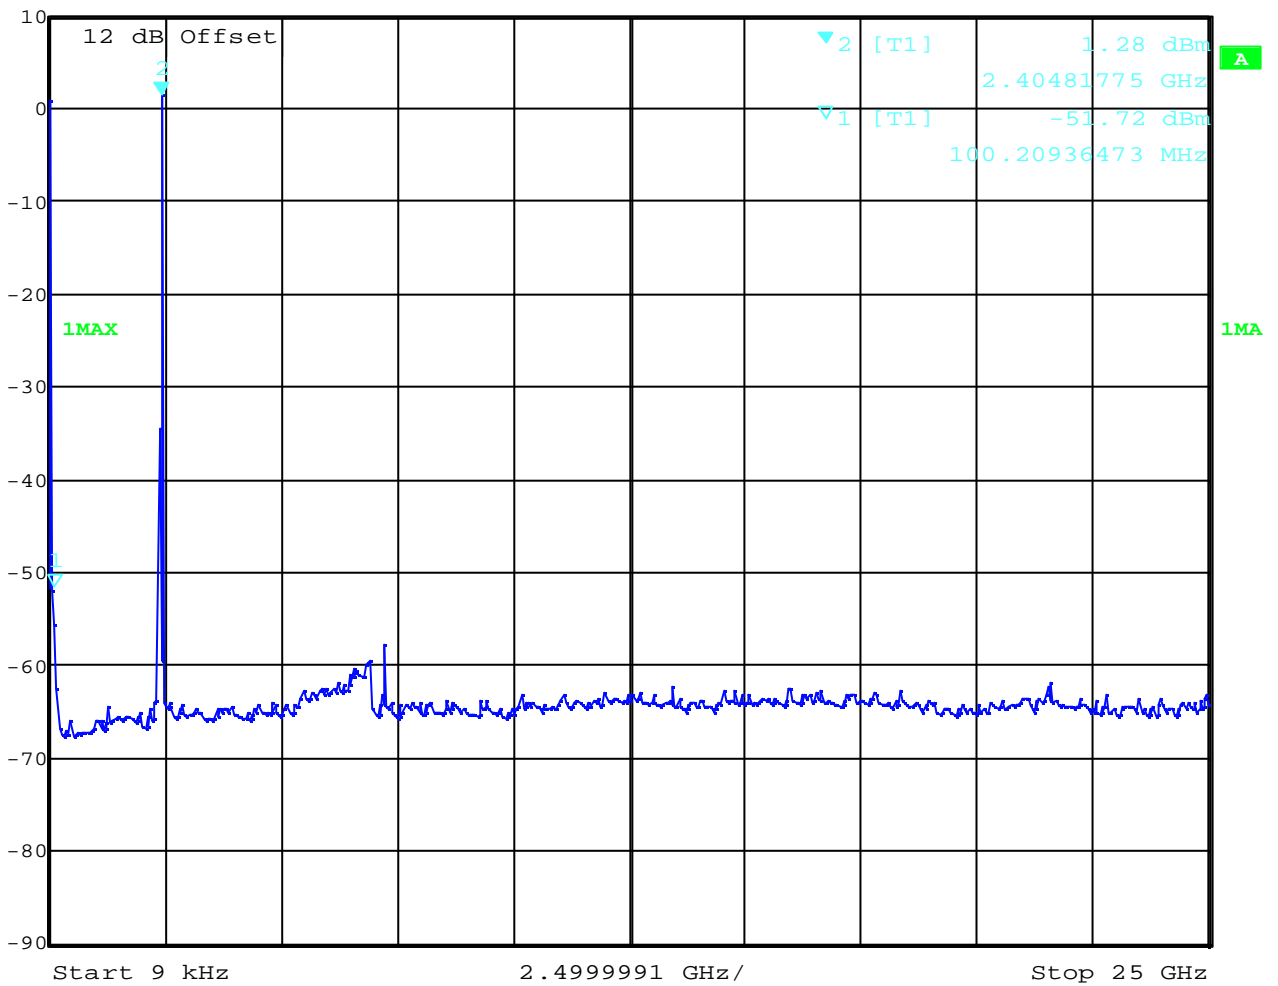

Date: 22.AUG.2003 09:18:36


No spurious found in the restricted bands (2310 – 2390 MHz and 2483,5 – 2500 MHz)


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

**SPURIOUS EMISSION
CONDUCTED**

§ 15.247 (c) (1)

Mid channel (peak)

 Marker 2 [T1] RBW 100 kHz RF Att 10 dB
 Ref Lvl 3.44 dBm VBW 100 kHz
 10 dBm 2.40481775 GHz SWT 6.4 s Unit dBm

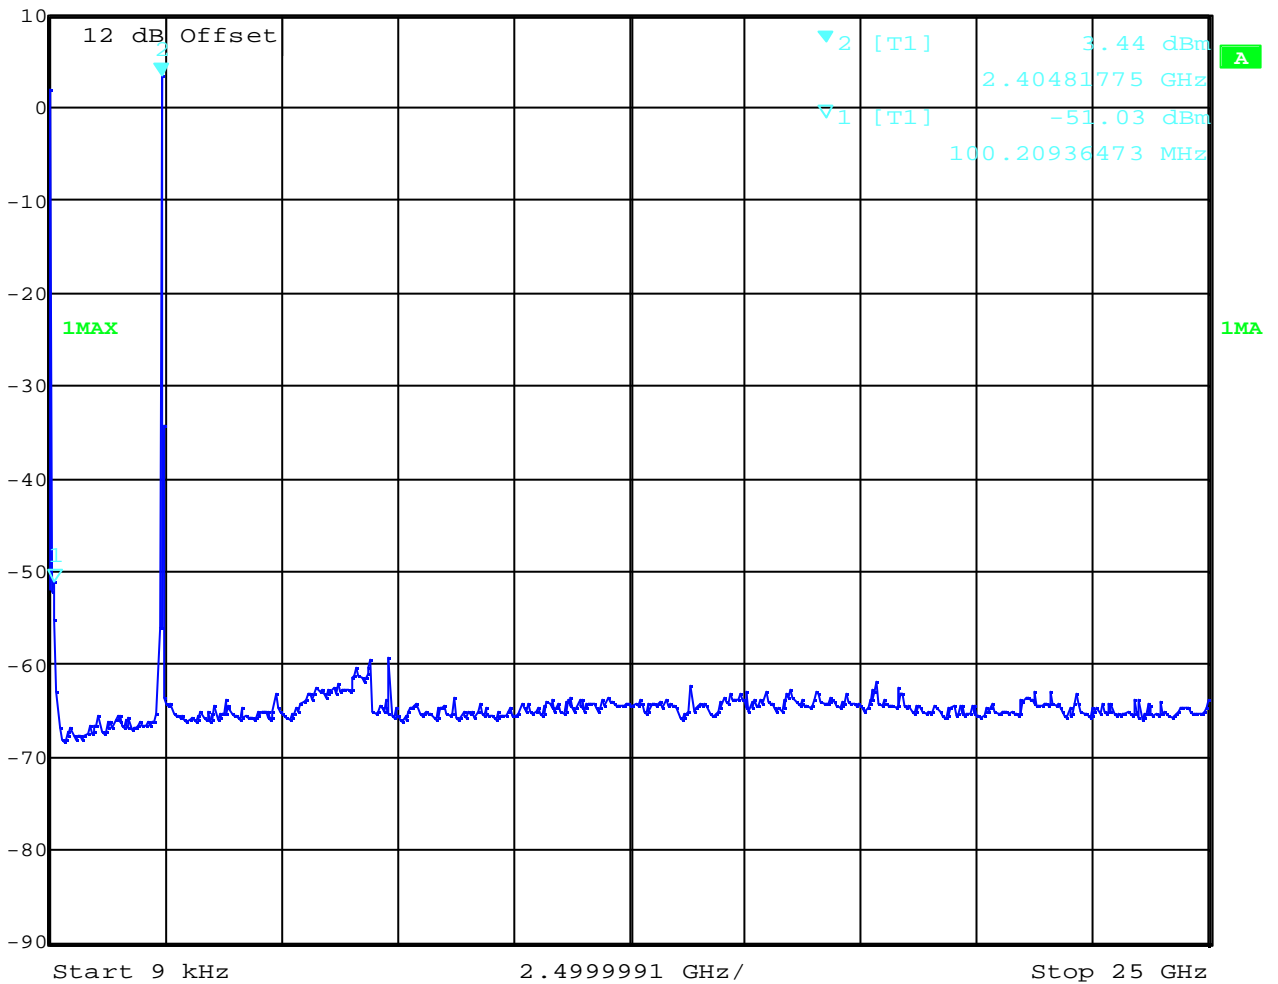

Date: 22.AUG.2003 09:20:11

No spurious found in the restricted bands (2310 – 2390 MHz and 2483,5 – 2500 MHz)


**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)**

**SPURIOUS EMISSION
CONDUCTED**

§ 15.247 (c) (1)

High channel

	Marker 4 [T1]	RBW	100 kHz	RF Att	10 dB
	Ref Lvl	-55.16 dBm	VBW	100 kHz	
	10 dBm	7.36473581 GHz	SWT	6.4 s	Unit dBm

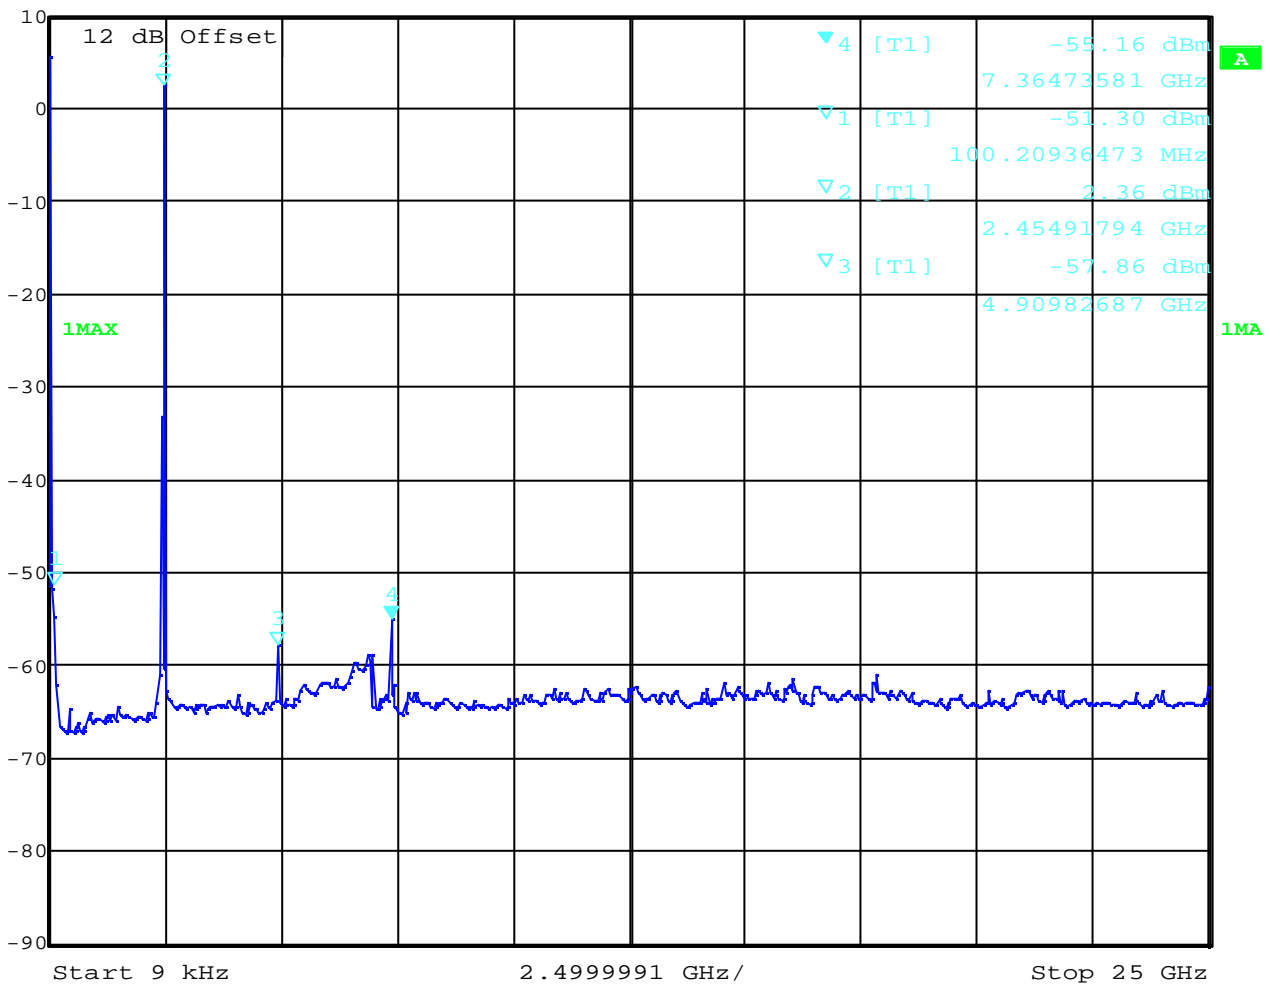

Date: 22.AUG.2003 09:38:17

No spurious found in the restricted bands (2310 – 2390 MHz and 2483,5 – 2500 MHz)

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

SPURIOUS EMISSION (radiated)

§ 15.247 (c) (1)

All peaks in the plots below 1 GHz were caused by the test pc, not by the sample.

SPURIOUS EMISSIONS LEVEL (µV/m)								
2412 MHz			2437 MHz			2462 MHz		
f (MHz)	Detector	Level (µV/m)	f (MHz)	Detector	Level (µV/m)	f (MHz)	Detector	Level (µV/m)
86.2	AV	27.9	86.2	AV	27.9	86.2	AV	27.9
173.5	AV	40.7	173.5	AV	40.7	173.5	AV	40.7
234.9	AV	39.0	234.9	AV	39.0	234.9	AV	39.0
335.6	AV	39.1	335.6	AV	39.1	335.6	AV	39.1
368.2	AV	43.7	368.2	AV	43.7	368.2	AV	43.7
594.5	AV	35.7	594.5	AV	35.7	594.5	AV	35.7
603.3	AV	39.7	603.3	AV	39.7	603.3	AV	39.7
1812.0	AV	27.9	1837.0	AV	33.6	1862.0	AV	39.3
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ? 1GHz : RBW/VBW: 1 MHz

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Limits

SUBCLAUSE § 15.209

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
30 - 88	100 (40 dBµV/m)	3
88 - 216	150 (43.5 dBµV/m)	3
216 - 960	200 (46 dBµV/m)	3
above 960	500 (54 dBµV/m)	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


EMISSION LIMITATIONS- Radiated

§ 15.247 (c) (1)

Transmitter up to 30 MHz

this plot is valid for all channels

EUT: CTX 404 E V.2
Manufacturer: Creatix
Operating Condition: Tx mode
Test Site: Cetecom, Room 6
Operator: Ames
Test Specification:
Comment:
Start of Test: 19.08.03

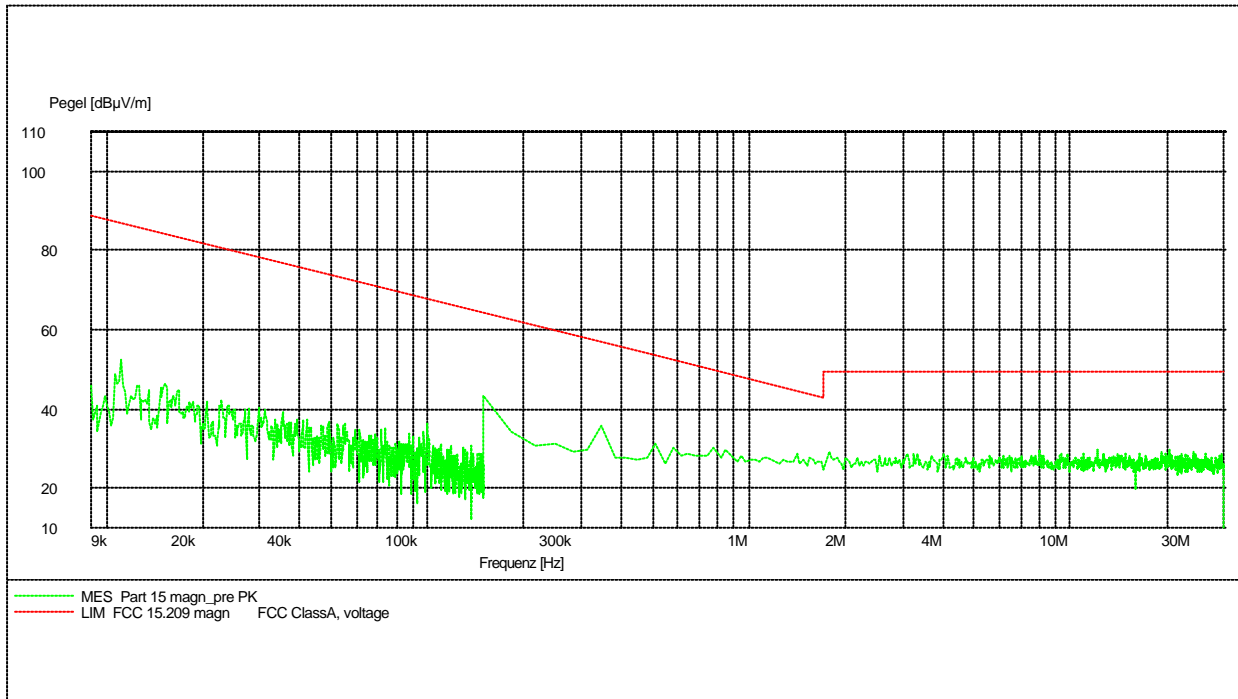

The test was made with a special PC and test software.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)



17 – 24; 64

EMISSION LIMITATIONS- Radiated

§ 15.247 (c) (1)

low channel up to 12 GHz

All peaks in the plots below 1 GHz were caused by the test pc, not by the sample.

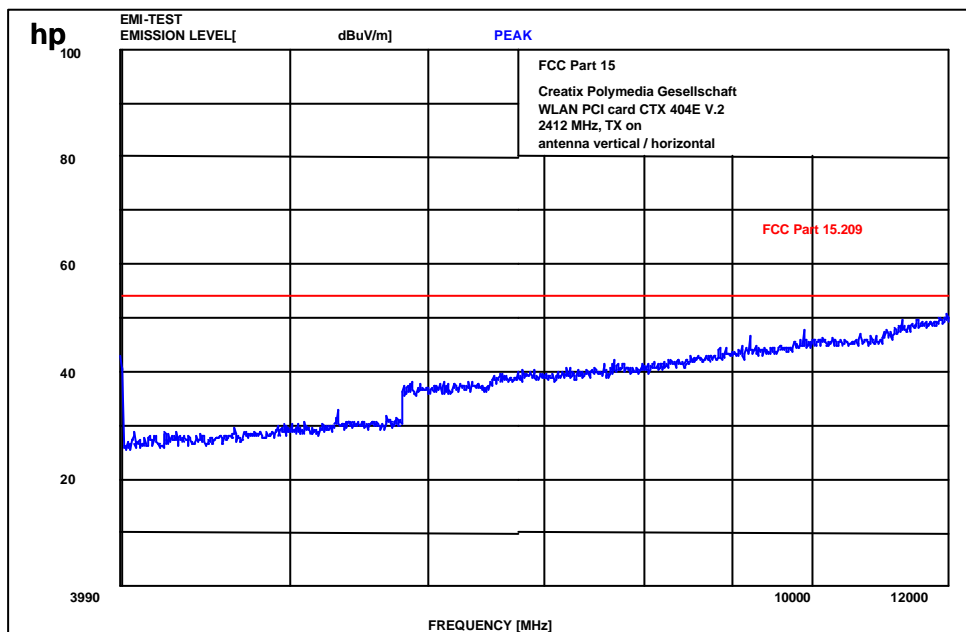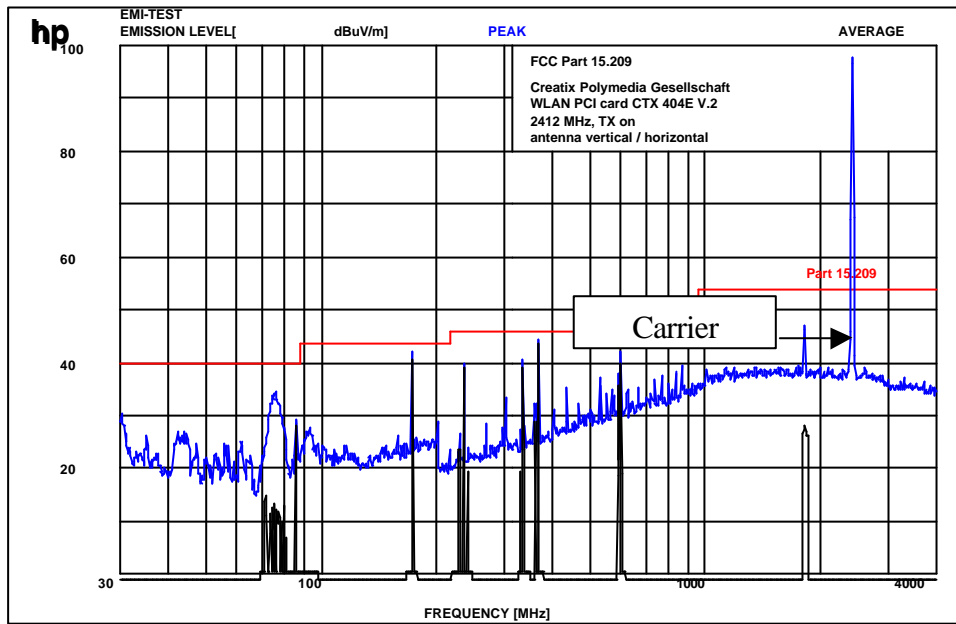

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

EMISSION LIMITATIONS- Radiated


§ 15.247 (c) (1)

up to 25 GHz

this plot is valid for all 3channels



Ref Lvl 105.7 dB μ V
 RBW 100 kHz RF Att 10 dB
 VBW 100 kHz
 SWT 3.3 s Unit dB μ V


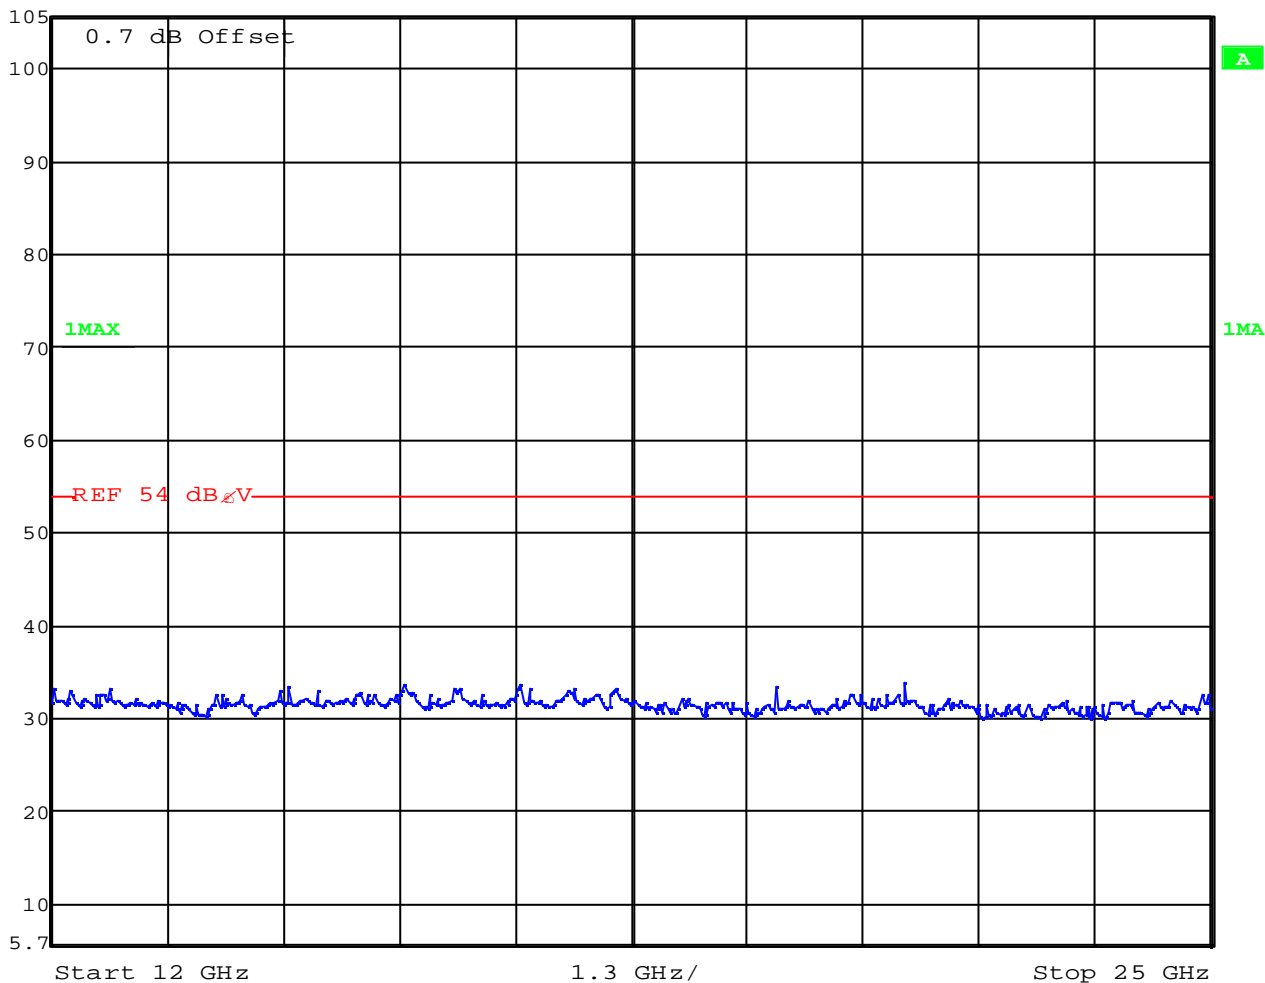


Date: 22.AUG.2003 09:43:11

EMISSION LIMITATIONS- Radiated
Mid channel up to 12 GHz

§ 15.247 (c) (1)

All peaks in the plots below 1 GHz were caused by the test pc, not by the sample.

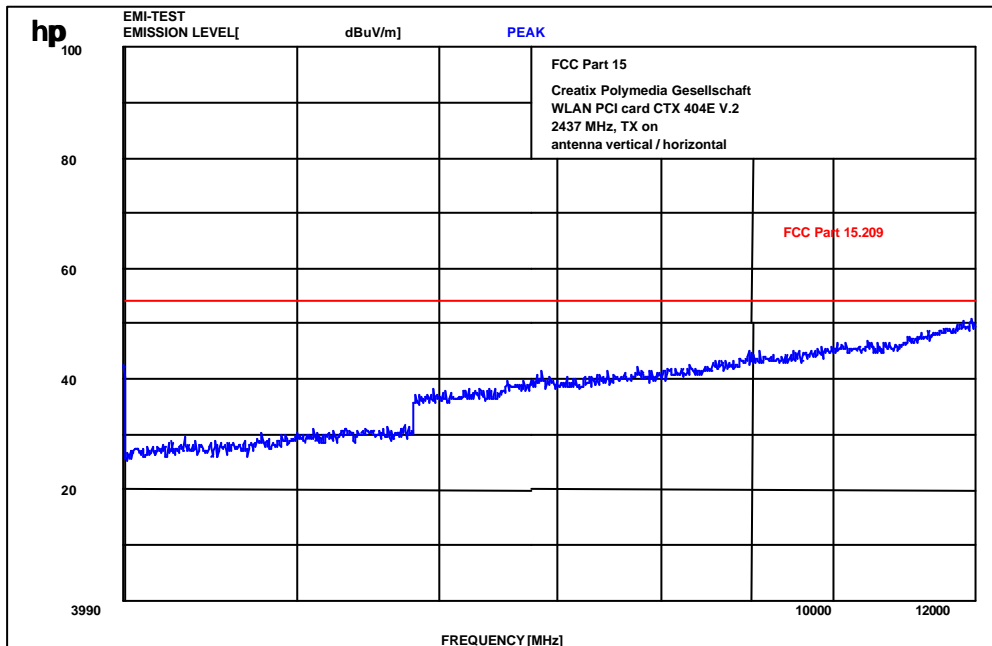
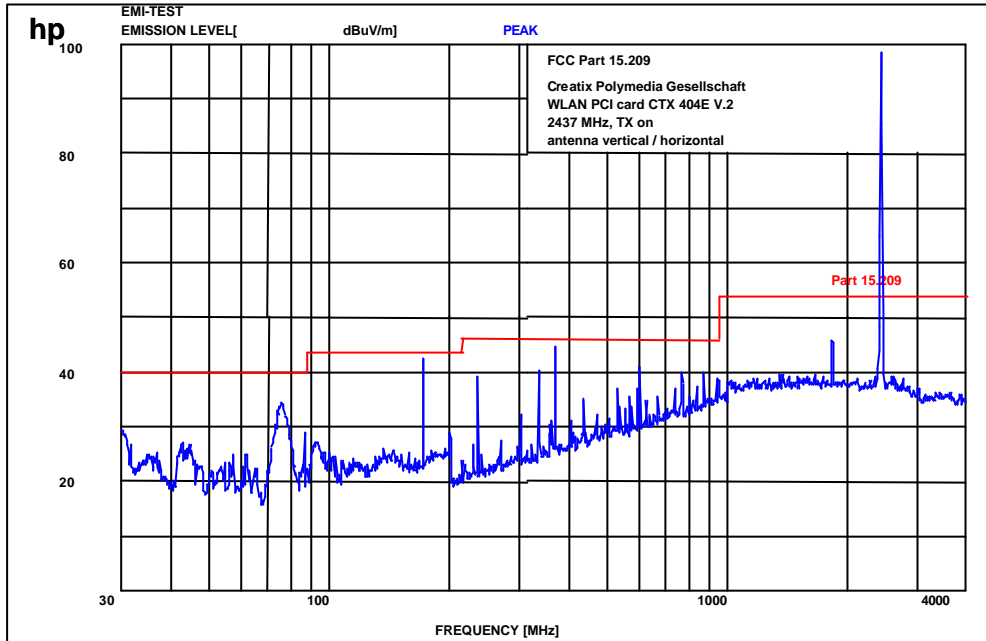


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)
 17 – 24; 64

**EMISSION LIMITATIONS- Radiated
high channel up to 12 GHz**

§ 15.247 (c) (1)

All peaks in the plots below 1 GHz were caused by the test pc, not by the sample.

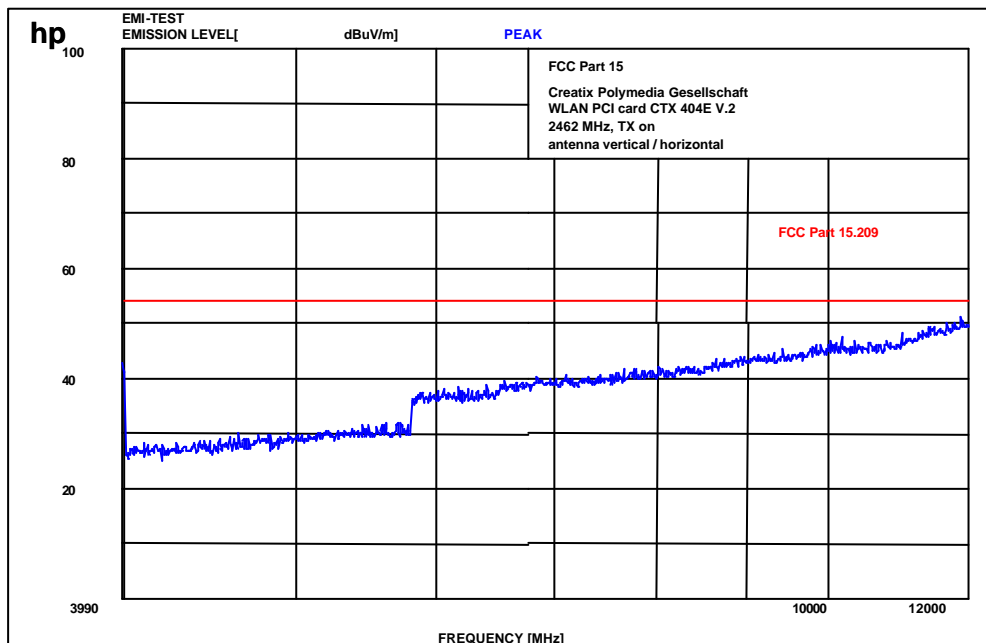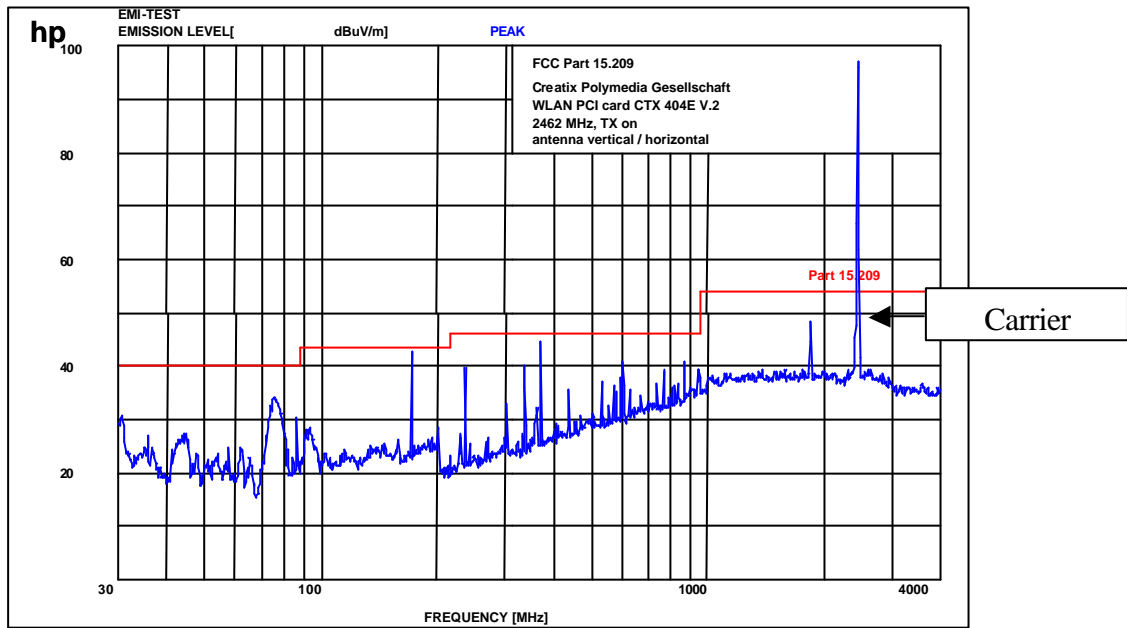

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64


Conducted emissions § 15.107/207

EN 55022 / CISPR 22

EUT: CTX 404 E V.2
 Manufacturer: Creatix
 Operating Condition: Tx-mode
 Test Site: Room 006
 Operator: Ames
 Test Specification: 115 V AC, measured at L1 and N floating and grounded, max hold function
 Comment: pass

SCAN TABLE: "CISPR 22 V"

Short Description: Voltage Mains 1.60
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 7.5 kHz MaxPeak 100.0 ms 10 kHz ESH3-Z5 L1 1458
 Average

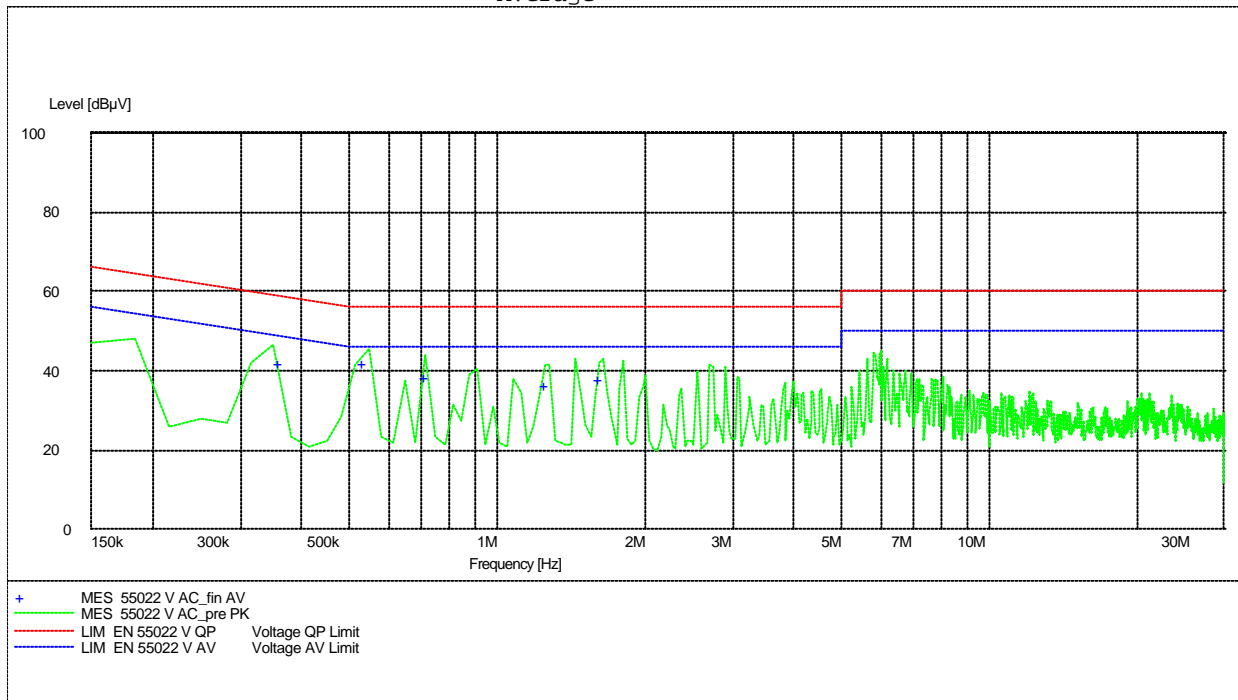

Limit 15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


EN 55022 / CISPR 22

EUT: CTX 404 E V.2
 Manufacturer: LG Electronics Inc.
 Operating Condition: Rx- mode
 Test Site: Room 006
 Operator: Ames
 Test Specification: 115 V AC, measured at L1 and N floating and grounded, max hold function
 Comment: pass

SCAN TABLE: "CISPR 22"

Short Description: Voltage Mains 1.60

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	7.5 kHz	MaxPeak	100.0 ms	10 kHz	ESH3-Z5 L1 1458
			Average			

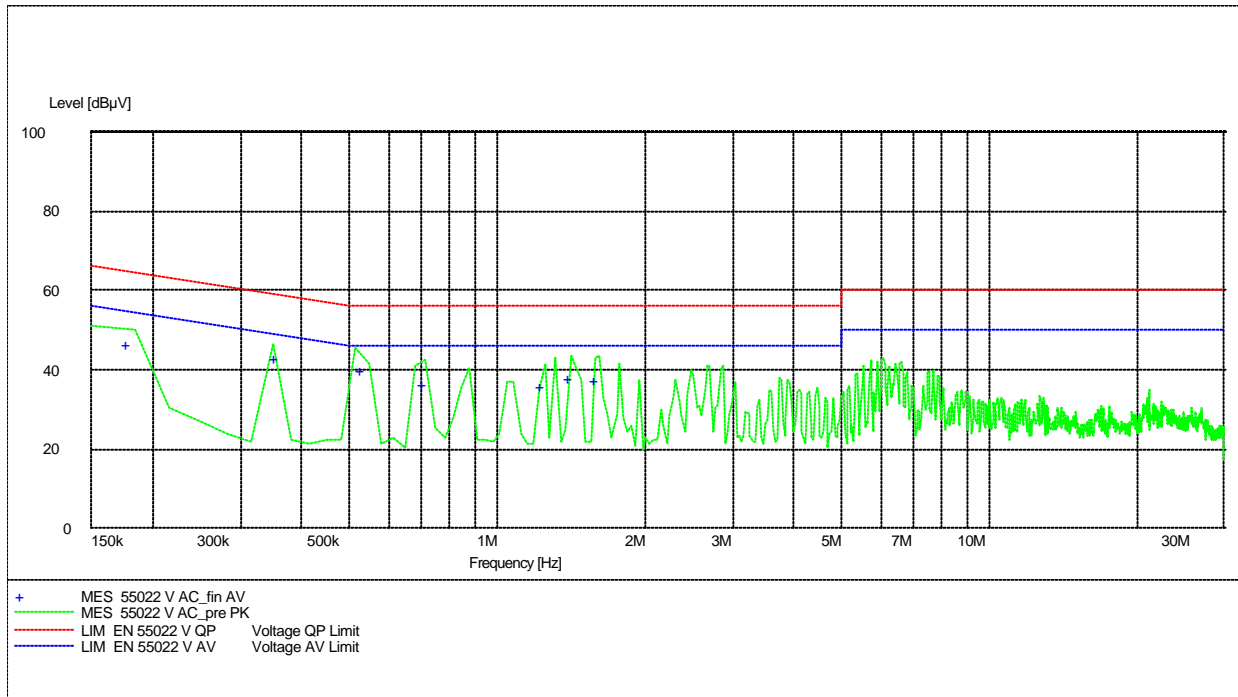

Limit § 15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

EMISSION LIMITATIONS- Receiver radiated

§ 15.209

SPURIOUS EMISSIONS LEVEL (µV/m)								
CH 1 / 2 / 3								
f (MHz)	Detector	Level (µV/m)	f (MHz)	Detector	Level (µV/m)	f (MHz)	Detector	Level (µV/m)
all	peaks	<<limit						
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz
see above plots

f ? 1GHz : RBW/VBW: 1 MHz

Measurement distance see table

Limits


SUBCLAUSE § 15.109

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBµV/m	30
30 - 88	100 / 40 dBµV/m	3
88 - 216	150 / 43.5 dBµV/m	3
216 - 960	200 / 46 dBµV/m	3
above 960	500 / 54 dBµV/m	3

EMISSION LIMITATIONS- Radiated Receiver up to 30 MHz

§ 15.209

EUT: CTX 404 E V.2
Manufacturer: Creatix
Operating Condition: Rx mode
Test Site: Cetecom, Room 6
Operator: Ames
Test Specification:
Comment:
Start of Test:


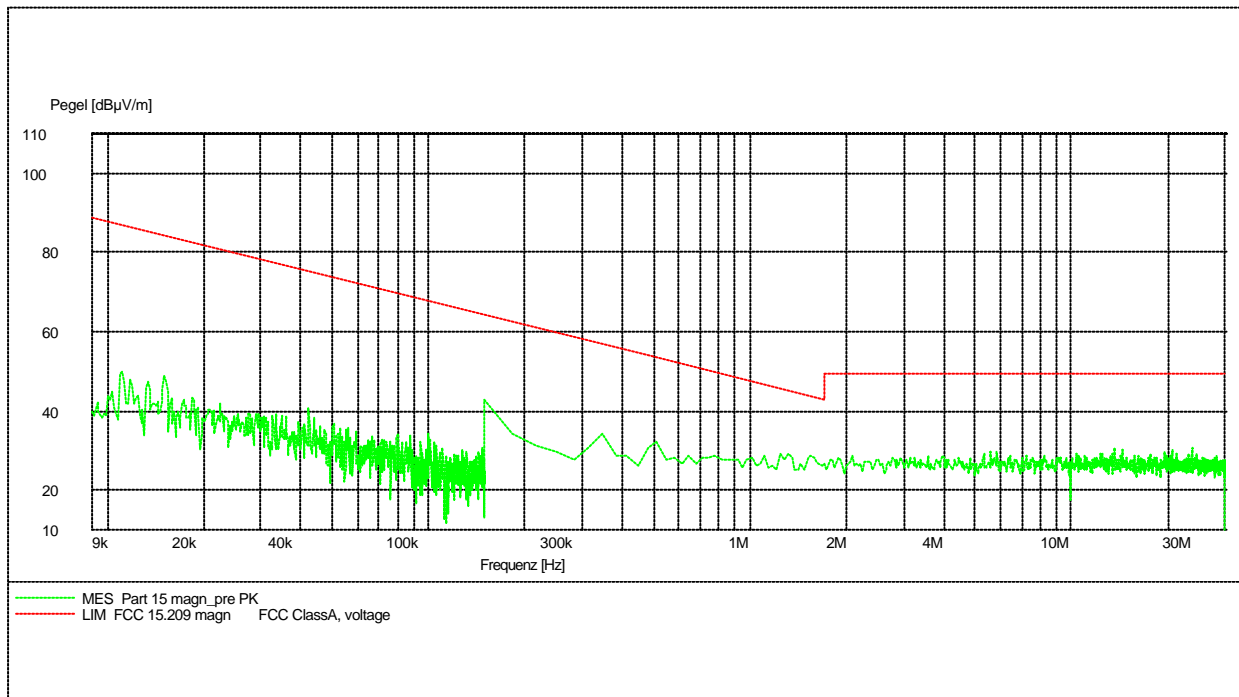


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)
17 – 24; 64

EMISSION LIMITATIONS- Radiated
Receiver up to 12 GHz

§ 15.209

All peaks in the plot were caused by the test pc, not by the sample.

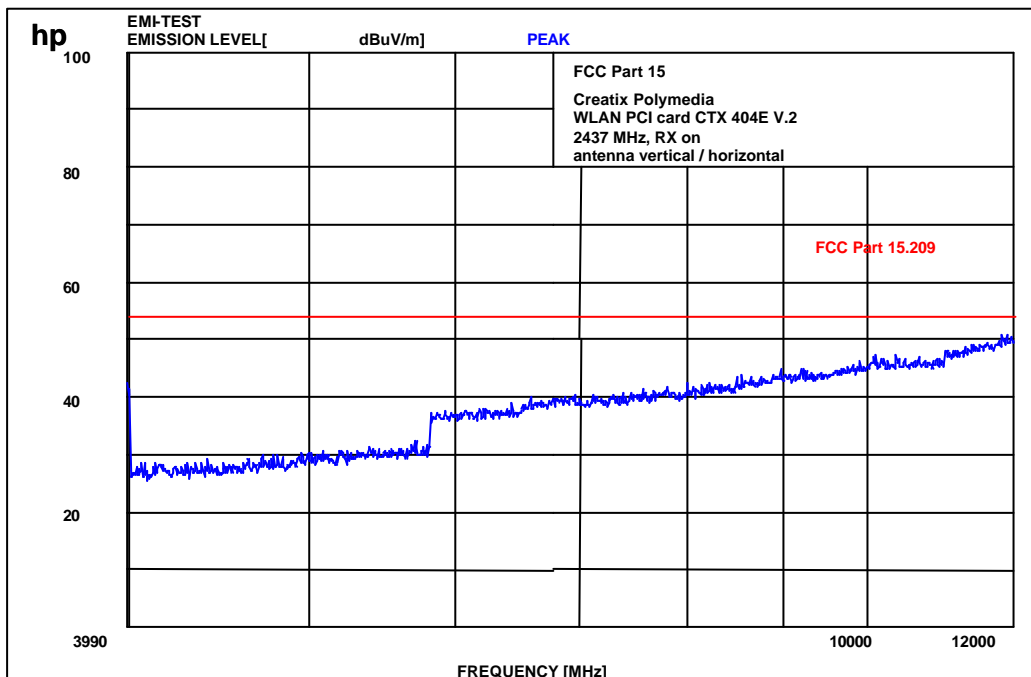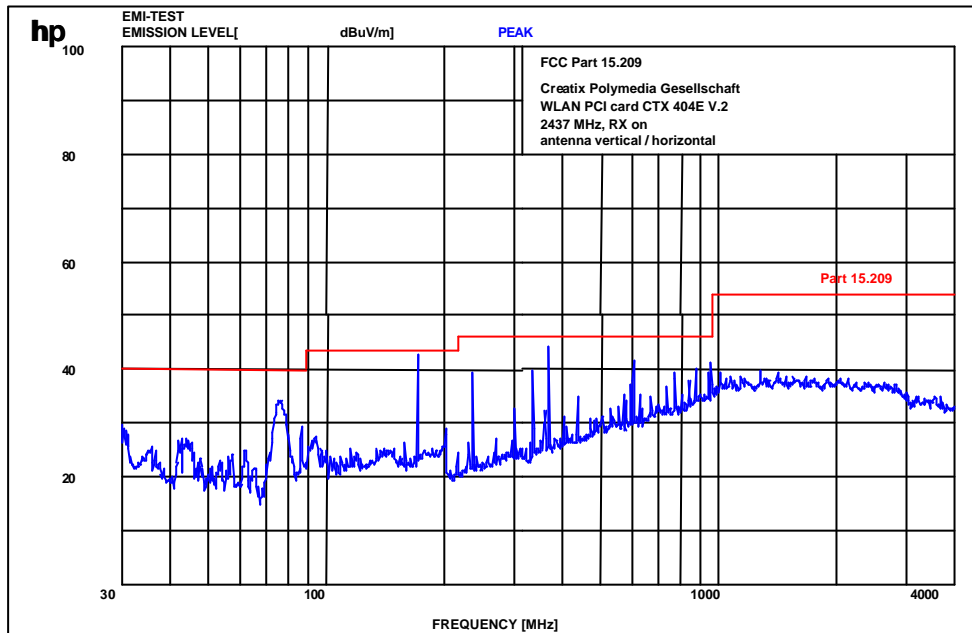

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24; 64

EMISSION LIMITATIONS- Radiated
Receiver up to 25 GHz

§ 15.209



	Marker 1 [T1]	RBW	100 kHz	RF Att	10 dB
Ref Lvl	32.85 dB _μ V	VBW	100 kHz		
105.7 dB _μ V	17.21042084 GHz	SWT	3.3 s	Unit	dB _μ V

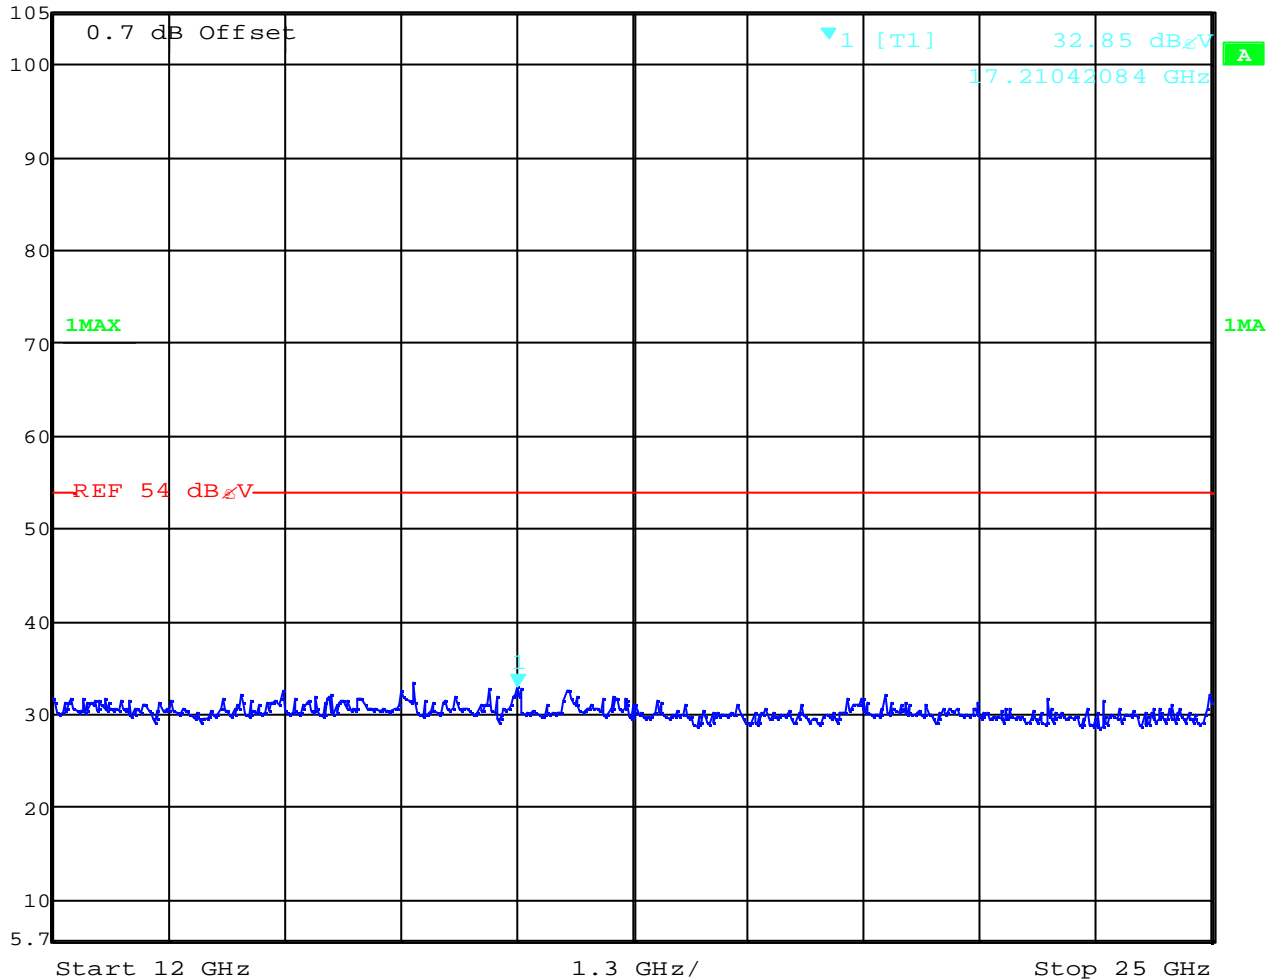

Date: 22.AUG.2003 09:43:32

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS


To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	8566 A	Hewlett-Packard	1925A00257
02	Analyzer Display	8566 A	Hewlett-Packard	1925A00860
03	Oscilloscope	7633	Tektronix	230054
04	Radio Analyzer	CMTA 54	Rohde & Schwarz	894 043/010
05	System Power Supply	6038 A	Hewlett-Packard	2848A07027
06	Signal Generator	8111 A	Hewlett-Packard	2215G00867
07	Signal Generator	8662 A	Hewlett-Packard	2224A01012
08	Funktionsgenerator	AFGU	Rohde & Schwarz	862 480/032
09	Regeltrenntrafo	MPL	Erfi	91350
10	Netznachbildung	NNLA 8120	Schwarzbeck	8120331
11	Relais-Matrix	PSU	Rohde & Schwarz	893 285/020
12	Power-Meter	436 A	Hewlett-Packard	2101A12378
13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156
14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616
15	Modulationsmeter	9008	Racal-Dana	2647
16	Frequenzzähler	5340 A	Hewlett-Packard	1532A03899
17	Absorber Schirmkabine	---	MWB	87400/002
18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306
19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541
20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131
21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768
22	Biconical Antenne	3104	Emco	3758
23	Log. Per. Antenne	3146	Emco	2130
24	Double Ridge Horn	3115	Emco	3088
25	EMI-Testreceiver	ESAI	Rohde & Schwarz	863 180/013
26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008
27	Biconical Antenne	HK 116	Rohde & Schwarz	888 945/013
28	Log. Per. Antenne	HL 223	Rohde & Schwarz	825 584/002
29	Relais-Switch-Unit	RSU	Rohde & Schwarz	375 339/002
30	Highpass	HM985955	FSY Microwave	001
31	Amplifier	P42-GA29	Tron-Tech	B 23602
32	Absorber Schirmkabine		Frankonia	
33	Steuerrechner	PSM 7	Rohde & Schwarz	834 621/004
34	EMI Test Reciever	ESMI	Rohde & Schwarz	827 063/010
35	EMI Test Receiver	Display	Rohde & Schwarz	829 808/010

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
36	Controler	HD 100	Deisel	100/322/93
37	Relais Matrix	PSN	Rohde & Schwarz	829 065/003
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008
39	Relais Switch Unit	RSU	Rohde & Schwarz	316 790/001
40	Power Supply	6032A	Hewlett Packard	2846A04063
41	Spektrum Monitor	EZM	Rohde & Schwarz	883 720/006
42	Meßempfänger	ESH 3	Rohde & Schwarz	890 174/002
43	Meßempfänger	ESVP	Rohde & Schwarz	891 752/005
44	Biconi Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002
48	Polarisationsnetzwerk	HL 024 Z1	Rohde & Schwarz	341 570/002
49	Double Ridge G Horn Antenne 1-26.5 GHz	3115	EMCO	9107-3696
50	Microw. Sys. Amplifier 0.5- 26.5 GHz	8317A	Hewlett Packard	3123A00105
51	Audio Analyzer	UPD	Rohde & Schwarz	1030.7500.04
52	Steuerrechner	PSM 7	Rohde & Schwarz	883 086/026
53	DC V-Netzwerk	ESH3-Z6	Rohde & Schwarz	861 406/005
54	DC V-Netzwerk	ESH3-Z6	Rohde & Schwarz	893 689/012
55	AC 2 Phasen V-Netzwerk	ESH3-Z5	Rohde & Schwarz	861 189/014
56	AC 2 Phasen V-Netzwerk	ESH3-Z5	Rohde & Schwarz	894 981/019
57	AC-3 Phasen V-Netzwerk	ESH2-Z5	Rohde & Schwarz	882 394/007
58	Stromversorgung	6032A	Rohde & Schwarz	2933A05441
59	HF-Test Empfänger	ESVP.52	Rohde & Schwarz	881 487/021
60	Spectrum Monitor	EZM	Rohde & Schwarz	883 086/026
61	HF-Test Empfänger	ESH3	Rohde & Schwarz	881 515/002
62	Relais Matrix	PSU	Rohde & Schwarz	882 943/029
63	Relais Matrix	PSU	Rohde & Schwarz	828 628/007
64	Spectrum Analyzer	FSIQ 26	Rohde & Schwarz	119.6001.27
65	Spectrum Analyzer	HP 8565E	Hewlett Packard	3473A00773
66				

Test site

RADIATED EMISSIONS

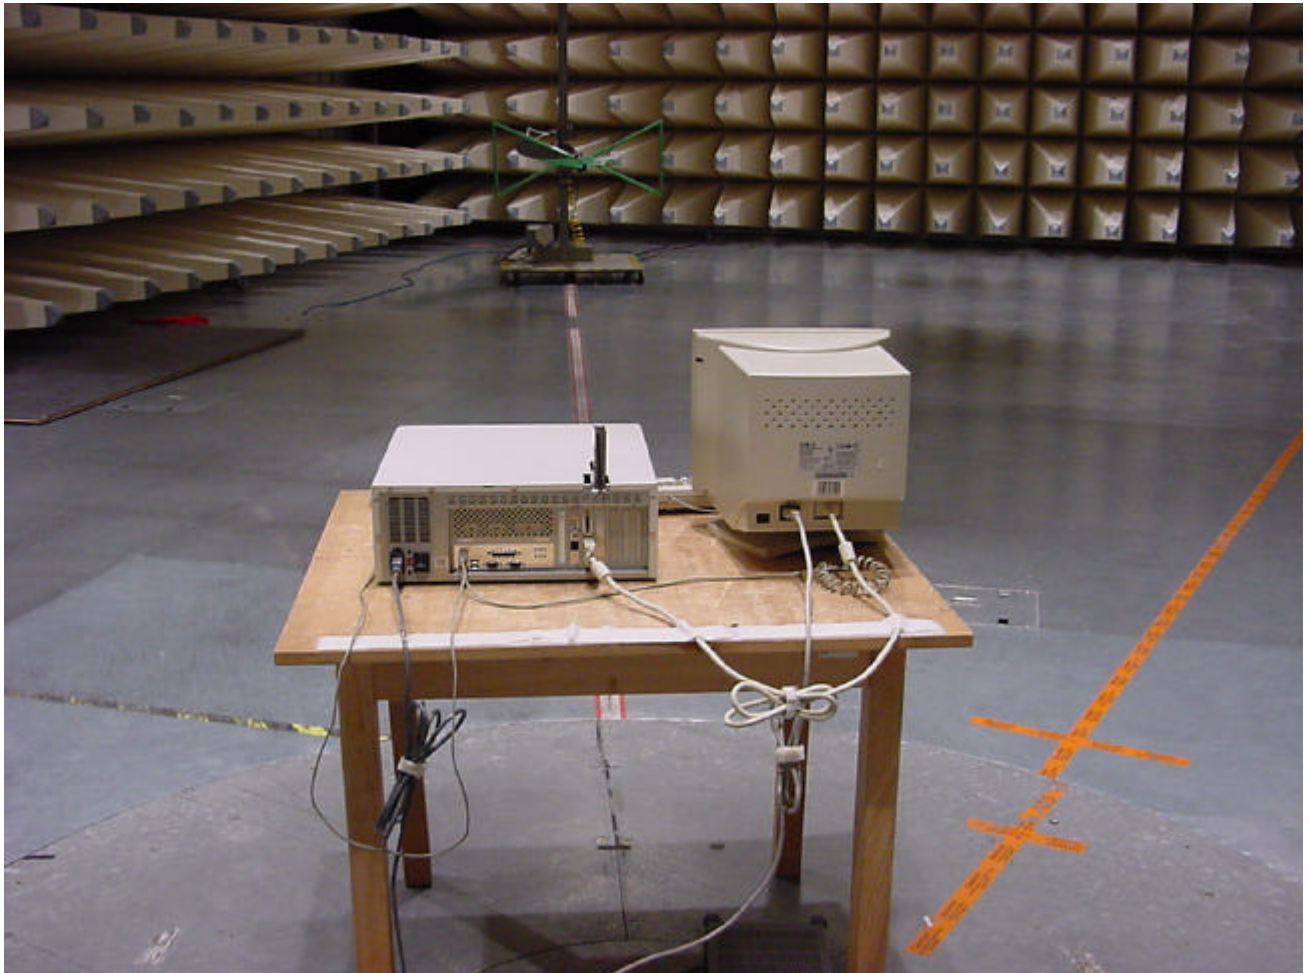

Test site

RADIATED EMISSIONS




Test site


CONDUCTED EMISSIONS



Photographs of the equipment

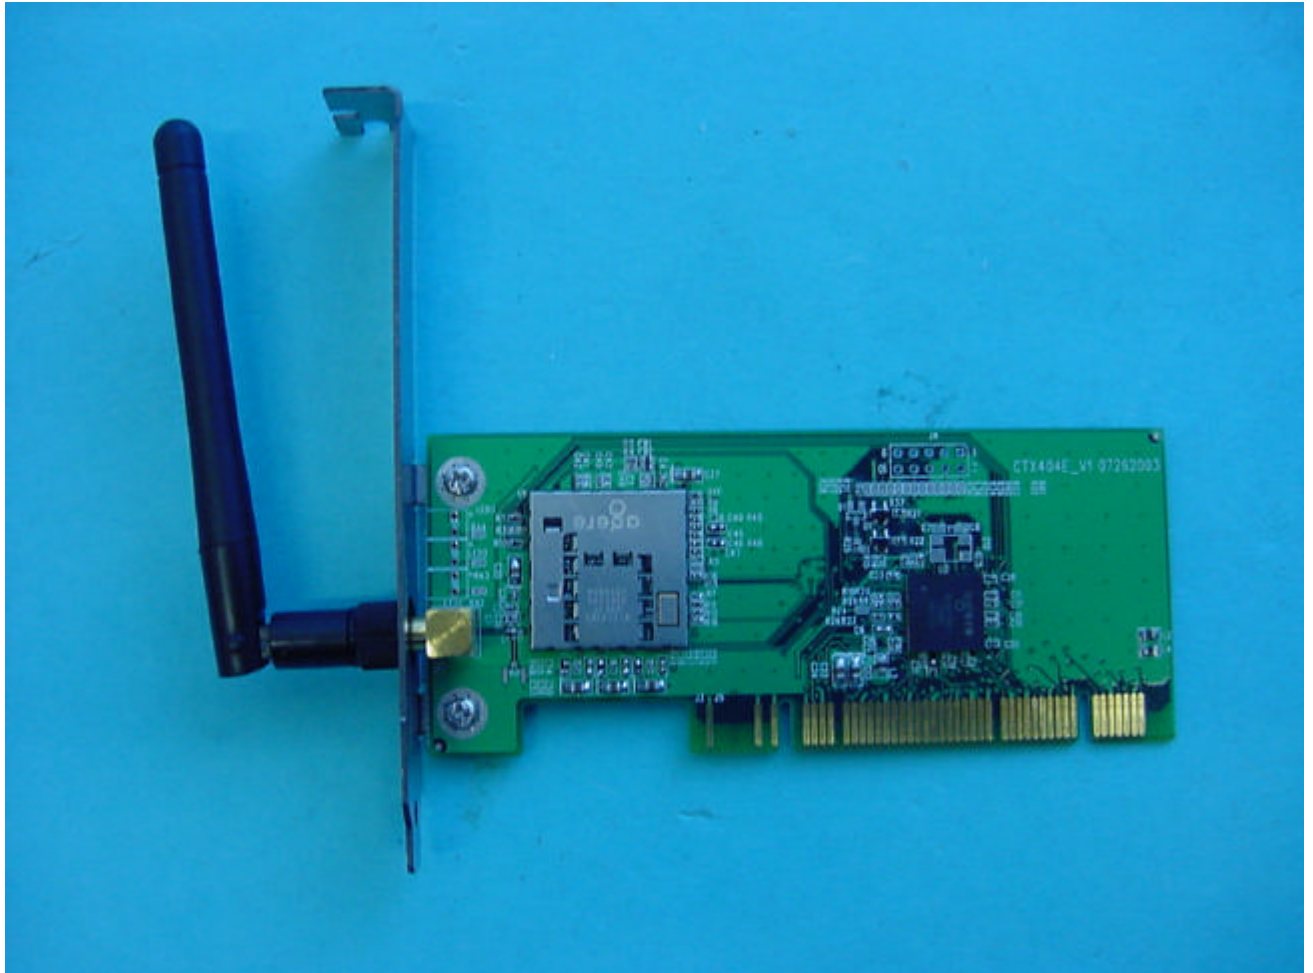

Photographs

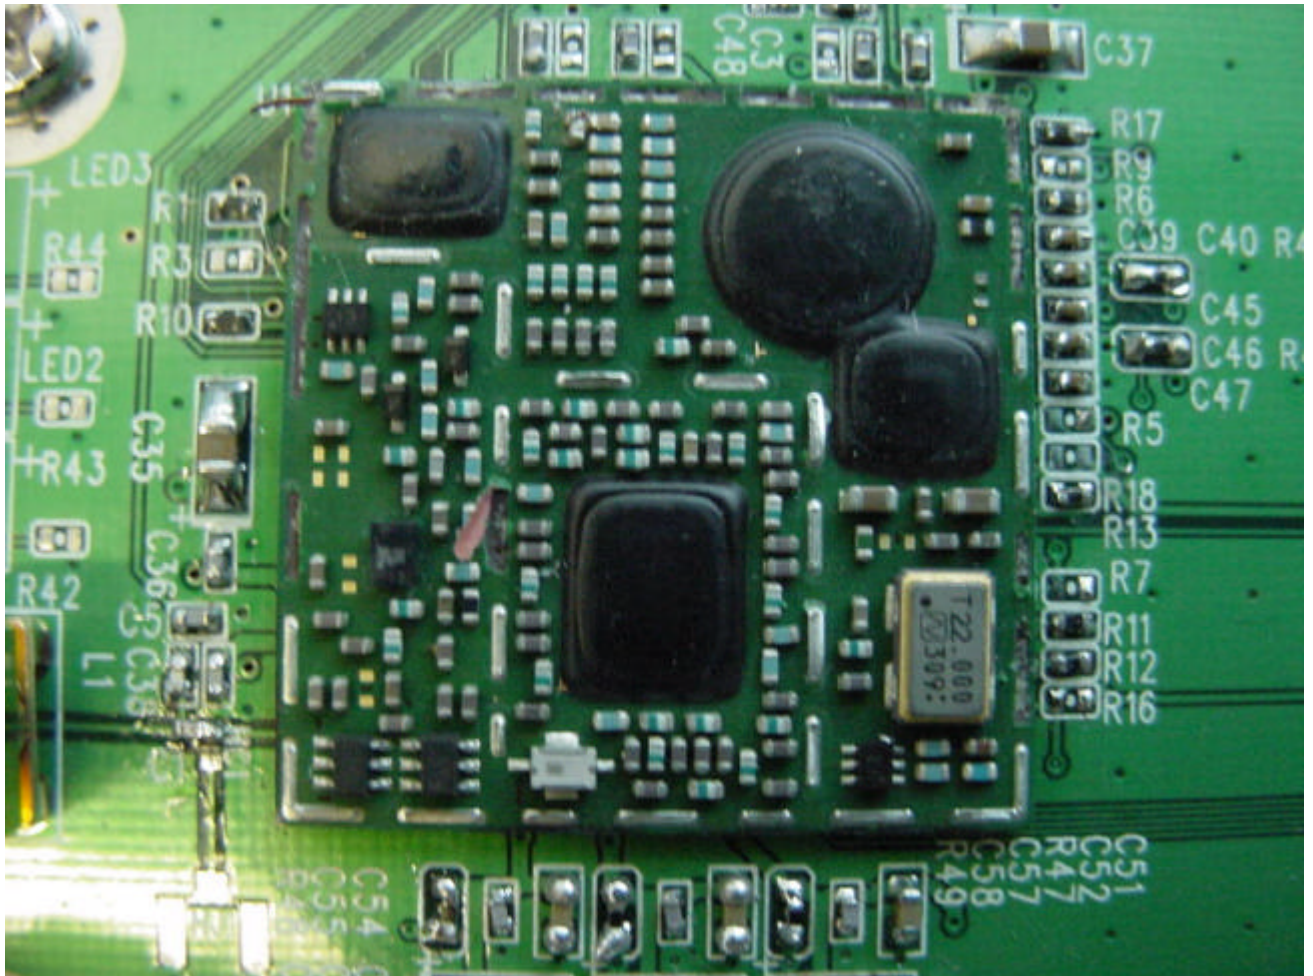

Photographs

