

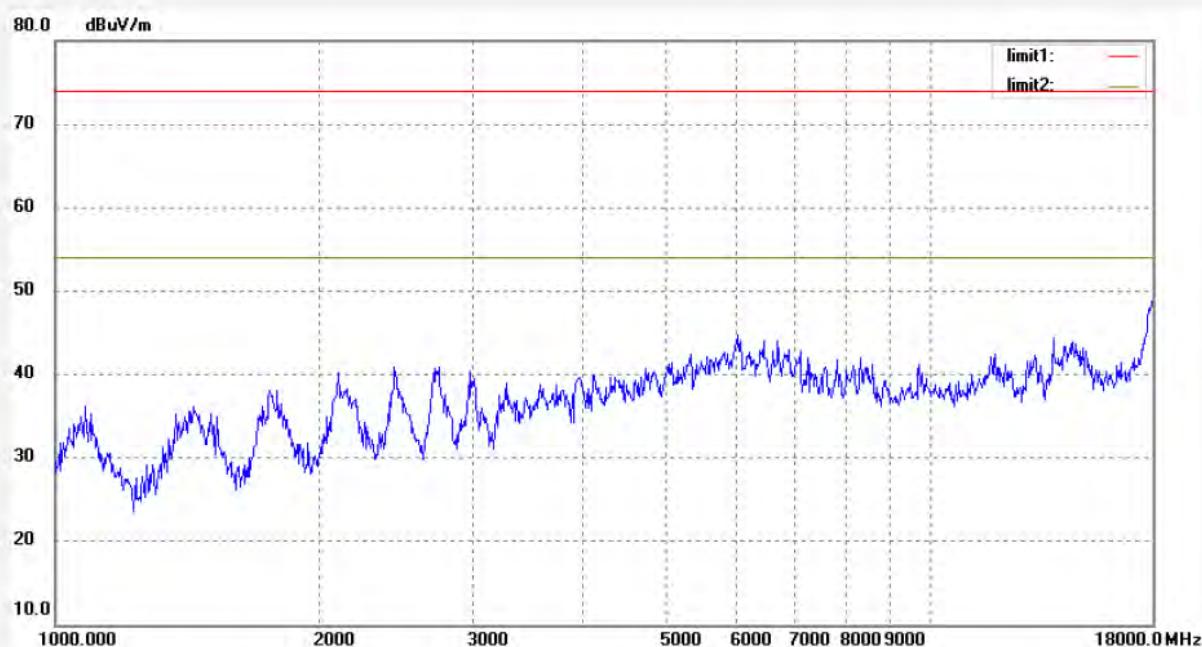

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: rucky2 #305	Polarization: Vertical
Standard: FCC PART 15B (PK)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/19/
Temp. (C)/Hum.(%) 23 C / 49 %	Time: 5/06/23
EUT: 7 Inch Tablet PC/MID	Engineer Signature: Ricky
Mode: TX802.11B (CH1)	Distance: 3m
Model: SM708	
Manufacturer: Superinworld Technology Co., Ltd	

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

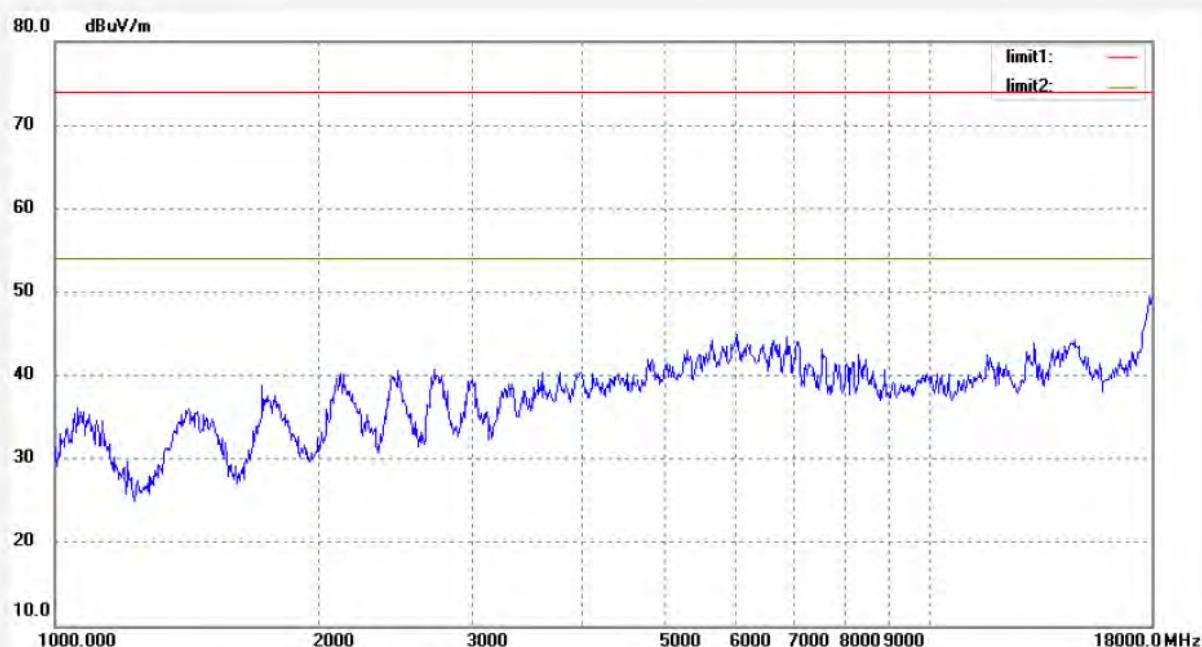

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: rucky2 #306	Polarization: Horizontal
Standard: FCC PART 15B (PK)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/19/
Temp. (C)/Hum.(%) 23 C / 49 %	Time: 5/09/02
EUT: 7 Inch Tablet PC/MID	Engineer Signature: Ricky
Mode: TX802.11B (CH1)	Distance: 3m
Model: SM708	
Manufacturer: Superinworld Technology Co., Ltd	

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

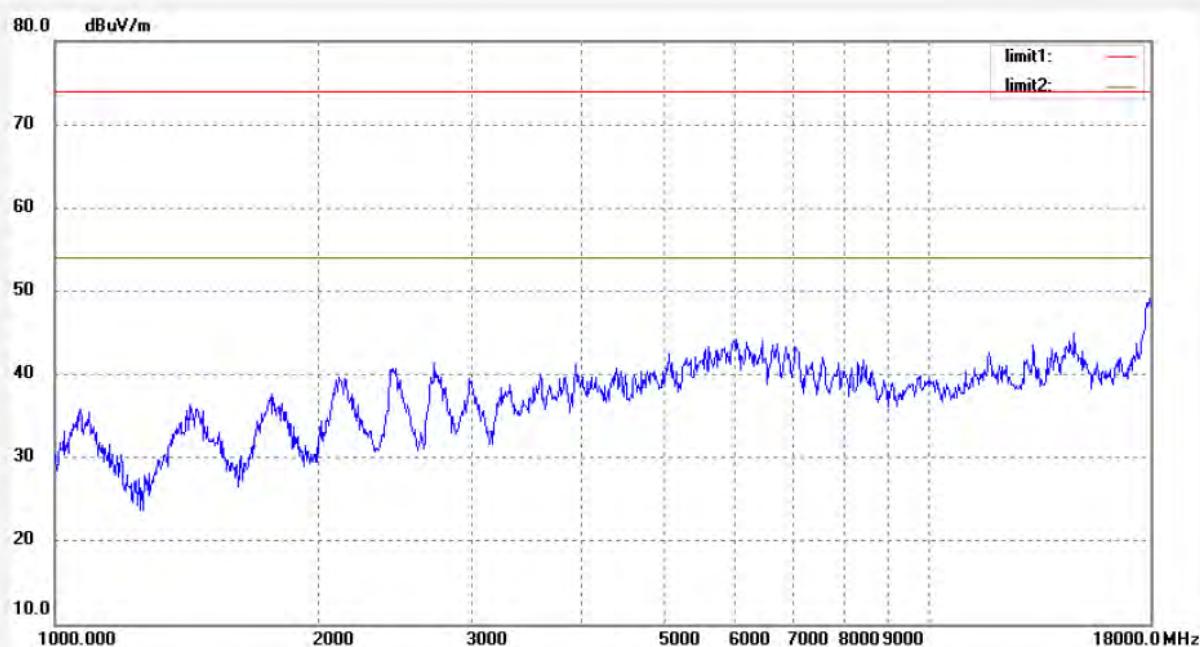

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: rucky2 #307	Polarization: Horizontal
Standard: FCC PART 15B (PK)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/19/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 5/11/29
EUT: 7 Inch Tablet PC/MID	Engineer Signature: Ricky
Mode: TX802.11B (CH6)	Distance: 3m
Model: SM708	
Manufacturer: Superinworld Technology Co., Ltd	

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

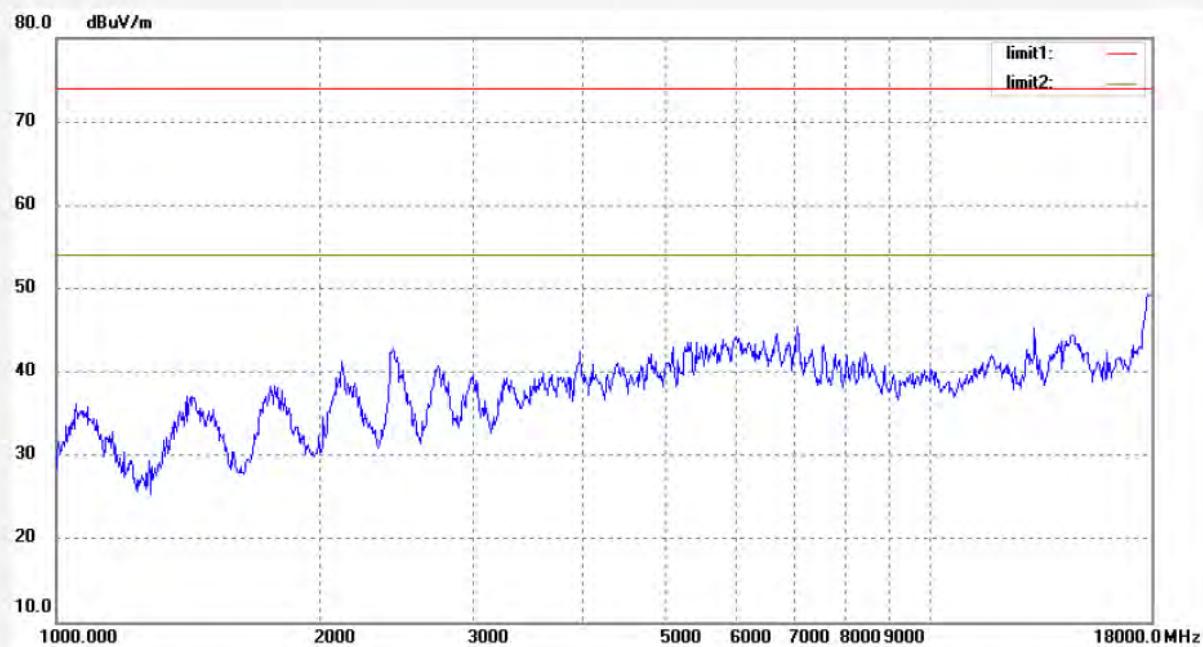
 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

 Job No.: rucky2 #308
 Standard: FCC PART 15B (PK)
 Test item: Radiation Test
 Temp. (C)/Hum.(%) 23 C / 49 %
 EUT: 7 Inch Tablet PC/MID
 Mode: TX802.11B (CH6)
 Model: SM708

 Polarization: Vertical
 Power Source: AC 120V/60Hz
 Date: 12/10/19/
 Time: 5/14/30
 Engineer Signature: Ricky
 Distance: 3m

Manufacturer: Superinworld Technology Co., Ltd

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------


ACCURATE TECHNOLOGY CO., LTD.

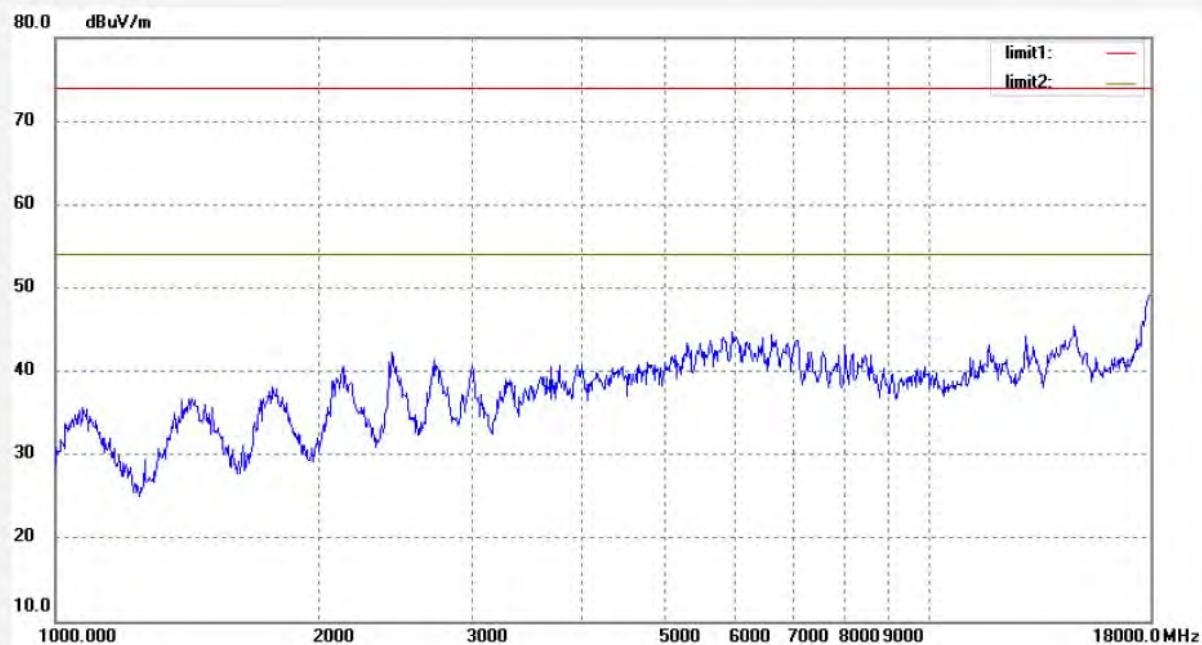
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: rucky2 #309
 Standard: FCC PART 15B (PK)
 Test item: Radiation Test
 Temp. (C)/Hum.(%) 23 C / 49 %
 EUT: 7 Inch Tablet PC/MID
 Mode: TX802.11B (CH11)
 Model: SM708
 Manufacturer: Superinworld Technology Co., Ltd

Polarization: Vertical
 Power Source: AC 120V/60Hz
 Date: 12/10/19/
 Time: 5/16/40
 Engineer Signature: Ricky
 Distance: 3m

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

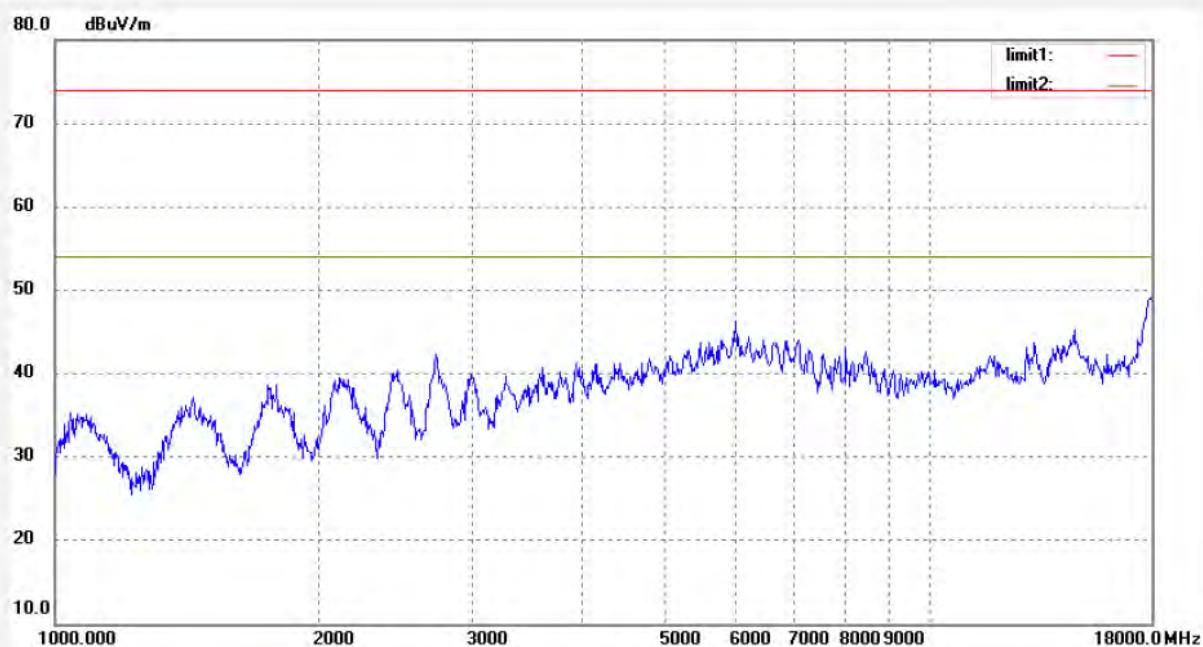

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: rucky2 #310	Polarization: Horizontal
Standard: FCC PART 15B (PK)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/19/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 5/20/56
EUT: 7 Inch Tablet PC/MID	Engineer Signature: Ricky
Mode: TX802.11B (CH11)	Distance: 3m
Model: SM708	
Manufacturer: Superinworld Technology Co., Ltd	

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

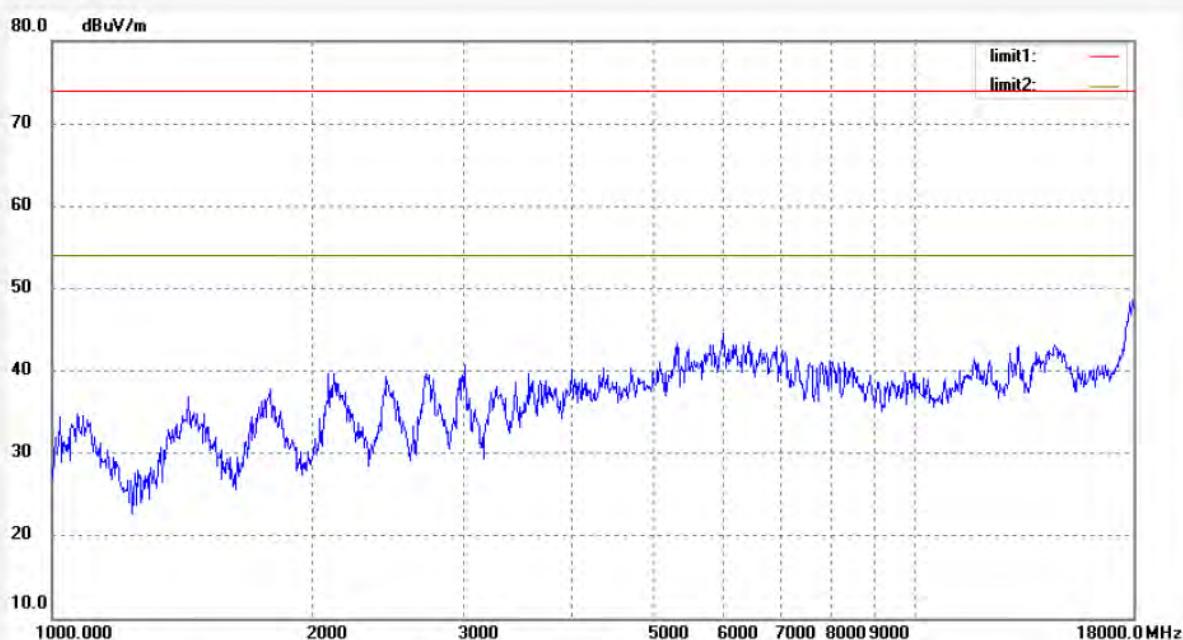

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	ucky2 #311	Polarization:	Horizontal
Standard:	FCC PART 15B (PK)	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/10/19/
Temp.(C)/Hum.(%)	23 C / 49 %	Time:	5/23/14
EUT:	7 Inch Tablet PC/MID	Engineer Signature:	Ricky
Mode:	TX802.11g (CH11)	Distance:	3m
Model:	SM708		
Manufacturer:	Superinworld Technology Co., Ltd		

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

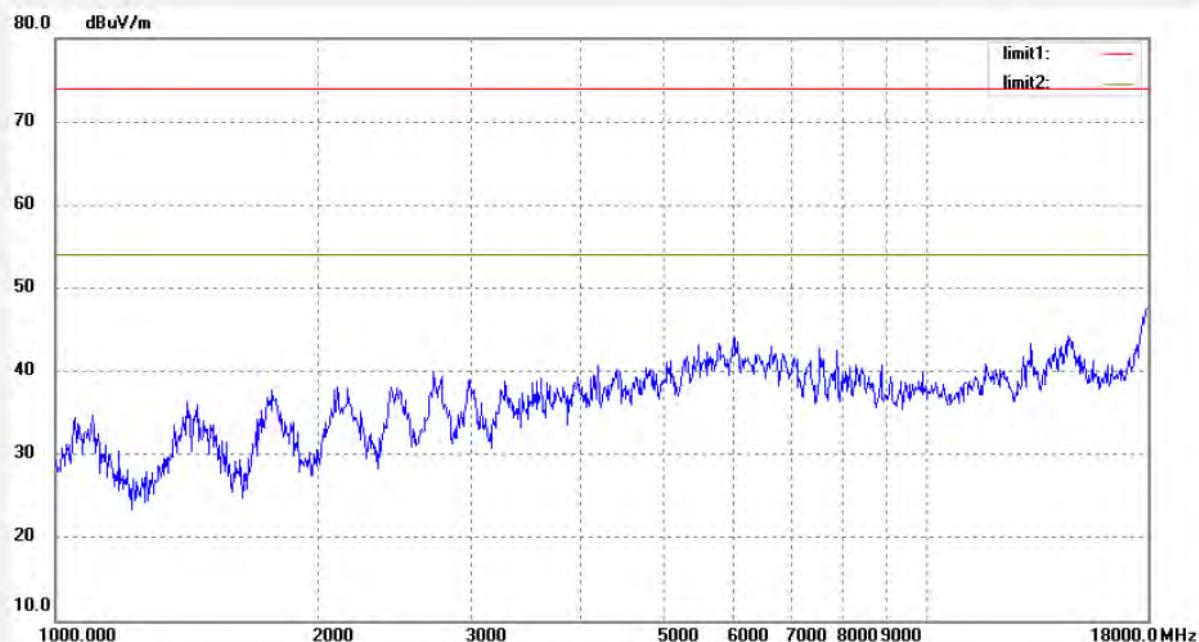
 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

 Job No.: rucky2 #312
 Standard: FCC PART 15B (PK)
 Test item: Radiation Test
 Temp. (C)/Hum.(%) 23 C / 49 %
 EUT: 7 Inch Tablet PC/MID
 Mode: TX802.11g (CH11)
 Model: SM708

 Polarization: Vertical
 Power Source: AC 120V/60Hz
 Date: 12/10/19/
 Time: 5/25/26
 Engineer Signature: Ricky
 Distance: 3m

Manufacturer: Superinworld Technology Co., Ltd

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: rucky2 #313

Polarization: Vertical

Standard: FCC PART 15B (PK)

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/10/19/

Temp.(C)/Hum.(%) 23 C / 49 %

Time: 5/28/11

EUT: 7 Inch Tablet PC/MID

Engineer Signature: Ricky

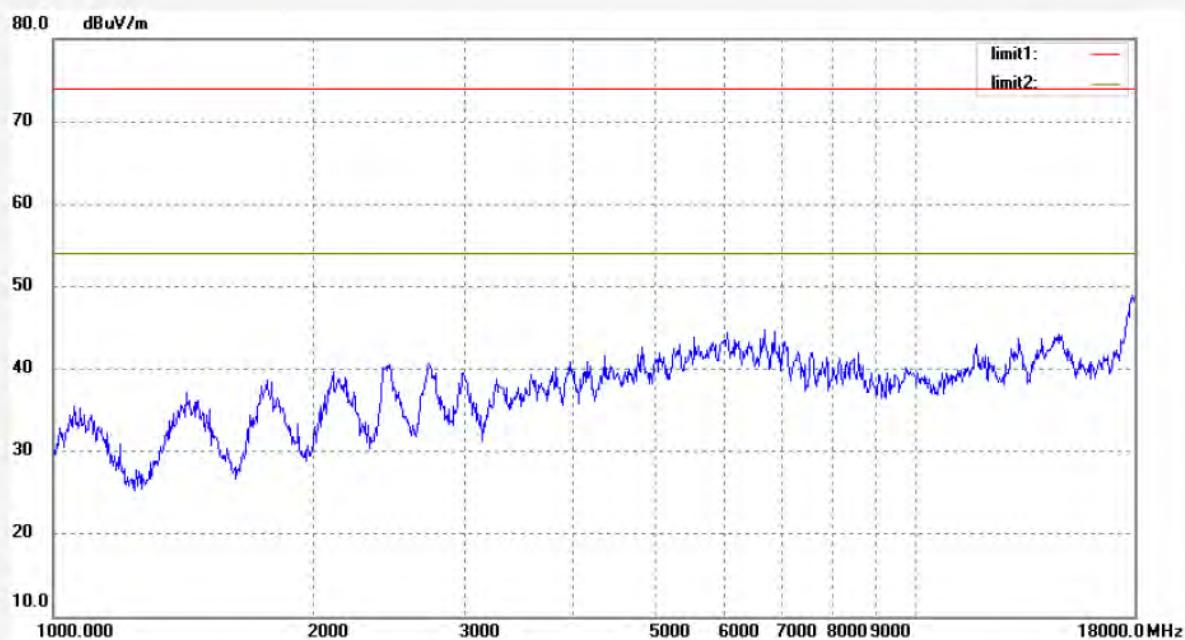
Mode: TX802.11g (CH6)

Distance: 3m

Model: SM708

Manufacturer: Superinworld Technology Co., Ltd

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------


ACCURATE TECHNOLOGY CO., LTD.

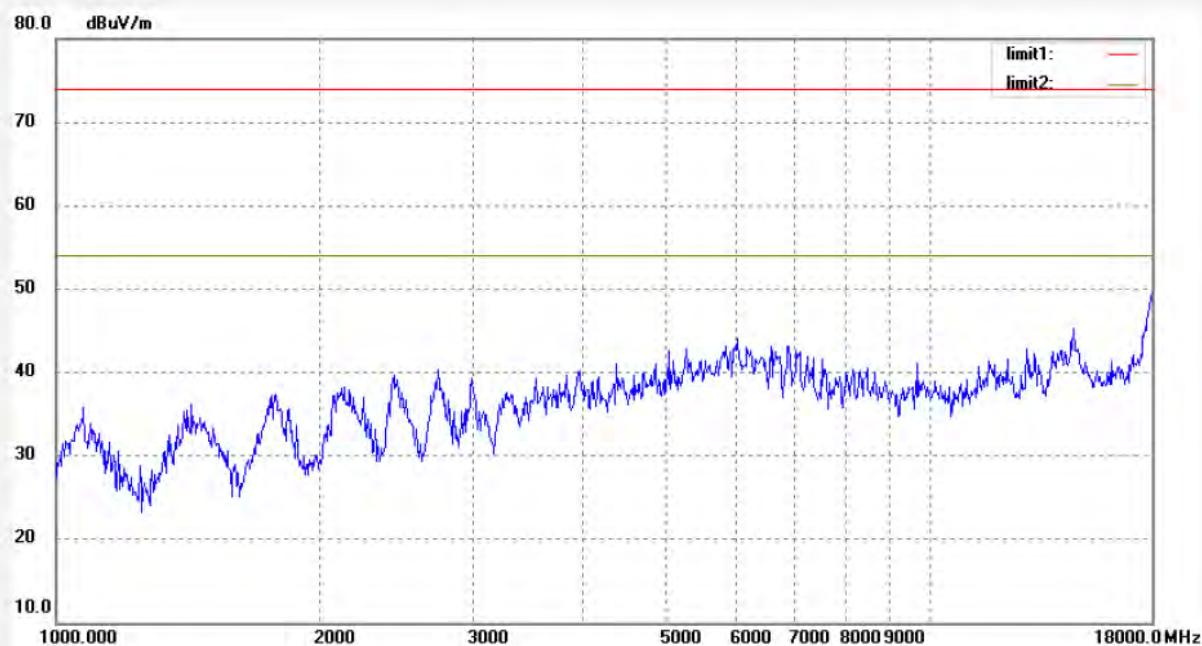
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: rucky2 #314
 Standard: FCC PART 15B (PK)
 Test item: Radiation Test
 Temp. (C) / Hum. (%) 23 C / 49 %
 EUT: 7 Inch Tablet PC/MID
 Mode: TX802.11g (CH6)
 Model: SM708
 Manufacturer: Superinworld Technology Co., Ltd

Polarization: Horizontal
 Power Source: AC 120V/60Hz
 Date: 12/10/19/
 Time: 5/30/34
 Engineer Signature: Ricky
 Distance: 3m

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

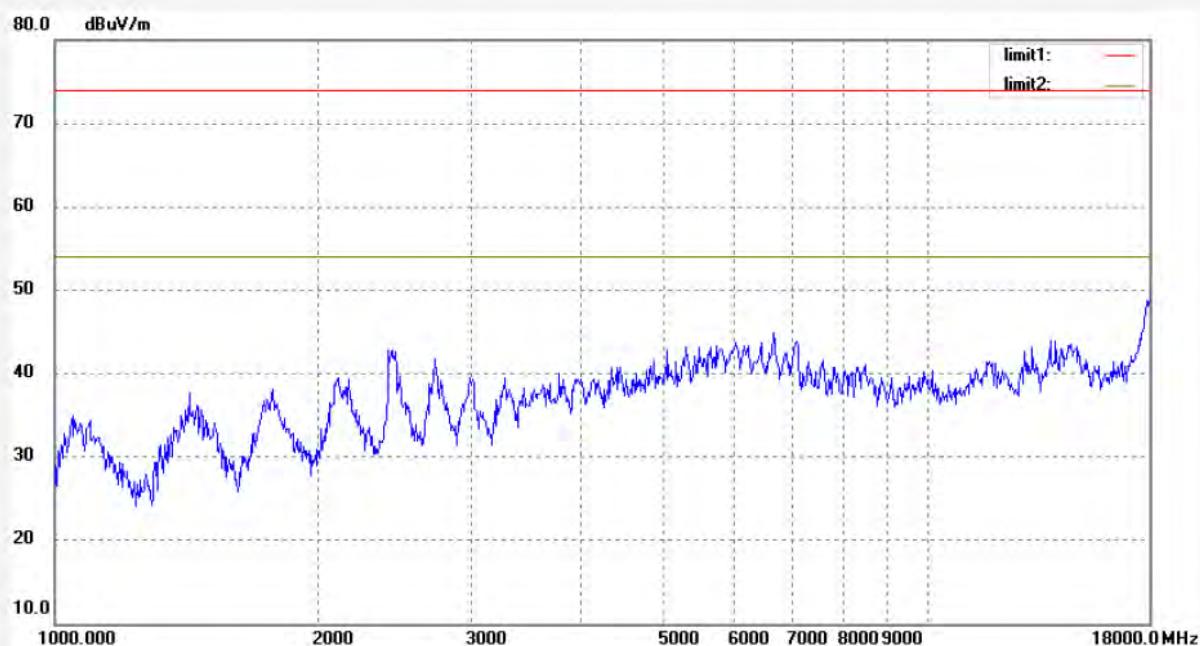

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: ricky2 #315	Polarization: Horizontal
Standard: FCC PART 15B (PK)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/19/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 5/33/12
EUT: 7 Inch Tablet PC/MID	Engineer Signature: Ricky
Mode: TX802.11g (CH1)	Distance: 3m
Model: SM708	
Manufacturer: Superinworld Technology Co., Ltd	

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

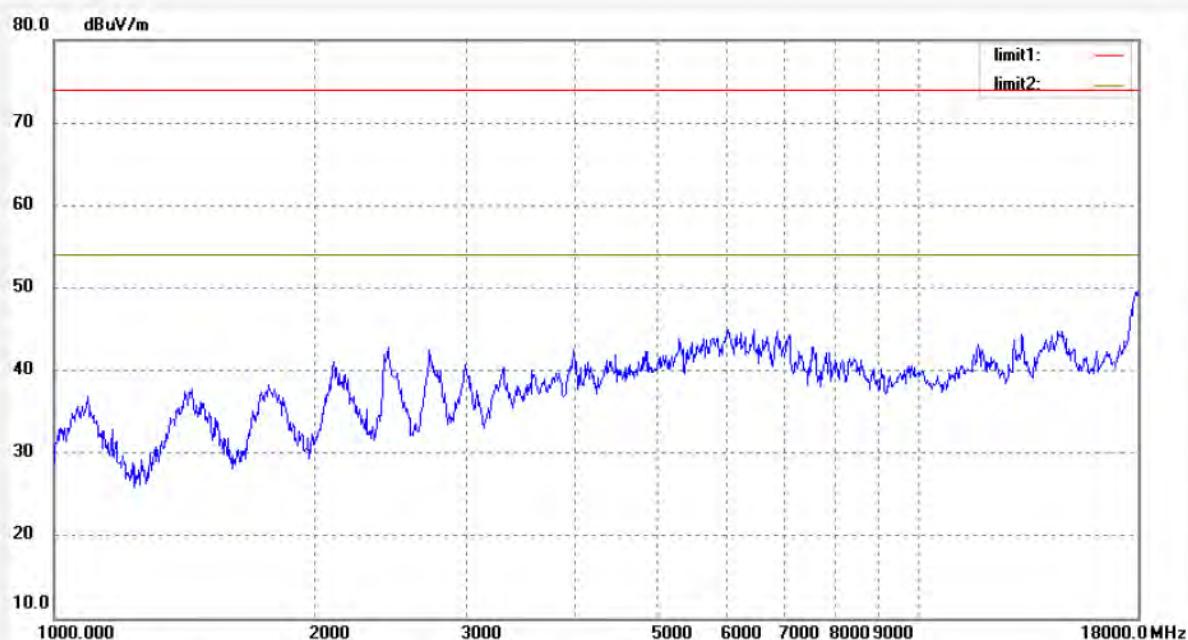

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: rucky2 #316	Polarization: Vertical
Standard: FCC PART 15B (PK)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/19/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 5/36/36
EUT: 7 Inch Tablet PC/MID	Engineer Signature: Ricky
Mode: TX802.11g (CH1)	Distance: 3m
Model: SM708	
Manufacturer: Superinworld Technology Co., Ltd	

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------


ACCURATE TECHNOLOGY CO., LTD.

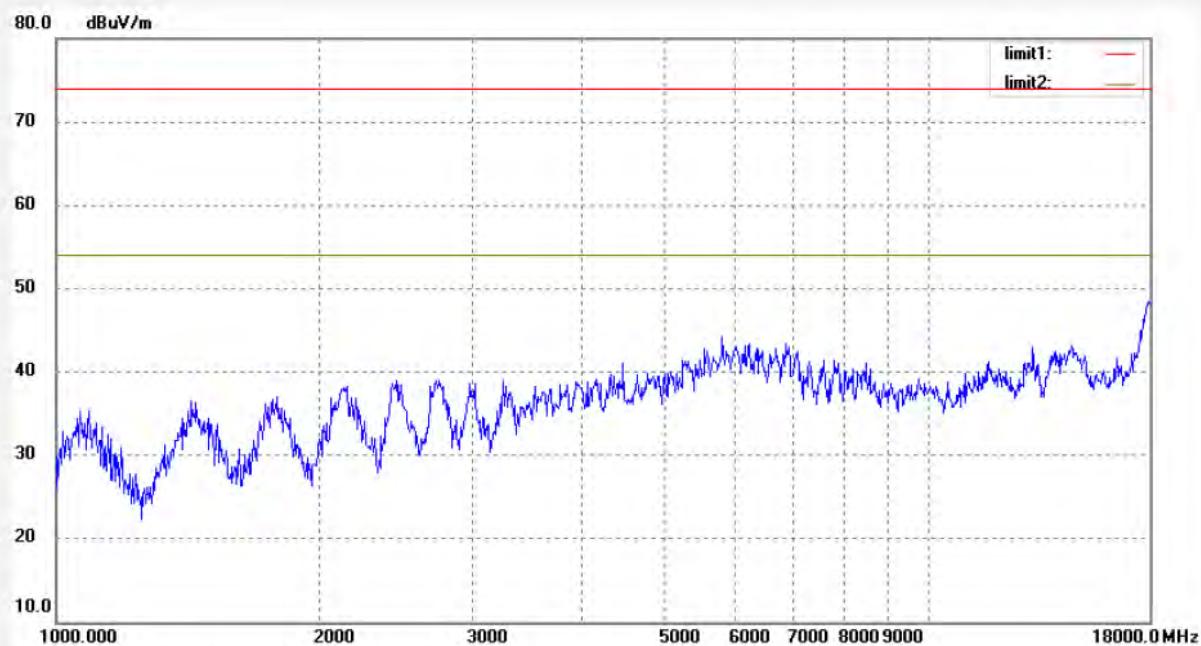
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: rucky2 #317
 Standard: FCC PART 15B (PK)
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 23 C / 49 %
 EUT: 7 Inch Tablet PC/MID
 Mode: TX802.11n20 (CH1)
 Model: SM708
 Manufacturer: Superinworld Technology Co., Ltd

Polarization: Vertical
 Power Source: AC 120V/60Hz
 Date: 12/10/19/
 Time: 5/38/10
 Engineer Signature: Ricky
 Distance: 3m

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

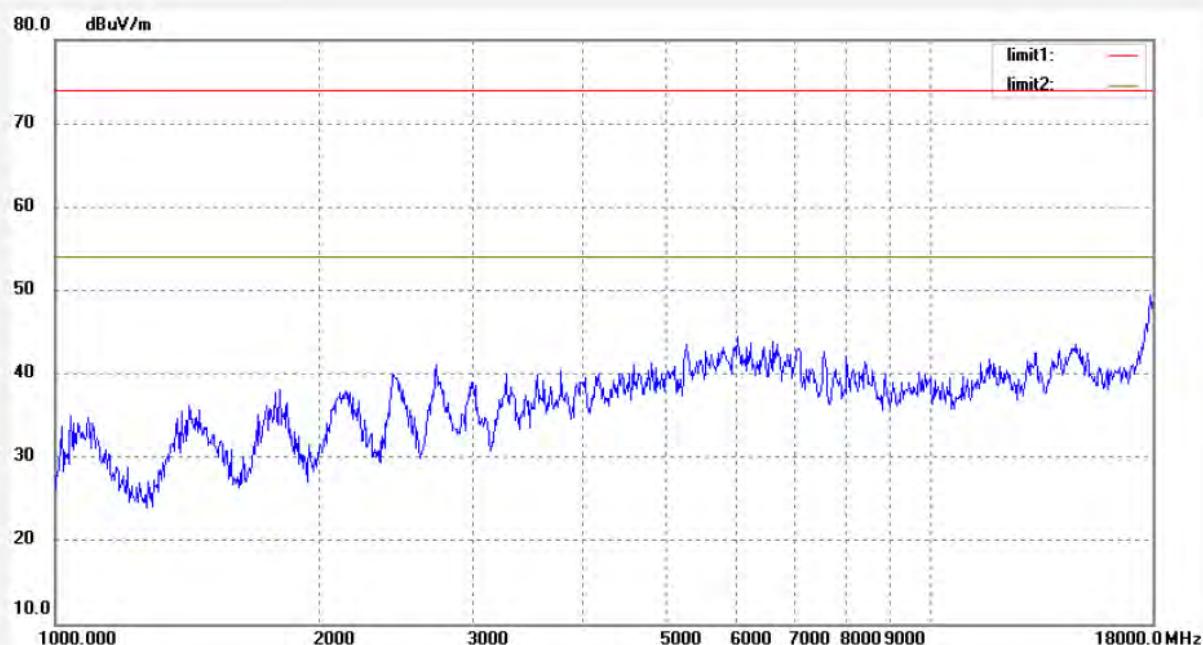

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: rucky2 #318	Polarization: Horizontal
Standard: FCC PART 15B (PK)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/19/
Temp. (C)/Hum.(%) 23 C / 49 %	Time: 5/40/05
EUT: 7 Inch Tablet PC/MID	Engineer Signature: Ricky
Mode: TX802.11n20 (CH1)	Distance: 3m
Model: SM708	
Manufacturer: Superinworld Technology Co., Ltd	

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

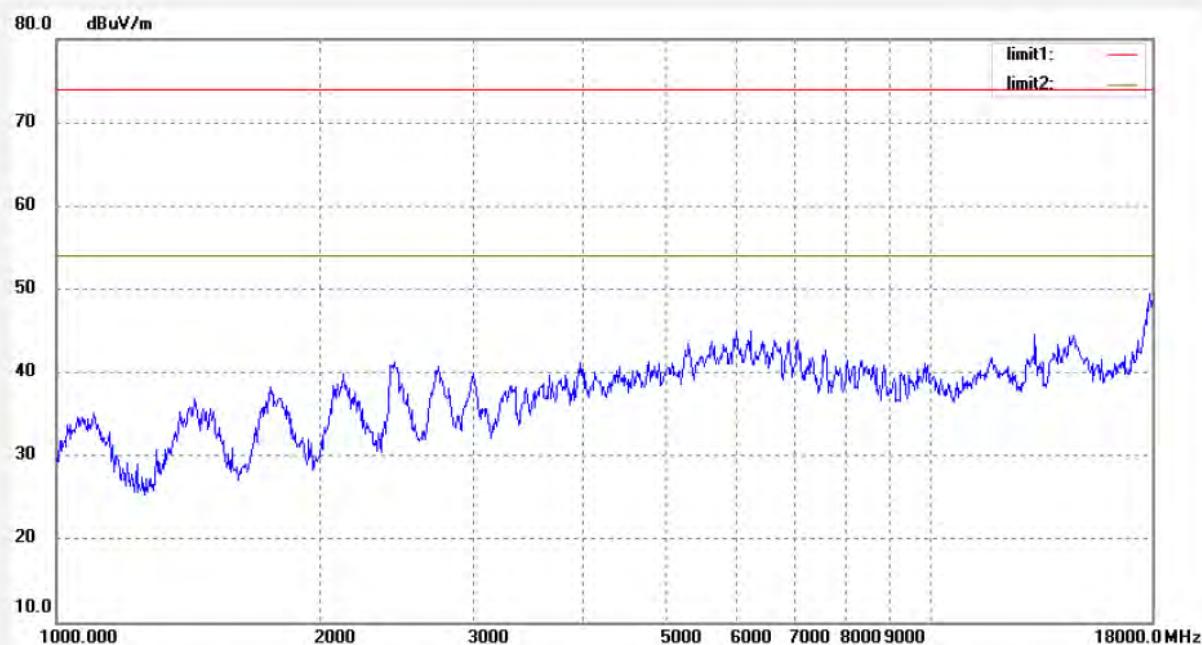

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: rucky2 #319	Polarization: Horizontal
Standard: FCC PART 15B (PK)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/19/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 5/42/46
EUT: 7 Inch Tablet PC/MID	Engineer Signature: Ricky
Mode: TX802.11n20 (CH6)	Distance: 3m
Model: SM708	
Manufacturer: Superinworld Technology Co., Ltd	

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

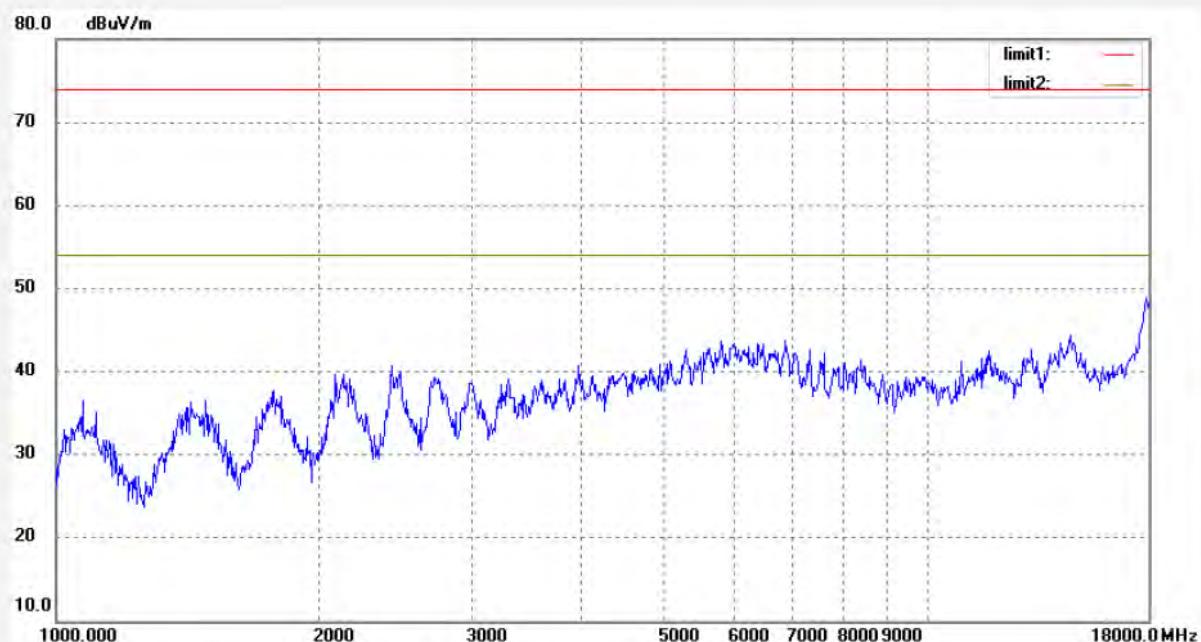

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: rucky2 #320	Polarization: Vertical
Standard: FCC PART 15B (PK)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/19/
Temp. (C)/Hum.(%) 23 C / 49 %	Time: 5/44/13
EUT: 7 Inch Tablet PC/MID	Engineer Signature: Ricky
Mode: TX802.11n20 (CH6)	Distance: 3m
Model: SM708	
Manufacturer: Superinworld Technology Co., Ltd	

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------


ACCURATE TECHNOLOGY CO., LTD.

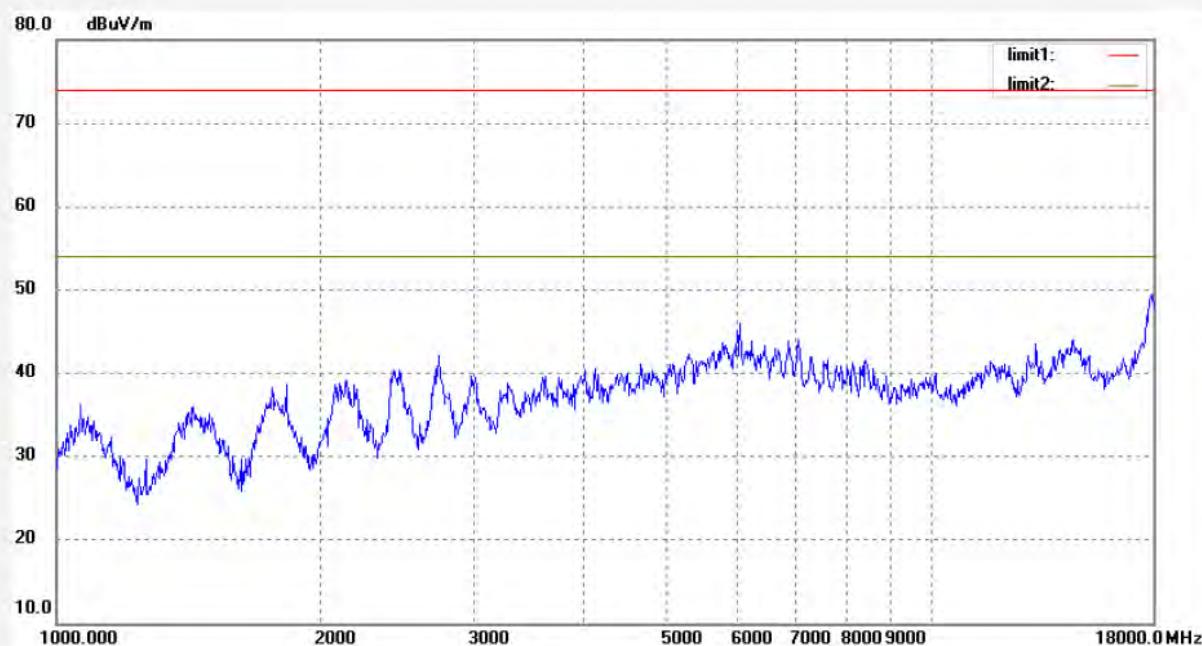
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: rucky2 #321
 Standard: FCC PART 15B (PK)
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 23 C / 49 %
 EUT: 7 Inch Tablet PC/MID
 Mode: TX802.11n20 (CH11)
 Model: SM708
 Manufacturer: Superinworld Technology Co., Ltd

Polarization: Vertical
 Power Source: AC 120V/60Hz
 Date: 12/10/19/
 Time: 5/46/56
 Engineer Signature: Ricky
 Distance: 3m

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

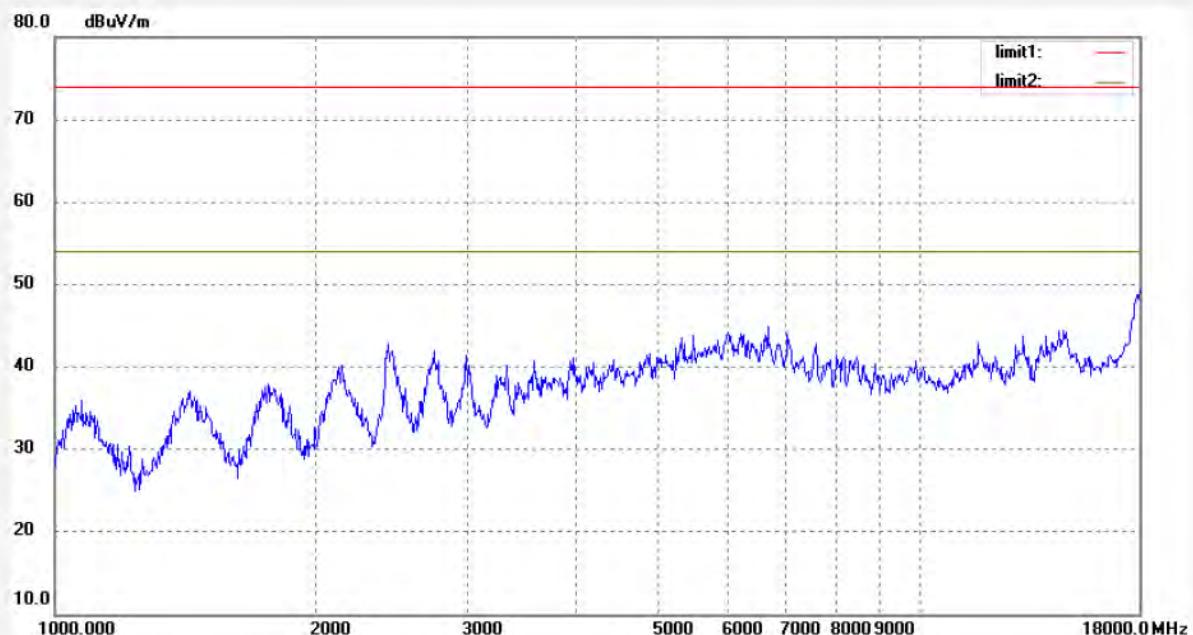

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: rucky2 #322	Polarization: Horizontal
Standard: FCC PART 15B (PK)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/19/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 5/48/36
EUT: 7 Inch Tablet PC/MID	Engineer Signature: Ricky
Mode: TX802.11n20 (CH11)	Distance: 3m
Model: SM708	
Manufacturer: Superinworld Technology Co., Ltd	

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

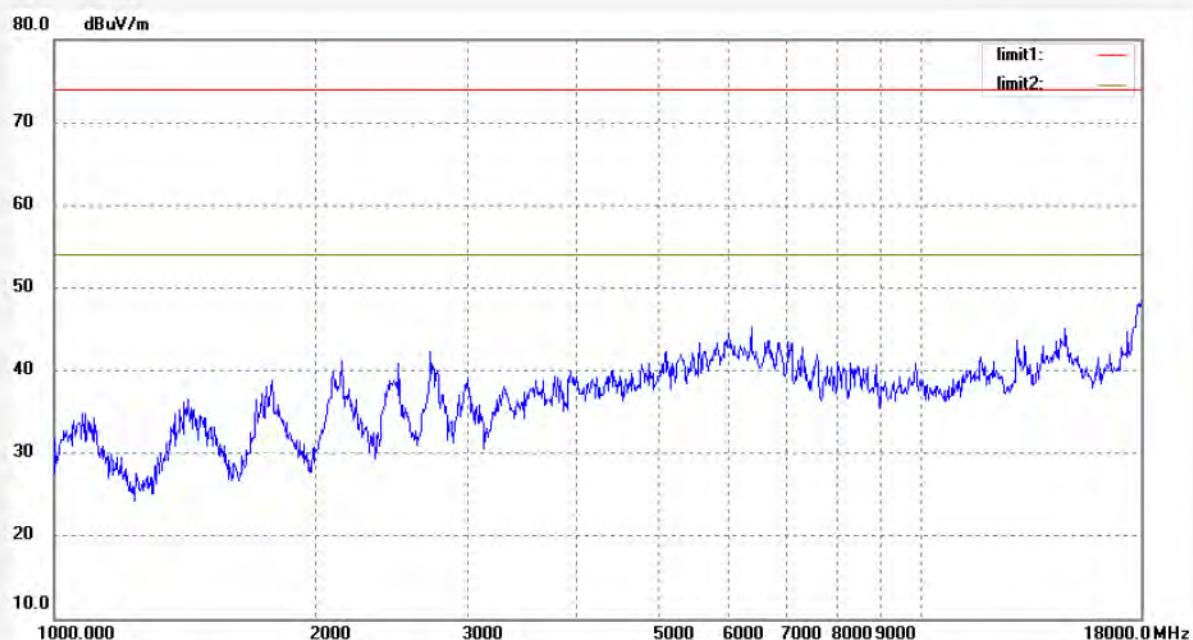

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: rucky2 #323	Polarization: Horizontal
Standard: FCC PART 15B (PK)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/19/
Temp. (C)/Hum.(%) 23 C / 49 %	Time: 5/50/15
EUT: 7 Inch Tablet PC/MID	Engineer Signature: Ricky
Mode: TX802.11n40 (CH9)	Distance: 3m
Model: SM708	
Manufacturer: Superinworld Technology Co., Ltd	

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



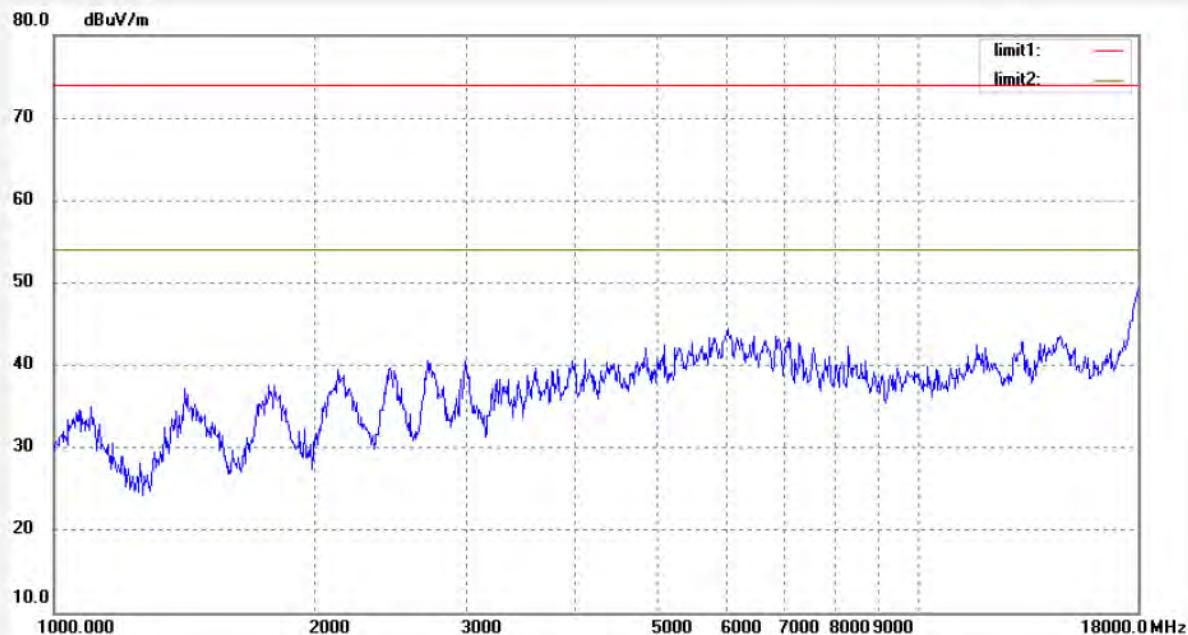
ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: ricky2 #324	Polarization: Vertical
Standard: FCC PART 15B (PK)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/19/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 5/52/34
EUT: 7 Inch Tablet PC/MID	Engineer Signature: Ricky
Mode: TX802.11n40 (CH9)	Distance: 3m
Model: SM708	
Manufacturer: Superinworld Technology Co., Ltd	

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

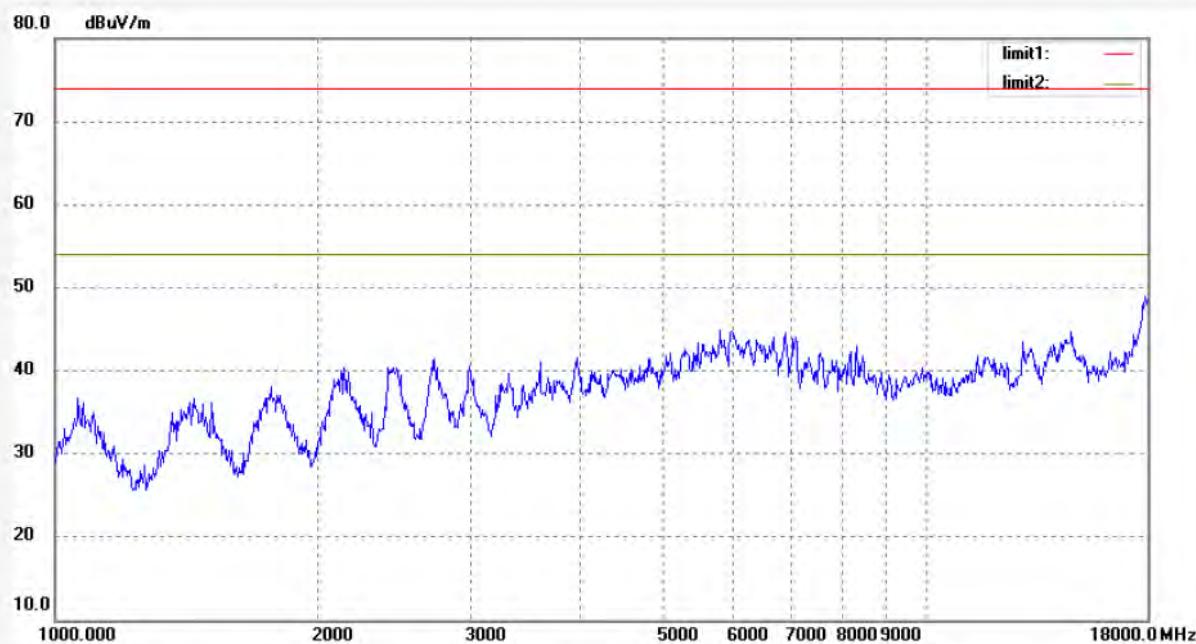

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	ucky2 #325	Polarization:	Vertical
Standard:	FCC PART 15B (PK)	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/10/19/
Temp. (C)/Hum.(%)	23 C / 49 %	Time:	5/54/07
EUT:	7 Inch Tablet PC/MID	Engineer Signature:	Ricky
Mode:	TX802.11n40 (CH6)	Distance:	3m
Model:	SM708		
Manufacturer:	Superinworld Technology Co., Ltd		

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark

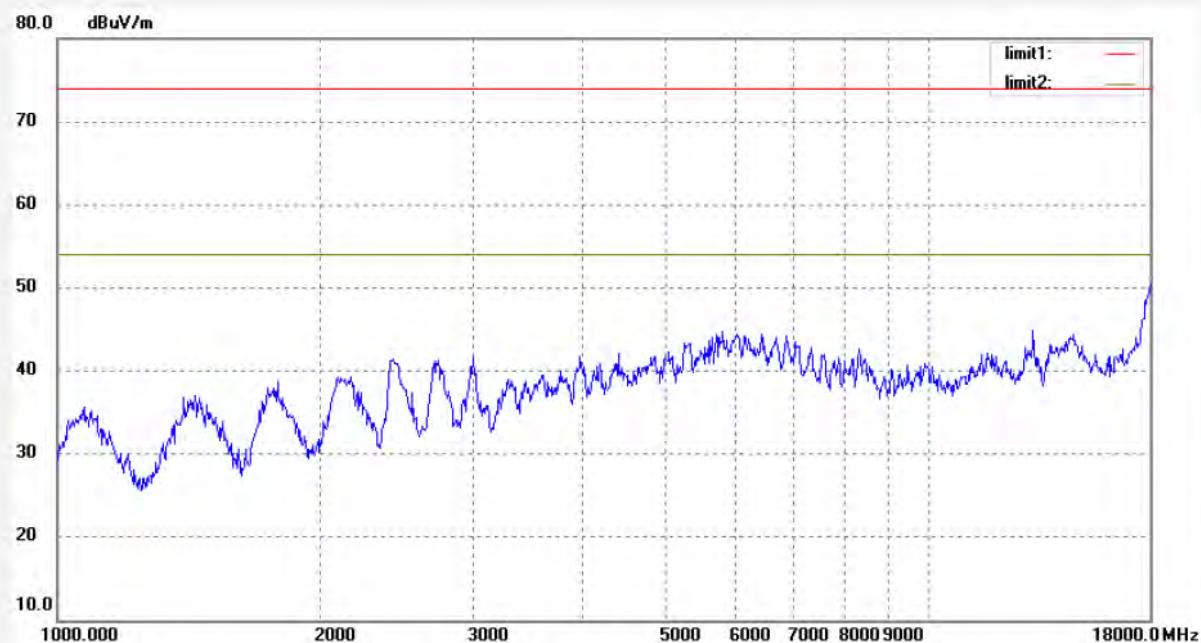

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: rucky2 #326	Polarization: Horizontal
Standard: FCC PART 15B (PK)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/19/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 5/56/17
EUT: 7 Inch Tablet PC/MID	Engineer Signature: Ricky
Mode: TX802.11n40 (CH6)	Distance: 3m
Model: SM708	
Manufacturer: Superinworld Technology Co., Ltd	

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------


ACCURATE TECHNOLOGY CO., LTD.

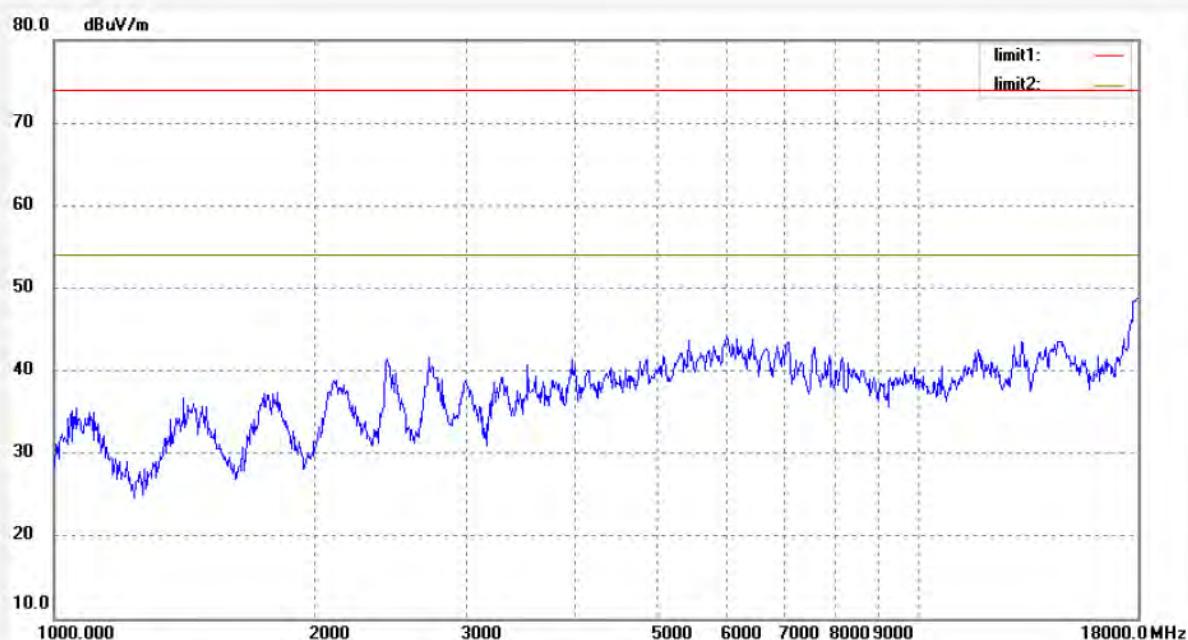
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: rucky2 #327
 Standard: FCC PART 15B (PK)
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 23 C / 49 %
 EUT: 7 Inch Tablet PC/MID
 Mode: TX802.11n40 (CH3)
 Model: SM708
 Manufacturer: Superinworld Technology Co., Ltd

Polarization: Horizontal
 Power Source: AC 120V/60Hz
 Date: 12/10/19/
 Time: 5/58/00
 Engineer Signature: Ricky
 Distance: 3m

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

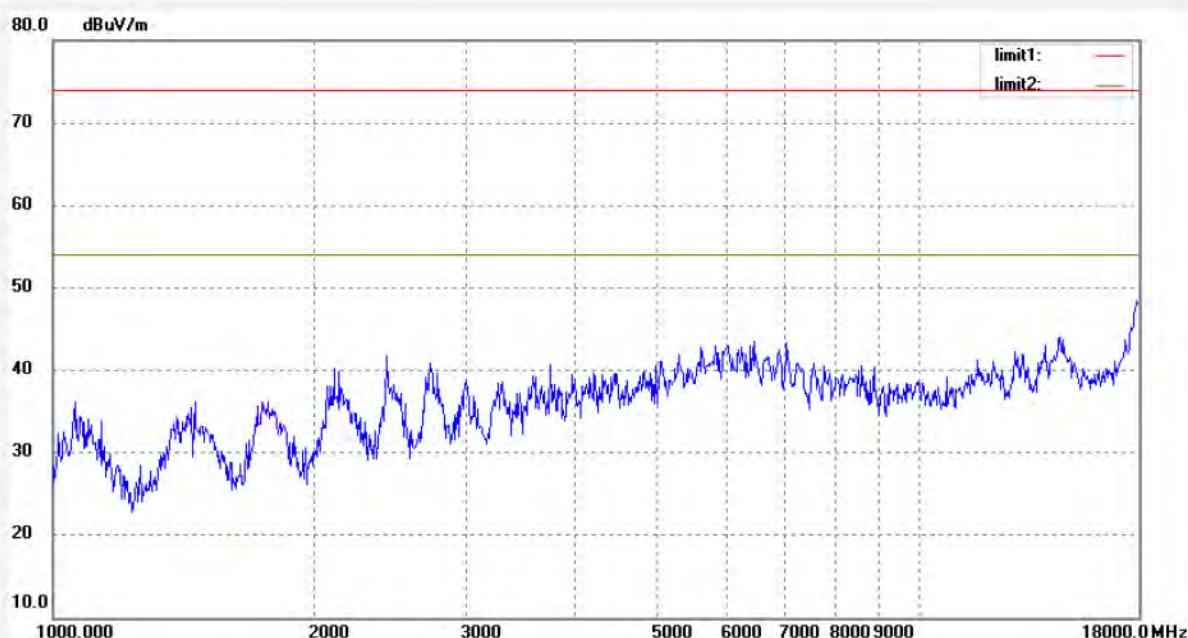

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	ruky2 #328	Polarization:	Vertical
Standard:	FCC PART 15B (PK)	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/10/19/
Temp. (C)/Hum.(%)	23 C / 49 %	Time:	5/59/59
EUT:	7 Inch Tablet PC/MID	Engineer Signature:	Ricky
Mode:	TX802.11n40 (CH3)	Distance:	3m
Model:	SM708		
Manufacturer:	Superinworld Technology Co., Ltd		

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Ricky #894

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/10/20/

Temp.(C)/Hum.(%) 25 C / 50 %

Time: 11/10/55

EUT: 7 Inch Tablet PC/MID

Engineer Signature: Ricky

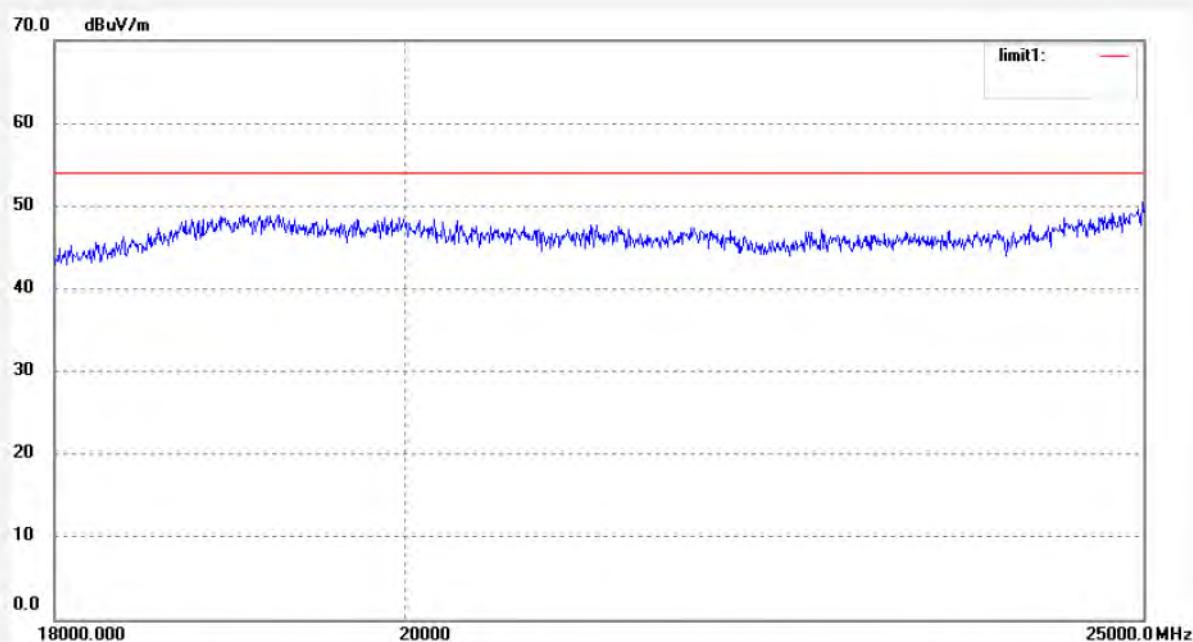
Mode: TX802.11B (1)

Distance: 3m

Model: SM708

Manufacturer: Superinworld Technology Co., Ltd

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

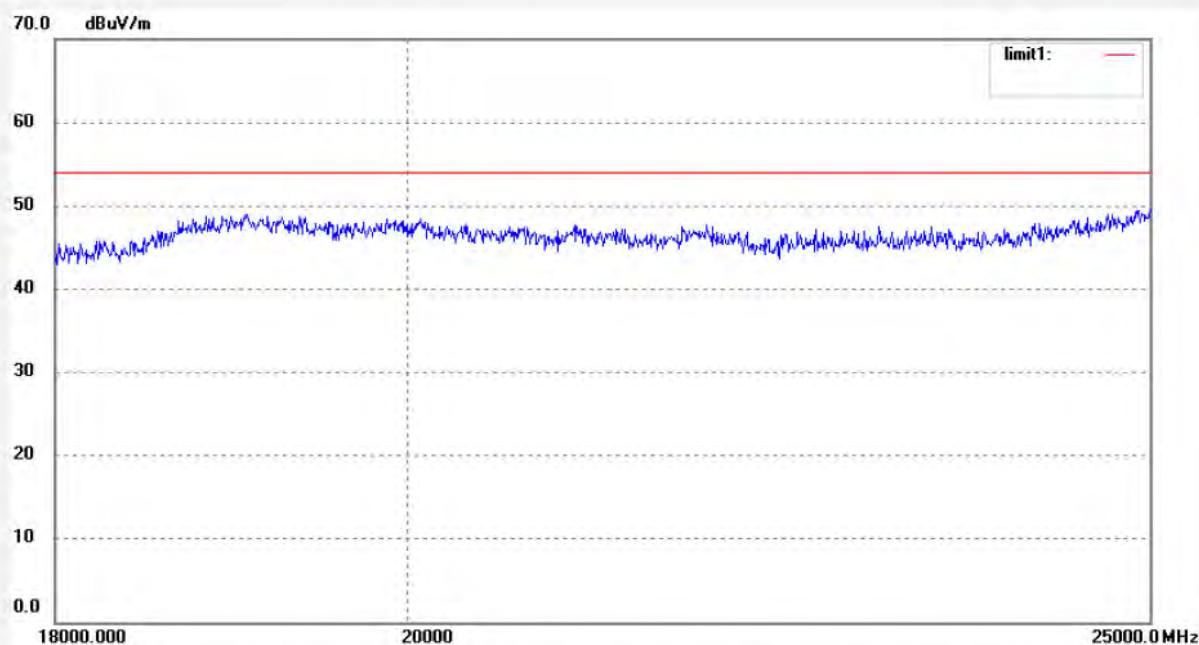

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Ricky #895	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/20/
Temp. (C)/Hum.(%) 25 C / 50 %	Time: 11/15/30
EUT: 7 Inch Tablet PC/MID	Engineer Signature: Ricky
Mode: TX802.11B (1)	Distance: 3m
Model: SM708	
Manufacturer: Superinworld Technology Co., Ltd	

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

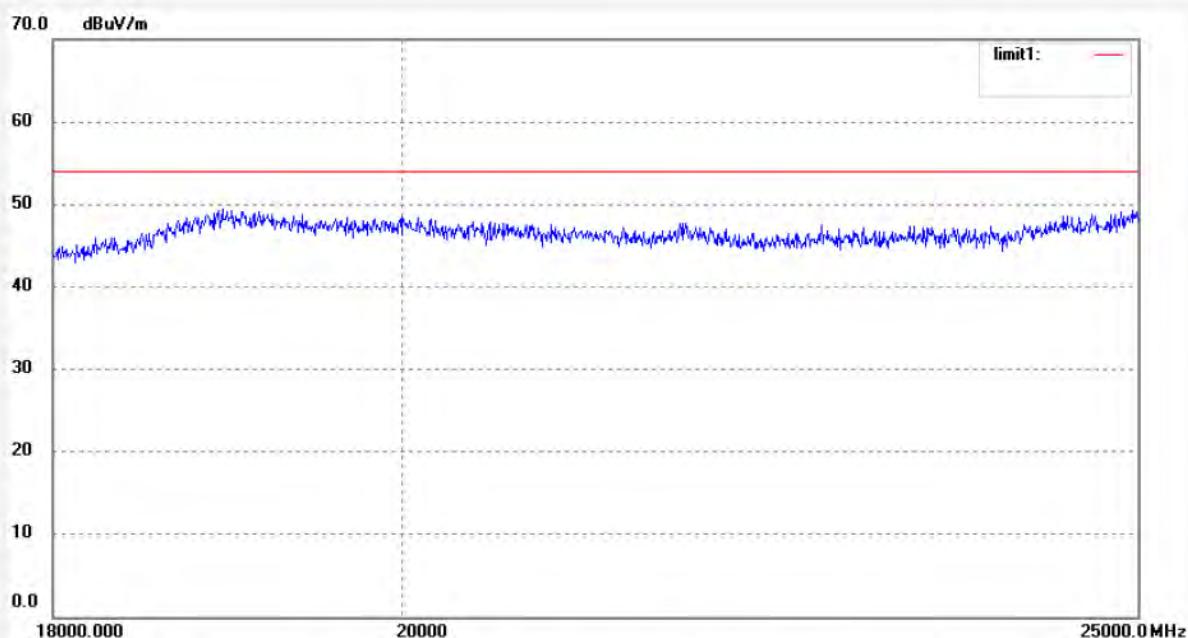

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	Ricky #896	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/10/20
Temp. (C)/Hum.(%)	25 C / 50 %	Time:	11/20/32
EUT:	7 Inch Tablet PC/MID	Engineer Signature:	Ricky
Mode:	TX802.11B (6)	Distance:	3m
Model:	SM708		
Manufacturer:	Superinworld Technology Co., Ltd		

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark

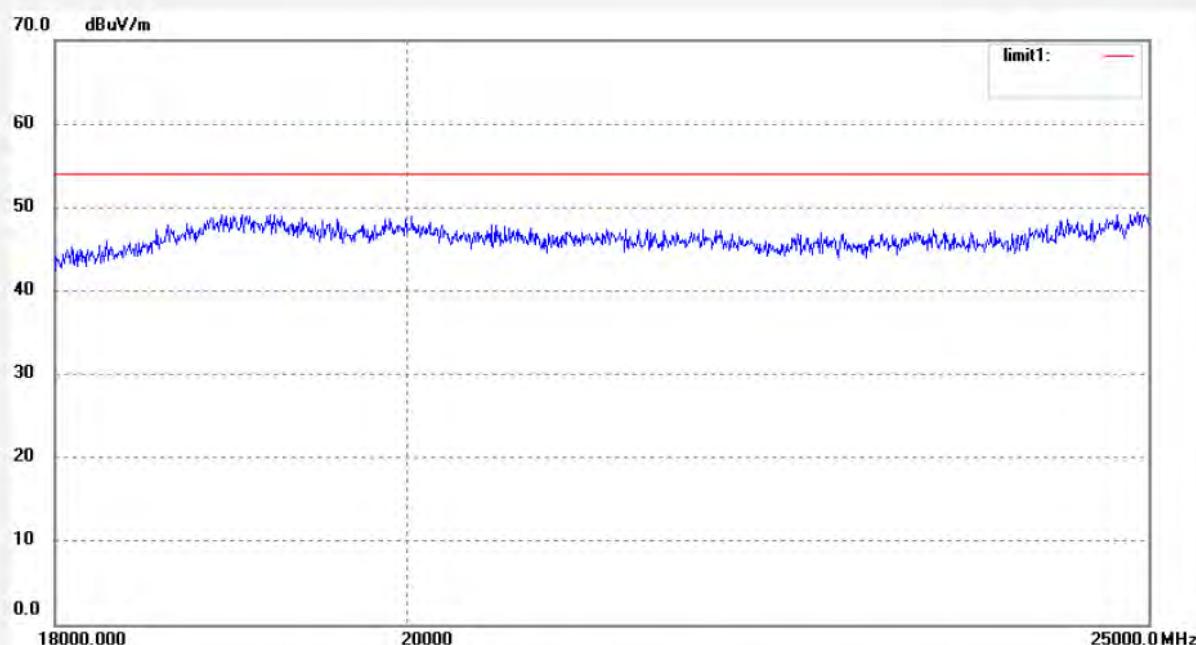

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Ricky #897	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/20/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 11/24/25
EUT: 7 Inch Tablet PC/MID	Engineer Signature: Ricky
Mode: TX802.11B (6)	Distance: 3m
Model: SM708	
Manufacturer: Superinworld Technology Co., Ltd	

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

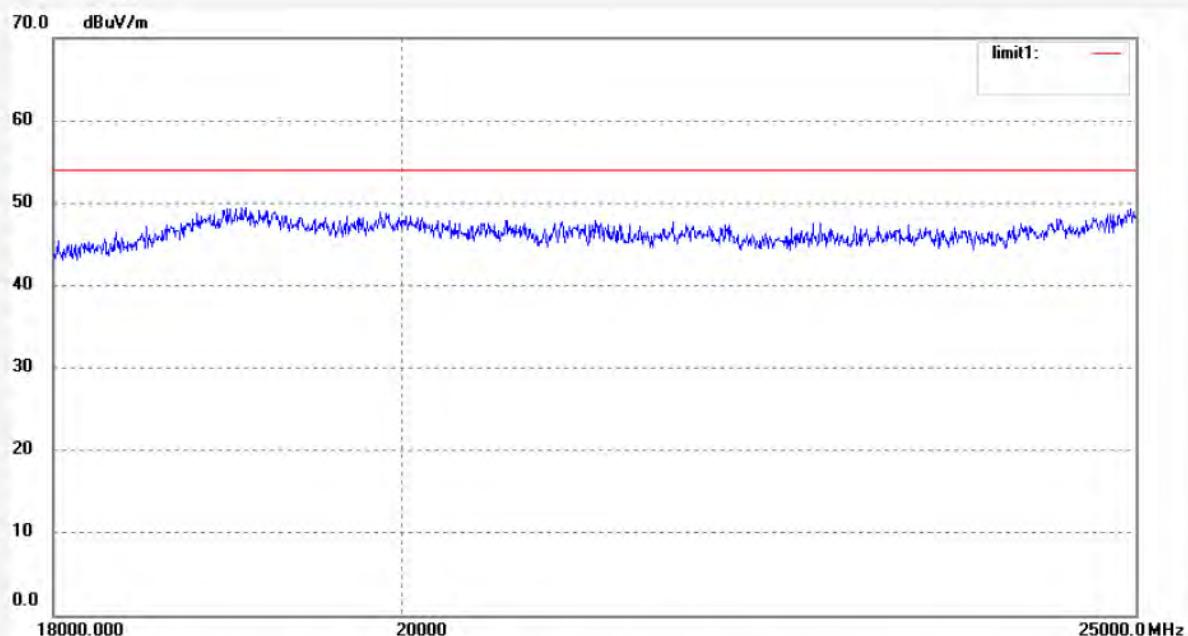
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Ricky #898
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 25 C / 50 %
 EUT: 7 Inch Tablet PC/MID
 Mode: TX802.11B (11)
 Model: SM708
 Manufacturer: Superinworld Technology Co., Ltd

Polarization: Vertical
 Power Source: AC 120V/60Hz
 Date: 12/10/20/
 Time: 11/36/24
 Engineer Signature: Ricky
 Distance: 3m

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

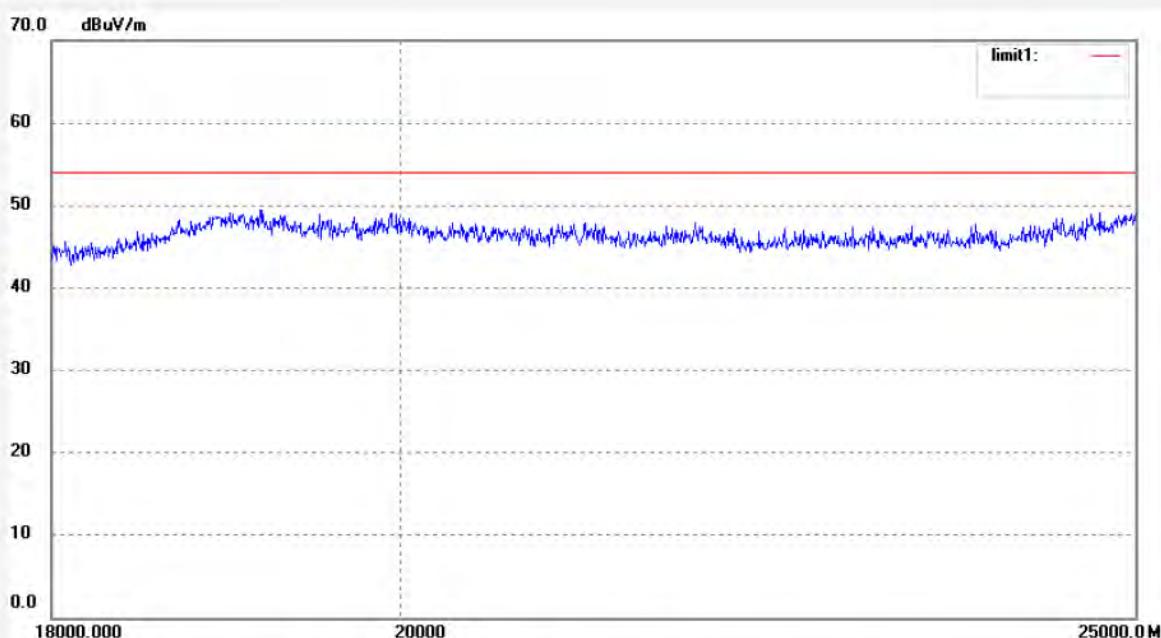

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	Ricky #899	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/10/20/
Temp. (C)/Hum.(%)	25 C / 50 %	Time:	11/40/25
EUT:	7 Inch Tablet PC/MID	Engineer Signature:	Ricky
Mode:	TX802.11B (11)	Distance:	3m
Model:	SM708		
Manufacturer:	Superinworld Technology Co., Ltd		

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark

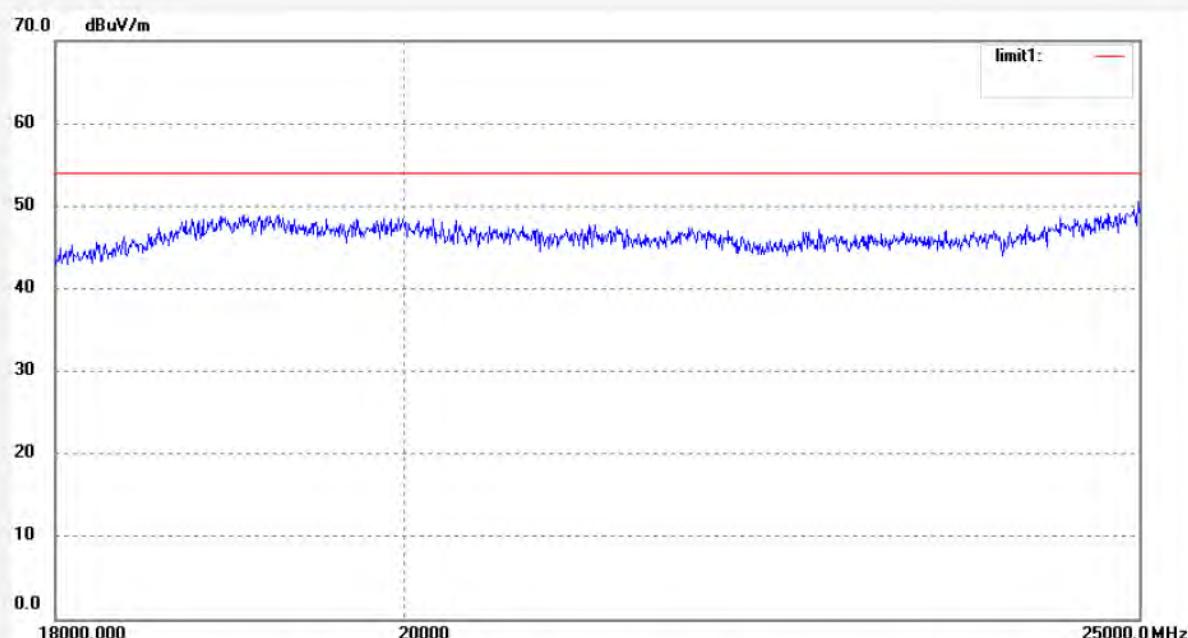

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	Ricky #900	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/10/20/
Temp.(C)/Hum.(%)	25 C / 50 %	Time:	12/06/15
EUT:	7 Inch Tablet PC/MID	Engineer Signature:	Ricky
Mode:	TX802.11G (1)	Distance:	3m
Model:	SM708		
Manufacturer: Superinworld Technology Co., Ltd			

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

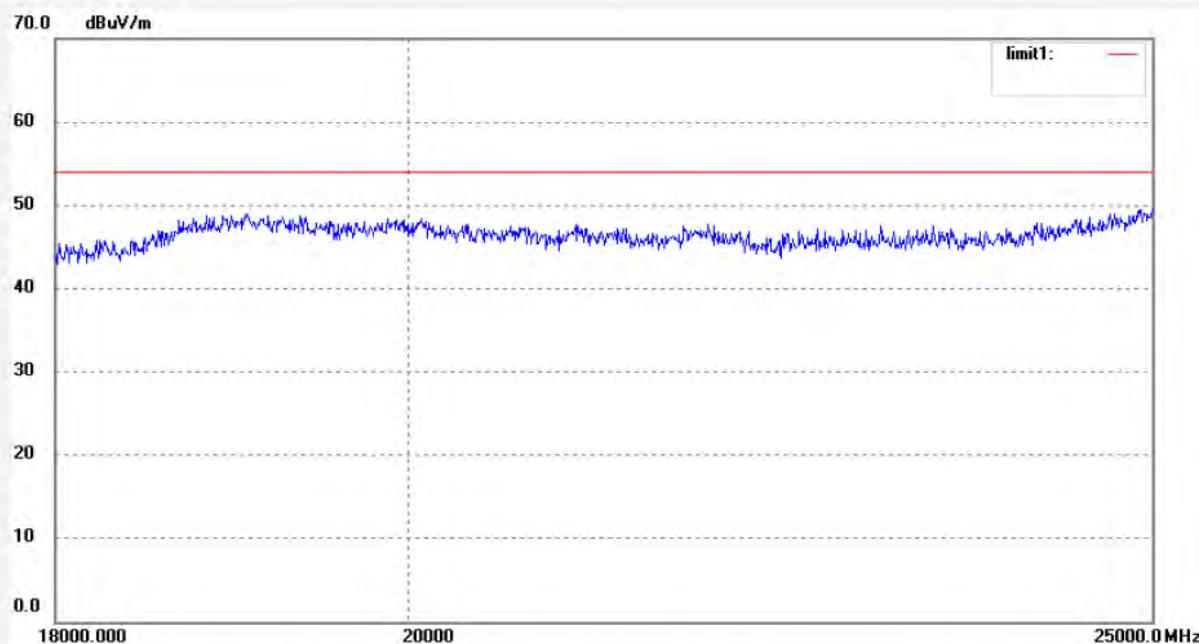

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	Ricky #901	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/10/20/
Temp. (C)/Hum.(%)	25 C / 50 %	Time:	12/09/59
EUT:	7 Inch Tablet PC/MID	Engineer Signature:	Ricky
Mode:	TX802.11G (1)	Distance:	3m
Model:	SM708		
Manufacturer: Superinworld Technology Co., Ltd			

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

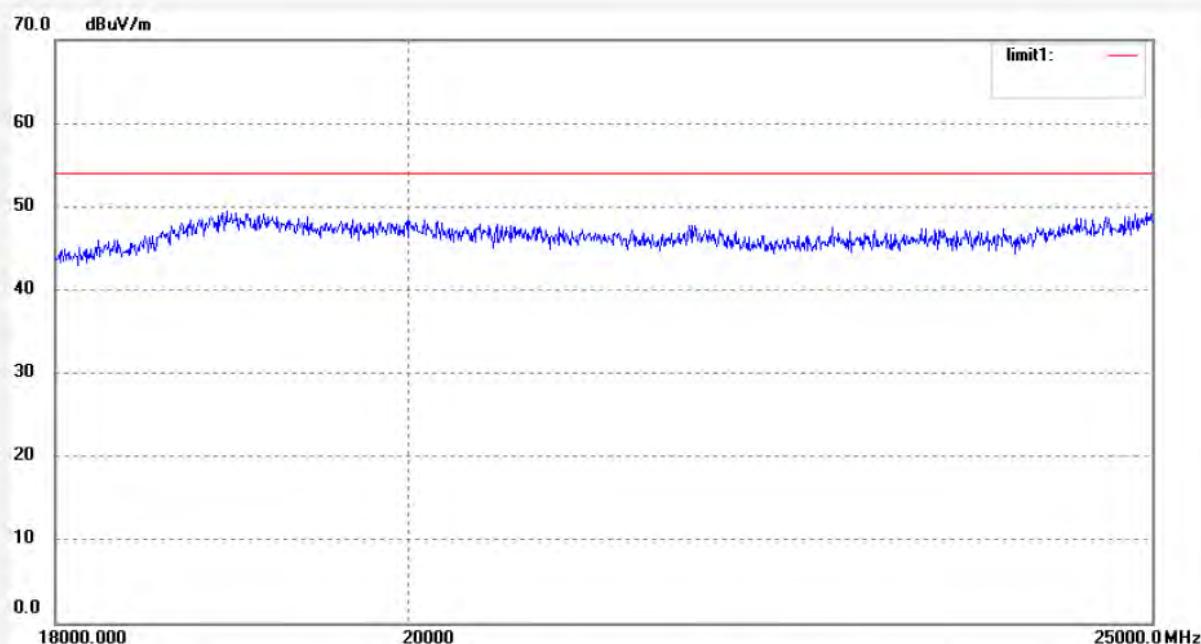

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	Ricky #902	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/10/20/
Temp. (C)/Hum.(%)	25 C / 50 %	Time:	12/12/23
EUT:	7 Inch Tablet PC/MID	Engineer Signature:	Ricky
Mode:	TX802.11G (6)	Distance:	3m
Model:	SM708		
Manufacturer: Superinworld Technology Co., Ltd			

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

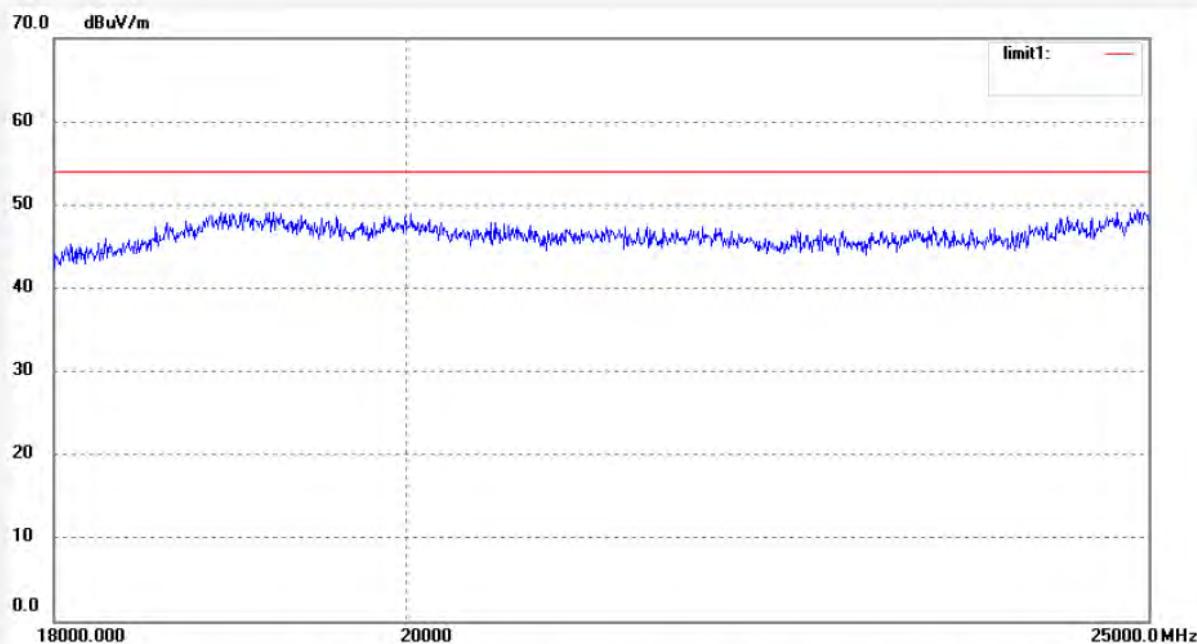

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	Ricky #903	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/10/20/
Temp. (C)/Hum.(%)	25 C / 50 %	Time:	12/16/44
EUT:	7 Inch Tablet PC/MID	Engineer Signature:	Ricky
Mode:	TX802.11G (6)	Distance:	3m
Model:	SM708		
Manufacturer: Superinworld Technology Co., Ltd			

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

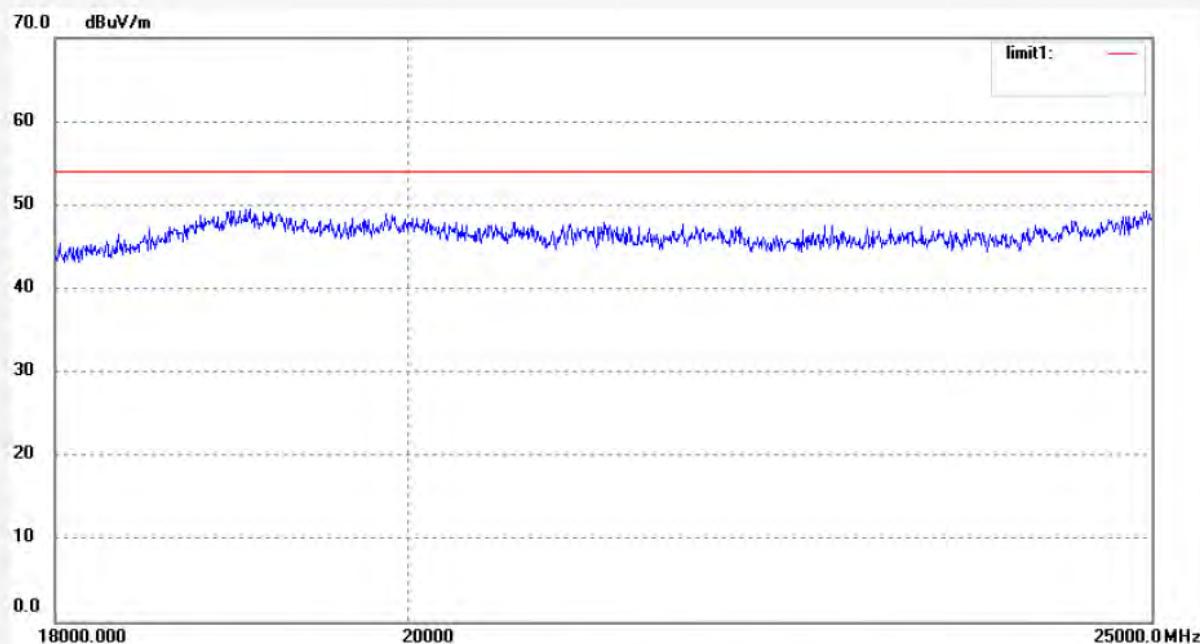

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	Ricky #904	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/10/20/
Temp. (C)/Hum.(%)	25 C / 50 %	Time:	12/21/43
EUT:	7 Inch Tablet PC/MID	Engineer Signature:	Ricky
Mode:	TX802.11G (11)	Distance:	3m
Model:	SM708		
Manufacturer: Superinworld Technology Co., Ltd			

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------


ACCURATE TECHNOLOGY CO., LTD.

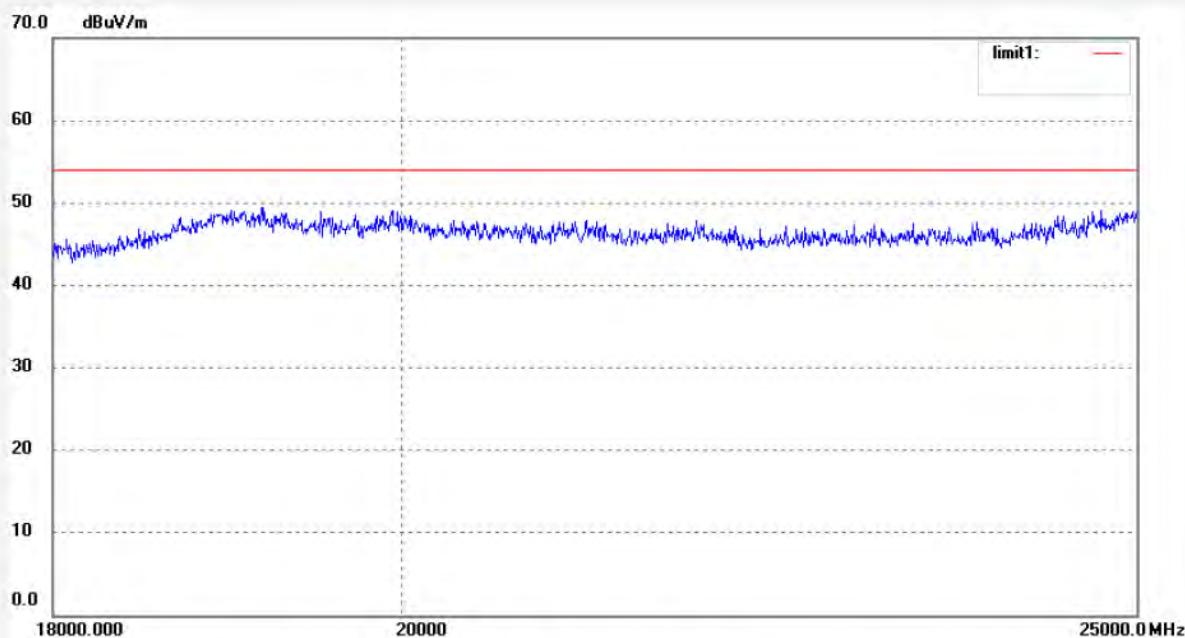
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

 Job No.: Ricky #905
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp. (C)/Hum.(%) 25 C / 50 %
 EUT: 7 Inch Tablet PC/MID
 Mode: TX802.11G (11)
 Model: SM708
 Manufacturer: Superinworld Technology Co., Ltd

 Polarization: Horizontal
 Power Source: AC 120V/60Hz
 Date: 12/10/20/
 Time: 12/24/37
 Engineer Signature: Ricky
 Distance: 3m

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

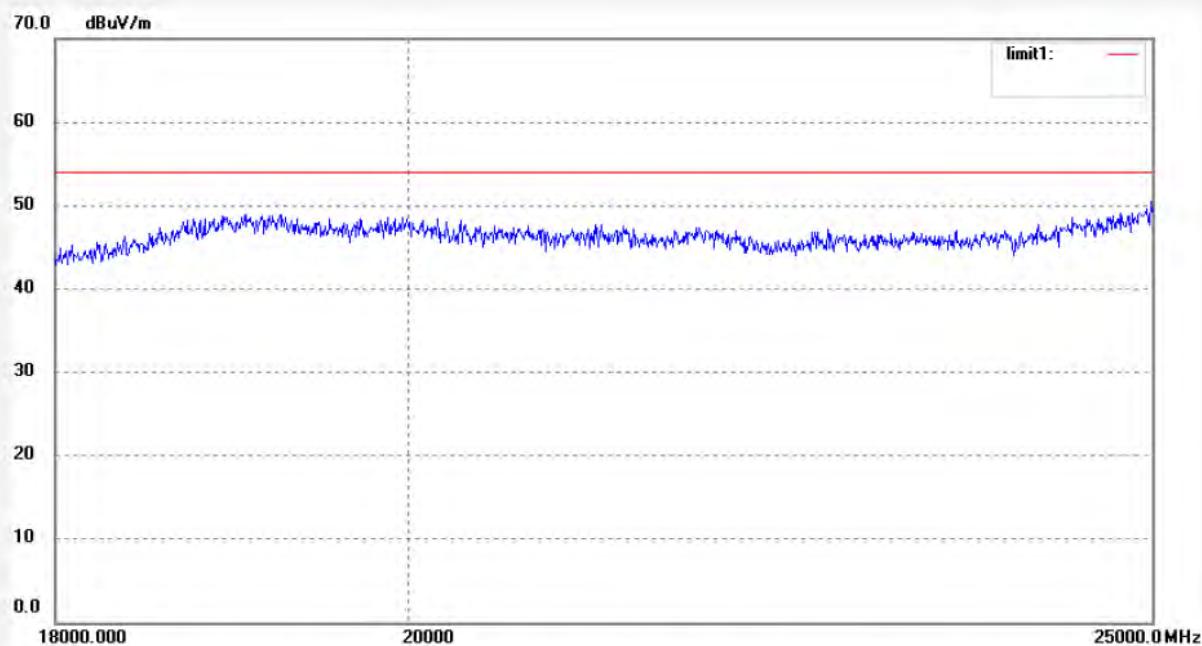

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	Ricky #906	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/10/20
Temp. (C)/Hum. (%)	25 C / 50 %	Time:	12/28/20
EUT:	7 Inch Tablet PC/MID	Engineer Signature:	Ricky
Mode:	TX802.11N20 (1)	Distance:	3m
Model:	SM708		
Manufacturer: Superinworld Technology Co., Ltd			

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Ricky #907

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/10/20/

Temp. (C)/Hum.(%) 25 C / 50 %

Time: 12/32/22

EUT: 7 Inch Tablet PC/MID

Engineer Signature: Ricky

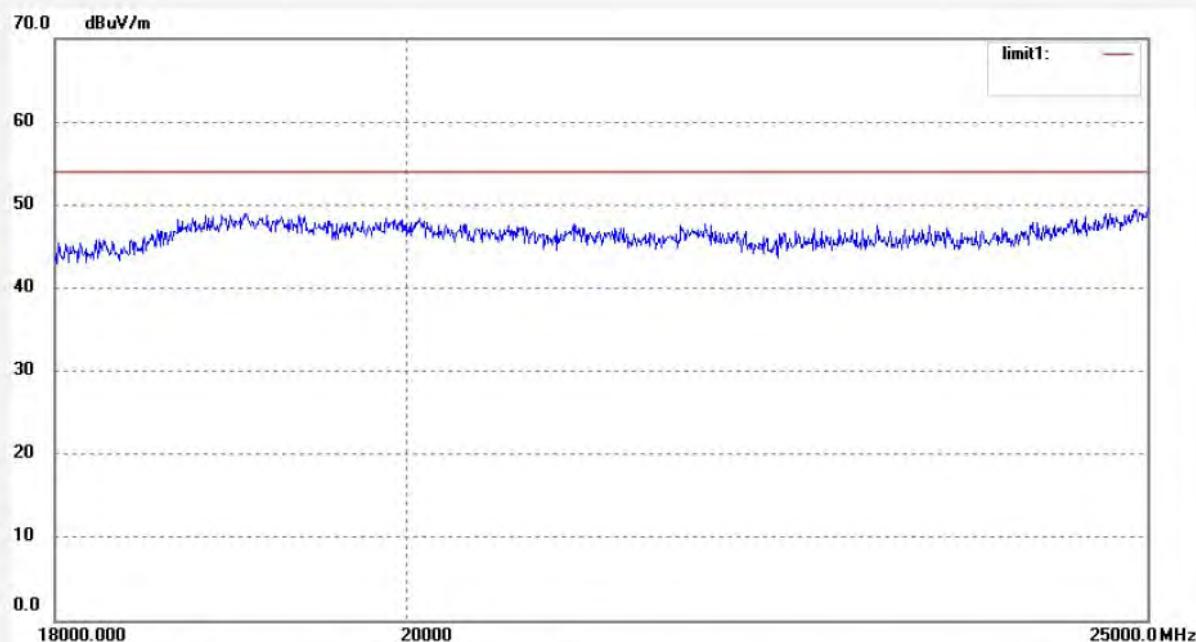
Mode: TX802.11N20 (1)

Distance: 3m

Model: SM708

Manufacturer: Superinworld Technology Co., Ltd

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

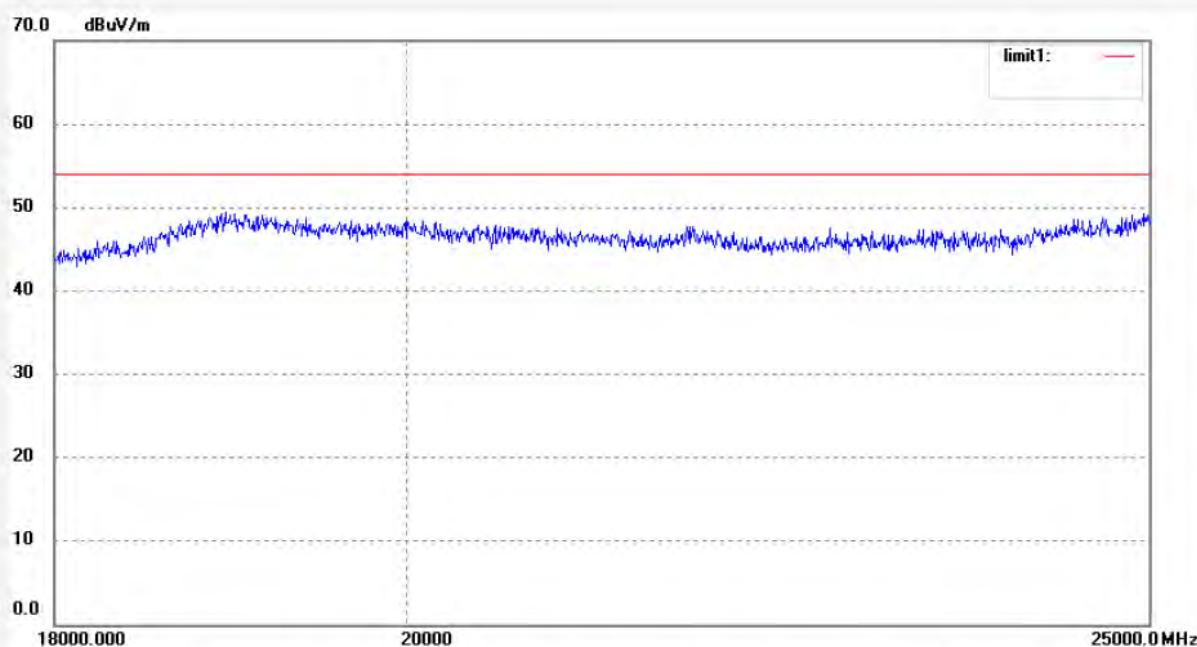

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Ricky #908	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/20/
Temp. (C)/Hum.(%) 25 C / 50 %	Time: 12/35/13
EUT: 7 Inch Tablet PC/MID	Engineer Signature: Ricky
Mode: TX802.11N20 (6)	Distance: 3m
Model: SM708	
Manufacturer: Superinworld Technology Co., Ltd	

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

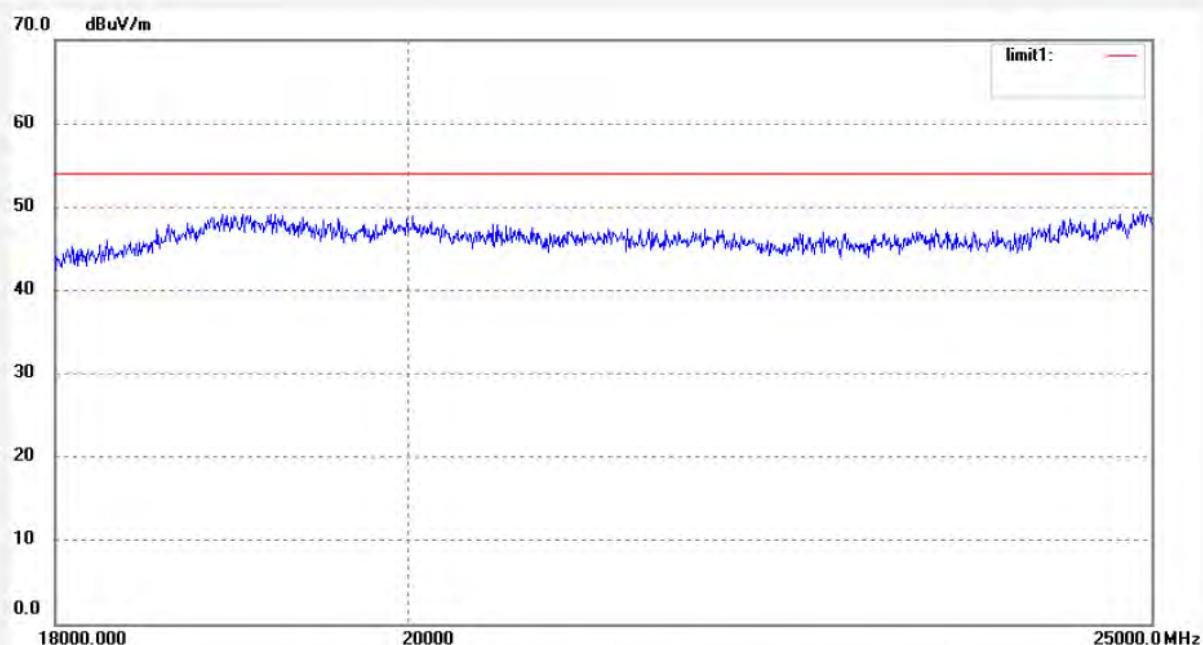

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Ricky #909	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/20/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 12/40/40
EUT: 7 Inch Tablet PC/MID	Engineer Signature: Ricky
Mode: TX802.11N20 (6)	Distance: 3m
Model: SM708	
Manufacturer: Superinworld Technology Co., Ltd	

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

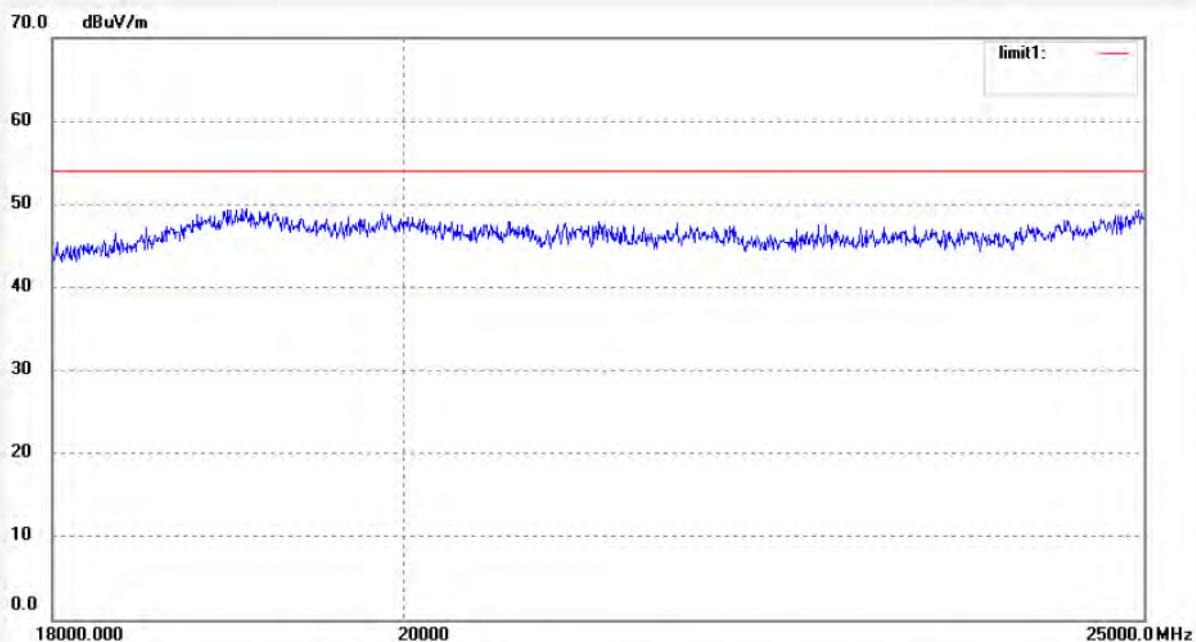

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	Ricky #910	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/10/20/
Temp.(C)/Hum.(%)	25 C / 50 %	Time:	12/43/25
EUT:	7 Inch Tablet PC/MID	Engineer Signature:	Ricky
Mode:	TX802.11N20 (11)	Distance:	3m
Model:	SM708		
Manufacturer: Superinworld Technology Co., Ltd			

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

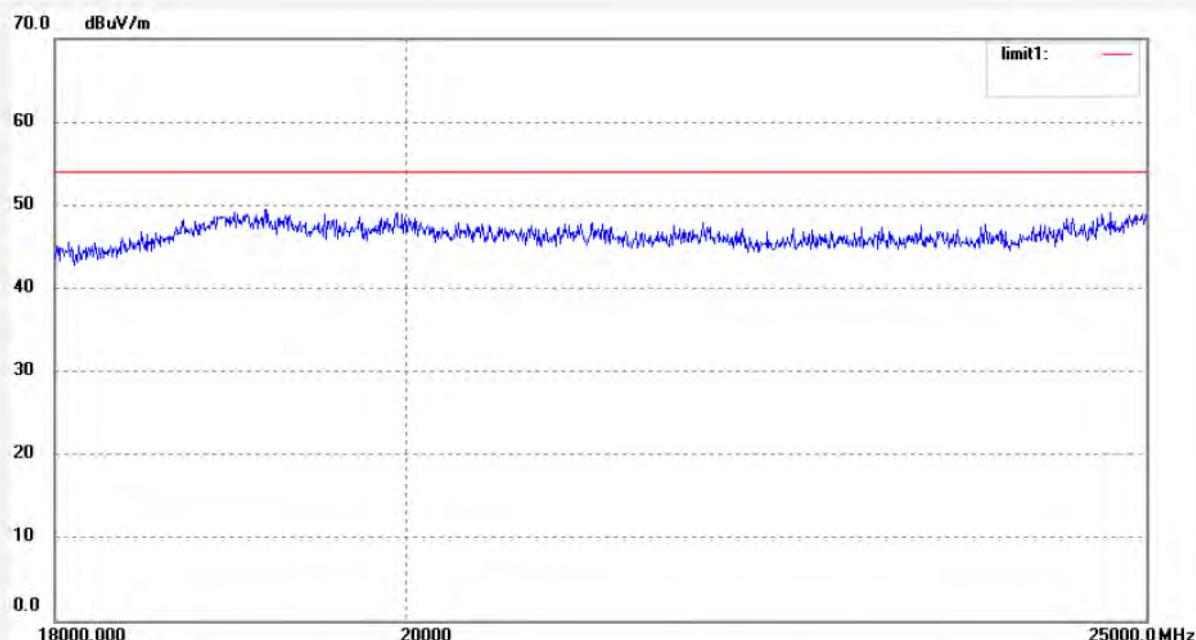

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	Ricky #911	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/10/20/
Temp. (C)/Hum.(%)	25 C / 50 %	Time:	12/46/52
EUT:	7 Inch Tablet PC/MID	Engineer Signature:	Ricky
Mode:	TX802.11N20 (11)	Distance:	3m
Model:	SM708		
Manufacturer: Superinworld Technology Co., Ltd			

Note:



No.	Freq. (MHz)	Reading (dB _{UV} /m)	Factor (dB)	Result (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	-------------------------------	-------------	------------------------------	-----------------------------	-------------	----------	-------------	---------------	--------

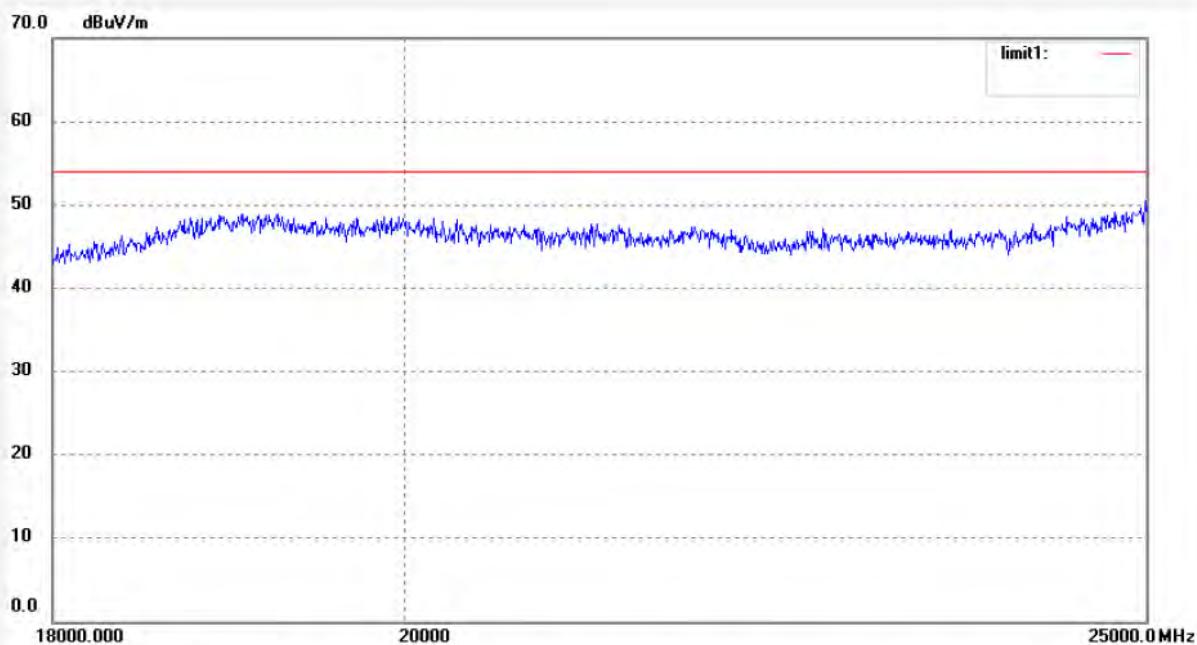

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	Ricky #912	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/10/20/
Temp. (C)/Hum.(%)	25 C / 50 %	Time:	13/08/20
EUT:	7 Inch Tablet PC/MID	Engineer Signature:	Ricky
Mode:	TX802.11N40 (1)	Distance:	3m
Model:	SM708		
Manufacturer: Superinworld Technology Co., Ltd			

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

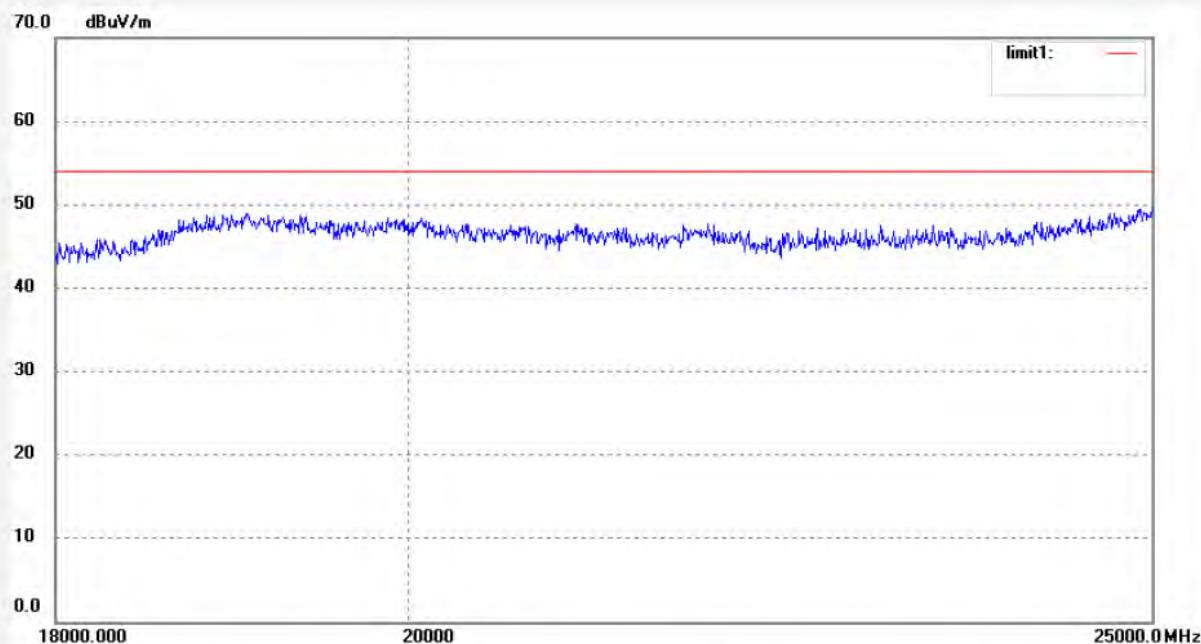

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	Ricky #913	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/10/20/
Temp. (C)/Hum.(%)	25 C / 50 %	Time:	13/12/22
EUT:	7 Inch Tablet PC/MID	Engineer Signature:	Ricky
Mode:	TX802.11N40 (1)	Distance:	3m
Model:	SM708		
Manufacturer: Superinworld Technology Co., Ltd			

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Ricky #914

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 12/10/20/

Temp. (C)/Hum.(%) 25 C / 50 %

Time: 13/15/13

EUT: 7 Inch Tablet PC/MID

Engineer Signature: Ricky

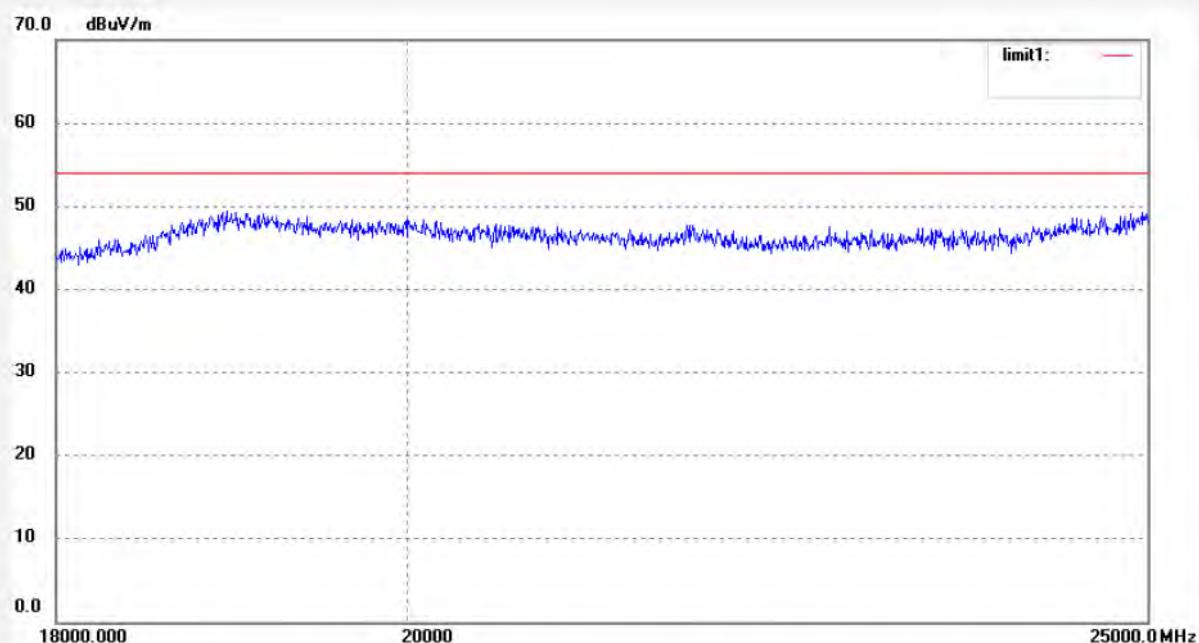
Mode: TX802.11N40 (6)

Distance: 3m

Model: SM708

Manufacturer: Superinworld Technology Co., Ltd

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

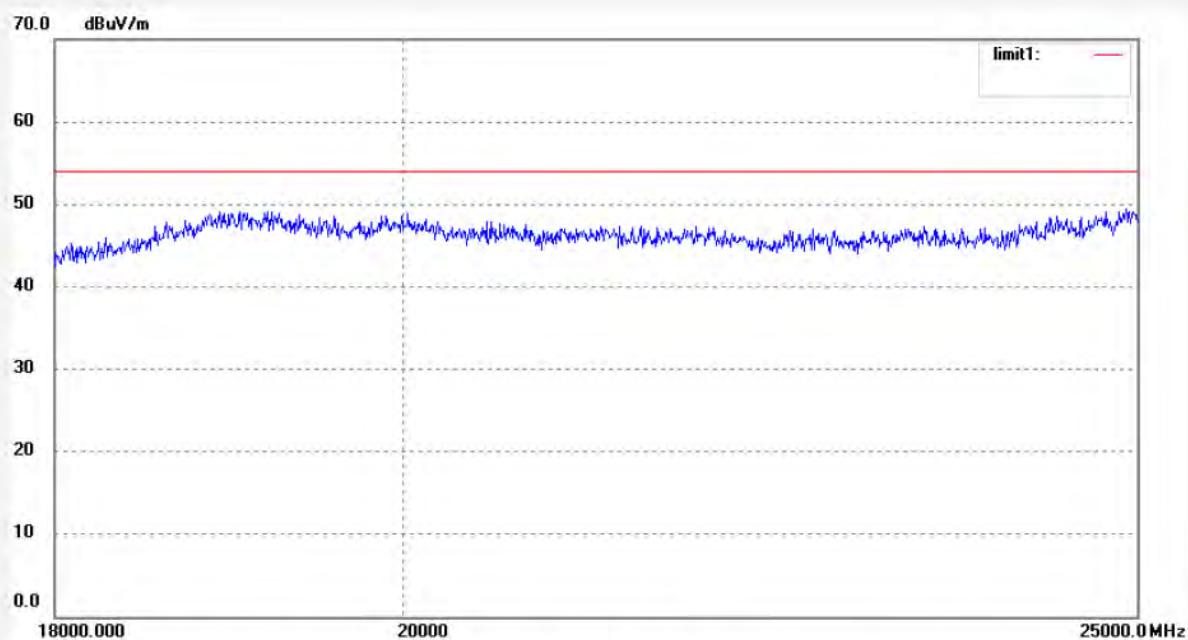

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	Ricky #915	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/10/20
Temp. (C)	Hum.(%) 25 C / 50 %	Time:	13:20:40
EUT:	7 Inch Tablet PC/MID	Engineer Signature:	Ricky
Mode:	TX802.11N40 (6)	Distance:	3m
Model:	SM708		
Manufacturer: Superinworld Technology Co., Ltd			

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

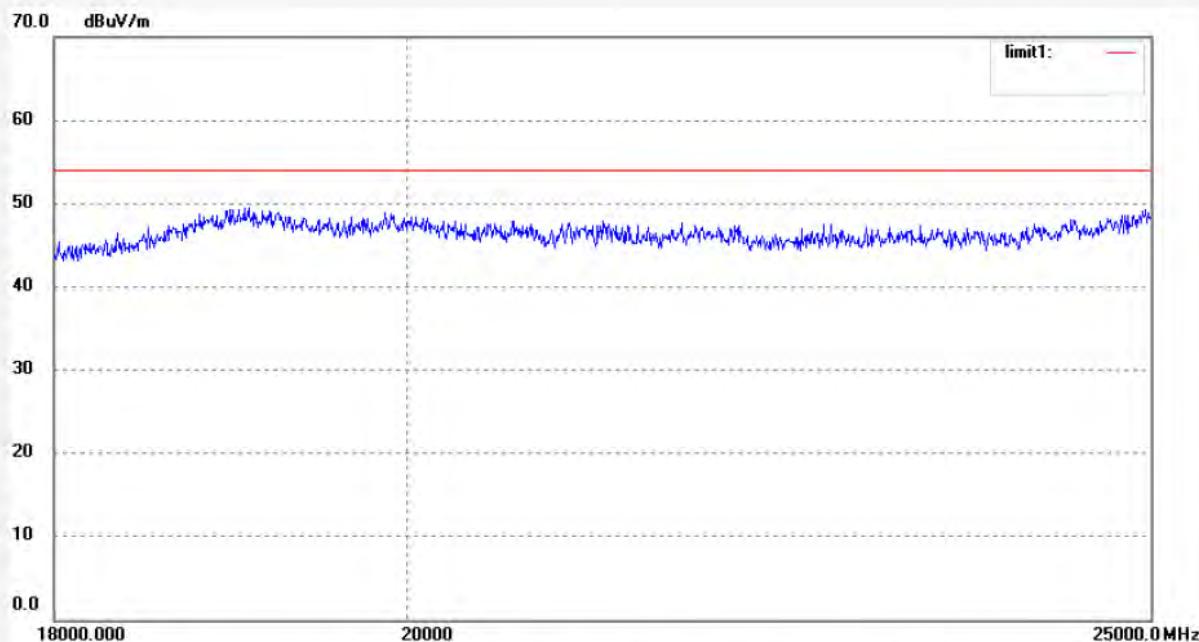

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Ricky #916	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/20/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 13/23/25
EUT: 7 Inch Tablet PC/MID	Engineer Signature: Ricky
Mode: TX802.11N40 (9)	Distance: 3m
Model: SM708	
Manufacturer: Superinworld Technology Co., Ltd	

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

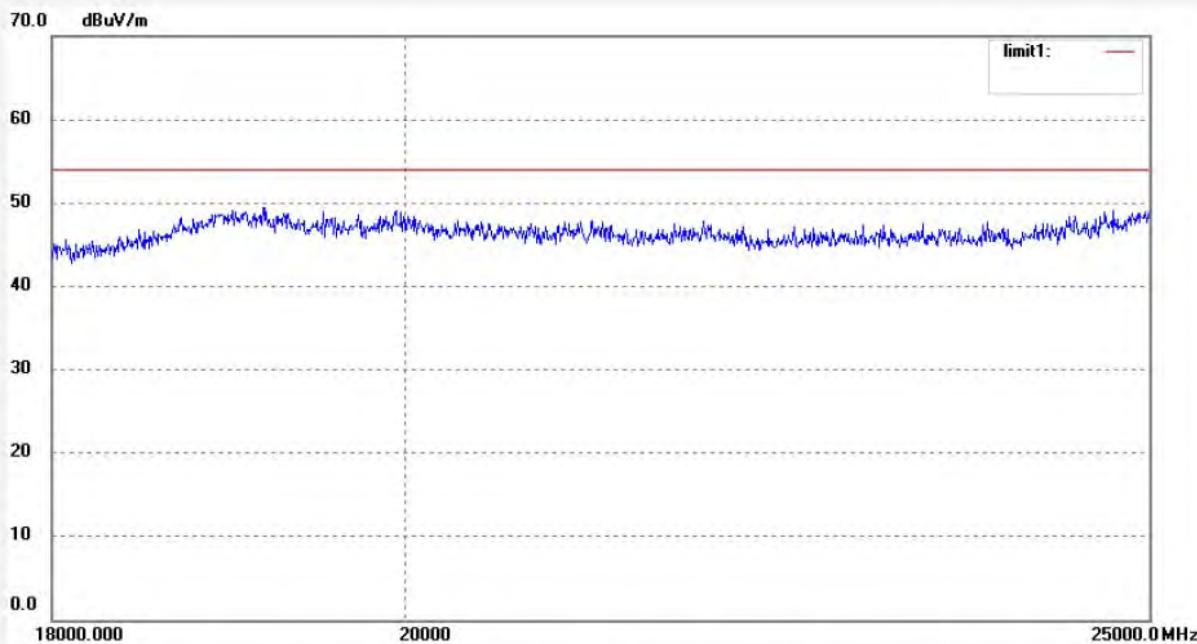
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Ricky #917
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 25 C / 50 %
 EUT: 7 Inch Tablet PC/MID
 Mode: TX802.11N40 (9)
 Model: SM708
 Manufacturer: Superinworld Technology Co., Ltd

Polarization: Horizontal
 Power Source: AC 120V/60Hz
 Date: 12/10/20/
 Time: 13/26/52
 Engineer Signature: Ricky
 Distance: 3m

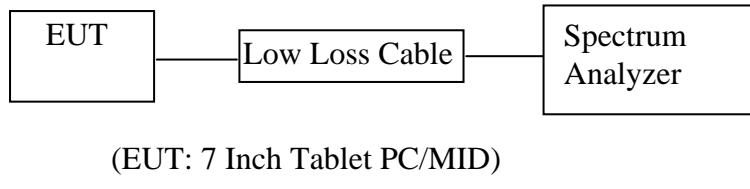
Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

10. CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST

10.1. Block Diagram of Test Setup



10.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

10.3. EUT Configuration on Measurement

The following equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.3.1. 7 Inch Tablet PC/MID (EUT)

Model Number	:	SM708
Serial Number	:	N/A
Manufacturer	:	Superinworld Technology Co., Ltd

10.4.Operating Condition of EUT

10.4.1.Setup the EUT and simulator as shown as Section 10.1.

10.4.2.Turn on the power of all equipment.

10.4.3.Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

10.5.Test Procedure

10.5.1.The transmitter output was connected to the spectrum analyzer via a low loss cable.

10.5.2.Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.

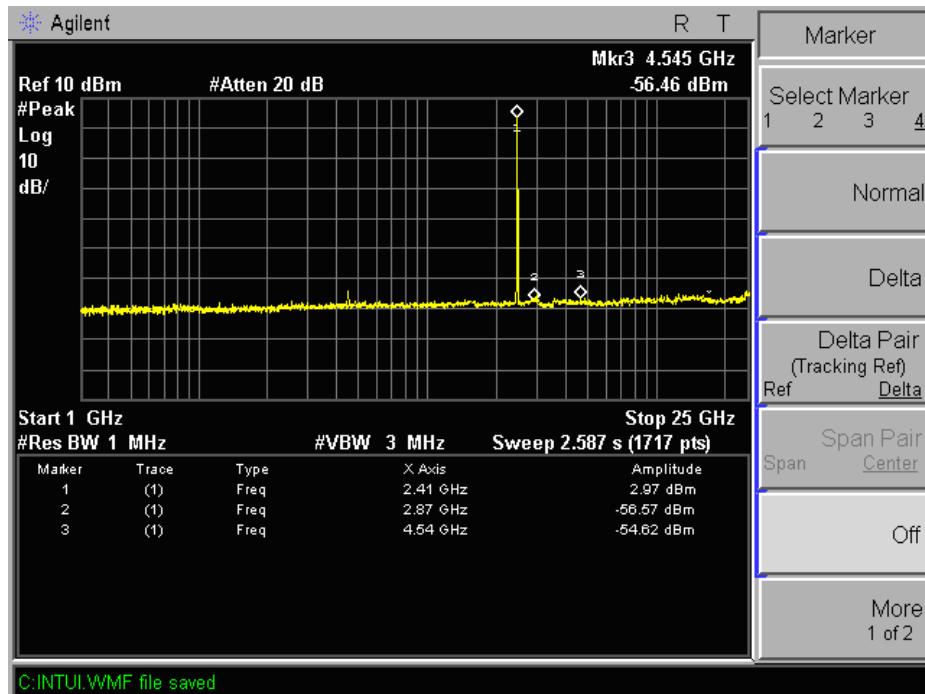
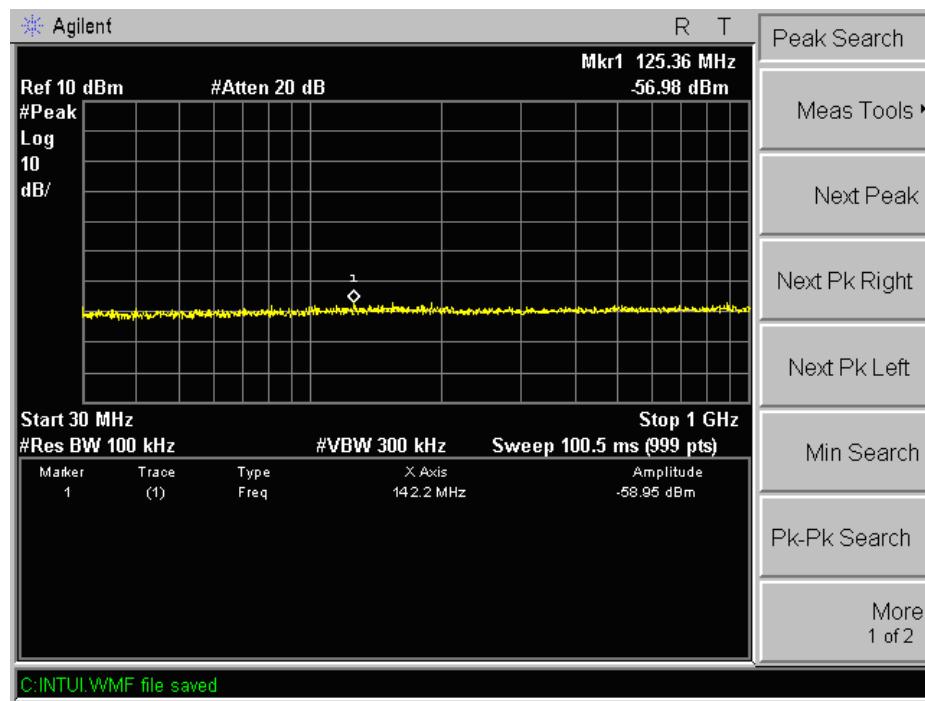
10.5.3.The Conducted Spurious Emission was measured and recorded.

10.6.Test Result

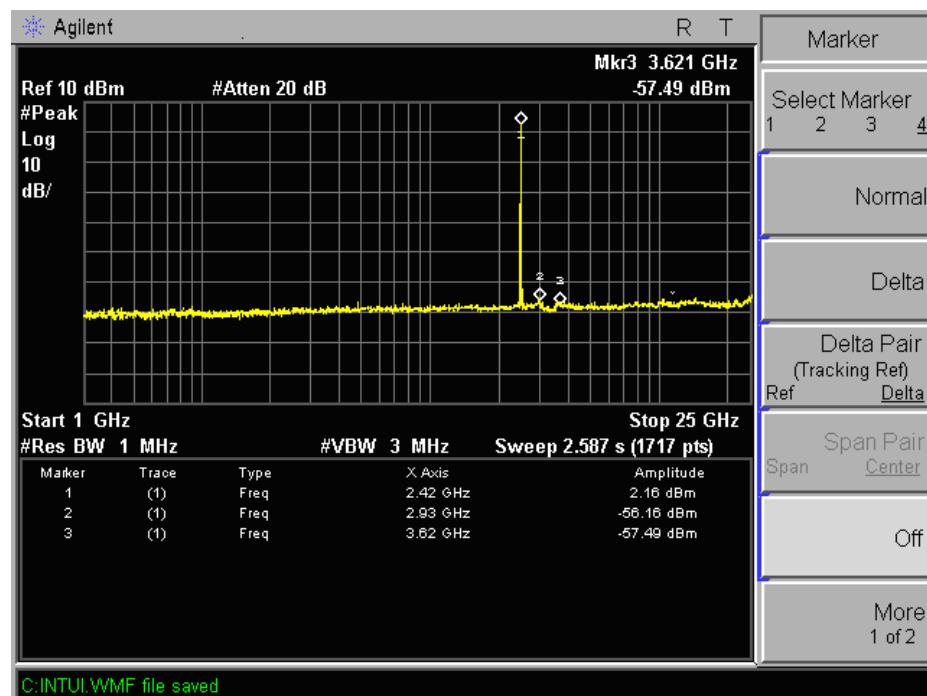
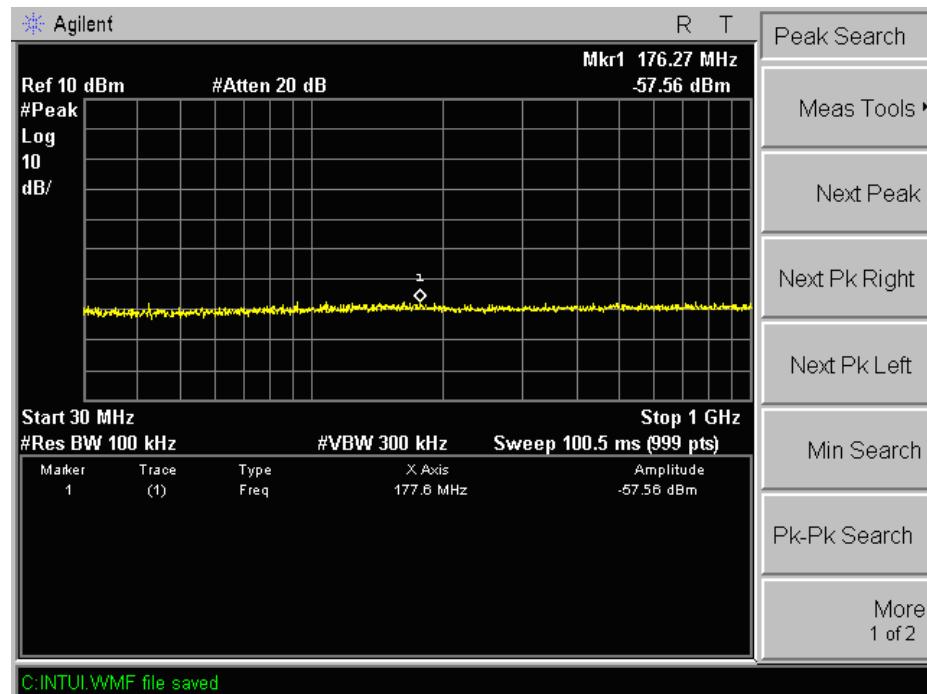
Pass.

The spectrum analyzer plots are attached as below.

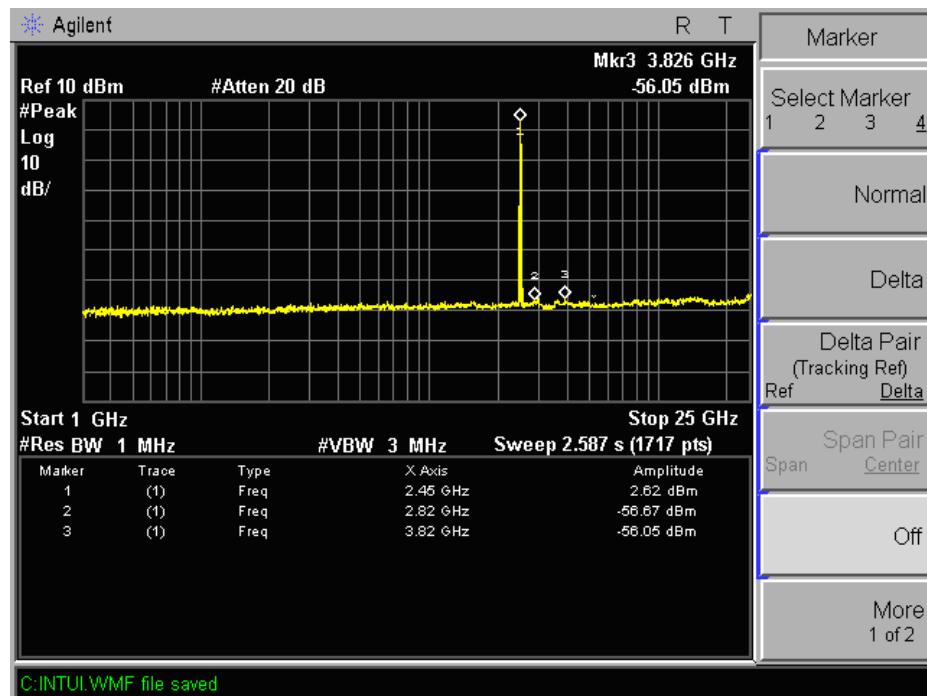
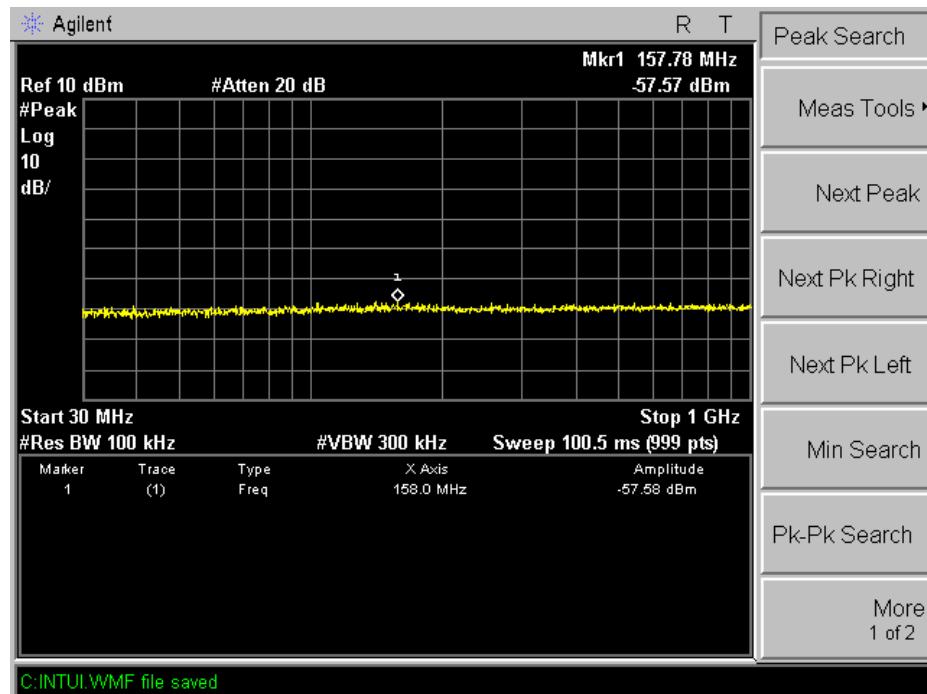
TX 802.11b Channel Low 2412MHz



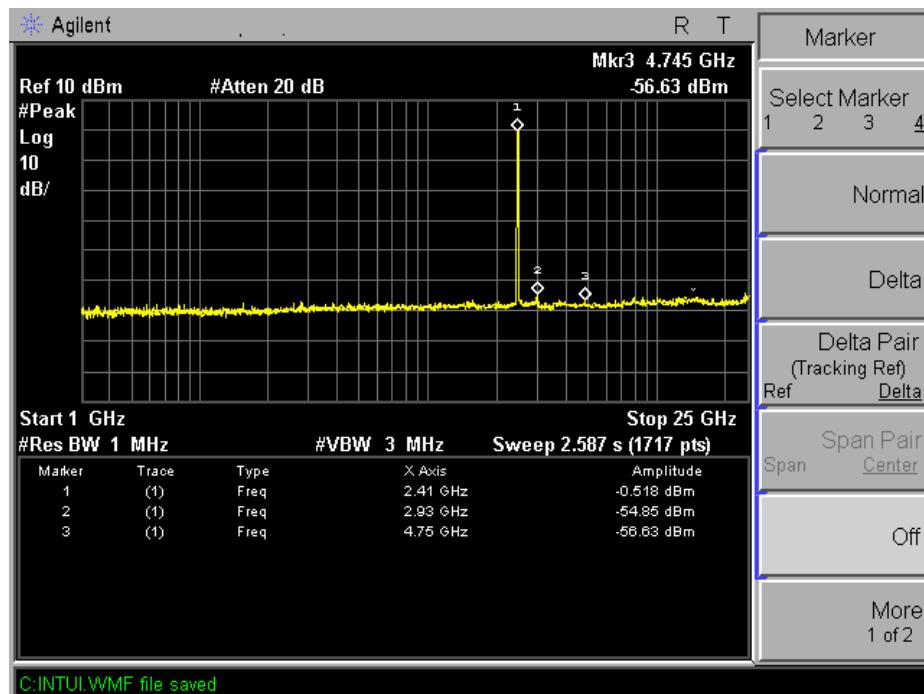
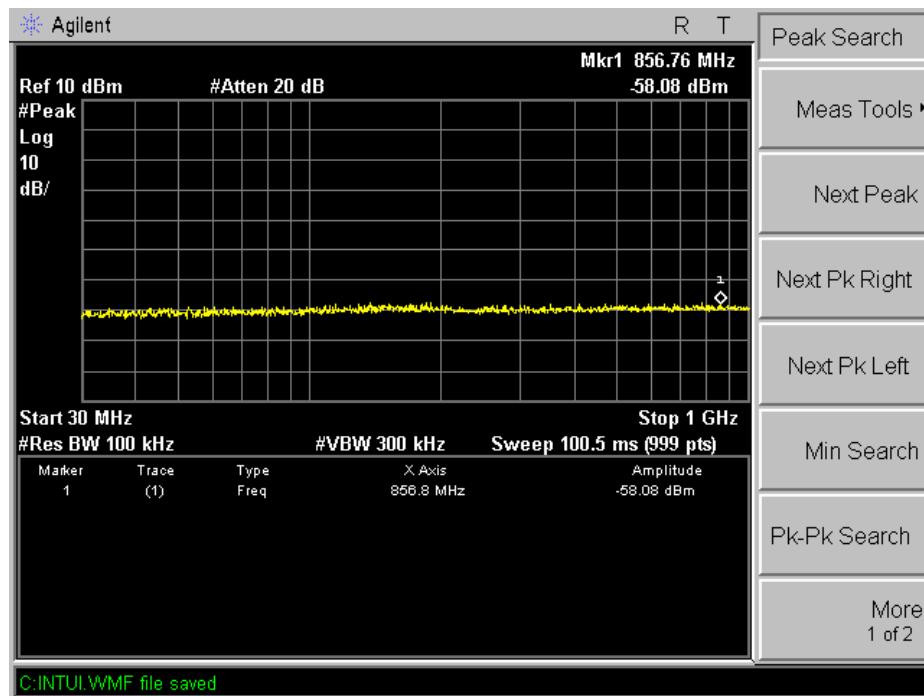
TX 802.11b Channel Middle 2437MHz



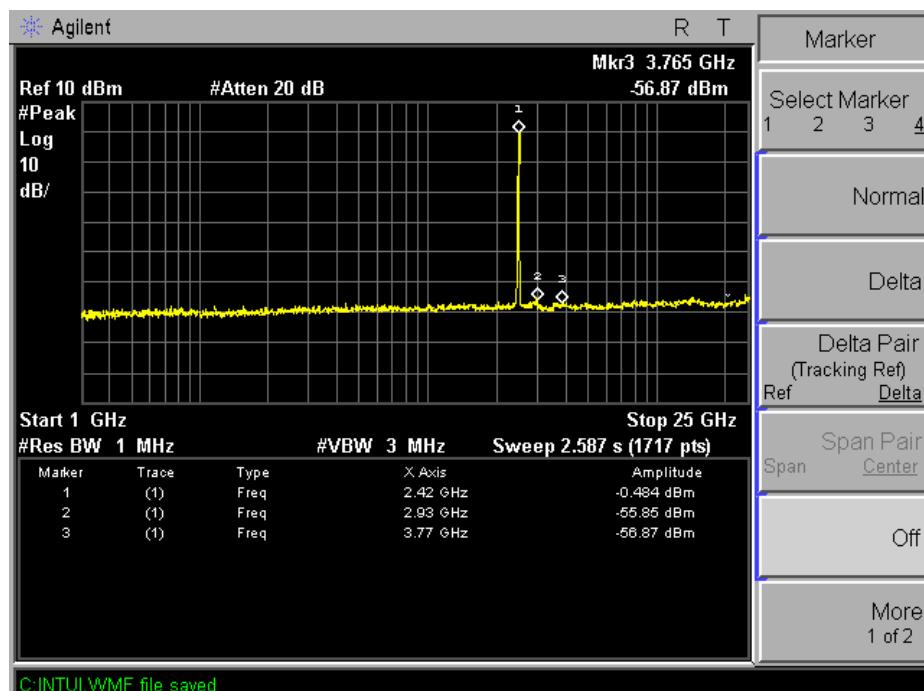
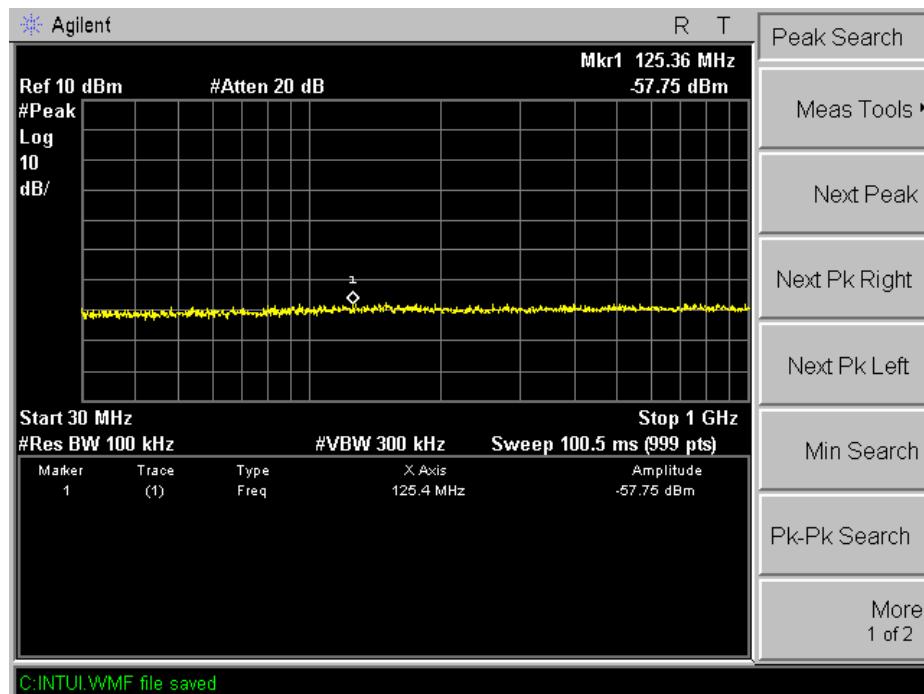
TX 802.11b Channel High 2462MHz



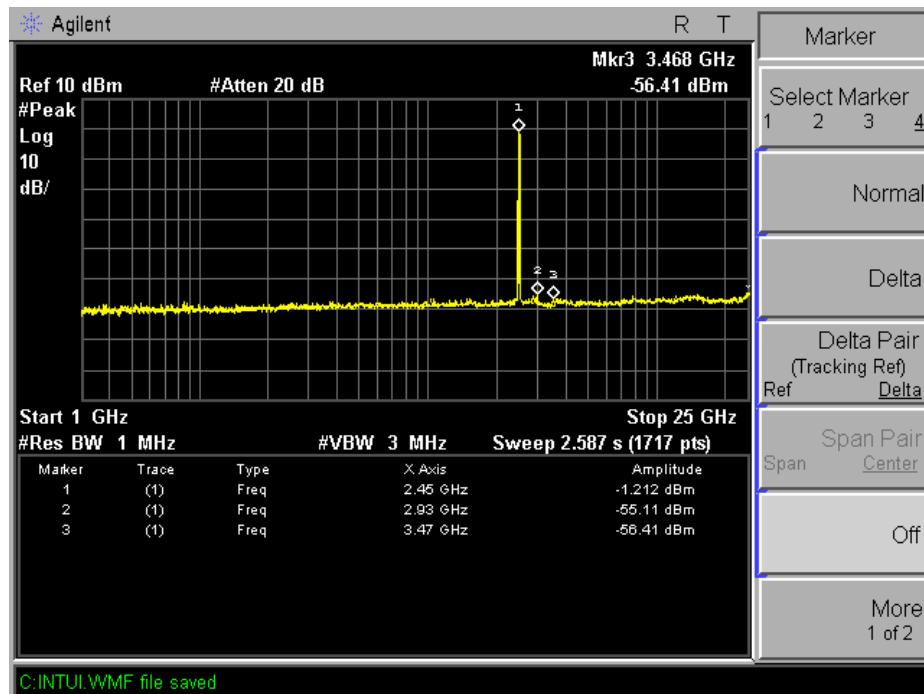
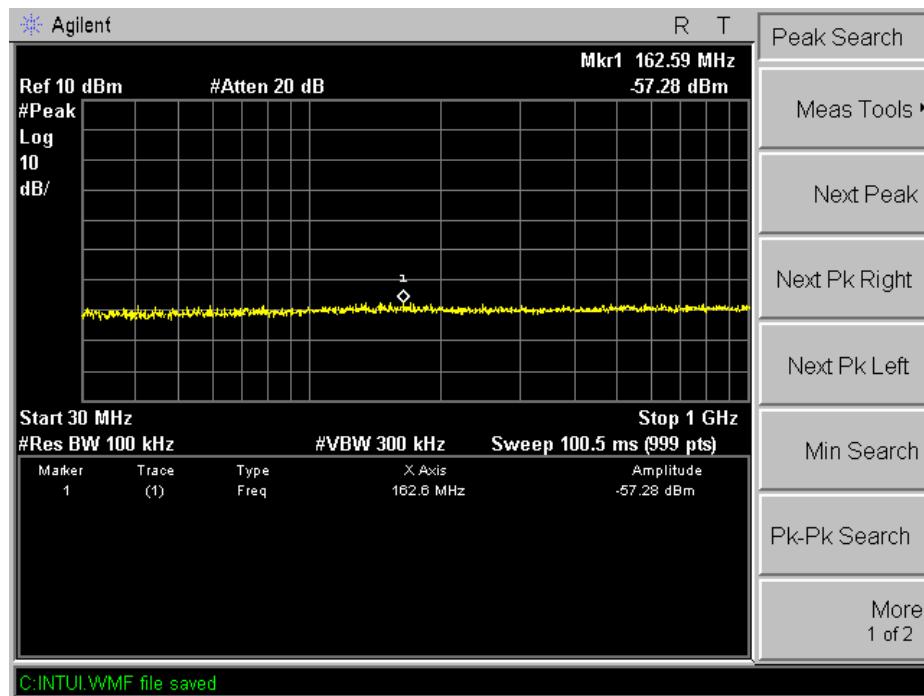
TX 802.11g Channel Low 2412MHz



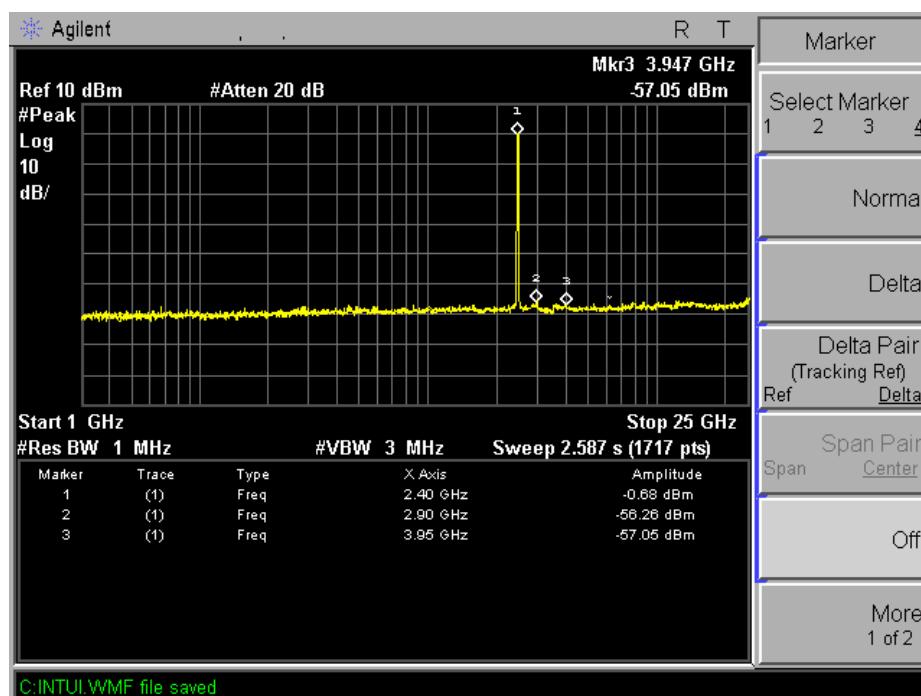
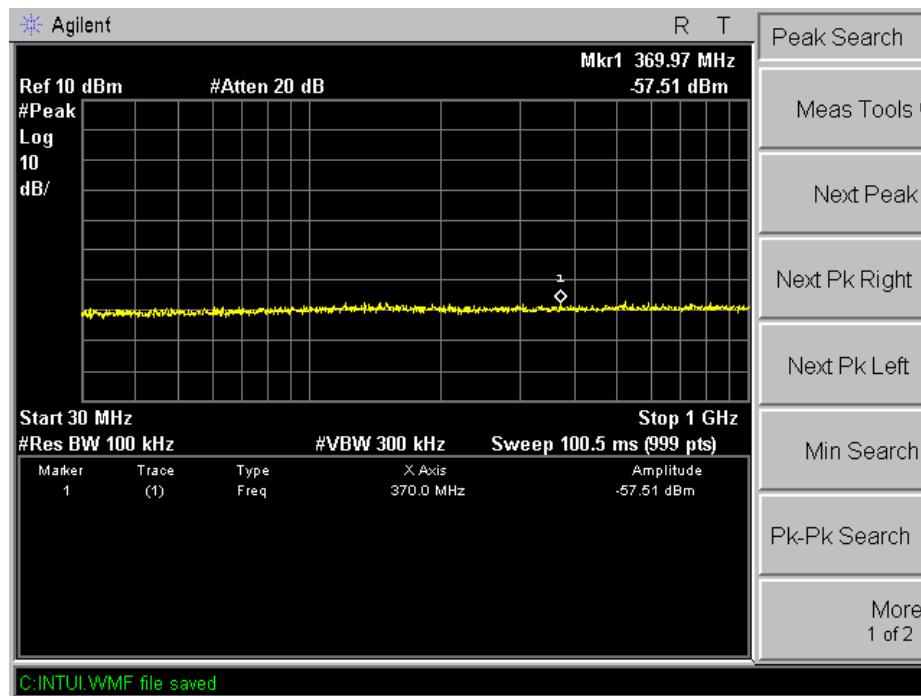
TX 802.11g Channel Middle 2437MHz



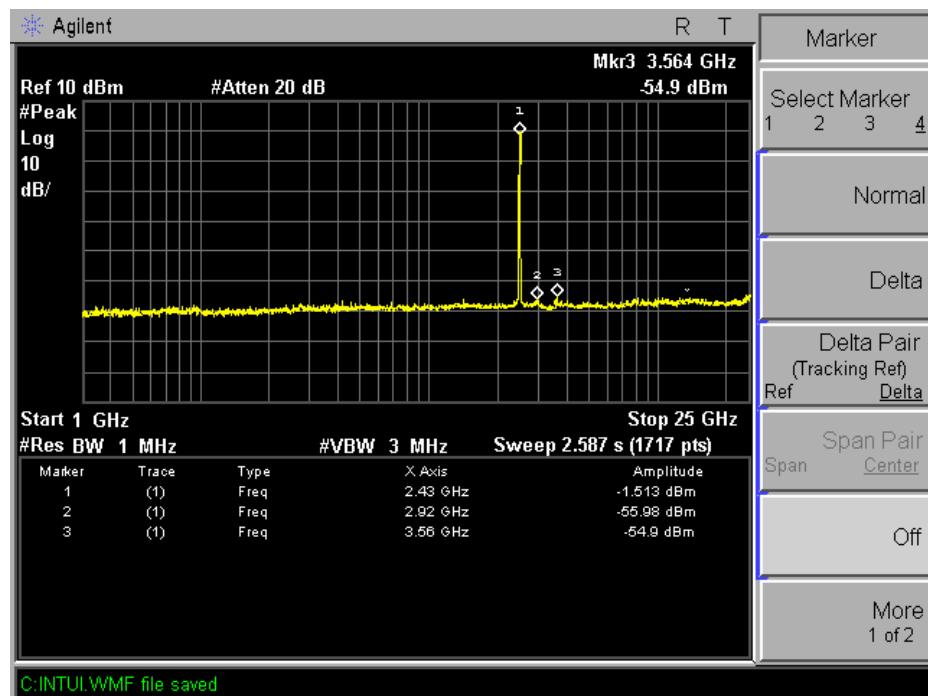
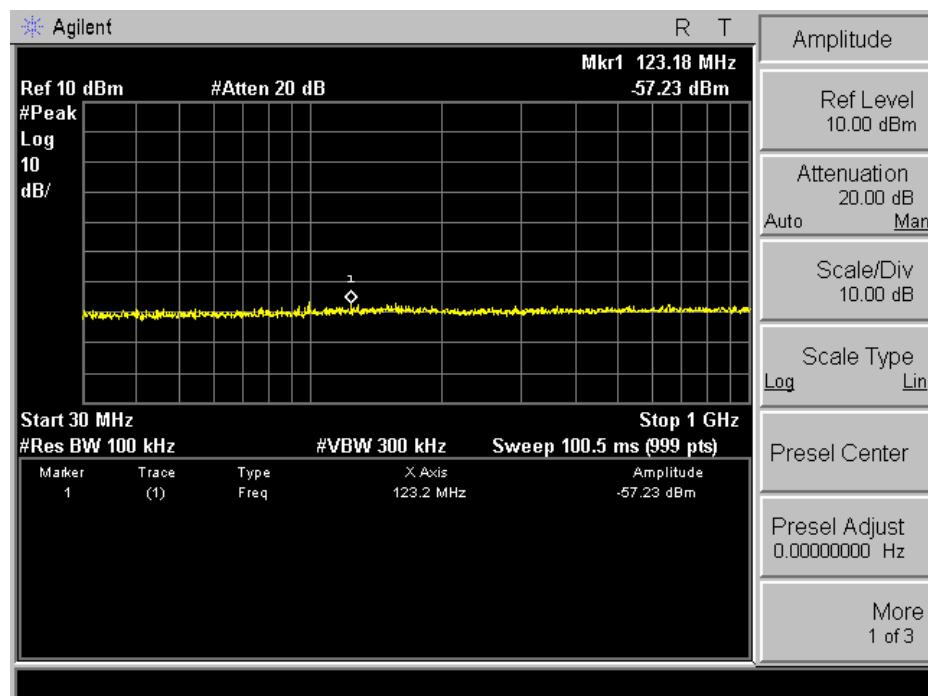
TX 802.11g Channel High 2462MHz



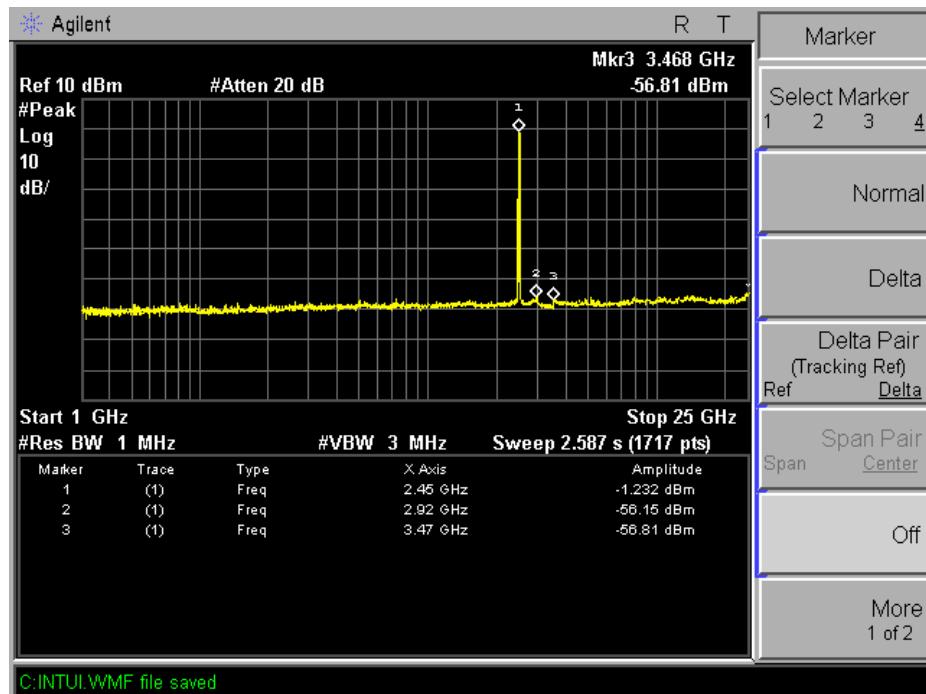
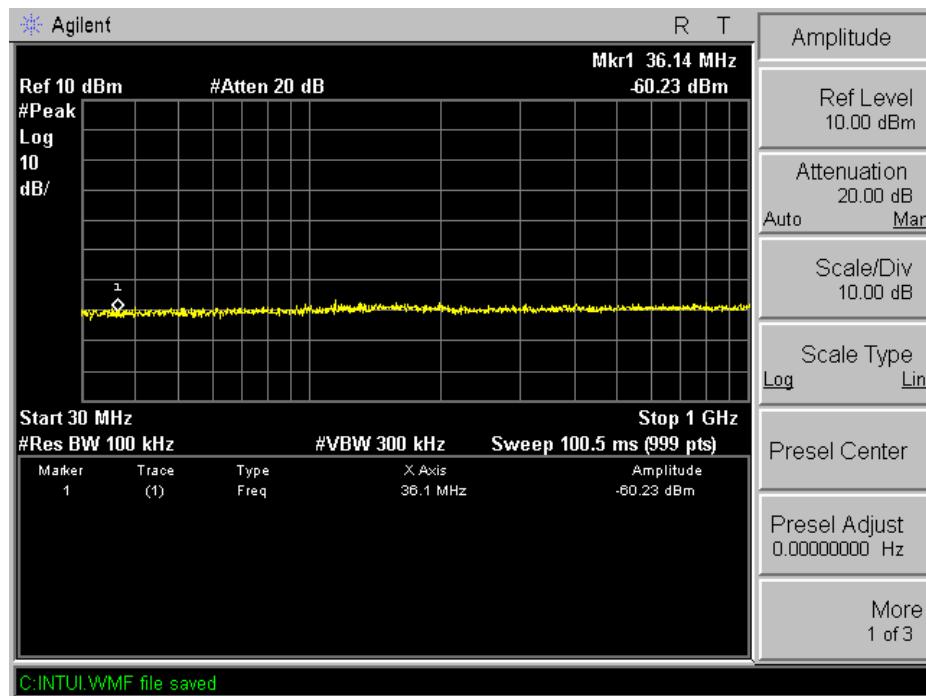
TX 802.11n Channel Low 2412MHz (20MHz)



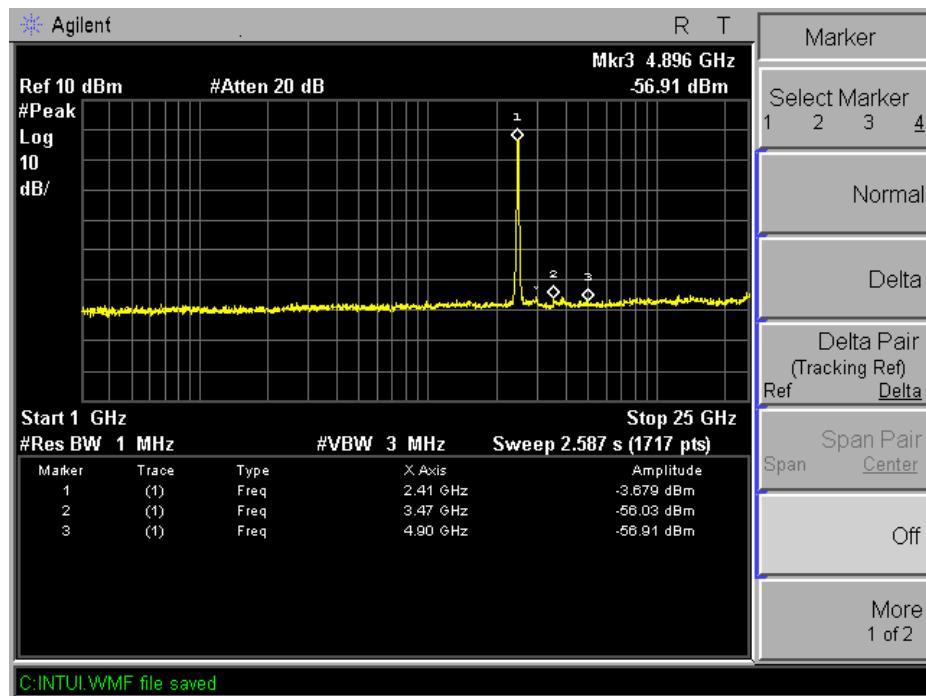
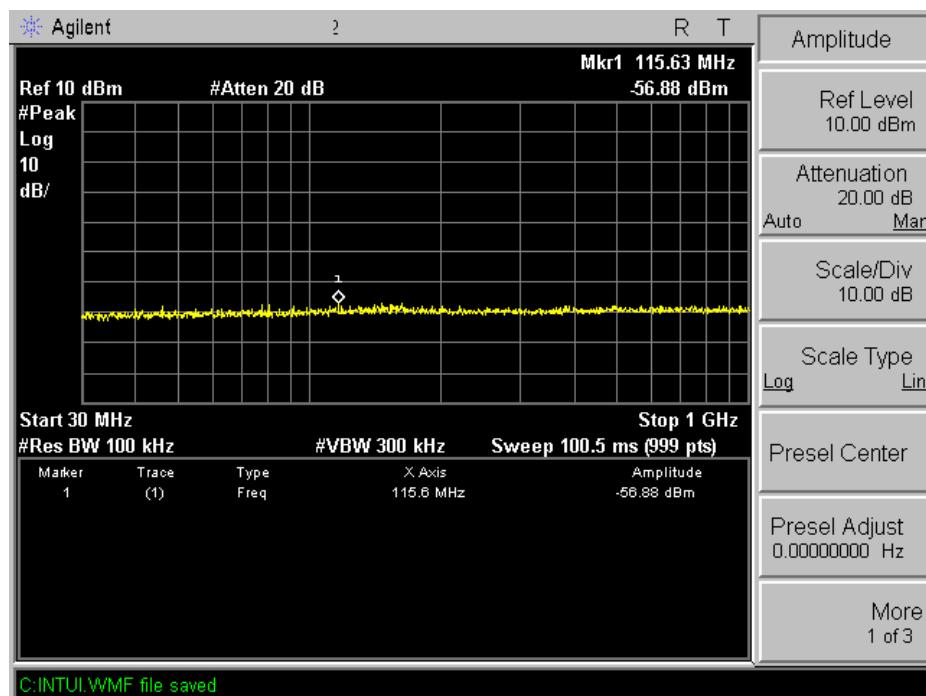
TX 802.11n Channel Middle 2437MHz (20MHz)



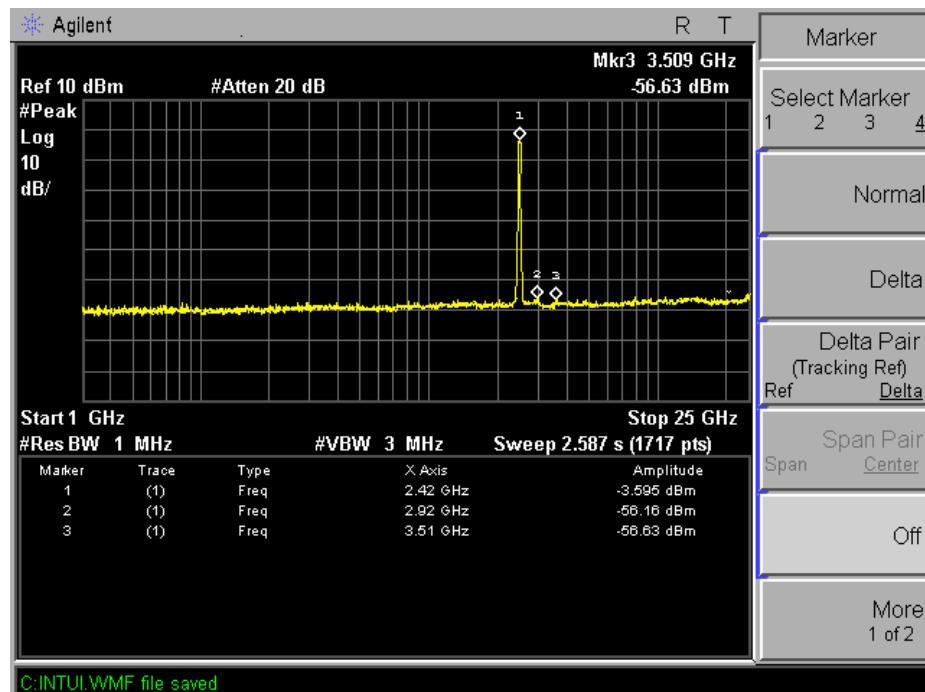
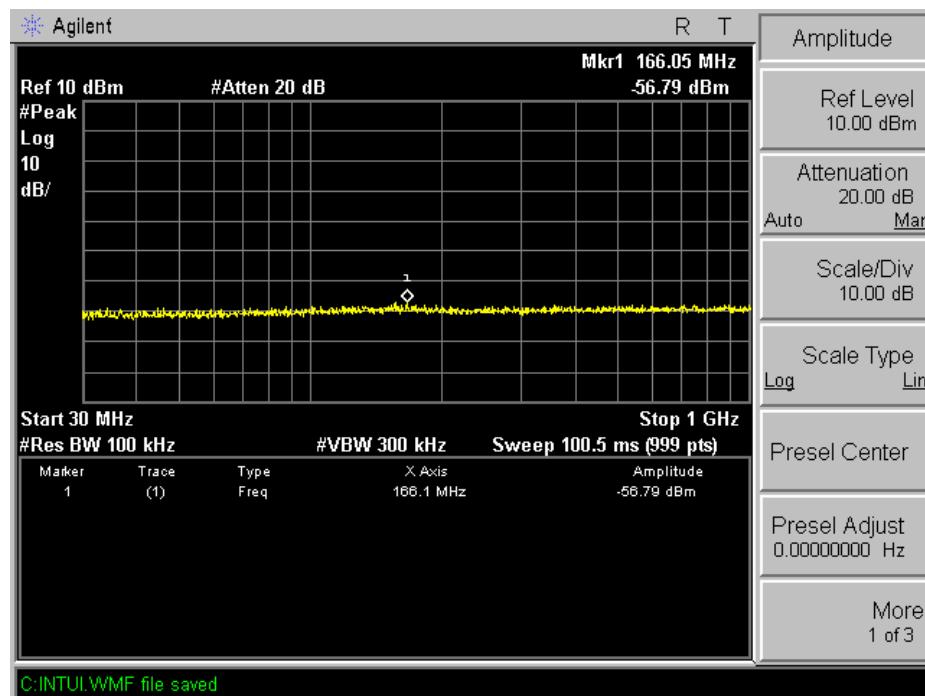
TX 802.11n Channel High 2462MHz (20MHz)



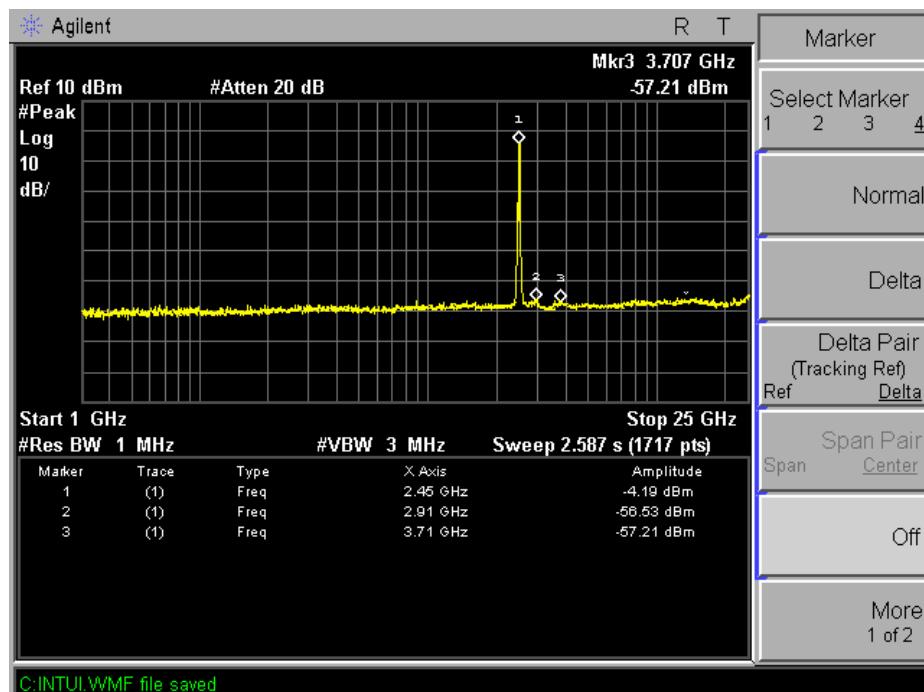
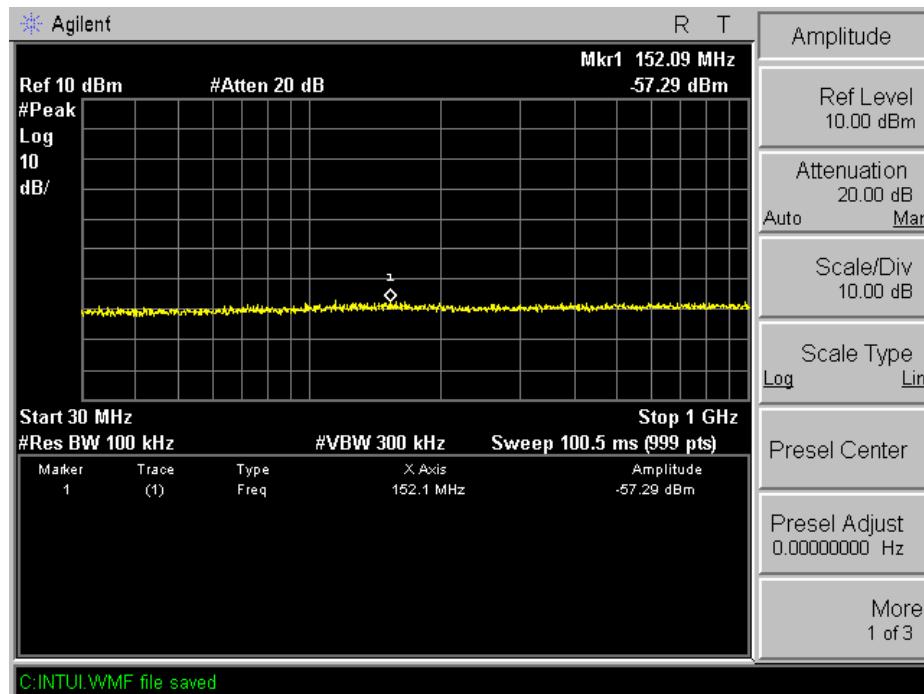
TX 802.11n Channel Low 2422MHz (40MHz)



TX 802.11n Channel Middle 2437MHz (40MHz)



TX 802.11n Channel High 2452MHz (40MHz)

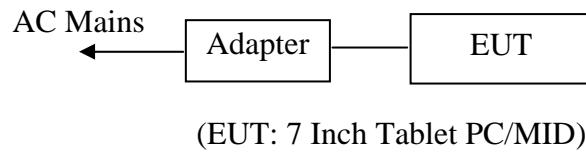


11.AC POWER LINE CONDUCTED EMISSION FOR FCC PART

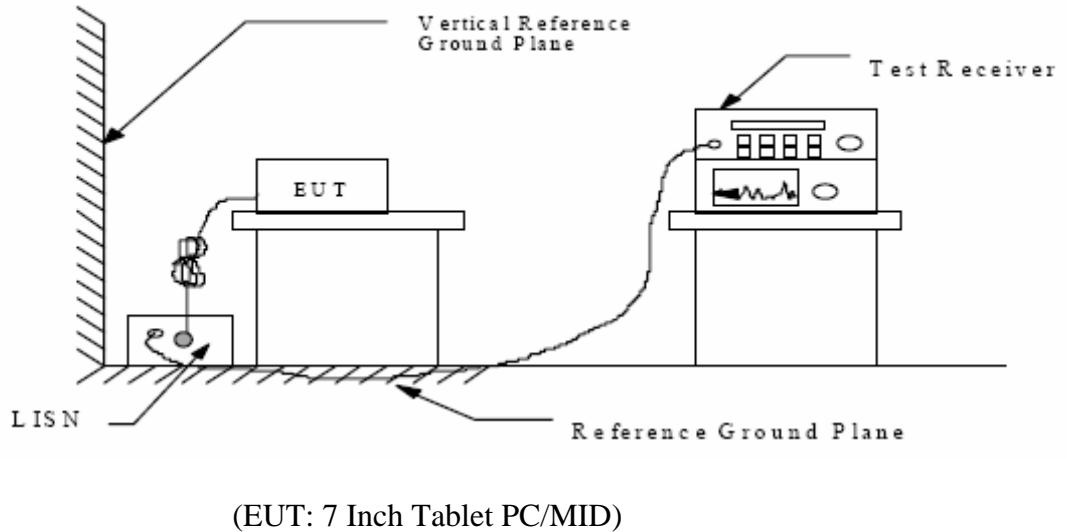
15 SECTION 15.207(A)

11.1.Block Diagram of Test Setup

11.1.1.Block diagram of connection between the EUT and simulators



11.1.2.Shielding Room Test Setup Diagram



11.2.The Emission Limit

11.2.1.Conducted Emission Measurement Limits According to Section 15.207(a)

Frequency (MHz)	Limit dB(μ V)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 - 56.0 *	56.0 - 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

* Decreases with the logarithm of the frequency.

11.3. Configuration of EUT on Measurement

The following equipment are installed on the Conducted Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.3.1. 7 Inch Tablet PC/MID (EUT)

Model Number	:	SM708
Serial Number	:	N/A
Manufacturer	:	Superinworld Technology Co., Ltd

11.4. Operating Condition of EUT

11.4.1. Setup the EUT and simulator as shown as Section 11.1.

11.4.2. Turn on the power of all equipment.

11.4.3. Let the EUT work in TX (Charging) mode measure it.

11.5. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2003 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9 kHz.

The frequency range from 150 kHz to 30MHz is checked.

11.6. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150 kHz to 30MHz is checked.

Date of Test:	Oct 22, 2012	Temperature:	25°C
EUT:	7 Inch Tablet PC/MID	Humidity:	50%
Model No.:	SM708	Power Supply:	AC 120V/60Hz
Test Mode:	operation	Test Engineer:	Ricky

Frequency (MHz)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Line
0.167071	53.90	65	11.2	QP	Neutral
4.088890	39.70	56	16.3	QP	
5.279139	35.20	60	24.8	QP	
0.170439	43.70	55	11.2	AV	
2.443186	34.70	46	11.3	AV	
5.237458	29.20	50	20.8	AV	
0.167074	53.90	65	11.2	QP	Live
4.221581	40.80	56	15.2	QP	
5.174811	35.30	60	24.7	QP	
0.171806	43.70	55	11.2	AV	
2.394903	34.50	46	11.5	AV	
5.300255	29.20	50	20.8	AV	

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectral diagrams are attached as below.

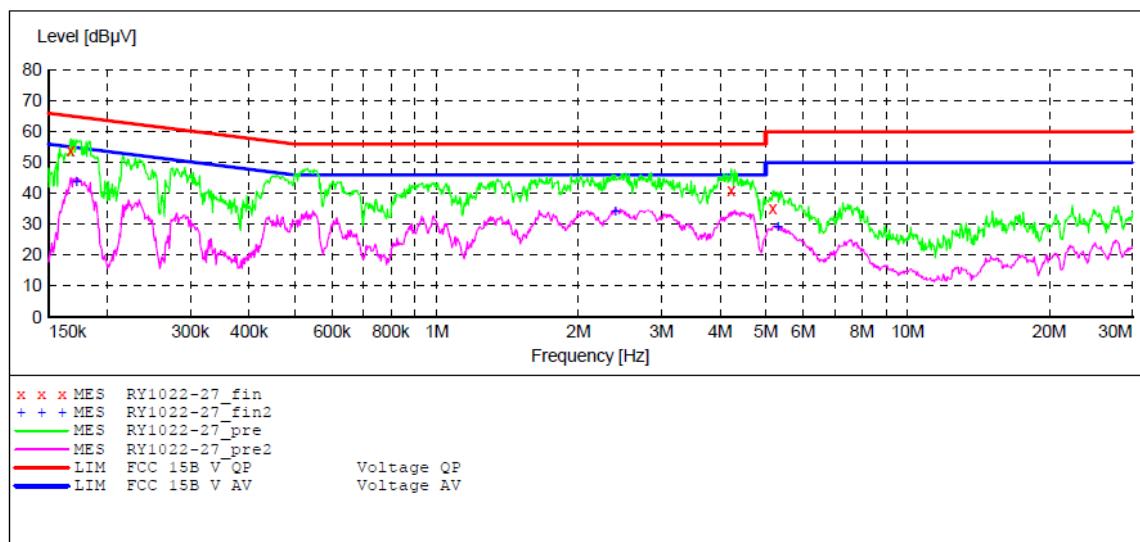
ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: 7Inch Tablet PC/MID M/N:SM708
 Manufacturer: Superinworld Technology Co., Ltd
 Operating Condition: Operation
 Test Site: 1#Shielding Room
 Operator: Ricky
 Test Specification: L 120V/60Hz
 Comment:
 Start of Test: 10/22/2012 / 9:40:53AM

SCAN TABLE: "V 150K-30MHz fin"

Short Description: SUB STD VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 0.8 % QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average



MEASUREMENT RESULT: "RY1022-27_fin"

10/22/2012 9:42AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.167071	53.90	11.1	65	11.2	QP	L1	GND
4.221581	40.80	11.5	56	15.2	QP	L1	GND
5.174811	35.30	11.4	60	24.7	QP	L1	GND

MEASUREMENT RESULT: "RY1022-27_fin2"

10/22/2012 9:42AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.171806	43.70	11.1	55	11.2	AV	L1	GND
2.394903	34.50	11.6	46	11.5	AV	L1	GND
5.300255	29.20	11.4	50	20.8	AV	L1	GND

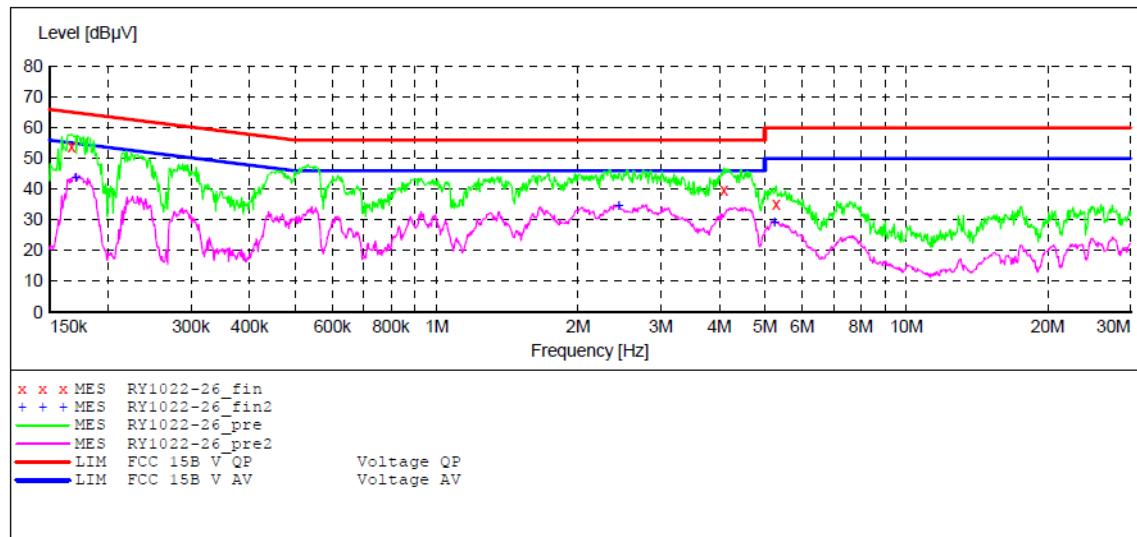
ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: 7Inch Tablet PC/MID M/N:SM708
 Manufacturer: Superinworld Technology Co., Ltd
 Operating Condition: Operation
 Test Site: 1#Shielding Room
 Operator: Ricky
 Test Specification: N 120V/60Hz
 Comment:
 Start of Test: 10/22/2012 / 9:38:14AM

SCAN TABLE: "V 150K-30MHz fin"

Short Description:			SUB STD VTERM2 1.70			
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	0.8 %	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008
Average						



MEASUREMENT RESULT: "RY1022-26_fin"

10/22/2012 9:40AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.167071	53.90	11.1	65	11.2	QP	N	GND
4.088890	39.70	11.5	56	16.3	QP	N	GND
5.279139	35.20	11.4	60	24.8	QP	N	GND

MEASUREMENT RESULT: "RY1022-26_fin2"

10/22/2012 9:40AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.170439	43.70	11.1	55	11.2	AV	N	GND
2.443186	34.70	11.6	46	11.3	AV	N	GND
5.237158	29.20	11.4	50	20.8	AV	N	GND

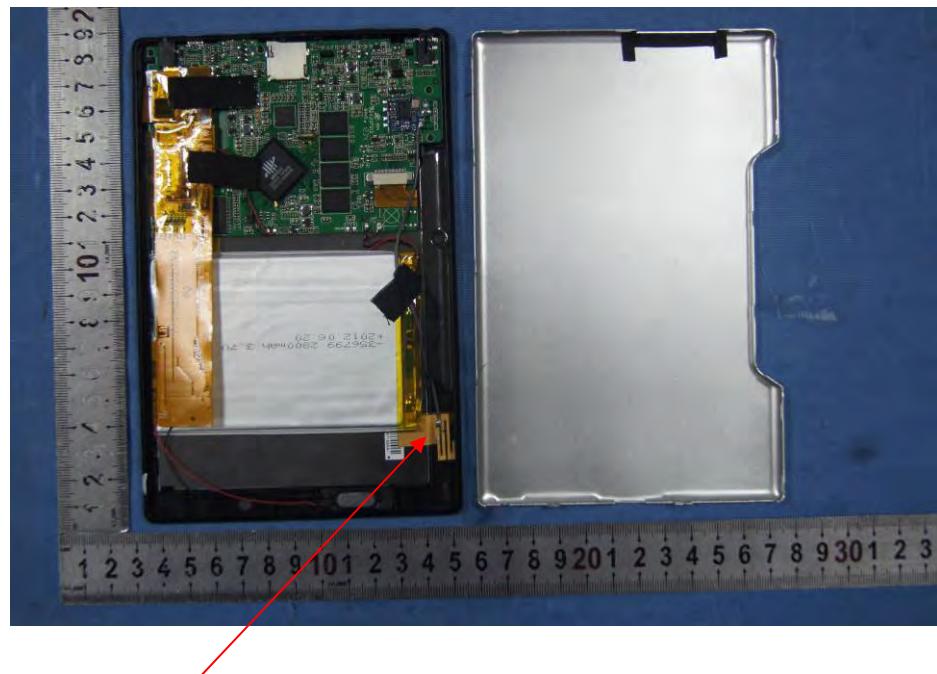
12. ANTENNA REQUIREMENT

12.1. The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

12.2. Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.



Antenna