



# FCC/IC Test Report

**FOR:**

**3SI Security Systems  
Model Name: AT140704US**

**Product Description:  
Asset Tracking and Alert Device**

**FCC ID: Q6KAT140704A  
IC ID: 5043A-AT140704A**

**47 CFR Part 95  
RSS-210 Issue 8; RSS-Gen Issue 4**

**TEST REPORT #: EMC-3SISE-038-14001\_FCC\_95\_Rev1  
DATE: 2014-12-15**




**FCC listed:  
A2LA Accredited  
IC recognized #  
3462B-1**

**CETECOM Inc.**

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.


Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: [info@cetecomusa.com](mailto:info@cetecomusa.com) ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686  
Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	
Date :	2014-12-15	IC ID: 5043A- AT140704A	

## **TABLE OF CONTENTS**

<b>1</b>	<b>Assessment</b>	<b>3</b>
<b>2</b>	<b>Administrative Data</b>	<b>4</b>
2.1	<b>Identification of the Testing Laboratory Issuing the EMC Test Report</b>	<b>4</b>
2.2	<b>Identification of the Client</b>	<b>4</b>
2.3	<b>Identification of the Manufacturer</b>	<b>4</b>
<b>3</b>	<b>Equipment under Test (EUT)</b>	<b>5</b>
3.1	<b>Specification of the Equipment under Test</b>	<b>5</b>
3.2	<b>Identification of the Equipment Under Test (EUT)</b>	<b>6</b>
3.3	<b>Identification of Accessory equipment</b>	<b>6</b>
<b>4</b>	<b>Subject Of Investigation</b>	<b>7</b>
<b>5</b>	<b>Summary of Measurement Results</b>	<b>8</b>
<b>6</b>	<b>Radiated Measurement Procedure</b>	<b>9</b>
<b>6.1</b>	<b>RF Output Power</b>	<b>10</b>
6.1.1	References:	10
6.1.2	Limits	10
6.1.3	Test Result:	10
6.1.4	Test Plot	11
<b>6.2</b>	<b>Occupied Bandwidth</b>	<b>12</b>
6.2.1	References:	12
6.2.2	Limits:	12
6.2.3	Test Result:	12
<b>6.3</b>	<b>Modulation Characteristics</b>	<b>14</b>
<b>6.4</b>	<b>Transmit Spectrum Mask</b>	<b>14</b>
6.4.1	References:	14
6.4.2	Measurement Settings	14
6.4.3	Test Conditions	14
6.4.4	Test Plot: 216.475 Beacon per FCC 95 Mask	15
<b>6.5</b>	<b>Frequency Tolerance</b>	<b>16</b>
6.5.1	References:	16
6.5.2	Limits:	16
6.5.3	Results:	16
<b>6.6</b>	<b>Transmitter Spurious Emissions- Radiated</b>	<b>17</b>
6.6.1	216.475 MHz Beacon	17
<b>7</b>	<b>Test Equipment</b>	<b>20</b>
<b>8</b>	<b>BLOCK DIAGRAMS</b>	<b>21</b>
<b>9</b>	<b>Revision History</b>	<b>23</b>

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	
Date :	2014-12-15	IC ID: 5043A- AT140704A	

## 1 Assessment

The following device was evaluated against the applicable criteria specified in FCC rules Parts 95 of Title 47 of the Code of Federal Regulations and Industry Canada Standards RSS 210 Annex 4 and no deviations were ascertained during the course of the tests performed.

Company	Description	Model #
3SI Security Systems	Asset tracking and alert devices	AT140704US

**This report is reviewed by:**

Franz Engert  
2014-12-15    Compliance    (Manager Compliance)


Date	Section	Name	Signature
------	---------	------	-----------

**Responsible for the Report:**

James Donnellan  
2014-12-15    Compliance    (Senior EMC Test Engineer)

Date	Section	Name	Signature
------	---------	------	-----------

The test results of this test report relate exclusively to the test item specified in Section 3. CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc. USA.

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	
Date :	2014-12-15	IC ID: 5043A- AT140704A	

## 2 Administrative Data

### 2.1 Identification of the Testing Laboratory Issuing the EMC Test Report


<b>Company Name:</b>	CETECOM Inc.
<b>Department:</b>	Compliance
<b>Address:</b>	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
<b>Telephone:</b>	+1 (408) 586 6200
<b>Fax:</b>	+1 (408) 586 6299
<b>Responsible Test Lab Manager:</b>	Franz Engert
<b>Responsible Project Leader:</b>	Deepak Kumar

### 2.2 Identification of the Client

<b>Applicant's Name:</b>	3SI Security Systems
<b>Street Address:</b>	2055 N Brown Road, Suite 225, Lawrenceville
<b>City/Zip Code</b>	GA 30043
<b>Country</b>	USA
<b>Contact Person:</b>	Waldemar Sierocinski
<b>Phone No.</b>	954-214-5398
<b>Fax:</b>	954-214-5398
<b>e-mail:</b>	Waldemar_Sierocinski@3sisecurity.com

### 2.3 Identification of the Manufacturer


<b>Manufacturer's Name:</b>	Same as above.
<b>Manufacturers Address:</b>	
<b>City/Zip Code</b>	
<b>Country</b>	

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	
Date :	2014-12-15	IC ID: 5043A- AT140704A	

### 3 Equipment under Test (EUT)

#### 3.1 Specification of the Equipment under Test

<b>Marketing Name / Description:</b>	Asset Tracking and Alert Device
<b>Model Number:</b>	AT140704US
<b>FCC-ID :</b>	Q6KAT140704A
<b>IC Cert Number:</b>	5043A-AT140704A
<b>HW / SW Revision :</b>	P2 / 12.1.18203
<b>Product Description:</b>	Asset Tracking and Alert Device equipped with 3G cellular radio module, beacon radio and GPS
<b>Type(s) of Modulation:</b>	no modulation, pulsed CW at 20% duty cycle, repetition rate 1 Hz
<b>Frequency Range / number of channels:</b>	1 channel, center at 216.475 MHz
<b>Antenna info:</b>	internal, PCB trace loop antenna (around pcb perimeter)
<b>Output Power:</b>	ERP: -8.2 dBm
<b>Other Radios</b>	<ul style="list-style-type: none"> <li>• 3G radio module GSM: 850/1900 &amp; UMTS FDD: Band II/Band V</li> <li>• GPS 1575.42 MHz</li> </ul>
<b>Power supply</b>	Battery Pack 3.7V DC;
<b>operating temperature range</b>	-20°C to 60°C
<b>Prototype / Production unit</b>	Prototype


Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	
Date :	2014-12-15	IC ID: 5043A- AT140704A	

### 3.2 Identification of the Equipment Under Test (EUT)

EUT #	Serial Number	HW Version	SW Version	Notes	Cetecom ID
1	IMEI: 354676050448264	(P2)	12.1.18147	RT REVB # 7	-
2	IMEI 354676050452894	(P2)	12.1.18147	RT REVB #8	-
3	Support Board	-	N/A	AEBP1#69	-

### 3.3 Identification of Accessory equipment

AE #	Type	PN	Notes
1	3.7 V Li-ion Battery Pack	52010556 T	-
4	GPS/GSM Multi Band Combo Antenna	S/N 0018110	Model AU-3S

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	
Date :	2014-12-15	IC ID: 5043A- AT140704A	


#### **4 Subject Of Investigation**

The objective of the evaluation documented in this report was to assess if the performance of the EUT meets the relevant requirements specified in in FCC rules 95 of Title 47 of the Code of Federal Regulations and Industry Canada Standards RSS 210 Issue 8.

- 47 CFR 2: Title 47 of the Code of Federal Regulations: Chapter I-Federal Communication Commission: Frequency allocations and radio treaty matters; general rules and regulations.
- 47 CFR 95: Title 47 of the Code of Federal Regulations: Chapter I-Federal Communication Commission: Personal Radio Services.
- RSS-GEN, issue 4: General Requirements and Information for the Certification of Radio Apparatus
- RSS 210, issue 8: Spectrum Management and Telecommunications – Radio Standards Specification; License-exempt Radio Apparatus (All Frequency Bands): Category I Equipment

This test report is to support a request for new equipment authorization under the FCC-ID: Q6KAT140704A and IC-ID: 5043A-AT140704A

All testing was performed on the product samples referred to in Section 3 as EUT.

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	
Date :	2014-12-15	IC ID: 5043A- AT140704A	

## 5 Summary of Measurement Results

Test Specification	Test Case	Temperature and Voltage Conditions	Pass	Fail	NA	NP	Result
FCC §95.639 & RSS-210 A4.3	RF Output Power	Nominal	■	□	□	□	Complies
§95.633(d) (3) RSS Gen Sect. 6.6	Occupied Bandwidth	Nominal	■	□	□	□	Complies
§95.635 (2) (i) RSS210 A4.3 Mask D (a)	Transmit Spectrum Mask	Nominal	■	□	□	□	Complies
FCC §95.629 (2) RSS-210 A5.3	Frequency Tolerance	Nominal & Extreme	■	□	□	□	Complies
§95.635 (2) (ii) RSS Gen 6.13	Radiated Spurious Emissions	Nominal	■	□	□	□	Complies
§95.635 (2) RSS210 A4.3 Mask D	Conducted Spurious Emissions	Nominal	□	□	■	□	Note 1

**Note:** NA = Not Applicable; NP = Not Performed


Note 1: EUT contains an integral antenna.




Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	<b>CETECOM™</b>
Date :	2014-12-15	IC ID: 5043A- AT140704A	

## 6 Radiated Measurement Procedure

**Ref: TIA-603C 2004 -2.2.17.2 Effective Radiated Power (ERP) or Effective Isotropic Radiated Power (EIRP)**

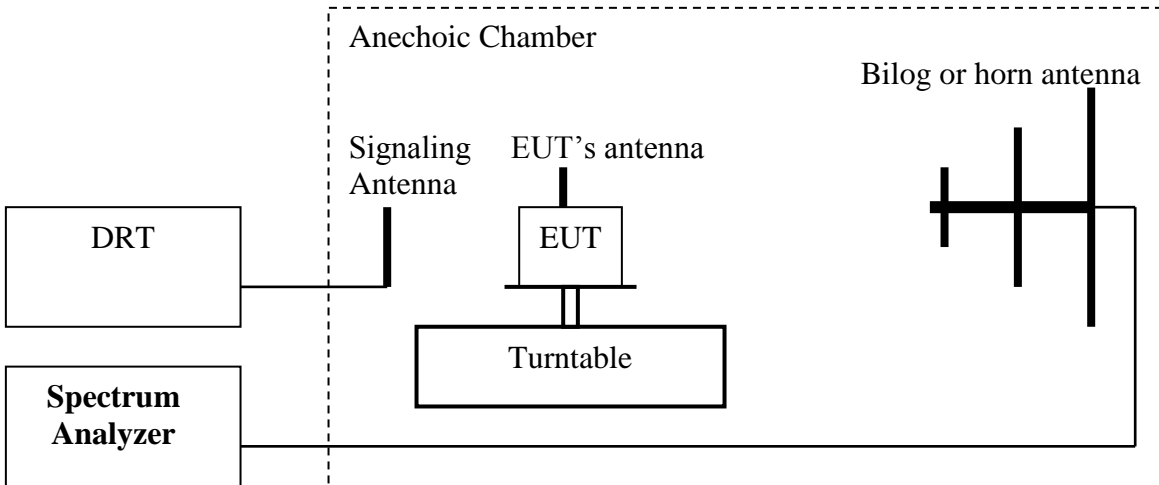

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a vertical orientation.
2. Configure the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to the channel frequency. Set the analyzer to measure peak hold with the required settings.
4. Rotate the EUT 360°. Record the peak level in dBm (**LVL**).
5. Replace the EUT with a vertically polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
7. Determine the ERP using the following equation:  
**ERP (dBm) = LVL (dBm) + LOSS (dB)**
8. Determine the EIRP using the following equation:  
**EIRP (dBm) = ERP (dBm) + 2.14 (dB)**
9. Measurements are to be performed with the EUT set to the low, middle and high channels.  
**Spectrum analyzer settings: RBW=VBW=3MHz**

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	
Date :	2014-12-15	IC ID: 5043A- AT140704A	

## 6.1 RF Output Power

### 6.1.1 References:

FCC: Part 95.639, IC: RSS-210, A4.3

### 6.1.2 Limits

FCC: Part 95.639 (e): 100 mW (20 dBm)

RSS-210, A4.3: The peak output power shall not exceed 100 mW or 160 mW e.i.r.p.

### Test Conditions:

Tnom: 23.4 °C; Vnom: 3.7 V dc


### 6.1.3 Test Result:

Frequency (MHz)	Max Peak Output Power- Conducted (dBm)	Radiated ERP (dBm)
216.475	N/A	-8.2
Measurement Uncertainty: ±3dB		


Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	<b>CETECOM</b> <sup>TM</sup> <small>ESTABLISHED 1987</small>
Date :	2014-12-15	IC ID: 5043A- AT140704A	

### 6.1.4 Test Plot

ERP 216.475 MHz Beacon.

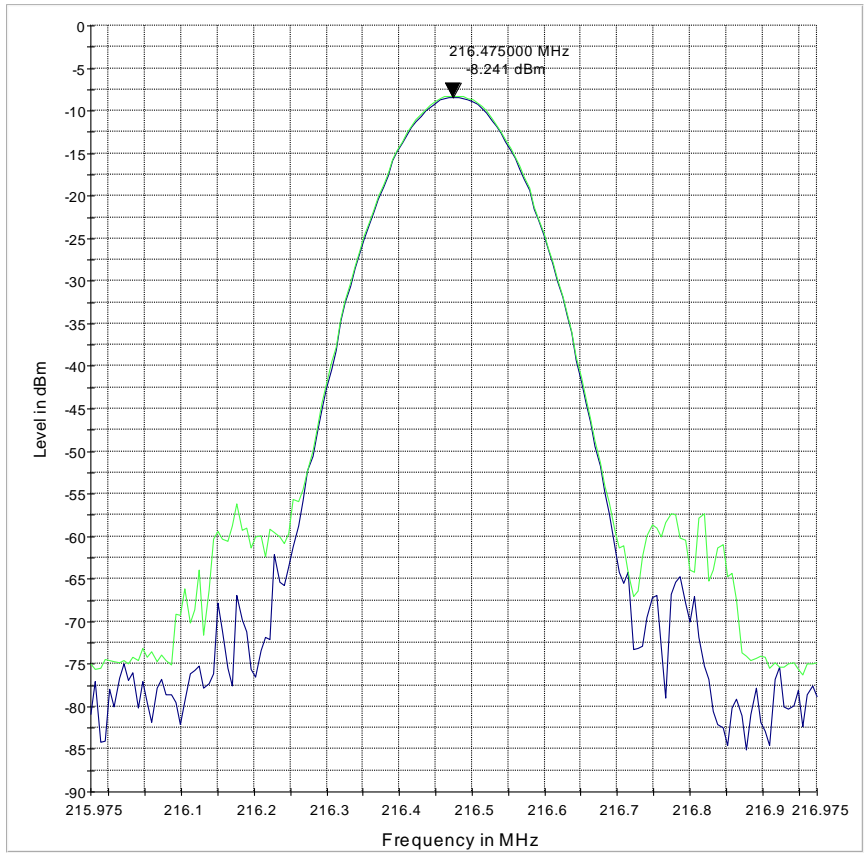

— MaxPeak-ClearWrite-PK+    — MaxPeak-MaxHold-PK+

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	
Date :	2014-12-15	IC ID: 5043A- AT140704A	

## 6.2 Occupied Bandwidth

### 6.2.1 References:

FCC: 95.629

RSS-GEN, 6.6

### 6.2.2 Limits:

FCC part 95.629 LPRS transmitter frequencies. (c) Extra band channels. (1) The following table indicates extra band frequencies. The channel bandwidth is 50 kHz.

### 6.2.3 Test Result:

Channel	Frequency (MHz)	99% Occupied Bandwidth	26 dB Emission Bandwidth
1	216.475	22.1 Hz	29.8 Hz

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	<b>CETECOM™</b>
Date :	2014-12-15	IC ID: 5043A- AT140704A	

### Occupied Bandwidth 216.475 MHz Beacon




\*RBW 10 Hz      Delta 2 [T1 ]  
 \*VBW 100 Hz      -26.95 dB  
 SWT 2 s      -14.423076808 Hz

Ref -20 dBm


Att 5 dB

1 AP  
 CLRWR

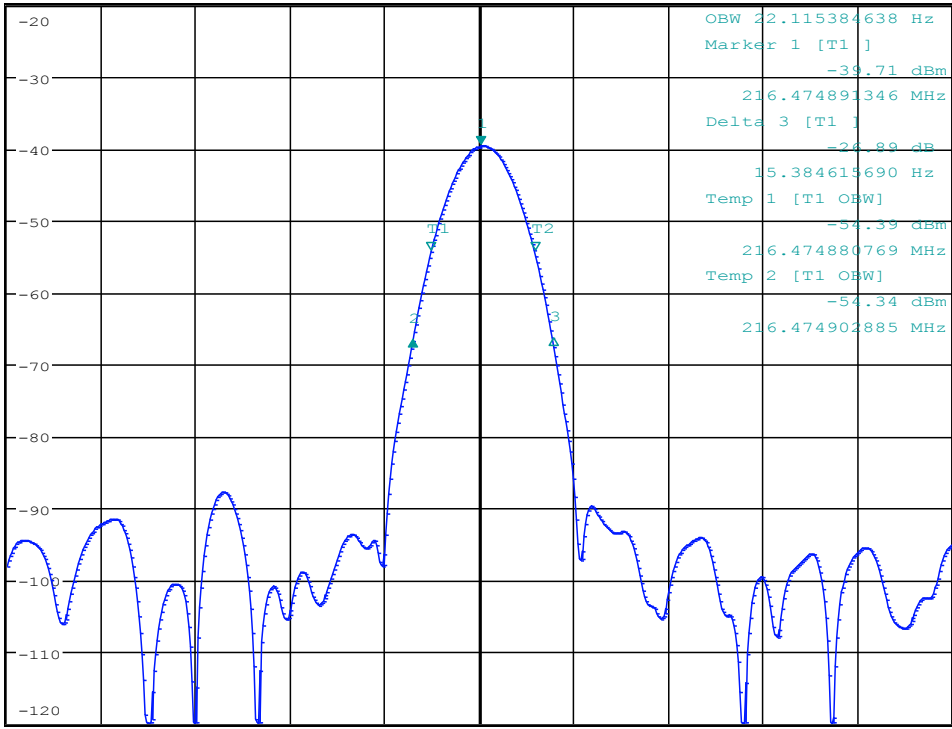

Center 216.474891 MHz      20 Hz/      Span 200 Hz

Date: 4.DEC.2014 17:52:35

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	
Date :	2014-12-15	IC ID: 5043A- AT140704A	

### 6.3 Modulation Characteristics

The manufacturer has indicated that the signal has no modulation.

### 6.4 Transmit Spectrum Mask

#### 6.4.1 References:

RSS 210 Annex 4 Mask D

- (a) At least 30 dB; for emissions 25 kHz to 35 kHz removed from the channel center frequency; and
- (b) At least 55 + 10 log 10(P) dB or to Table 2 limits, whichever is less stringent; for emissions more than 35 kHz removed from the channel center frequency.

FCC 95.635 (2) (ii) Emissions for LPRS transmitters operating on extra band channels (50 kHz) shall be attenuated below the unmodulated carrier in accordance with the following:

- (i) Emissions 25 kHz to 35 kHz from the channel center frequency: at least 30 dB; and
- (ii) Emissions more than 35 kHz away from the channel center frequency: at least 43 + 10log(carrier power in watts) dB.

#### 6.4.2 Measurement Settings

For emissions measurement 25 kHz to 35 kHz from center frequency:

RBW=500 Hz for measurements

VBW=RBW or 3x RBW

Span= 100 kHz or sufficient to capture the entire frequency range to be investigated

For emissions measurement more than 35 kHz away from the channel center frequency:

RBW=100 kHz for measurements < 1GHz

RBW=1MHz for measurements > 1GHz

VBW=RBW or 3x RBW

Span= Entire range of measuring antenna or in segment

Detector: Peak- Max Hold

Peak- Max Hold

Sweep time: Auto.


#### 6.4.3 Test Conditions

**Tnom:** 23°C

**Vnom:** 3.7 V dc

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	<b>CETECOM™</b>
Date :	2014-12-15	IC ID: 5043A- AT140704A	


### 6.4.4 Test Plot: 216.475 Beacon per FCC 95 Mask

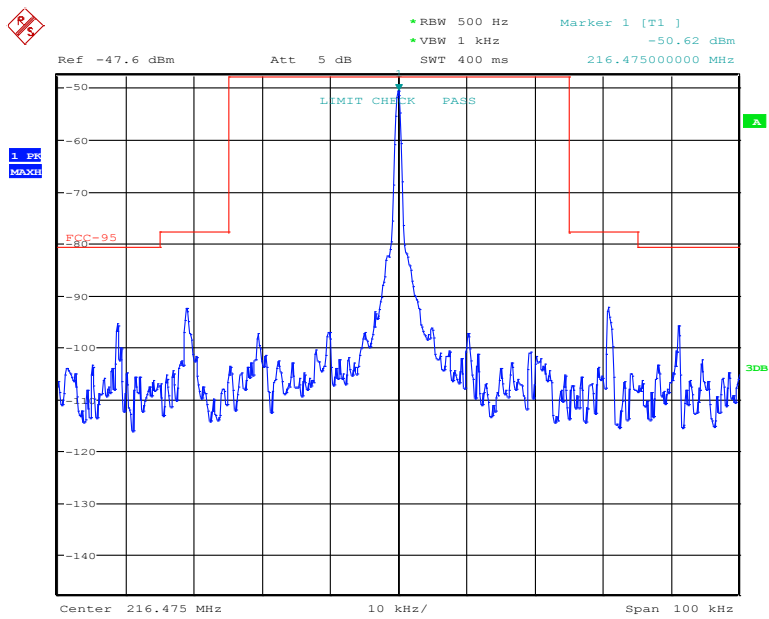

low


Date: 4.NOV.2014 17:06:05

### Plot 216.475 Per RSS 210 Mask

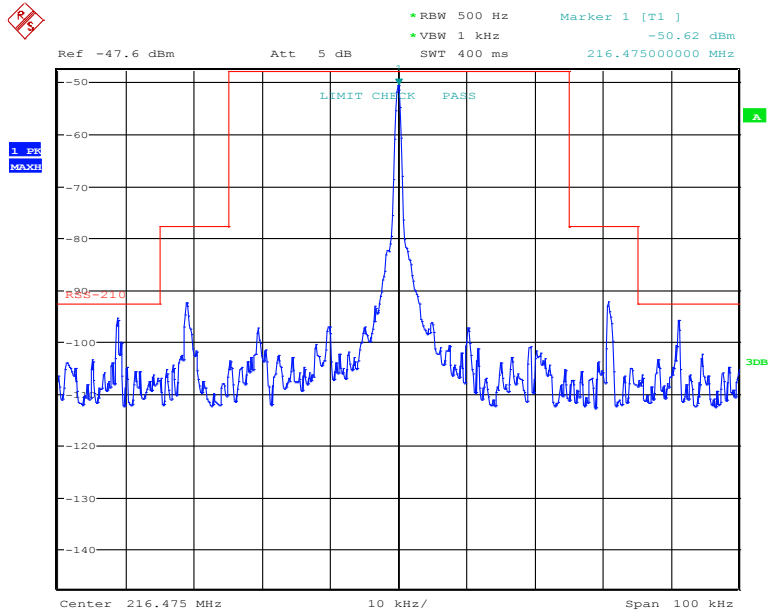

low

Date: 4.NOV.2014 18:04:49

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	
Date :	2014-12-15	IC ID: 5043A- AT140704A	

## 6.5 Frequency Tolerance

### 6.5.1 References:

FCC: 95.629

### 6.5.2 Limits:

LPRS transmitters operating on extra band channels must be maintained within a frequency stability of 50 parts per Million.

### 6.5.3 Results:

Expected Frequency (MHz)	Measured Frequency (MHz)	Frequency Error (MHz)	Frequency Error (ppm)
<b>Temperature</b>			
50	216.4749199	8.0128E-05	-0.370148978
40	216.4749038	9.6154E-05	-0.444180621
30	216.4749215	7.8526E-05	-0.362748585
20	216.4749471	5.2885E-05	-0.244300728
10	216.4749631	3.6859E-05	-0.170269084
0	216.4750064	-6.41E-06	0.02961081
-10	216.4750577	-5.7692E-05	0.266506525
-20	216.4750721	-7.2115E-05	0.333133156
-25	216.4750994	-9.9359E-05	0.458986026
-30	216.4751074	-0.000107372	0.496001848

Temp 21 C and Voltage at +/- 15% of Mfg rated voltage Per RSS 210

Temperature / Voltage	Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)
nominal T and V	216.4749343	6.57055E-05	-0.303524656
nominal T and low V 3.15	216.4749322	6.7815E-05	-0.313269431
nominal T and low V 4.25	216.4749358	6.4166E-05	-0.296412981



Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	<b>CETECOM™</b>
Date :	2014-12-15	IC ID: 5043A- AT140704A	

## 6.6 Transmitter Spurious Emissions- Radiated

### 6.6.1 216.475 MHz Beacon


#### 6.6.1.1 References

FCC: CFR Part 95

#### 6.6.1.2 Test Result:

Horizontal and Vertical Polarizations, Worst case for all channels


#### 6.6.1.2.1 Test Results 9KHz – 30 MHz

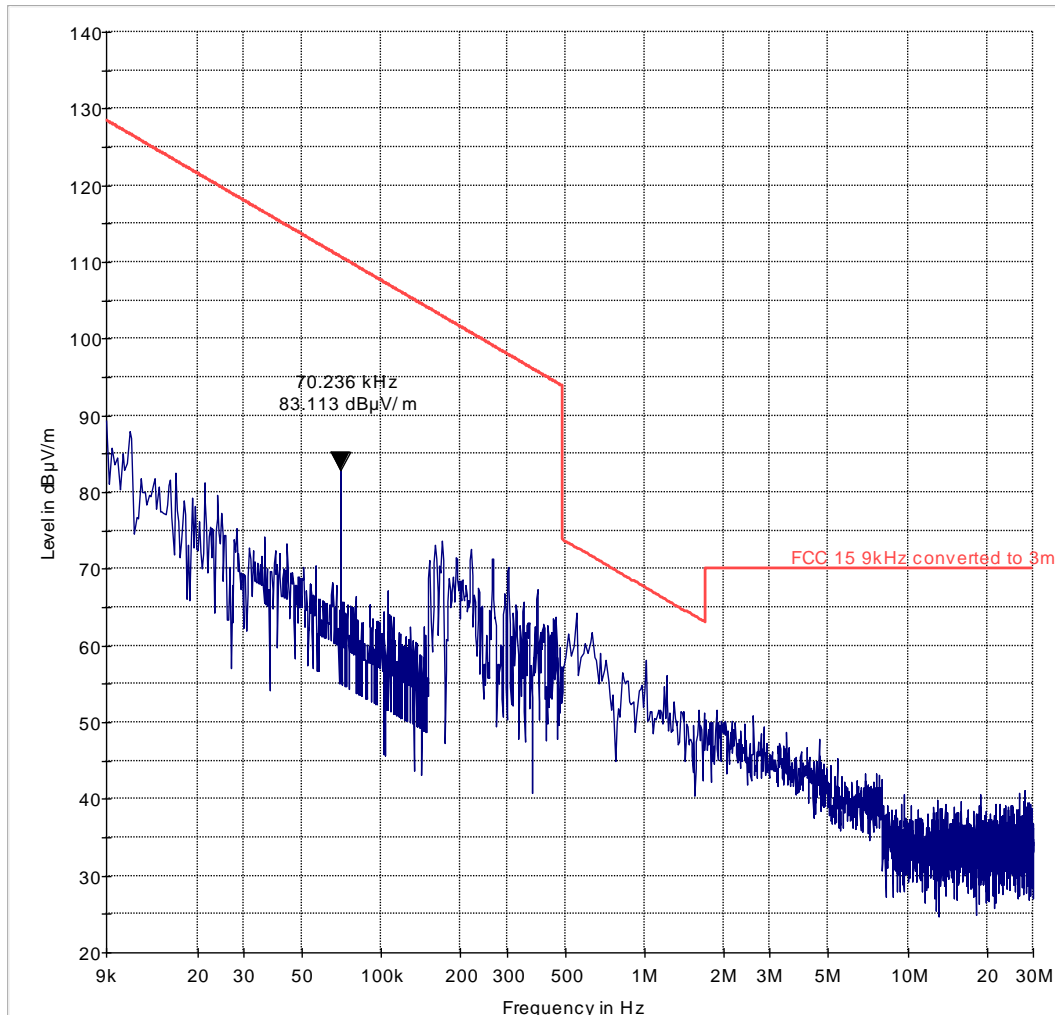

— FCC 15 9kHz converted to 3m — Preview Result 1-PK+

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	<b>CETECOM</b> <sup>TM</sup>
Date :	2014-12-15	IC ID: 5043A- AT140704A	


6.6.1.2.2 Test Result 30 MHz - 1 GHz:

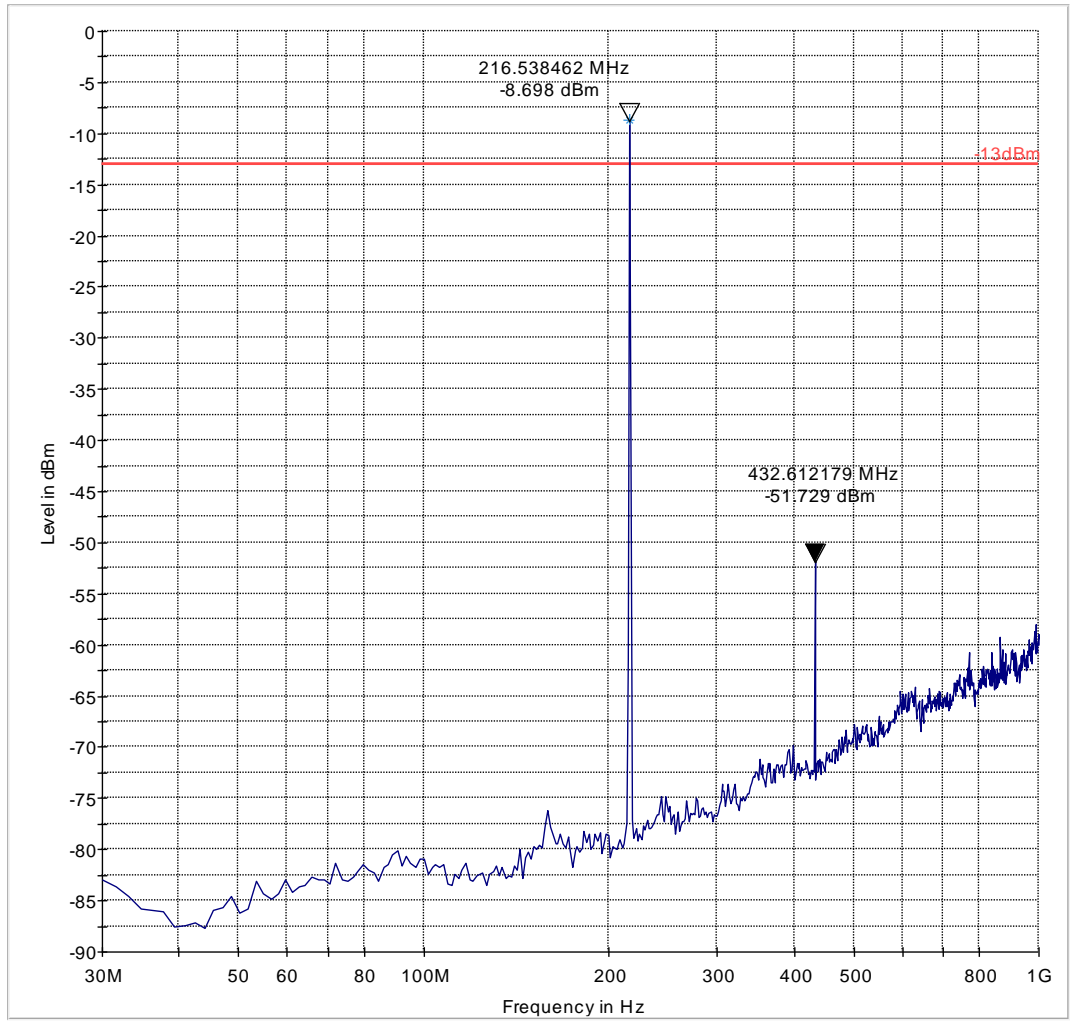


— -13dBm    — Preview Result 1-PK+    \* Data Reduction Result 1 [2]-PK+

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	<b>CETECOM</b> <sup>TM</sup>
Date :	2014-12-15	IC ID: 5043A- AT140704A	

**6.6.1.2.3 Test Result 1 GHz – 6 GHz:**

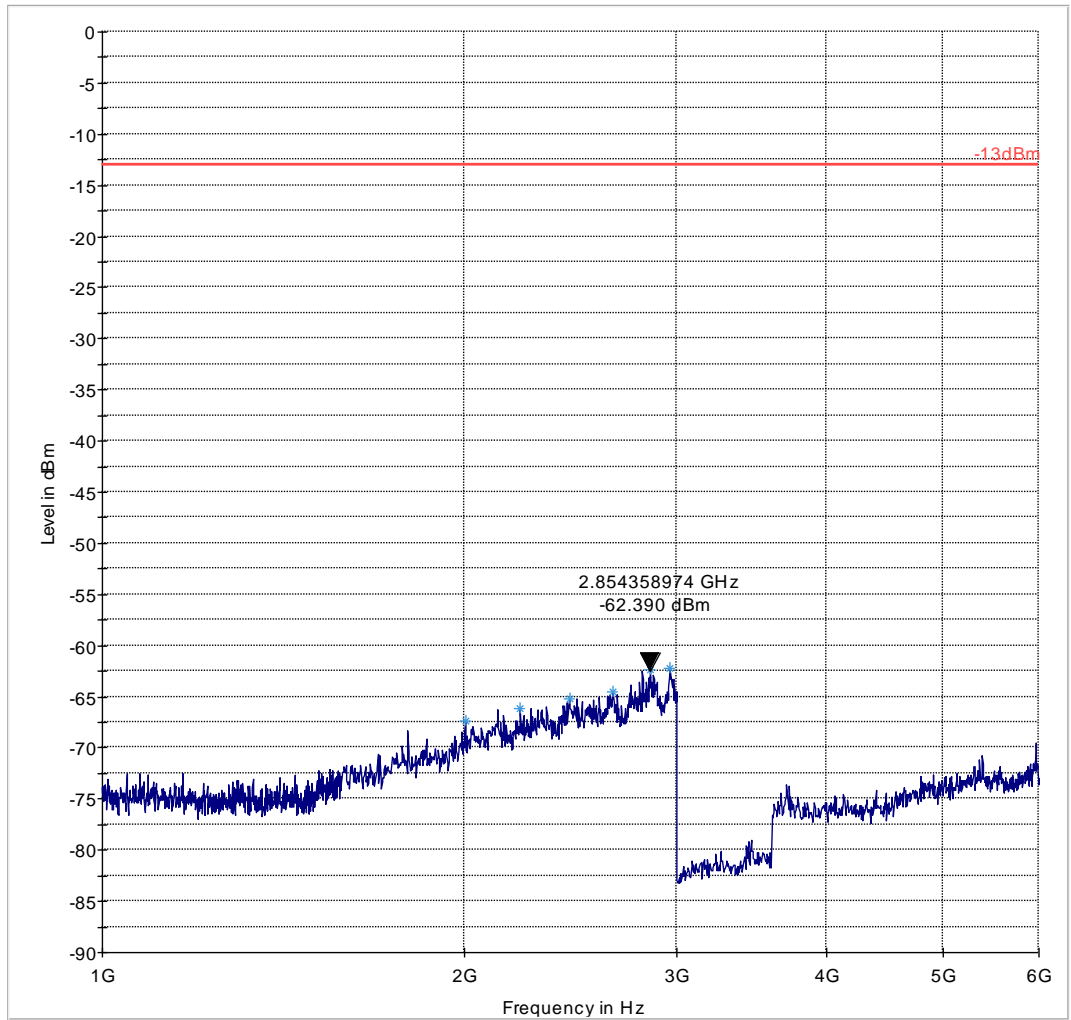

— -13dBm    
 — Preview Result 1-PK+    
 \* Data Reduction Result 1 [3]-PK+


Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	
Date :	2014-12-15	IC ID: 5043A- AT140704A	

## 7 Test Equipment


No.	Equipment Name	Manufacturer	Type/model	Serial No.	Cal Date	Cal Interval
<b>3m Semi- Anechoic Chamber:</b>						
	Turn table	EMCO	2075	N/A	N/A	N/A
	MAPS Position Controller	ETS Lindgren	2092	0004-1510	N/A	N/A
	Antenna Mast	EMCO	2075	N/A	N/A	N/A
	Relay Switch Unit	Rohde&Schwarz	RSU	338964/001	N/A	N/A
	EMI Receiver/Analyzer	Rohde&Schwarz	ESU 40	100251	Sep 2013	2 Year
	1500MHz HP Filter	Filtek	HP12/1700	14c48	N/A	N/A
	2800 MHZ HP Filter	Filtek	HP12/2800	14C47	N/A	N/A
	Pre-Amplifier	Miteq	JS40010260	340125	N/A	N/A
	Binconilog Antenna	EMCO	3141	0005-1186	Apr 2012	3 Years
	Horn Antenna	EMCO	3115	35114	Mar 2012	3 Years
<b>Ancillary equipment</b>						
	Spectrum Analyzer	Rohde&Schwarz	FSU	200256	Jun 2013	2 Years
	Multimeter	Klein Tools	MM200	CET-0002	Oct 2013	1 Years
	Vector Signal Generator	Rohde&Schwarz	SMU200A	101935	Feb 2013	2 Years
	Signal Generator	Rohde&Schwarz	SMP04	100151	Jun 2013	2 Years
	Thermometer Humidity	Dickson	SM320	09309168	Jul 2014	1 Year
	Temperature Chamber	Test Equity	115	150384	N/A	N/A
	DC Power Supply	HP	E3610A	KR83023316	N/A	N/A


Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	<b>CETECOM™</b>
Date :	2014-12-15	IC ID: 5043A- AT140704A	

## 8 BLOCK DIAGRAMS

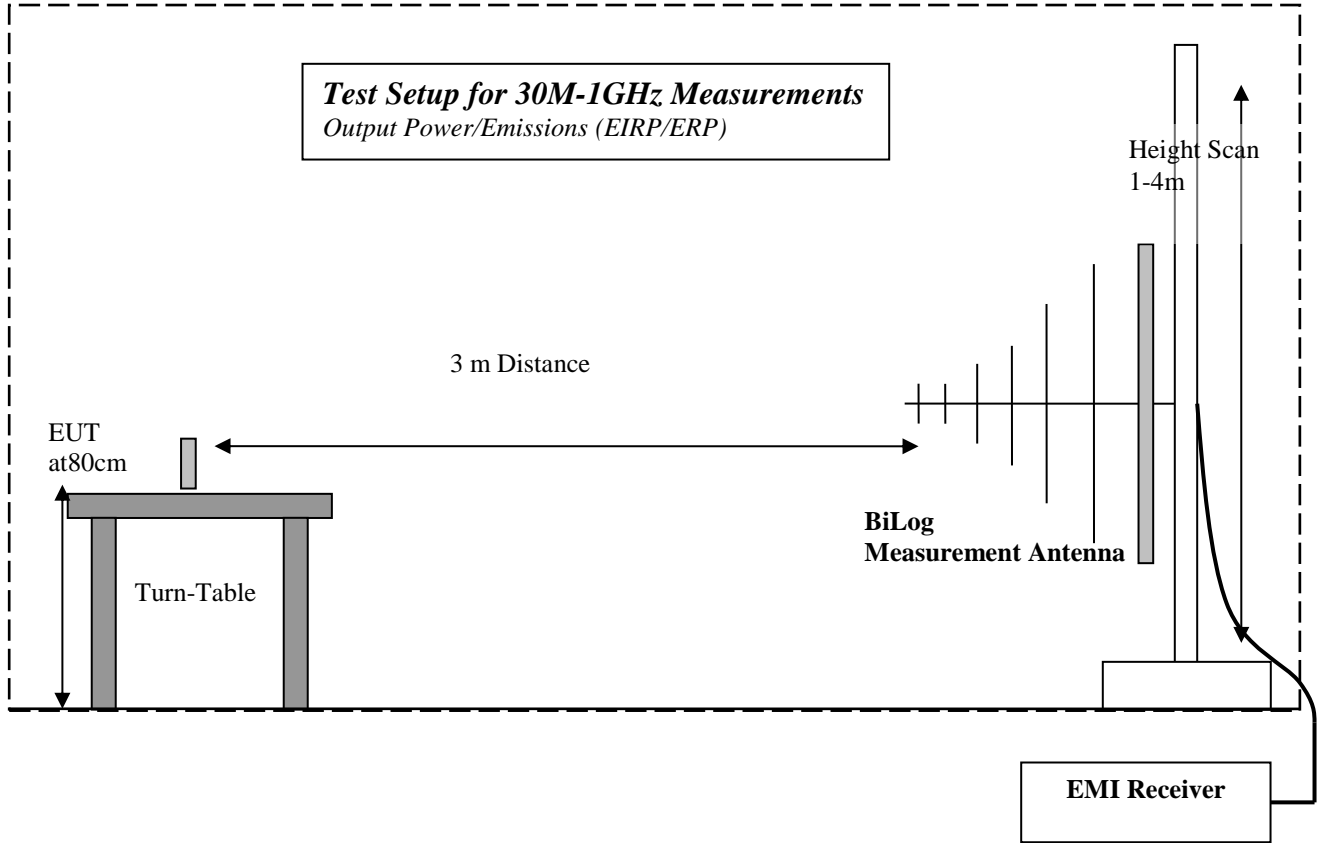

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	<b>CETECOM</b> <sup>TM</sup> <small>EMC TESTING &amp; CONSULTING</small>
Date :	2014-12-15	IC ID: 5043A- AT140704A	

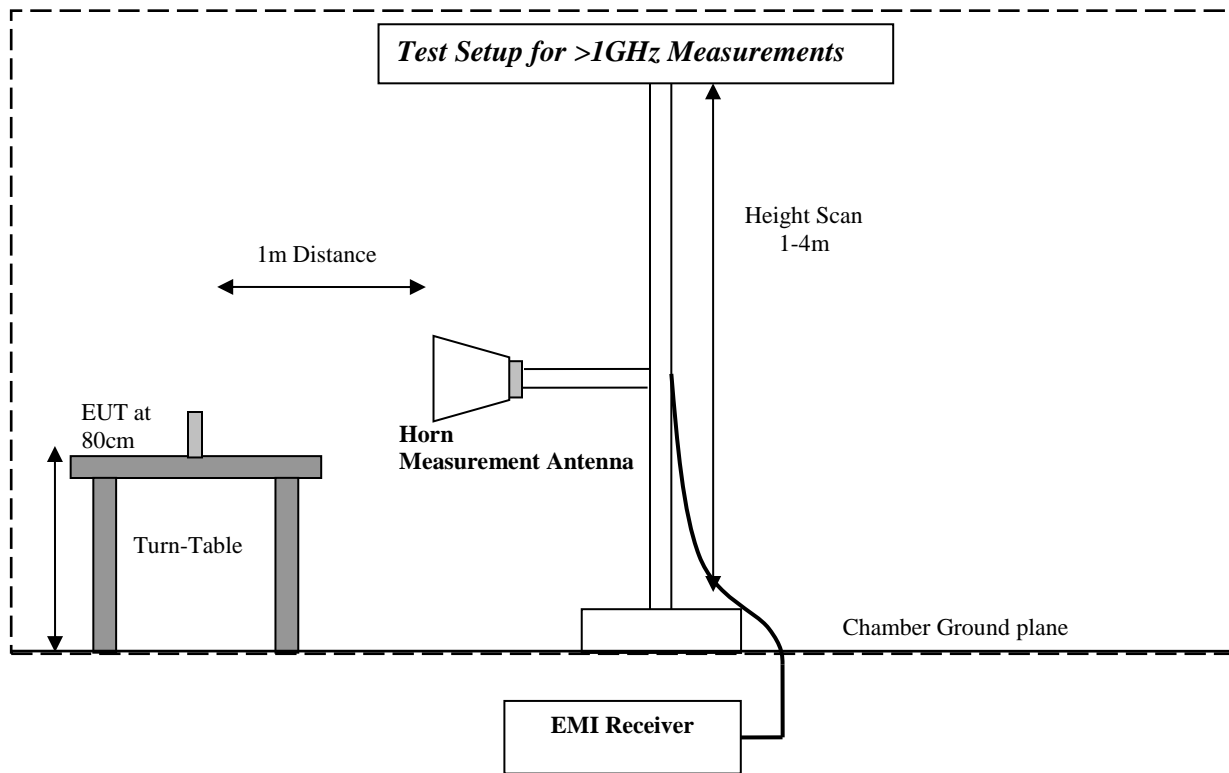

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	<b>CETECOM</b> <sup>TM</sup> 
Date :	2014-12-15	IC ID: 5043A- AT140704A	

## 9 Revision History

<b>Date</b>	<b>Report Name</b>	<b>Changes to report</b>	<b>Report prepared by</b>
2014-12-03	EMC_3SISE-038-14001-ATM_FCC_95	Official Release	James Donnellan
2014-12-15	EMC_3SISE-038-14001-ATM_FCC_95_Rev1	Rev 1. Updated RSS-Gen to issue 4	James Donnellan