

**FCC PART 15.231**  
**MEASUREMENT AND TEST REPORT**  
**FOR**

**GUANGDONG STEELMATE SECURITY CO., LTD.**

**Renan Street, Dongfu Road, Dongfeng Town, Zhongshan, 528425, China**

**FCC ID: Q6WBT4123**

<b>Report Concerns:</b> Original Report	<b>Equipment Type:</b> Single-way Transmitter
<b>Model:</b>	<u>RS-3</u>
<b>Report No.:</b>	<u>STR11108148I</u>
<b>Test Date:</b>	<u>2011-10-21 to 2011-11-03</u>
<b>Issue Date:</b>	<u>2011-11-07</u>
<b>Tested By:</b>	<u>Silin Chen / Engineer</u> <i>Silin chen</i>
<b>Reviewed By:</b>	<u>Lahm Peng / EMC Manager</u> <i>Lahm peng</i>
<b>Approved &amp; Authorized By:</b>	<u>Jandy so / PSQ Manager</u> <i>Jandyso</i>
<b>Prepared By:</b>	<p style="text-align: center;"><b>SEM.Test Compliance Service Co., Ltd</b>                      3/F, Jinbao Commerce Building, Xin'an Fanshen Road,                      Bao'an District, Shenzhen, P.R.C. (518101)                      Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn</p>

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by SEM.Test Compliance Service Co., Ltd.

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION.....3**

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3

1.2 TEST STANDARDS.....3

1.3 TEST METHODOLOGY .....4

1.4 TEST FACILITY .....4

1.5 EUT EXERCISE SOFTWARE .....4

1.6 ACCESSORIES EQUIPMENT LIST AND DETAILS .....4

1.7 EUT CABLE LIST AND DETAILS .....4

**2. SUMMARY OF TEST RESULTS .....5**

**3. §15.203 ANTENNA REQUIREMENT .....6**

3.1 STANDARD APPLICABLE.....6

3.2 TEST RESULT.....6

**4. §15.205, §15.209, §15.231 (B) RADIATED EMISSION .....7**

4.1 MEASUREMENT UNCERTAINTY .....7

4.2 STANDARD APPLICABLE.....7

4.3 TEST EQUIPMENT LIST AND DETAILS .....8

4.4 TEST PROCEDURE.....8

4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....9

4.6 ENVIRONMENTAL CONDITIONS .....9

4.7 SUMMARY OF TEST RESULTS/PLOTS .....9

**5. §15.231(C) 20DB BANDWIDTH TESTING .....12**

5.1 STANDARD APPLICABLE.....12

5.2 TEST EQUIPMENT LIST AND DETAILS .....12

5.3 TEST PROCEDURE.....12

5.4 ENVIRONMENTAL CONDITIONS .....12

5.5 SUMMARY OF TEST RESULTS/PLOTS .....12

**6. §15.231(A) DEACTIVATION TESTING.....14**

6.1 STANDARD APPLICABLE.....14

6.2 TEST EQUIPMENT LIST AND DETAILS .....14

6.3 TEST PROCEDURE.....14

6.4 ENVIRONMENTAL CONDITIONS .....14

6.5 SUMMARY OF TEST RESULTS/PLOTS .....14

**7. §15.231(B) DUTY CYCLE.....16**

7.1 STANDARD APPLICABLE.....16

7.2 TEST EQUIPMENT LIST AND DETAILS .....16

7.3 TEST PROCEDURE.....16

7.4 ENVIRONMENTAL CONDITIONS .....16

7.5 SUMMARY OF TEST RESULTS/PLOTS .....16

# 1. GENERAL INFORMATION

## 1.1 Product Description for Equipment Under Test (EUT)

### Client Information

Applicant: GUANGDONG STEELMATE SECURITY CO., LTD.  
 Address of applicant: Renan Street, Dongfu Road, Dongfeng Town, Zhongshan, 528425, China

Manufacturer: GUANGDONG STEELMATE SECURITY CO., LTD.  
 Address of manufacturer: Renan Street, Dongfu Road, Dongfeng Town, Zhongshan, 528425, China

### General Description of E.U.T

Items	Description
EUT Description:	Single-way Transmitter
Trade Name:	Steelmate
Model No.:	RS-3
Adding Models:	RS-4, PS-03, PS-04
Rated Voltage:	DC 6V
Frequency Range:	433.92MHz
Antenna Type:	Integral Antenna
Comment:	Manually Operated Device
For more information refer to the circuit diagram form and the user’s manual.	

*The test data is gathered from a production sample, provided by the manufacturer, The other model listed in the report has different appearance only of RS-3 without circuit and electronic construction changed, declared by the manufacturer.*

## 1.2 Test Standards

The following report is prepared on behalf of the GUANGDONG STEELMATE SECURITY CO., LTD. in accordance with FCC Part 15, Subpart C, and section 15.231, 15.203, 15.205 and 15.209 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.231, 15.203, 15.205 and 15.209 of the Federal Communication Commissions rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

### 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions. The EUT was set to keep transmitting during the test.

### 1.4 Test Facility

- **FCC – Registration No.: 994117**  
 SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.
- **Industry Canada (IC) Registration No.: 7673A**  
 The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.
- **CNAS Registration No.: L4062**  
 Shenzhen SEM.Test Electronics Service Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C (518101)

### 1.5 EUT Exercise Software

The EUT exercise program used during the testing was designed to exercise the system components. The test software, provided by the customer, is started while the whole system is running.

### 1.6 Accessories Equipment List and Details

Description	Manufacturer	Model	Serial Number
N/A	N/A	N/A	N/A

### 1.7 EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
N/A	N/A	N/A	N/A

---

## 2. SUMMARY OF TEST RESULTS

---

<b>Description of Test</b>	<b>Result</b>
§15.203 Antenna Requirement	Compliant
§15.205 Restricted Band	Compliant
§15.207 Conducted Emission	N/A
§15.209 General Requirement	Compliant
§15.231 (a) Deactivation Testing	Compliant
§15.231 (c) 20dB Band Width Testing	Compliant
§15.231 (b) Radiated Emission	Compliant

### **3. §15.203 ANTENNA REQUIREMENT**

---

#### **3.1 Standard Applicable**

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Test Result**

This product has a permanent antenna, fulfill the requirement of this section.

**4. §15.205, §15.209, §15.231 (b) RADIATED EMISSION**

**4.1 Measurement Uncertainty**

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is  $\pm 5.10$  dB.

**4.2 Standard Applicable**

According to §15.231(b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70.....	2,250.....	225
70-130.....	1,250.....	125
130-174.....	\1\ 1,250 to 3,750 .....	\1\ 125 to 375
174-260.....	3,750.....	375
260-470.....	\1\ 3,750 to 12,500 .....	\1\ 375 to 1,250
Above 470.....	12,500.....	1,250

\1\ Linear interpolations.

The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.

compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.

Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


### 4.3 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2010-12-20	2011-12-19
EMI Test Receiver	R&S	ESVB	825471/005	2010-12-20	2011-12-19
Positioning Controller	C&C	CC-C-1F	N/A	2010-12-20	2011-12-19
RF Switch	EM	EMSW18	SW060023	2010-12-20	2011-12-19
Pre-amplifier	Agilent	8447F	3113A06717	2010-12-20	2011-12-19
Pre-amplifier	Compliance Direction	PAP-0118	24002	2010-12-20	2011-12-19
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2011-01-09	2011-01-08
Horn Antenna	ETS	3117	00086197	2011-01-09	2011-01-08
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2011-01-09	2012-01-08

**Statement of Traceability:** All calibrations have been performed per the NVLAP requirements traceable to the NIST.

### 4.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.205 15.231(b) and FCC Part 15.209 Limit.

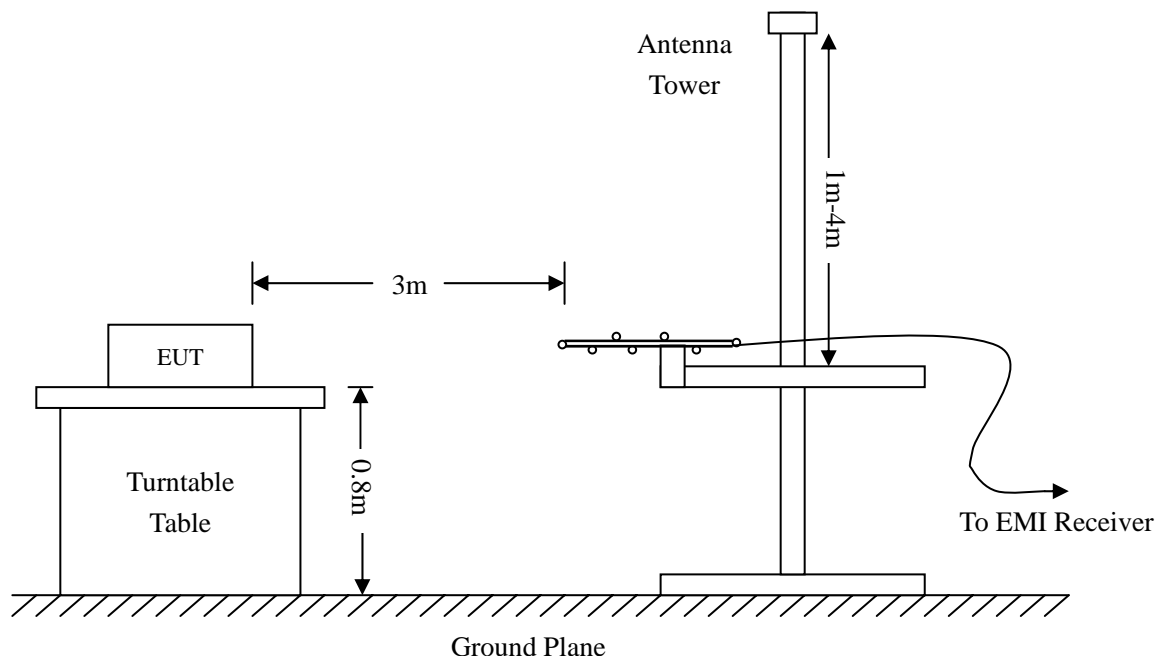



#### 4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Loss} + \text{Cab. Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of  $-6\text{dB}\mu\text{V}$  means the emission is  $6\text{dB}\mu\text{V}$  below the maximum limit for FCC Part 15.231. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.231 Limit}$$

#### 4.6 Environmental Conditions

Temperature:	21° C
Relative Humidity:	50%
ATM Pressure:	1011 mbar

#### 4.7 Summary of Test Results/Plots


According to the data below, the FCC Part 15.205, 15.209 and 15.231 standards, and had the worst margin of:

**$-1.54\text{ dB}\mu\text{V}$  at  $867.8400\text{ MHz}$  in the **Horizontal, Ave Detector** polarization, **9 kHz to 5 GHz**, **3Meters****

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

**Plot of Radiation Emissions Test**

Horizontal:

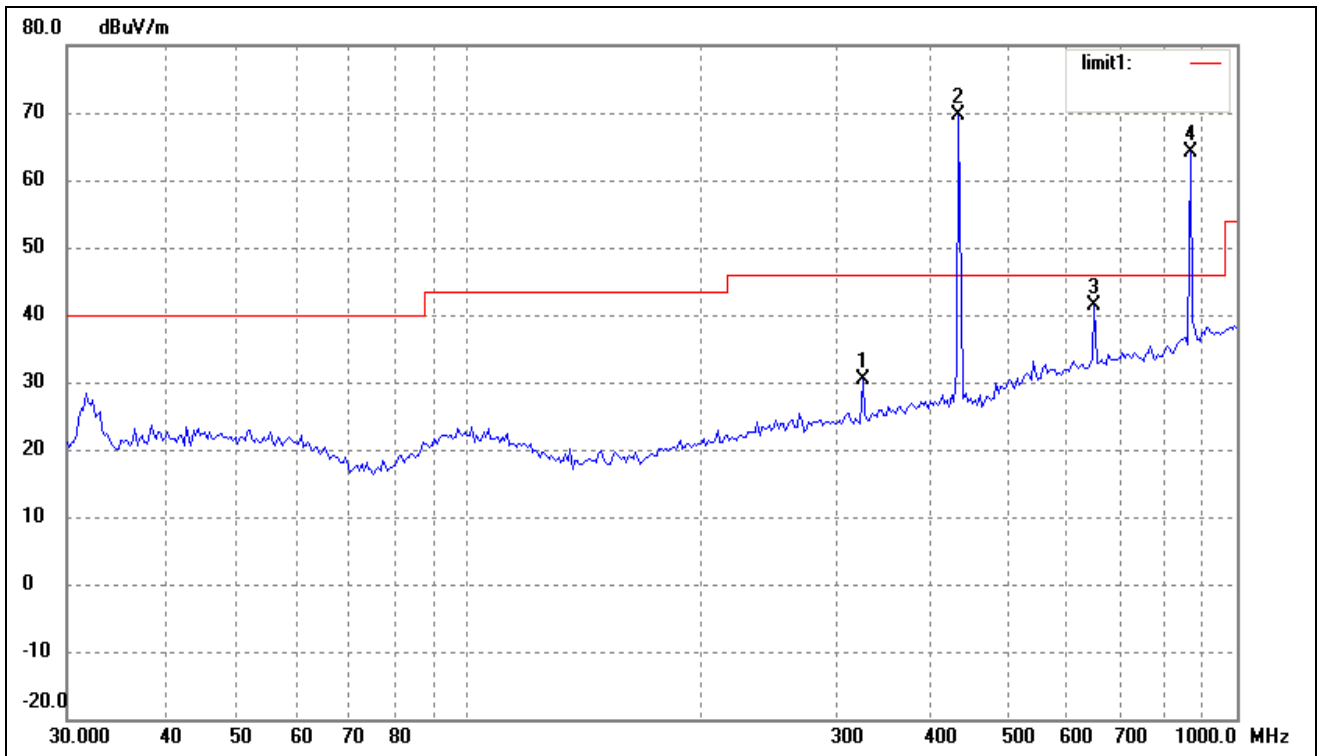


No.	Frequency MHz	Reading dBuV/m	Corr. Factor( dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin (dB)	Deg. ( ° )	Height (cm)	Remark
1	325.5958	20.23	10.11	N/A	30.34	46.00	-15.66	360	100	peak
2	433.9200	57.71	11.93	N/A	69.64	100.80	-31.16	360	100	peak
	433.9200	/	/	-4.81	64.83	80.80	-15.97	139	100	Ave
3	651.9417	24.28	17.11	N/A	41.39	46.00	-4.61	360	100	peak
4	867.8400	43.75	20.32	N/A	64.07	80.80	18.07	360	100	peak
	867.8400	/	/	-4.81	59.26	60.80	-1.54	150	100	Ave

Above 1GHz

No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin dB	Deg. ( ° )	Height (cm)	Remark
1	1301.76	65.81	-11.55	N/A	54.26	74.00	-13.91	360	100	Peak
2	1735.68	60.17	-9.81	N/A	50.36	74.00	-19.43	360	100	Peak
	1301.76	/	/	-4.81	49.45	54.00	-4.55	45	100	Ave
	1735.68	/	/	-4.81	45.55	54.00	-8.45	310	100	Ave

Vertical:

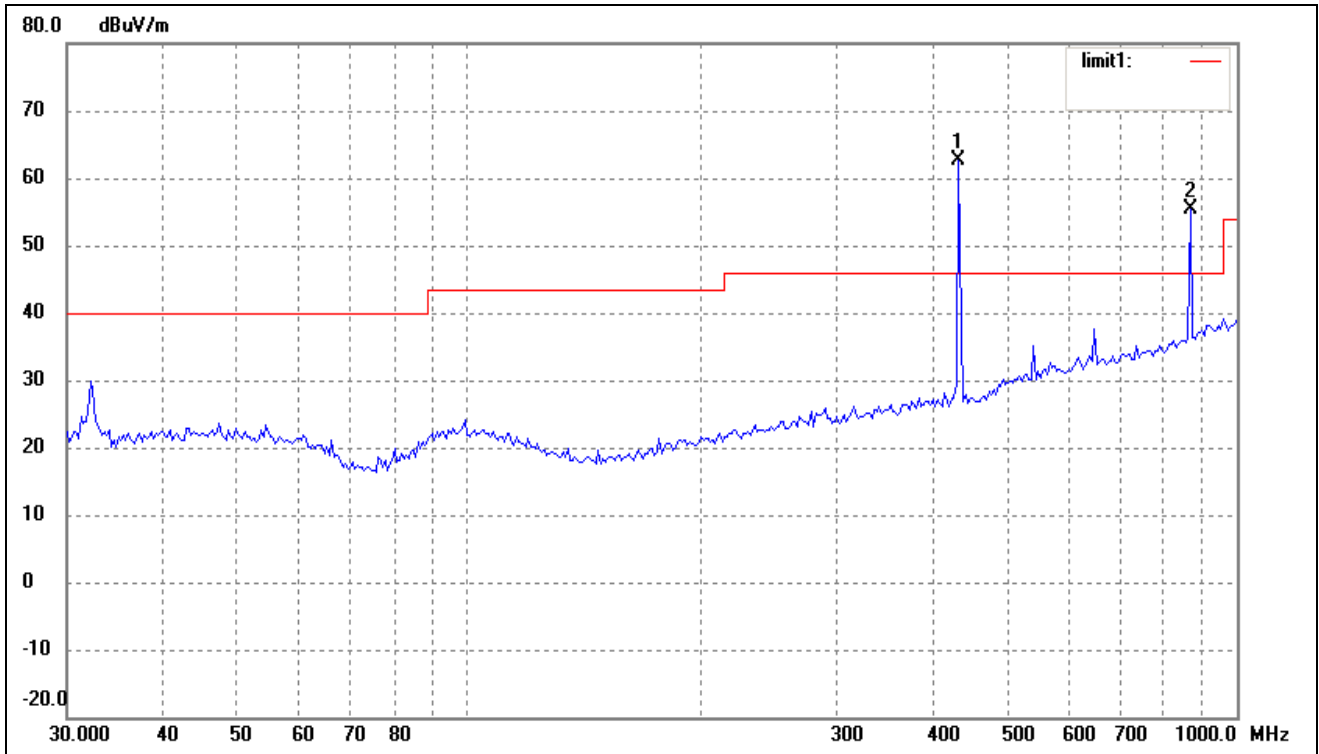

No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin (dB)	Deg. ( ° )	Height (cm)	Remark
1	433.92	50.73	11.93	N/A	62.66	100.80	-38.14	360	100	peak
	433.92	/	/	-4.81	57.85	80.80	-22.95	360	100	Ave
2	867.8400	35.01	20.32	N/A	55.33	80.80	-25.47	360	100	peak
	867.8400	/	/	-4.81	50.52	60.80	-10.28	10	100	Ave

Above 1GHz

No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin dB	Deg. ( ° )	Height (cm)	Remark
1	1301.76	67.64	-11.55	N/A	56.09	74.00	-13.91	360	100	Peak
2	1735.68	61.22	-9.81	N/A	51.41	74.00	-19.43	360	100	Peak
	1301.76	/	/	-4.81	51.28	54.00	-2.27	140	100	Ave
	1735.68	/	/	-4.81	46.60	54.00	-7.40	120	100	Ave

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5<sup>th</sup> Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.

The measurements greater than 20dB below the limit from 9kHz to 30MHz..

The fundamental frequency is 433.92MHz, so the fundamental and spurious emissions radiated limit base on the the operating frequency 433.92MHz.

## 5. §15.231(c) 20dB BANDWIDTH TESTING

### 5.1 Standard Applicable

According to FCC 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

### 5.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2010-12-20	2011-12-19
Attenuator	ATTEN	ATS100-4-20	/	2010-12-20	2011-12-19

**Statement of Traceability:** All calibrations have been performed per the NVLAP requirements traceable to the NIST.

### 5.3 Test Procedure

With the EUT’s antenna attached, the EUT’s 20dB Bandwidth power was received by the test antenna, which was connected to the spectrum analyzer with the START, and STOP frequencies set to the EUT’s operation band.

### 5.4 Environmental Conditions

Temperature:	21° C
Relative Humidity:	52%
ATM Pressure:	1011 mbar


### 5.5 Summary of Test Results/Plots

Frequency MHz	20dB Bandwidth KHz	Limit kHz
433.92	60.85	1084

Limit=Fundamental Frequency×0.25%=433.92×0.25%=1084kHz

**Test Result Pass**

Refer to the attached plots.

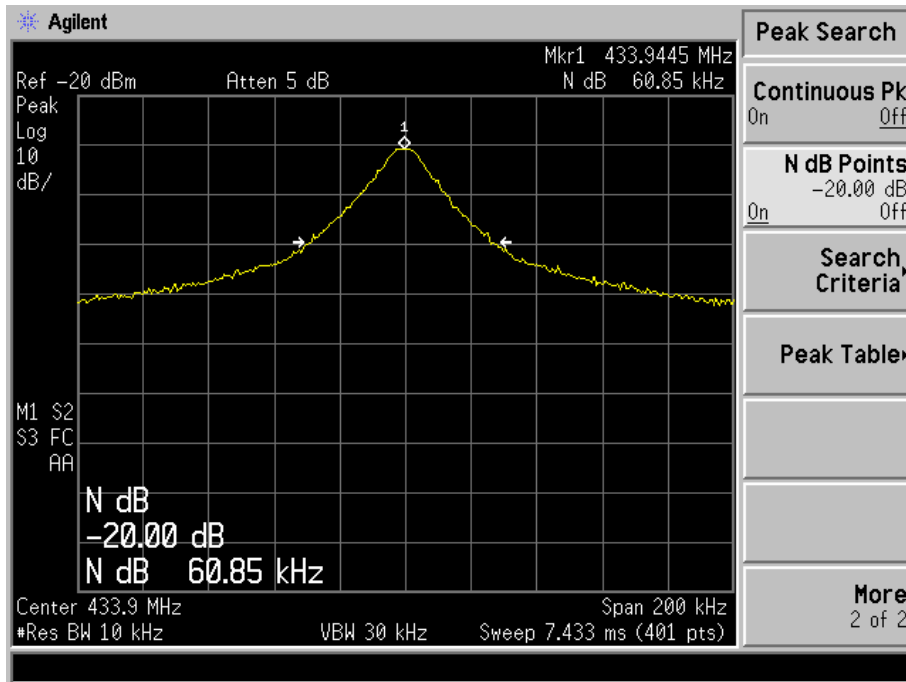

## 6. §15.231(a) DEACTIVATION TESTING

### 6.1 Standard Applicable

According to FCC 15.231 (a)(1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

### 6.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2010-12-20	2011-12-19
Attenuator	ATTEN	ATS100-4-20	/	2010-12-20	2011-12-19

**Statement of Traceability:** All calibrations have been performed per the NVLAP requirements traceable to the NIST.

### 6.3 Test Procedure

With the EUT’s antenna attached, the EUT’s output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 433.92MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.


### 6.4 Environmental Conditions

Temperature:	20° C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

### 6.5 Summary of Test Results/Plots

Refer to the attached plots.

The transmission time <5s

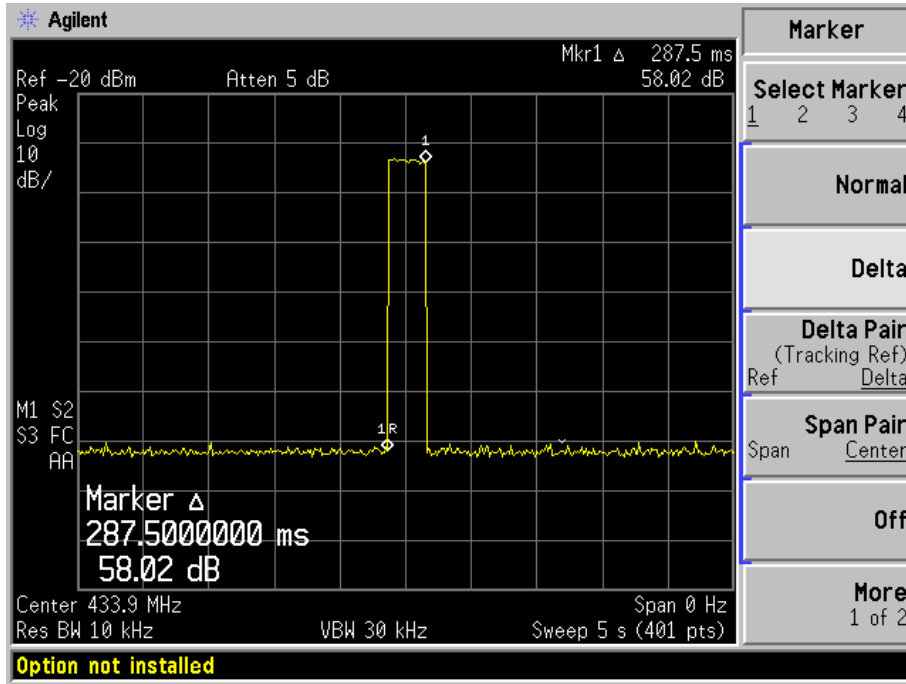

**Result: Pass**

## 7. §15.231(b) Duty Cycle

### 7.1 Standard Applicable

According to FCC 15.231 (b)(2) and 15.35 (c), For pulse operation transmitter, the averaging pulsed emissions are calculated by peak value of measured emission plus duty cycle factor.

### 7.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2010-12-20	2011-12-19
Attenuator	ATTEN	ATS100-4-20	/	2010-12-20	2011-12-19

**Statement of Traceability:** All calibrations have been performed per the NVLAP requirements traceable to the NIST.

### 7.3 Test Procedure

With the EUT’s antenna attached, the EUT’s output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 433.92MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.

### 7.4 Environmental Conditions

Temperature:	20° C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

### 7.5 Summary of Test Results/Plots

$T_p = 59.02\text{ms}$



$T_{on} = T_{on1} * \text{Number} + T_{on2} * \text{Number} = 33.93$

$\text{Duty Cycle} = T_{on} / T_p * 100\% = 0.57489$

$\text{Factor} = 20 * \text{Log} (T_{on}/T_p) = -4.81\text{dB}$



Refer to the attached plots.

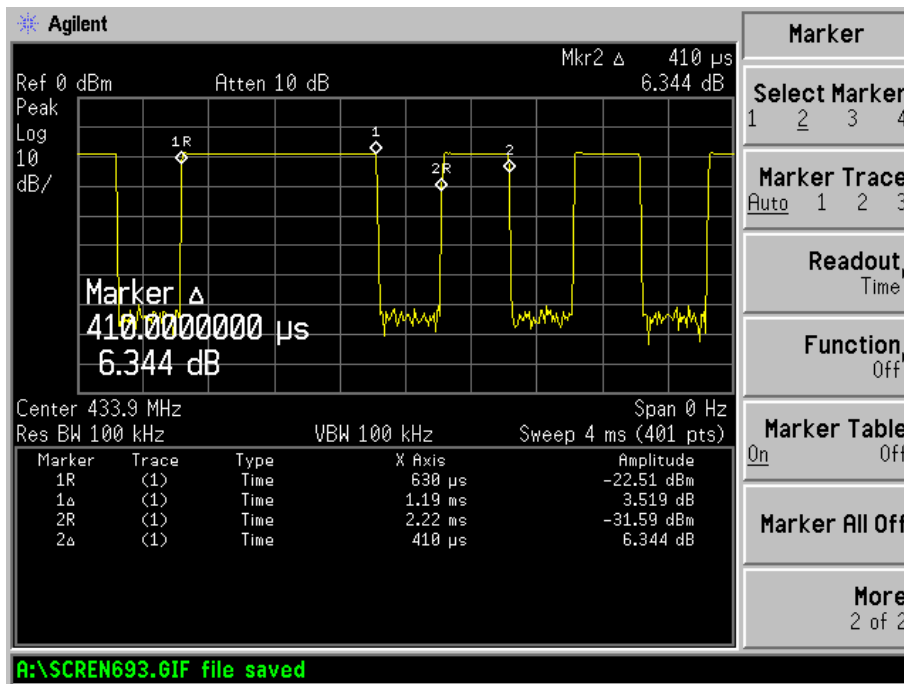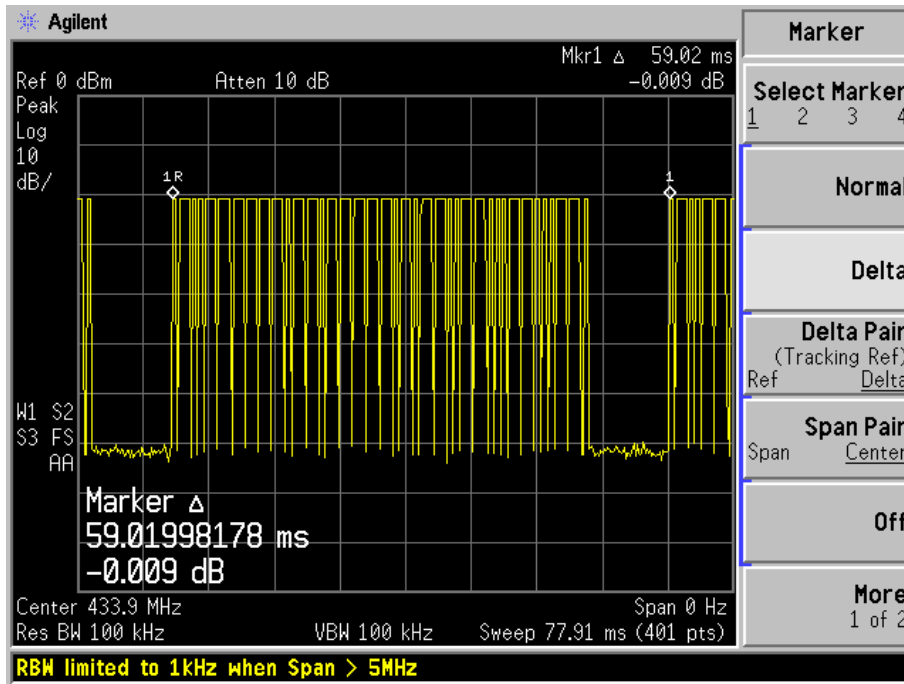

\*\*\*\*\* END OF REPORT \*\*\*\*\*