

FCC REPORT

Applicant: GUANGDONG STEELMATE SECURITY CO.,LTD.
Address of Applicant: Steelmate Industrial Park, Heping Street, Dongfu Road,
Dongfeng Town, Zhongshan City, Guangdong, P.R. China
528425

Equipment Under Test (EUT)

Product Name: TPMS
Model No.: TP-71B, TP-71P, TP-78
Trade mark: steelmate
FCC ID: Q6WTP7178
Applicable standards: CFR Title 47 FCC Part 15.231(e)
Date of sample receipt: 21 Feb., 2014
Date of Test: 22 Feb., to 03 Mar., 2014
Date of report issue: 04 Mar., 2014
Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager
This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	04 Mar., 2014	Original

Prepared by:

Date:

04 Mar., 2014

Report Clerk

Reviewed by:

Date:

04 Mar., 2014

Project Engineer

3 Contents

1	COVER PAGE.....	1
2	VERSION.....	2
3	CONTENTS	3
4	TEST SUMMARY.....	4
5	GENERAL INFORMATION	5
5.1	CLIENT INFORMATION.....	5
5.2	GENERAL DESCRIPTION OF E.U.T.....	5
5.3	TEST MODE	5
5.4	LABORATORY FACILITY.....	6
5.5	LABORATORY LOCATION	6
5.6	TEST INSTRUMENTS LIST.....	6
6	TEST RESULTS AND MEASUREMENT DATA	7
6.1	ANTENNA REQUIREMENT:.....	7
6.2	RADIATED EMISSION	8
6.2.1	Field Strength Of The Fundamental Signal.....	10
6.2.2	Spurious Emissions	12
6.3	BANDWIDTH OF EMISSION.....	13
6.4	DURATION AND SILENT TIME:	15
7	PHOTOGRAPHS-TEST SETUP PHOTO	18
8	PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	19

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
Field strength of the fundamental signal	15.231 (e)	Pass
Spurious emissions	15.231 (e)/15.209	Pass
Bandwidth of emission	15.231 (c)	Pass
Transmission Time	15.231 (e)	Pass

Pass: The EUT complies with the essential requirements in the standard.

5 General Information

5.1 Client Information

Applicant:	GUANGDONG STEELMATE SECURITY CO., LTD
Address of Applicant:	Renan Street, Dong fu Road, Dongfeng Town, Zhongshan, 528425 China.
Manufacturer/ Factory:	GUANGDONG STEELMATE SECURITY CO., LTD
Address of Manufacturer/ Factory:	Renan Street, Dong fu Road, Dongfeng Town, Zhongshan, 528425 China.

5.2 General Description of E.U.T.

Product Name:	TPMS
Model No.:	TP-71B, TP-71P, TP-78
Trade mark:	Steelmate
Operation Frequency:	433.92MHz
Channel numbers:	1
Modulation type:	FSK
Antenna Type:	PCB antenna
Antenna gain:	1 dBi
Power supply:	DC 3V
Remark:	Note: The Model: TP-71B, TP-71P, TP-78 were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being model number due to market purpose.

5.3 Test mode

Transmitting mode:	Keep the EUT in transmitting mode with modulation. New battery used .					
Pre-Test Mode:						
CCIS has verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:						
Axis	X	Y	Z			
Field Strength(dBuV/m)	81.65	81.70	81.61			
Final Test Mode:						
According to ANSI C63.4 standards, the test results are both the "worst case" and "worst setup": Y axis (see the test setup photo)						

5.4 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Registration No.: 817957**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in out files. Registration 817957, February 27, 2012.

● **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

5.5 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.

Address: No.B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755-23118282


Fax: +86-755-23116366

5.6 Test Instruments list

Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	EMI Test Receiver	Rohde & Schwarz	ESCI	CCIS0002	June 16 2013	June 16 2014
2	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	CCIS0005	June 09 2013	June 09 2014
3	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	CCIS0006	June 09 2013	June 09 2014
4	Amplifier(10kHz-1.3GHz)	HP	8447D	CCIS0003	Aug. 03 2013	Aug. 03 2014
5	Amplifier(1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	Aug. 05 2012	Aug. 05 2014
6	Spectrum analyzer	Rohde & Schwarz	FSP	CCIS0023	June 22 2013	June 22 2014

6 Test results and Measurement Data

6.1 Antenna requirement:

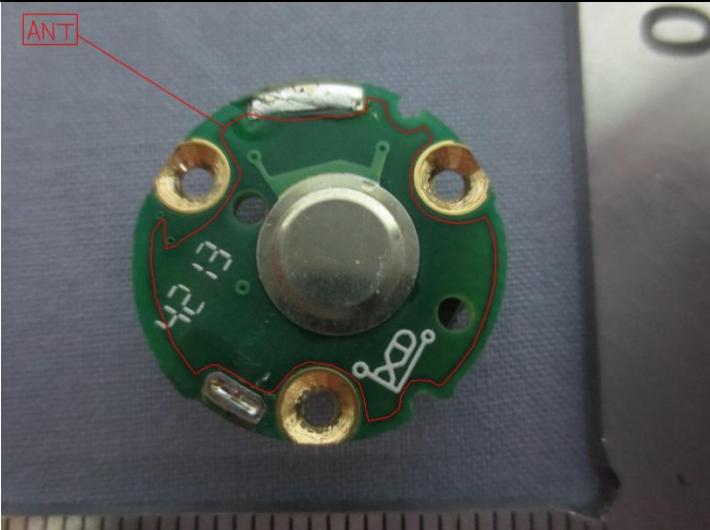Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i>	
E.U.T Antenna:	
The EUT make use of PCB antenna, The typical gain of the antenna is 1 dBi.	

6.2 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.231(e)and 15.209																									
Test Method:	ANSI C63.4:2003																									
Test Frequency Range:	30MHz to 5000MHz																									
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																									
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th><th>Detector</th><th>RBW</th><th>VBW</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td><td>Quasi-peak</td><td>120 kHz</td><td>300 kHz</td><td>Quasi-peak Value</td></tr> <tr> <td>Above 1GHz</td><td>Peak</td><td>1 MHz</td><td>3 MHz</td><td>Peak Value</td></tr> </tbody> </table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	120 kHz	300 kHz	Quasi-peak Value	Above 1GHz	Peak	1 MHz	3 MHz	Peak Value						
Frequency	Detector	RBW	VBW	Remark																						
30MHz-1GHz	Quasi-peak	120 kHz	300 kHz	Quasi-peak Value																						
Above 1GHz	Peak	1 MHz	3 MHz	Peak Value																						
Limit: (Field strength of the fundamental signal)	<table border="1"> <thead> <tr> <th>Frequency</th><th>Limit (dBuV/m @3m)</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>433.92 MHz</td><td>72.8</td><td>Average Value</td></tr> <tr> <td></td><td>92.8</td><td>Peak Value</td></tr> </tbody> </table>					Frequency	Limit (dBuV/m @3m)	Remark	433.92 MHz	72.8	Average Value		92.8	Peak Value												
Frequency	Limit (dBuV/m @3m)	Remark																								
433.92 MHz	72.8	Average Value																								
	92.8	Peak Value																								
Limit: (Spurious Emissions)	<table border="1"> <thead> <tr> <th>Frequency</th><th>Limit (dBuV/m @3m)</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr> <tr> <td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr> <tr> <td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr> <tr> <td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr> <tr> <td>Above 1GHz</td><td>54.0</td><td>Average Value</td></tr> <tr> <td></td><td>74.0</td><td>Peak Value</td></tr> </tbody> </table> <p>Or The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level whichever limit permits higher field strength.</p>					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value		74.0	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																								
30MHz-88MHz	40.0	Quasi-peak Value																								
88MHz-216MHz	43.5	Quasi-peak Value																								
216MHz-960MHz	46.0	Quasi-peak Value																								
960MHz-1GHz	54.0	Quasi-peak Value																								
Above 1GHz	54.0	Average Value																								
	74.0	Peak Value																								
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 																									

Test setup:	<p>Below 1GHz</p> <p>Above 1GHz</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Measurement Data**6.2.1 Field Strength Of The Fundamental Signal**

Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
433.92	59.61	15.53	3.16	0.00	78.30	92.80	-14.50	Horizontal
433.92	63.01	15.53	3.16	0.00	81.70	92.80	-11.10	Vertical


Average value:						
Frequency (MHz)	Level (dBuV/m)	Duty cycle factor	Average value (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
433.92	78.30	-9.72	68.58	72.80	-4.22	Horizontal
433.92	81.70	-9.72	71.98	72.80	-0.82	Vertical

Average value:	
Calculate Formula:	Average value=Peak value + Duty Cycle Factor
	Duty cycle factor=20 log(Duty cycle)
	Duty cycle= on time/100 milliseconds or period, whichever is less
Test data:	Ton time = 1603.206*2(us)+7615.230(us)+21843.687(us)=32.66(ms)
	T period = 100 ms
	Duty cycle = 32.66%
	Duty Cycle Factor = 20 log(Duty cycle)= -9.72


T period:

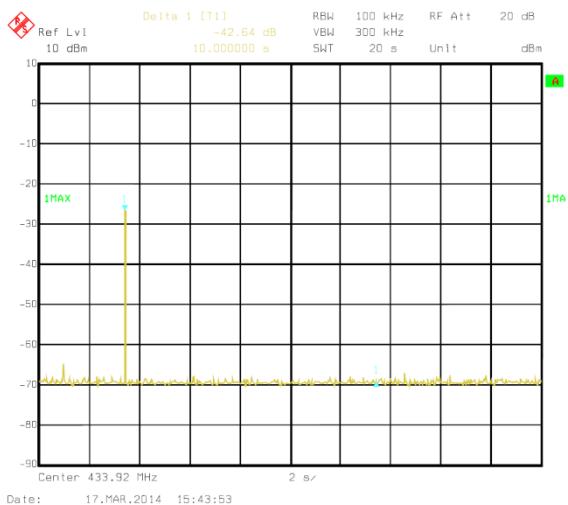


T on time slot-1:

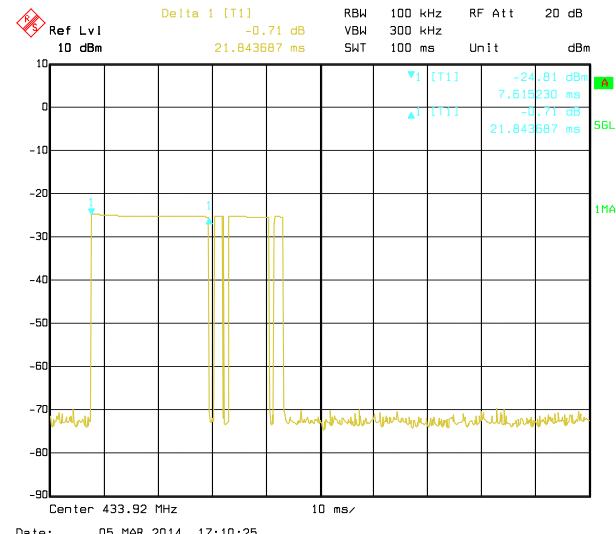

T on time slot-2:

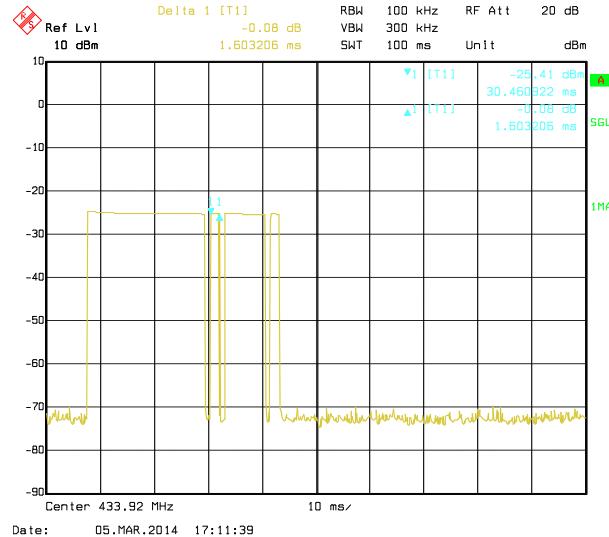

T on time slot-3:

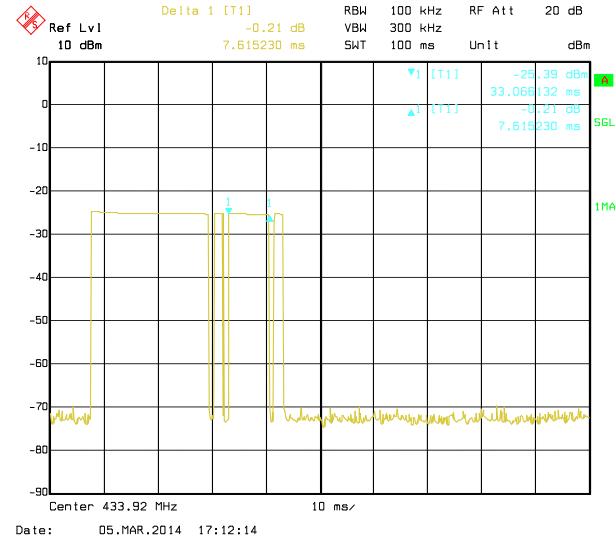

6.2.2 Spurious Emissions

Below 1GHz (30MHz-1000MHz) :

Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	polarization
48.33	31.54	13.35	1.27	28.14	18.02	40.00	-21.98	QP	Horizontal
79.80	32.12	13.12	1.32	28.60	17.96	40.00	-22.04	QP	Horizontal
104.54	28.18	12.73	1.99	29.99	12.91	43.60	-30.69	QP	Horizontal
869.13	45.28	20.78	4.01	30.22	39.85	52.80	-12.95	QP	Horizontal
36.90	33.85	12.82	1.11	26.98	20.80	40.00	-19.20	QP	Vertical
79.80	36.28	8.54	1.65	30.13	16.34	40.00	-23.66	QP	Vertical
133.15	35.79	8.67	2.32	29.48	17.30	43.60	-26.30	QP	Vertical
869.13	47.03	20.78	4.01	30.22	41.60	52.80	-11.20	QP	Vertical

Above 1GHz:

Peak value:

Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1301.76	58.05	25.01	4.42	40.98	46.50	72.80	-26.3	Horizontal
3303.91	64.50	28.59	6.00	40.55	58.54	72.80	-14.26	Horizontal
3472.12	53.87	28.76	6.33	39.34	49.62	72.80	-23.18	Horizontal
2168.08	66.47	27.66	5.19	40.28	59.04	72.80	-13.76	Vertical
2604.19	68.16	27.80	6.12	40.18	61.90	72.80	-10.9	Vertical
3033.91	63.54	28.59	6.00	40.55	57.58	72.80	-15.22	Vertical

Average value:

Frequency (MHz)	Level (dBuV/m)	Duty cycle factor	Average value (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1301.76	46.50	-9.72	36.78	52.80	-16.02	Horizontal
3303.91	58.54	-9.72	48.82	52.80	-3.98	Horizontal
3472.12	49.62	-9.72	39.90	52.80	-12.9	Horizontal
2168.08	59.04	-9.72	49.32	52.80	-3.48	Vertical
2604.19	61.90	-9.72	52.18	52.80	-0.62	Vertical
3033.91	57.58	-9.72	47.86	52.80	-4.94	Vertical


Remark:

Average Limit = Peak Limit-20dB

Average value=Peak value + Duty cycle factor

Duty cycle factor=20 log (Duty cycle)

6.3 Bandwidth of Emission

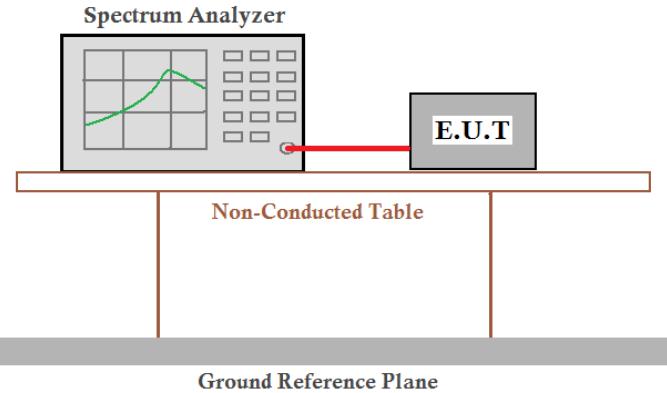
Test Requirement:	FCC Part15 C Section 15.231 (c)
Test Method:	ANSI C63.4:2003
Receiver setup:	RBW=1kHz, VBW=3kHz, detector: Peak
Limit:	The bandwidth of the emission shall be no wider than 0.25% of the centre frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the centre frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.
Test Procedure:	<ol style="list-style-type: none"> 1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. 2. Set the EUT to proper test channel. 3. Max hold the radiated emissions, mark the peak power frequency point and the -20dB upper and lower frequency points. 4. Read 20dB bandwidth.
Test setup:	
Test mode:	Refer to section 5.3 for details
Test Instruments:	Refer to section 5.7 for details
Test results:	Passed

Measurement Data


20dB bandwidth (MHz)	Limit (MHz)	Results
0.12	1.0848	Passed

Note: Limit= Fundamental frequency×0.25%=433.92×0.25%=1.0848MHz

Test plot as follows:

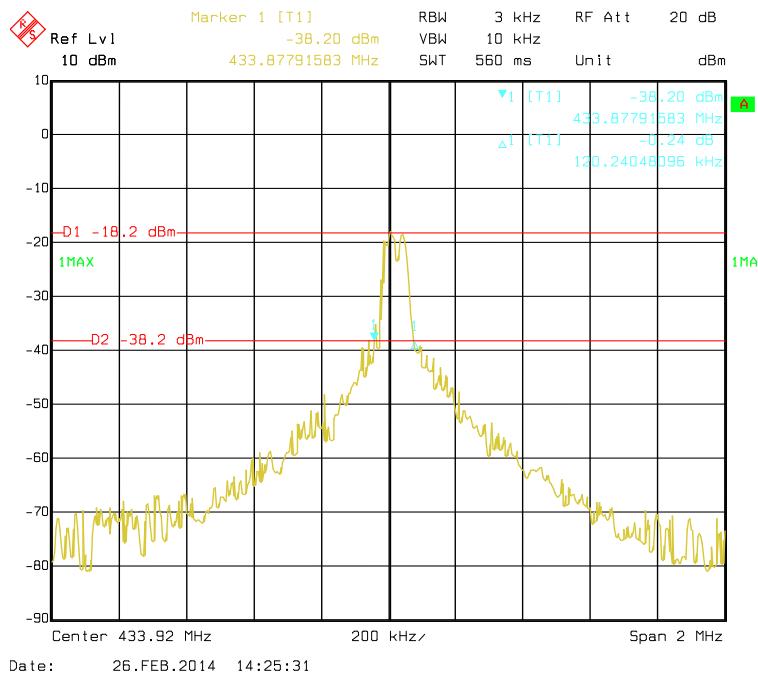


6.4 Duration and Silent time:

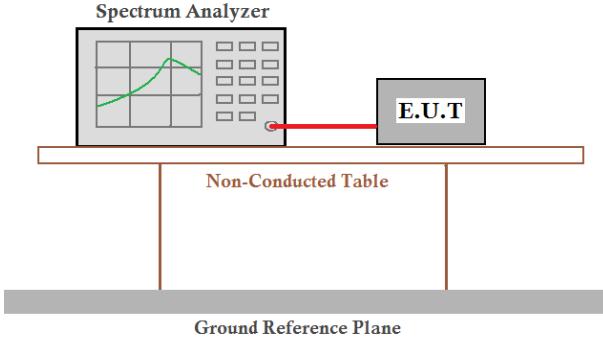
Test Requirement:	FCC Part15 C Section 15.231 (e)
Test Method:	ANSI C63.4:2003
Receiver setup:	RBW=100kHz, VBW=300kHz, span=0Hz, detector: Peak
Limit:	Duration of each transmission \leq 1 second, and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10seconds.
Test mode:	Transmitting mode
Test Procedure:	<ol style="list-style-type: none"> According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. Set the EUT to proper test channel. Single scan the transmit, and read the transmission time.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is positioned at the top left, displaying a green waveform on its screen. A red line extends from the analyzer's output port to a grey rectangular box labeled "E.U.T". This entire assembly rests on a light-colored rectangular platform labeled "Non-Conducted Table". Below the table is a thick grey horizontal bar labeled "Ground Reference Plane".</p>
Test Instruments:	Refer to section 5.7 for details
Test results:	Passed

Measurement Data

Items	Test Data	Limit (second)	Result
Duration time	0.03266 s(see page10 Ton time)	<1.0	Pass
Silent Time	240 s(see plot as below)	30* Duration time(No less than 10 s)	Pass
Remark:	The manufacturer declared that the silent time is 4 minutes in normal working condition.		

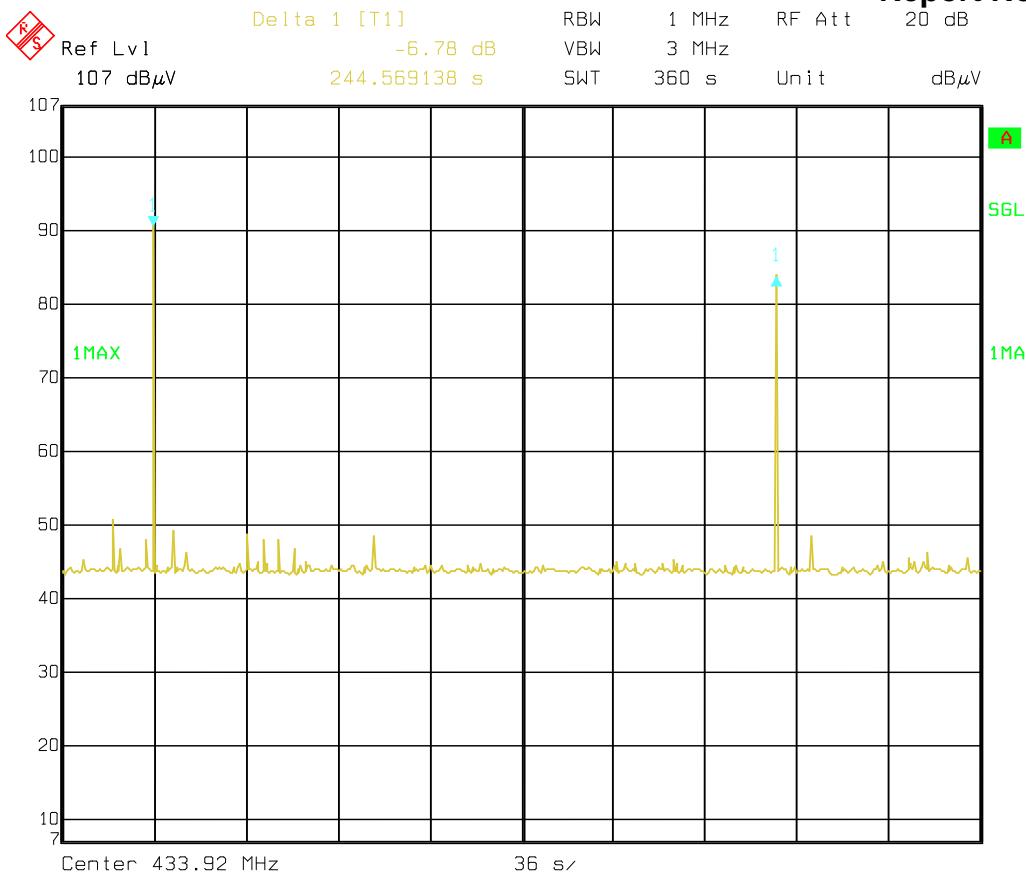


Date: 13.MAR.2014 15:30:26

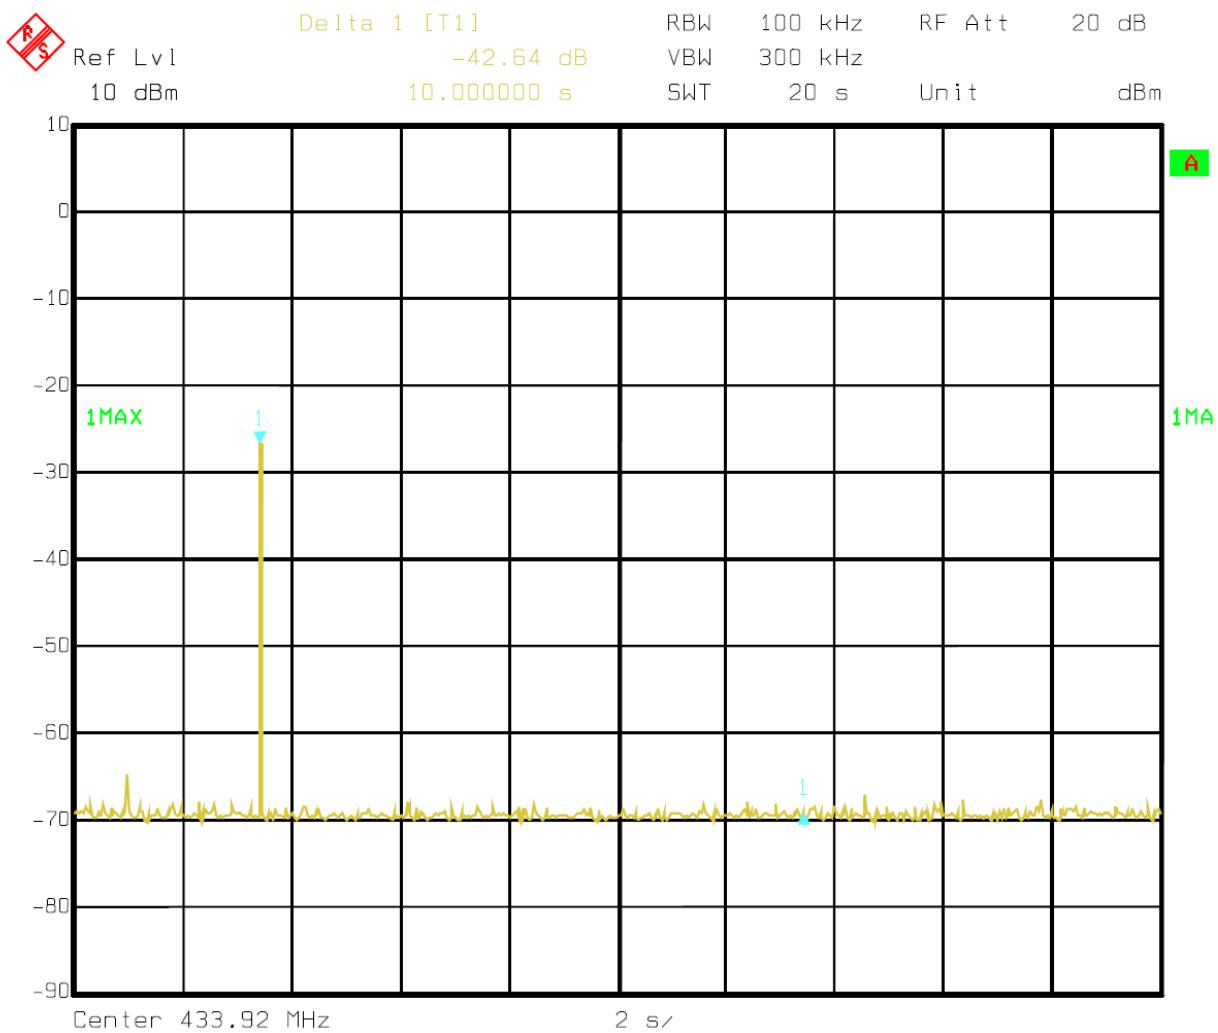


Date: 17.MAR.2014 15:43:53

7 Photographs-test setup photo

Radiated Emission(below 1G)

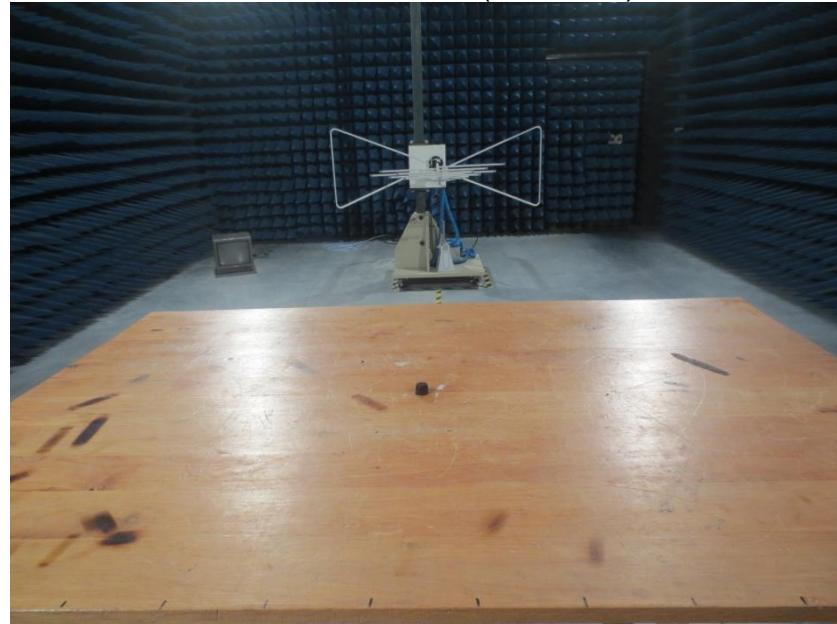


Radiated Emission(above 1G)

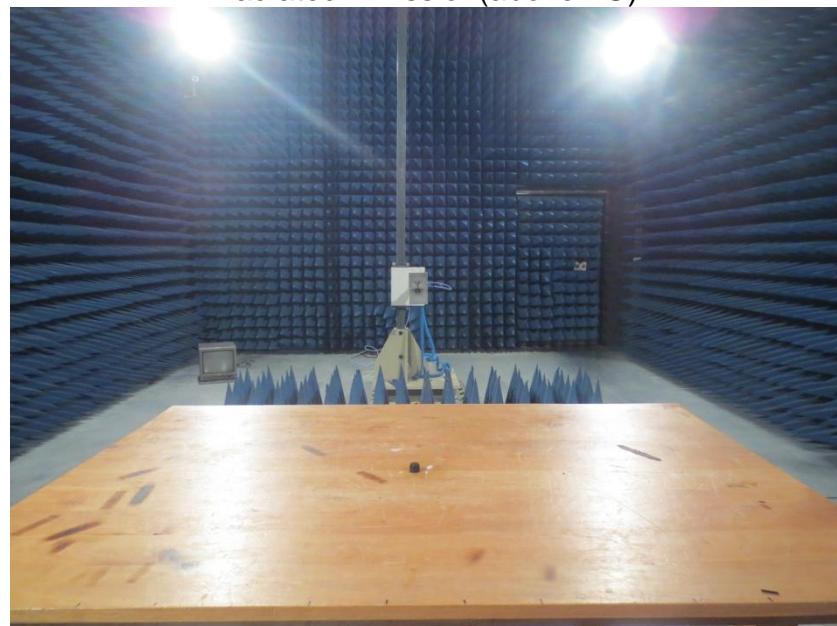


8 Photographs - EUT Constructional Details



TX external photo






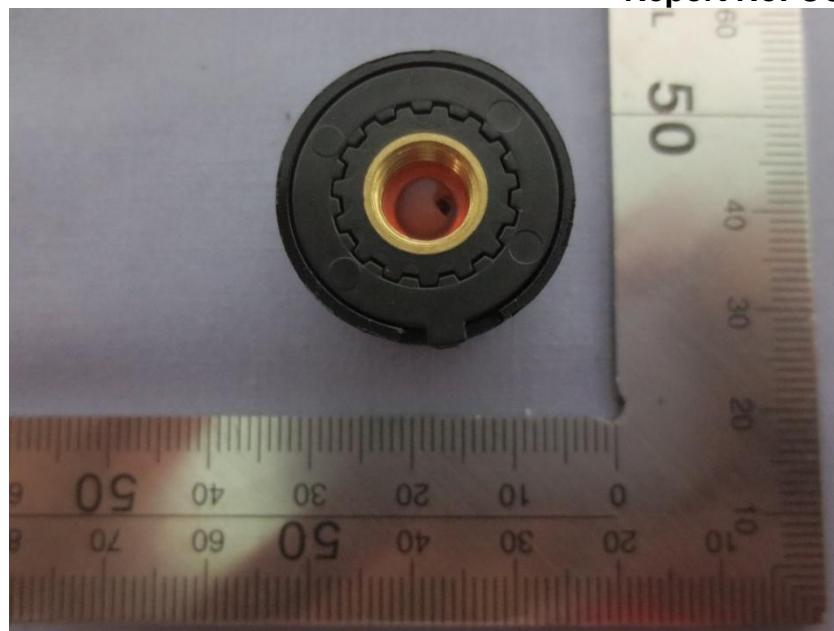



TX internal photo

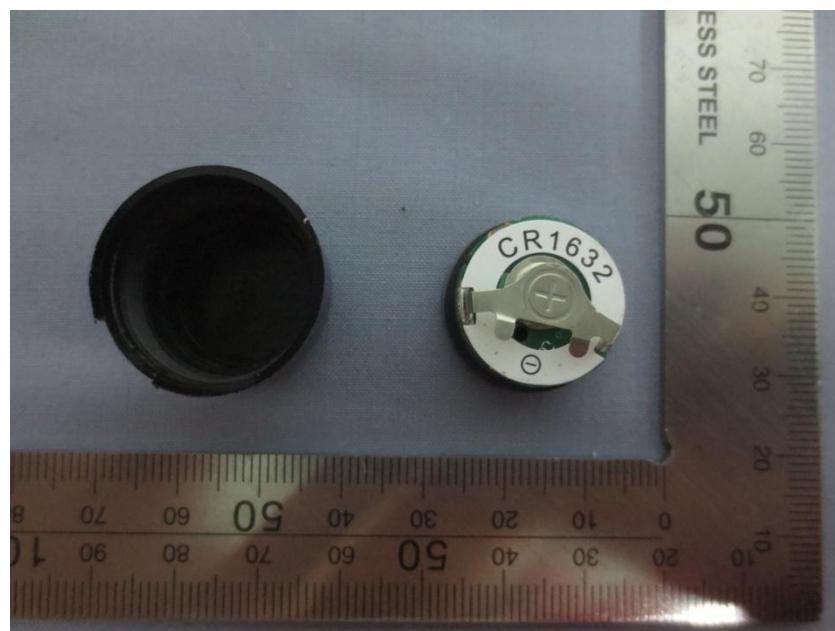

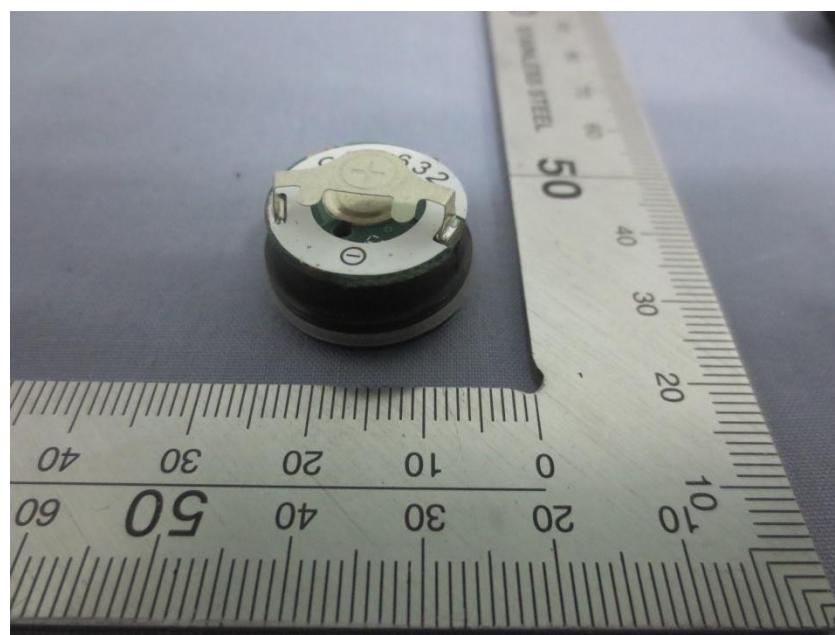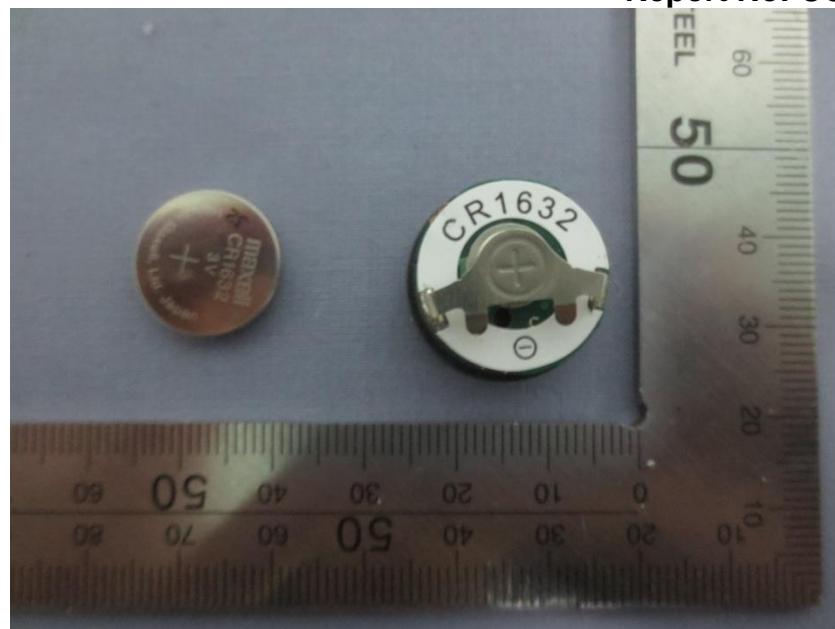

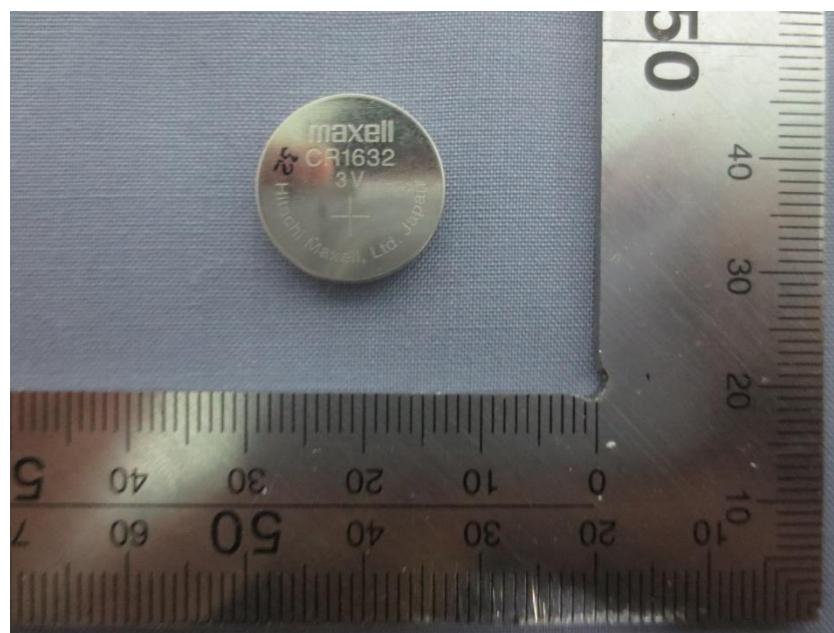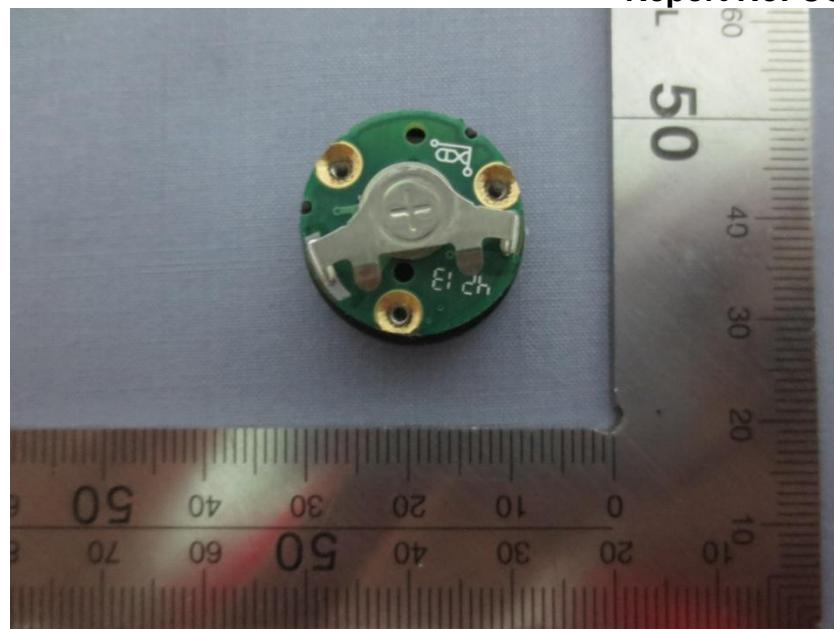

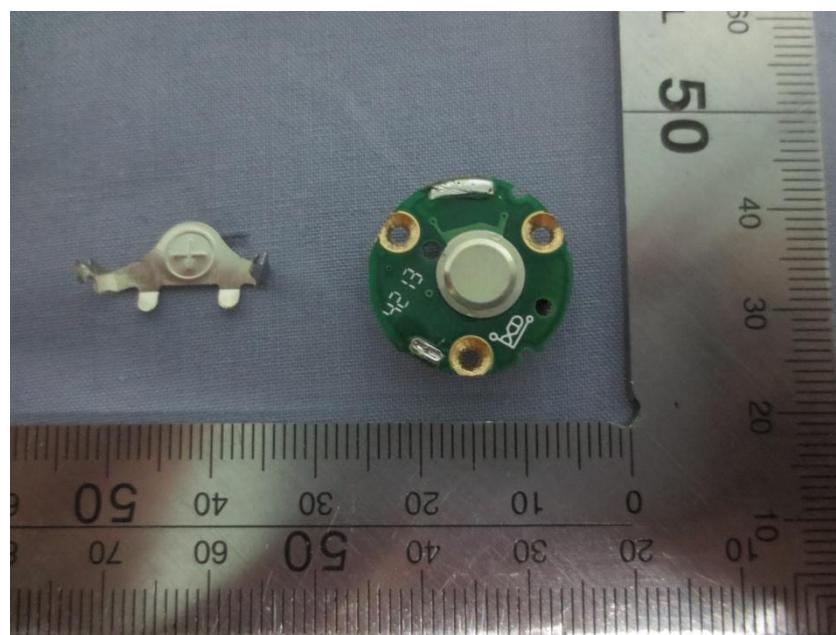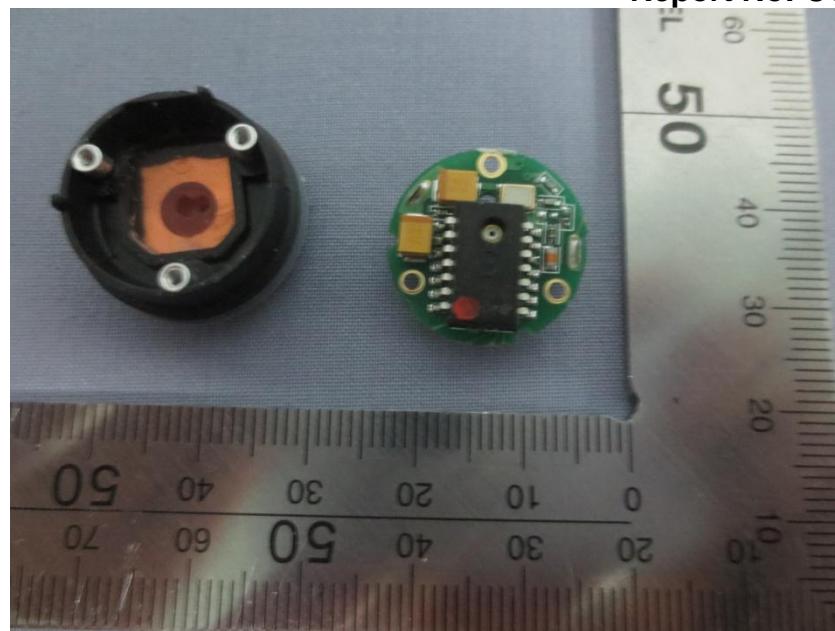

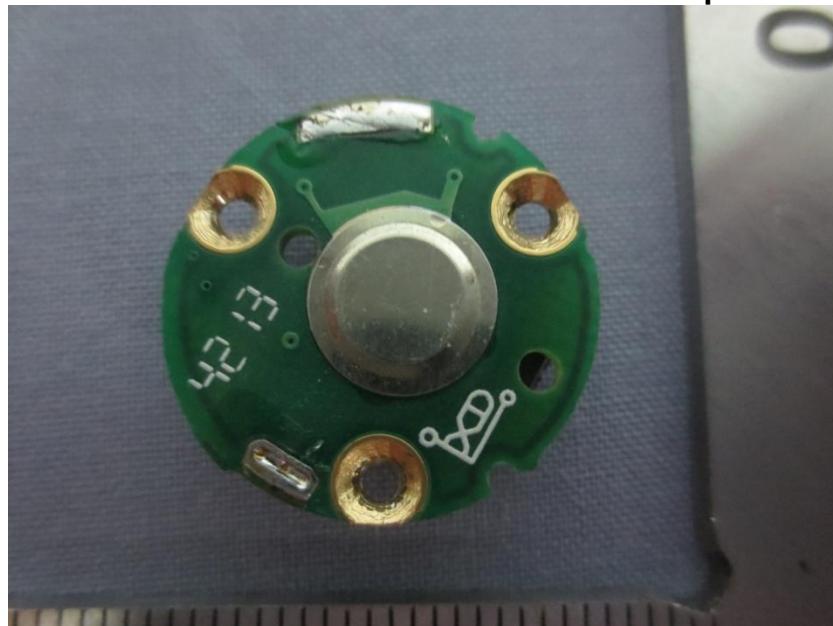

-----End of Report-----