




RADIO TEST REPORT


Test Report No. : 12661899H-A-R1

Applicant : OMRON HEALTHCARE Co., Ltd.
Type of Equipment : Blood Pressure Monitor
Model No. : HEM-7340T
FCC ID : Q6ZHEM7340T
Test regulation : FCC Part 15 Subpart C: 2018
Test Result : Complied (Refer to SECTION 3.2)

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
6. The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
7. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
8. The information provided from the customer for this report is identified in SECTION 1.
9. This report is a revised version of 12661899H-A. 12661899H-A is replaced with this report.

Date of test: January 15 to 19, 2019

Representative test engineer: 
Takafumi Noguchi
Engineer
Consumer Technology Division

Approved by: 
Takayuki Shimada
Leader
Consumer Technology Division



This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
http://japan.ul.com/resources/emc_accredited/

- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
 There is no testing item of "Non-accreditation".

UL Japan, Inc.
Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8999
Facsimile : +81 596 24 8124

CONTENTS	PAGE
SECTION 1: Customer information.....	4
SECTION 2: Equipment under test (E.U.T.).....	4
SECTION 3: Test specification, procedures & results.....	5
SECTION 4: Operation of E.U.T. during testing.....	8
SECTION 5: Conducted Emission.....	10
SECTION 6: Radiated Spurious Emission	11
SECTION 7: Antenna Terminal Conducted Tests.....	13
APPENDIX 1: Test data	14
Conducted Emission	14
6 dB Bandwidth and 99 % Occupied Bandwidth.....	16
Maximum Peak Output Power	19
Average Output Power	20
Radiated Spurious Emission	22
Conducted Spurious Emission	28
Power Density	31
APPENDIX 2: Test instruments	33
APPENDIX 3: Photographs of test setup	35
Conducted Emission	35
Radiated Spurious Emission	36
Worst Case Position	37

SECTION 1: Customer information

Company Name : OMRON HEALTHCARE Co., Ltd.
Address : 53, Kunotsubo, Terado-cho, Muko, KYOTO, 617-0002 Japan
Telephone Number : +81-75-925-2045
Facsimile Number : +81-75-925-2046
Contact Person : Yoshinori Tsurumi

The information provided from the customer is as follows;

- Applicant, Type of Equipment, Model No. on the cover and other relevant pages
- SECTION 1: Customer information
- SECTION 2: Equipment under test (E.U.T.)
- SECTION 4: Operation of E.U.T. during testing

* The laboratory is exempted from liability of any test results affected from the information in SECTION 2 and 4.

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Blood Pressure Monitor
Model No. : HEM-7340T
Serial No. : Refer to Section 4, Clause 4.2
Rating : AC 120 V / 60 Hz
Receipt Date of Sample : January 15, 2019
(Information from test lab.)
Country of Mass-production : Japan, China, and Vietnam
Condition of EUT : Engineering prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No Modification by the test lab

2.2 Product Description

Model: HEM-7340T (referred to as the EUT in this report) is a Blood Pressure Monitor.

Radio Specification

Radio Type : Transceiver
Frequency of Operation : 2402 MHz - 2480 MHz
Modulation : GFSK
Antenna type : Chip Antenna
Antenna Gain : 5.05 dBi (max)
Clock frequency (Maximum) : 26 MHz

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
FCC Part 15 final revised on March 12, 2018 and effective April 11, 2018

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928MHz,
2400-2483.5MHz, and 5725-5850MHz

3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods	FCC: Section 15.207	QP 26.1 dB, 0.40420 MHz, L AV 30.6 dB, 0.40420 MHz, L	Complied a)	-
	IC: RSS-Gen 8.8	IC: RSS-Gen 8.8			
6dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05	FCC: Section 15.247(a)(2)	See data.	Complied b)	Conducted
	IC: -	IC: RSS-247 5.2(a)			
Maximum Peak Output Power	FCC: KDB 558074 D01 15.247 Meas Guidance v05	FCC: Section 15.247(b)(3)		Complied c)	Conducted
	IC: RSS-Gen 6.12	IC: RSS-247 5.4(d)			
Power Density	FCC: KDB 558074 D01 15.247 Meas Guidance v05	FCC: Section 15.247(e)		Complied d)	Conducted
	IC: -	IC: RSS-247 5.2(b)			
Spurious Emission Restricted Band Edges	FCC: KDB 558074 D01 15.247 Meas Guidance v05	FCC: Section15.247(d)	0.6 dB 4880.00 MHz, AV, Vertical	Complied# e), f)	Conducted (below 30 MHz)/ Radiated (above 30 MHz) *1)
	IC: RSS-Gen 6.13	IC: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10			

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

*1) Radiated test was selected over 30 MHz based on section 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05 8.5 and 8.6.

- a) Refer to APPENDIX 1 (data of Conducted Emission)
b) Refer to APPENDIX 1 (data of 6 dB Bandwidth and 99 % Occupied Bandwidth)
c) Refer to APPENDIX 1 (data of Maximum Peak Output Power)
d) Refer to APPENDIX 1 (data of Power Density)
e) Refer to APPENDIX 1 (data of Conducted Spurious Emission)
f) Refer to APPENDIX 1 (data of Radiated Spurious Emission)

Symbols:

Complied The data of this test item has enough margin, more than the measurement uncertainty.

Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

FCC Part 15.31 (e)

This EUT provides stable voltage constantly to RF Module regardless of input voltage. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% Occupied Bandwidth	RSS-Gen 6.7	IC: -	N/A	Complied a)	Conducted

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

a) Refer to APPENDIX 1 (data of 6 dB Bandwidth and 99 % Occupied Bandwidth)

Symbols:
Complied The data of this test item has enough margin, more than the measurement uncertainty.
Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

EMI

There is no applicable rule of uncertainty in this applied standard. Therefore, the following results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.
Ise EMC Lab.

Antenna Terminal test

Test Item	Uncertainty (+/-)
6 dB Bandwidth / 99 % Occupied Bandwidth	0.96 %
Maximum Peak Output Power / Average Output Power	1.3 dB
Burst Rate	0.10 %
Power Density	2.7 dB
Conducted Spurious Emission	2.7 dB

Conducted emission

using Item	Frequency range	Uncertainty (+/-)
AMN (LISN)	0.009 MHz to 0.15 MHz	3.8 dB
	0.15 MHz to 30 MHz	3.4 dB

Radiated emission

Measurement distance	Frequency range	Uncertainty (+/-)
3 m	9 kHz to 30 MHz	3.3 dB
10 m		3.2 dB
3 m	30 MHz to 200 MHz (Horizontal) (Vertical)	4.8 dB
		5.0 dB
	200 MHz to 1000 MHz (Horizontal) (Vertical)	5.2 dB 6.3 dB
10 m	30 MHz to 200 MHz (Horizontal) (Vertical)	4.8 dB
		4.9 dB
	200 MHz to 1000 MHz (Horizontal) (Vertical)	5.0 dB 5.0 dB
3 m	1 GHz to 6 GHz	5.0 dB
	6 GHz to 18 GHz	5.3 dB
1 m	10 GHz to 26.5 GHz	5.8 dB
	26.5 GHz to 40 GHz	5.8 dB
10 m	1 GHz to 18 GHz	5.2 dB

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8999
Facsimile : +81 596 24 8124

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124
NVLAP Lab. code: 200572-0 / FCC Test Firm Registration Number: 199967

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	2973C-1	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	2973C-2	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	2973C-3	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	2973C-4	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	-	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.6 shielded room	-	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	-	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	-	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	-	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	-	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	-	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 m x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Mode(s)

Mode	Remarks*
Bluetooth Low Energy (BT LE)	Payload: PRBS9 Uncoded 1M-PHY
<p>*Power of the EUT was set by the software as follows; Power settings: 0dBm Software: Serial Command Explorer2 VER1.00 *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.</p>	

*The details of Operating mode(s)

Test Item	Operating Mode	Tested frequency
Conducted Emission	Tx BT LE	2402 MHz
6dB Bandwidth		2440 MHz
Maximum Peak Output Power		2480 MHz
Power Density		
99% Occupied Bandwidth		
Spurious Emission(Radiated / Conducted)		

UL Japan, Inc.


Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

4.2 Configuration and peripherals

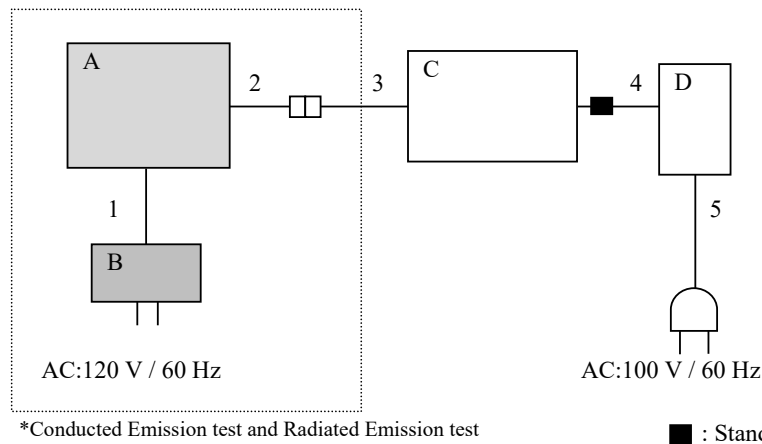

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Blood Pressure Monitor	HEM-7340T	ES1812000080V *1) ES1812000079V *2)	OMRON HEALTHCARE Co., Ltd.	EUT
B	AC Adapter	HEM-ADPTW5	852A	OMRON HEALTHCARE Co., Ltd.	EUT
C	Laptop PC	PC-BL530VH6B	999185918A	NEC	-
D	AC Adapter	ADP-60NH	9903033DD	NEC	-

*1) Used for Antenna Terminal conducted test

*2) Used for Conducted Emission test and Radiated Emission test

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC Cable	1.5	Unshielded	Unshielded	-
2	Signal Cable	0.2	Unshielded	Unshielded	-
3	USB Cable	1.0	Shielded	Shielded	-
4	DC Cable	1.7	Unshielded	Unshielded	-
5	AC Cable	0.8	Unshielded	Unshielded	-

SECTION 5: Conducted Emission

Test Procedure and conditions

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane.

The rear of tabletop was located 40 cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80 cm from a Line Impedance Stabilization Network (LISN) / Artificial mains Network (AMN) and excess AC cable was bundled in center.

For the tests on EUT with other peripherals (as a whole system)

I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30 cm to 40 cm long and were hanged at a 40 cm height to the ground plane. All unused 50ohm connectors of the LISN (AMN) were resistivity terminated in 50 ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber.


The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Detector : QP and CISPR AV
Measurement range : 0.15 MHz - 30 MHz
Test data : APPENDIX
Test result : Pass

Figure 1: Test Setup

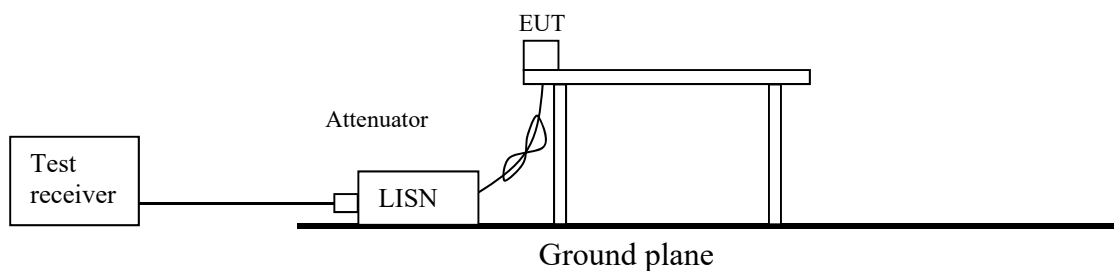

SECTION 6: Radiated Spurious Emission

Test Procedure

It was measured based on "8.5 and 8.6 of KDB 558074 D01 15.247 Meas Guidance v05".

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9(IC) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (IC).

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV *1)	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	<u>11.12.2.5.1</u> RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: 100 traces <u>11.12.2.5.2</u> The duty cycle was less than 98% for detected noise, a duty factor was added to the 11.12.2.5.1 results.	RBW: 100 kHz VBW: 300 kHz

*1) Average Power Measurement was performed based on ANSI C63.10-2013.

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Figure 2: Test Setup


Below 1 GHz

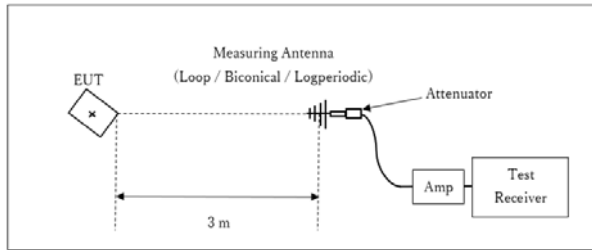

× : Center of turn table

Test Distance: 3 m

1 GHz - 10 GHz

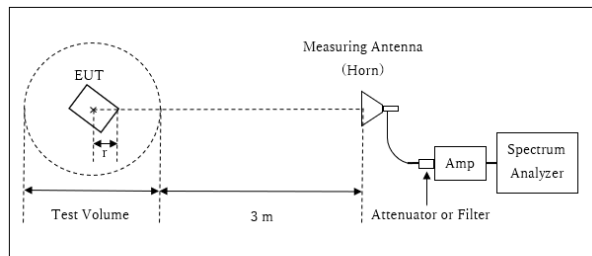

r : Radius of an outer periphery of EUT

× : Center of turn table

Distance Factor: $20 \times \log(3.9 \text{ m} / 3.0 \text{ m}) = 2.28 \text{ dB}$


* Test Distance: $(3 + \text{Test Volume} / 2) - r = 3.9 \text{ m}$

Test Volume : 2.0 m

(Test Volume has been calibrated based on CISPR 16-1-4.)

r = 0.1 m

10 GHz - 26.5 GHz

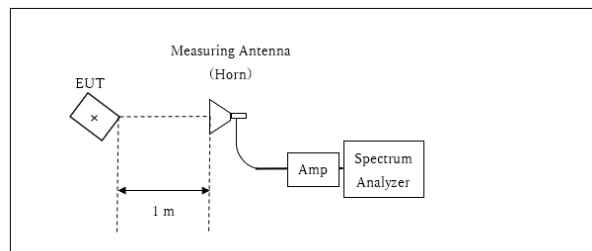

× : Center of turn table

Distance Factor: $20 \times \log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

*Test Distance: 1 m

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 30 MHz - 26.5 GHz

Test data : APPENDIX

Test result : Pass

SECTION 7: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used
6dB Bandwidth	3 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak/Average *2)	-	Power Meter (Sensor: 50 MHz BW)
Peak Power Density	1.5 times the 6dB Bandwidth	3 kHz	10 kHz	Auto	Peak	Max Hold	Spectrum Analyzer *3)
Conducted Spurious Emission *4)	9kHz to 150kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150kHz to 30MHz	9.1 kHz	27 kHz				

*1) Peak hold was applied as Worst-case measurement.

*2) Reference data

*3) Section 11.10.2 Method PKPSD (peak PSD) of "ANSI C63.10-2013".

*4) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart.
(9 kHz - 150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 9.1 kHz)


The test results and limit are rounded off to two decimals place, so some differences might be observed.
The equipment and cables were not used for factor 0 dB of the data sheets.

Test data : APPENDIX
Test result : Pass

APPENDIX 1: Test data

Conducted Emission

Report No. 12661899H
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber
Date January 19, 2019
Temperature / Humidity 21 deg. C / 31 % RH
Engineer Takafumi Noguchi
Mode Tx BT LE 2480 MHz

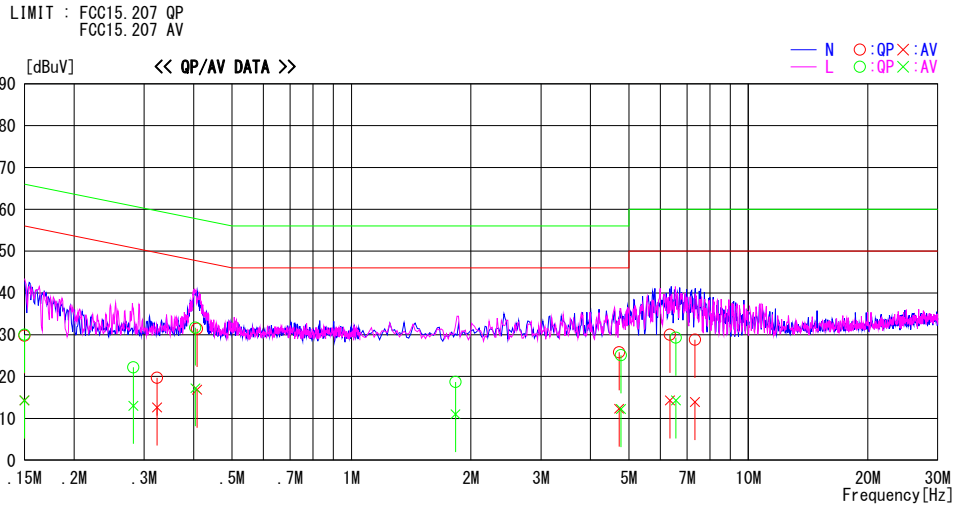


Frequency [MHz]	Reading Level		Corr. Factor [dB]	Results		Limit		Margin		Phase
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]	
0.15000	16.4	0.9	13.4	29.8	14.3	66.0	56.0	36.2	41.7	N
0.32360	6.3	-0.8	13.4	19.7	12.6	59.6	49.6	39.9	37.0	N
0.40821	18.0	3.5	13.4	31.4	16.9	57.7	47.7	26.3	30.8	N
4.72321	11.9	-1.6	13.9	25.8	12.3	56.0	46.0	30.2	33.7	N
6.34205	15.9	0.2	14.1	30.0	14.3	60.0	50.0	30.0	35.7	N
7.33280	14.7	-0.2	14.1	28.8	13.9	60.0	50.0	31.2	36.1	N
0.15000	16.6	0.9	13.4	30.0	14.3	66.0	56.0	36.0	41.7	L
0.28200	8.8	-0.4	13.4	22.2	13.0	60.8	50.8	38.6	37.8	L
0.40420	18.3	3.8	13.4	31.7	17.2	57.8	47.8	26.1	30.6	L
1.82802	5.2	-2.5	13.5	18.7	11.0	56.0	46.0	37.3	35.0	L
4.77320	11.2	-1.7	13.9	25.1	12.2	56.0	46.0	30.9	33.8	L
6.56960	15.2	0.2	14.1	29.3	14.3	60.0	50.0	30.7	35.7	L

CHART: WITH FACTOR Peak hold data. CALCULATION : RESULT = READING + C.F (LISN + CABLE + ATT)
Except for the above table: adequate margin data below the limits.

Conducted Emission

Report No.	12661899H
Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber
Date	January 19, 2019
Temperature / Humidity	21 deg. C / 31 % RH
Engineer	Takafumi Noguchi
Mode	Tx BT LE

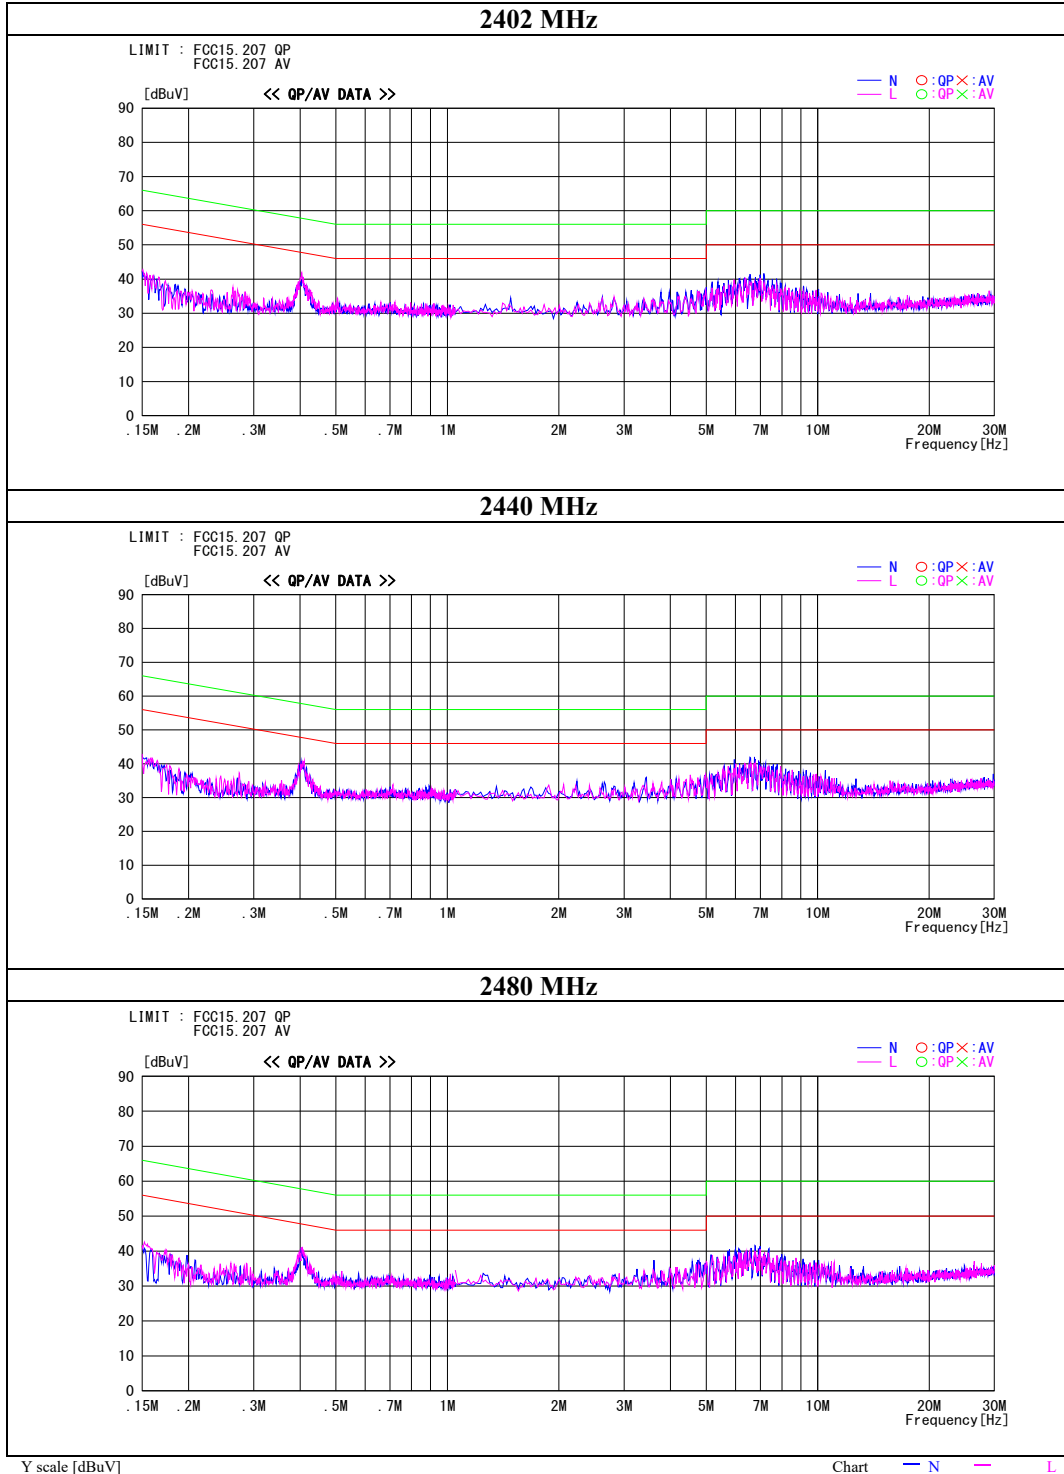

Y scale [dBuV]

Chart — N — L

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

6 dB Bandwidth and 99 % Occupied Bandwidth


Report No. 12661899H
Test place Ise EMC Lab. No.6 Measurement Room
Date January 16, 2019
Temperature / Humidity 23 deg. C / 38 % RH
Engineer Takafumi Noguchi
Mode Tx BT LE

Mode	Frequency [MHz]	99% Occupied Bandwidth [kHz]	6dB Bandwidth [MHz]	Limit for 6dB Bandwidth [MHz]
BT LE	2402	986.441	0.675	> 0.5000
	2440	984.996	0.677	> 0.5000
	2480	986.978	0.674	> 0.5000


99%Occupied Bandwidth

BT LE


2402 MHz

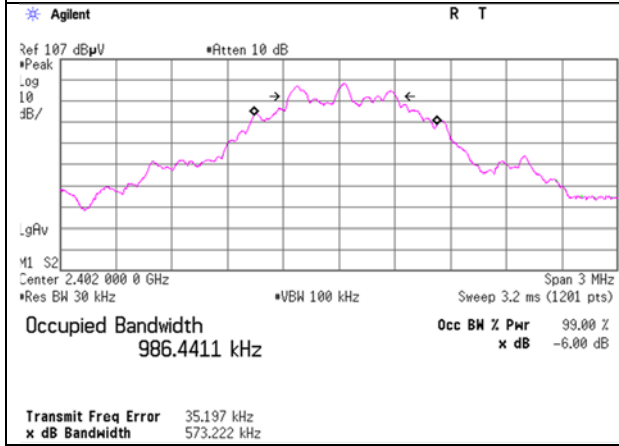

2440 MHz

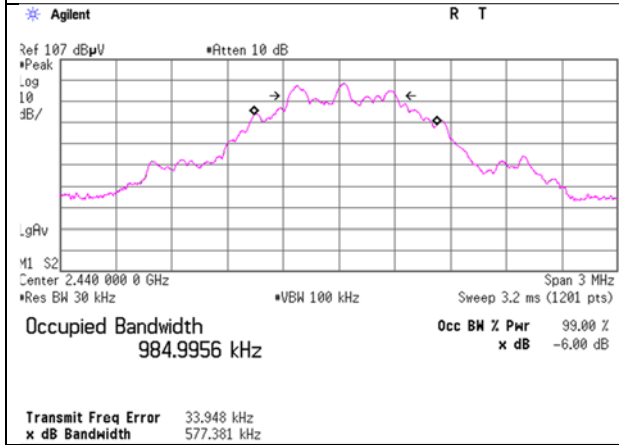

2480 MHz

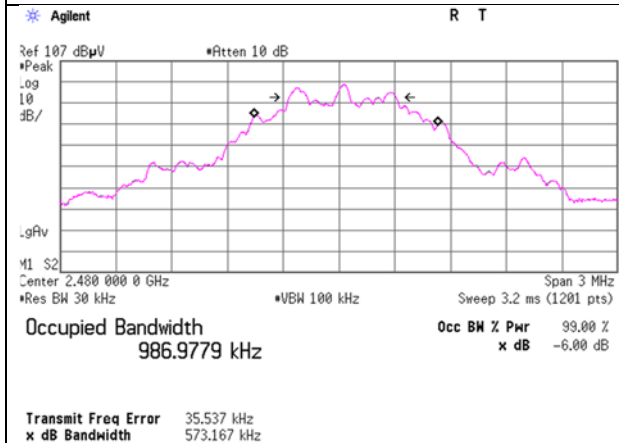

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124


6dB Bandwidth

BT LE


2402 MHz

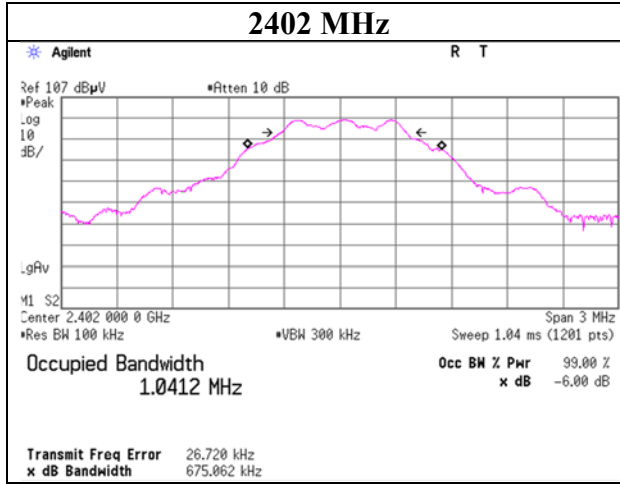

2440 MHz

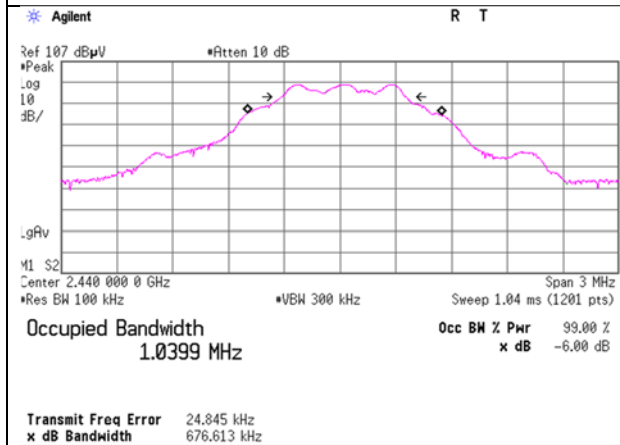

2480 MHz

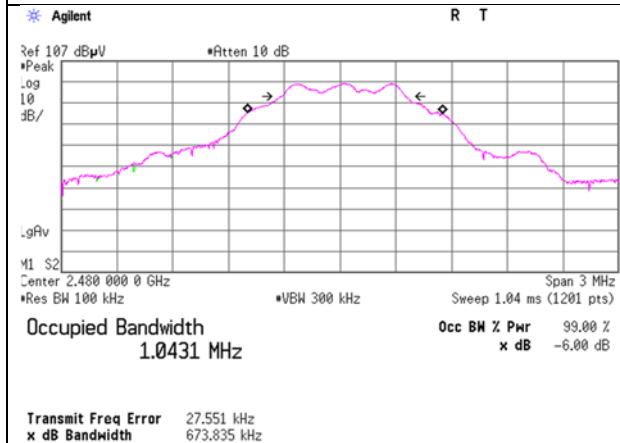

Maximum Peak Output Power

Report No. 12661899H
 Test place Ise EMC Lab. No.6 Measurement Room
 Date January 15, 2019
 Temperature / Humidity 26 deg. C / 35 % RH
 Engineer Ryota Yamanaka
 Mode Tx BT LE

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Conducted Power				Margin [dB]
				Result		Limit		
				[dBm]	[mW]	[dBm]	[mW]	
2402	-10.56	0.10	10.04	-0.42	0.91	30.00	1000	30.42
2440	-10.51	0.10	10.04	-0.37	0.92	30.00	1000	30.37
2480	-10.39	0.10	10.04	-0.25	0.94	30.00	1000	30.25

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss
 e.i.r.p. Result = Conducted Power Result + Antenna Gain

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Average Output Power
(Reference data for RF Exposure)

Report No. 12661899H
Test place Ise EMC Lab. No.6 Measurement Room
Date January 15, 2019
Temperature / Humidity 26 deg. C / 35 % RH
Engineer Ryota Yamanaka
Mode Tx BT LE

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2402	-15.60	0.10	10.04	-5.46	0.28	4.81	-0.65	0.86
2440	-15.34	0.10	10.04	-5.20	0.30	4.81	-0.39	0.91
2480	-15.21	0.10	10.04	-5.07	0.31	4.81	-0.26	0.94


Sample Calculation:

Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

Result (Burst power average) = Time average + Duty factor

Burst rate confirmation

Report No. 12661899H
 Test place Ise EMC Lab. No.6 Measurement Room
 Date January 15, 2019
 Temperature / Humidity 26 deg. C / 35 % RH
 Engineer Ryota Yamanaka
 Mode Tx BT LE

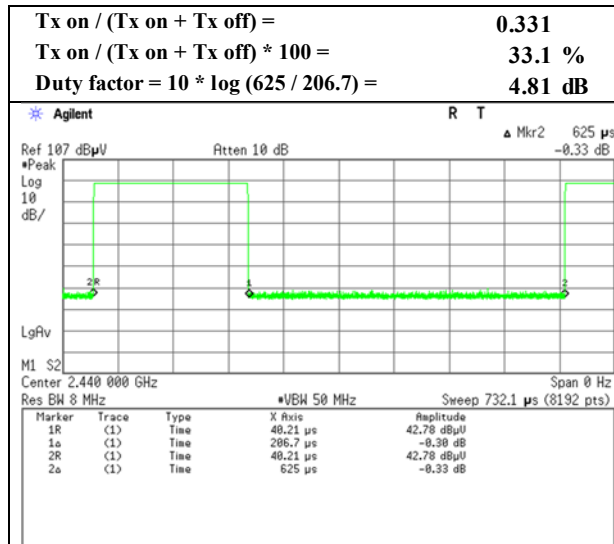

* Since the burst rate is not different between the channels, the data has been obtained on the representative channel.

Radiated Spurious Emission

Report No.	12661899H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.4	No.4	No.3
Date	January 17, 2019	January 17, 2019	January 18, 2019
Temperature / Humidity	18 deg. C / 34 % RH	20 deg. C / 33 % RH	19 deg. C / 35 % RH
Engineer	Takafumi Noguchi	Yuichiro Yamazaki	Takafumi Noguchi
	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)	(30 MHz - 1 GHz)
Mode	Tx BT LE 2402 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	36.840	QP	22.3	16.2	7.3	32.3	-	13.5	40.0	26.5	
Hori	57.828	QP	25.4	8.8	7.6	32.2	-	9.6	40.0	30.4	
Hori	158.350	QP	21.8	15.5	8.8	32.2	-	13.9	43.5	29.6	
Hori	315.431	QP	22.0	14.1	10.2	32.1	-	14.2	46.0	31.8	
Hori	509.420	QP	21.2	17.7	11.5	32.1	-	18.3	46.0	27.7	
Hori	850.030	QP	21.0	21.7	13.5	31.3	-	24.9	46.0	21.1	
Hori	2388.617	PK	45.1	27.6	5.7	31.3	-	47.1	73.9	26.8	
Hori	2390.000	PK	44.2	27.6	5.7	31.3	-	46.2	73.9	27.7	
Hori	4804.000	PK	48.0	31.4	7.0	30.6	-	55.8	73.9	18.1	
Hori	7206.000	PK	42.7	36.2	8.4	31.8	-	55.5	73.9	18.4	Floor noise
Hori	9608.000	PK	41.9	37.9	9.3	32.1	-	57.0	73.9	16.9	Floor noise
Hori	2388.617	AV	33.0	27.6	5.7	31.3	4.8	39.8	53.9	14.1	
Hori	2390.000	AV	32.8	27.6	5.7	31.3	4.8	39.6	53.9	14.3	*1)
Hori	4804.000	AV	38.9	31.4	7.0	30.6	4.8	51.5	53.9	2.4	
Hori	7206.000	AV	33.7	36.2	8.4	31.8	-	46.5	53.9	7.4	Floor noise
Hori	9608.000	AV	32.4	37.9	9.3	32.1	-	47.5	53.9	6.4	Floor noise
Vert	45.180	QP	28.1	13.0	7.4	32.2	-	16.3	40.0	23.7	
Vert	57.503	QP	40.5	8.9	7.6	32.2	-	24.8	40.0	15.2	
Vert	146.234	QP	21.5	14.7	8.7	32.2	-	12.7	43.5	30.8	
Vert	309.018	QP	21.4	13.9	10.1	32.1	-	13.3	46.0	32.7	
Vert	474.618	QP	21.2	17.1	11.3	32.1	-	17.5	46.0	28.5	
Vert	861.683	QP	21.2	21.8	13.5	31.2	-	25.3	46.0	20.7	
Vert	2388.617	PK	46.7	27.6	5.7	31.3	-	48.7	73.9	25.2	
Vert	2390.000	PK	43.8	27.6	5.7	31.3	-	45.8	73.9	28.1	
Vert	4804.000	PK	47.6	31.4	7.0	30.6	-	55.4	73.9	18.5	
Vert	7206.000	PK	42.7	36.2	8.4	31.8	-	55.5	73.9	18.4	Floor noise
Vert	9608.000	PK	41.8	37.9	9.3	32.1	-	56.9	73.9	17.0	Floor noise
Vert	2388.617	AV	33.2	27.6	5.7	31.3	4.8	40.0	53.9	13.9	
Vert	2390.000	AV	32.8	27.6	5.7	31.3	4.8	39.6	53.9	14.3	*1)
Vert	4804.000	AV	38.8	31.4	7.0	30.6	4.8	51.4	53.9	2.5	
Vert	7206.000	AV	33.3	36.2	8.4	31.8	-	46.1	53.9	7.8	Floor noise
Vert	9608.000	AV	32.0	37.9	9.3	32.1	-	47.1	53.9	6.8	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log(3.9 m / 3.0 m) = 2.28 dB

10 GHz - 26.5 GHz 20log(1.0 m / 3.0 m) = -9.5 dB

*1) Not Out of Band emission(Leakage Power)

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2402.000	PK	86.8	27.6	5.7	31.3	88.8	-	-	Carrier
Hori	2400.000	PK	59.7	27.6	5.7	31.3	61.7	68.8	7.1	
Vert	2402.000	PK	86.0	27.6	5.7	31.3	88.0	-	-	Carrier
Vert	2400.000	PK	54.4	27.6	5.7	31.3	56.4	68.0	11.6	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Distance factor: 1 GHz - 10 GHz 20log(3.9 m / 3.0 m) = 2.28 dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission (Reference Plot for band-edge)

Report No.	12661899H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	January 17, 2019
Temperature / Humidity	18 deg. C / 34 % RH
Engineer	Takafumi Noguchi
	(1 GHz - 10 GHz)
Mode	Tx BT LE 2402 MHz

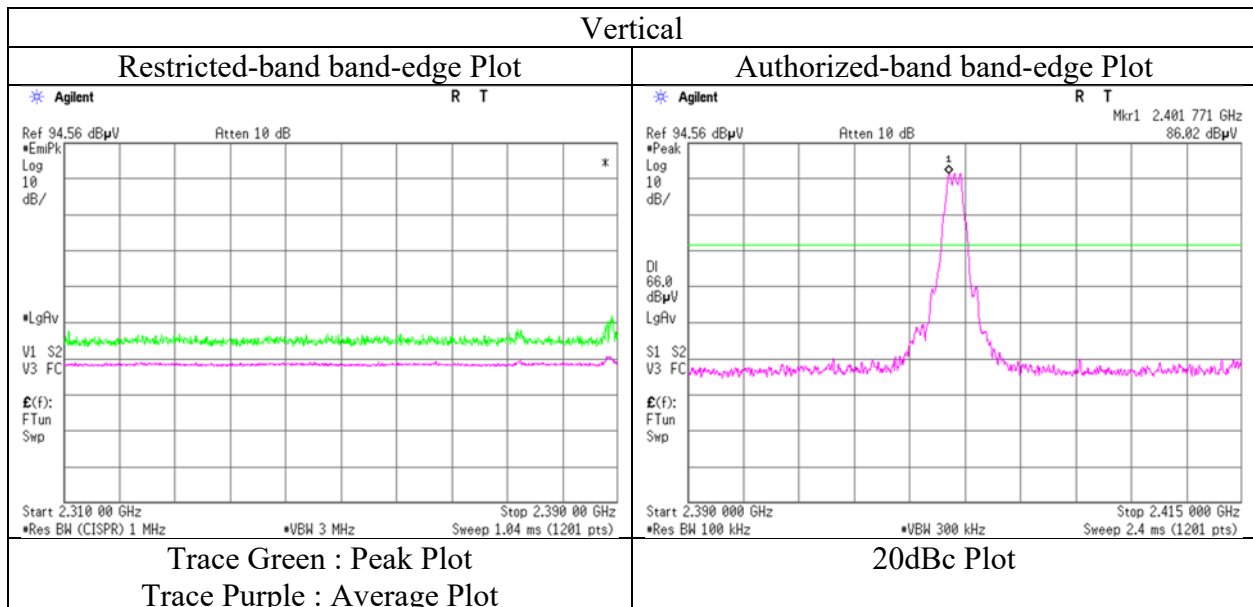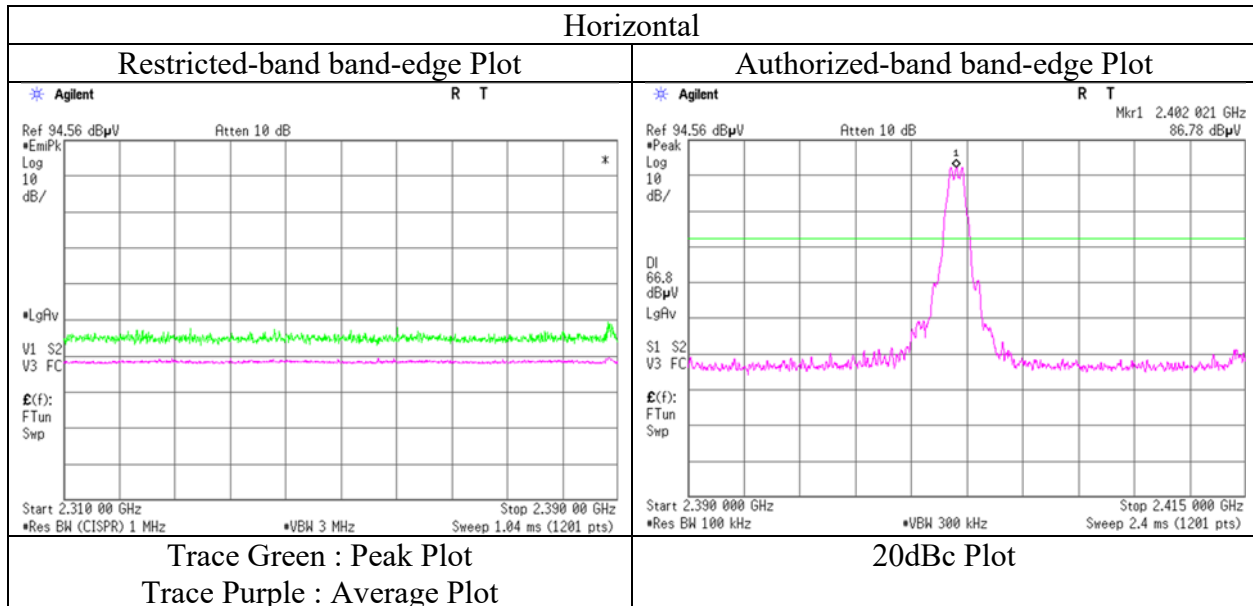

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	12661899H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.4	No.4	No.3
Date	January 17, 2019	January 17, 2019	January 18, 2019
Temperature / Humidity	18 deg. C / 34 % RH	20 deg. C / 33 % RH	19 deg. C / 35 % RH
Engineer	Takafumi Noguchi	Yuichiro Yamazaki	Takafumi Noguchi
	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)	(30 MHz - 1 GHz)
Mode	Tx BT LE 2440 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	38.332	QP	22.3	15.6	7.3	32.3	-	12.9	40.0	27.1	
Hori	57.932	QP	25.5	8.8	7.6	32.2	-	9.7	40.0	30.3	
Hori	173.756	QP	21.3	16.1	9.0	32.1	-	14.3	43.5	29.2	
Hori	303.659	QP	22.2	13.8	10.1	32.1	-	14.0	46.0	32.0	
Hori	472.040	QP	21.1	17.1	11.2	32.1	-	17.3	46.0	28.7	
Hori	822.702	QP	21.0	21.1	13.3	31.4	-	24.0	46.0	22.0	
Hori	4880.000	PK	49.5	31.5	7.1	30.6	-	57.5	73.9	16.4	
Hori	7320.000	PK	41.9	36.3	8.4	31.9	-	54.7	73.9	19.2	Floor noise
Hori	9760.000	PK	41.3	38.3	9.3	32.1	-	56.8	73.9	17.1	Floor noise
Hori	4880.000	AV	40.3	31.5	7.1	30.6	4.8	53.1	53.9	0.8	
Hori	7320.000	AV	32.1	36.3	8.4	31.9	-	44.9	53.9	9.0	Floor noise
Hori	9760.000	AV	31.6	38.3	9.3	32.1	-	47.1	53.9	6.8	Floor noise
Vert	45.180	QP	27.9	13.0	7.4	32.2	-	16.1	40.0	23.9	
Vert	57.537	QP	40.7	8.9	7.6	32.2	-	25.0	40.0	15.0	
Vert	157.960	QP	21.4	15.5	8.8	32.2	-	13.5	43.5	30.0	
Vert	275.303	QP	21.6	13.1	9.9	32.1	-	12.5	46.0	33.5	
Vert	447.018	QP	21.3	16.8	11.1	32.1	-	17.1	46.0	28.9	
Vert	847.718	QP	21.2	21.6	13.5	31.3	-	25.0	46.0	21.0	
Vert	4880.000	PK	50.6	31.5	7.1	30.6	-	58.6	73.9	15.3	
Vert	7320.000	PK	42.5	36.3	8.4	31.9	-	55.3	73.9	18.6	Floor noise
Vert	9760.000	PK	42.3	38.3	9.3	32.1	-	57.8	73.9	16.1	Floor noise
Vert	4880.000	AV	40.5	31.5	7.1	30.6	4.8	53.3	53.9	0.6	
Vert	7320.000	AV	33.7	36.3	8.4	31.9	-	46.5	53.9	7.4	Floor noise
Vert	9760.000	AV	31.7	38.3	9.3	32.1	-	47.2	53.9	6.7	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.9 m / 3.0 m) = 2.28 dB
 10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Report No.	12661899H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.4	No.4	No.3
Date	January 17, 2019	January 17, 2019	January 18, 2019
Temperature / Humidity	18 deg. C / 34 % RH	20 deg. C / 33 % RH	19 deg. C / 35 % RH
Engineer	Takafumi Noguchi	Yuichiro Yamazaki	Takafumi Noguchi
	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)	(30 MHz - 1 GHz)
Mode	Tx BT LE 2480 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	38.228	QP	21.7	15.7	7.3	32.3	-	12.4	40.0	27.6	
Hori	57.047	QP	25.6	9.0	7.6	32.2	-	10.0	40.0	30.0	
Hori	164.098	QP	21.1	15.8	8.9	32.2	-	13.6	43.5	29.9	
Hori	294.628	QP	22.2	13.6	10.0	32.1	-	13.7	46.0	32.3	
Hori	472.040	QP	21.0	17.1	11.2	32.1	-	17.2	46.0	28.8	
Hori	829.450	QP	21.1	21.2	13.4	31.4	-	24.3	46.0	21.7	
Hori	2483.500	PK	44.0	27.5	5.7	31.3	-	45.9	73.9	28.0	
Hori	2492.900	PK	49.2	27.6	5.7	31.3	-	51.2	73.9	22.7	
Hori	4960.000	PK	44.8	31.7	7.1	30.6	-	53.0	73.9	20.9	
Hori	7440.000	PK	41.5	36.4	8.4	31.9	-	54.4	73.9	19.5	Floor noise
Hori	9920.000	PK	40.5	38.4	9.4	32.2	-	56.1	73.9	17.8	Floor noise
Hori	2483.500	AV	32.2	27.5	5.7	31.3	4.8	38.9	53.9	15.0	*1)
Hori	2492.900	AV	34.9	27.6	5.7	31.3	4.8	41.7	53.9	12.2	
Hori	4960.000	AV	35.4	31.7	7.1	30.6	4.8	48.4	53.9	5.5	
Hori	7440.000	AV	32.2	36.4	8.4	31.9	-	45.1	53.9	8.8	Floor noise
Hori	9920.000	AV	31.3	38.4	9.4	32.2	-	46.9	53.9	7.0	Floor noise
Vert	42.743	QP	28.9	13.9	7.4	32.2	-	18.0	40.0	22.0	
Vert	57.544	QP	39.6	8.9	7.6	32.2	-	23.9	40.0	16.1	
Vert	162.763	QP	21.2	15.7	8.9	32.2	-	13.6	43.5	29.9	
Vert	280.602	QP	21.5	13.3	9.9	32.1	-	12.6	46.0	33.4	
Vert	453.143	QP	21.2	16.9	11.1	32.1	-	17.1	46.0	28.9	
Vert	859.340	QP	21.2	21.8	13.5	31.3	-	25.2	46.0	20.8	
Vert	2483.500	PK	43.2	27.5	5.7	31.3	-	45.1	73.9	28.8	
Vert	2492.900	PK	48.1	27.6	5.7	31.3	-	50.1	73.9	23.8	
Vert	4960.000	PK	48.0	31.7	7.1	30.6	-	56.2	73.9	17.7	
Vert	7440.000	PK	41.6	36.4	8.4	31.9	-	54.5	73.9	19.4	Floor noise
Vert	9920.000	PK	40.9	38.4	9.4	32.2	-	56.5	73.9	17.4	Floor noise
Vert	2483.500	AV	31.2	27.5	5.7	31.3	4.8	37.9	53.9	16.0	*1)
Vert	2492.900	AV	32.9	27.6	5.7	31.3	4.8	39.7	53.9	14.2	
Vert	4960.000	AV	38.0	31.7	7.1	30.6	4.8	51.0	53.9	2.9	
Vert	7440.000	AV	32.0	36.4	8.4	31.9	-	44.9	53.9	9.0	Floor noise
Vert	9920.000	AV	31.7	38.4	9.4	32.2	-	47.3	53.9	6.6	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.9 m / 3.0 m) = 2.28 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

*1) Not Out of Band emission(Leakage Power)

Radiated Spurious Emission
(Reference Plot for band-edge)



Report No. 12661899H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.4
Date January 17, 2019
Temperature / Humidity 18 deg. C / 34 % RH
Engineer Takafumi Noguchi
(1 GHz - 10 GHz)
Mode Tx BT LE 2480 MHz

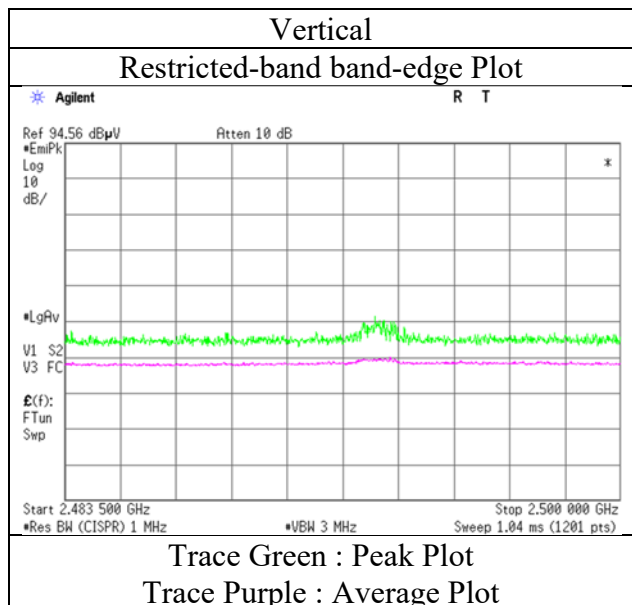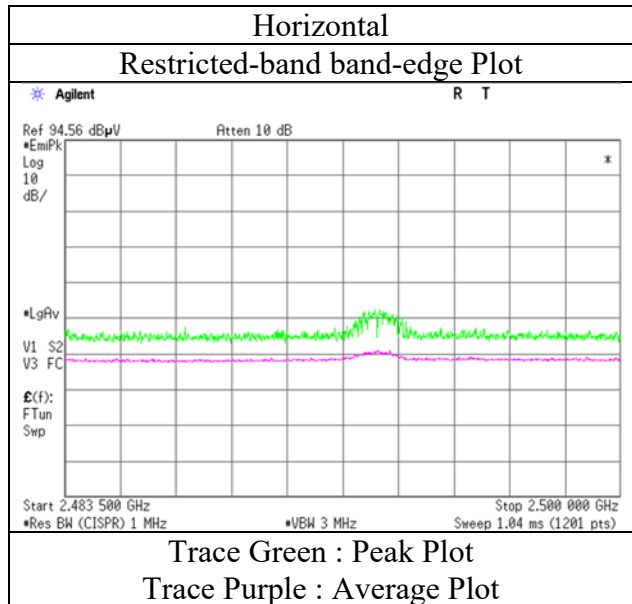

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission
(Plot data, Worst case)


Report No.	12661899H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.4	No.4	No.3
Date	January 17, 2019	January 17, 2019	January 18, 2019
Temperature / Humidity	18 deg. C / 34 % RH	20 deg. C / 33 % RH	19 deg. C / 35 % RH
Engineer	Takafumi Noguchi	Yuichiro Yamazaki	Takafumi Noguchi
	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)	(30 MHz - 1 GHz)
Mode	Tx BT LE 2480 MHz		

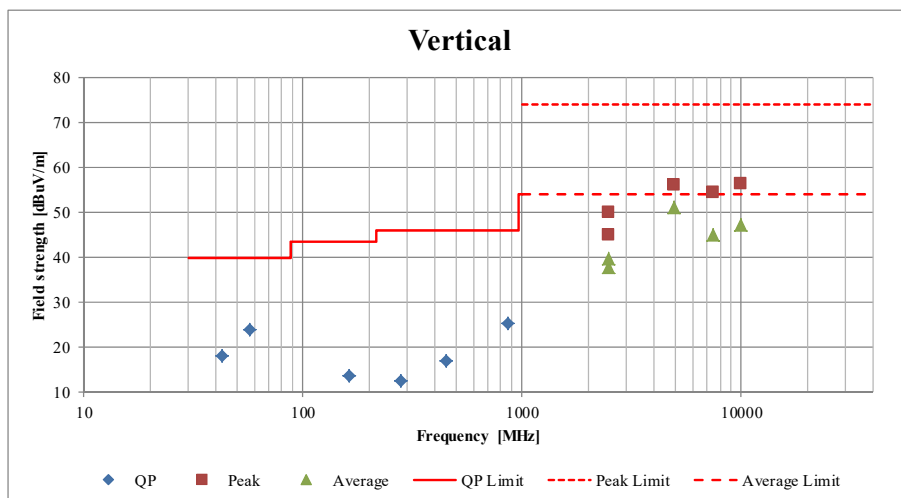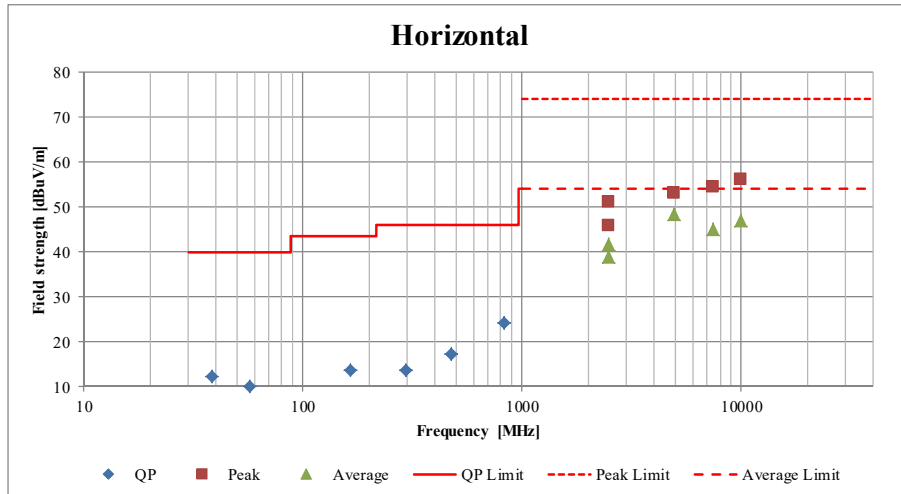

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Conducted Spurious Emission

Report No. 12661899H
 Test place Ise EMC Lab. No.6 Measurement Room
 Date January 16, 2019
 Temperature / Humidity 23 deg. C / 38 % RH
 Engineer Takafumi Noguchi
 Mode Tx BT LE 2402 MHz

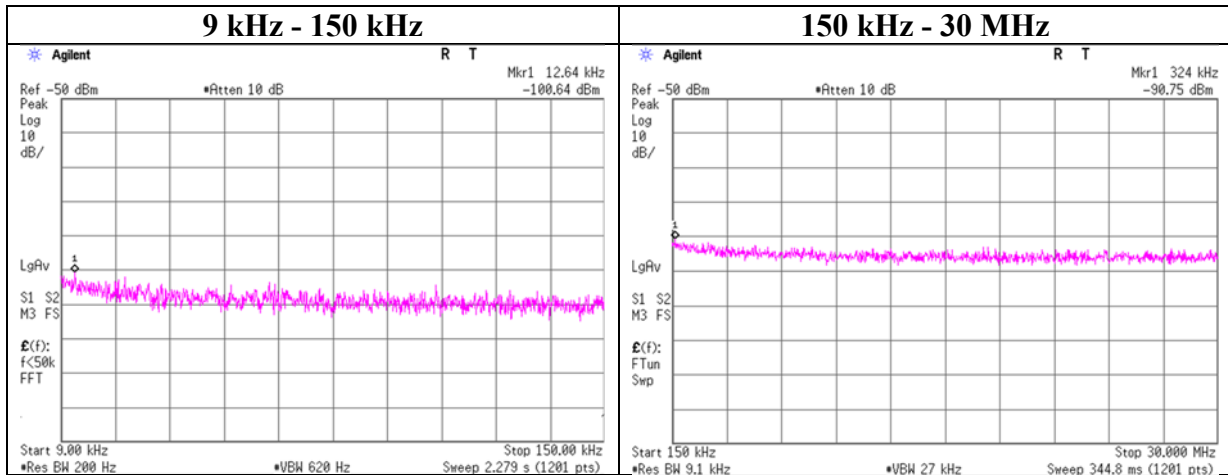

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
12.64	-100.6	0.10	10.2	5.05	1	-85.3	300	6.0	-24.1	45.5	69.6	
324.00	-90.8	0.11	10.2	5.05	1	-75.4	300	6.0	-14.2	17.3	31.5	

$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log(\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$

$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log(N)$$

N: Number of output

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Report No. 12661899H
Test place Ise EMC Lab. No.6 Measurement Room
Date January 16, 2019
Temperature / Humidity 23 deg. C / 38 % RH
Engineer Takafumi Noguchi
Mode Tx BT LE 2440 MHz

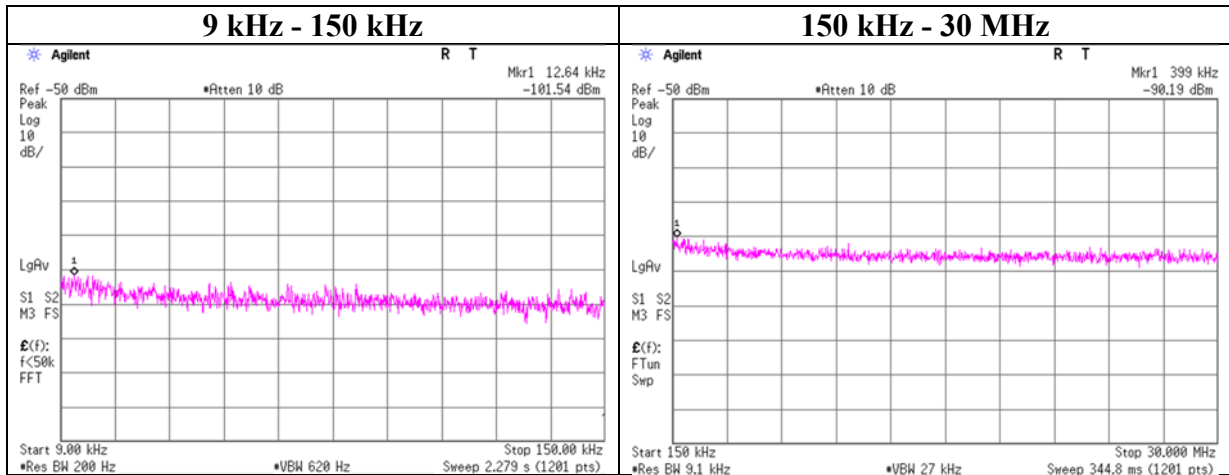

Frequency	Reading	Cable Loss	Attenuator Loss	Antenna Gain	N	EIRP	Distance	Ground bounce	E (field strength)	Limit	Margin	Remark
[kHz]	[dBm]	[dB]	[dB]	[dBi]	(Number of Output)	[dBm]	[m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
12.64	-101.5	0.10	10.2	5.05	1	-86.2	300	6.0	-25.0	45.5	70.5	
399.00	-90.2	0.11	10.2	5.05	1	-74.9	300	6.0	-13.6	15.5	29.1	

$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log(\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$

$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log(N)$$

N: Number of output

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Report No. 12661899H
Test place Ise EMC Lab. No.6 Measurement Room
Date January 16, 2019
Temperature / Humidity 23 deg. C / 38 % RH
Engineer Takafumi Noguchi
Mode Tx BT LE 2480 MHz

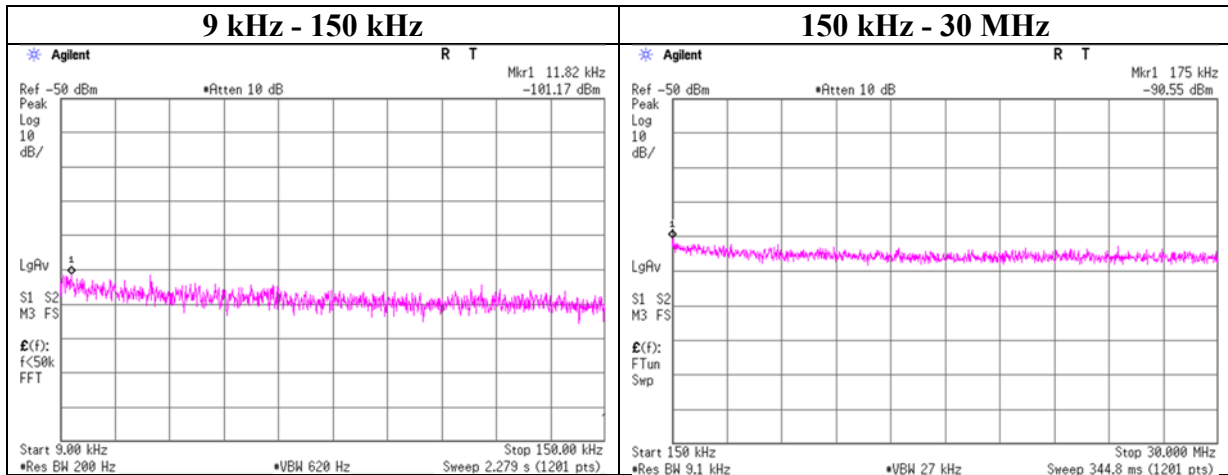

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
11.82	-101.2	0.10	10.2	5.05	1	-85.8	300	6.0	-24.6	46.1	70.7	
175.00	-90.6	0.11	10.2	5.05	1	-75.2	300	6.0	-14.0	22.7	36.7	

$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log(\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$

$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log(N)$$

N: Number of output

Power Density

Report No. 12661899H
Test place Ise EMC Lab. No.6 Measurement Room
Date January 16, 2019
Temperature / Humidity 23 deg. C / 38 % RH
Engineer Takafumi Noguchi
Mode Tx BT LE


Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
2402.00	-25.07	0.38	10.04	-14.65	8.00	22.65
2440.00	-24.80	0.38	10.04	-14.38	8.00	22.38
2480.00	-24.76	0.38	10.04	-14.34	8.00	22.34

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

*The equipment and cables were not used for factor 0 dB of the data sheets.

Power Density

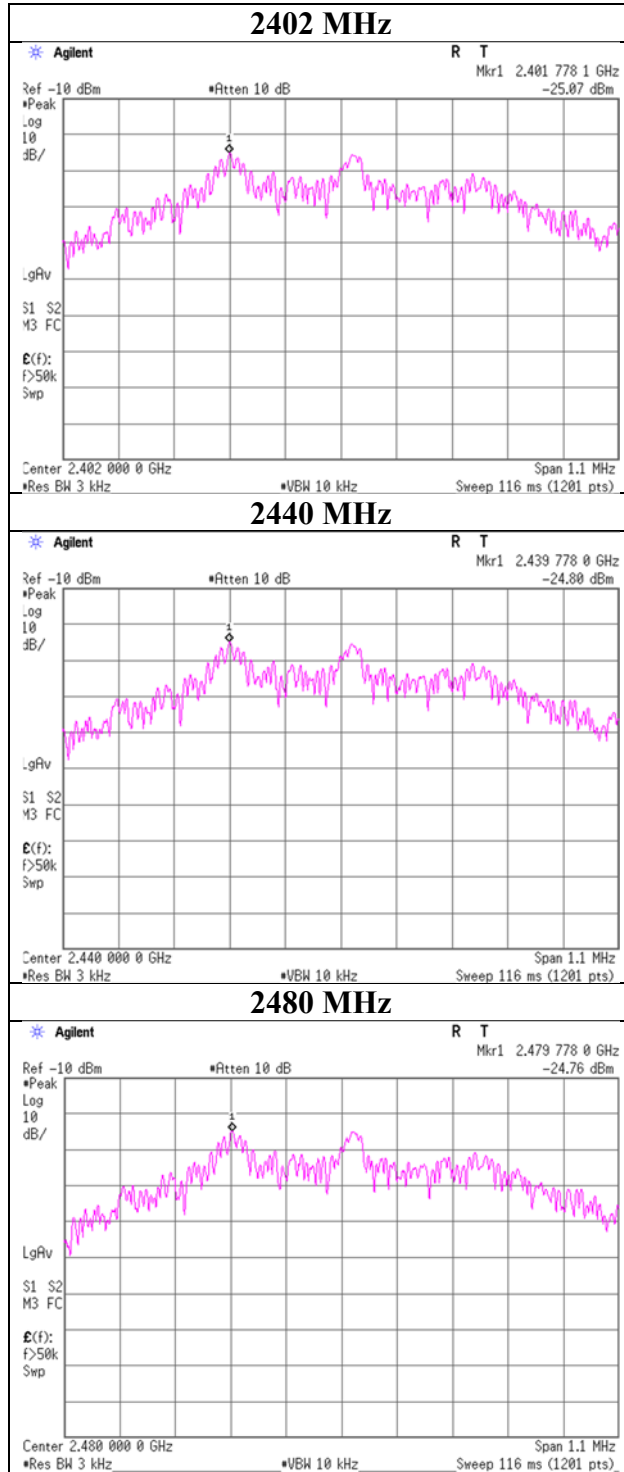

APPENDIX 2: Test instruments

Test Instruments

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Calibration Due Date	Cal Int
CE	141357	LISN(AMN)	Schwarzbeck	NSLK8127	8127-729	7/24/2018	7/31/2019	12
CE	141216	Coaxial cable	Fujikura/ Suhner/TSJ	5D-2W/SFM14/ sucoform141-PE/ 421-010	-/00640	7/3/2018	7/31/2019	12
CE	141247	Attenuator(13dB)	JFW Industries, Inc.	50FP-013H2 N	-	12/6/2018	12/31/2019	12
RE/CE	141949	Test Receiver	Rohde & Schwarz	ESCI	100767	8/6/2018	8/31/2019	12
RE/CE	141554	Thermo-Hygrometer	CUSTOM	CTH-180	1301	1/24/2018	1/31/2019	12
RE/CE	141532	DIGITAL HiTESTER	HIOKI	3805	51201197	1/9/2018	1/31/2019	12
RE	141506	Horn Antenna 15-40GHz	Schwarzbeck	BBHA9170	BBHA9170307	6/8/2018	6/30/2019	12
RE	141296	High Pass Filter 3.5-18.0GHz	UL Japan	HPF SELECTOR	002	9/19/2018	9/30/2019	12
RE	141581	MicroWave System Amplifier	AGILENT	83017A	650	10/4/2018	10/31/2019	12
RE	141545	DIGITAL HiTESTER	HIOKI	3805	51201148	1/9/2018	1/31/2019	12
RE	142227	Measure	KOMELON	KMC-36	-	-	-	-
RE	141562	Thermo-Hygrometer	CUSTOM	CTH-180	1501	1/24/2018	1/31/2019	12
RE	142011	AC4_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	6/28/2018	6/30/2020	24
RE	142017	AC4_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-10005	4/7/2018	4/30/2019	12
RE	141884	Spectrum Analyzer	AGILENT	E4448A	MY44020357	11/2/2018	11/30/2019	12
RE	141412	Microwave Cable	Junkosha	MWX221	1305S002R(1m) / 1405S146(5m)	6/14/2018	6/30/2019	12
RE	141508	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	9120D-557	6/8/2018	6/30/2019	12
RE	142285	Antenna Tilt Jig	Intelligent System Engineering Co., Ltd	Antenna Tilt Jig	T-0003	-	-	-
RE	141424	Biconical Antenna	Schwarzbeck	BBA9106	1915	6/4/2018	6/30/2019	12
RE	141582	Pre Amplifier	SONOMA INSTRUMENT	310	260834	2/27/2018	2/28/2019	12
RE	148897	Attenuator	KEYSIGHT	8491A	MY52462349	12/20/2018	12/31/2019	12
RE	141266	Logperiodic Antenna (200-1000MHz)	Schwarzbeck	VUSLP9111B	911B-191	6/4/2018	6/30/2019	12
RE	141323	Coaxial cable	UL Japan	-	-	7/3/2018	7/31/2019	12
AT	141363	Attenuator(10dB)	JFW	50FP-010-H2	43608 46-202-1	2/28/2018	2/28/2019	12
AT	141279	Microwave Cable	Junkosha	MMX221-00500 DMSDMS	1502S303	3/20/2018	3/31/2019	12
AT	141269	Attenuator(10dB) 1-18GHz	Orient Microwave	BX10-0476-00	-	3/12/2018	3/31/2019	12
AT	141899	Spectrum Analyzer	AGILENT	E4448A	MY46180655	8/10/2018	8/31/2019	12
AT	142180	Measure	KOMELON	KMC-36	-	-	-	-
AT	141810	Power Meter	ANRITSU	ML2495A	824014	10/9/2018	10/31/2019	12
AT	141413	Coaxial Cable	UL Japan	-	-	6/12/2018	6/30/2019	12
AT	141547	DIGITAL HiTESTER	HIOKI	3805	60500120	2/7/2018	2/28/2019	12
AT	141561	Thermo-Hygrometer	CUSTOM	CTH-201	1401	1/11/2019	1/31/2020	12
AT	141832	Power sensor	ANRITSU	MA2411B	738174	10/9/2018	10/31/2019	12

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

*Hyphens for Last Calibration Date, Calibration Due Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test item: CE: Conducted Emission test
 RE: Radiated Emission test
 AT: Antenna Terminal Conducted test