



CONFORMANCE TEST REPORT FOR FCC 47 CFR, Part 15 Subpart C

Report No.: ET93S-08-211-01

Client: **Chung Nam Electronics Co., Ltd.**
 Product: **Wireless Digital Media Adaptor**
 Model: **DMA-10W**
 FCC ID: **Q72DMA1**
 Manufacturer/supplier: **Chung Nam Electronics Co., Ltd.**

Date test item received: 2004/08/31
 Date test campaign completed: 2004/09/04
 Date of issue: 2004/09/06




The test result only corresponds to the tested sample. It is not permitted to copy this report, in part or in full, without the permission of the test laboratory.

Total number of pages of this test report: 68 pages

Total number of pages of photos: External photos 2 pages

Internal photos 5 pages

Setup photos 2 pages

Test Engineer	Checked By	Approved By
 Lee-Ying Hsu	 Joe Hsieh	 Tsung-Ching Lin

ELECTRONICS TESTING CENTER, TAIWAN
 NO.8, LANE 29, WEN-MING RD.,
 LO-SHAN TSUN, KUI-SHAN HSIANG,
 TAOYUAN HSIEN 333
 TAIWAN, R.O.C.

TEL: (03) 3276170~4
 INT: +886-3-3276170~4
 FAX: (03) 3276188
 INT: +886-3-3276188



TEST REPORT CERTIFICATION

Client : Chung Nam Electronics Co., Ltd.
Address : 12/F, Chung Nam Building, No. 1 Lockhart Road, Hong Kong
Manufacturer : Chung Nam Electronics Co., Ltd.
Address : 12/F, Chung Nam Building, No. 1 Lockhart Road, Hong Kong
EUT : Wireless Digital Media Adaptor
Trade name : CNE
Model No. : DMA-10W
Power Source : AC / DC Adaptor
Model: D57-12-1500
Input: 120Vac, 60Hz, 23.5W
Output: DC 12Vdc, 1500mA
Regulations applied : FCC 47 CFR, Part 15 Subpart C (2003)

The testing described in this report has been carried out to the best of our knowledge and ability, and our responsibility is limited to the exercise of reasonable care. This certification is not intended to believe the sellers from their legal and/or contractual obligations.

The compliance test is only certified for the test equipment and the results of the testing report relate only to the item tested. The compliance test of this report was conducted in accordance with the appropriate standards. It's not intention to assure the quality and performance of the product. This report shall not be reproduced except in full, without the approval of ETC. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

Laboratory Introduction: Electronics Testing Center, Taiwan is recognized, filed and mutual recognition arrangement as following:

- ① ISO9001: TÜV Product Service
- ② ISO/IEC 17025: BSMI, CNLA, DGT, NVLAP, CCIBLAC, UL, Compliance
- ③ Filing: FCC, Industry Canada, VCCI
- ④ MRA: Australia, Hong Kong, New Zealand, Singapore, USA, Japan, Korea, China, APLAC through CNLA



NVLAP Lab Code 200133-0

Table of Contents	Page
1 GENERAL INFORMATION	5
1.1 Product Description.....	5
1.2 Characteristics of Device	5
1.3 Test Methodology	6
1.4 Test Facility.....	6
2 PROVISIONS APPLICABLE	7
2.1 Definition	7
2.2 Requirement for Compliance	8
2.3 Restricted Bands of Operation	10
2.4 Labeling Requirement.....	10
2.5 User Information	11
3. SYSTEM TEST CONFIGURATION	12
3.1 Devices for Tested System.....	12
3.2 Setup Diagram for Transmitter Tests.....	12
4 CONDUCTED EMISSION MEASUREMENT	13
4.1 Standard Applicable.....	13
4.2 Measurement Procedure.....	13
4.3 Conducted Emission Data.....	14
4.4 Result Data Calculation	20
4.5 Conducted Measurement Equipment	20
5 ANTENNA REQUIREMENT	21
5.1 Standard Applicable.....	21
5.2 Antenna Construction and Directional Gain.....	21
6 EMISSION BANDWIDTH MEASUREMENT	22
6.1 Standard Applicable.....	22
6.2 Measurement Procedure.....	22
6.3 Measurement Equipment	22
6.4 Measurement Data	23
7 OUTPUT POWER MEASUREMENT	31
7.1 Standard Applicable.....	31
7.2 Measurement Procedure.....	31
7.3 Measurement Equipment	31
7.4 Measurement Data	32

8 POWER DENSITY MEASUREMENT 34

8.1 Standard Applicable 34

8.2 Measurement Procedure 34

8.3 Measurement Equipment 34

8.4 Measurement Data 35

9 SPURIOUS EMISSION - RF CONDUCTED MEASUREMENT 43

9.1 Standard Applicable 43

9.2 Measurement Procedure 43

9.3 Measurement Equipment 43

9.4 Measurement Data 44

10 RADIATED EMISSION MEASUREMENT..... 55

10.1 Standard Applicable 55

10.2 Measurement Procedure 55

10.3 Measuring Instrument 57

10.4 Radiated Emission Data 58

 10.4.1 Harmonic 58

 10.4.2 Spurious Emission 60

 10.4.3 Radiated Measurement at Bandedge with Fundamental Frequencies..... 66

10.5 Field Strength Calculation 68

1 GENERAL INFORMATION

1.1 Product Description

- a) Type of EUT : Wireless Digital Media Adaptor
- b) Trade Name : CNE
- c) Model No. : DMA-10W
- d) Power Supply : AC / DC Adaptor
Model: D57-12-1500
Input: 120Vac, 60Hz, 23.5W
Output: DC 12Vdc, 1500mA

1.2 Characteristics of Device

The CNE 802.11g Digital Media Adaptor (DMA) consists of a series of audio and video client for enabling of wireless video playback. The signal may come directly from the Internet or from a hard disk.

The CNE 802.11g Digital Media Adaptor supports 802.11g wireless connectivity through the use of 802.11g-compliance 2.4GHz radio technology. The 802.11g standard supports wireless physical layer in the 2.4GHz band using Orthogonal Frequency Division Multiplexing (OFDM). The standard provides for data rates up to 54Mbps.

1.3 Test Methodology

All testing were performed according to the procedures in ANSI C63.4 and FCC CFR 47 Part 2 and Part 15.

1.4 Test Facility

The semi-anechoic chamber and conducted measurement facility used to collect the radiated and conducted data are located inside the Building at No.8, Lane 29, Wen-ming Road, Lo-shan Tsun, Kweishan Hsiang, Taoyuan, Taiwan, R.O.C.

This site has been accreditation as a FCC filing site.

2 PROVISIONS APPLICABLE

2.1 Definition

Unintentional radiator:

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

Class B Digital Device :

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business or industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

2.2 Requirement for Compliance

(1) Conducted Emission Requirement

For unintentional device, according to §15.107(a) Line Conducted Emission Limits is as following:

Frequency MHz	Quasi Peak dB μ V	Average dB μ V
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

*Decreases with the logarithm of the frequency.

For intentional device, according to §15.207(a) Line Conducted Emission Limits is same as above table.

(2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dB μ V/m	Radiated μ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
above 960	3	54.0	500

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

(3) Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

(4) Bandwidth Requirement

According to 15.247 (a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

(5) Output Power Requirement

For systems using digital modulation , according to 15.247(b), the maximum peak output power of the intentional radiator shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(6) Spurious Emissions Measurement

According to 15.247 (c) , in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

(7) Power Density Requirement

According to 15.247 (d) , for digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission..

2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.25
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

3. SYSTEM TEST CONFIGURATION

3.1 Devices for Tested System

Device	Manufacture	Model No.	S/N No.	Cable Description
Wireless Digital Media Adaptor*	Chung Nam Electronics Co., Ltd.	DMA-10W	----	1.8m Unshielded Power Line/Adapter
TV	Rasonic	RA-14RNS	460040303	5.0m Unshielded Power Line/Adapter
Cables	N/A	N/A	----	3.0m Unshielded Internet Cable 1.5m Unshielded S-video Line (with a core) 3.0m Unshielded Y/Cb/Cr Line (with a core) 1.5m Unshielded Coaxial Cable (with a core)


Remark “*” means equipment under test.

The software and parameter setting :

Push “Video Out” button to Run Test Program after turning on the EUT.

Parameter:	Power Level	50%
------------	-------------	-----

3.2 Setup Diagram for Transmitter Tests

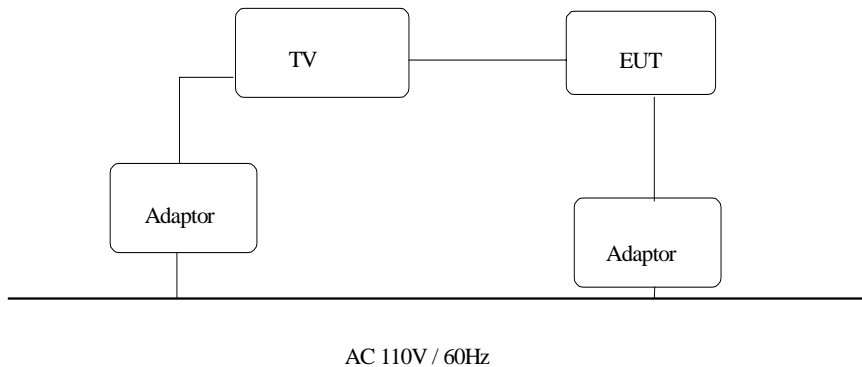

4 CONDUCTED EMISSION MEASUREMENT


4.1 Standard Applicable

For unintentional and intentional device, Line Conducted Emission Limits are in accordance to § 15.107(a) and §15.207(a) respectively. Both Limits are identical specification.

4.2 Measurement Procedure

1. Setup the configuration per figure 1.
2. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
3. Record the 6 highest emissions relative to the limit.
4. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then record the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
5. Confirm the highest three emissions with variation of the EUT cable configuration and record the final data.
6. Repeat all above procedures on measuring each operation mode of EUT.

Figure 1 : Conducted emissions measurement configuration

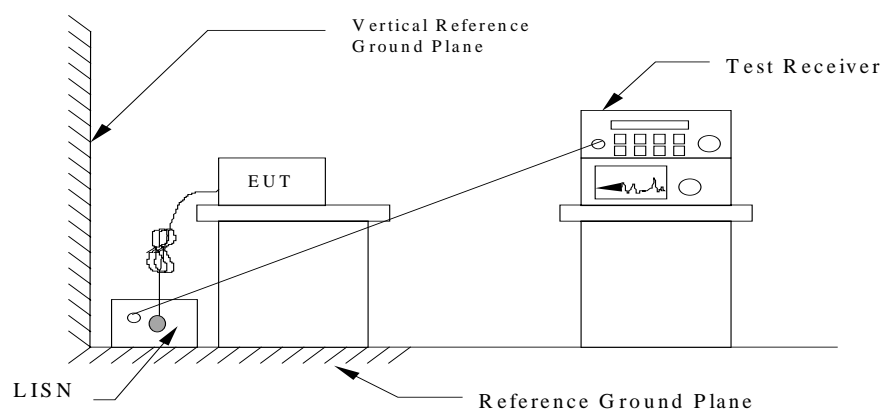

4.3 Conducted Emission Data

4.3.1 IEEE 802.11b

Operation Mode: CH 01

Test Date: Aug. 31, 2004Temperature: 25Humidity: 61 %

Freq. (MHz)	Meter Reading (dBuV)				Factor (dB)	Result (dBuV)				Limit (dBuV)		Margins (dB)
	Q.P Value		AVG. Value			Q.P Value		AVG. Value		Q.P Value	AVG. Value	Q.P. or AVG.
	L1	L2	L1	L2		L1	L2	L1	L2			
0.150	42.3	***	----	----	0.2	42.5	***	----	----	66.0	56.0	-23.5
0.158	41.1	***	----	----	0.2	41.3	***	----	----	65.6	55.6	-24.3
0.162	***	42.8	----	----	0.2	***	43.0	----	----	65.4	55.4	-22.4
0.173	***	41.1	----	----	0.2	***	41.3	----	----	64.8	54.8	-23.5
0.177	40.0	***	----	----	0.2	40.2	***	----	----	64.6	54.6	-24.4
0.185	***	40.7	----	----	0.2	***	40.9	----	----	64.3	54.3	-23.4
0.197	38.4	***	----	----	0.2	38.6	***	----	----	63.7	53.7	-25.1
0.228	***	38.2	----	----	0.2	***	38.4	----	----	62.5	52.5	-24.1
0.252	39.2	***	----	----	0.2	39.4	***	----	----	61.7	51.7	-22.3
0.263	33.3	***	----	----	0.2	33.5	***	----	----	61.3	51.3	-27.8
0.267	***	43.0	----	----	0.2	***	43.2	----	----	61.2	51.2	-18.0
0.279	***	35.6	----	----	0.2	***	35.8	----	----	60.8	50.8	-25.0

Note:

1. “***” means the value was too low to be measured.
2. If the data table appeared symbol of "----" means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
3. The estimated measurement uncertainty of the result measurement is ± 2.5 dB.

Note : Please refer to page 15 to page 16 for chart


Conducted Emission Test

Peak value

EUT: Wireless Digital Media Adaptor
Manuf:
Op Cond: 802.11b
Operator: LeeYing
Test Spec: FCC PART 15B
Comment: L1

Result File: I1_11b.dat : New Measurement

Final Measurement: Detector: X QP
 Meas Time: 1sec
 Peaks: 8
 Acc Margin: 25 dB

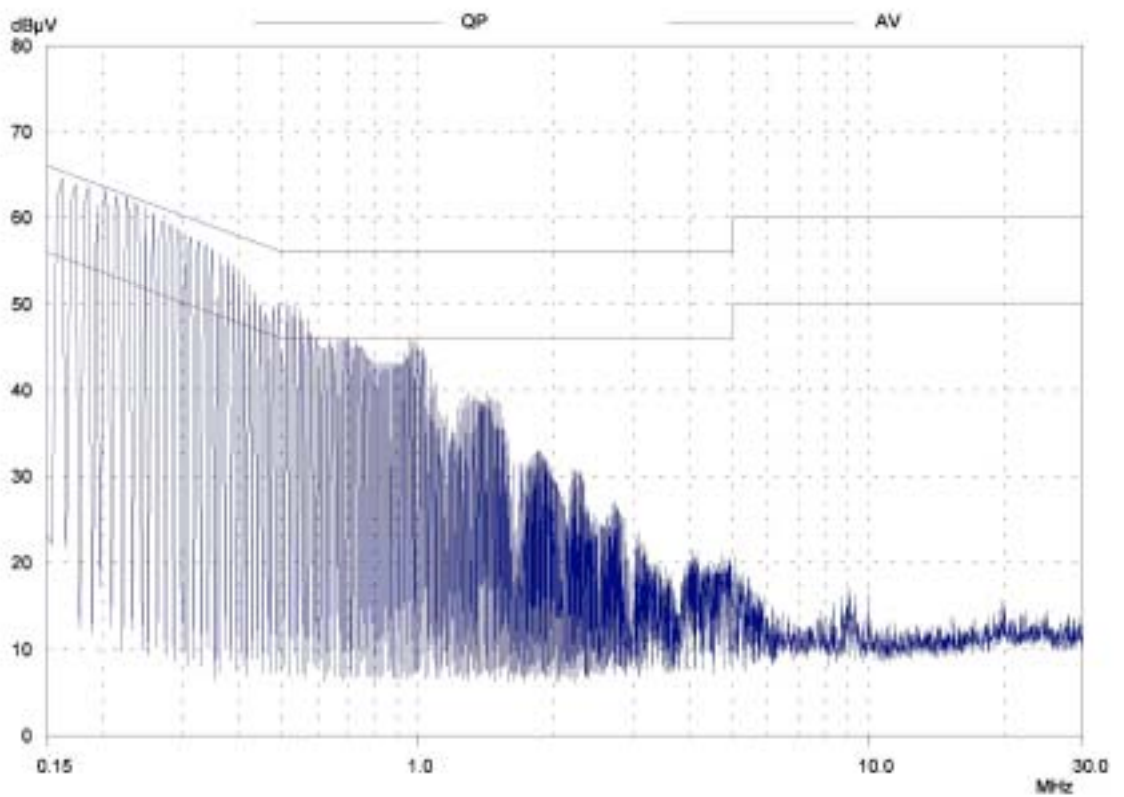


Conducted Emission Test

Peak value

EUT: Wireless Digital Media Adaptor
Manuf:
Op Cond: 802.11b
Operator: LeeYing
Test Spec: FCC PART 15B
Comment: L2

Result File: I2_11b.dat : New Measurement

Final Measurement: Detector: X QP
 Meas Time: 1sec
 Peaks: 8
 Acc Margin: 25 dB

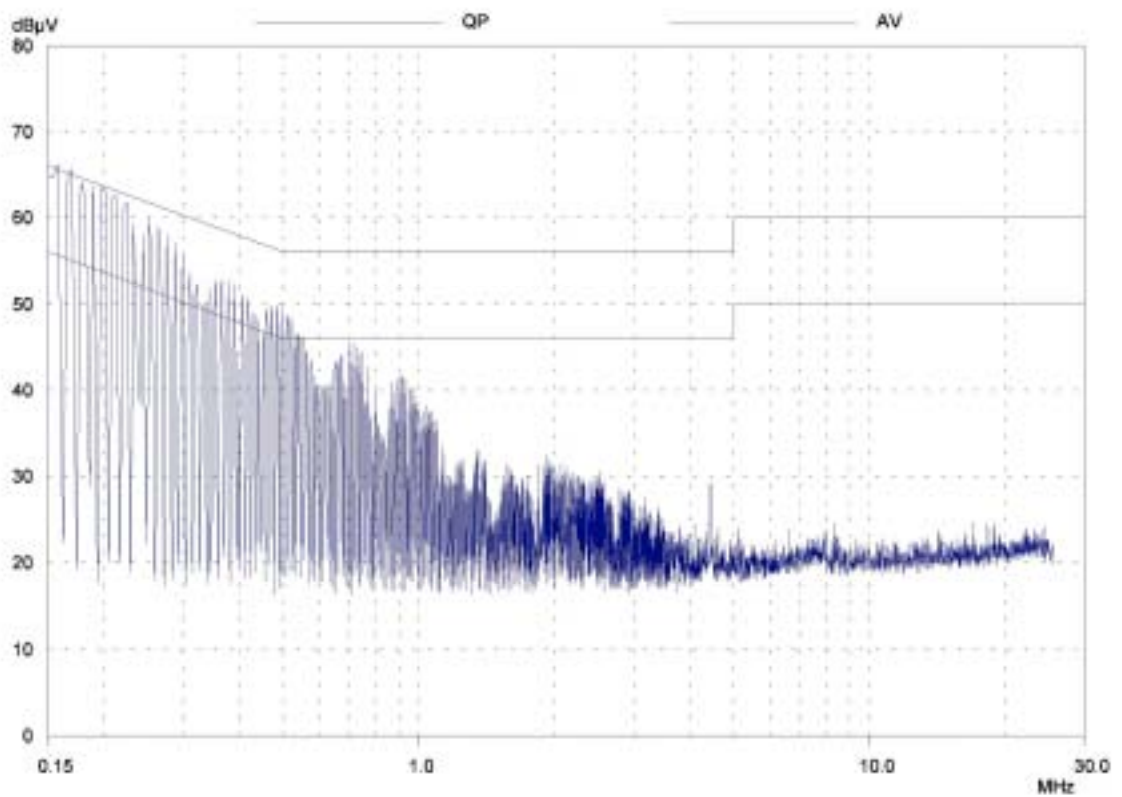

4.3.2 IEEE 802.11g

Operation Mode: CH 01

Test Date: Aug. 31, 2004Temperature: 25Humidity: 61 %

Freq. (MHz)	Meter Reading (dBuV)				Factor (dB)	Result (dBuV)				Limit (dBuV)		Margins (dB)
	Q.P Value		AVG. Value			Q.P Value		AVG. Value		Q.P Value	AVG. Value	Q.P. or AVG.
	L1	L2	L1	L2		L1	L2	L1	L2			
0.150	***	43.1	----	----	0.2	***	43.3	----	----	66.0	56.0	-22.7
0.154	41.4	***	----	----	0.2	41.6	***	----	----	65.8	55.8	-24.2
0.162	***	42.1	----	----	0.2	***	42.3	----	----	65.4	55.4	-23.1
0.167	40.6	***	----	----	0.2	40.8	***	----	----	65.1	55.1	-24.3
0.173	***	40.6	----	----	0.2	***	40.8	----	----	64.8	54.8	-24.0
0.193	36.5	***	----	----	0.2	36.7	***	----	----	63.9	53.9	-27.2
0.205	***	37.8	----	----	0.2	***	38.0	----	----	63.4	53.4	-25.4
0.216	40.0	***	----	----	0.2	40.2	***	----	----	63.0	53.0	-22.8
0.224	38.8	***	----	----	0.2	39.0	***	----	----	62.7	52.7	-23.7
0.236	33.5	***	----	----	0.2	33.7	***	----	----	62.2	52.2	-28.5
0.252	***	44.0	----	----	0.2	***	44.2	----	----	61.7	51.7	-17.5
0.271	***	32.1	----	----	0.2	***	32.3	----	----	61.1	51.1	-28.8

Note:

1. "****" means the value was too low to be measured.
2. If the data table appeared symbol of "----" means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
3. The estimated measurement uncertainty of the result measurement is ± 2.5 dB.

Note : Please refer to page 18 to page 19 for chart


Conducted Emission Test

Peak value

EUT: Wireless Digital Media Adaptor
Manuf:
Op Cond: 802.11g
Operator: LeeYing
Test Spec: FCC PART 15B
Comment: L1

Result File: I1_11g.dat : New Measurement

Final Measurement: Detector: X QP
 Meas Time: 1sec
 Peaks: 8
 Acc Margin: 25 dB

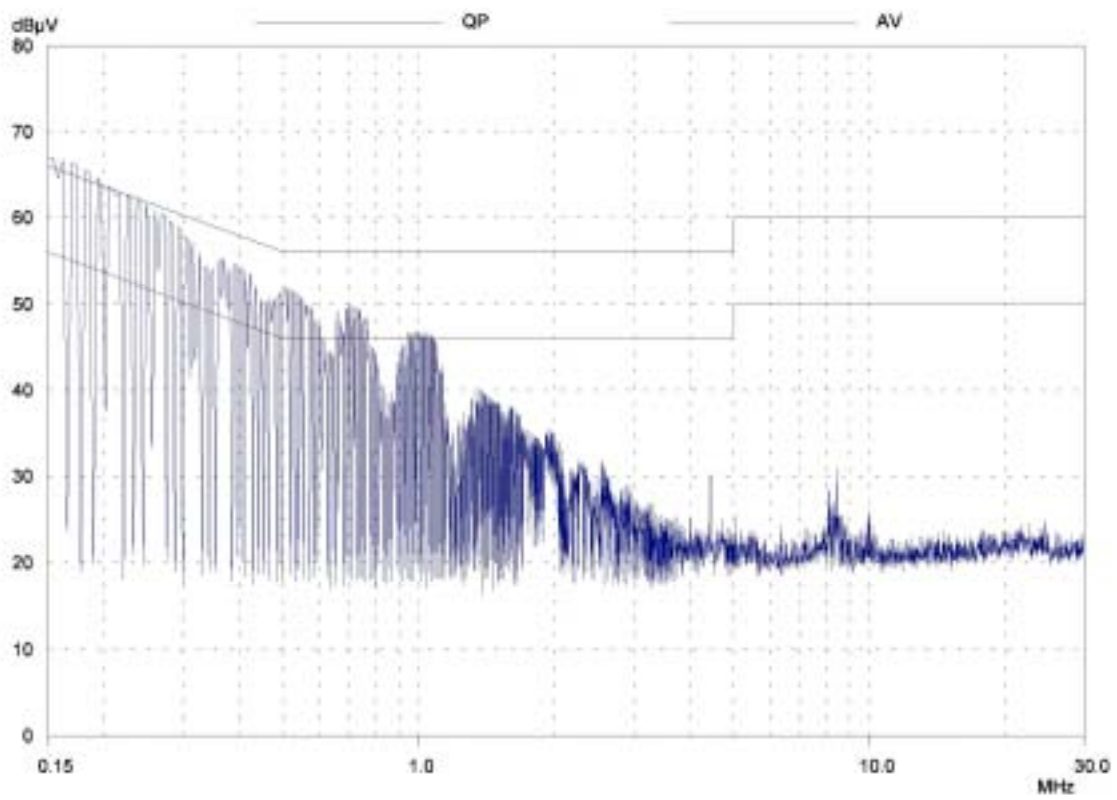


Conducted Emission Test

Peak value

EUT: Wireless Digital Media Adaptor
Manuf:
Op Cond: 802.11g
Operator: LeeYing
Test Spec: FCC PART 15B
Comment: L2

Result File: I2_11g.dat - New Measurement

Final Measurement: Detector: X OP
 Meas Time: 1sec
 Peaks: 8
 Acc Margin: 25 dB

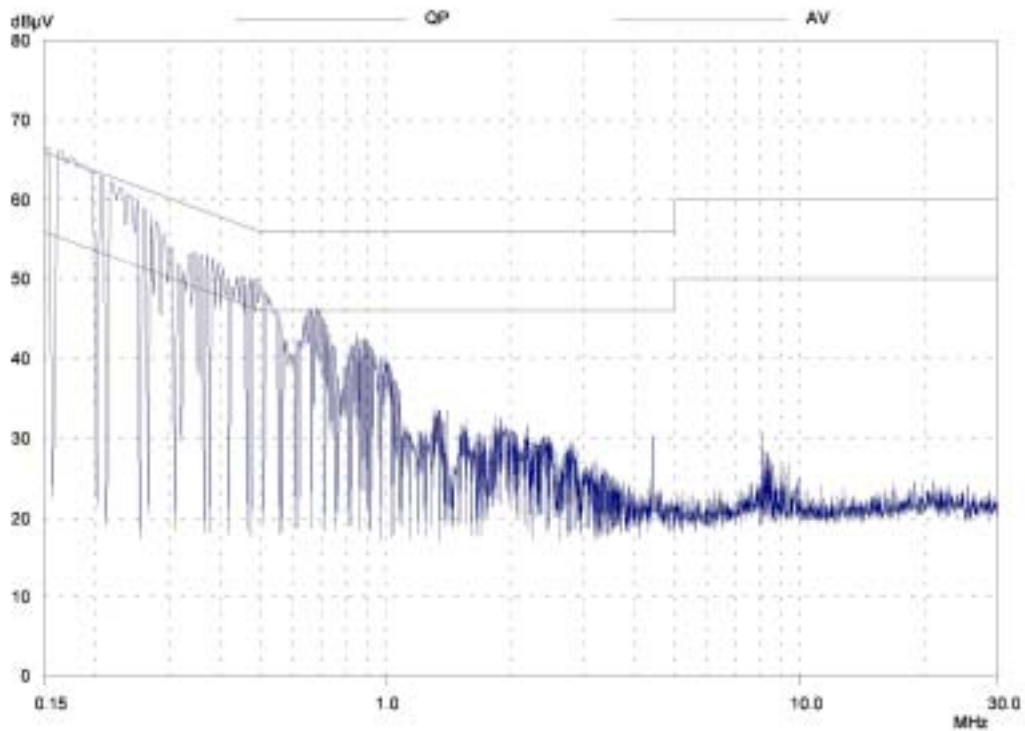

4.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\mathbf{RESULT = READING + LISN FACTOR (Included Cable Loss)}$$

Assume a receiver reading of 22.5 dB μ V is obtained, and LISN Factor is 0.1 dB, then the total of disturbance voltage is 22.6 dB μ V.

$$\mathbf{RESULT = 22.5 + 0.1 = 22.6 \text{ dB } \mu \text{ V}}$$

$$\begin{aligned} \mathbf{Level \text{ in } \mu \text{ V} = \text{Common Antilogarithm}[(22.6 \text{ dB } \mu \text{ V})/20]} \\ \mathbf{= 13.48 \mu \text{ V}} \end{aligned}$$

4.5 Conducted Measurement Equipment

The following test equipment are used during the conducted test.

Equipment	Manufacturer	Model No.	Next Cal. Due
RF Test Receiver	Rohde and Schwarz	ESCS30	09/18/2004
Line Impedance Stabilization network	EMCO	3825	11/01/2004

5 ANTENNA REQUIREMENT

5.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to §15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.2 Antenna Construction and Directional Gain

Antenna type: Monopole Antenna.

Antenna gain: 2.1 dBi.

6 EMISSION BANDWIDTH MEASUREMENT


6.1 Standard Applicable

According to 15.247(a)(2), system using digital modulation techniques, the minimum 6dB bandwidth shall be at least 500 kHz.

6.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Figure 2: Emission bandwidth measurement configuration.



6.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Hewlett-Packard	8564EC	09/16/2005


6.4 Measurement Data

6.4.1 IEEE 802.11b

Test Date: Sep. 01, 2004Temperature: 25Humidity: 63 %


Channel	Frequency (MHz)	Data Transfer Rate (Mbps)	6dB Bandwidth (MHz)	FCC Limit (kHz)	Chart
1	2412	1	12.067	500	-
		2	12.333	500	-
		5.5	12.767	500	-
		11	11.567	500	Page 24
6	2437	1	12.467	500	-
		2	12.233	500	-
		5.5	12.333	500	-
		11	11.500	500	Page 25
11	2462	1	12.900	500	-
		2	12.367	500	Page 26
		5.5	12.800	500	-
		11	12.900	500	-

Note:**1. Please refer to page 24 to page 26 for chart****2. The estimated measurement uncertainty of the result measurement is 8.25×10^{-7} (1GHz f 18GHz)**

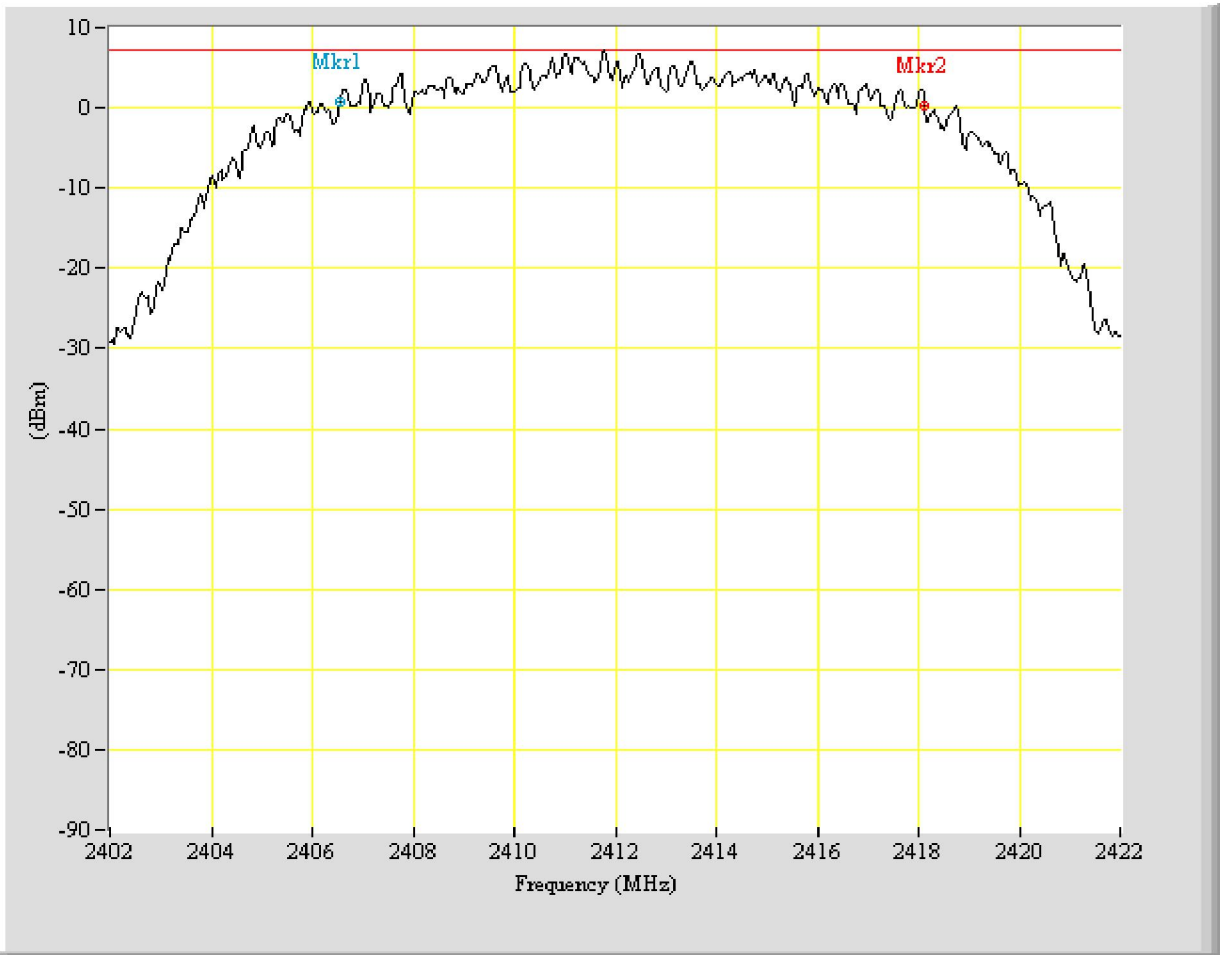

*Center 2412.0000MHz	Display Line 7.340dBm
*SPAN 20.0000MHz	Δ Marker -11.5667MHz -0.500dB
*RBW 100.00kHz	Mkr1 2406.567MHz 0.840dBm
*VBW 100.00kHz	Mkr2 2418.133MHz 0.340dBm
*SWP 50.00msec	
*ATTEN 20.00dB	
*RL 10.00dBm	

EUT: DMA-10W
 Purpose: 6dB_BW
 Condition: 802,11b_CH01_11Mbps
 Note:

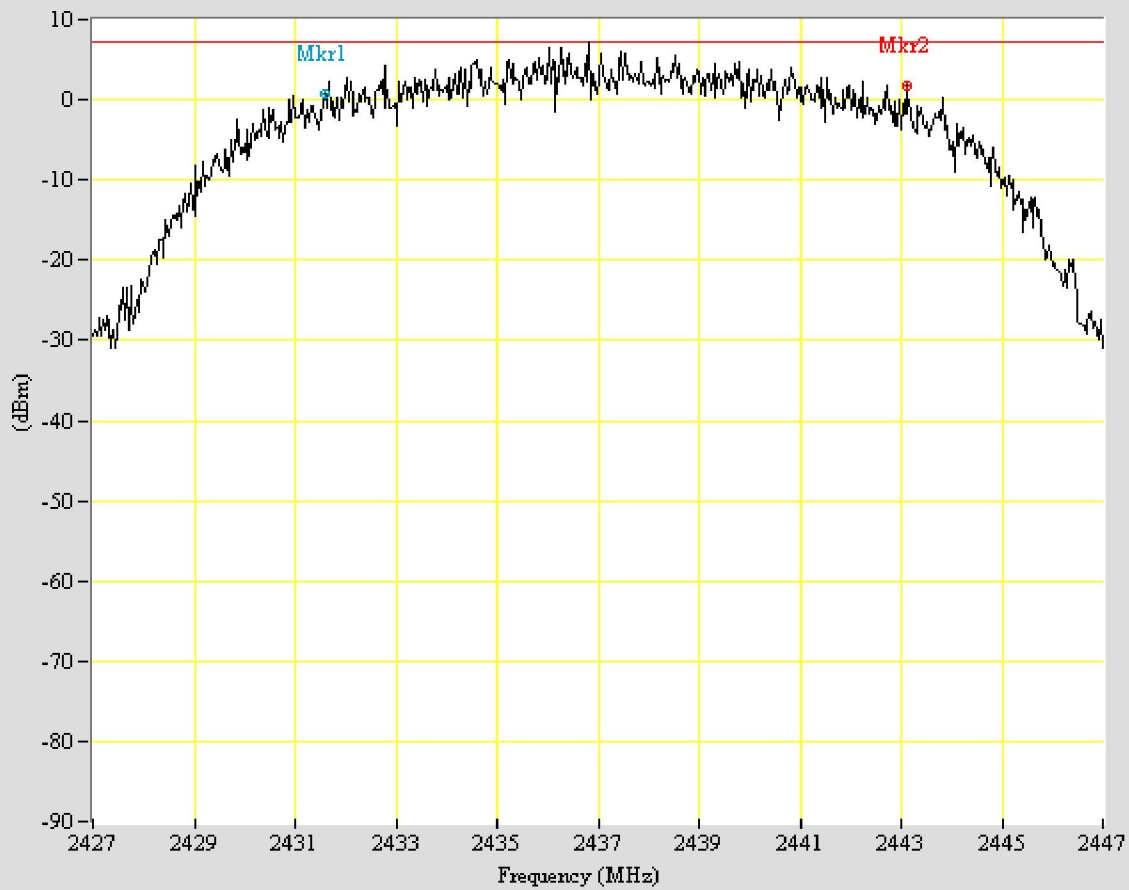

*Center 2437.0000MHz

*SPAN 20.0000MHz

*RBW 100.00kHz

*VBW 100.00kHz

*SWP 50.00msec

*ATTEN 20.00dB

*RL 10.00dBm

Display Line 7.170dBm

Δ Marker -11.5000MHz 1.000dB

Mkr1 2431.600MHz 0.840dBm


Mkr2 2443.100MHz 1.840dBm

EUT: DMA-10W

Purpose: 6dB_BW

Condition: 802,11b_CH06_11Mbps

Note:

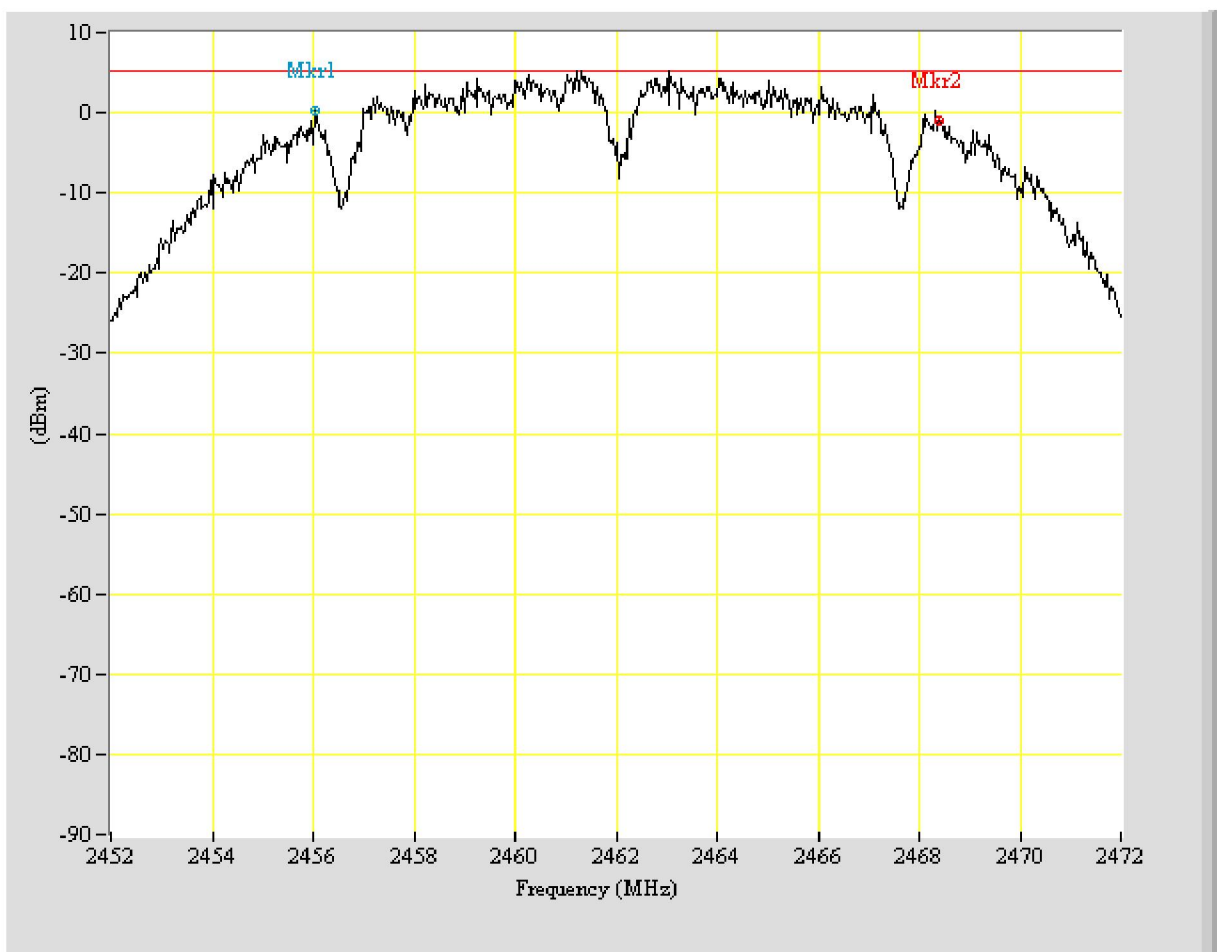

*Center 2462.0000MHz	Display Line 5.340dBm
*SPAN 20.0000MHz	Δ Marker -12.3667MHz -1.170dB
*RBW 100.00kHz	Mkr1 2456.033MHz 0.170dBm
*VBW 100.00kHz	Mkr2 2468.400MHz -1.000dBm
*SWP 50.00msec	
*ATTEN 20.00dB	
*RL 10.00dBm	


EUT: DMA-10W
 Purpose: 6dB_BW
 Condition: 802,11b_CH11_2Mbps_
 Note:

6.4.2 802.11g

Test Date: Sep. 01, 2004Temperature: 25Humidity: 63 %

Channel	Frequency (MHz)	Data Transfer Rate (Mbps)	6dB Bandwidth (MHz)	FCC Limit (kHz)	Chart
1	2412	6	11.533	500	Page 28
		9	16.367	500	-
		12	16.367	500	-
		18	16.400	500	-
		24	16.467	500	-
		36	16.433	500	-
		48	16.367	500	-
		54	16.433	500	-
6	2437	6	16.367	500	-
		9	16.333	500	-
		12	16.467	500	-
		18	16.467	500	-
		24	16.367	500	-
		36	16.333	500	-
		48	16.267	500	Page 29
		54	16.400	500	-
11	2462	6	16.367	500	Page 30
		9	16.467	500	-
		12	16.467	500	-
		18	16.433	500	-
		24	16.467	500	-
		36	16.500	500	-
		48	16.433	500	-
		54	16.433	500	-

Note:**1. Please refer to page 28 to page 30 for chart****2. The estimated measurement uncertainty of the result measurement is 8.25×10^{-7} (1GHz f 18GHz)**

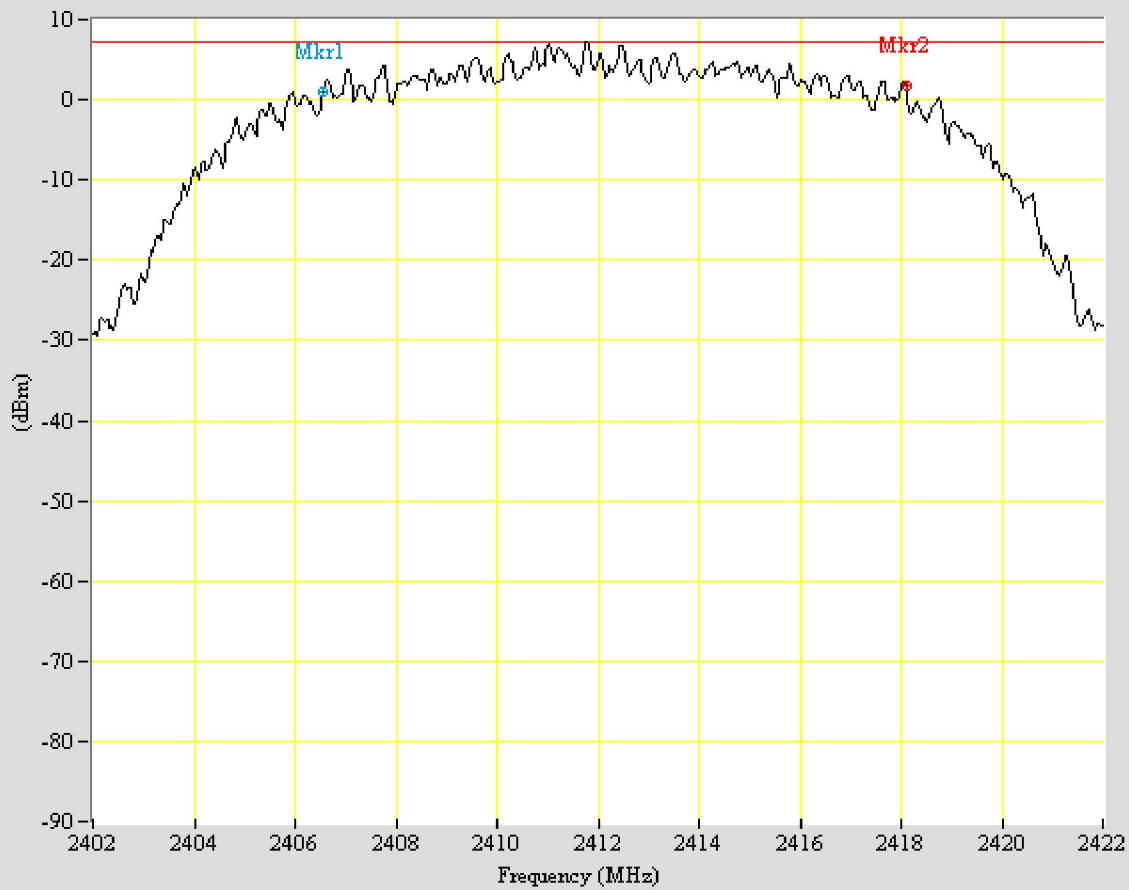

*Center 2412.0000MHz

*SPAN 20.0000MHz

*RBW 100.00kHz

*VBW 100.00kHz

*SWP 50.00msec

*ATTEN 20.00dB

*RL 10.00dBm


Display Line 7.340dBm

Δ Marker -11.5333MHz 0.670dB

Mkr1 2406.567MHz 1.000dBm

Mkr2 2418.100MHz 1.670dBm

EUT: DMA-10W
 Purpose: 6dB_BW
 Condition: 802,11g_CH01_6Mbps
 Note:

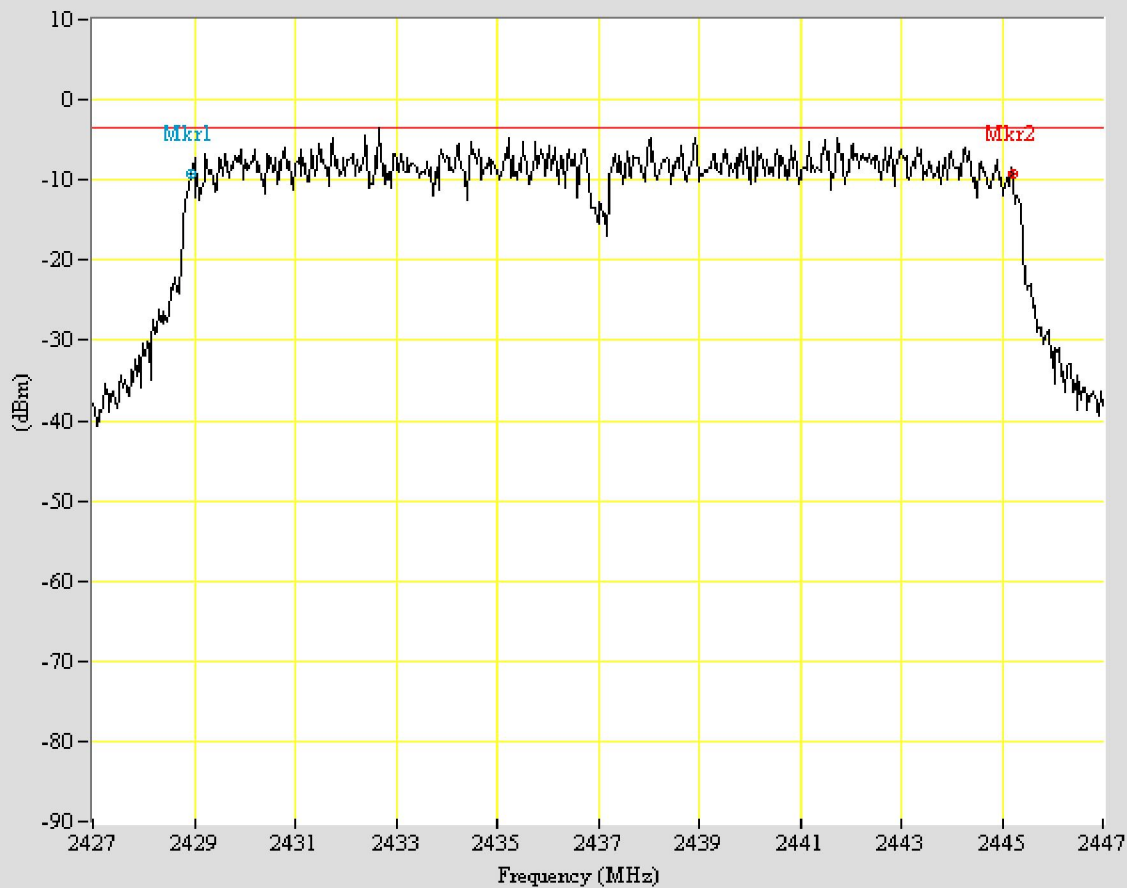

*Center 2437.0000MHz

*SPAN 20.0000MHz

*RBW 100.00kHz

*VBW 100.00kHz

*SWP 50.00msec

*ATTEN 20.00dB

*RL 10.00dBm

Display Line -3.500dBm

Δ Marker -16.2667MHz 0.000dB

Mkr1 2428.933MHz -9.160dBm


Mkr2 2445.200MHz -9.160dBm

EUT: DMA-10W

Purpose: 6dB_BW

Condition: 802,11g_CH06_48Mbps

Note:

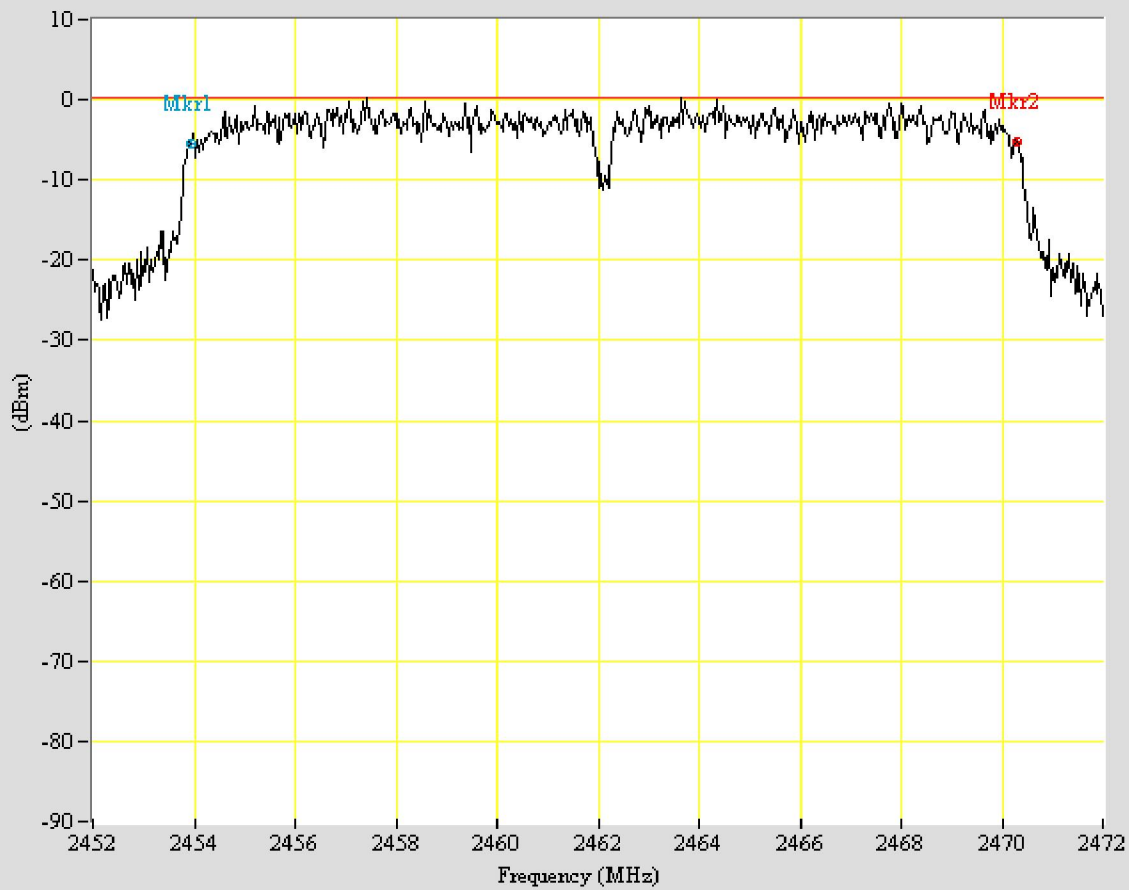

*Center 2462.0000MHz

*SPAN 20.0000MHz

*RBW 100.00kHz

*VBW 100.00kHz

*SWP 50.00msec

*ATTEN 20.00dB

*RL 10.00dBm

Display Line 0.170dBm

Δ Marker -16.3667MHz 0.170dB

Mkr1 2453.933MHz -5.500dBm

Mkr2 2470.300MHz -5.330dBm

EUT: DMA-10W

Purpose: 6dB_BW

Condition: 802,11g_CH11_6Mbps

Note: