




RF 15M(LTE 15M) -Port 1-886.5MHz




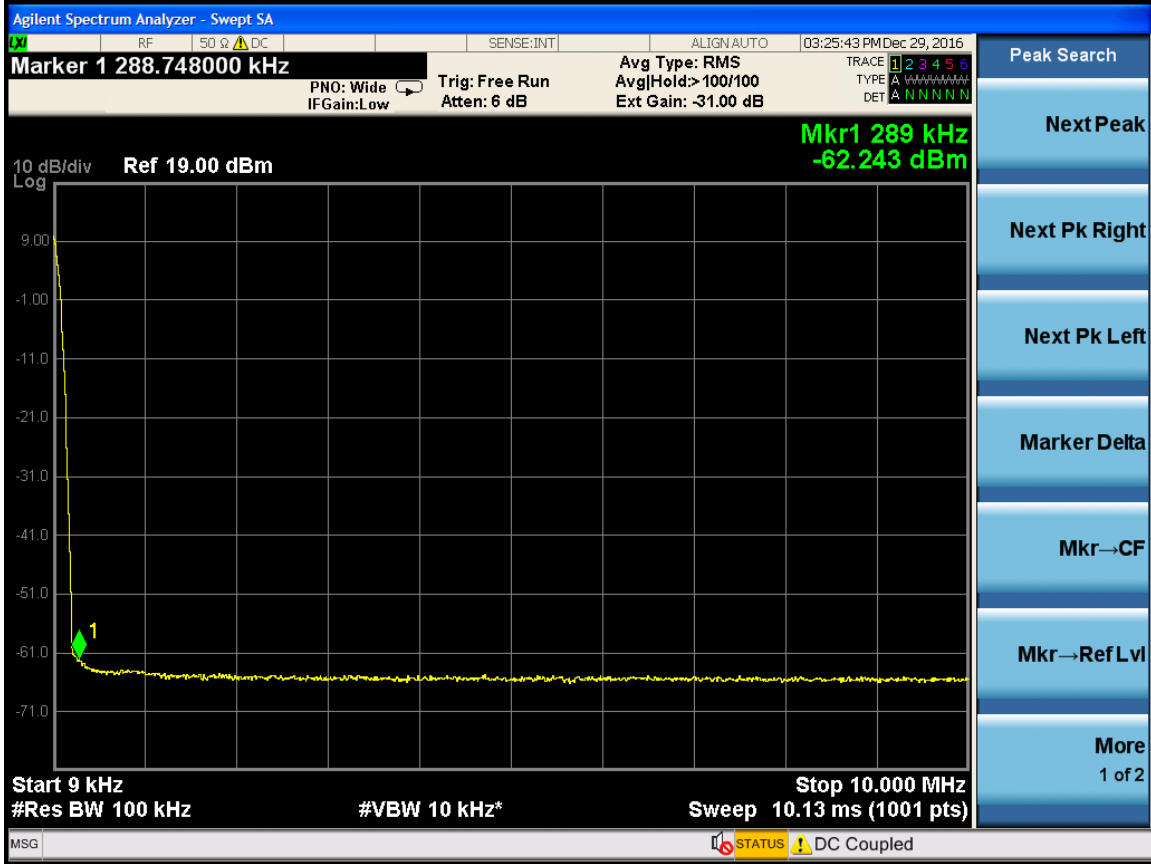


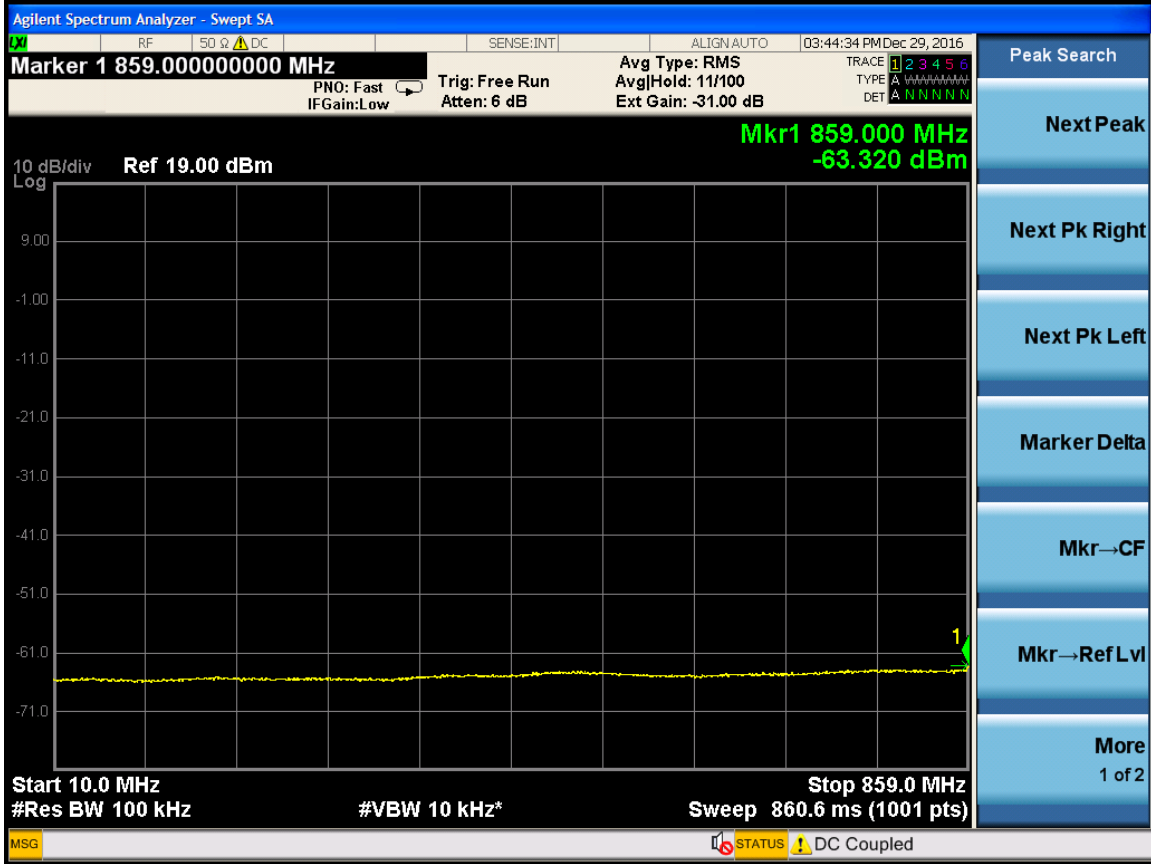


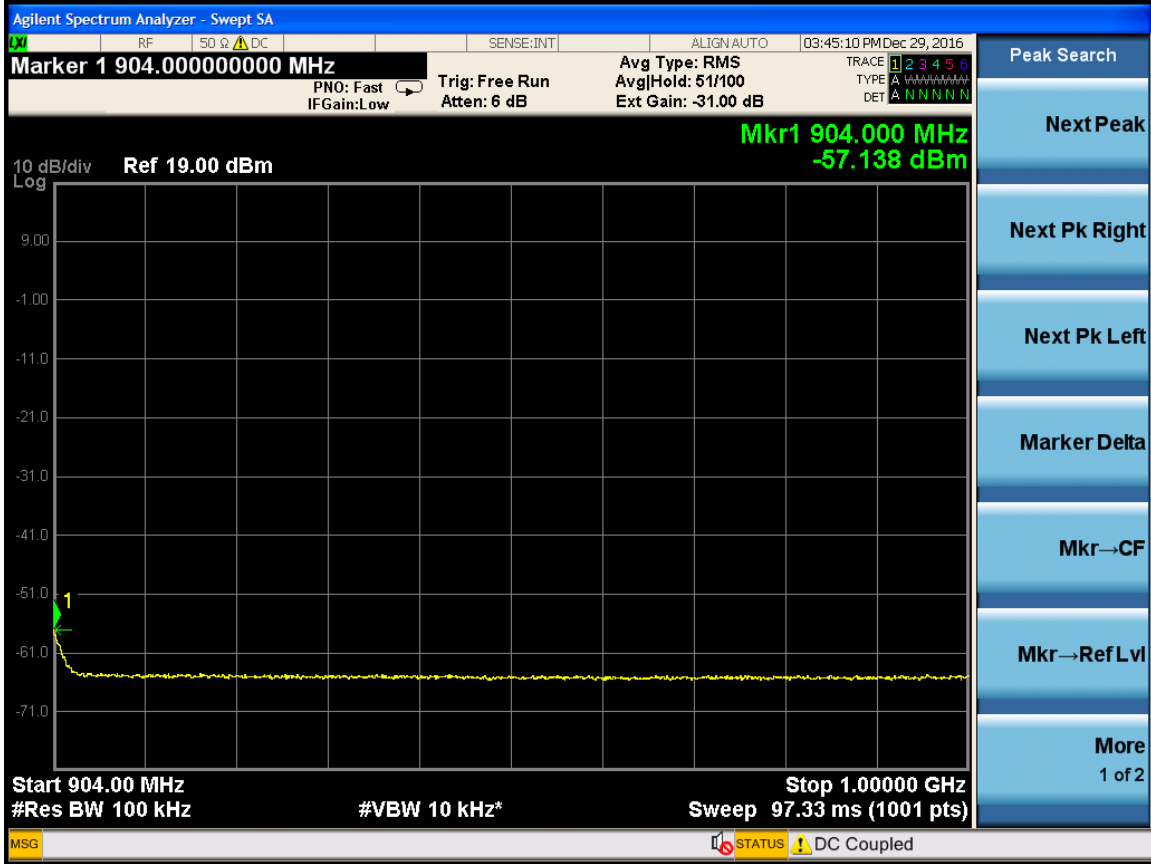


RF 10M(LTE 10M) -Port 0-874MHz

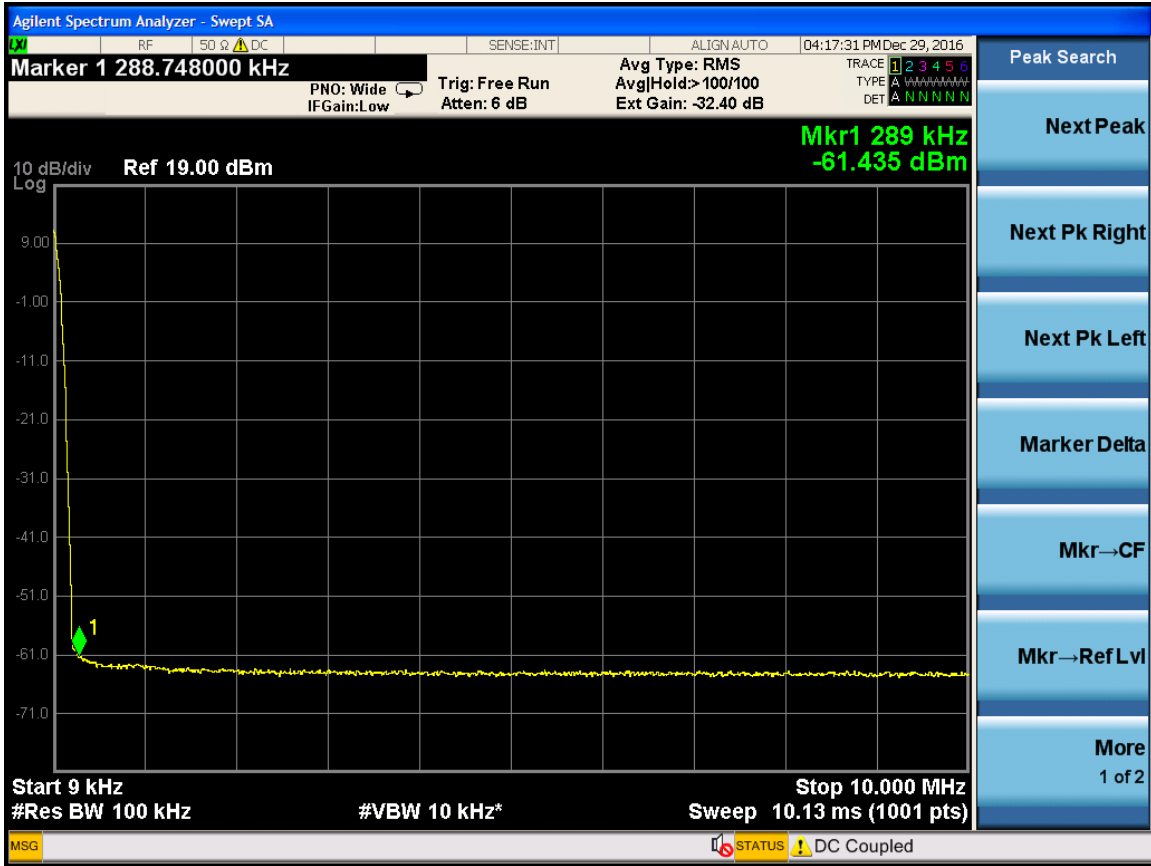


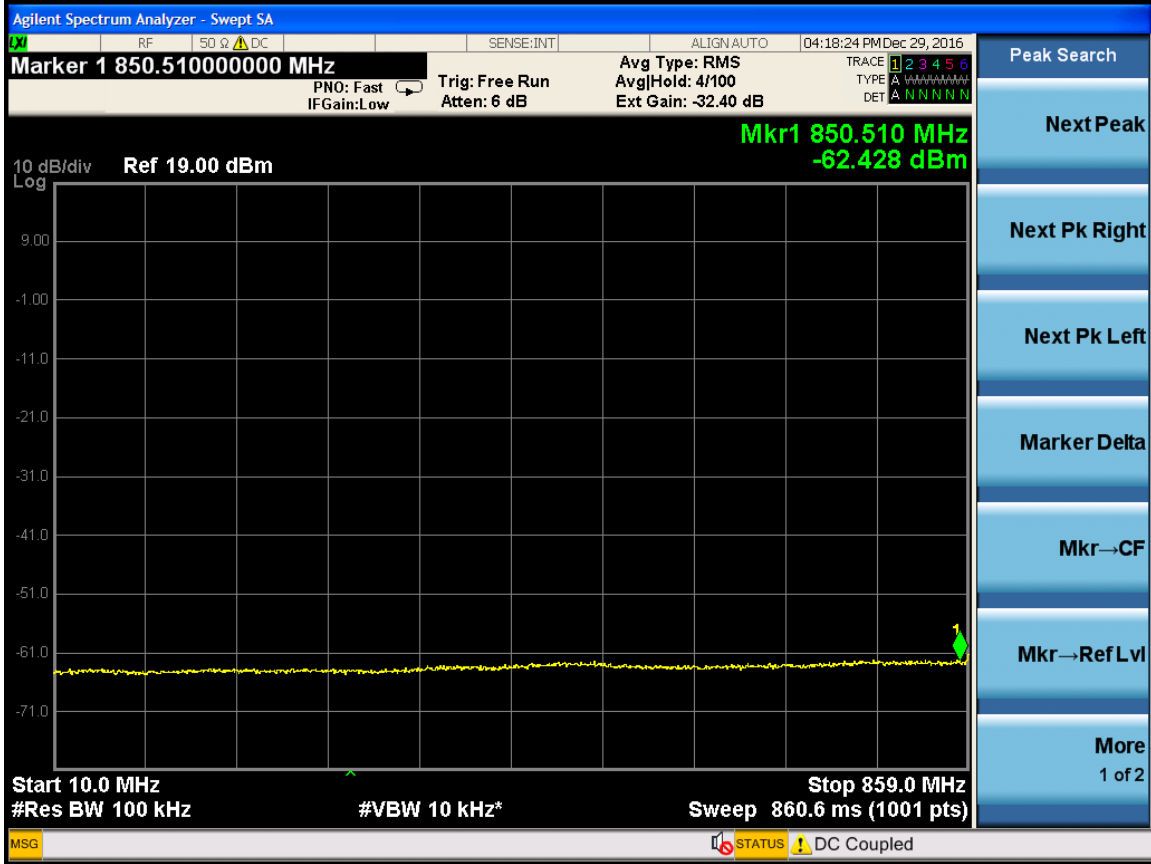


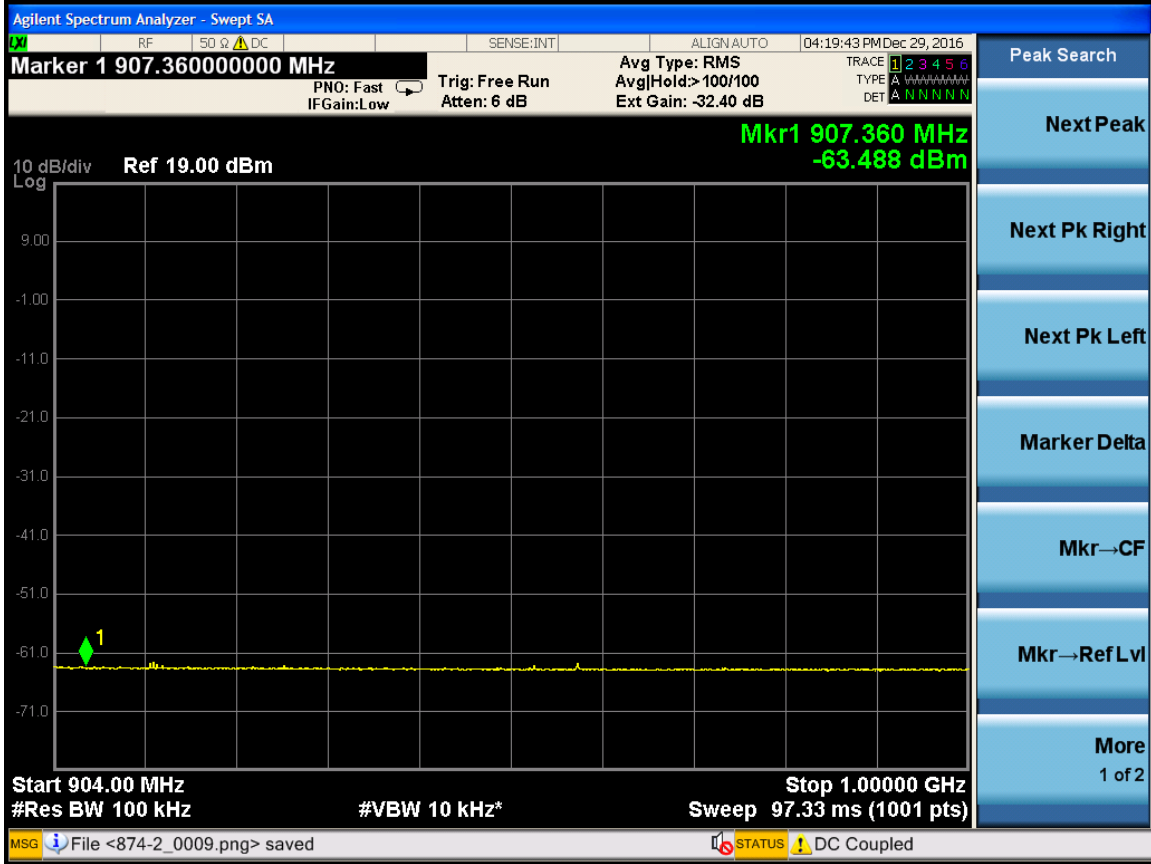


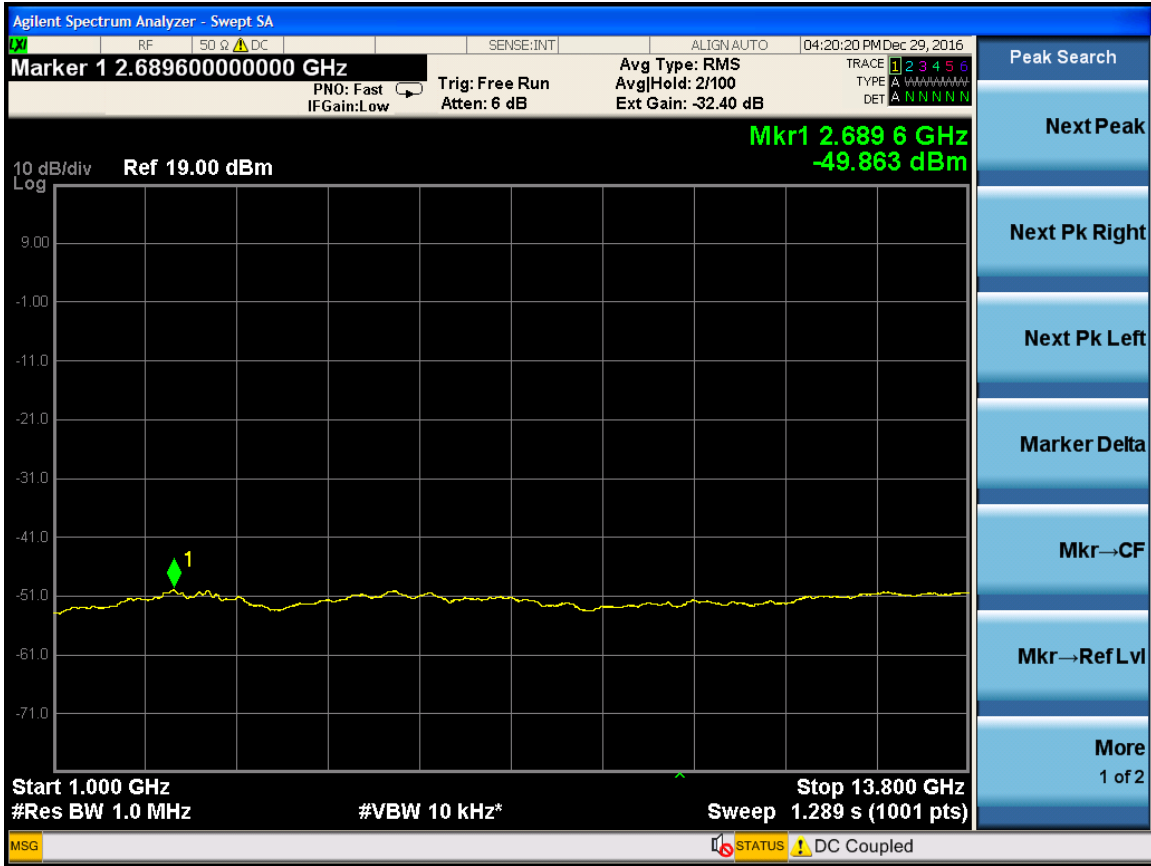


RF 10M(LTE 10M) -Port 0-881.5MHz

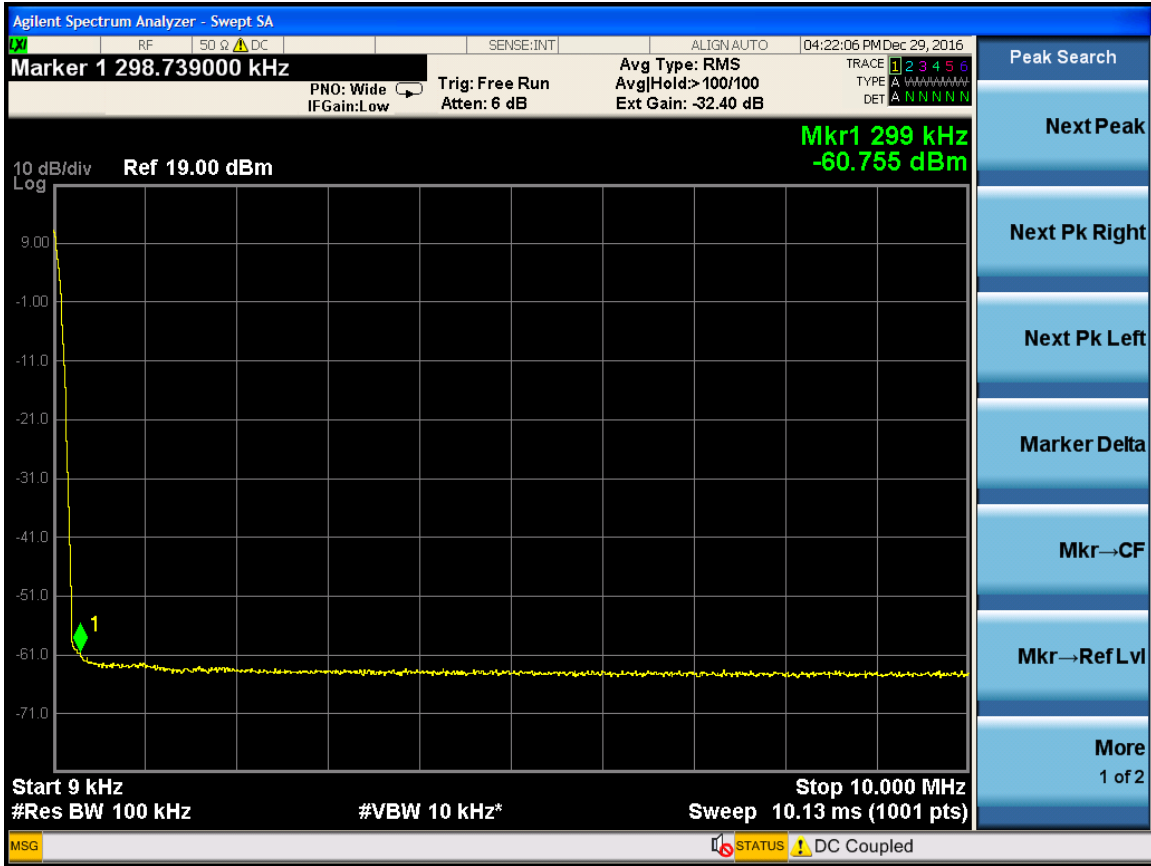


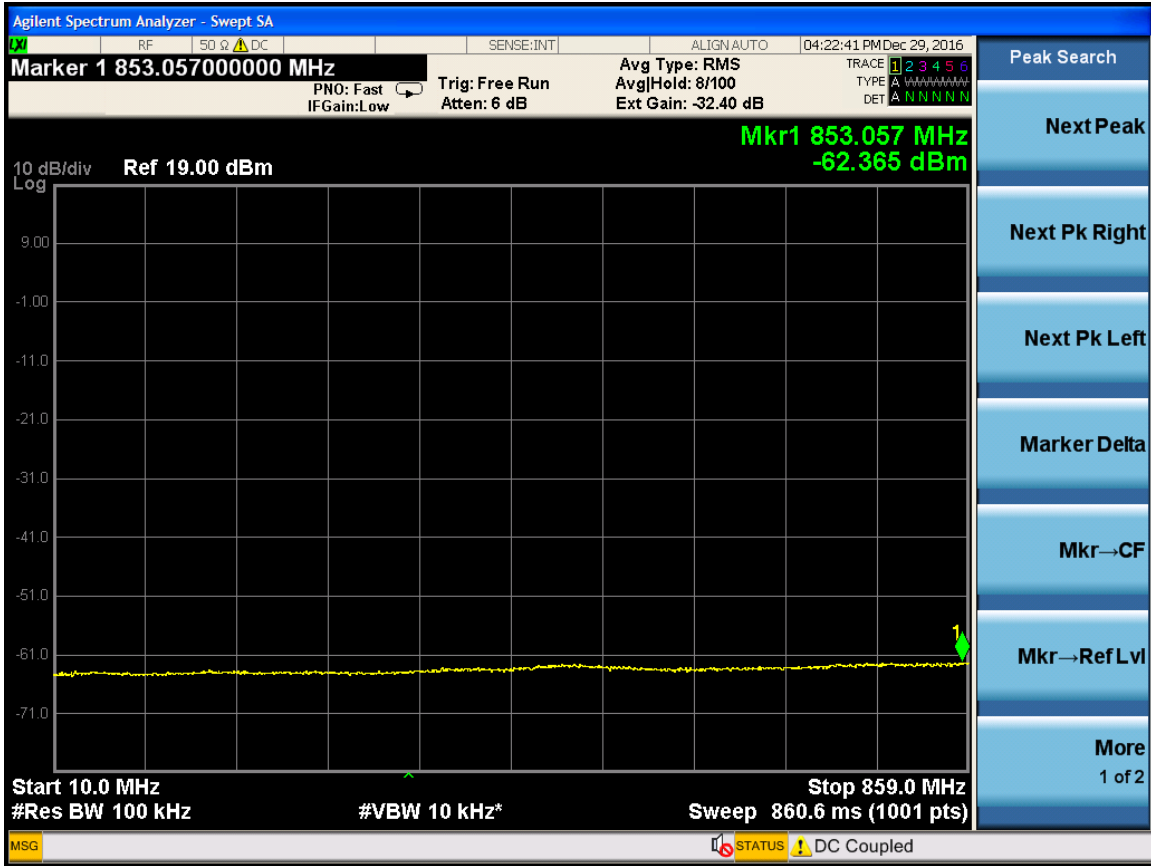


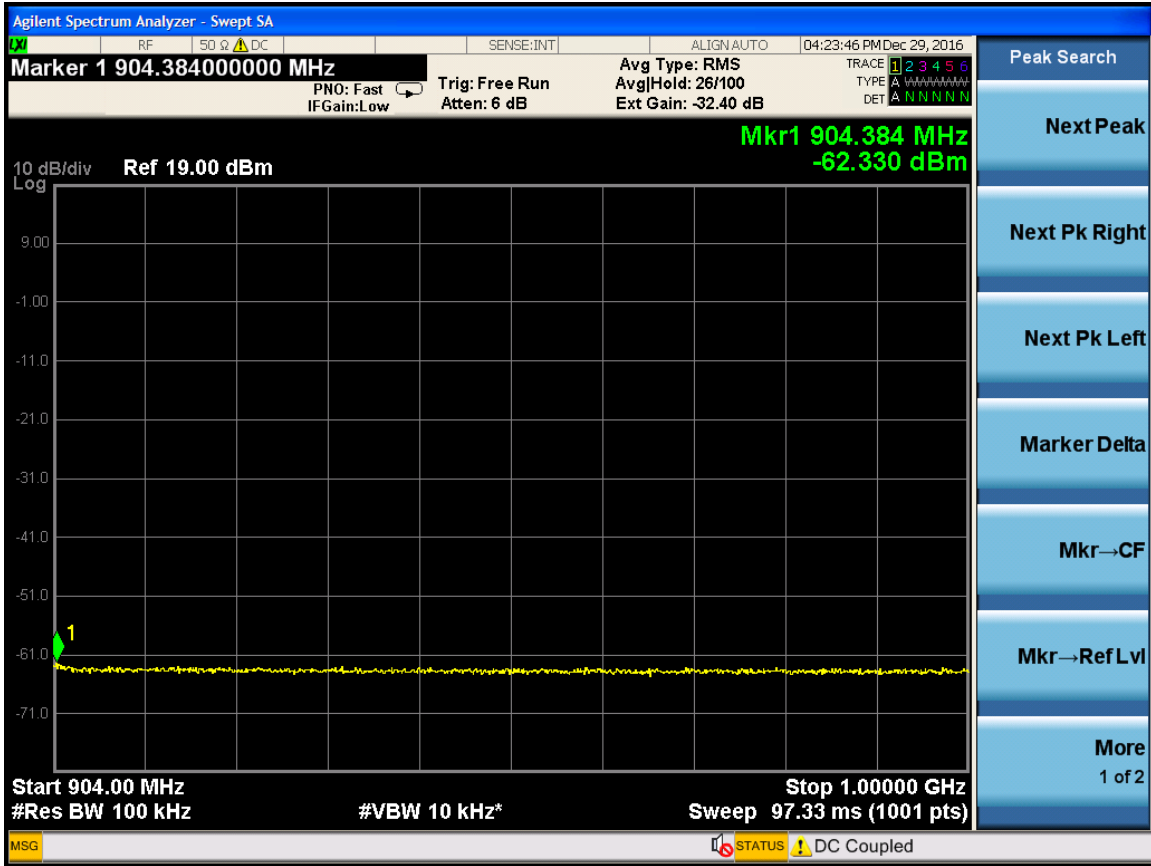


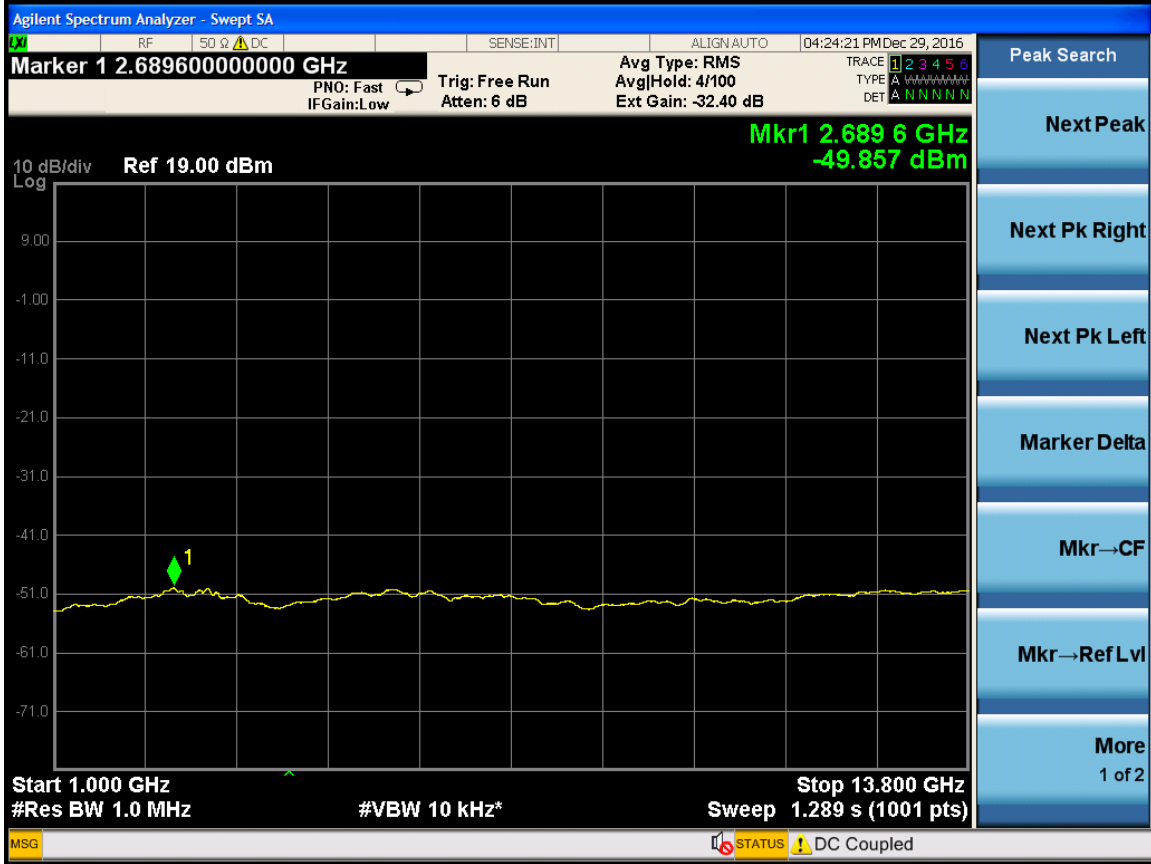


RF 10M(LTE 10M) -Port 0-889MHz

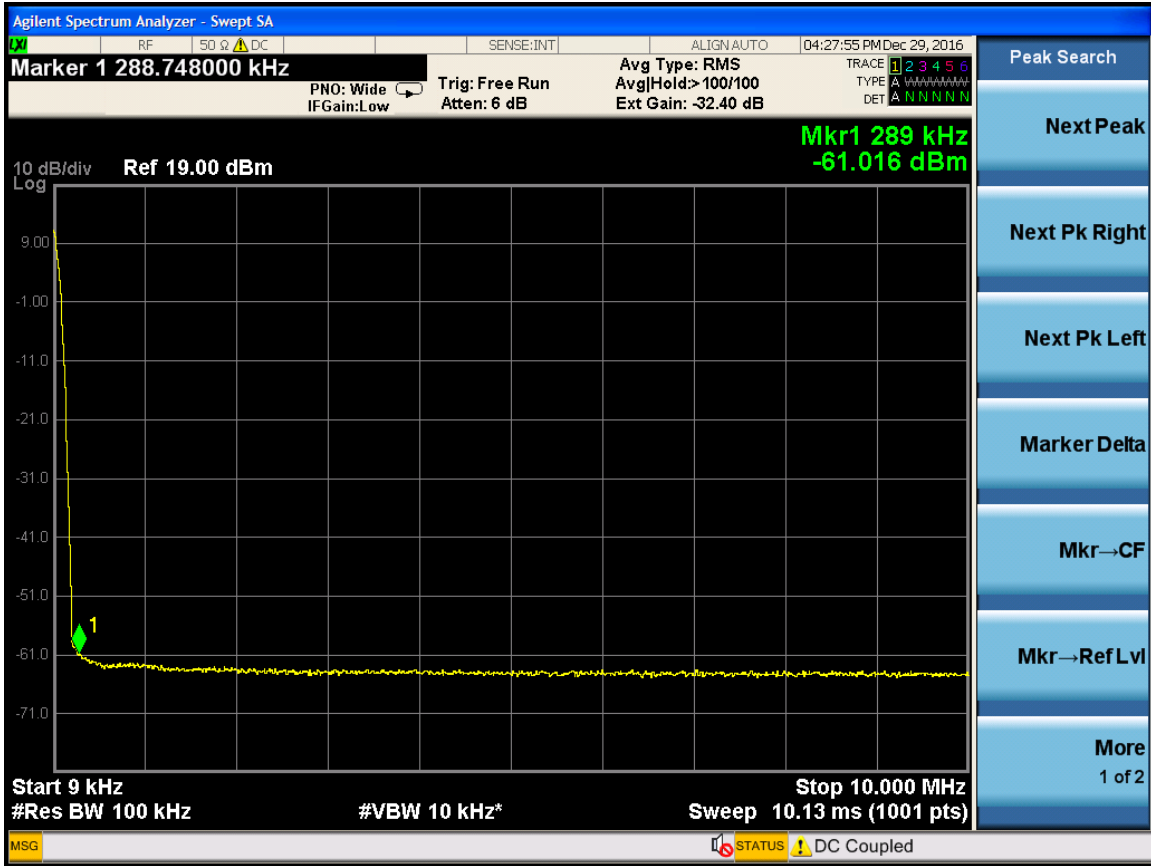


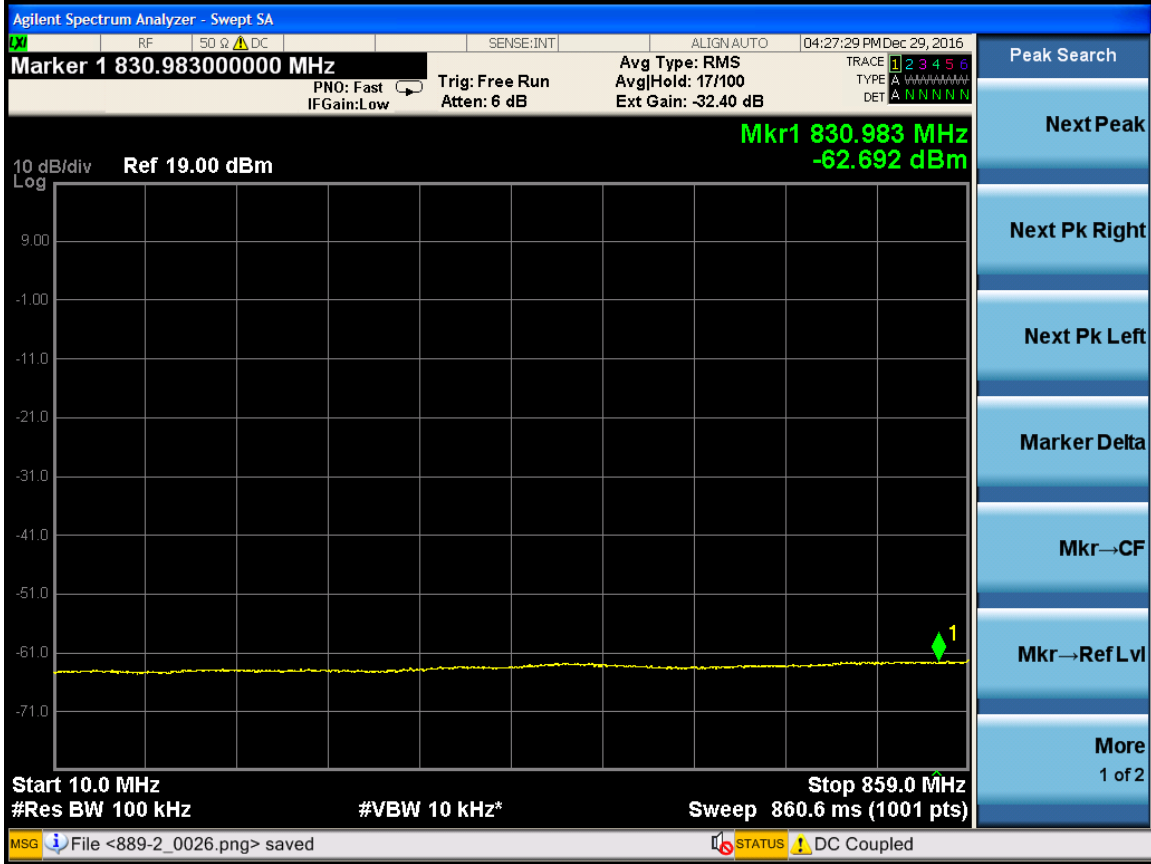


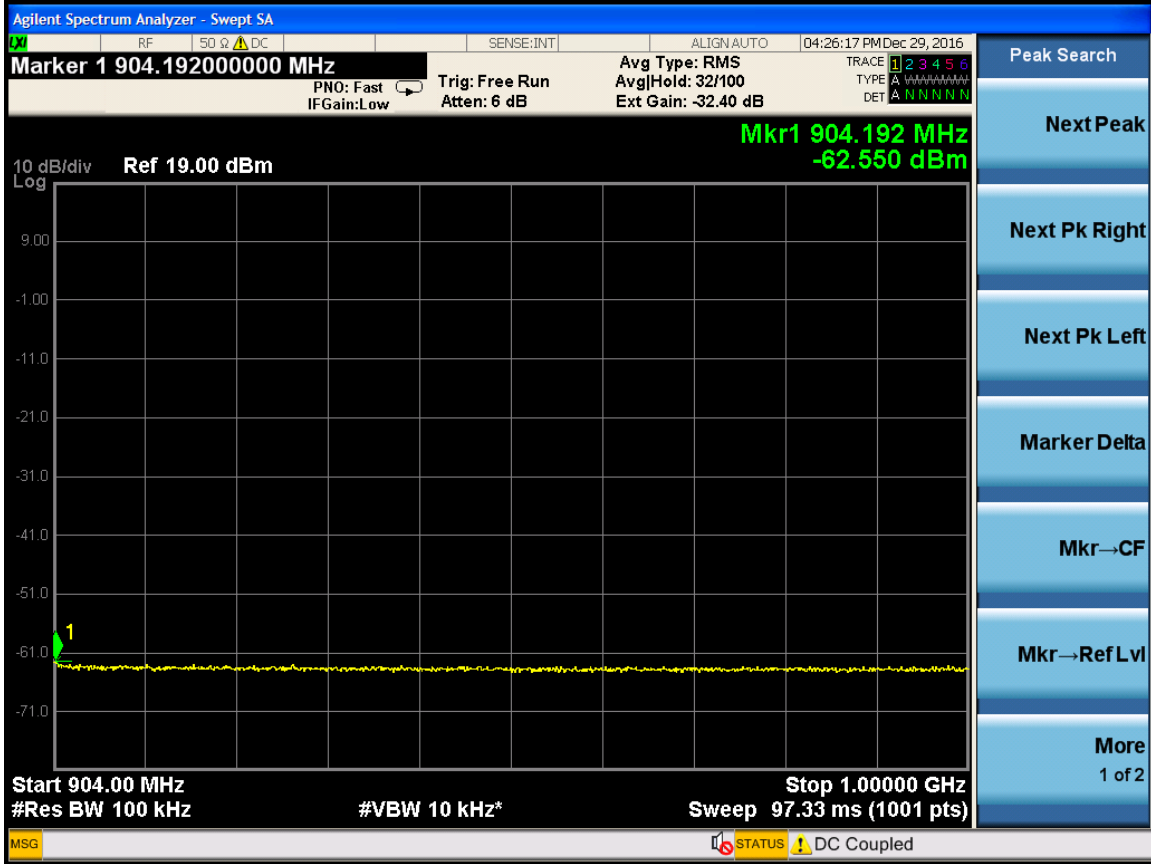


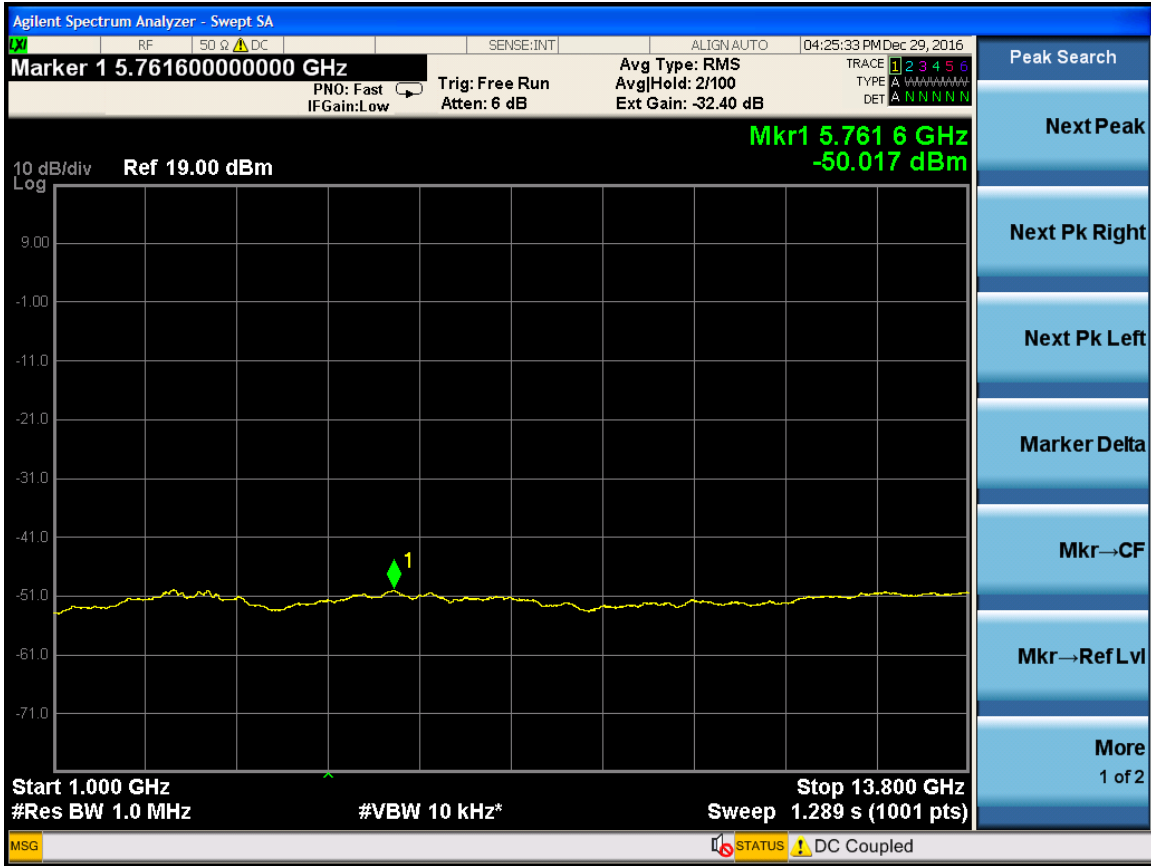


RF 10M(LTE 10M) -Port1-874MHz

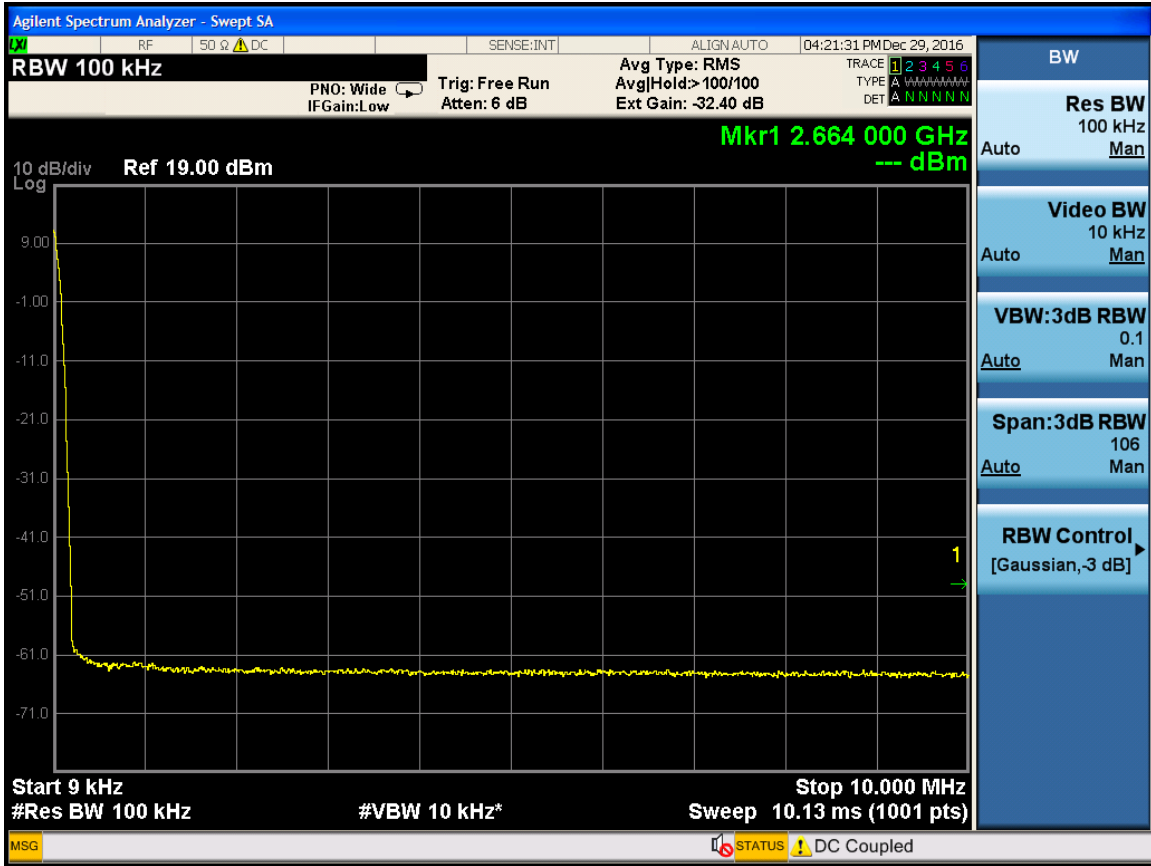


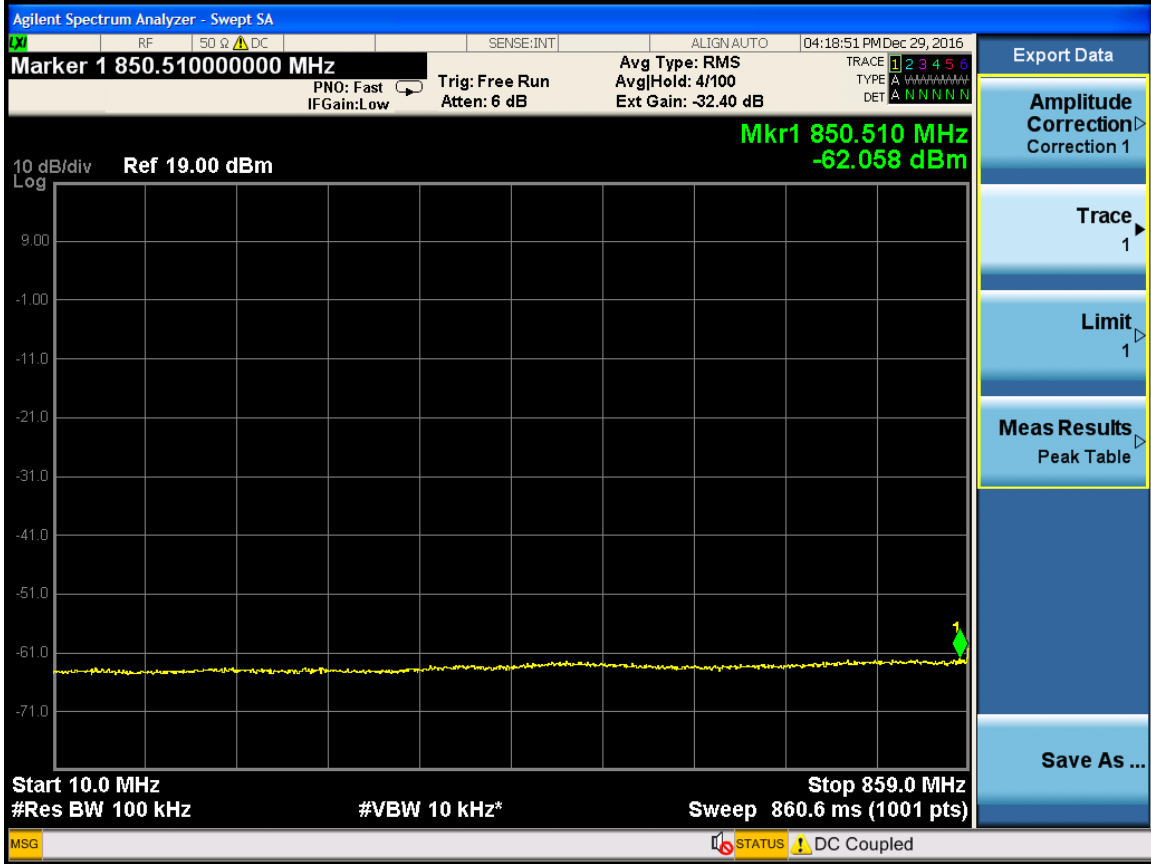


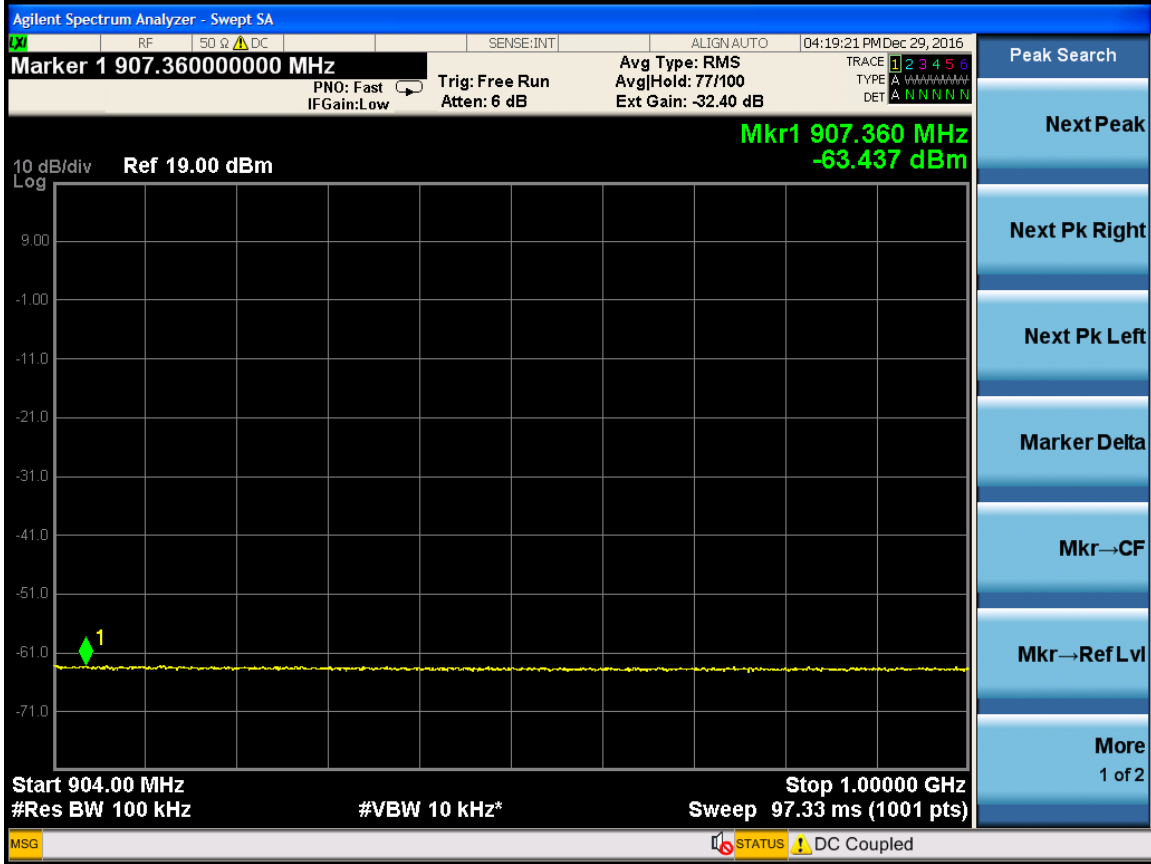


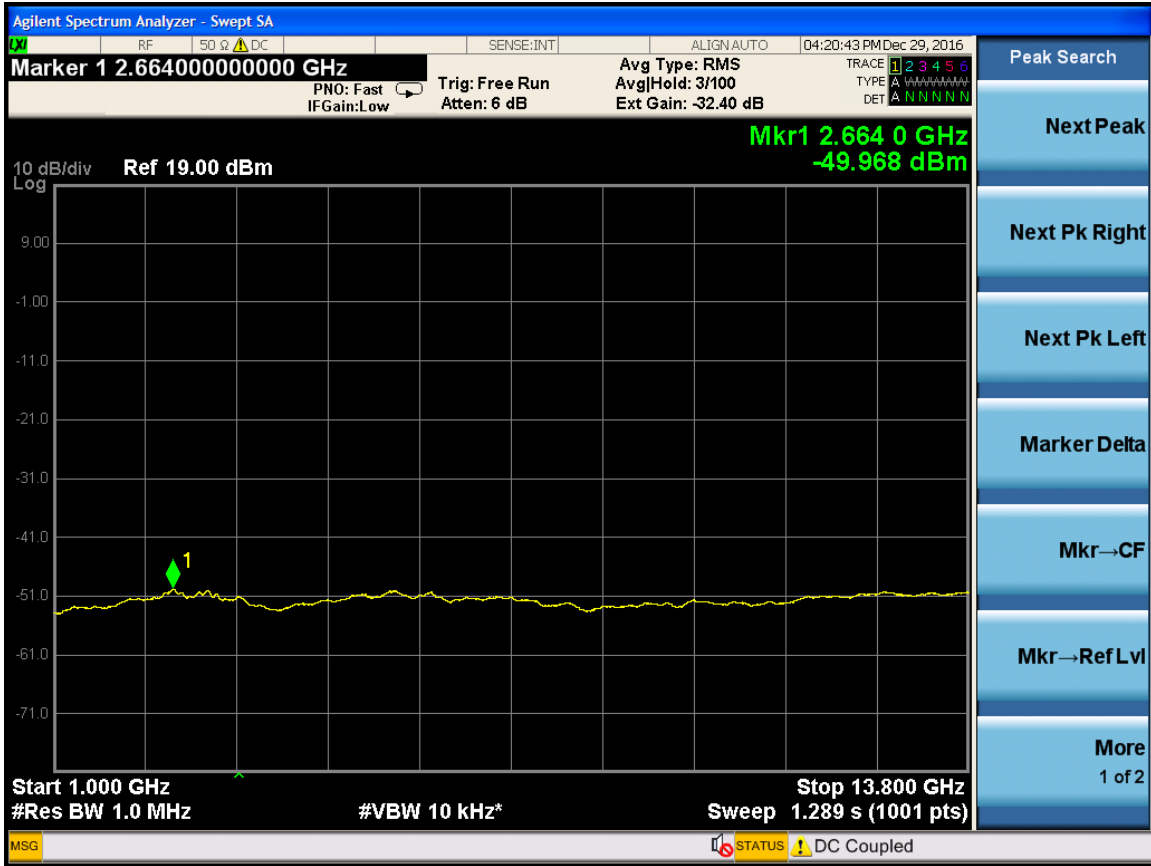


RF 10M(LTE 10M) -Port1-881.5MHz

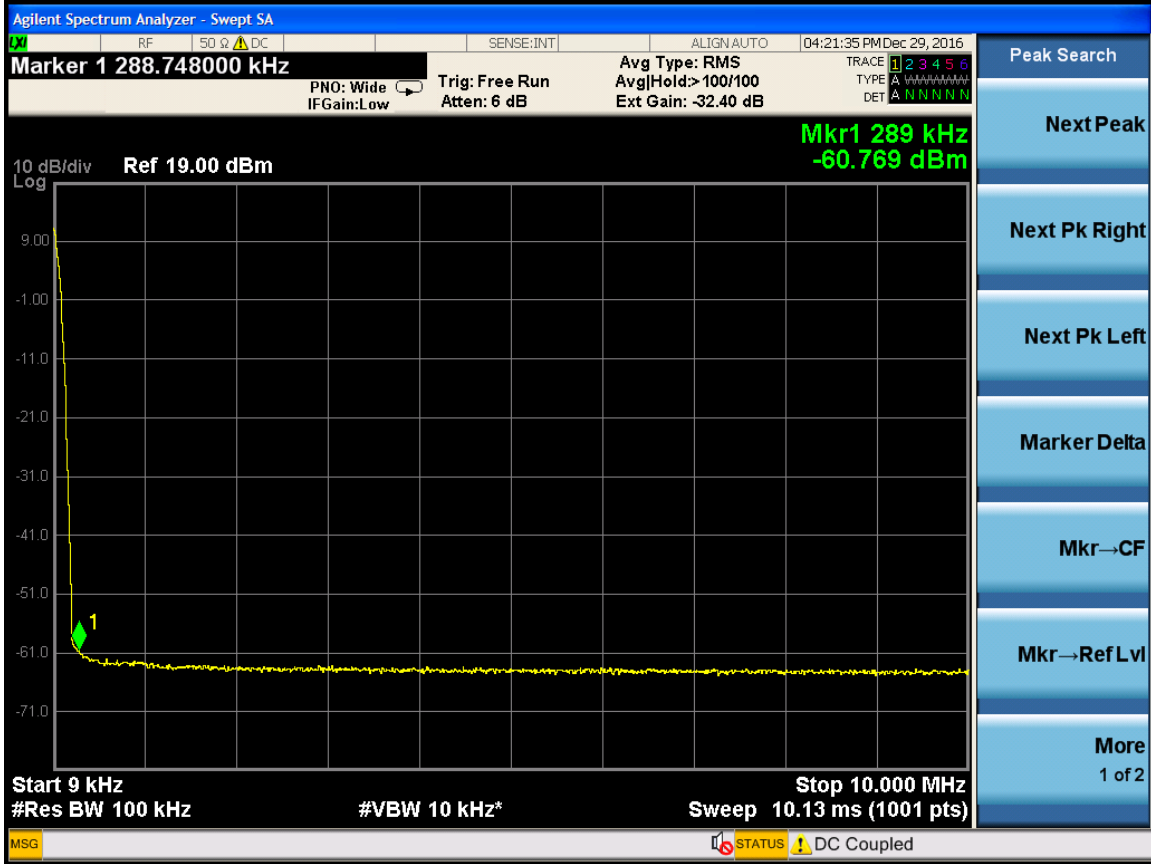


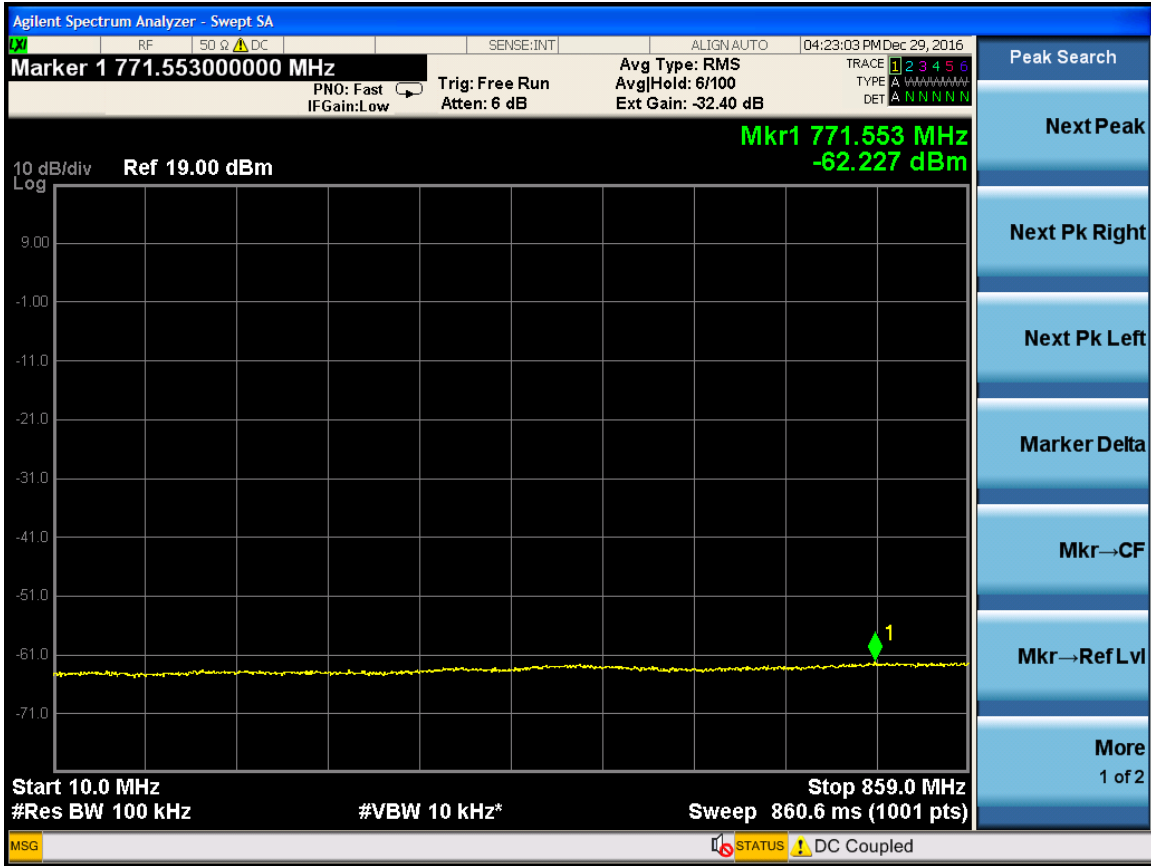


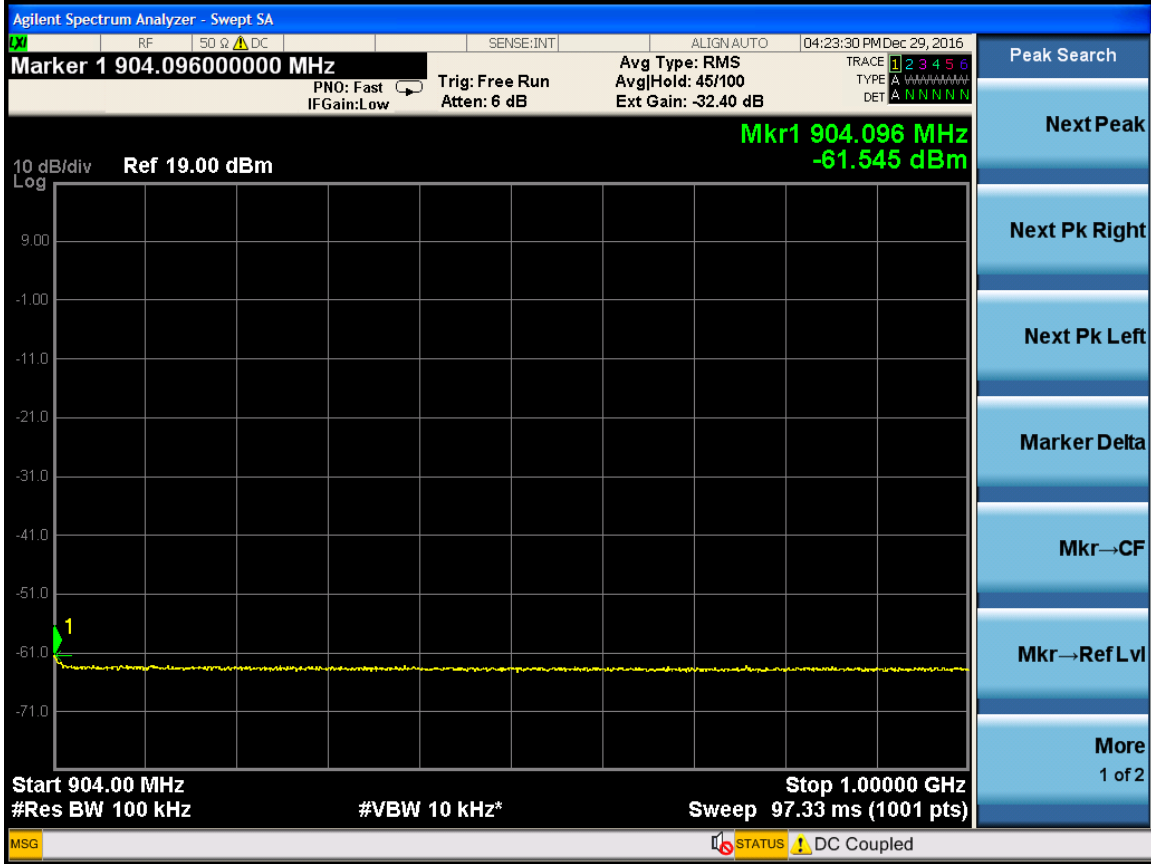


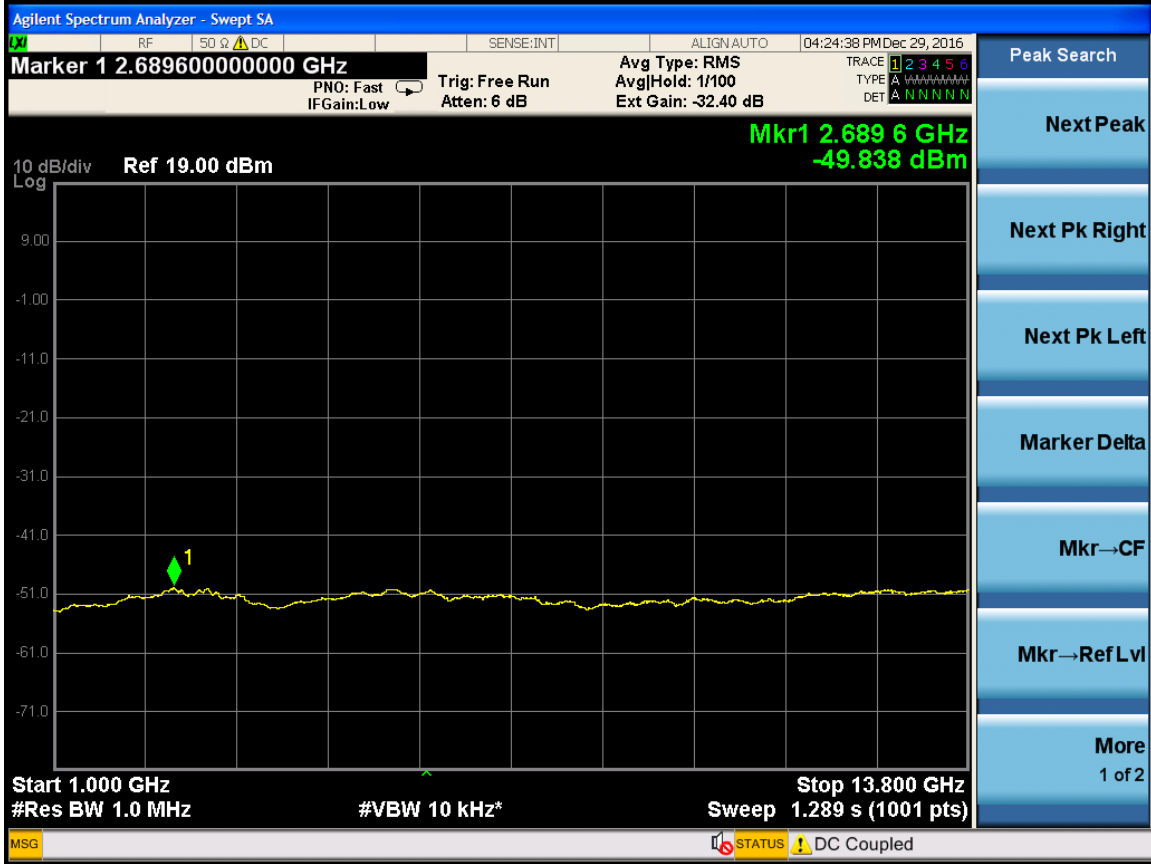


RF 10M(LTE 10M) -Port1-889MHz

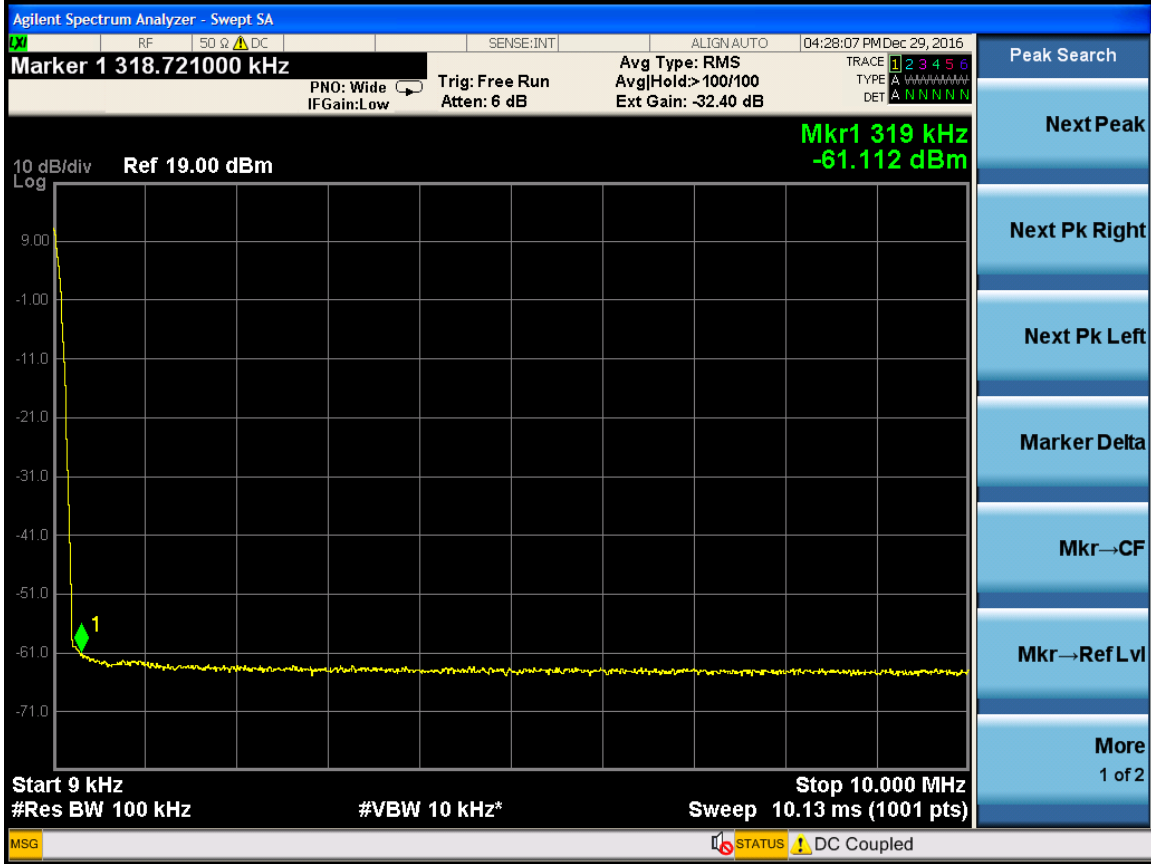


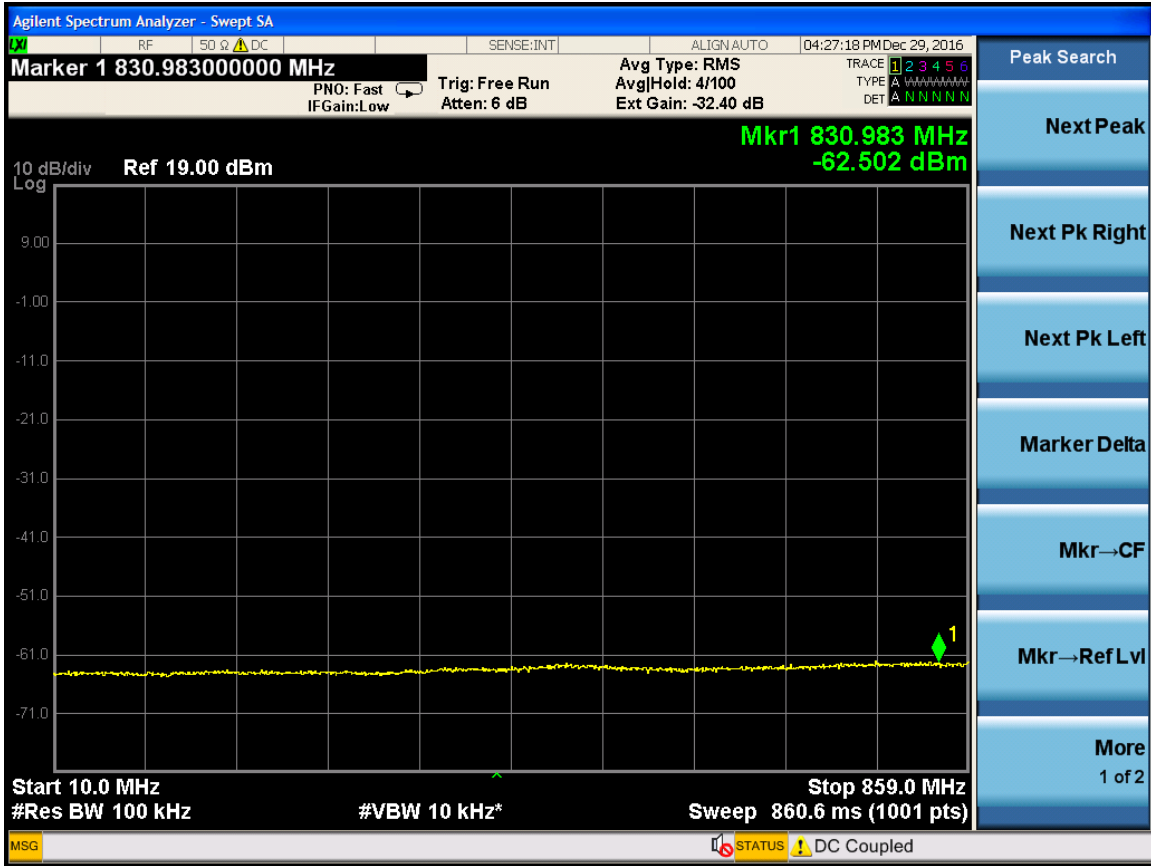


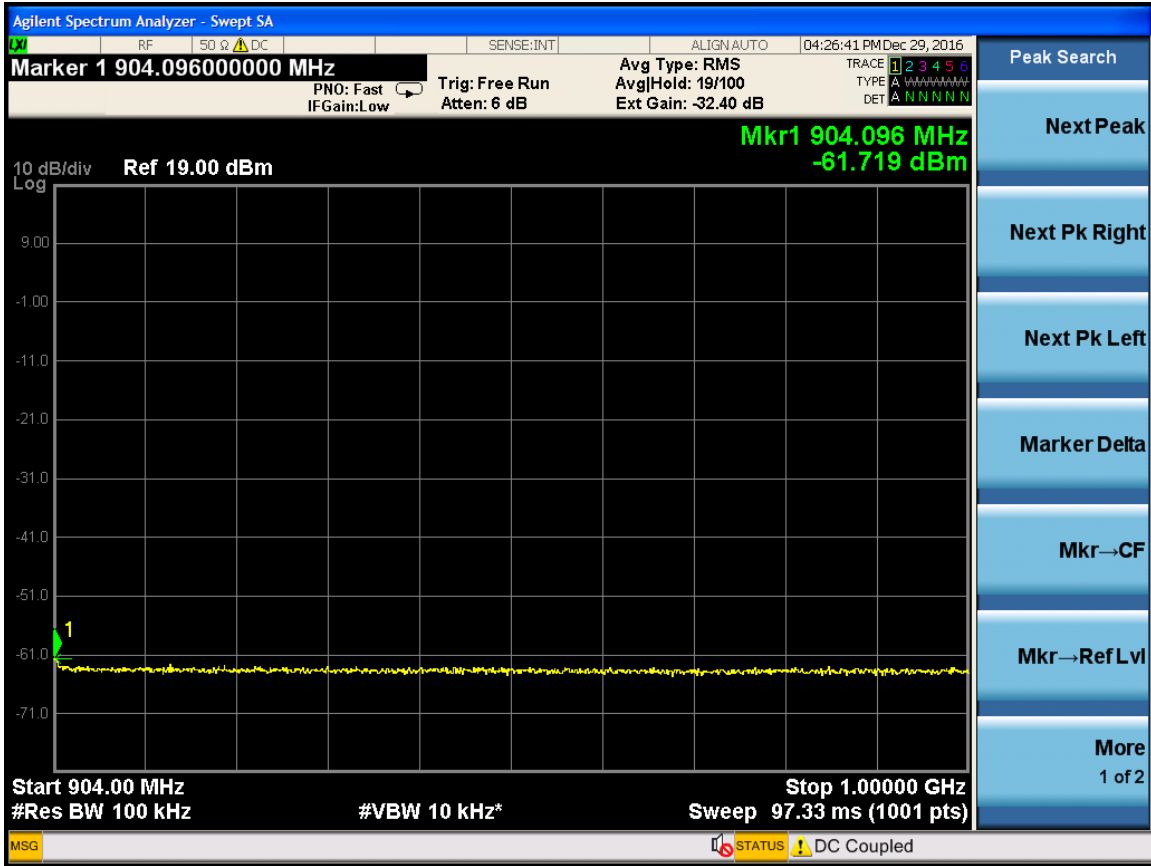


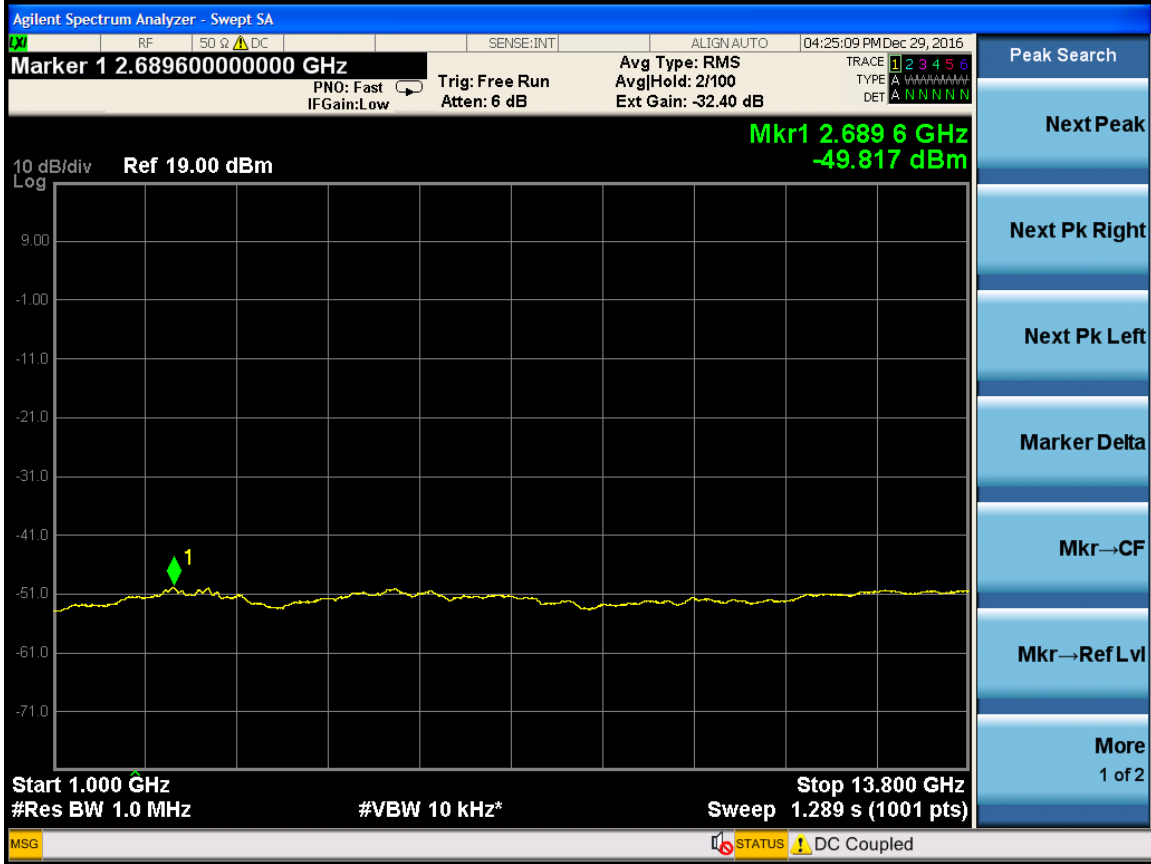

RF 5M(LTE 5M) -Port0-871.5MHz

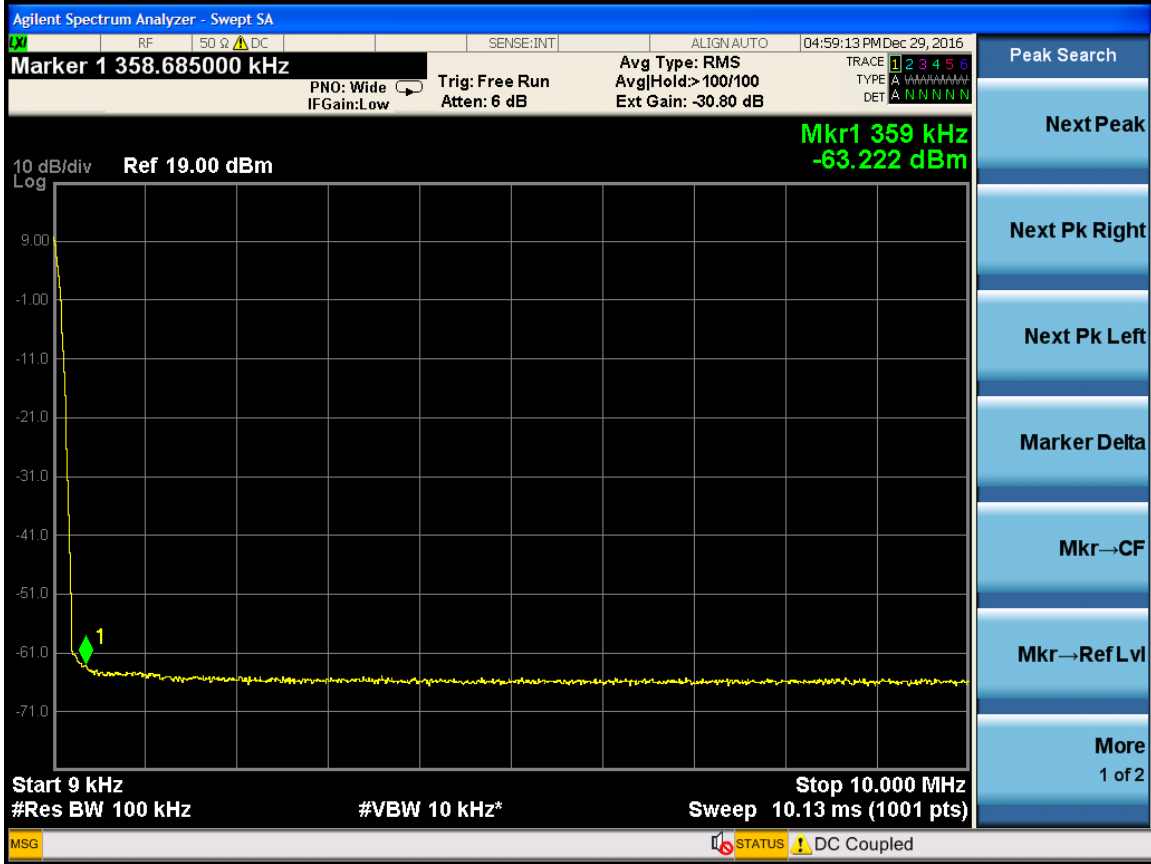


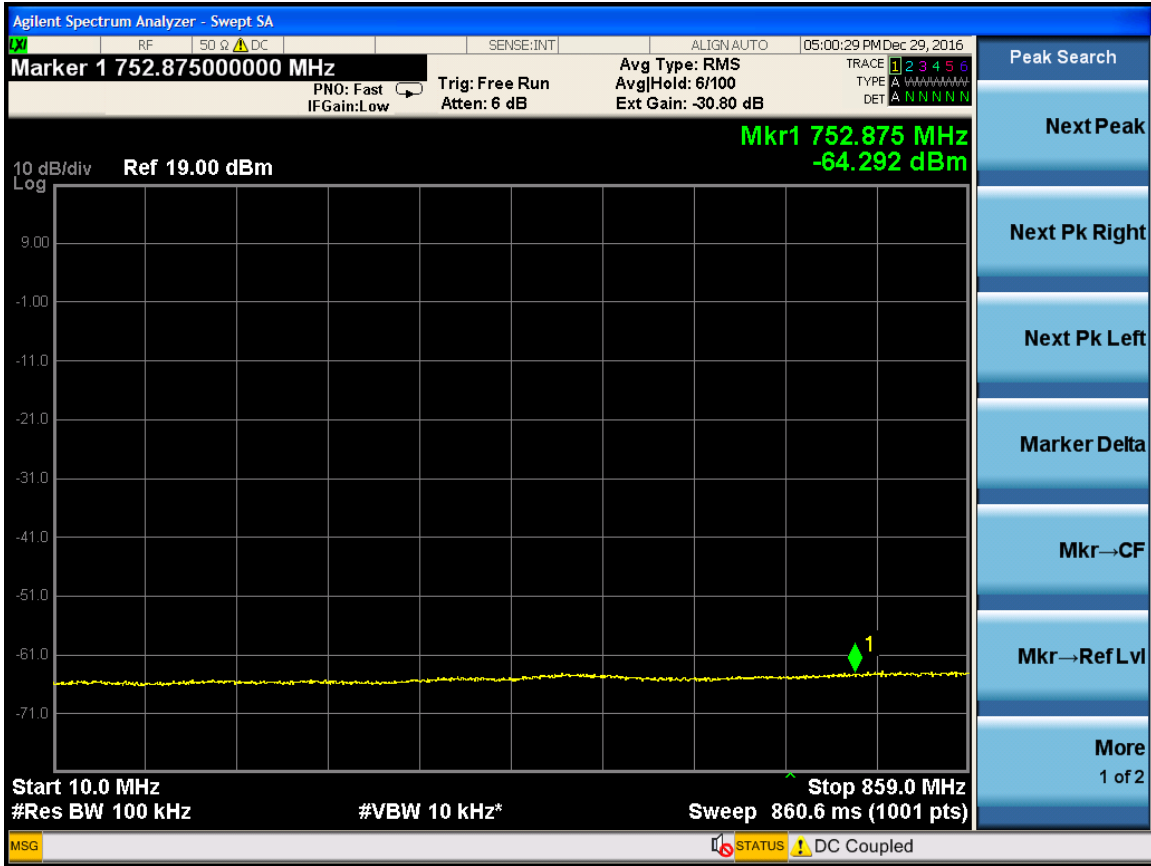


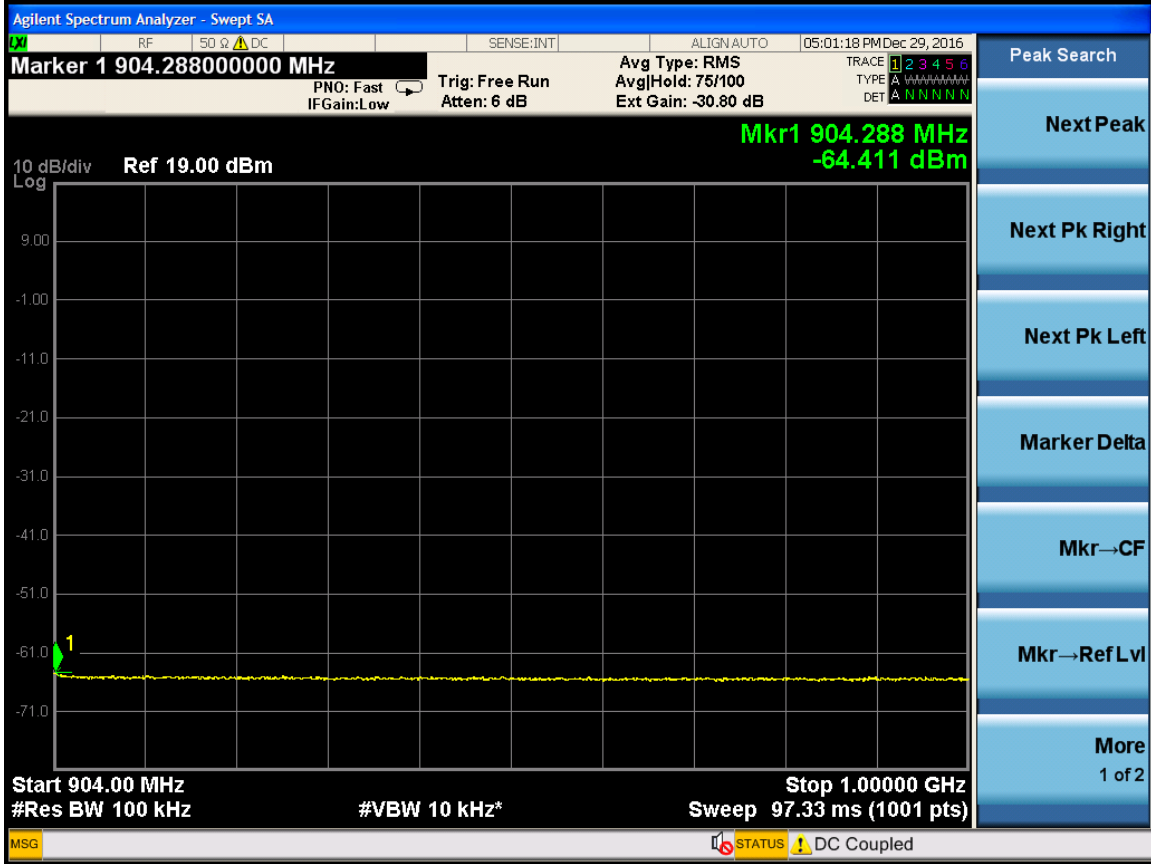




RF 5M(LTE 5M) -Port0-881.5MHz

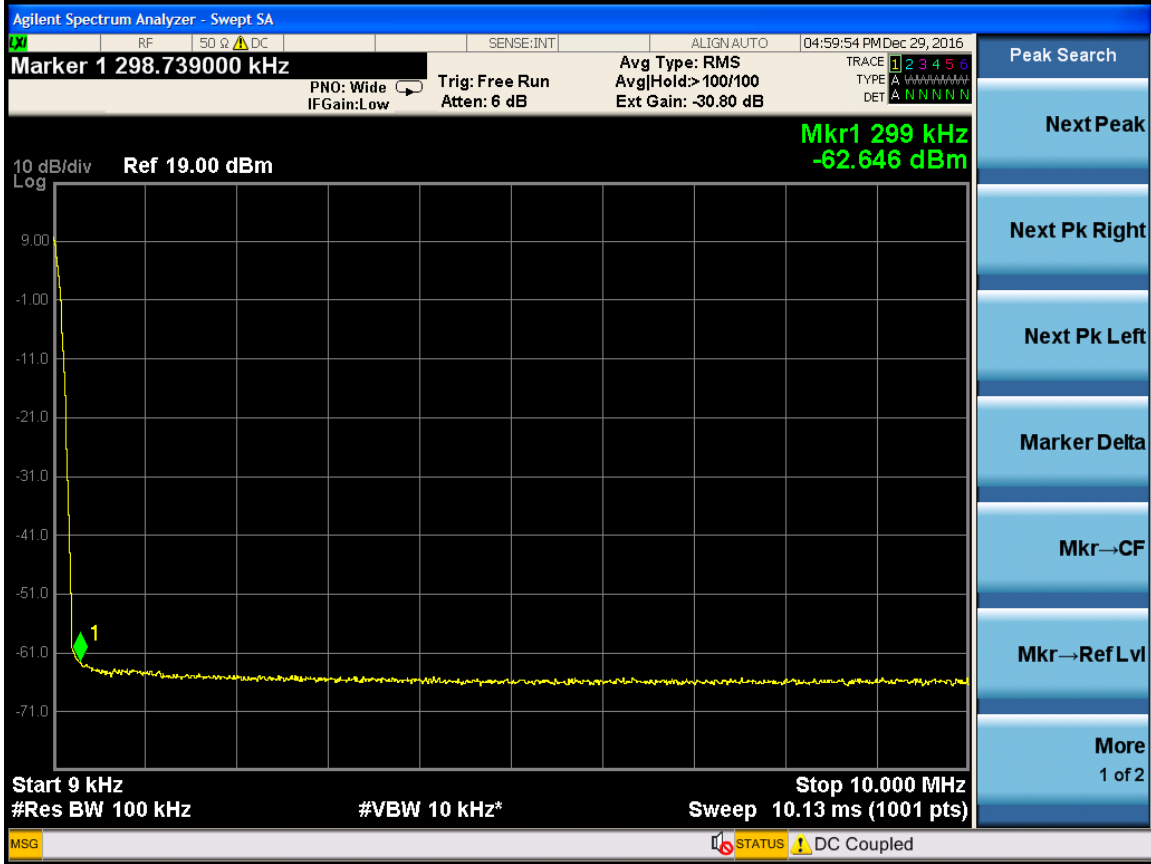


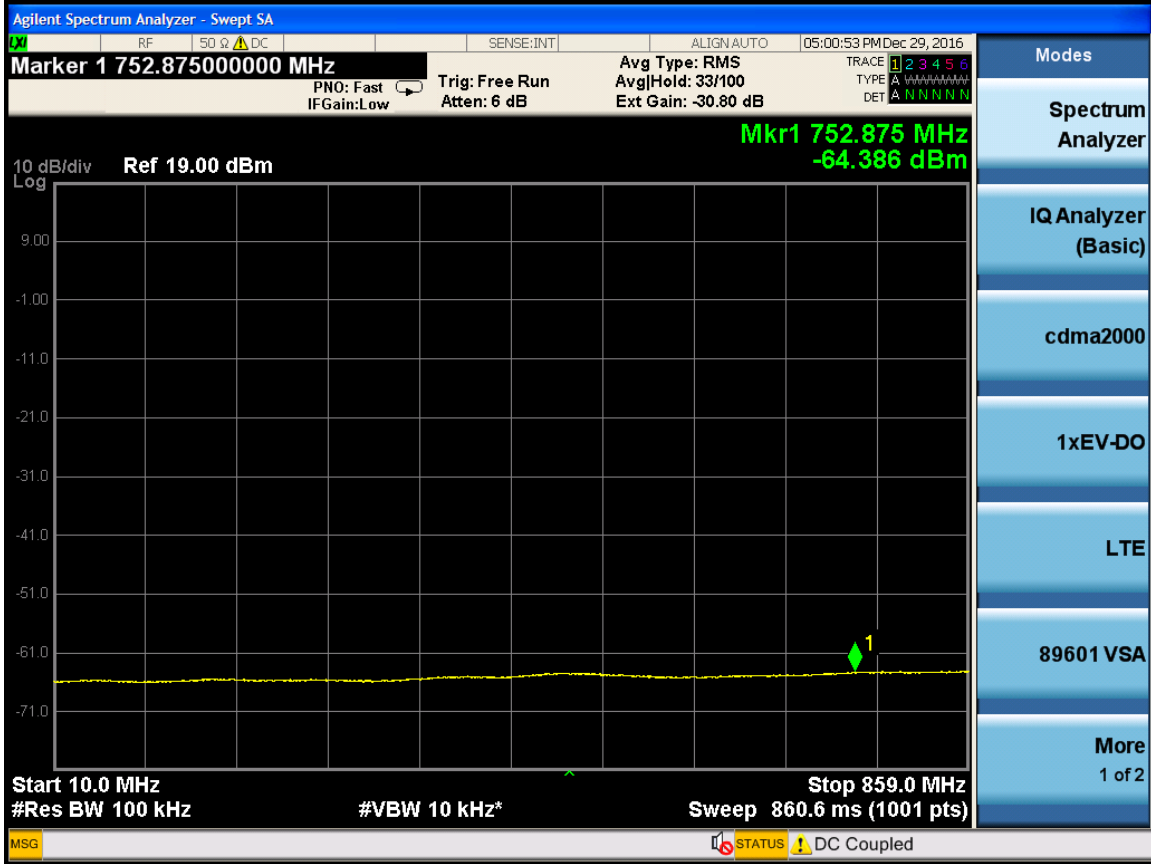


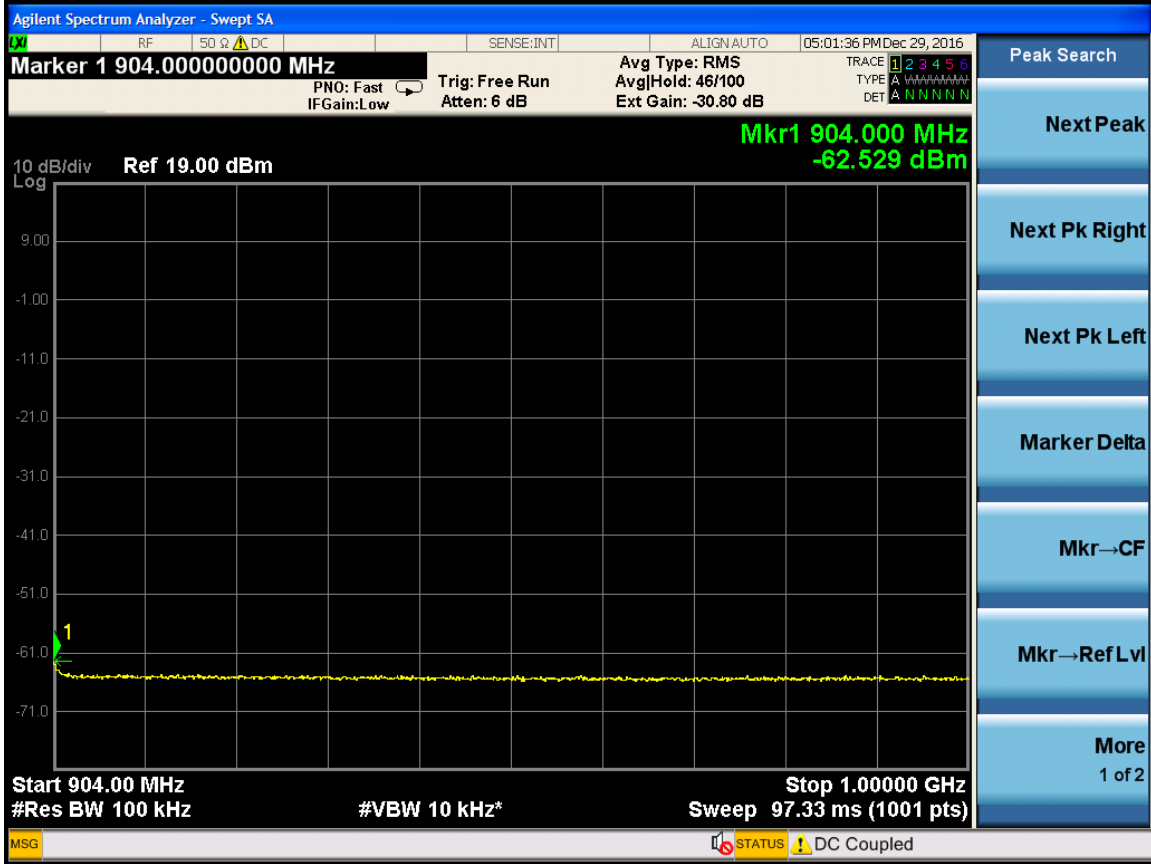





RF 5M(LTE 5M) -Port0-891.5MHz

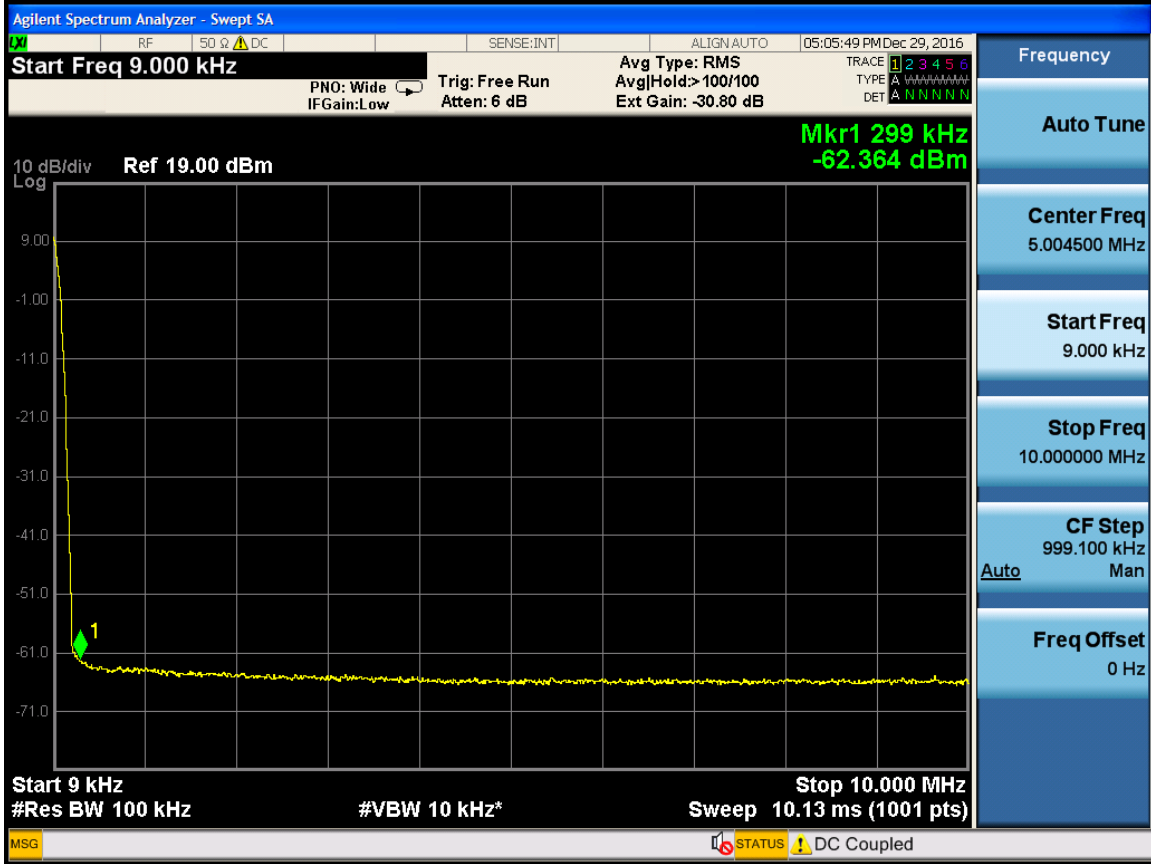


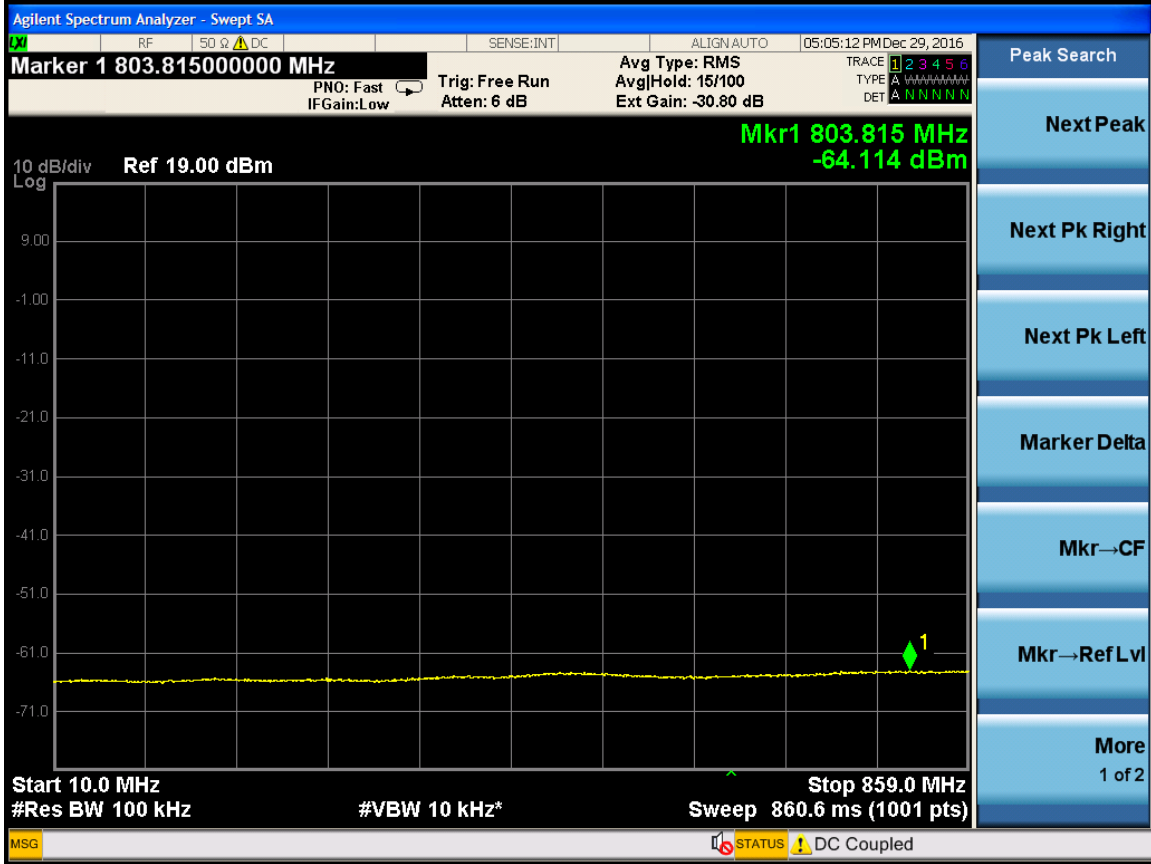


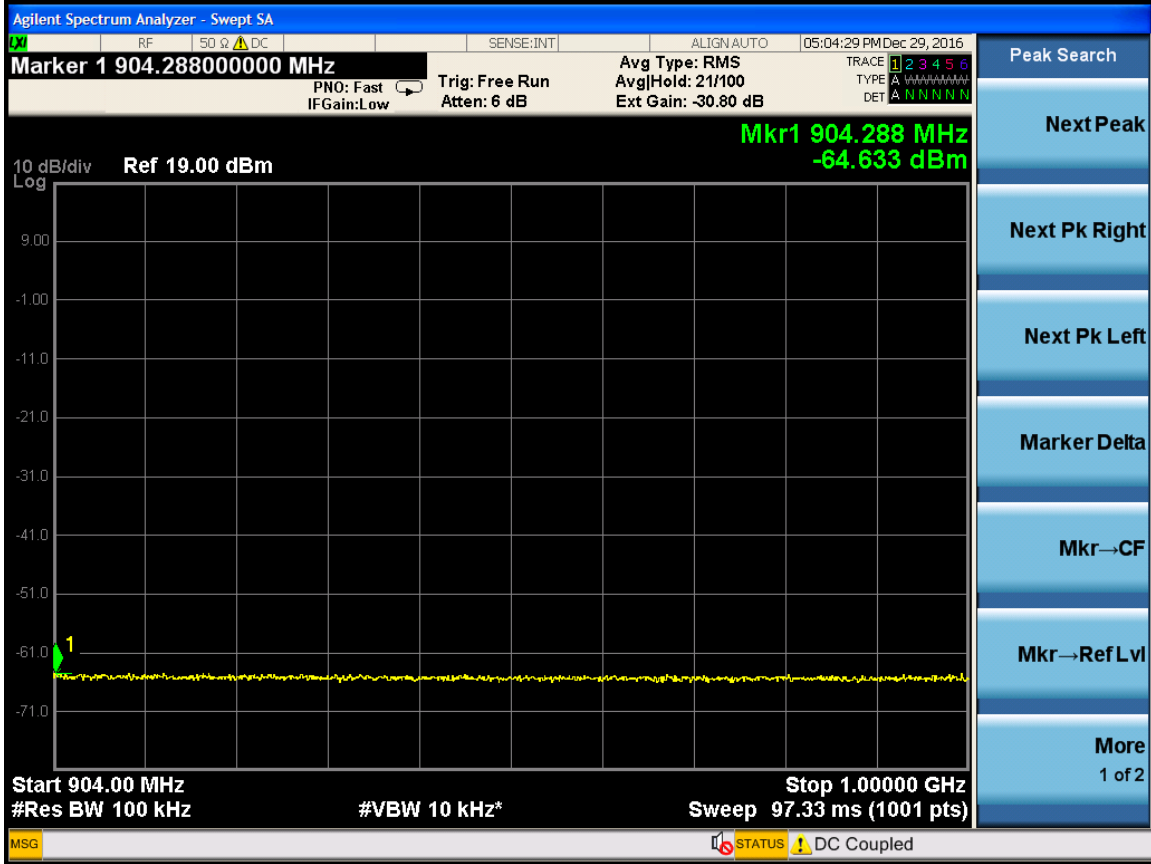


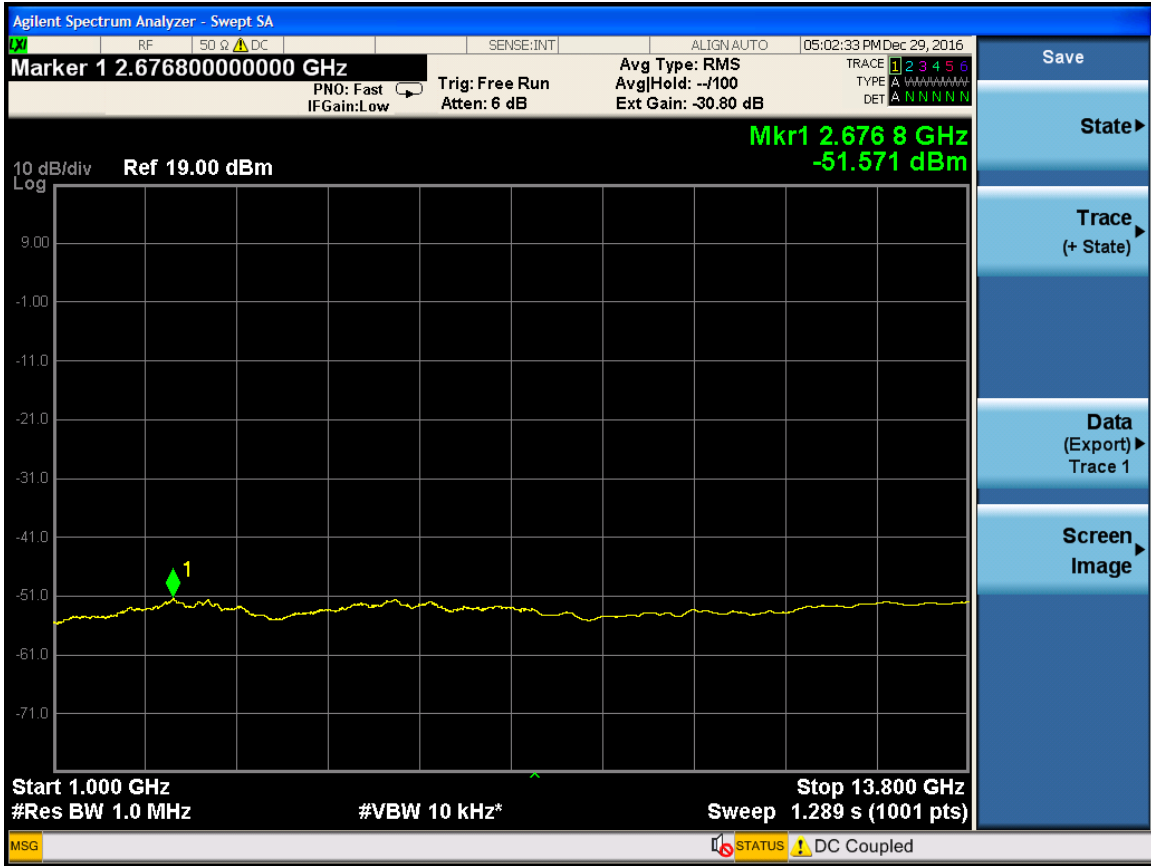

RF 5M(LTE 5M) -Port1-871.5MHz

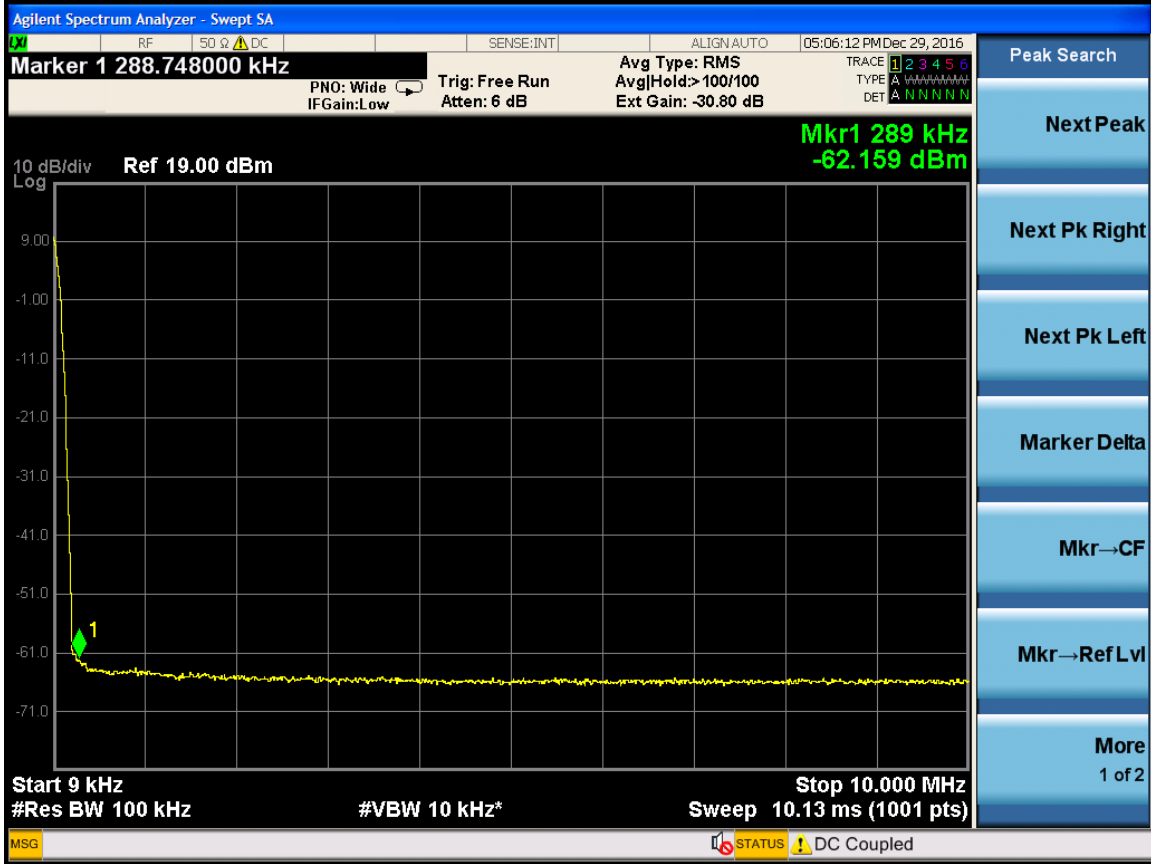


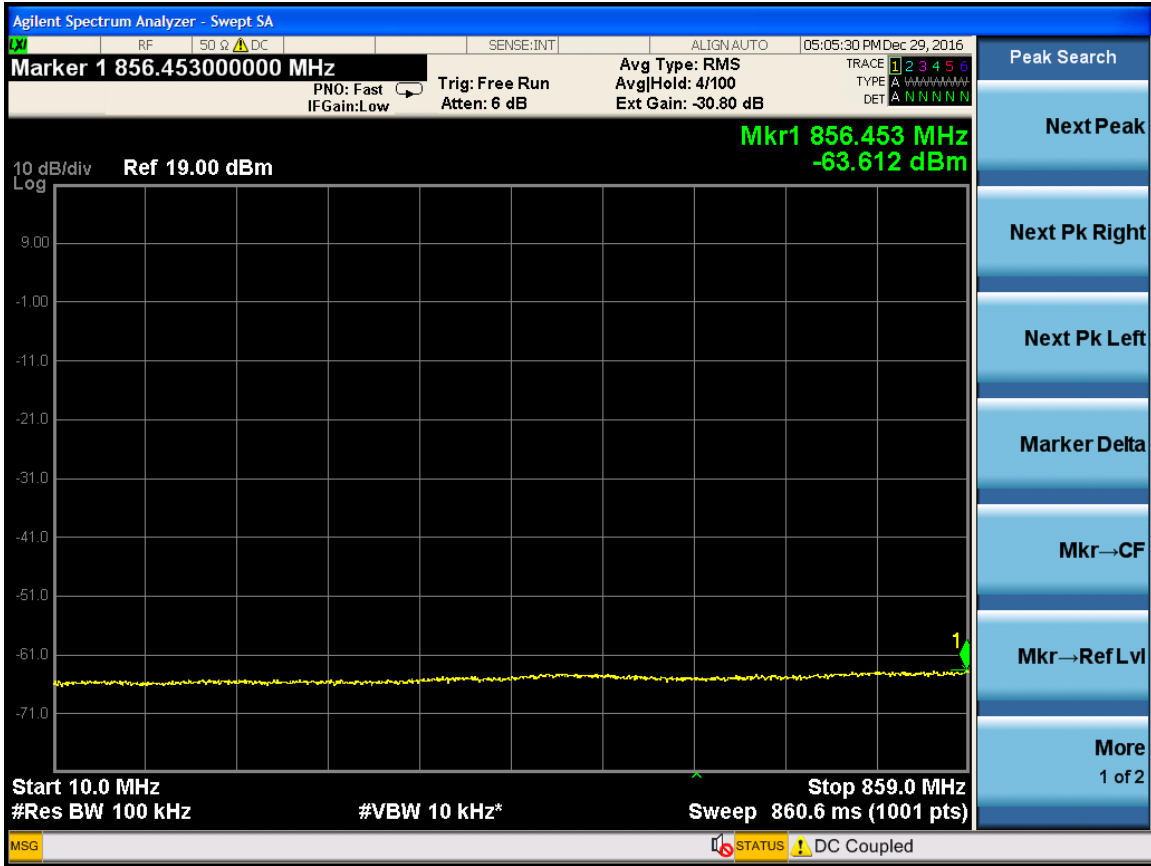


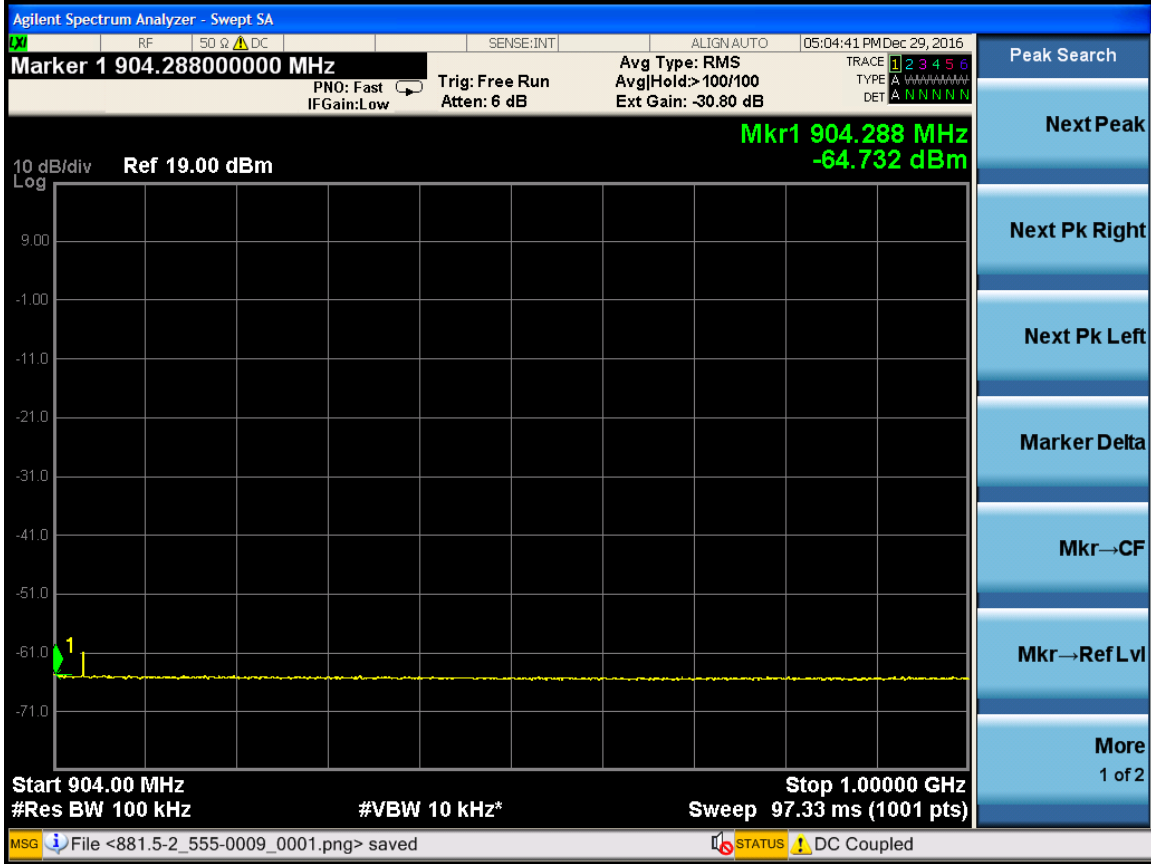




RF5M(LTE5M)-Port1-881.5MHz

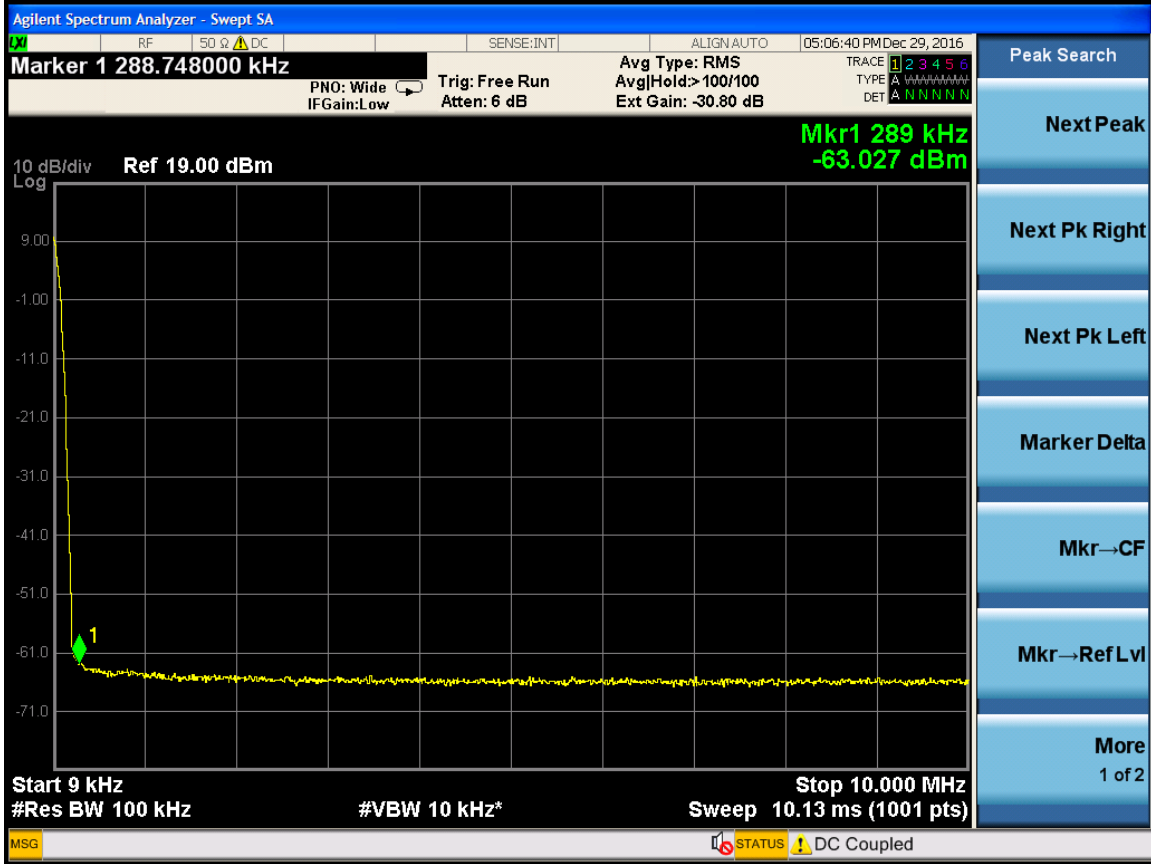


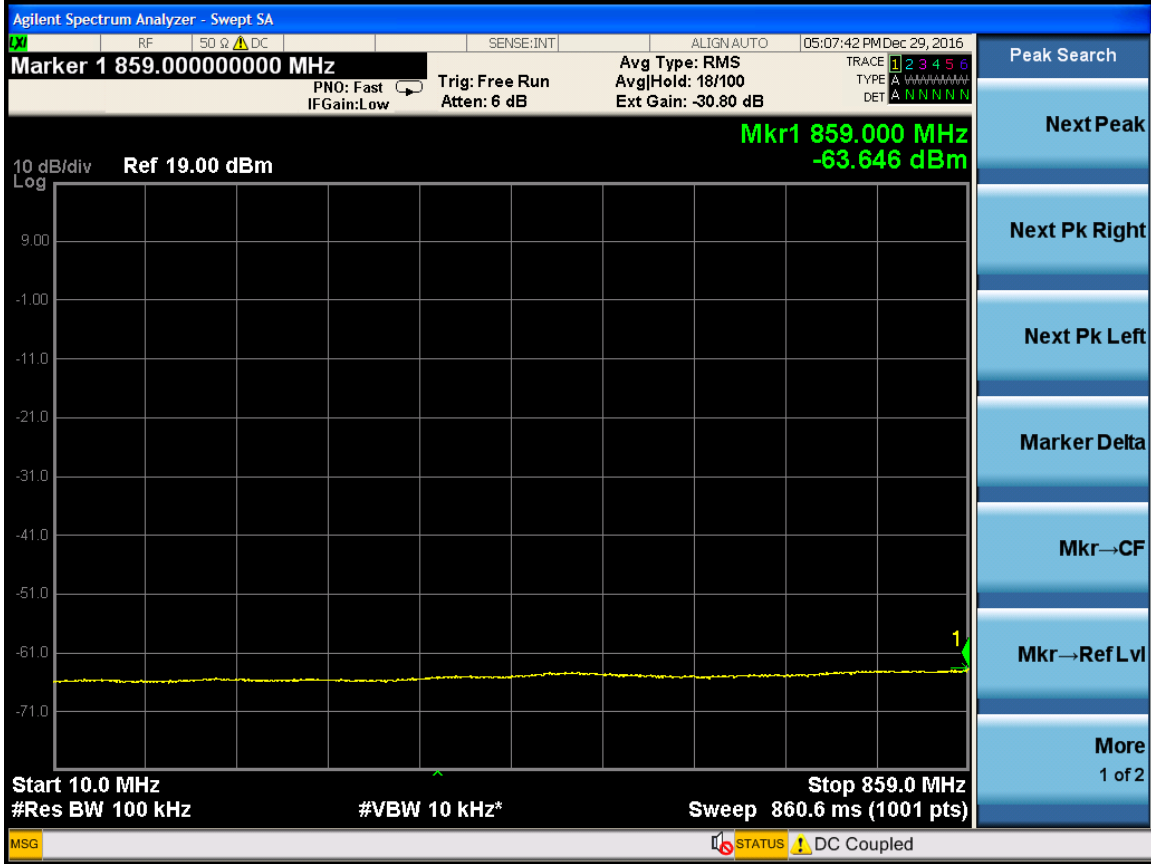


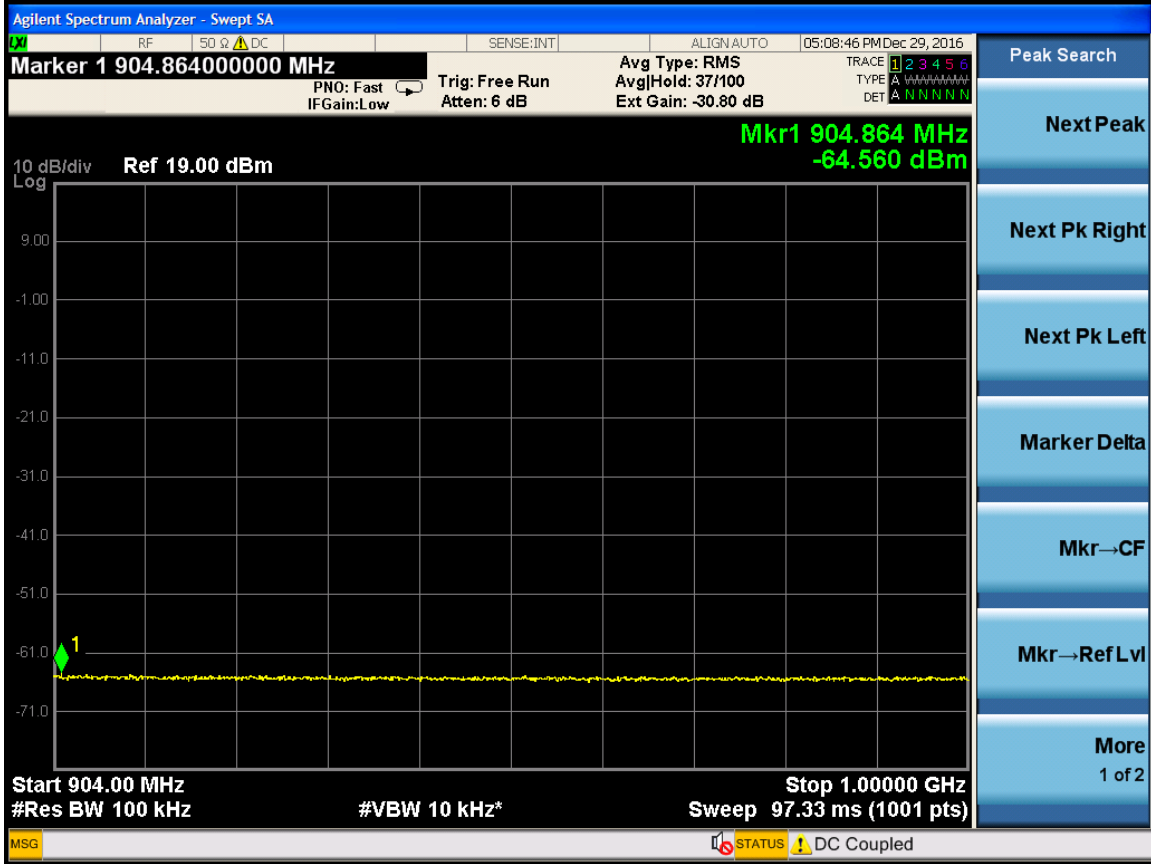





RF5M(LTE5M)-Port1-891.5MHz

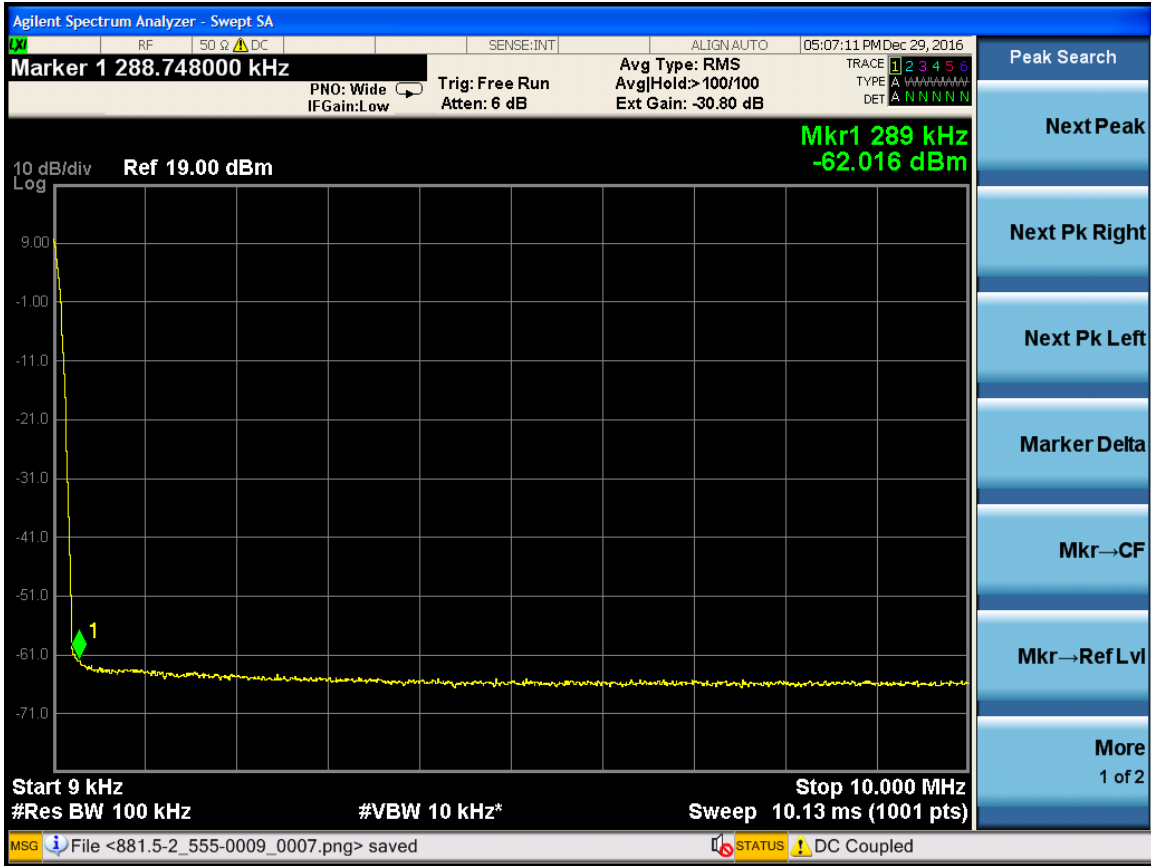

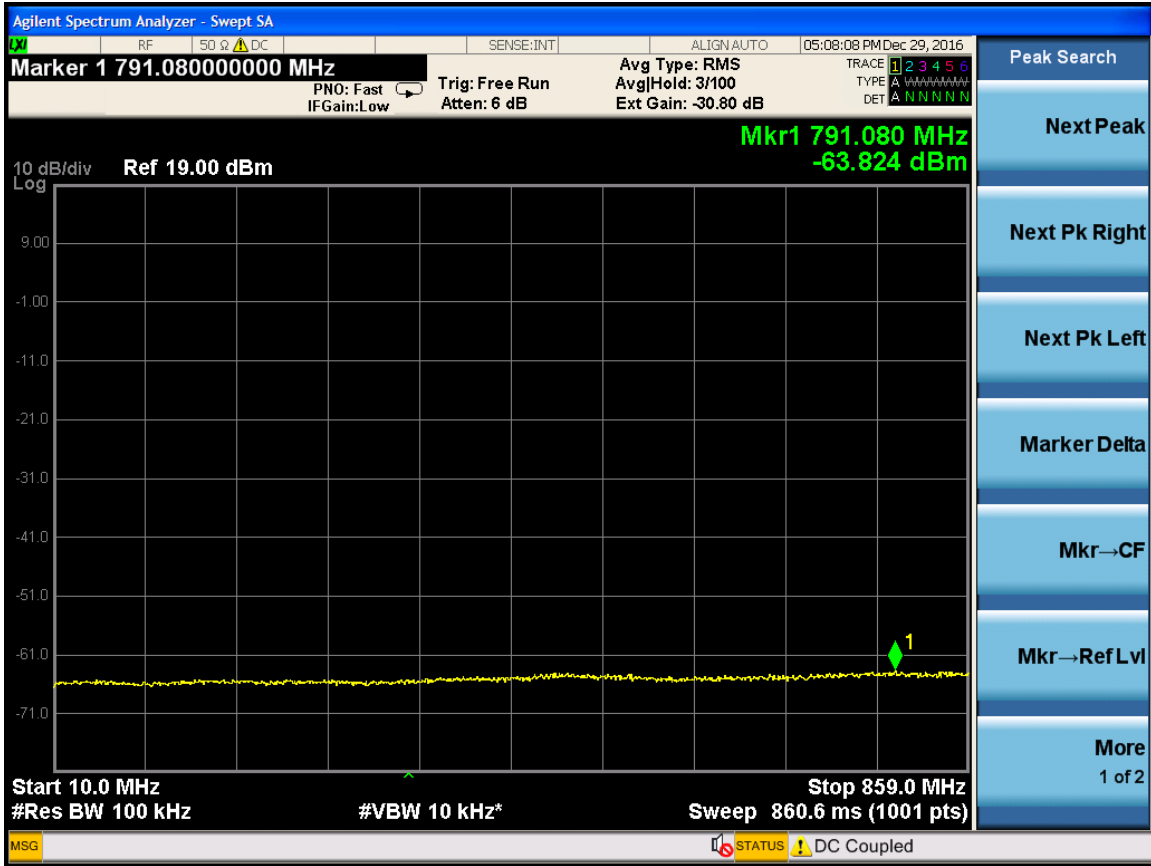

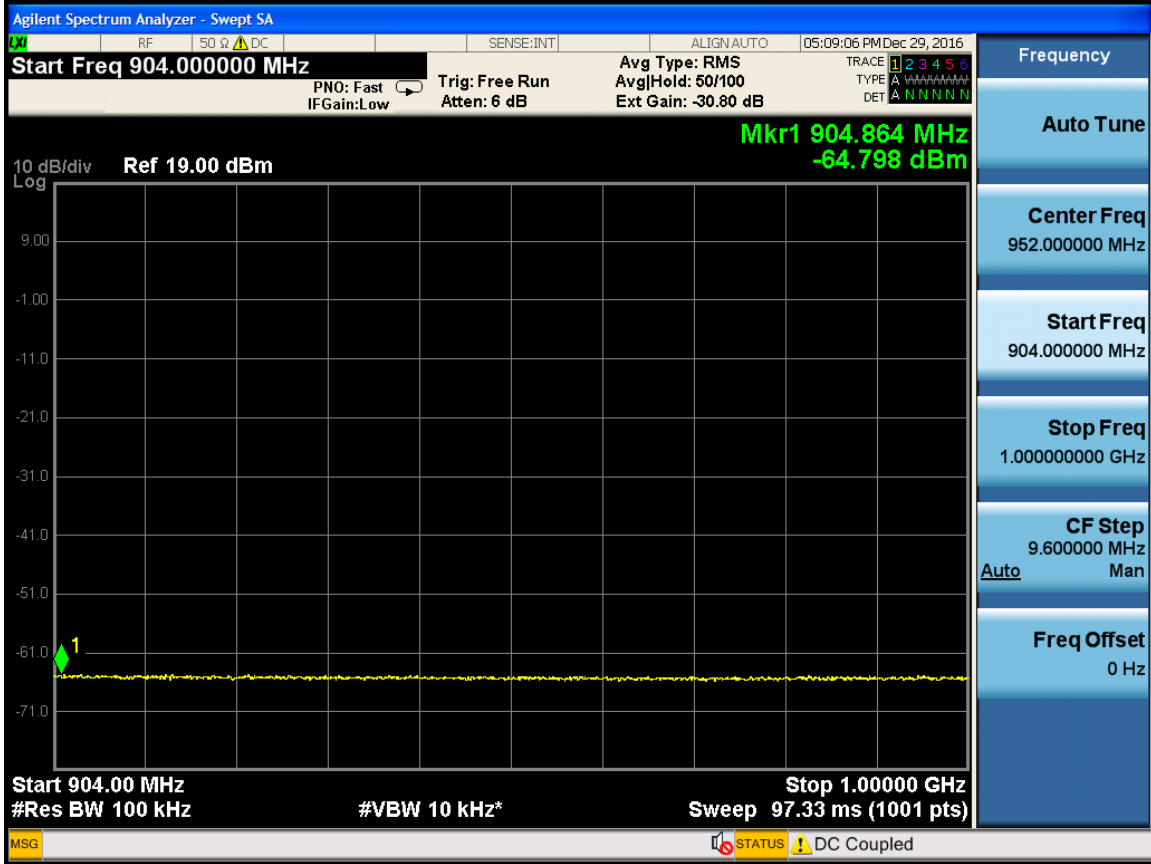

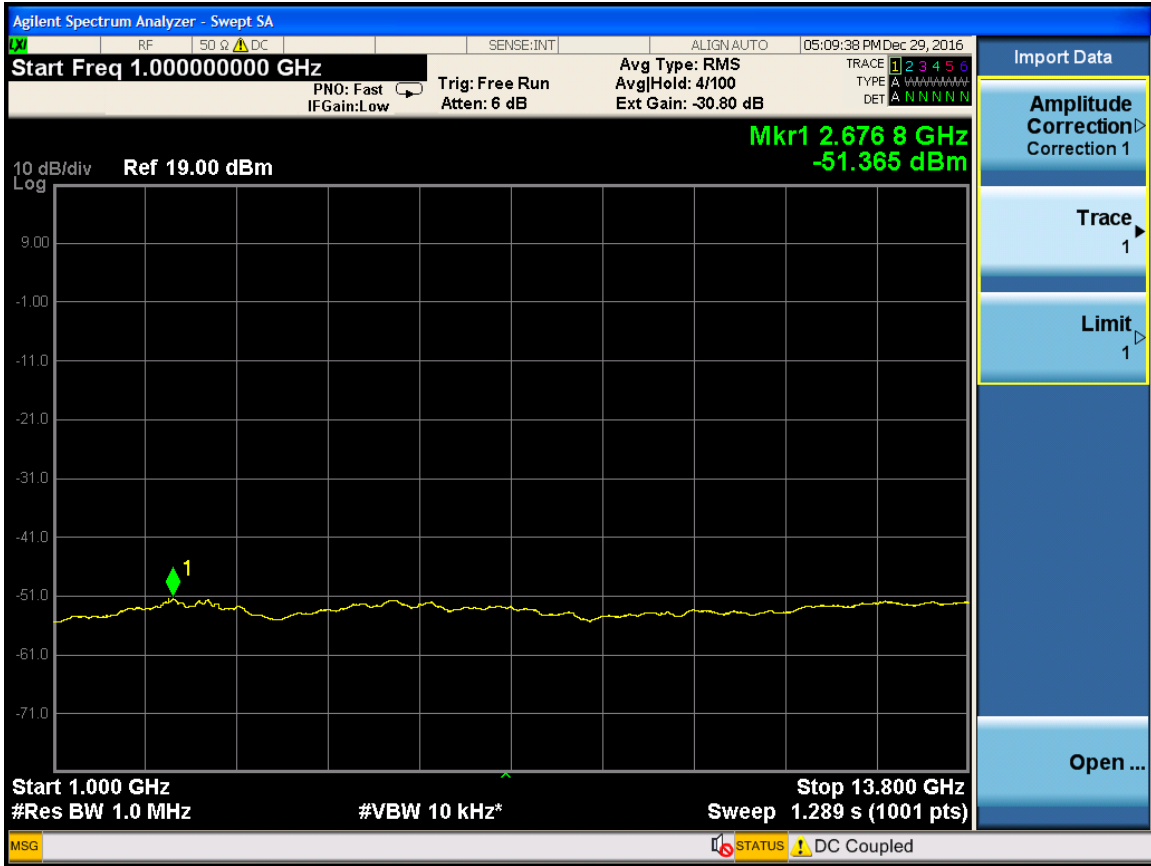

10 OCCUPIED BANDWIDTH

Applicable Standard: FCC §2.1049

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9030A	MY49431143	2016.09.12	2017.09.12

DTS	DTS 30dB Attenuator	DTS50-30-3-1	09112005	2016.09.12	2017.09.12
-----	---------------------	--------------	----------	------------	------------

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

The RF out of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. 99%Power bandwidth was recorded.

Environmental Conditions

Temperature:	20 ° C
Relative Humidity:	53%
ATM Pressure:	1009mbar

Test Result: Pass

Test Mode: Transmitting LTE

Test Data

RF Bandwidth :IBW 20M(LTE 20M)

Port	RF Center Freq. (MHz)	99% Power Bandwidth (MHz)	Limit (MHz)
0	879	17.7810217	20M
	881.5	17.77100012	20M
	884	17.77147791	20M
1	879	17.81701929	20M
	881.5	17.80694511	20M
	884	17.80984576	20M

RF Bandwidth :IBW 15M(LTE 15M)

Port	RF Center Freq. (MHz)	99% Power Bandwidth (MHz)	Limit (MHz)
0	876.5	13.334	15M
	881.5	13.310	15M
	886.5	13.380	15M
1	876.5	13.412	15M
	881.5	13.393	15M

	886.5	13.356	15M
--	-------	--------	-----


RF Bandwidth :IBW 10M(LTE 10M)

Port	RF Center Freq. (MHz)	99% Power Bandwidth (MHz)	Limit (MHz)
0	874	8.7347	10M
	881.5	8.9349	10M
	889	8.9245	10M
1	874	8.9251	10M
	881.5	8.9167	10M
	889	8.9292	10M


RF Bandwidth :IBW 5M(LTE 5M)

Port	RF Center Freq. (MHz)	99% Power Bandwidth (MHz)	Limit (MHz)
0	871.5	4.4785	5M
	881.5	4.4673	5M
	891.5	4.4721	5M
1	871.5	4.4659	5M
	881.5	4.4660	5M
	891.5	4.4766	5M


Port 0 -879MHz

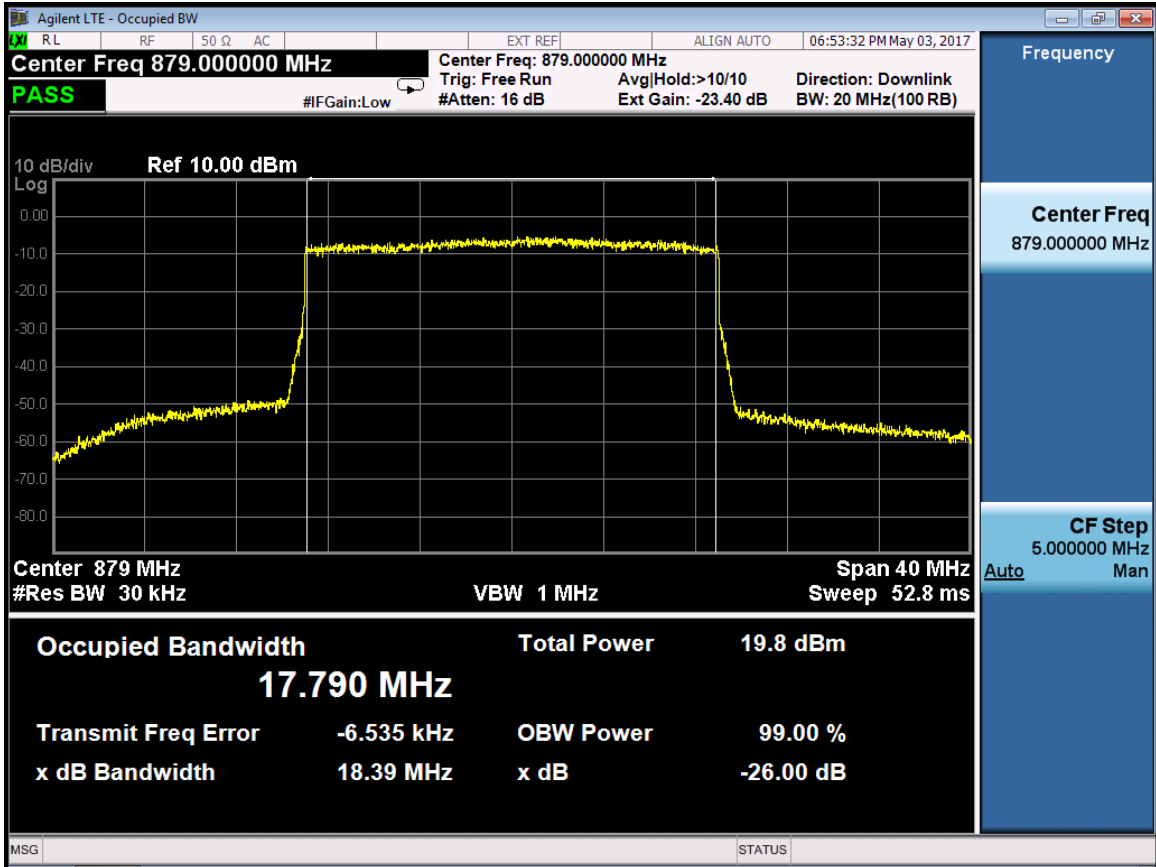


Port 0 -881.5MHz

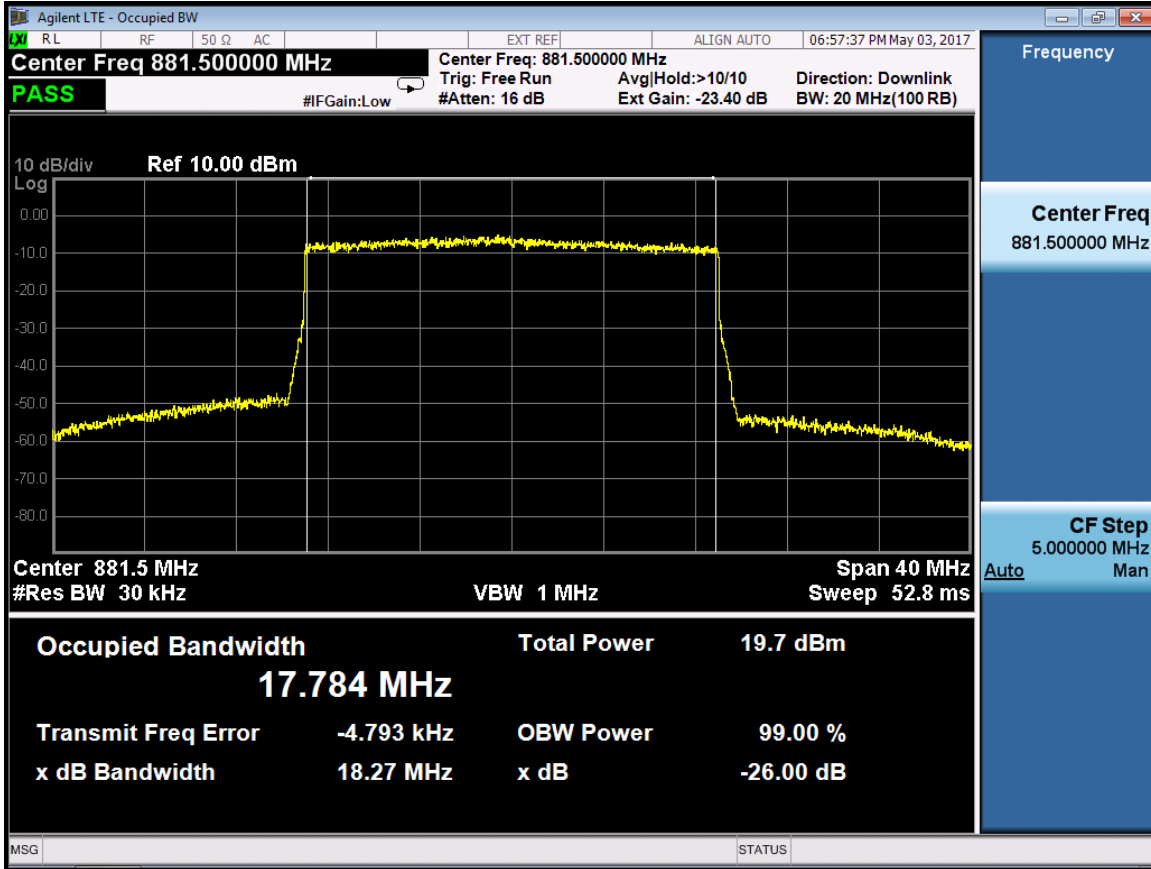


Port 0 -884MHz

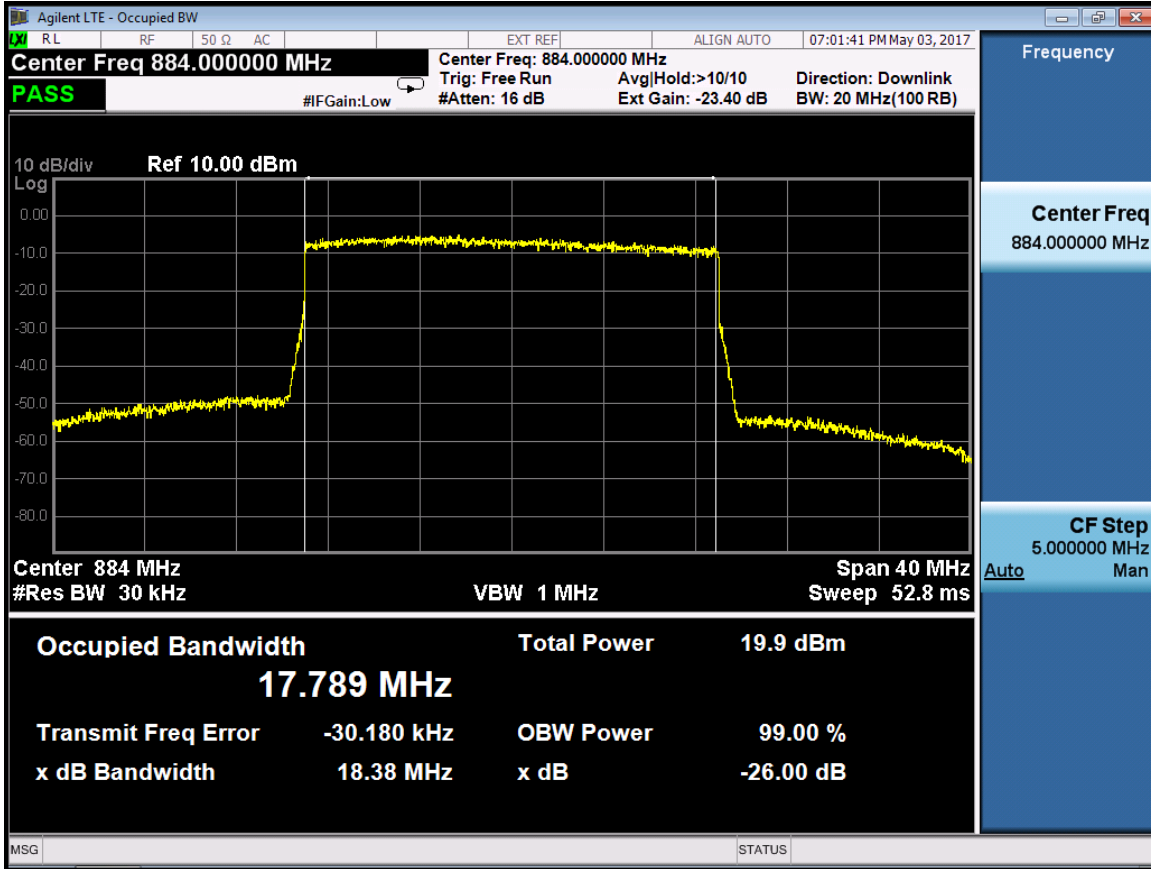

Port 1 -879MHz

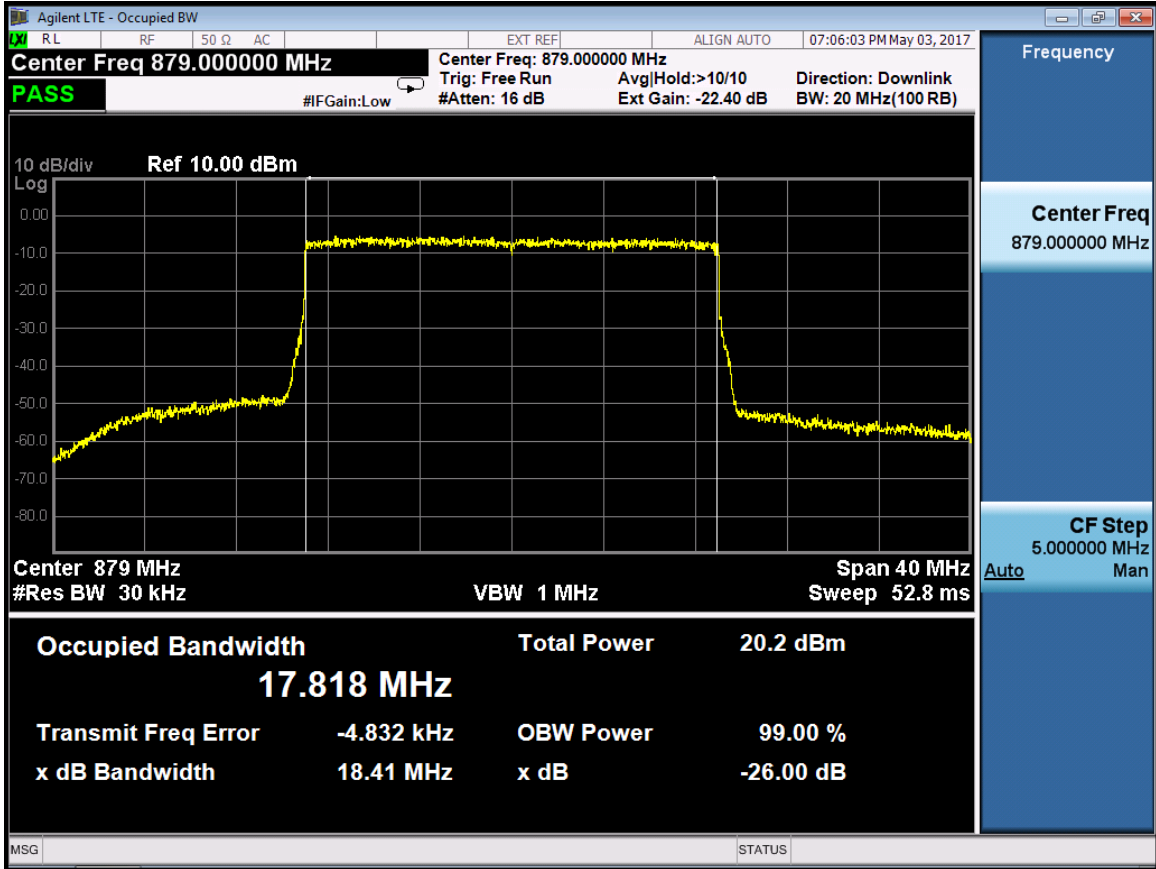

Port 1 -881.5MHz

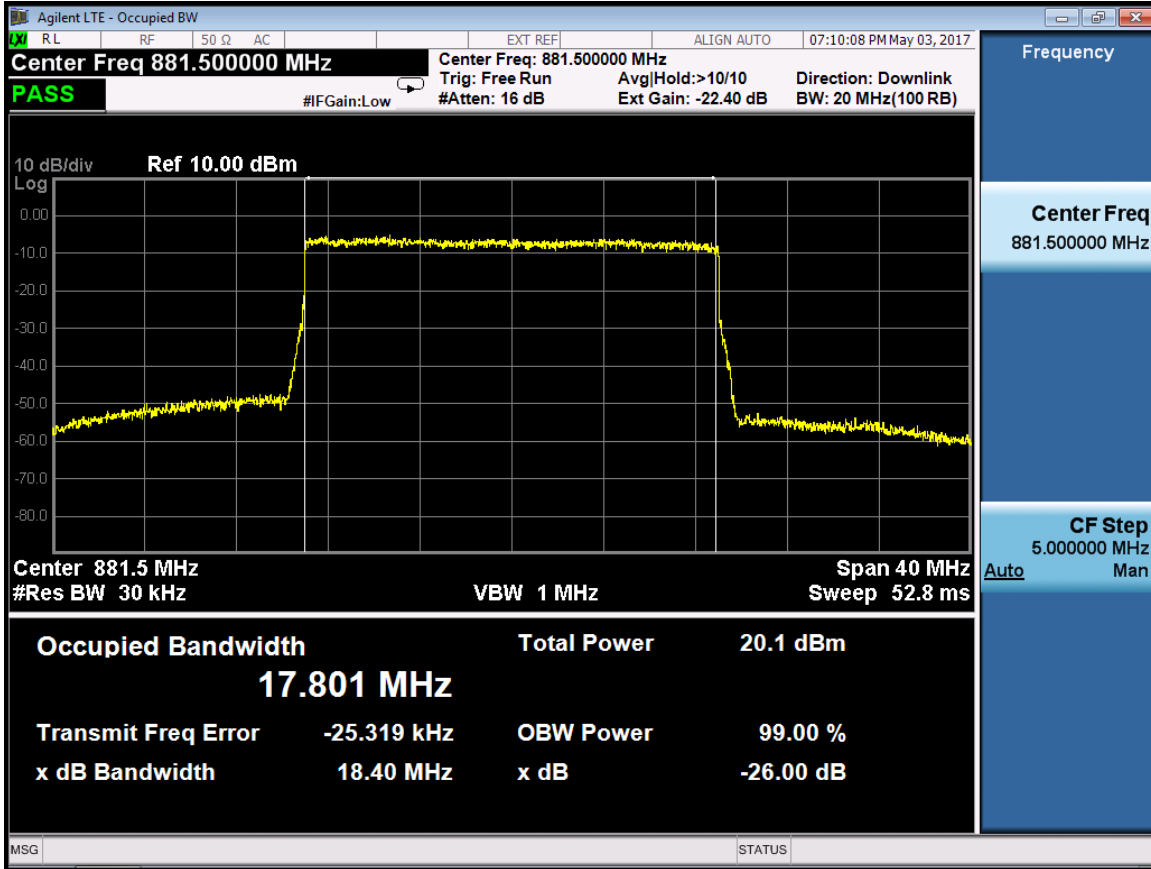

Port 1 -884MHz