

9 SPURIOUS RADIATED EMISSIONS

Test Equipment List and Details


Manufacturer	Equipment	Model	Serial Number	Last Cal.	Cal. Interval
R&S	SIGNAL GENERATOR	SMR20	A00017351	2010-10-29	1 year
Albatross	Anechoic Chamber	3m Site	A00017354	2010-6-30	1 year
R&S	EMI Test Receiver	ESIB26	100058	2010-10-29	1 year
R&S	Ultra Breitband Antennas	HL562	100022	2010-8-5	1 year
R&S	Double-Ridged Waveguide Horn Antenna	HF906	100032	2010-8-5	1 year
R&S	Double-Ridged Waveguide Horn Antenna	HF906	100446	2010-8-5	1 year
SCHWARZ-BECK	Biconical Antenna	VUBA9117	9117-122	2010-8-5	1 year

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiated emissions measurement at the EMC lab. is 3.6dB.

EUT Setup

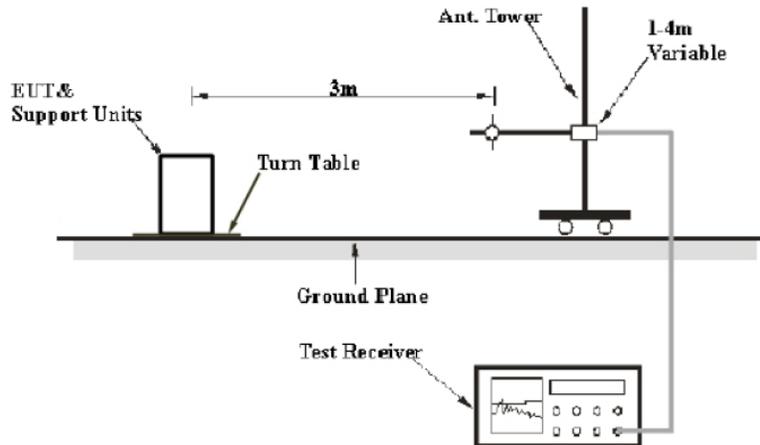

The radiated emission tests were performed in the 3-meter Chamber, using the setup accordance with the FCC part 2.1053. The specification used was the FCC 2.1053 limits.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TX pwr in Watts/0.001)-the absolute level

Spurious attenuation limit in dB = 43+10 Lg P (power out in Watts)

The resolution bandwidth of the spectrum analyzer was set at 1 percent as specified for 30MHz to 1GHz scanning, set at 1MHz for 1GHz to 20GHz scanning.

Test Results Summary: PASS

Environmental Conditions

Temperature:	26°C
Relative Humidity:	60 %
ATM Pressure:	1009 mbar

Test data

Indicated		Test Antenna	Substituted		Cable Loss(dB)	Effective radiated power (dBm)	Dipole Antenna	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz)	Amp. (dB μV)	Polar H/V	Level (dBm)	Antenna Gain Correction						
45.551102	28.41	V	-33.98	-33.69	0.5	-70.32	2.15	-72.47	-13	59.47
51.382766	18.62	V	-47.93	-31.63	0.5	-82.21	2.15	-84.36	-13	71.36
119.418838	21.48	V	-63.44	-12.48	0.8	-78.87	2.15	-81.02	-13	68.02
171.903808	24.00	V	-68.23	-2.23	1.1	-73.71	2.15	-75.86	-13	62.86
189.398798	19.99	V	-74.52	-0.27	1.1	-78.04	2.15	-80.19	-13	67.19
469.318637	24.04	V	-70.06	-1.35	1.8	-75.36	2.15	-77.51	-13	64.51
743.406814	60.82	V	-37.22	-0.95	2.3	-42.62	2.15	-44.77	-13	31.77
1144.288577	38.98	V	-66.48	4.25	2.8	-67.18	2.15	-69.33	-13	56.33
33.887776	22.26	H	-30.48	-42.03	0.3	-74.96	2.15	-77.11	-13	64.11
70.821643	12.58	H	-61.97	-23.56	0.6	-88.28	2.15	-90.43	-13	77.43
117.474950	21.39	H	-64.77	-12.48	0.8	-80.2	2.15	-82.35	-13	69.35
171.903808	23.66	H	-72.17	-2.23	1.1	-77.65	2.15	-79.80	-13	66.80
189.398798	20.49	H	-78.9	-0.27	1.1	-82.42	2.15	-84.57	-13	71.57
471.262525	23.82	H	-69.73	-1.3	1.8	-74.98	2.15	-77.13	-13	64.13
741.462926	63.94	H	-33.23	-0.95	2.3	-38.63	2.15	-40.78	-13	27.78
1160.320641	39.09	H	-67.11	4.25	2.9	-67.91	2.15	-70.06	-13	57.06

Radiation emission spurious below 3GHz

Indicated		Test Antenna	Substituted		Cable Loss(dB)	Effective radiated power (dBm)	Dipole Antenna	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz)	Amp. (dB μV)	Polar H/V	Level (dBm)	Antenna Gain Correction						
3769.539078	41.25	V	-66.76	7.75	5.2	-66.36	2.15	-68.51	-13	55.51
4827.655311	42.89	V	-64.71	9.15	5.9	-63.61	2.15	-65.76	-13	52.76
4915.831663	50.71	V	-55.92	9.15	6	-54.92	2.15	-57.07	-13	44.07
7864.228457	50.28	V	-62.07	9.25	7.9	-62.87	2.15	-65.02	-13	52.02
9846.192385	55.98	V	-52.84	9.95	8.9	-53.94	2.15	-56.09	-13	43.09
12242.985972	56.03	V	-54.69	12.05	9.8	-54.59	2.15	-56.74	-13	43.74
3697.394790	40.60	H	-67.74	7.75	5.1	-67.24	2.15	-69.39	-13	56.39
4226.452906	43.24	H	-60.08	7.95	5.5	-59.78	2.15	-61.93	-13	48.93
6150.300601	47.91	H	-55.48	9.05	6.9	-55.48	2.15	-57.63	-13	44.63
6927.855711	49.93	H	-55.49	9.25	7.3	-55.69	2.15	-57.84	-13	44.84
9846.192385	55.64	H	-53.3	9.95	8.9	-54.4	2.15	-56.55	-13	43.55
11655.310621	56.07	H	-50.13	11.85	9.6	-50.03	2.15	-52.18	-13	39.18

Radiation emission spurious above 3GHz

10 SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Test Equipment List and Details


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9030A	MY49431143	2015.06.18	2016.06.18
DTS	DTS 40dB Attenuator	DTS100-40-3-1	09112005	2015.07.19	2016.07.19

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

EUT Setup:

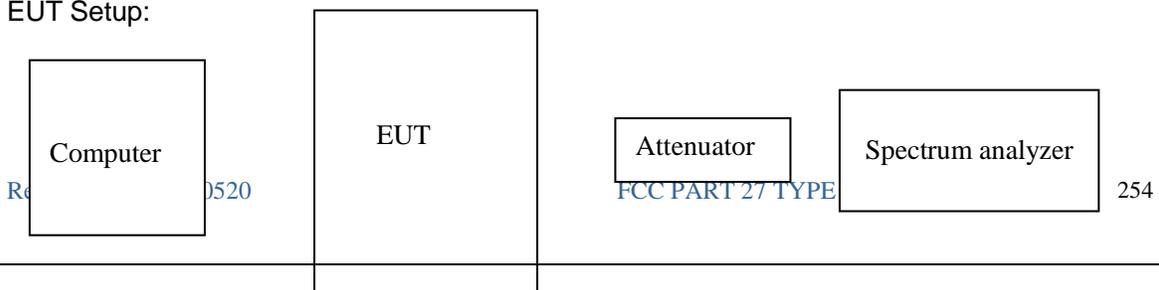



REMARKS: Attenuator loss (dB)=40dB, Cable Loss (dB)=1.5dB.

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

Test Data Environmental Conditions

Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar



Test Result: Pass


Test Mode: Transmitting LTE

Test Data:


Single Carrier:



5M -Port 1 -2622.5MHz

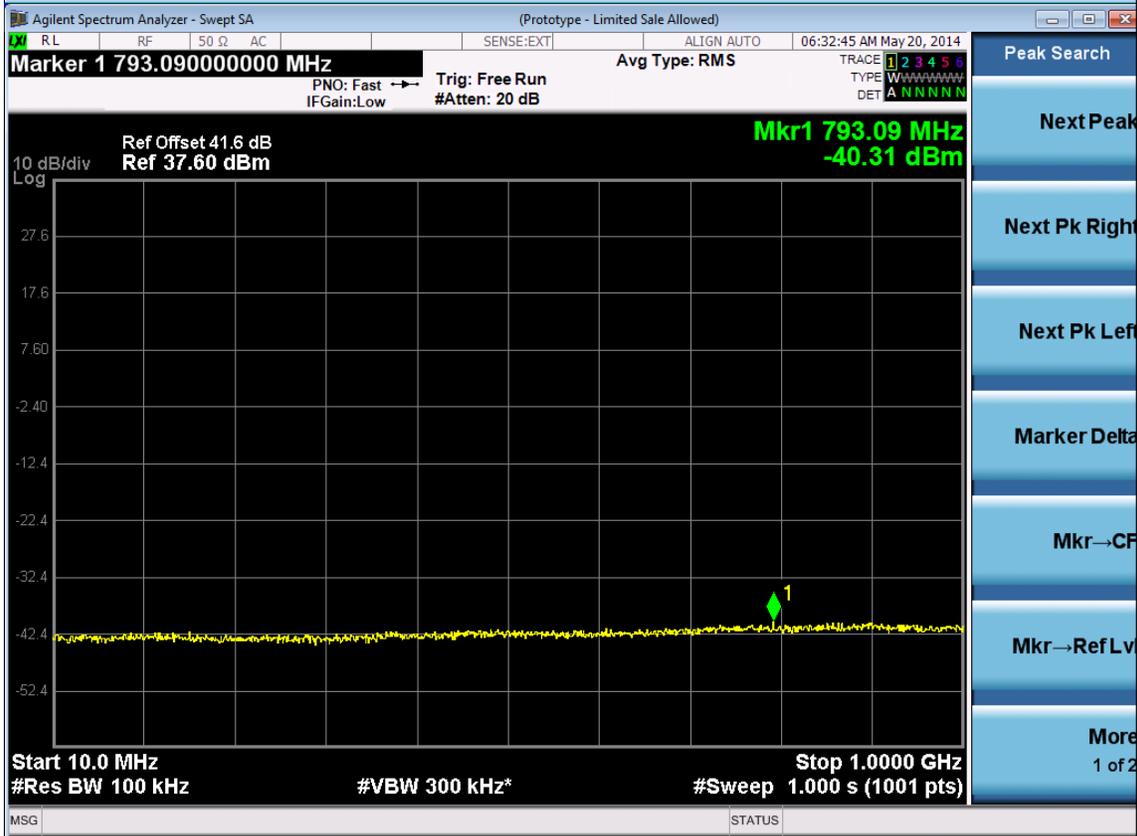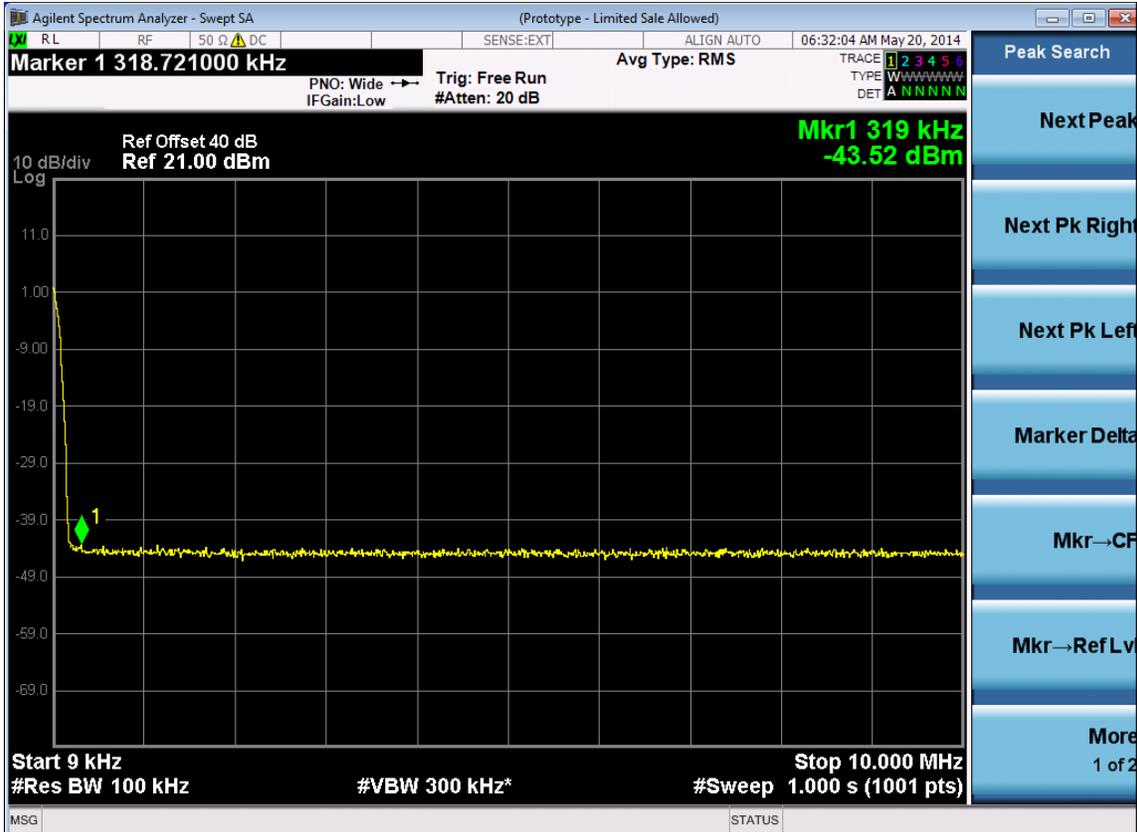

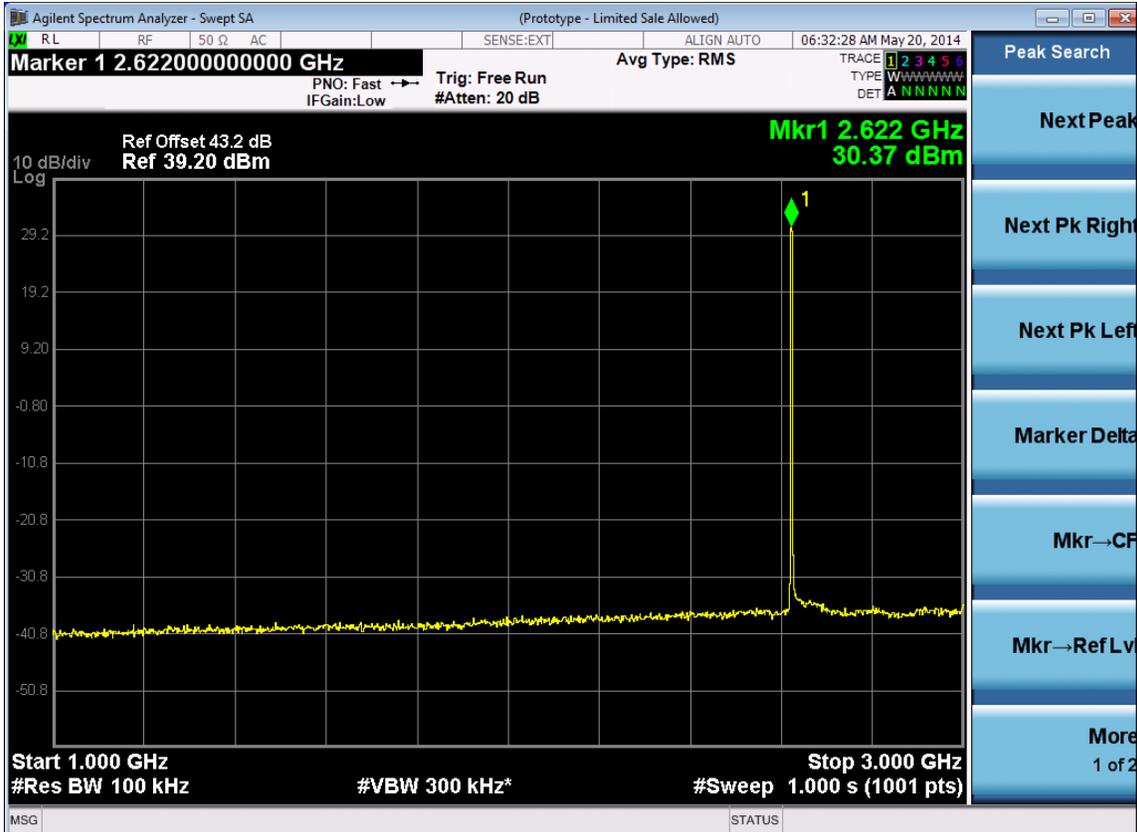



5M -Port 1 -2655MHz

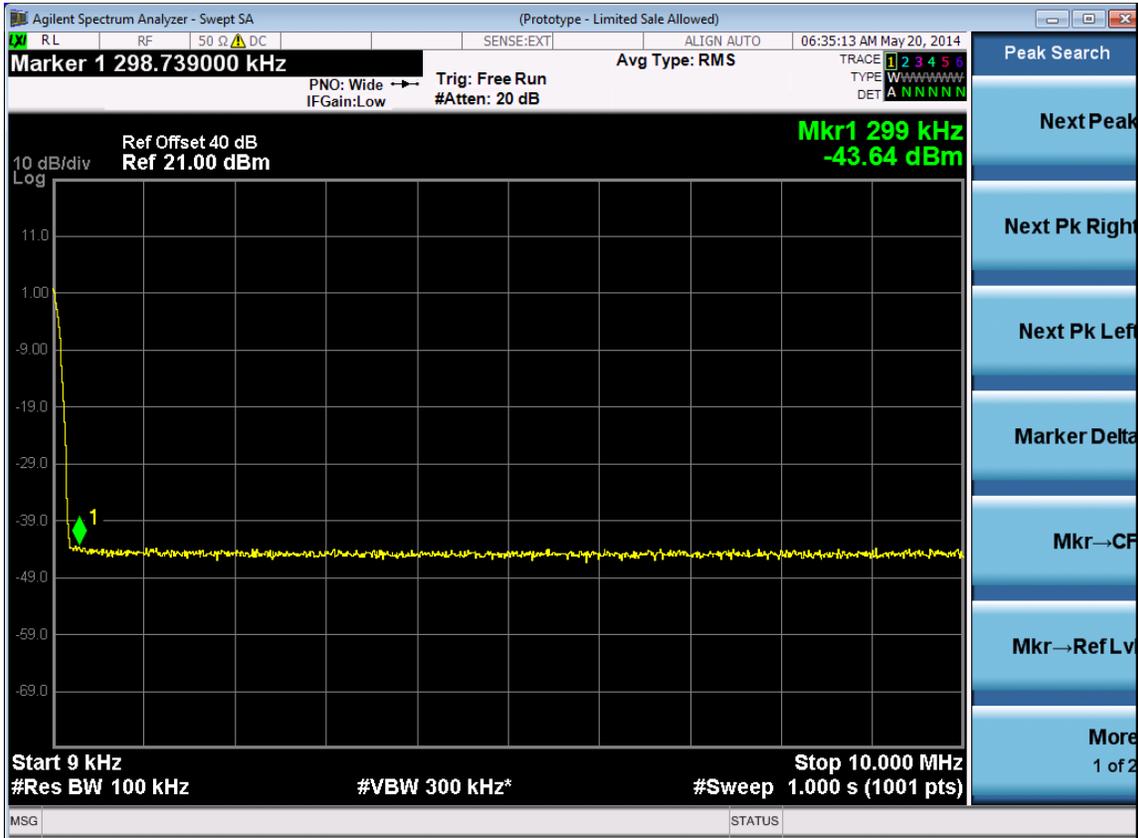


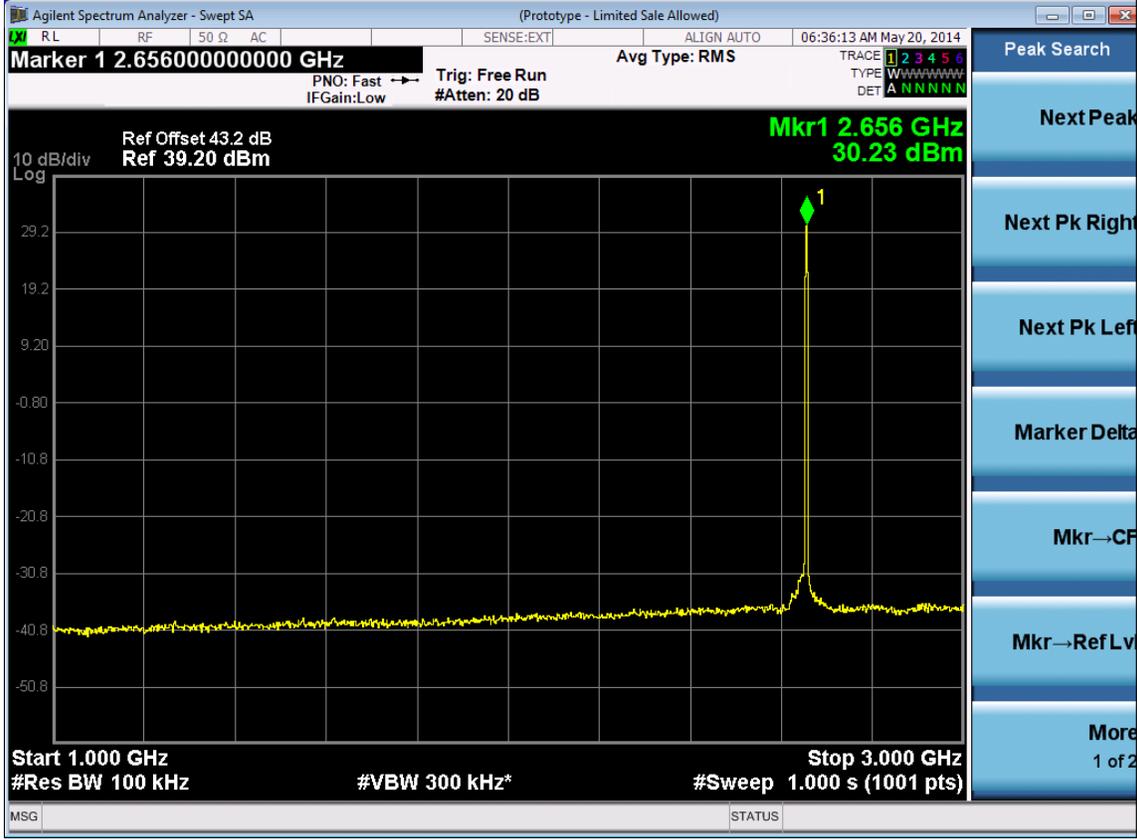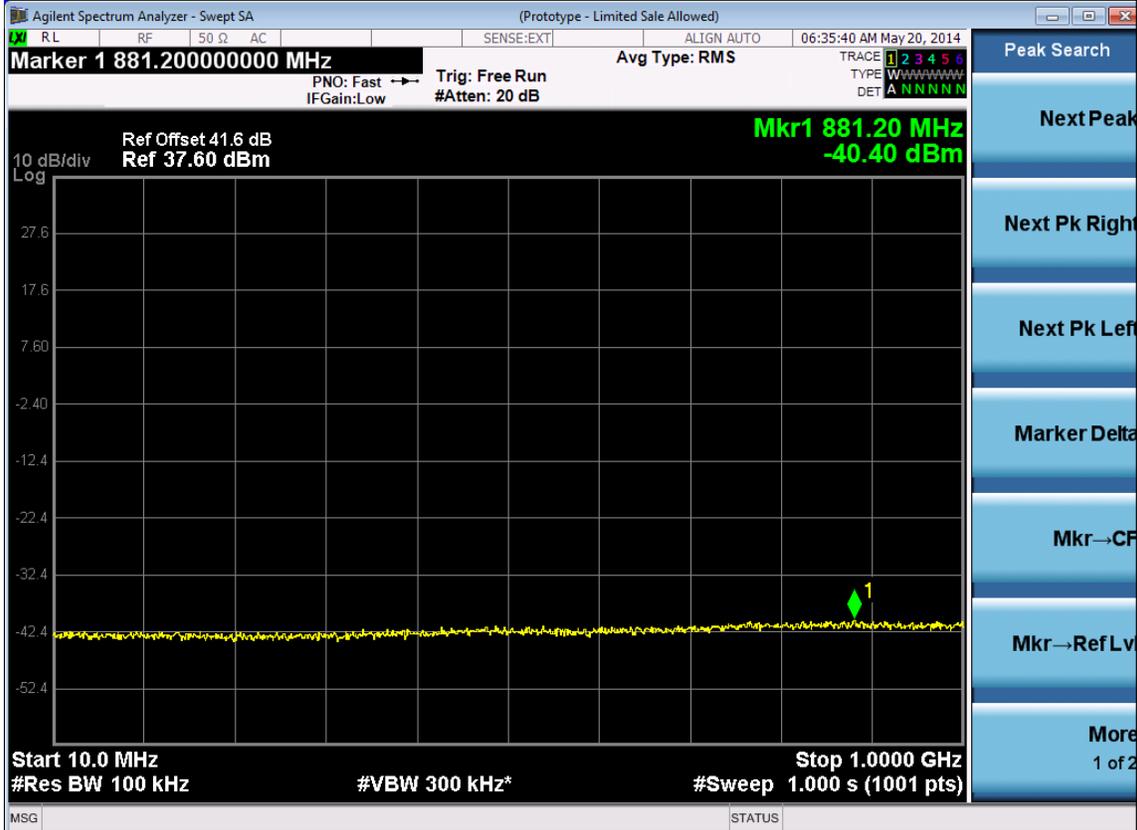



5M -Port 1 -2687.5MHz

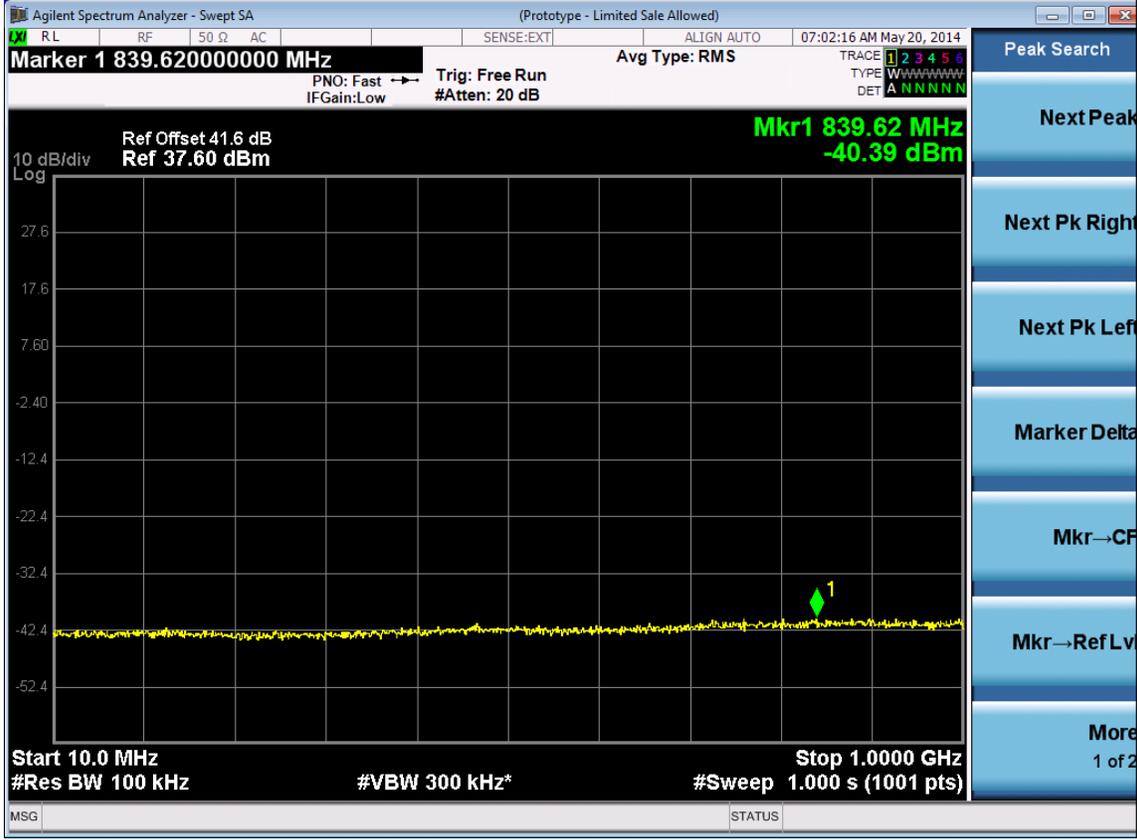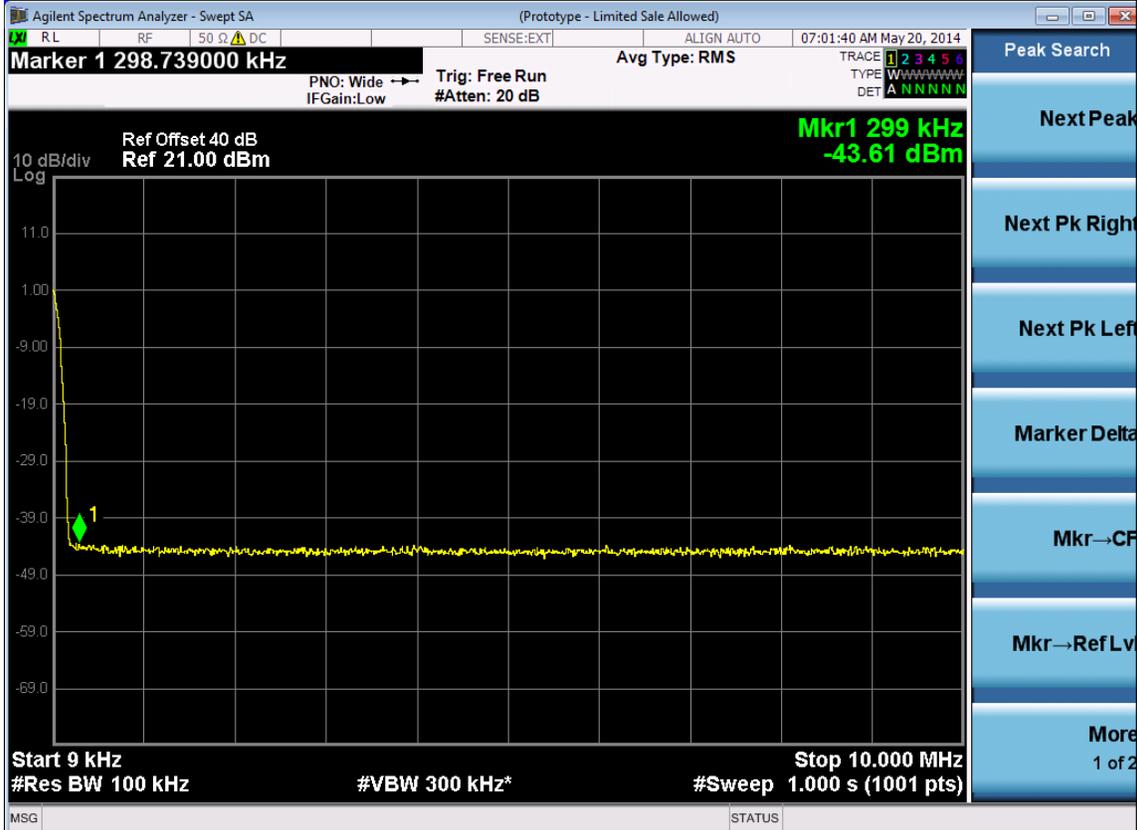

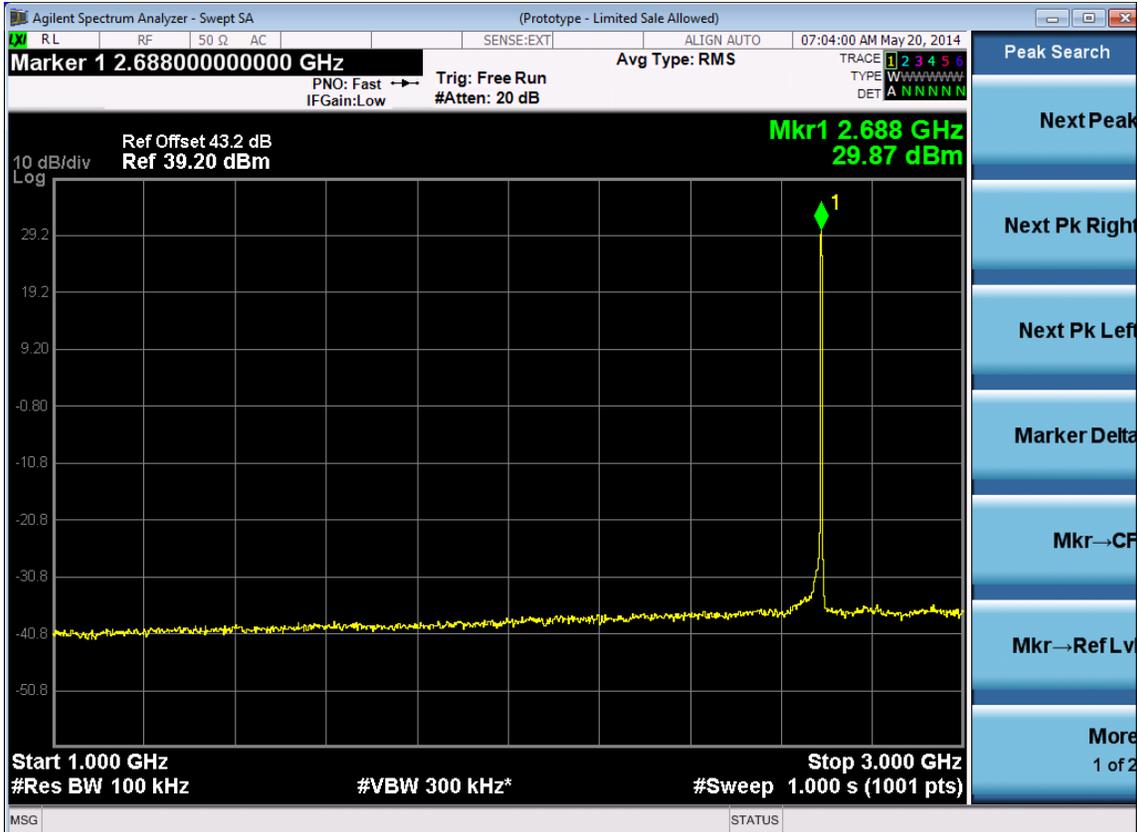




- Peak Search
- Next Peak
- Next Pk Right
- Next Pk Left
- Marker Delta
- Mkr→CF
- Mkr→Ref Lv
- More 1 of 2



- Peak Search
- Next Peak
- Next Pk Right
- Next Pk Left
- Marker Delta
- Mkr→CF
- Mkr→Ref Lv
- More 1 of 2



5M -Port 2 -2622.5MHz

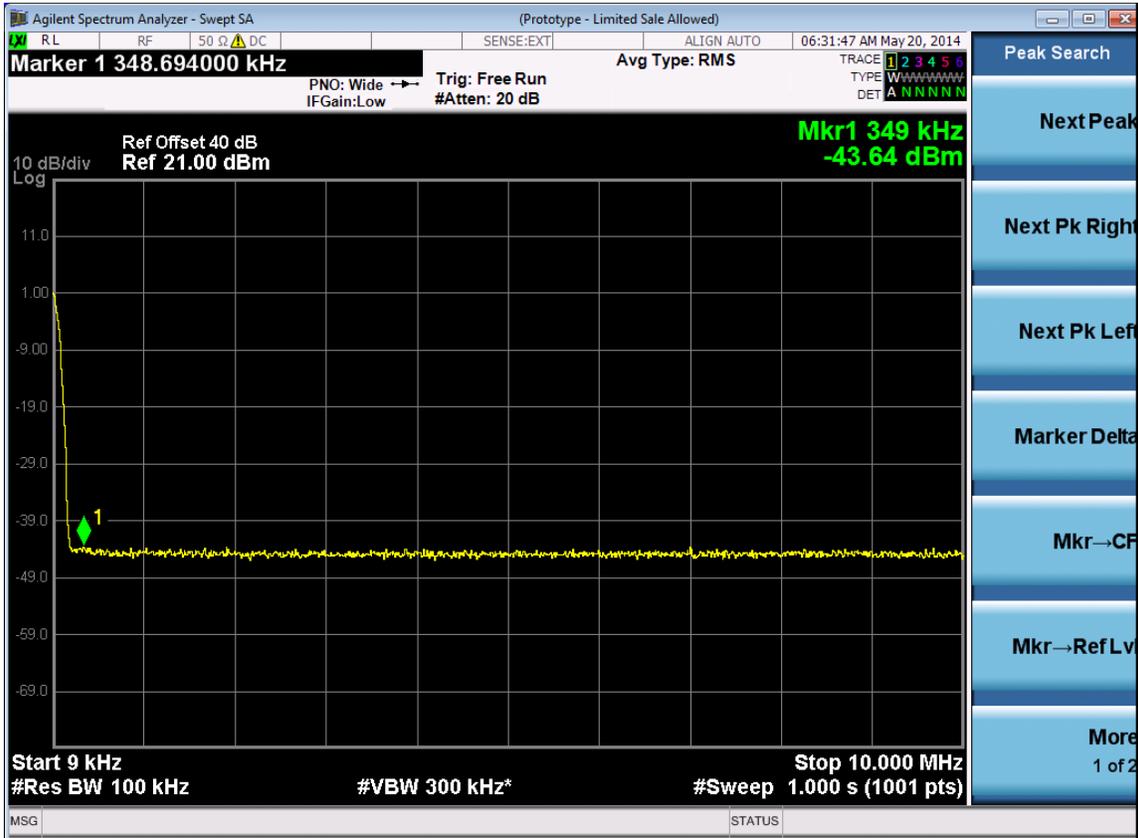


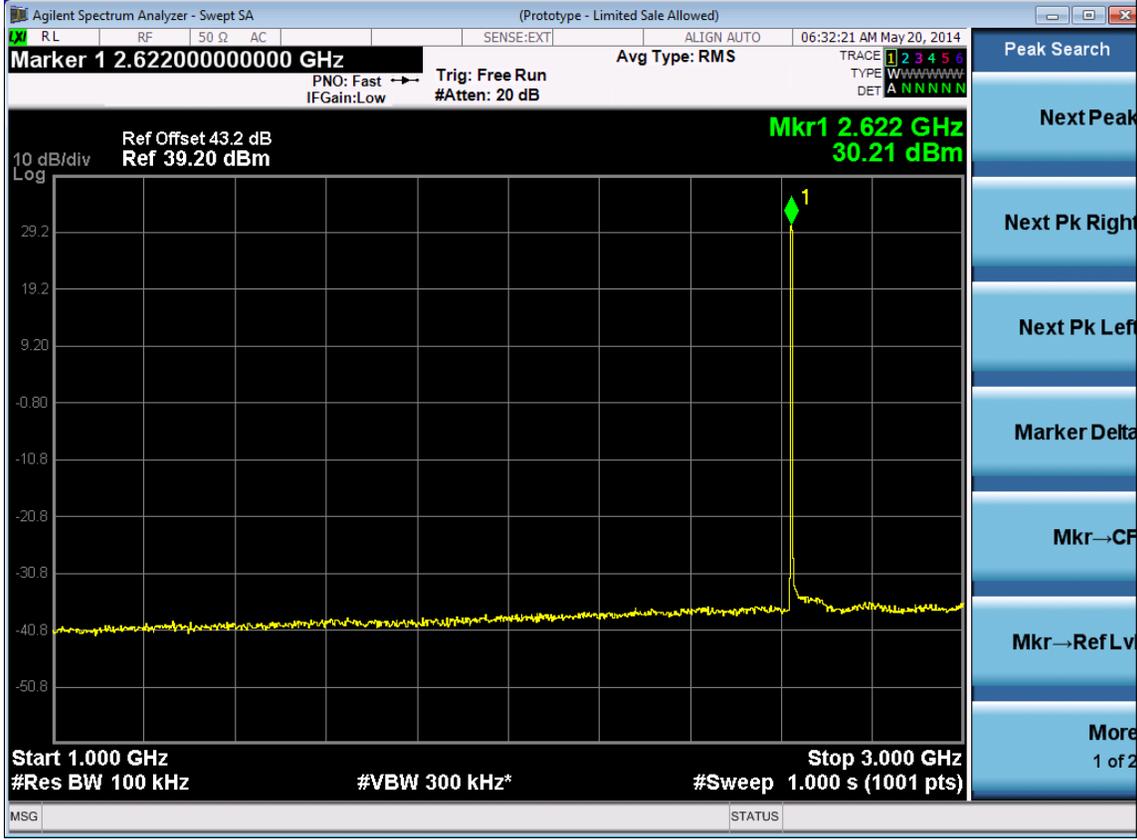
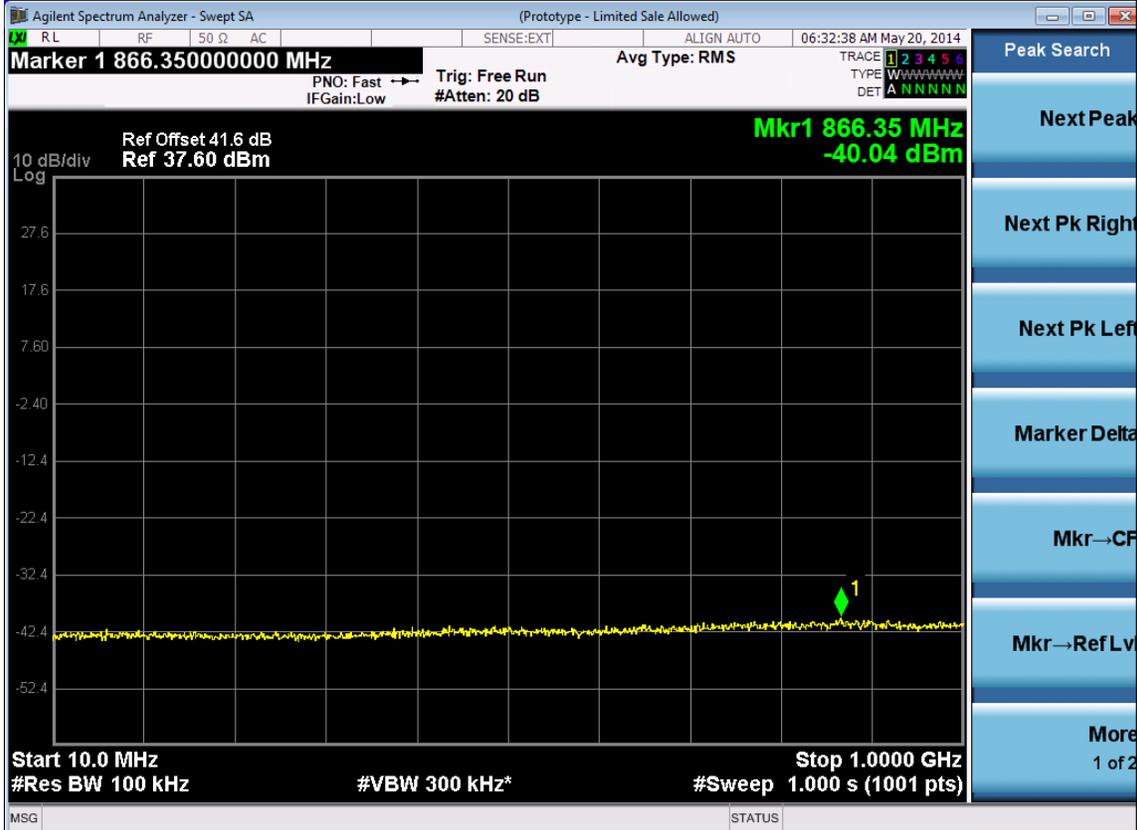




5M -Port 2 -2655MHz

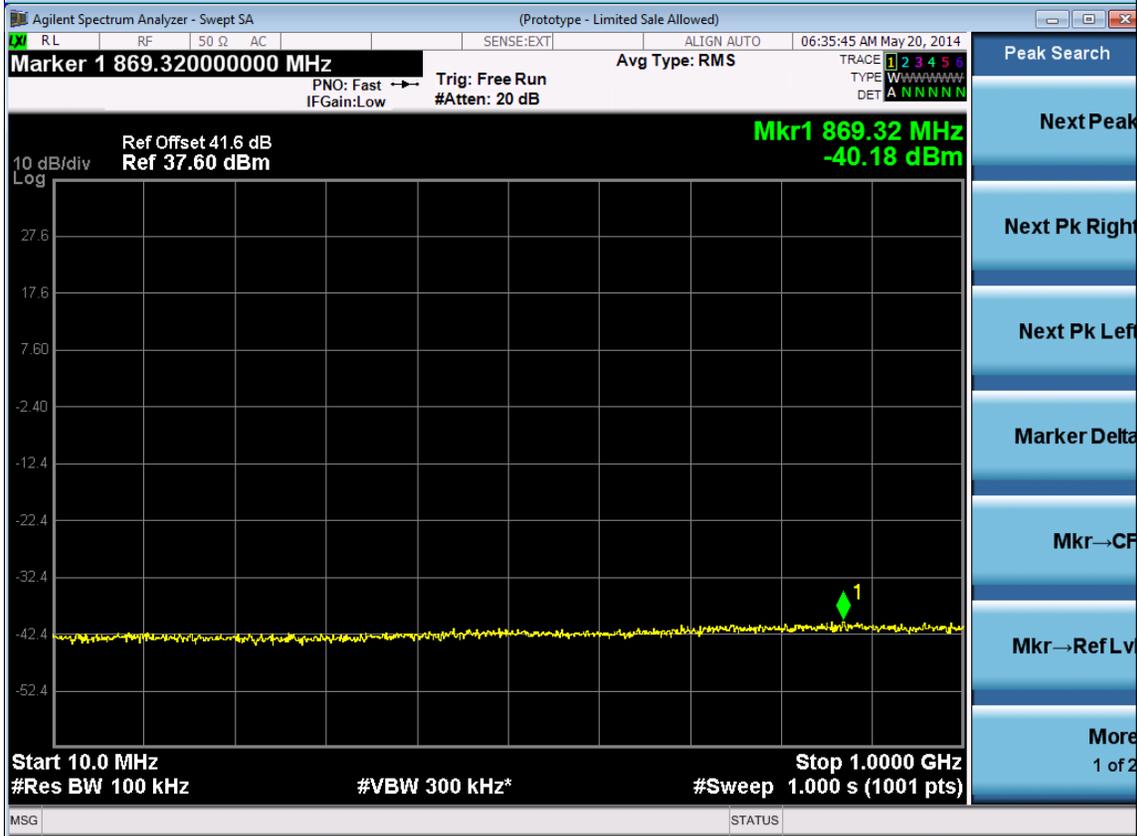
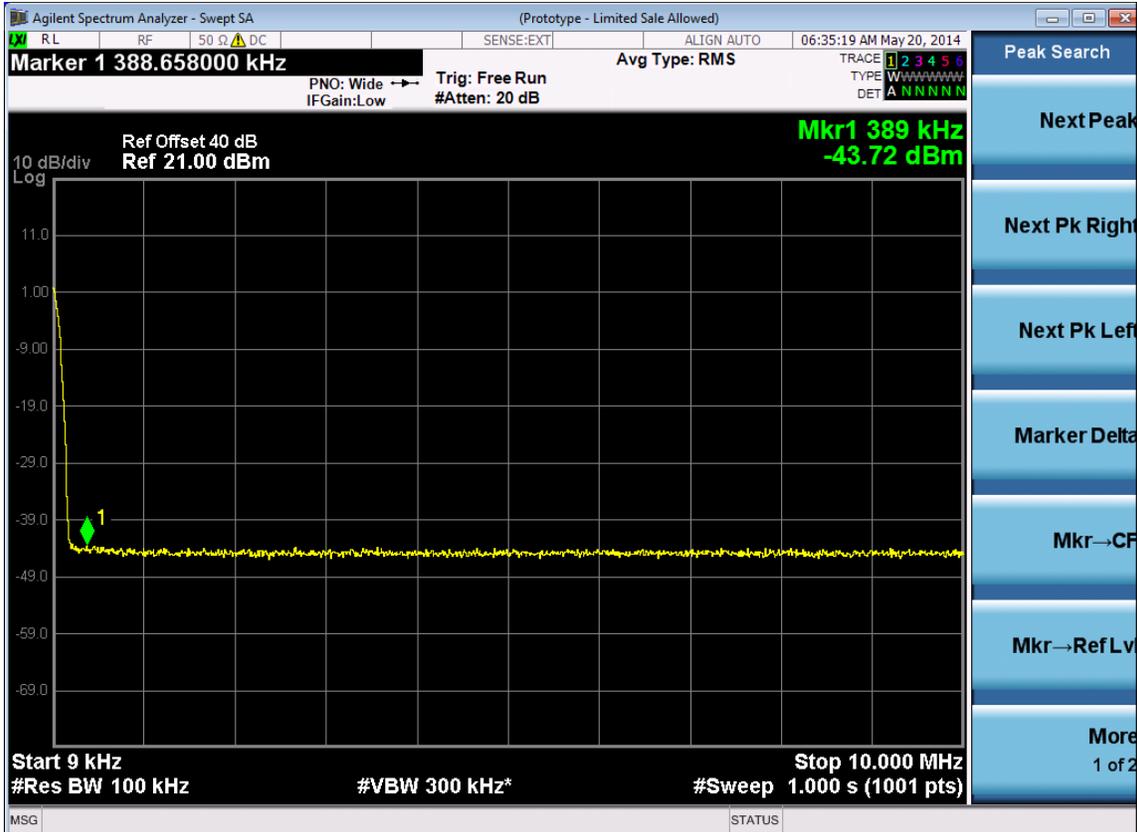


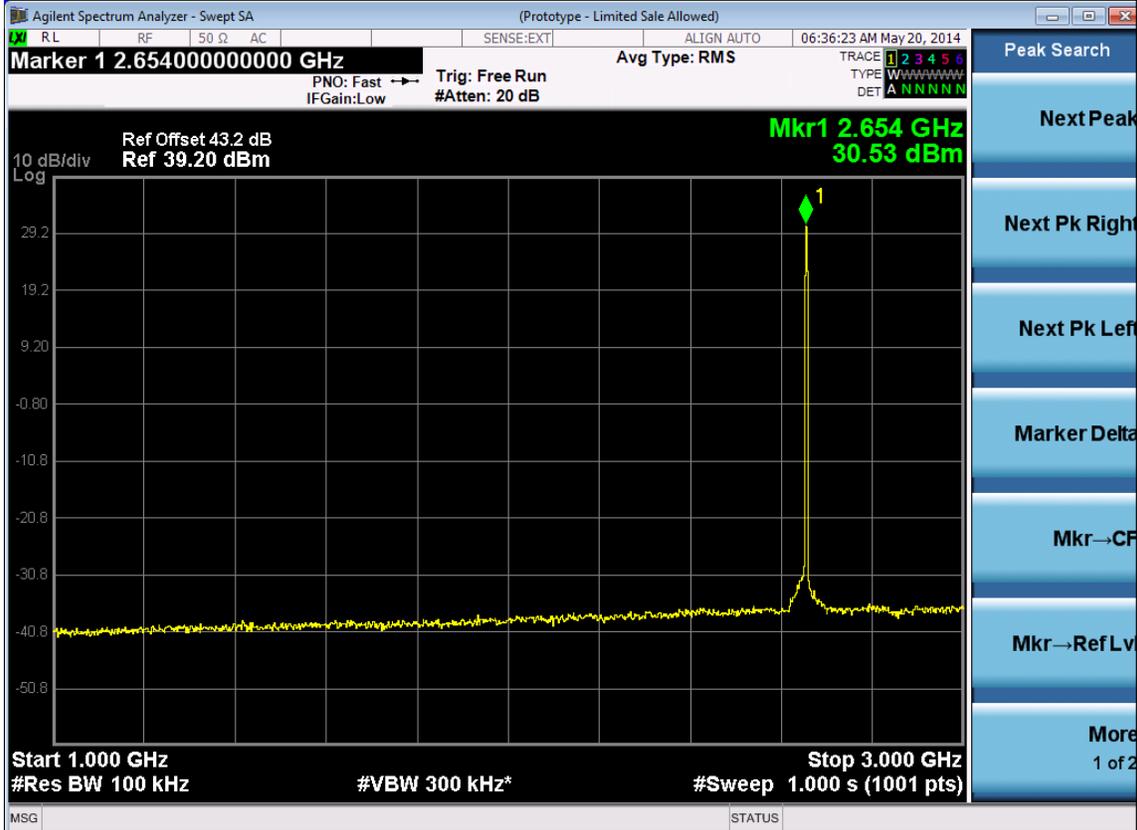


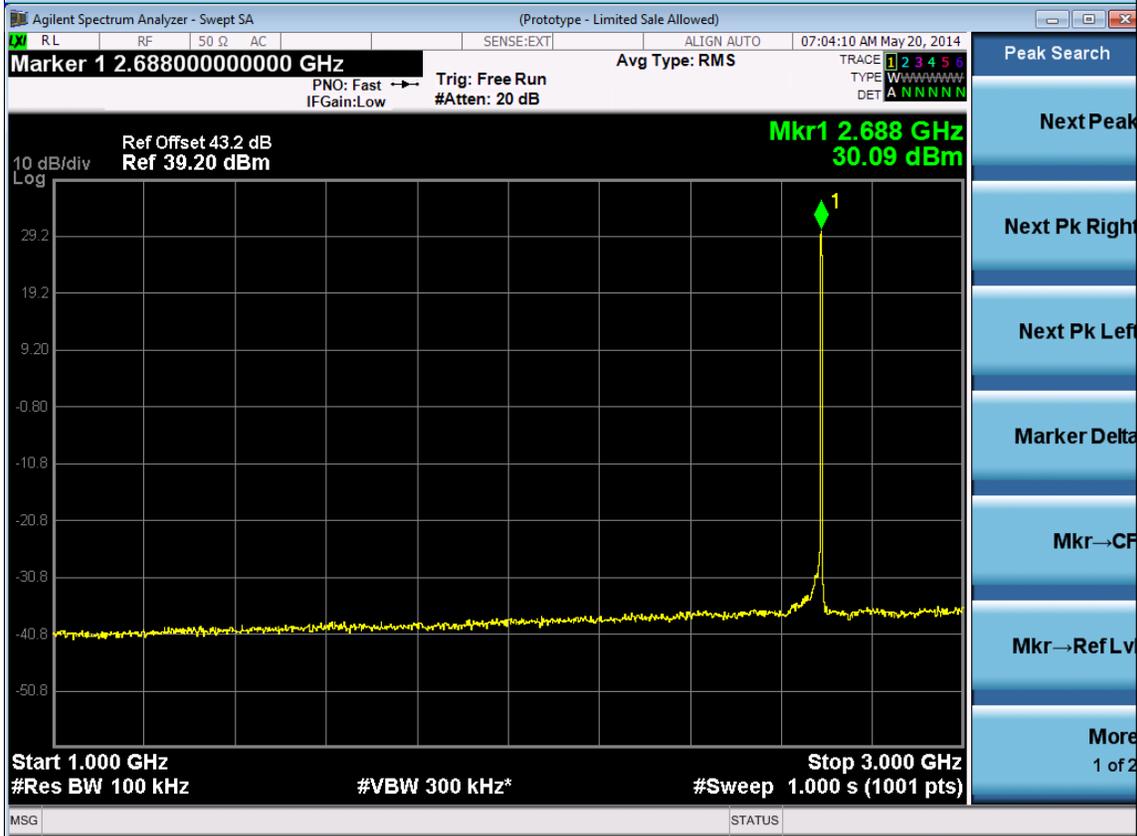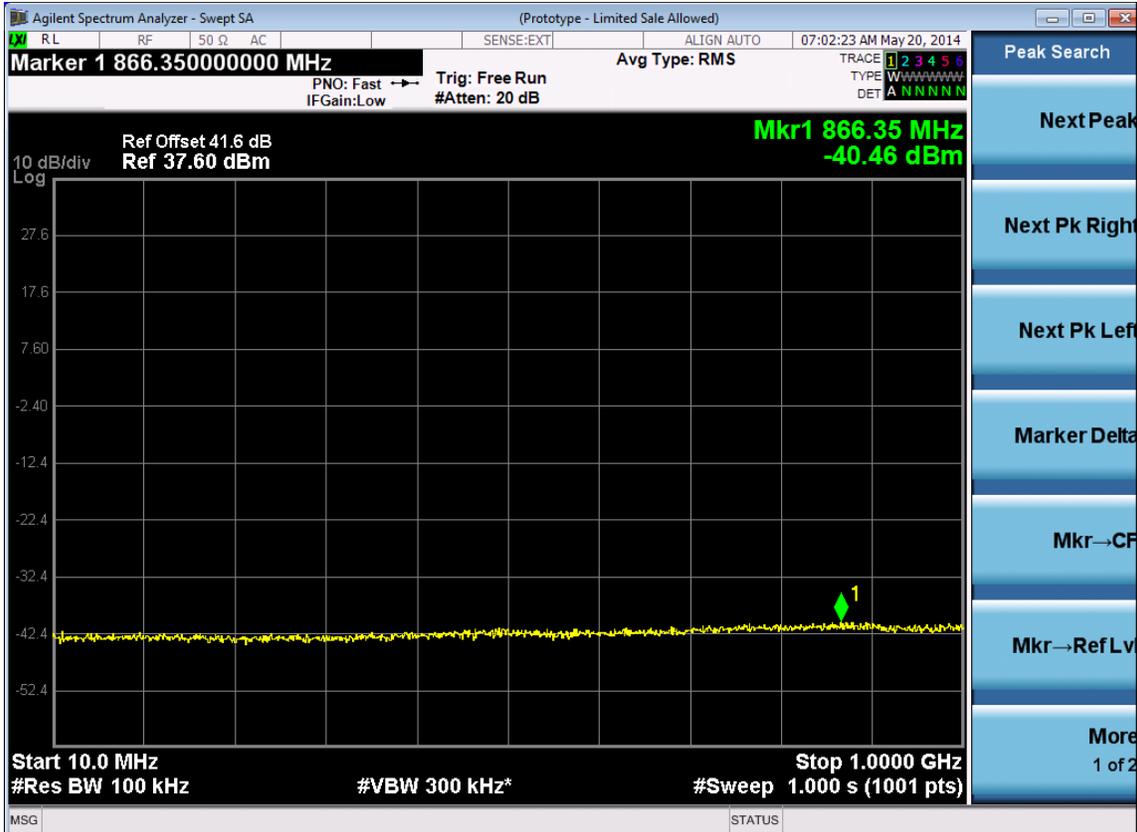






10M -Port 1 -2625MHz

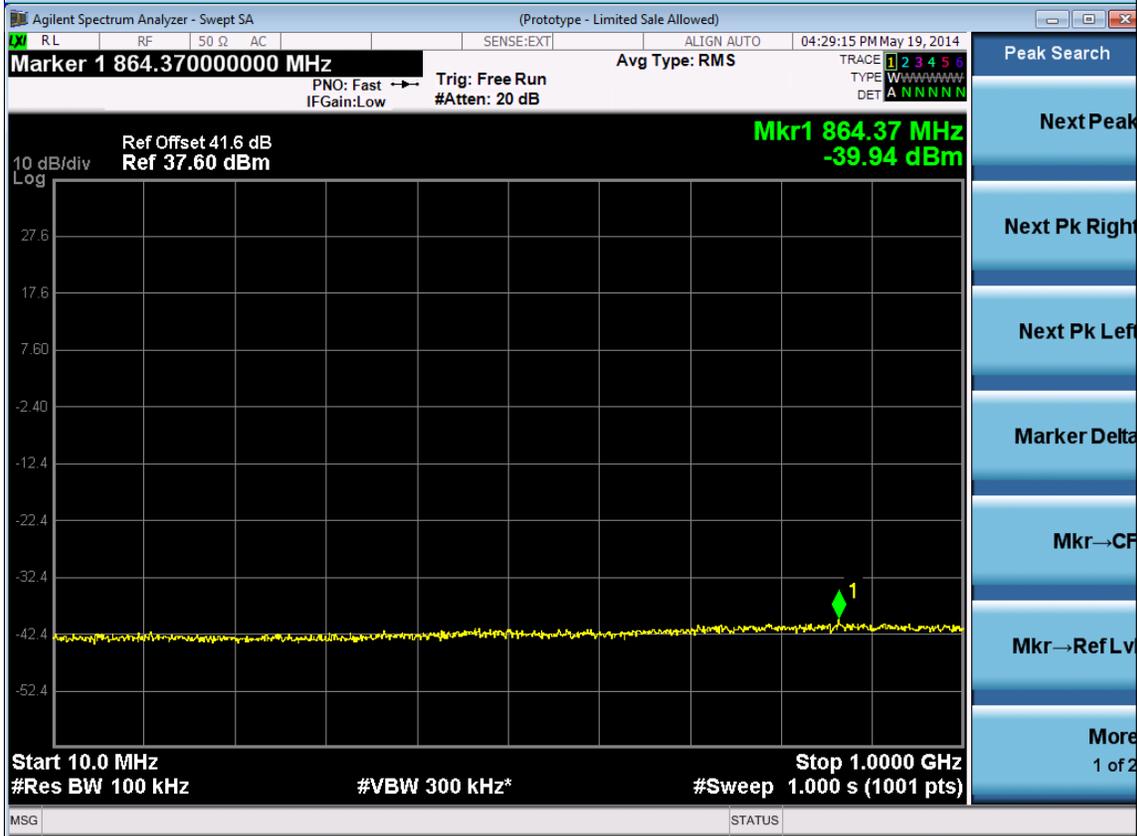
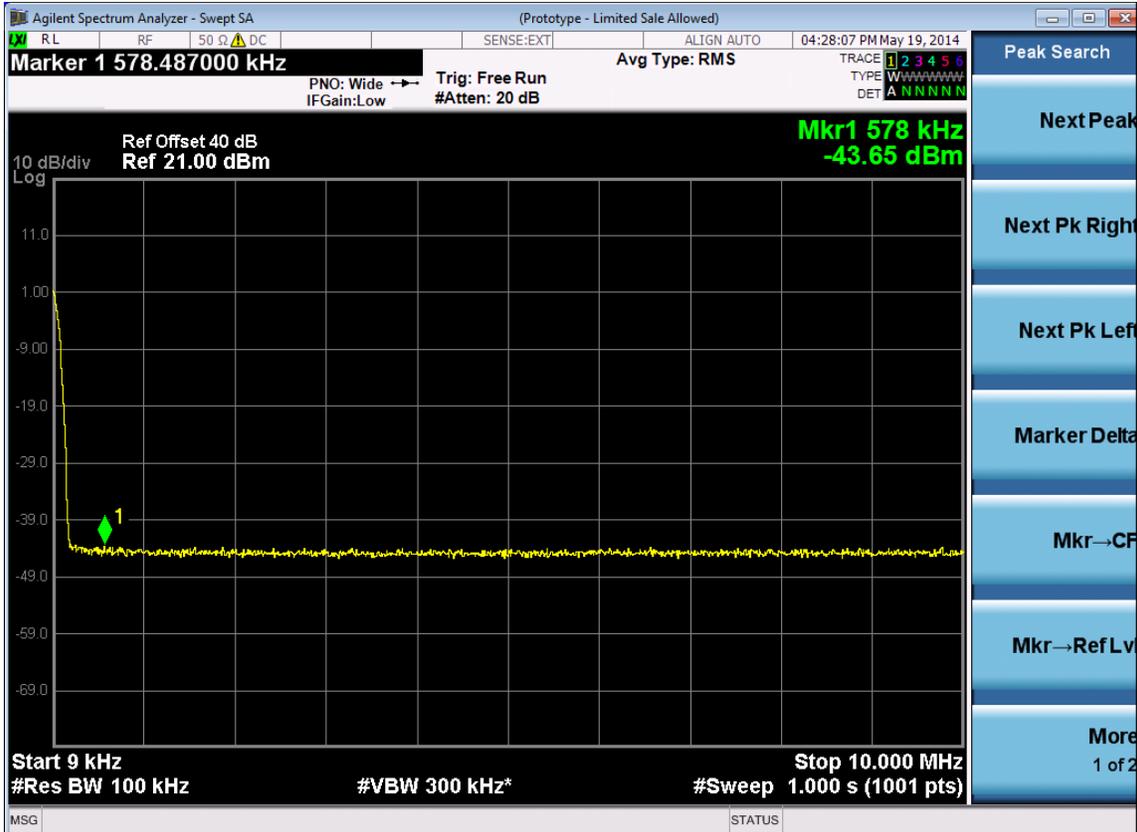


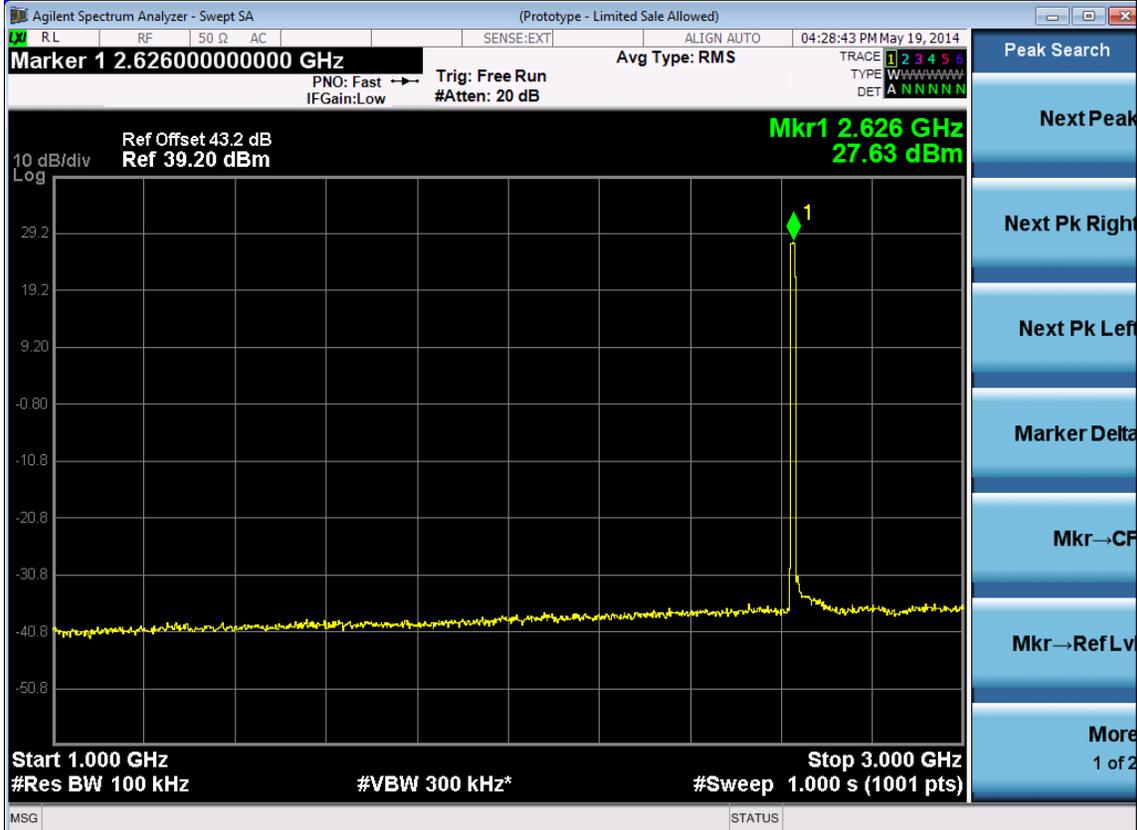


10M -Port 1 -2655MHz

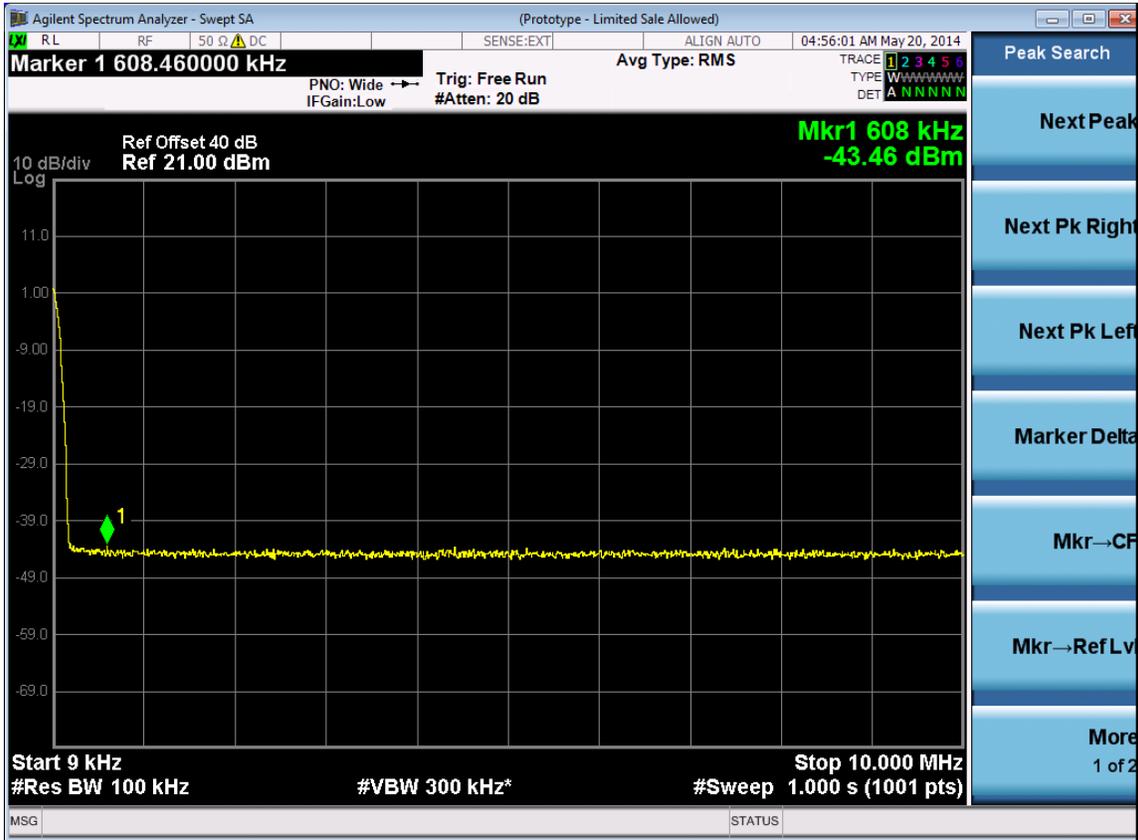


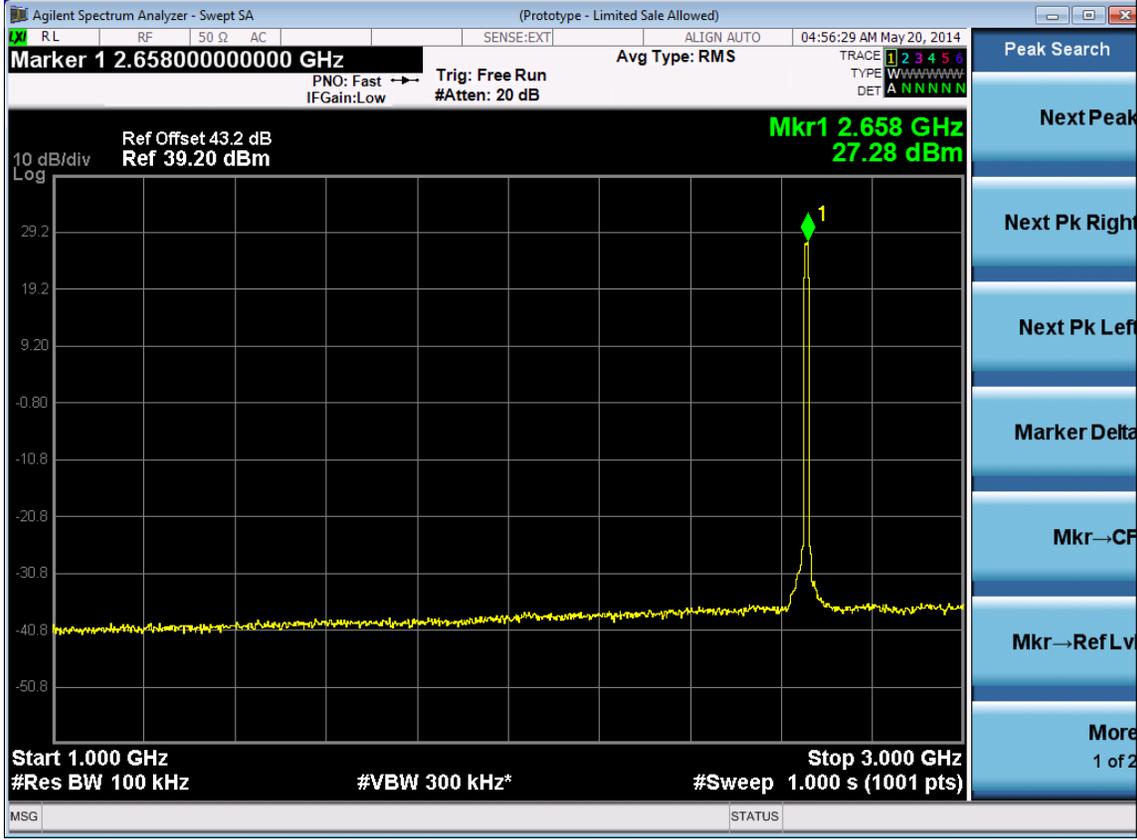
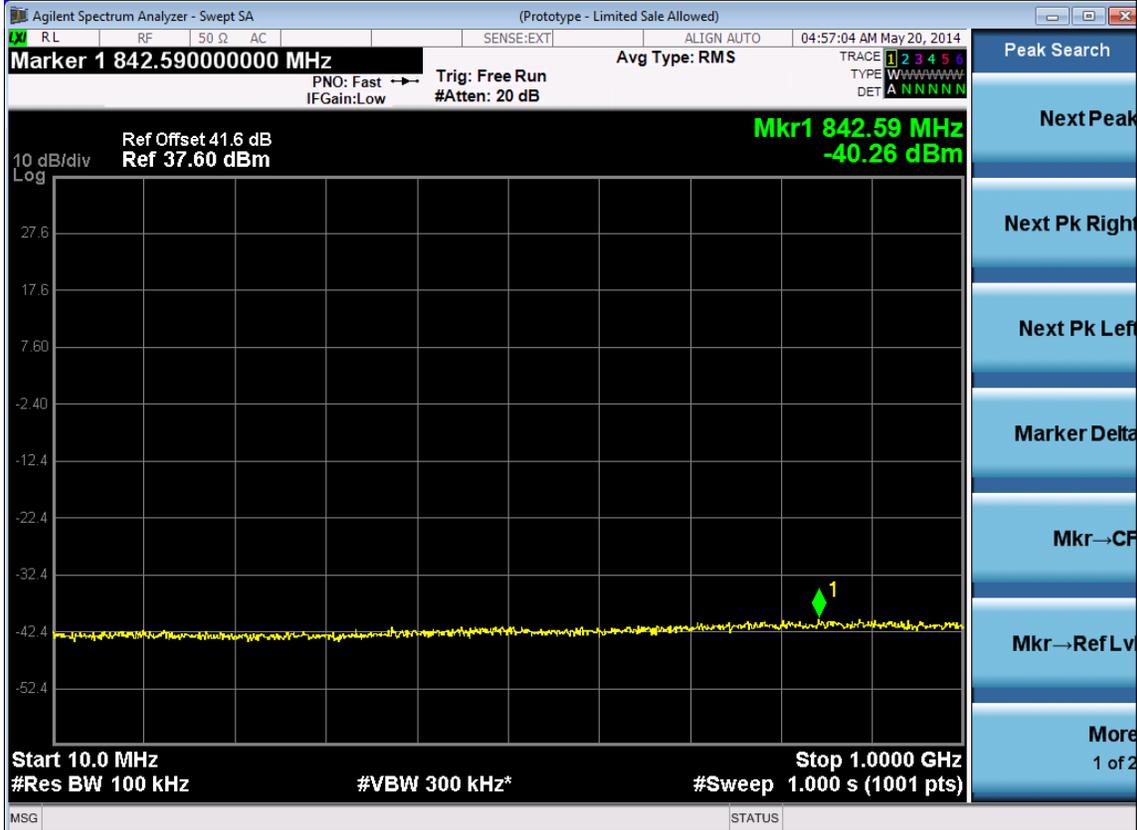


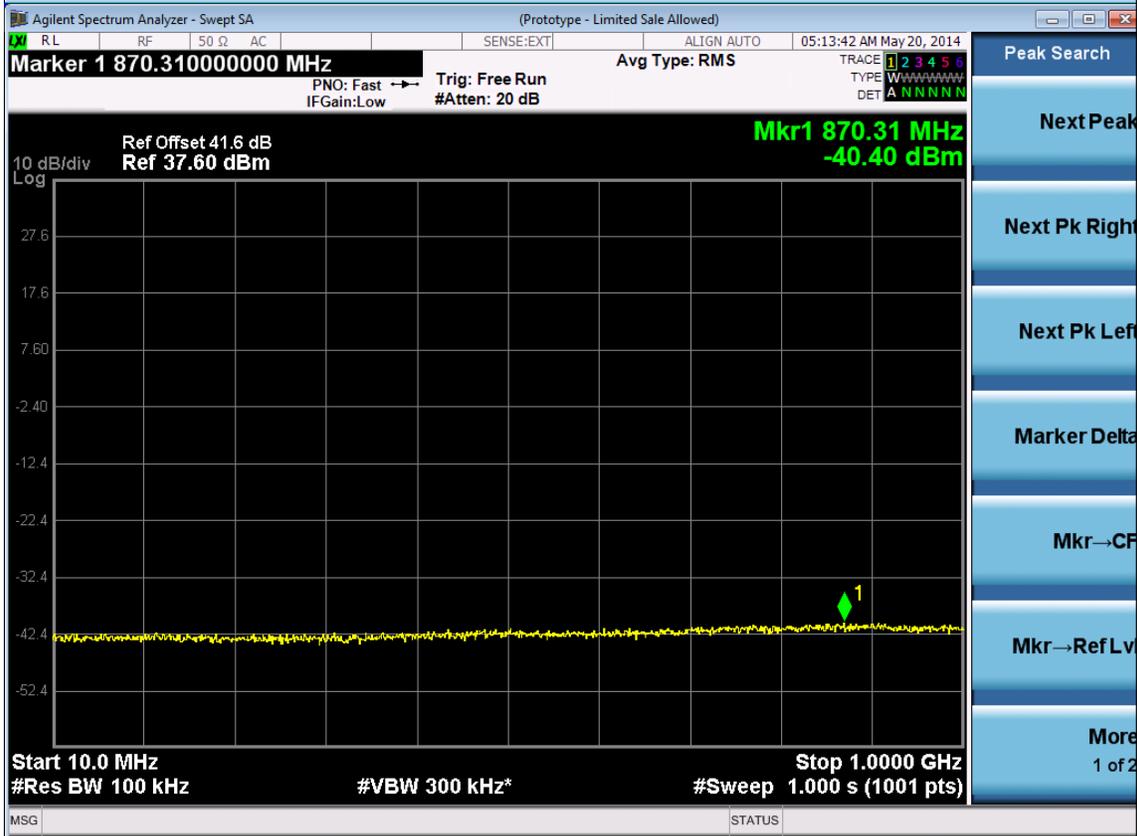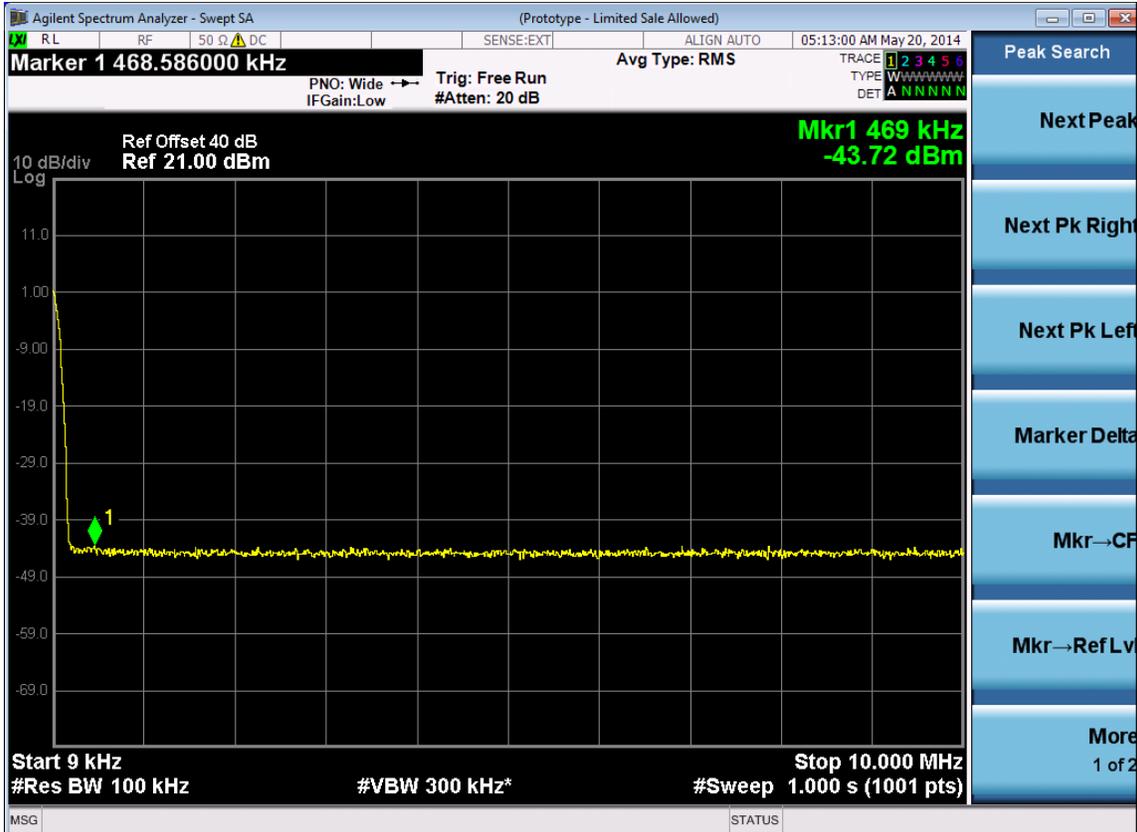

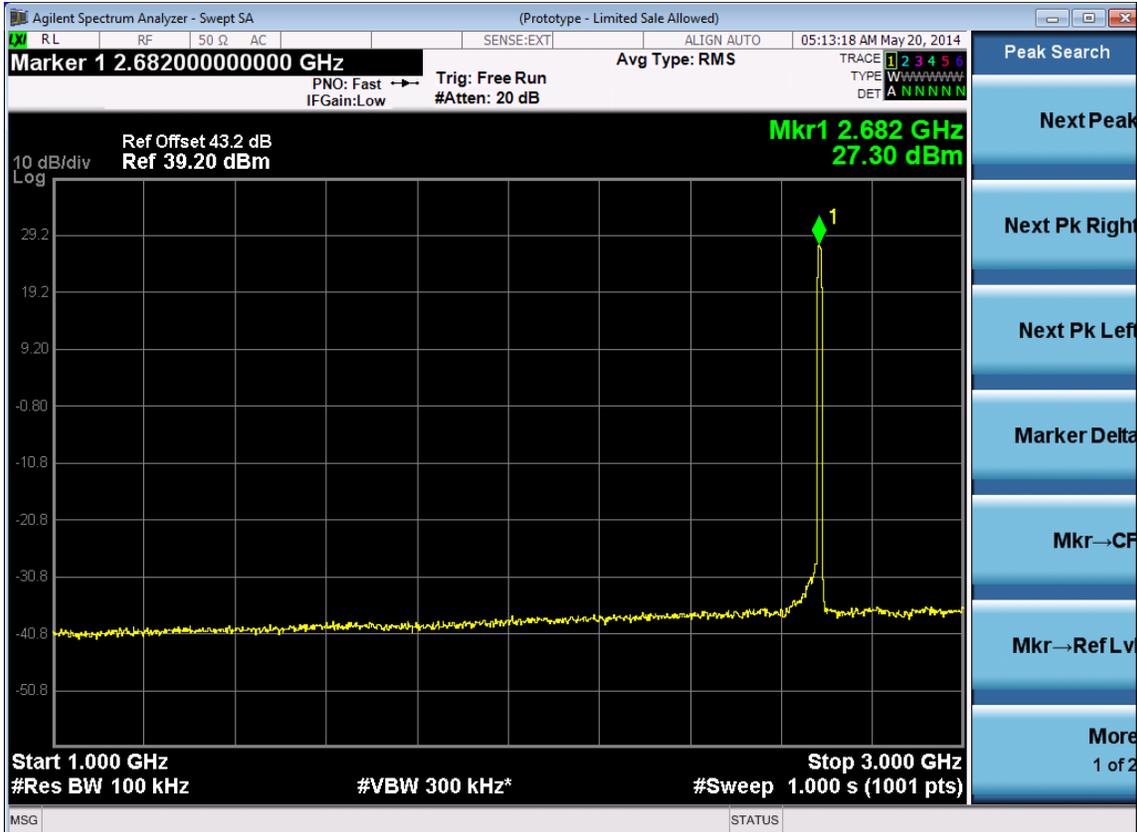



10M -Port 2 -2625MHz

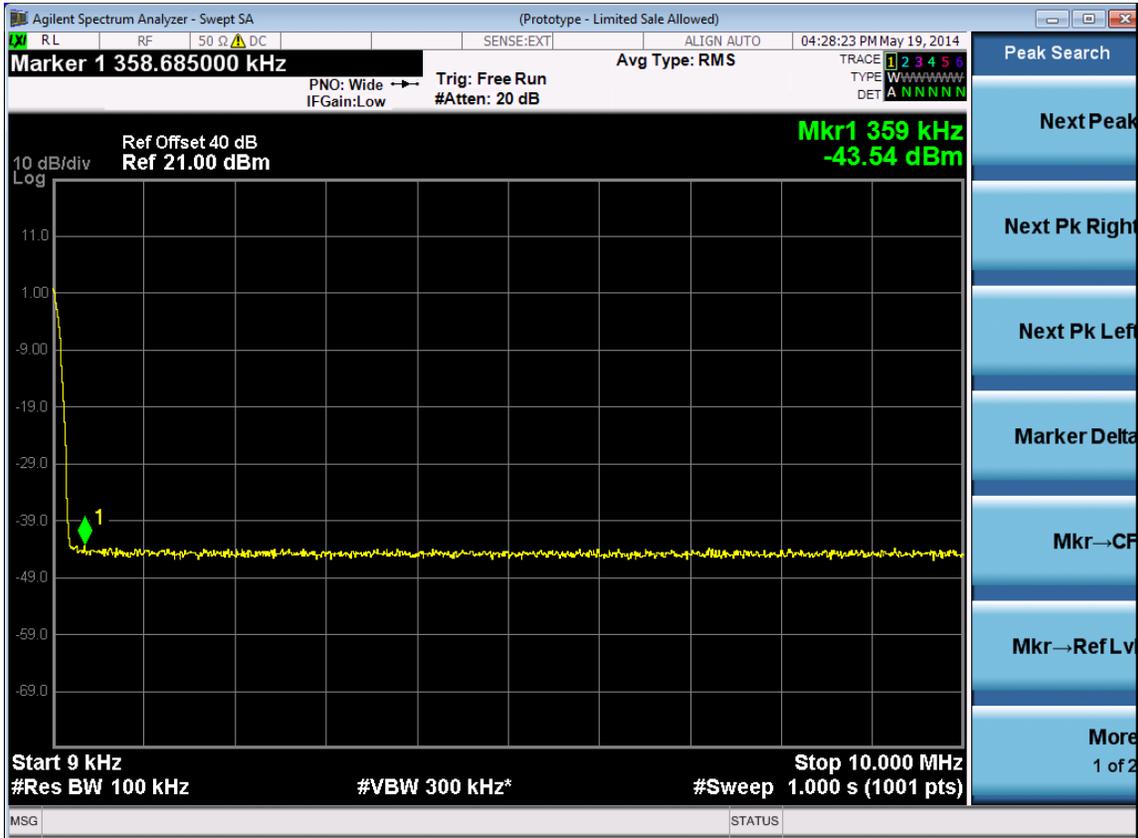


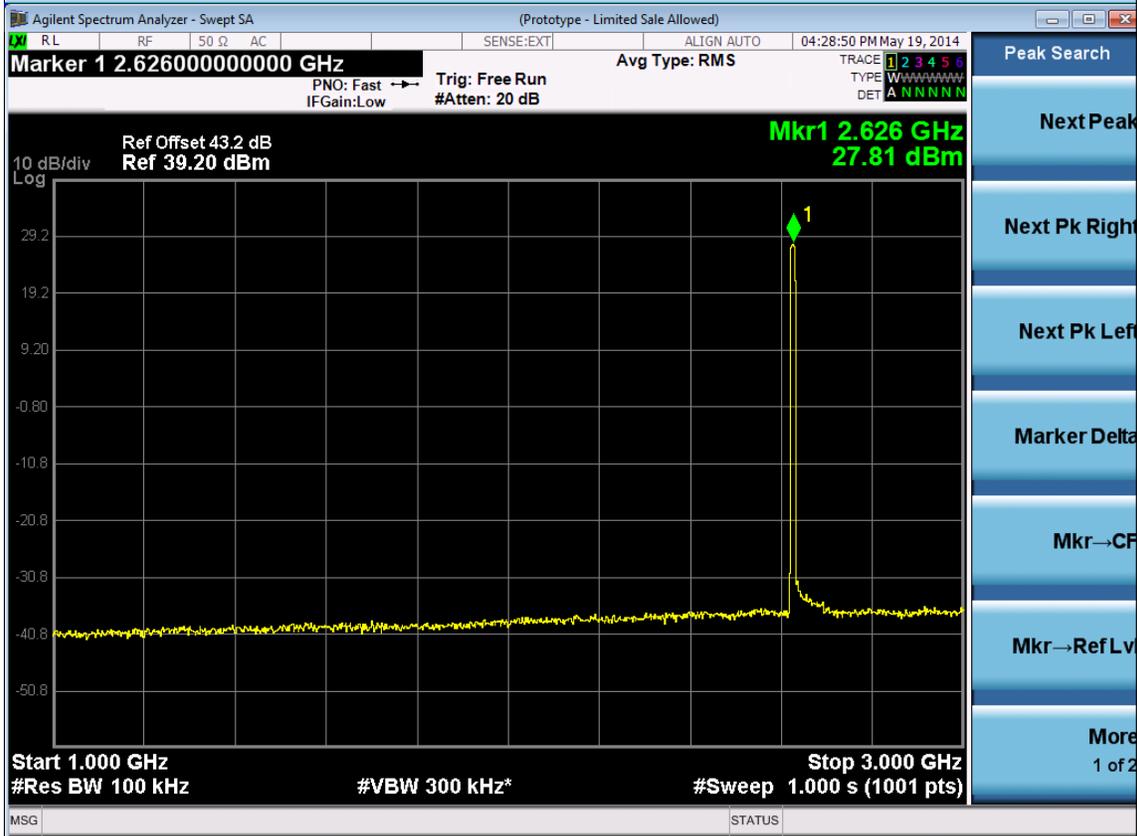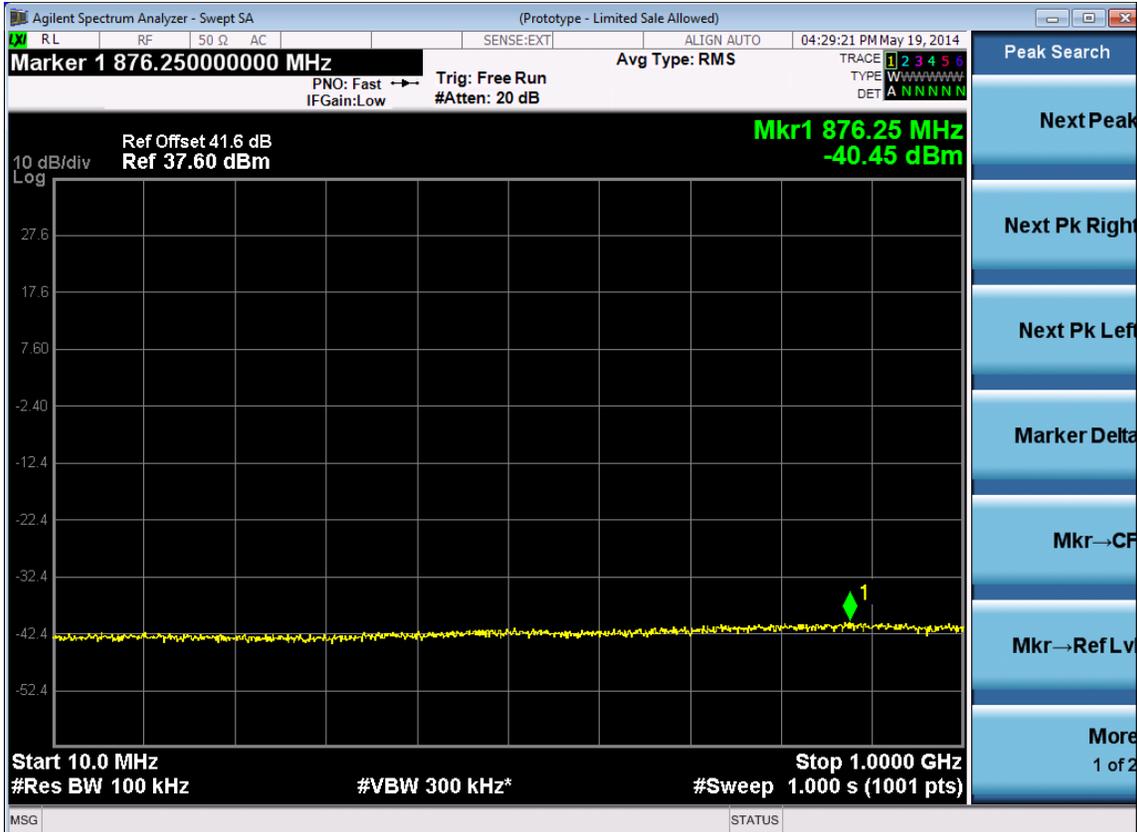




10M -Port 2 -2655MHz

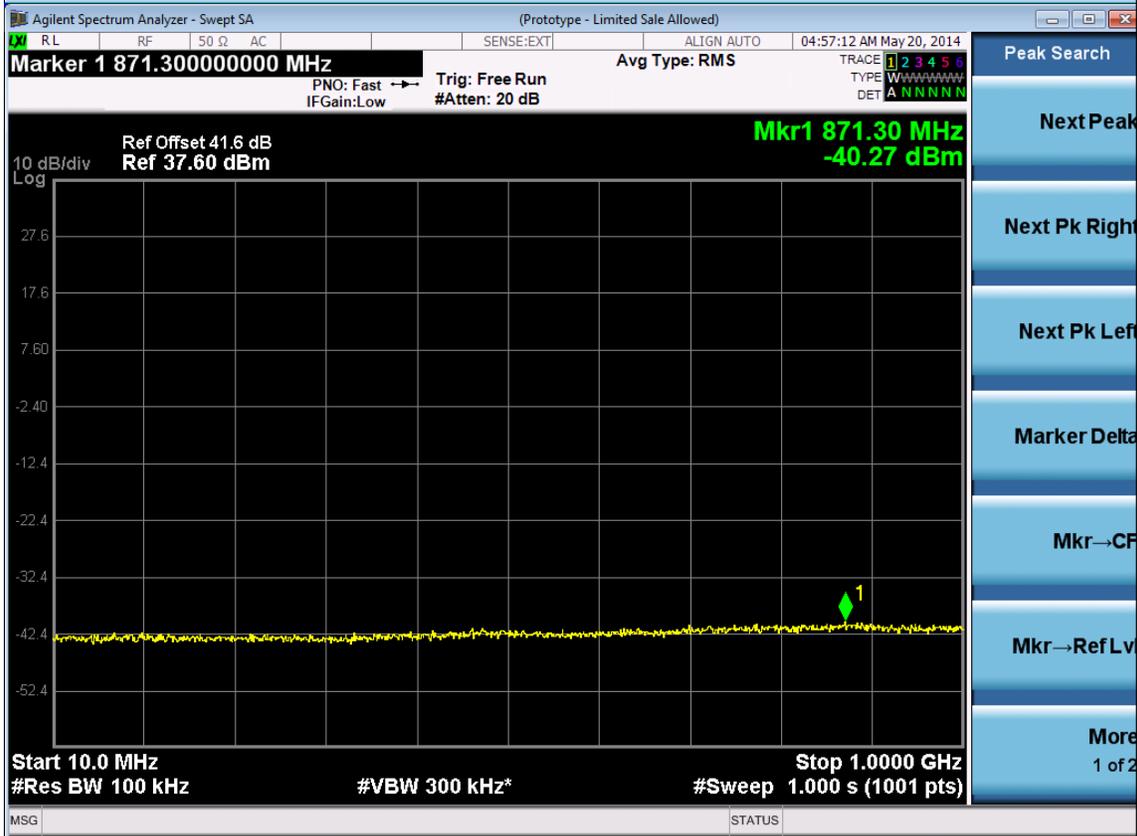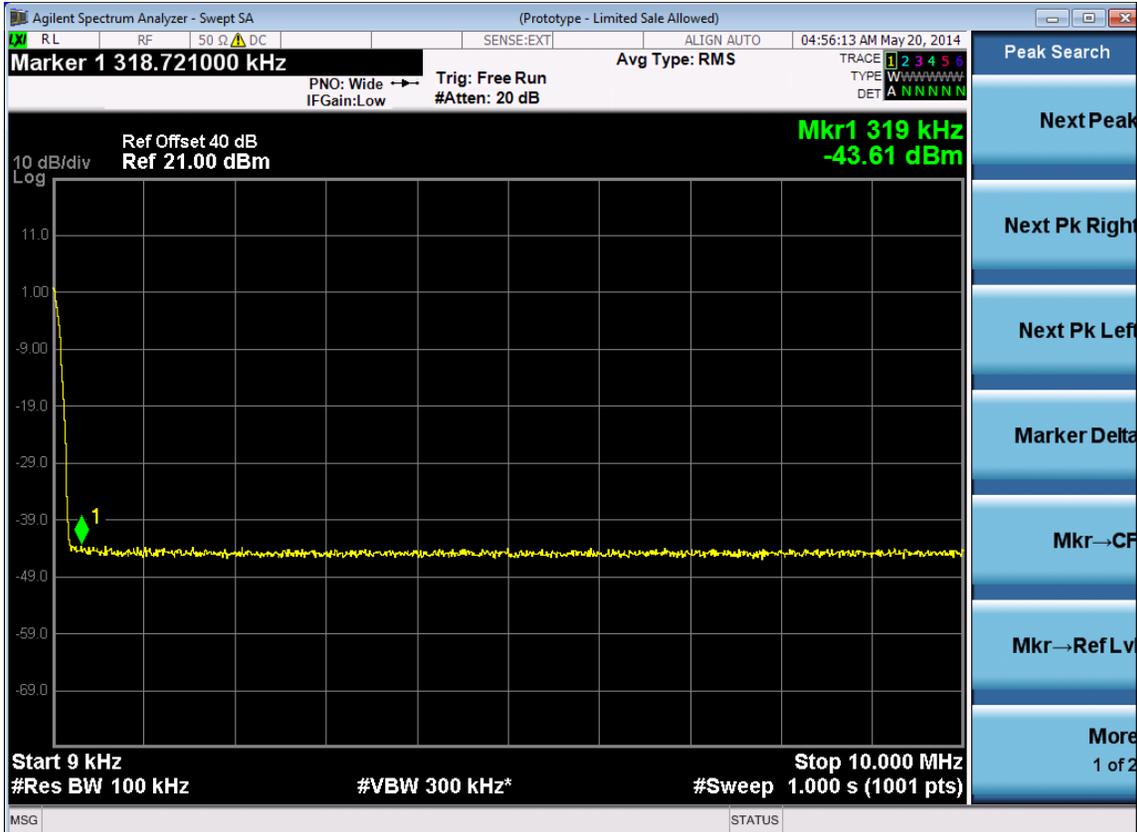


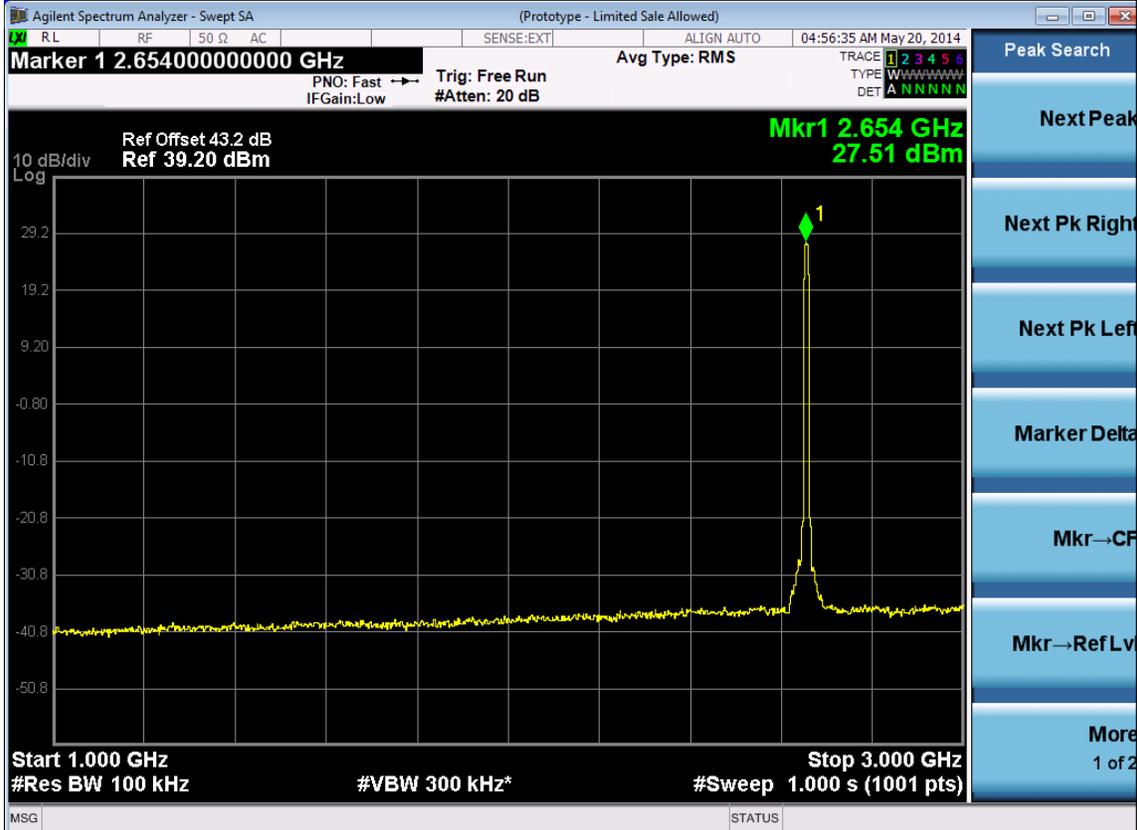



10M -Port 2 -2685MHz

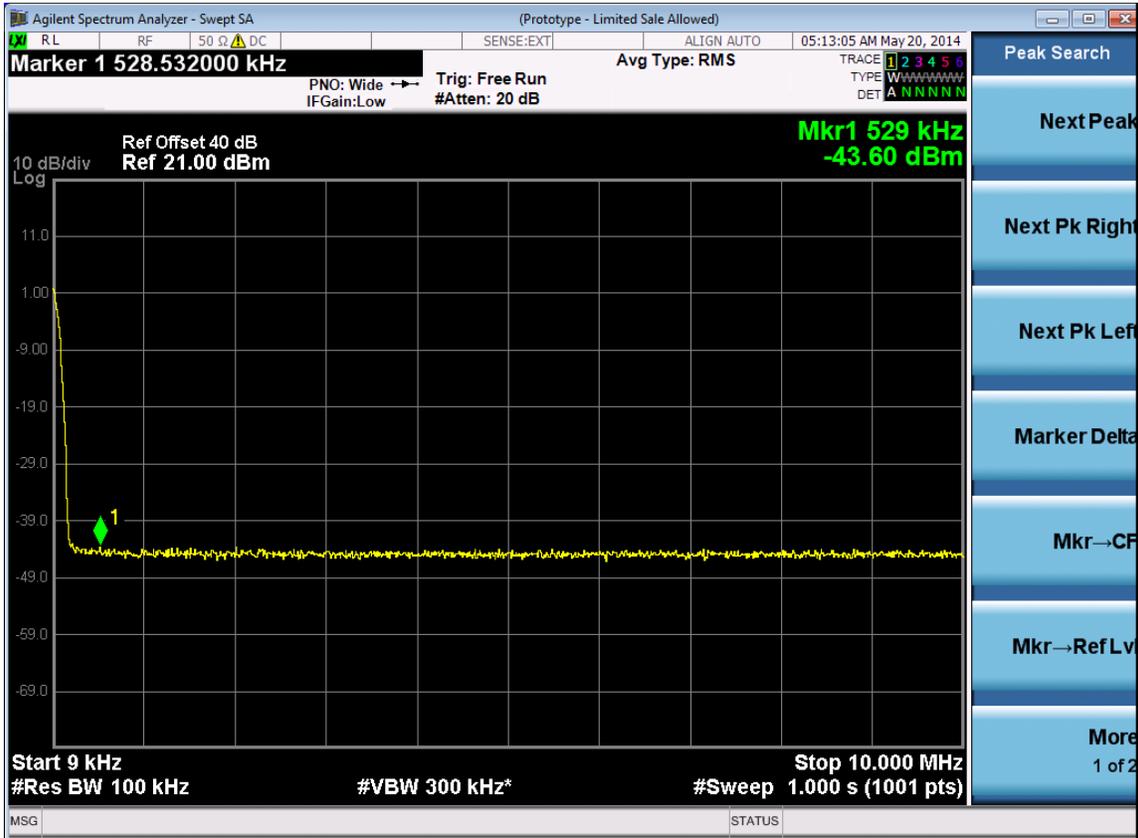






15M -Port 1 -2627.5MHz

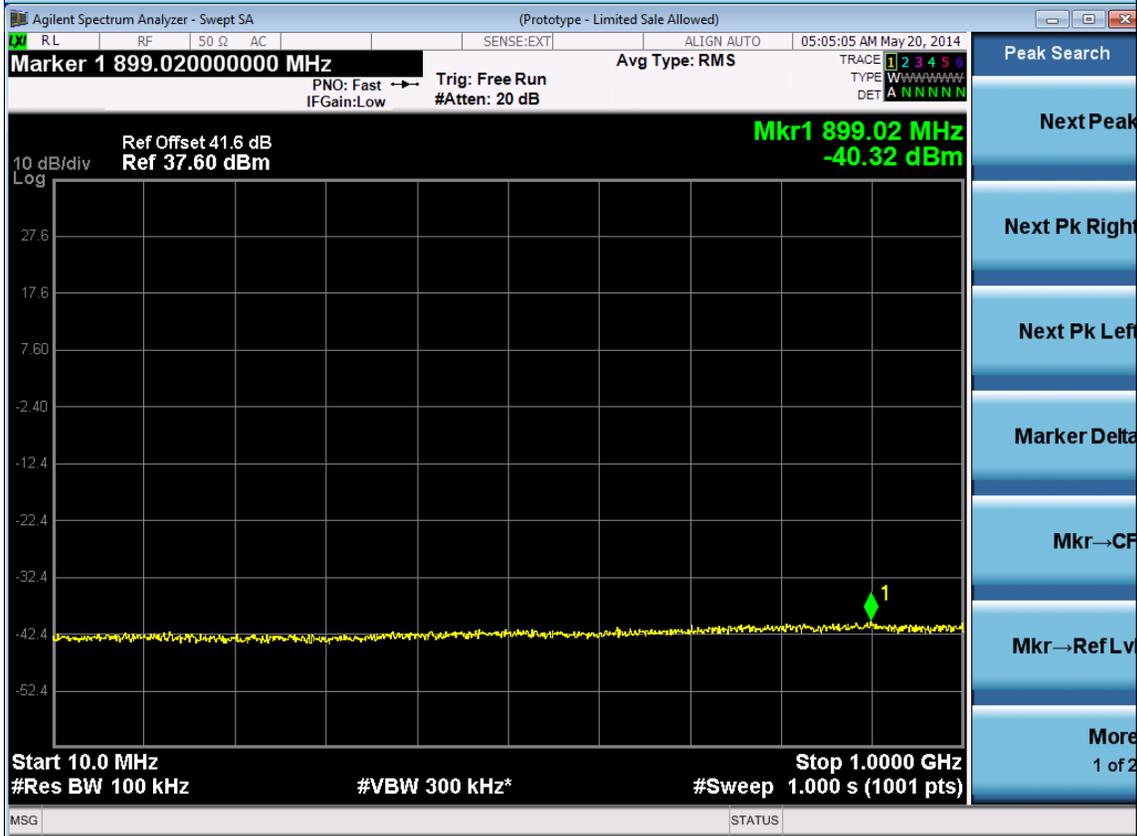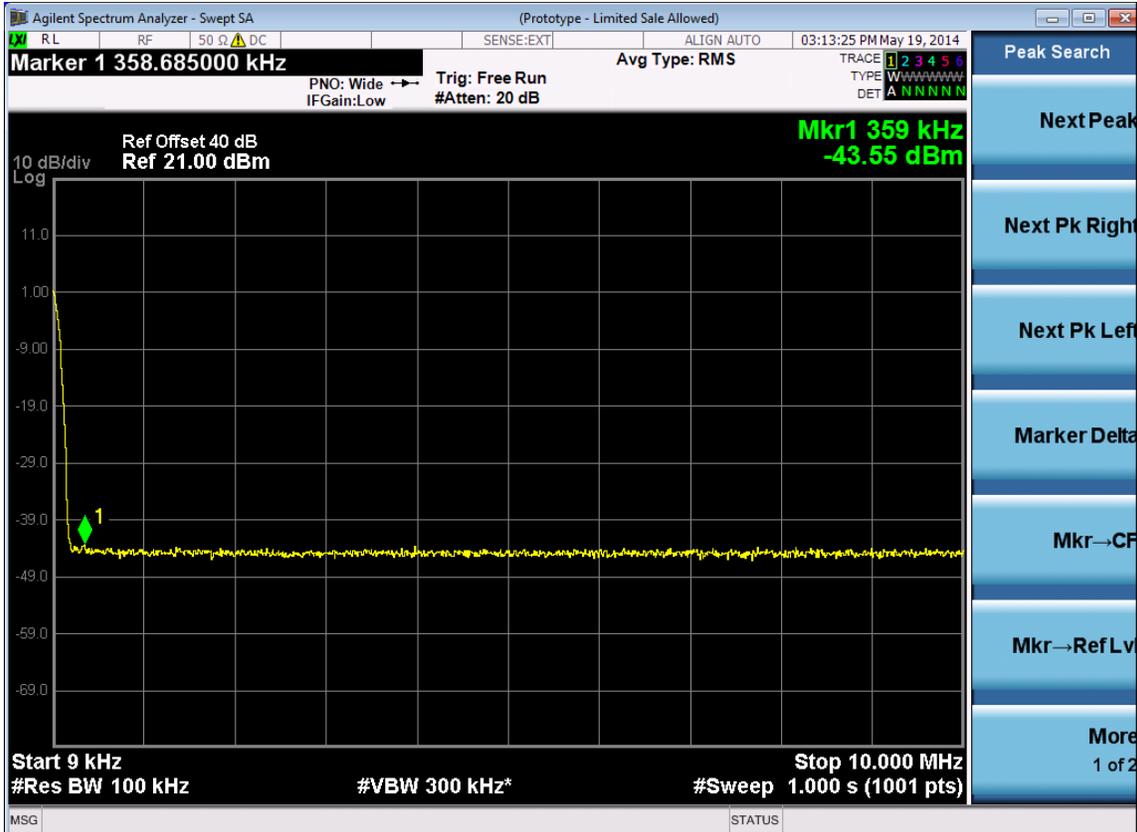

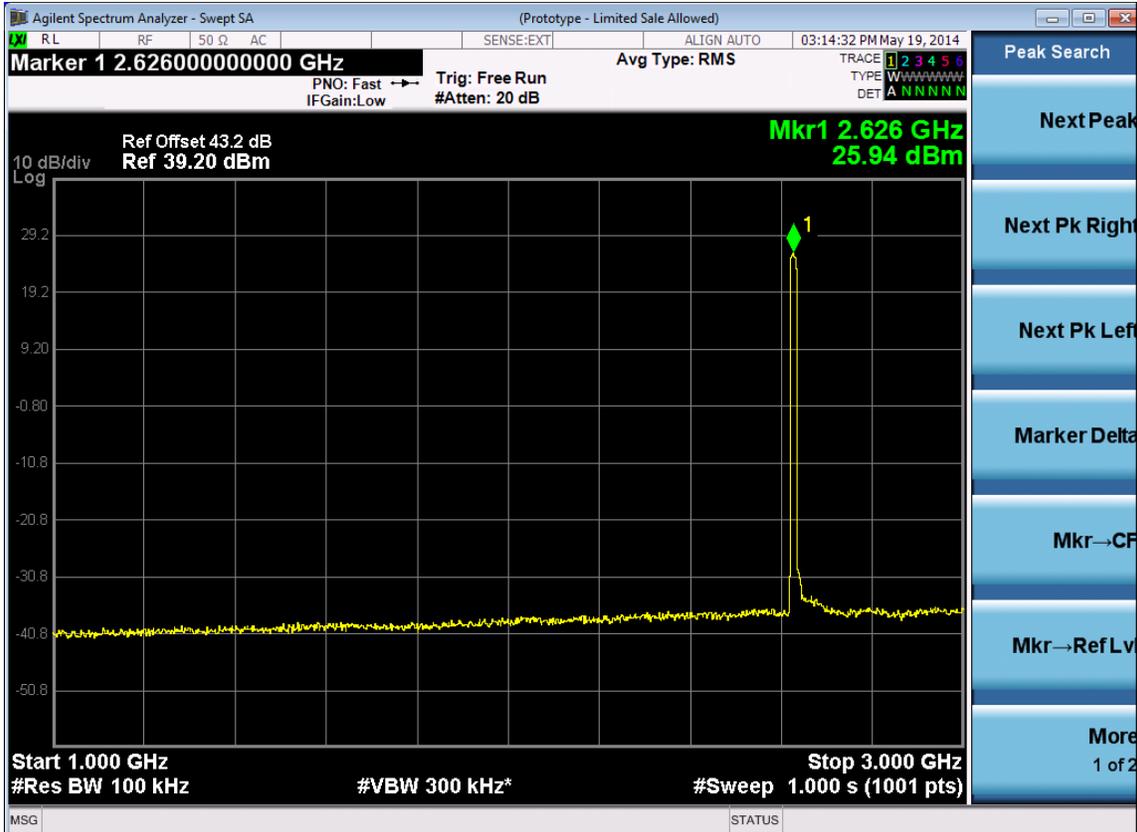



15M -Port 1 -2655MHz

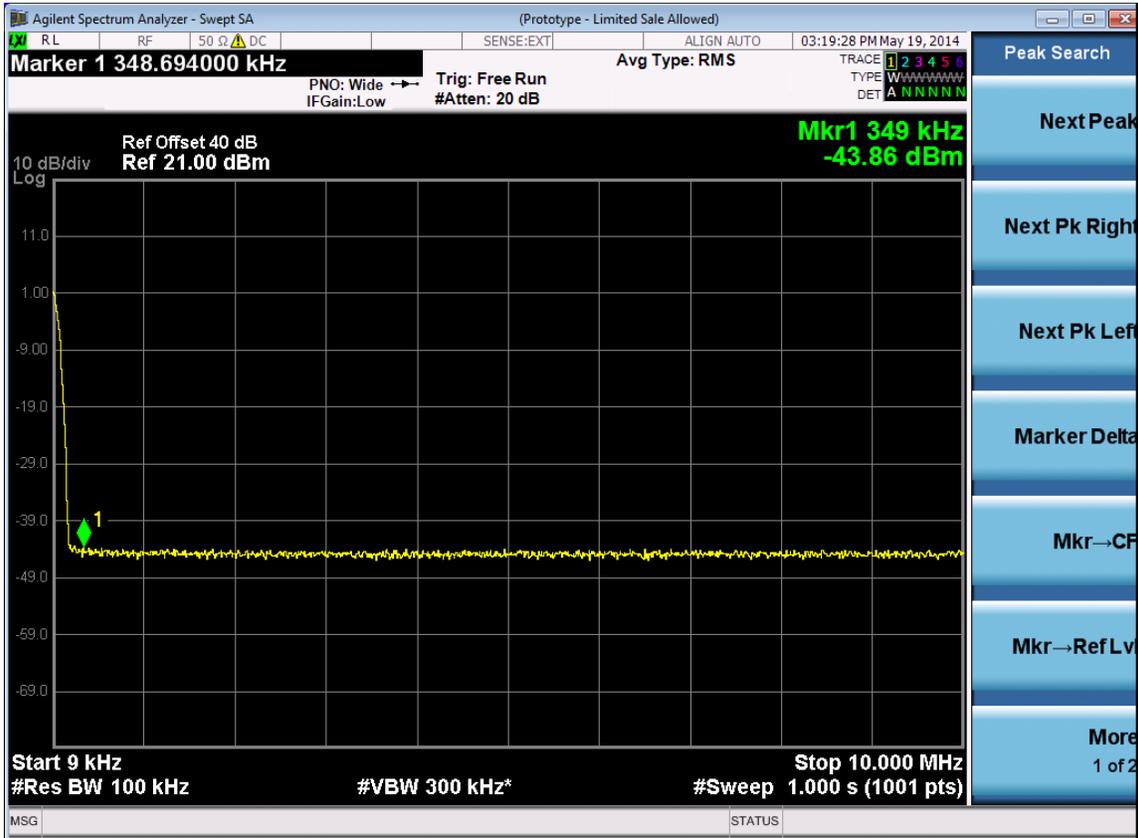


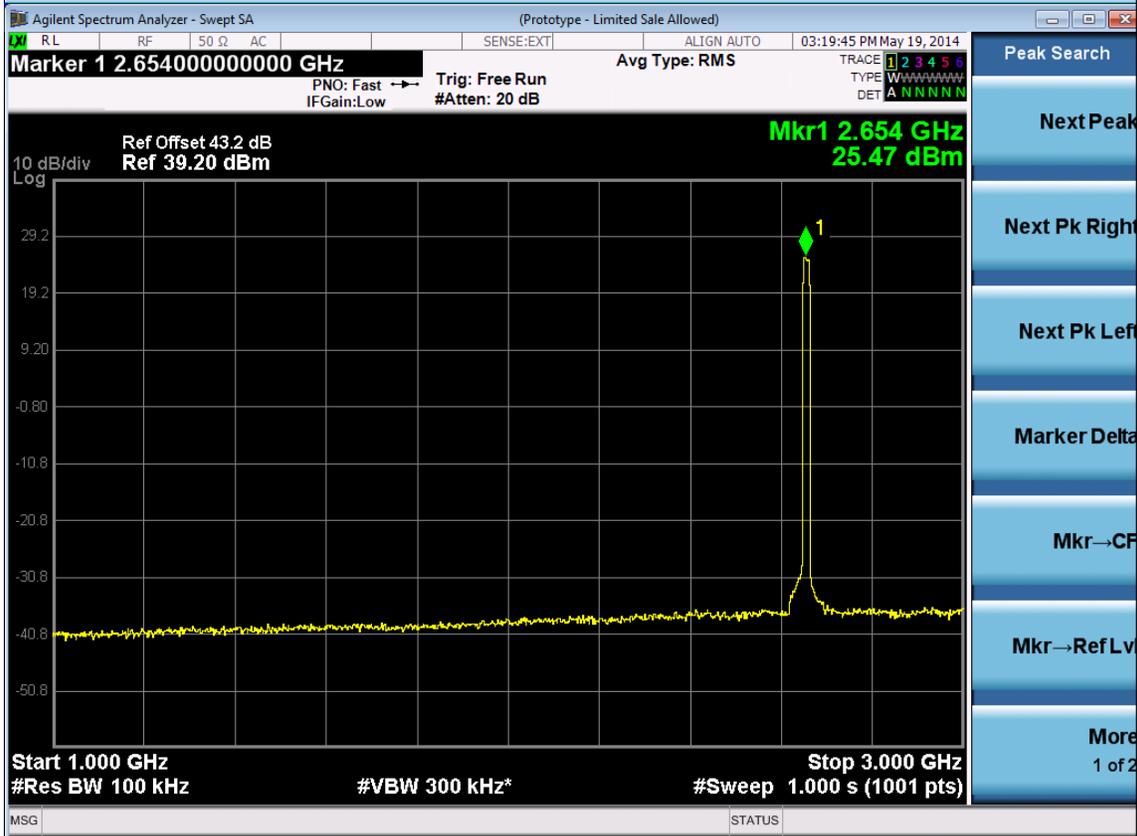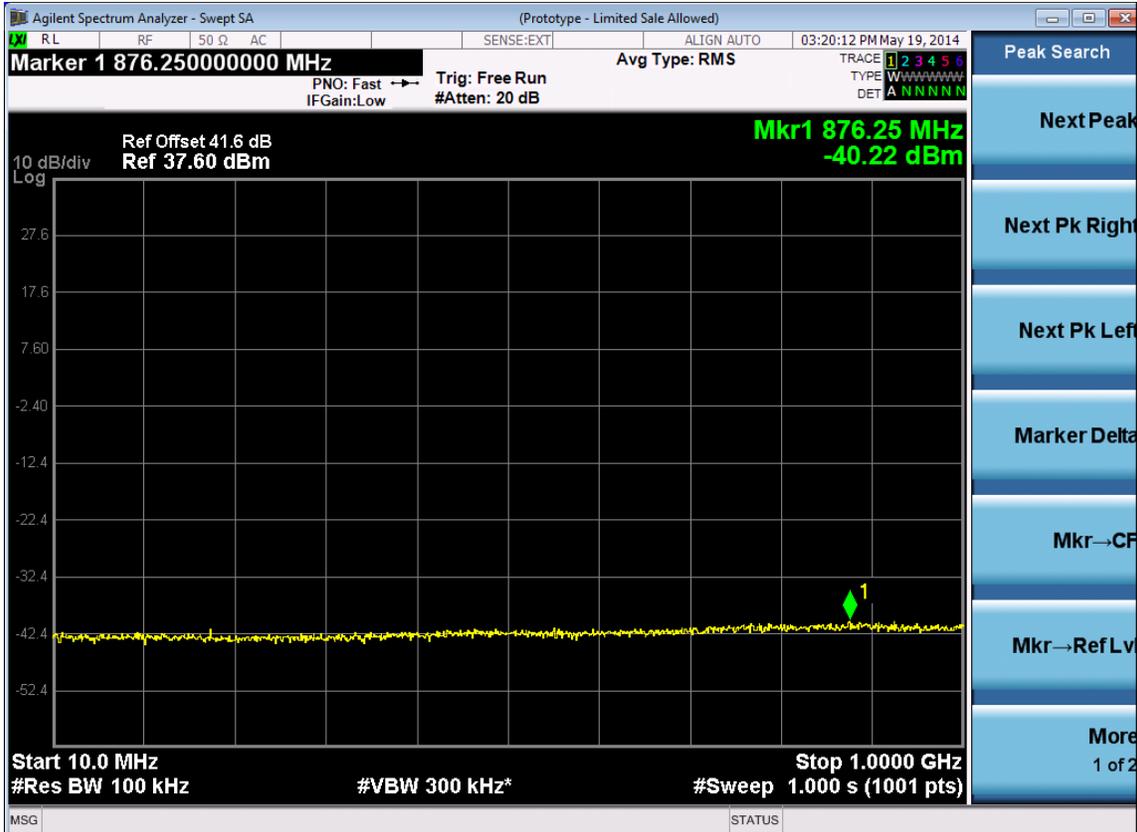






15M -Port 1 -2682.5MHz

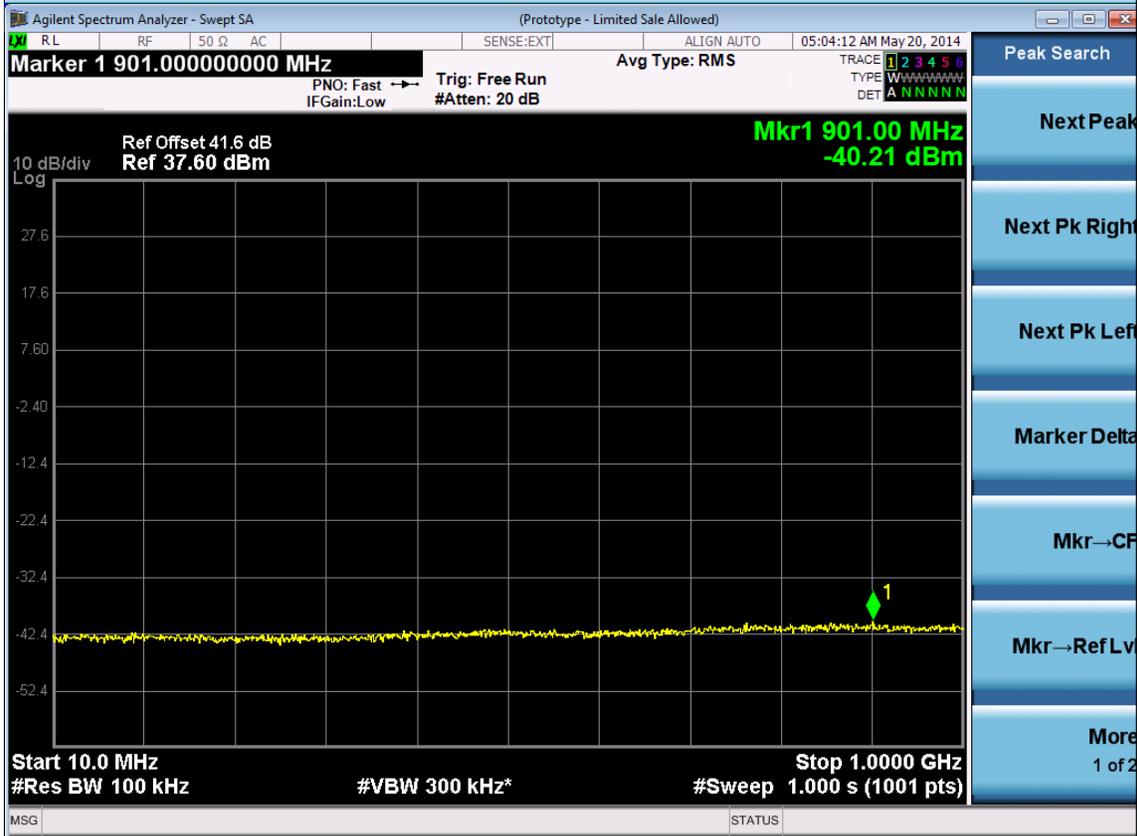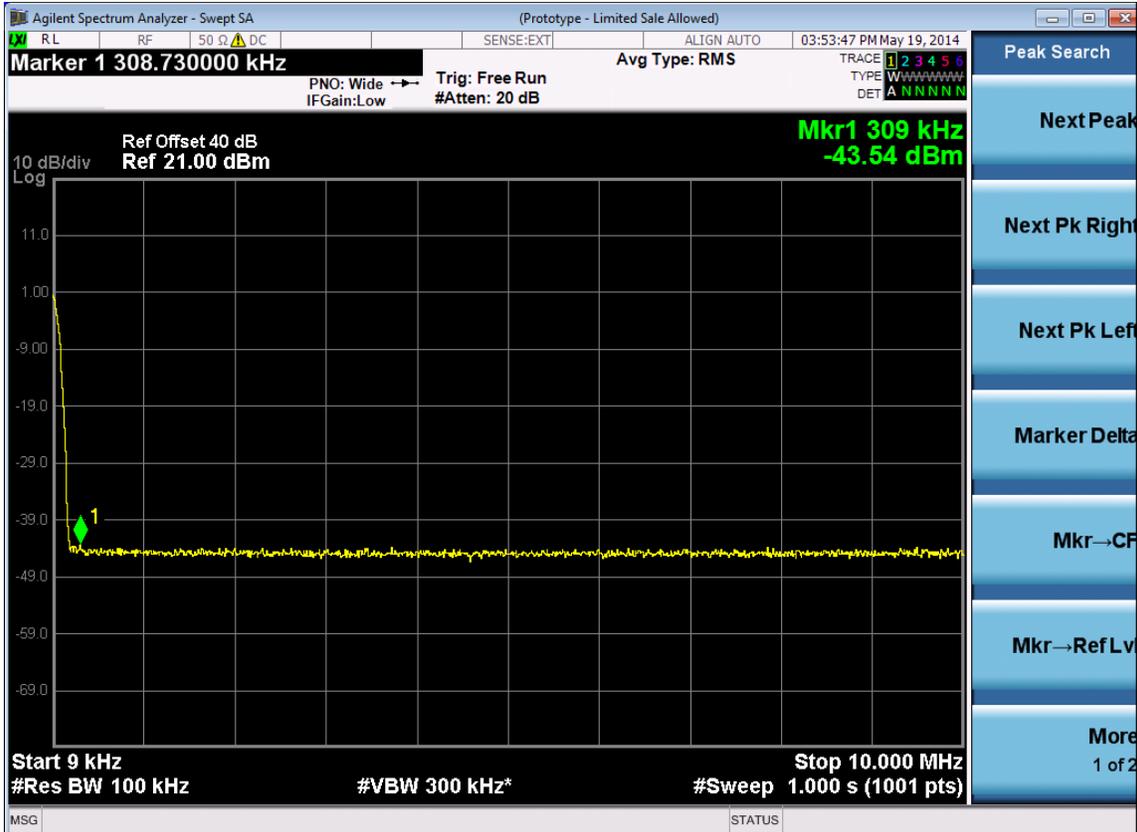

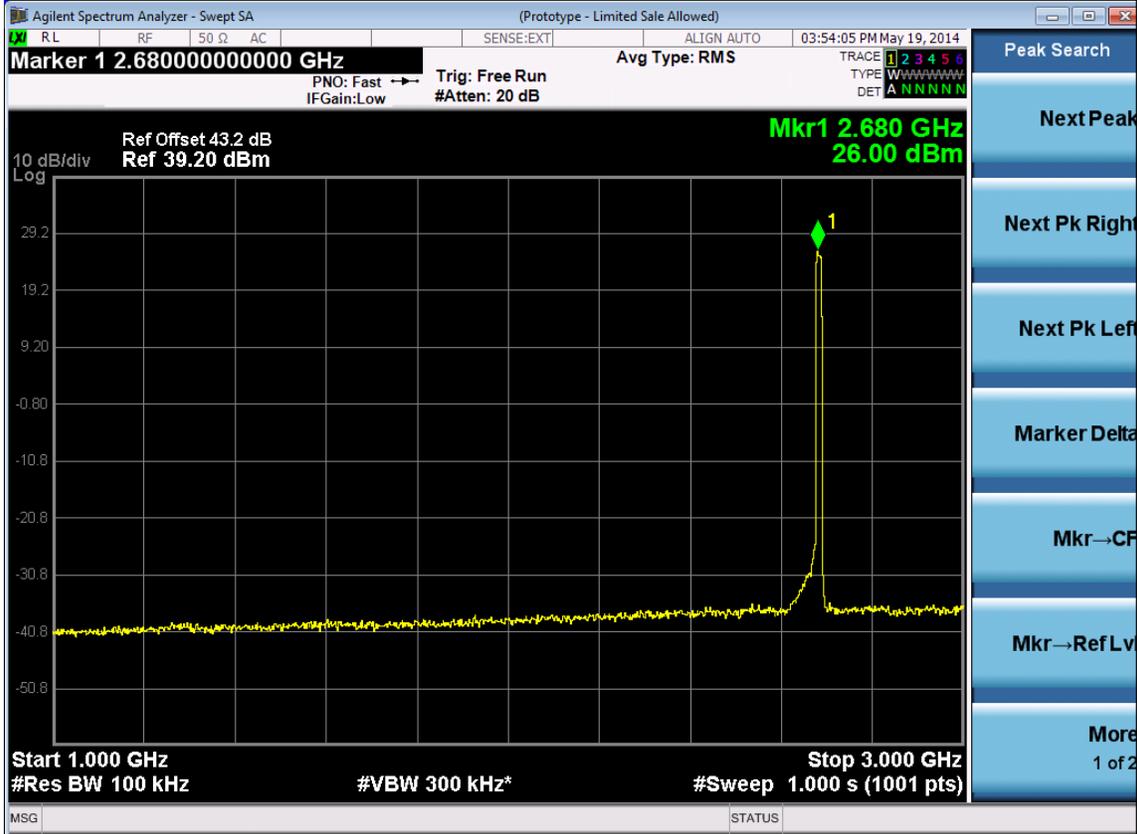



15M -Port 2 -2627.5MHz

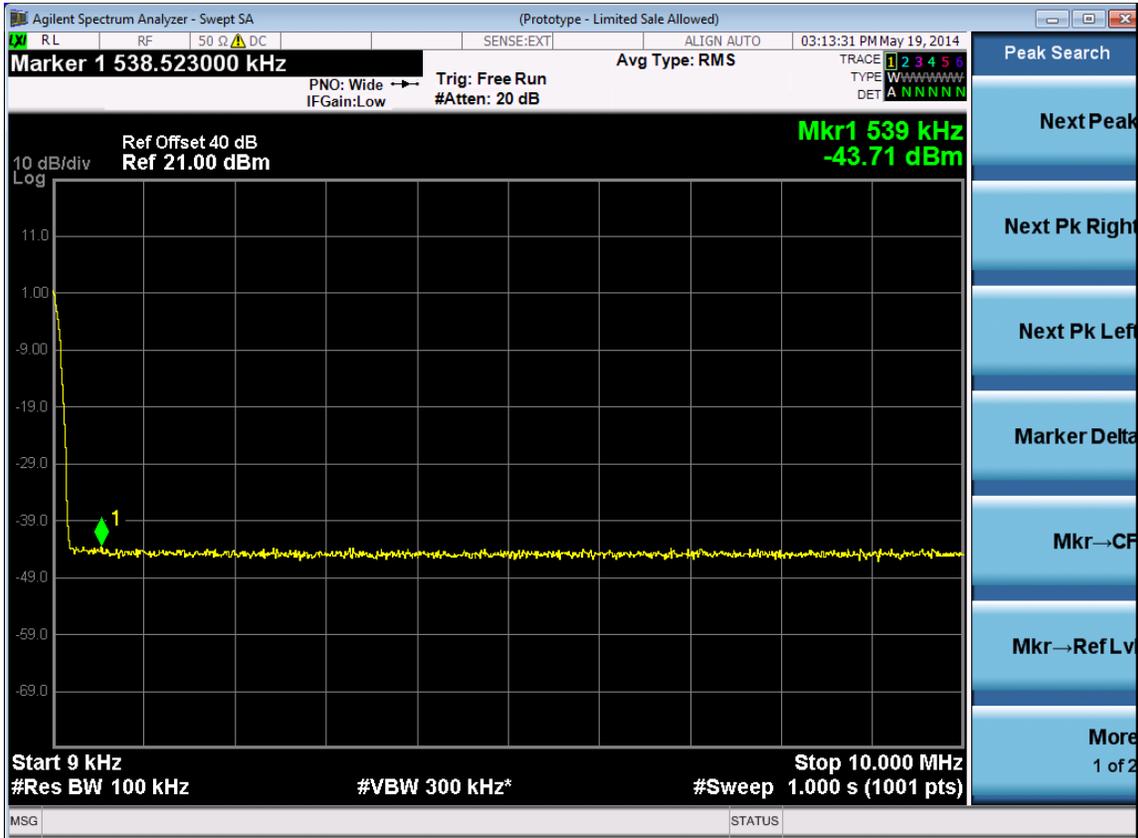


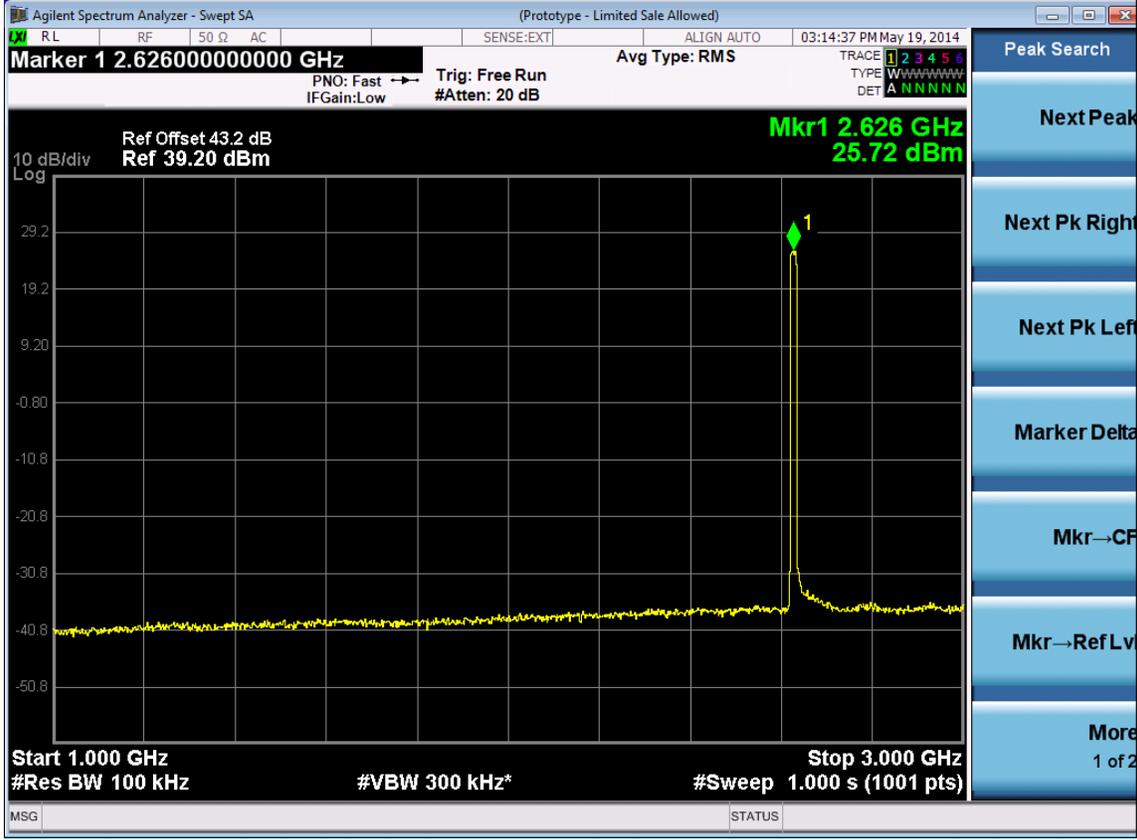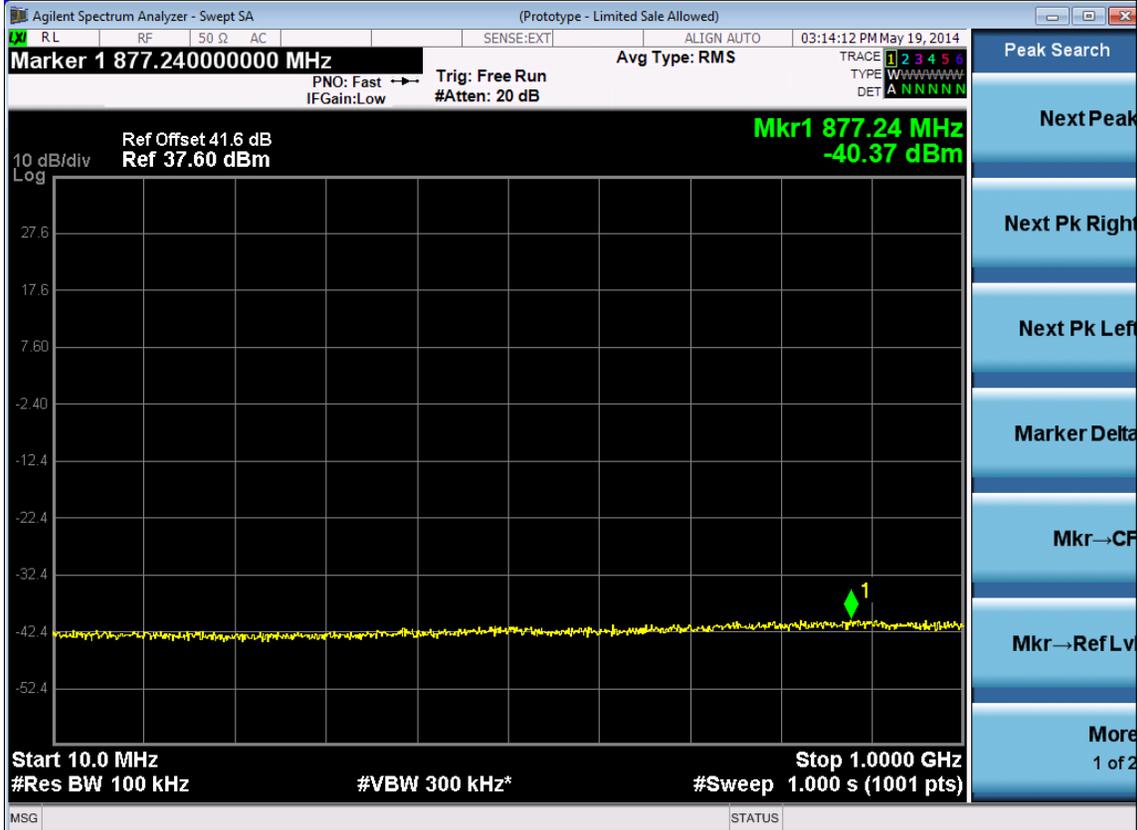






15M -Port 2 -2655MHz

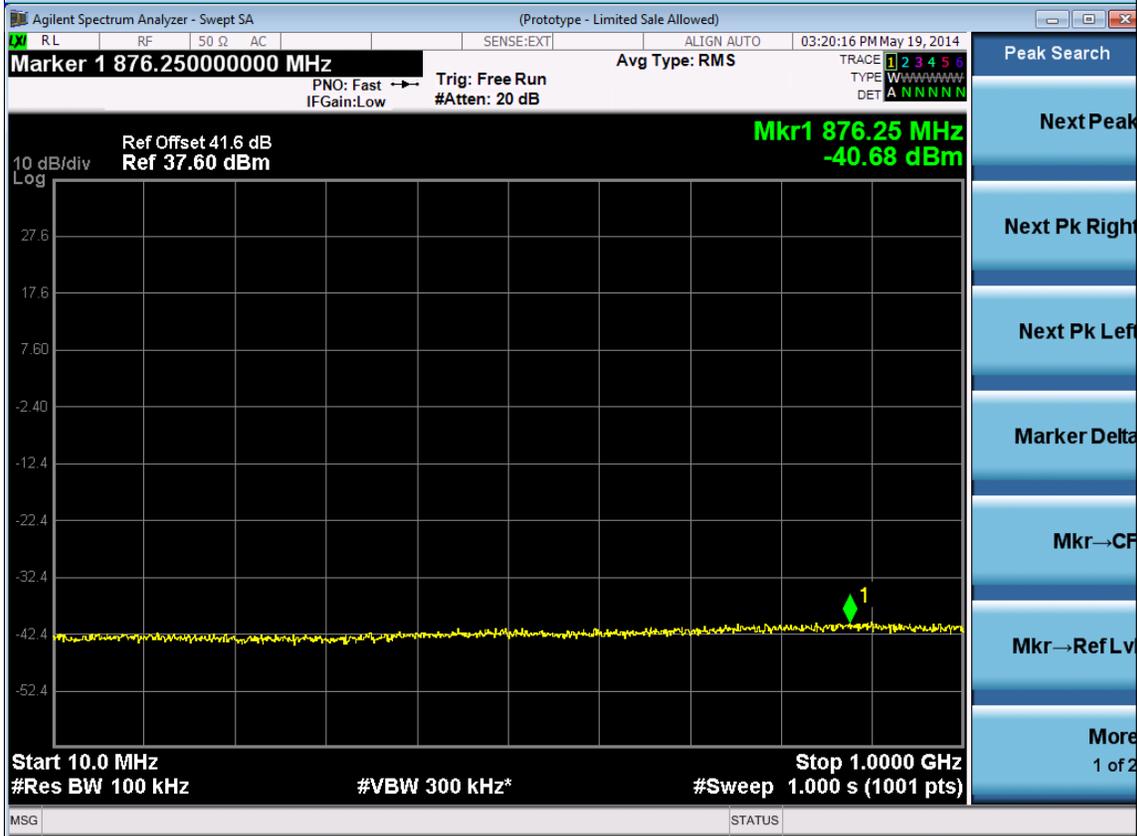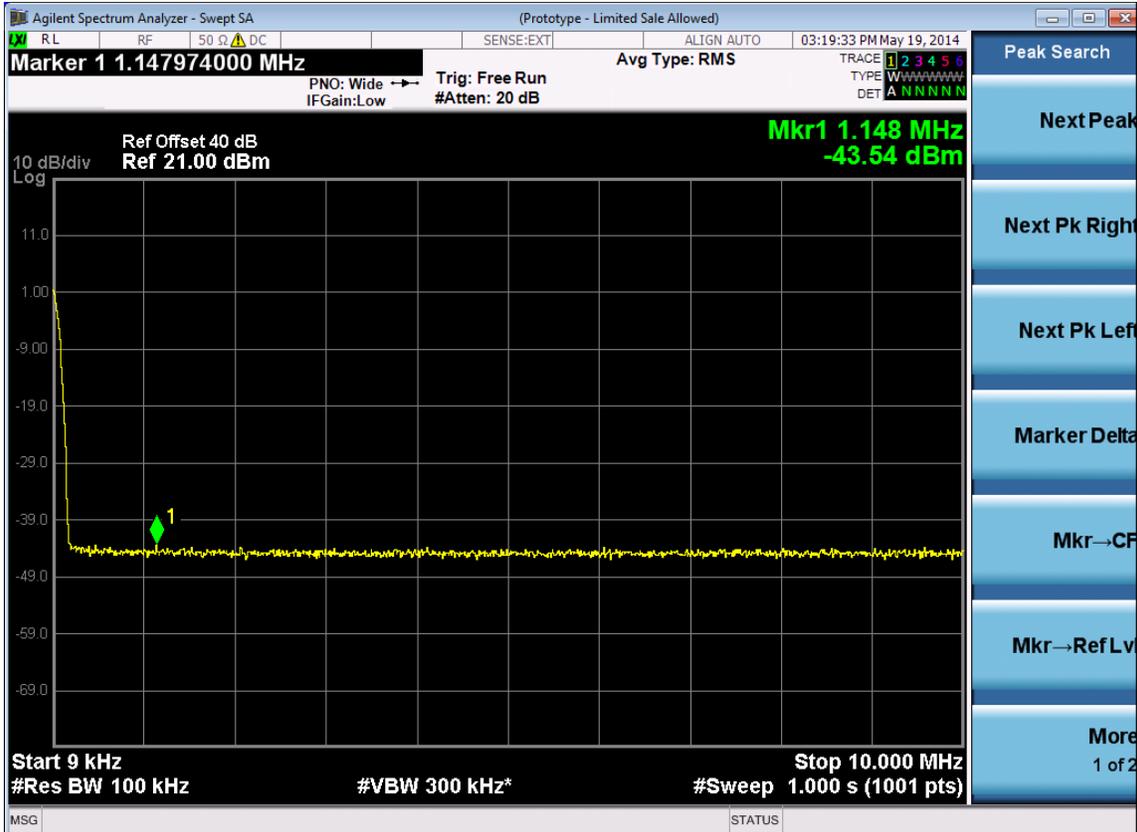

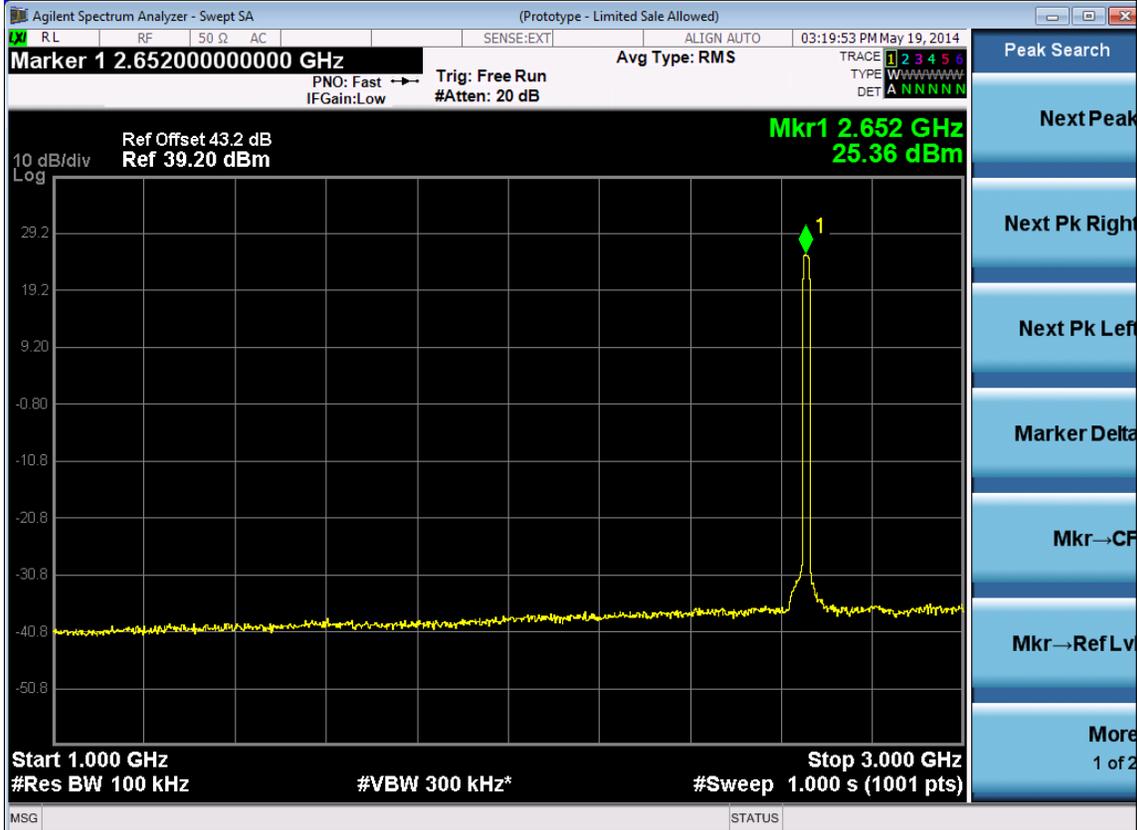



15M -Port 2 -2682.5MHz

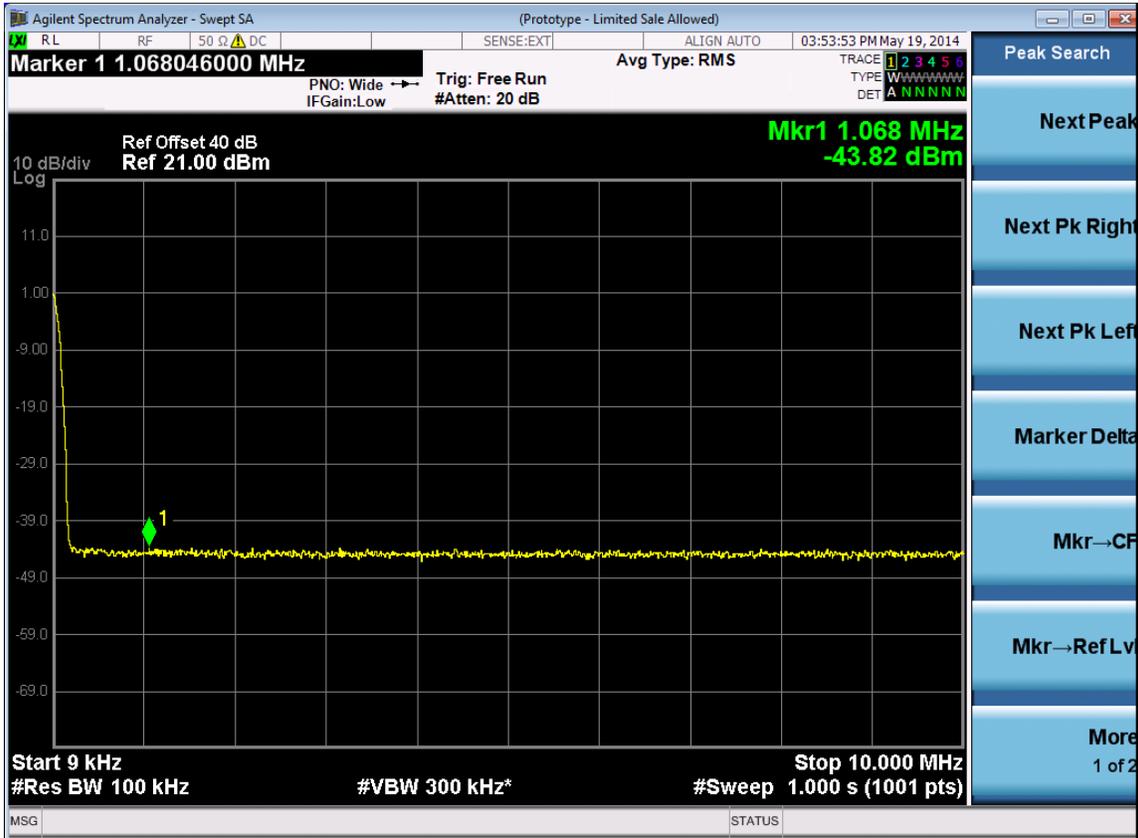


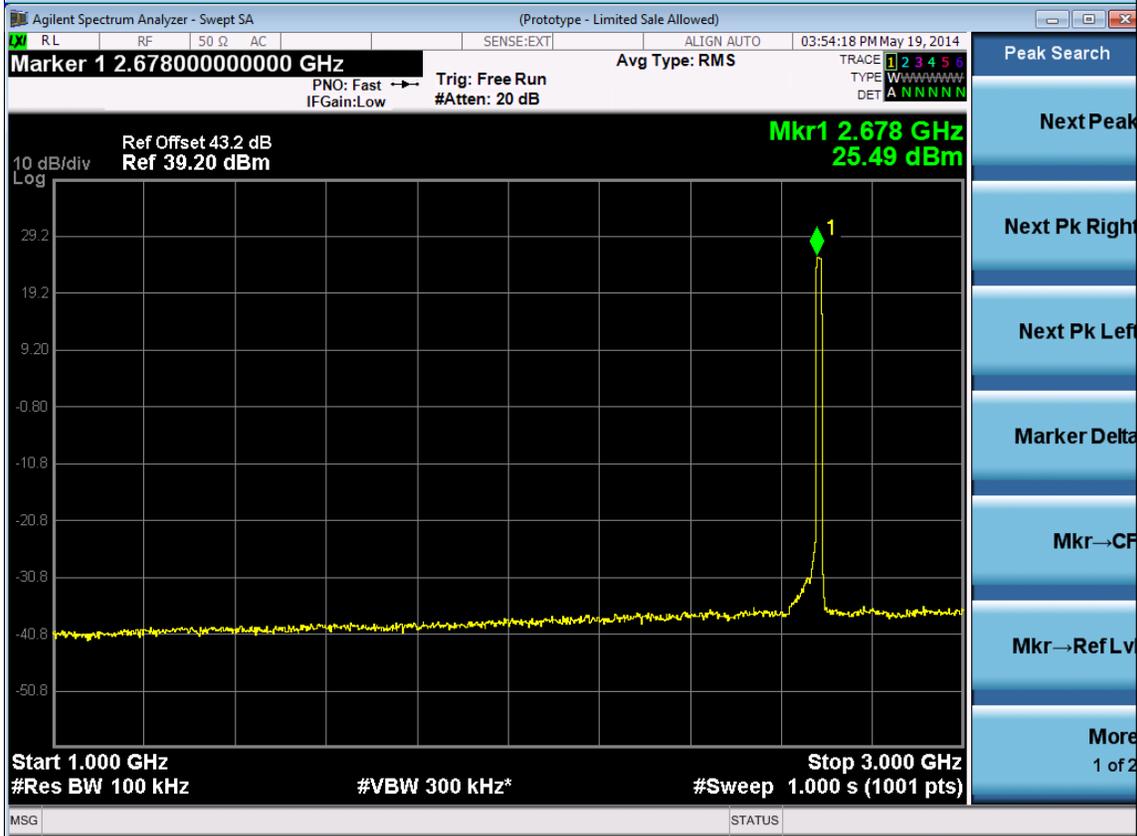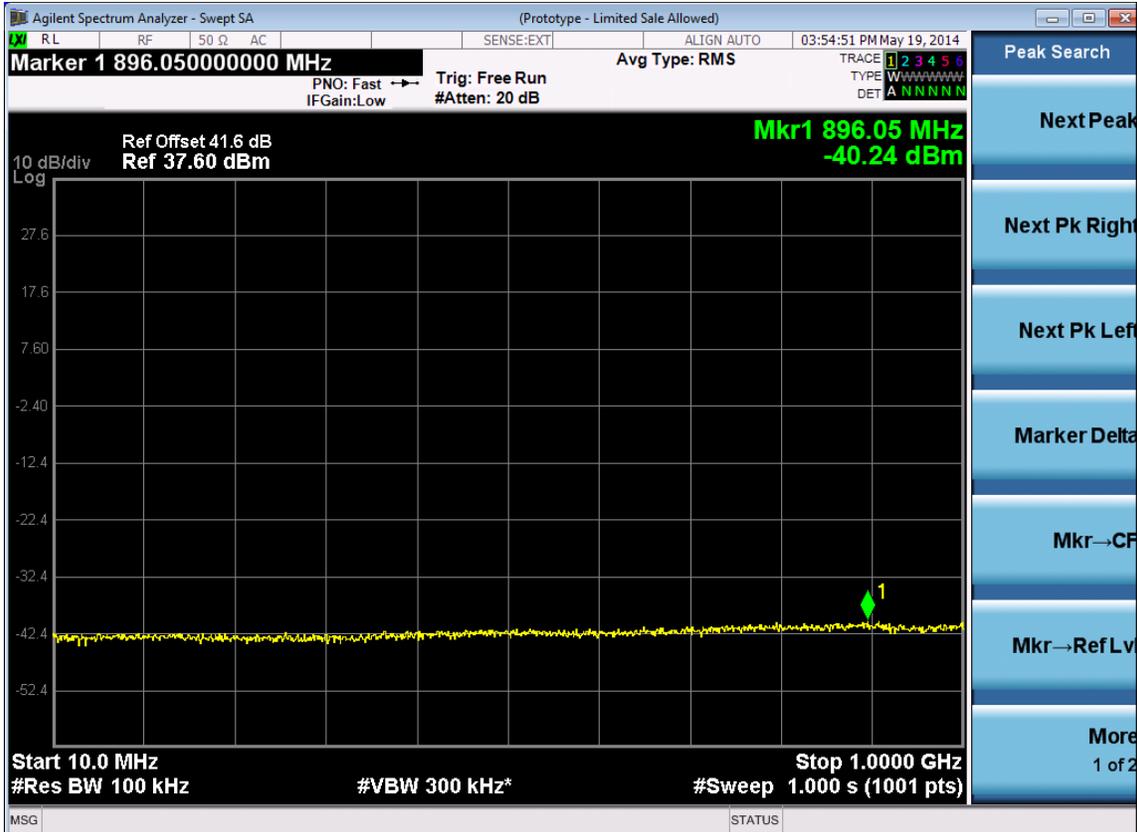






20M -Port 1 -2630MHz

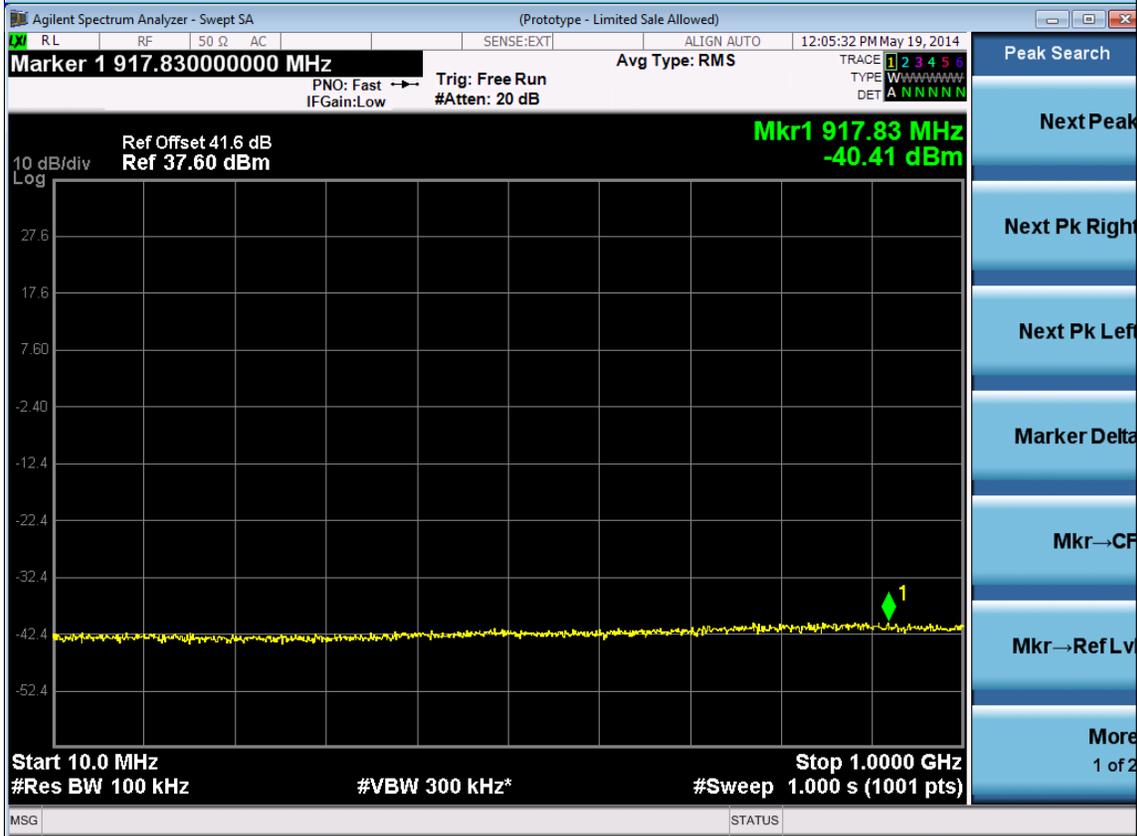
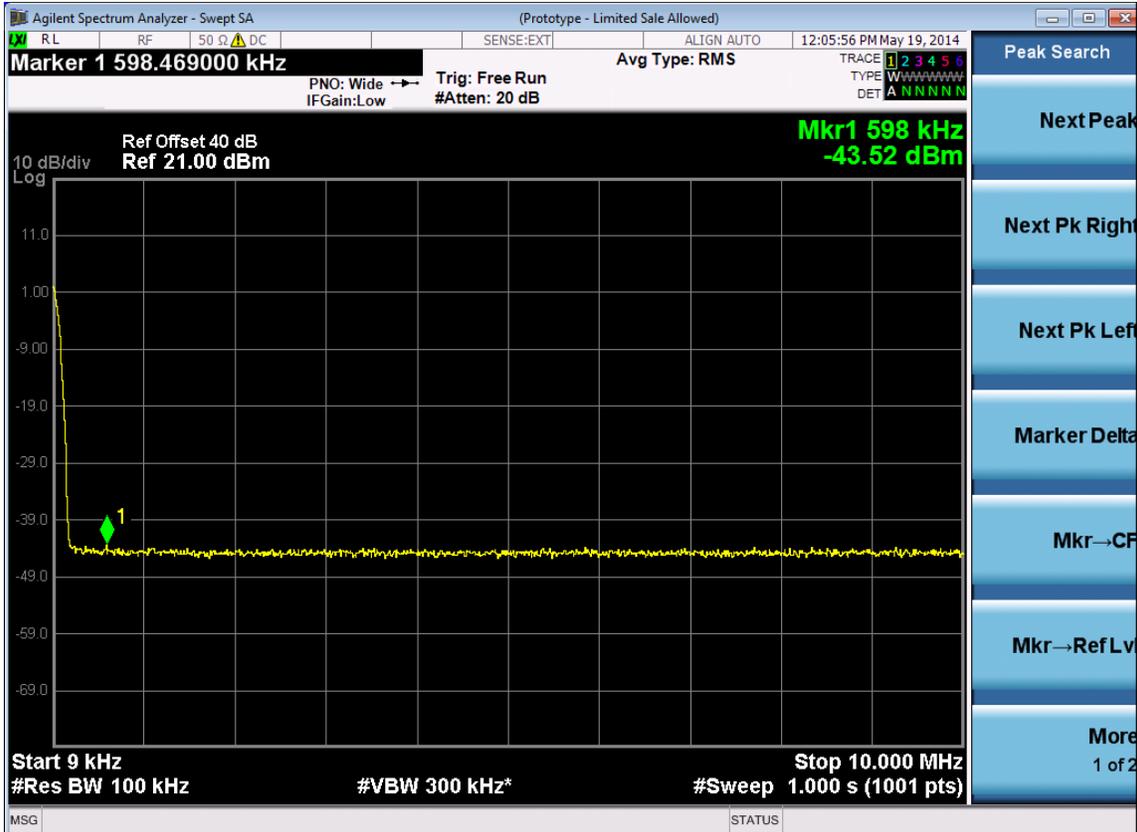


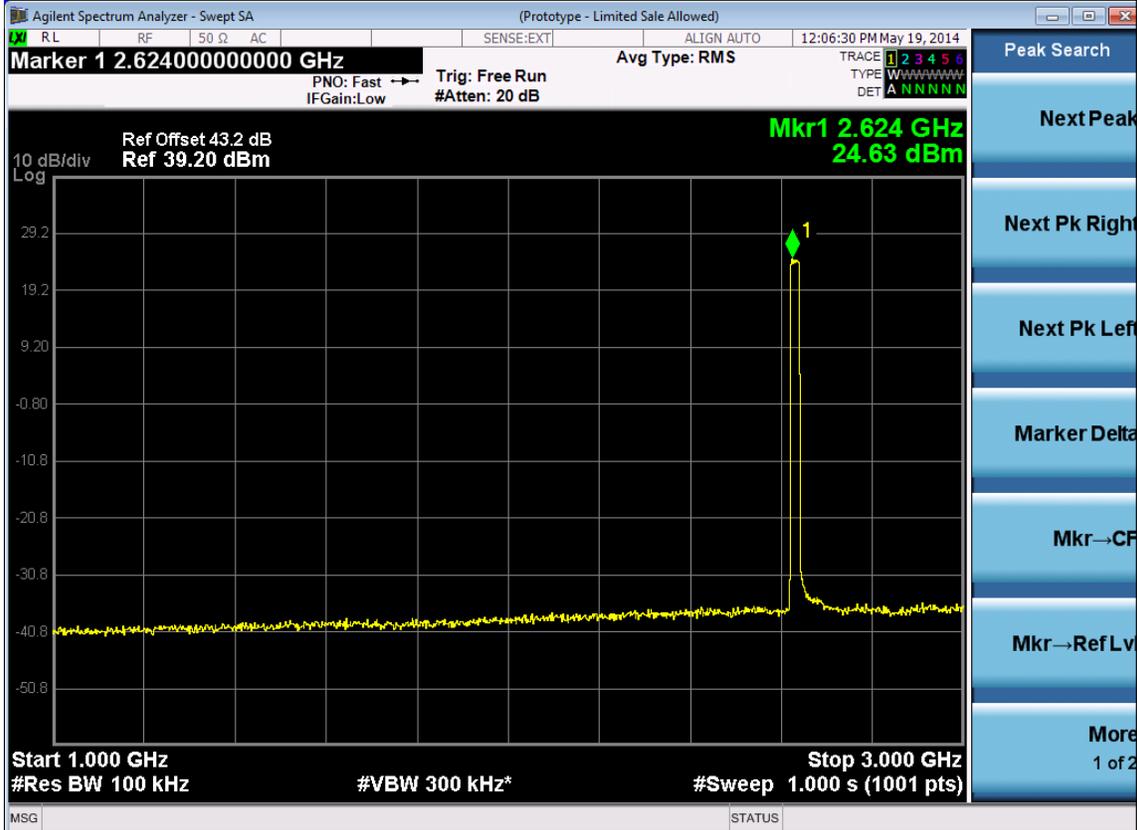


20M -Port 1 -2655MHz

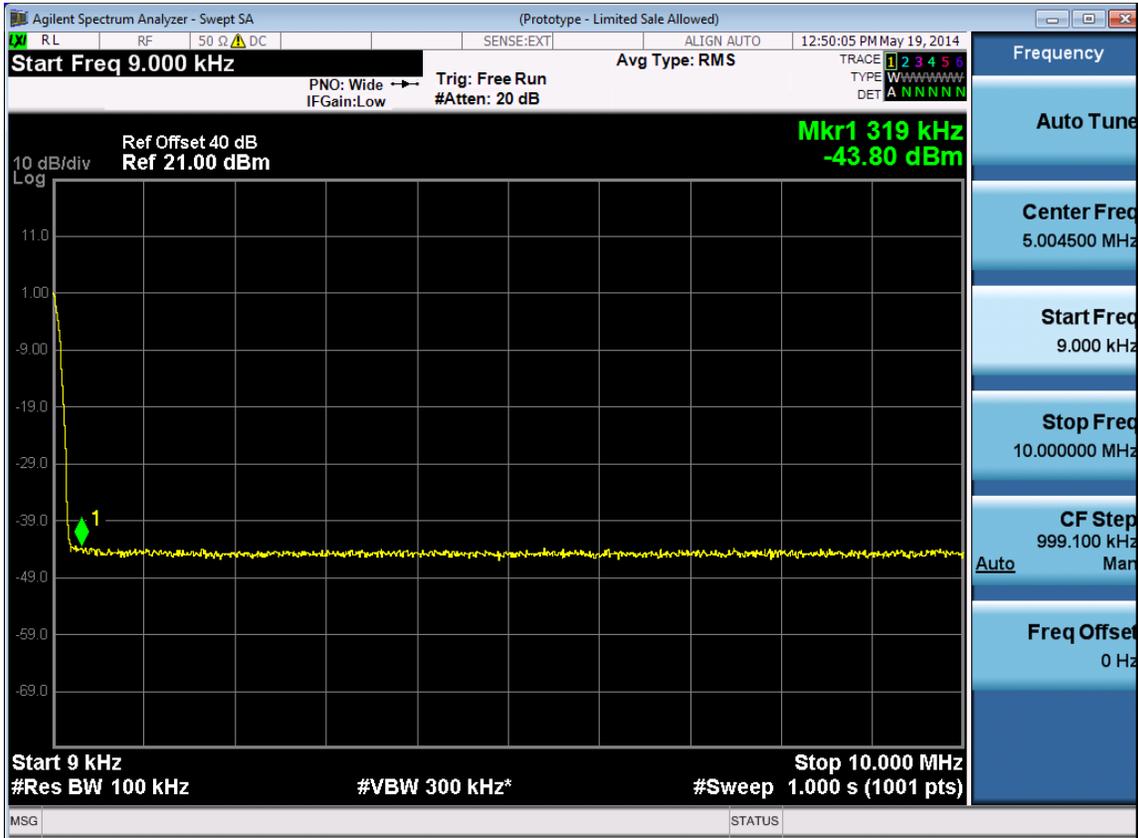

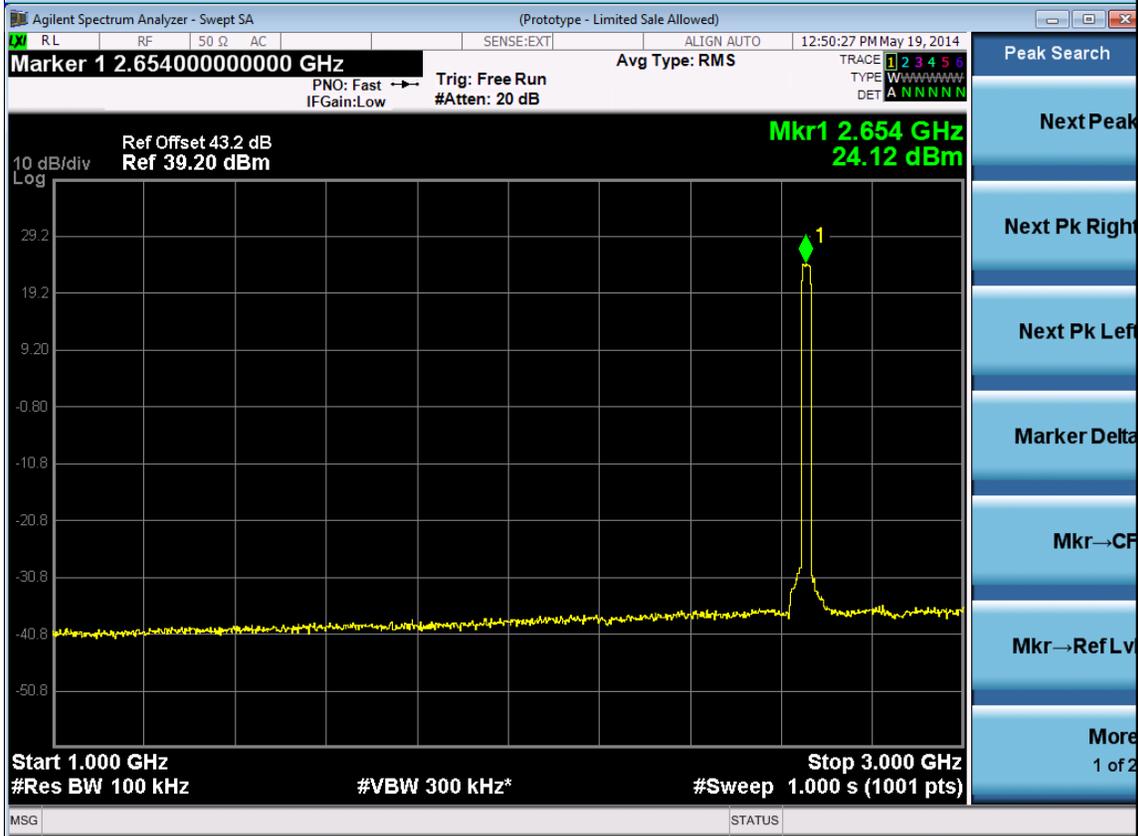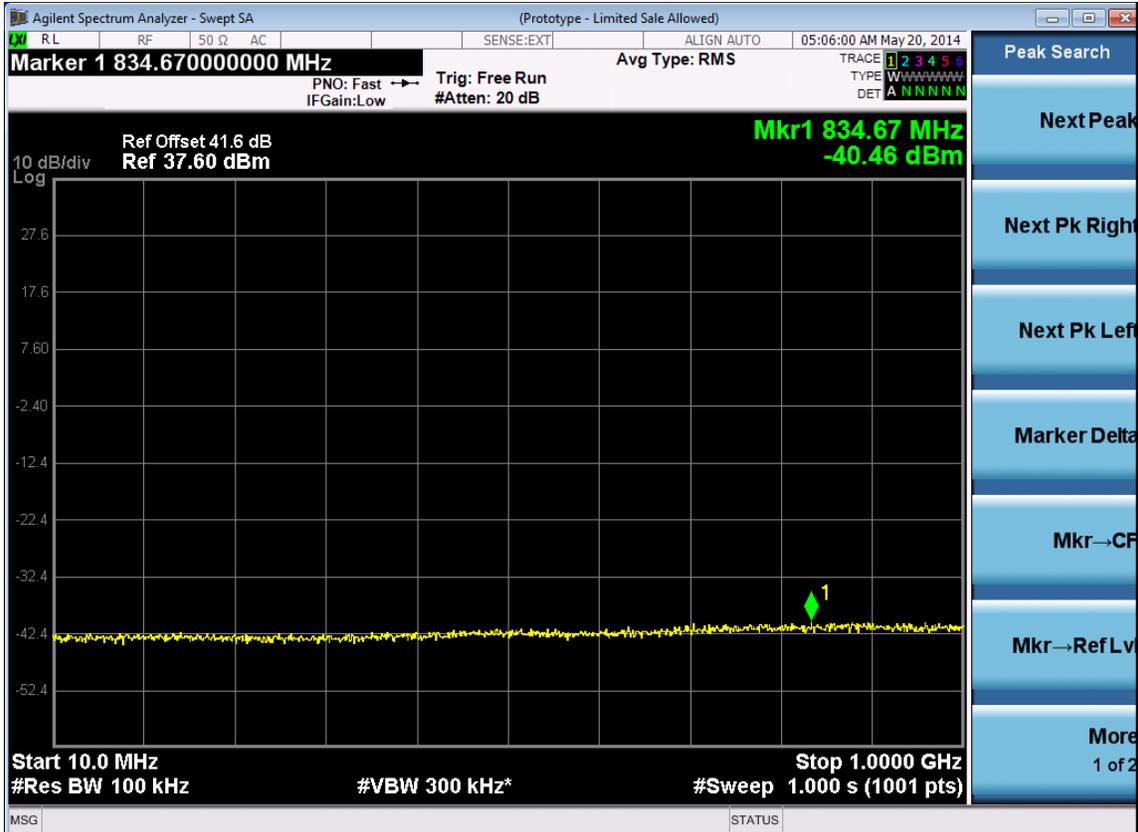

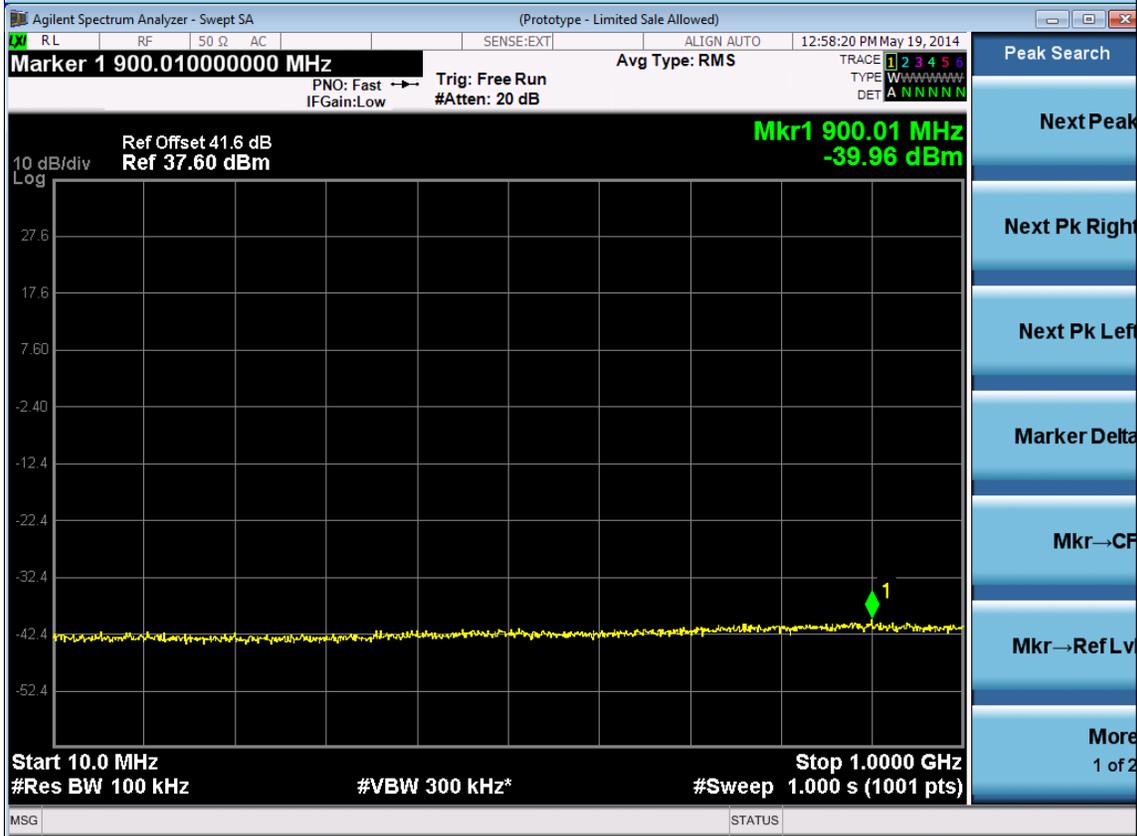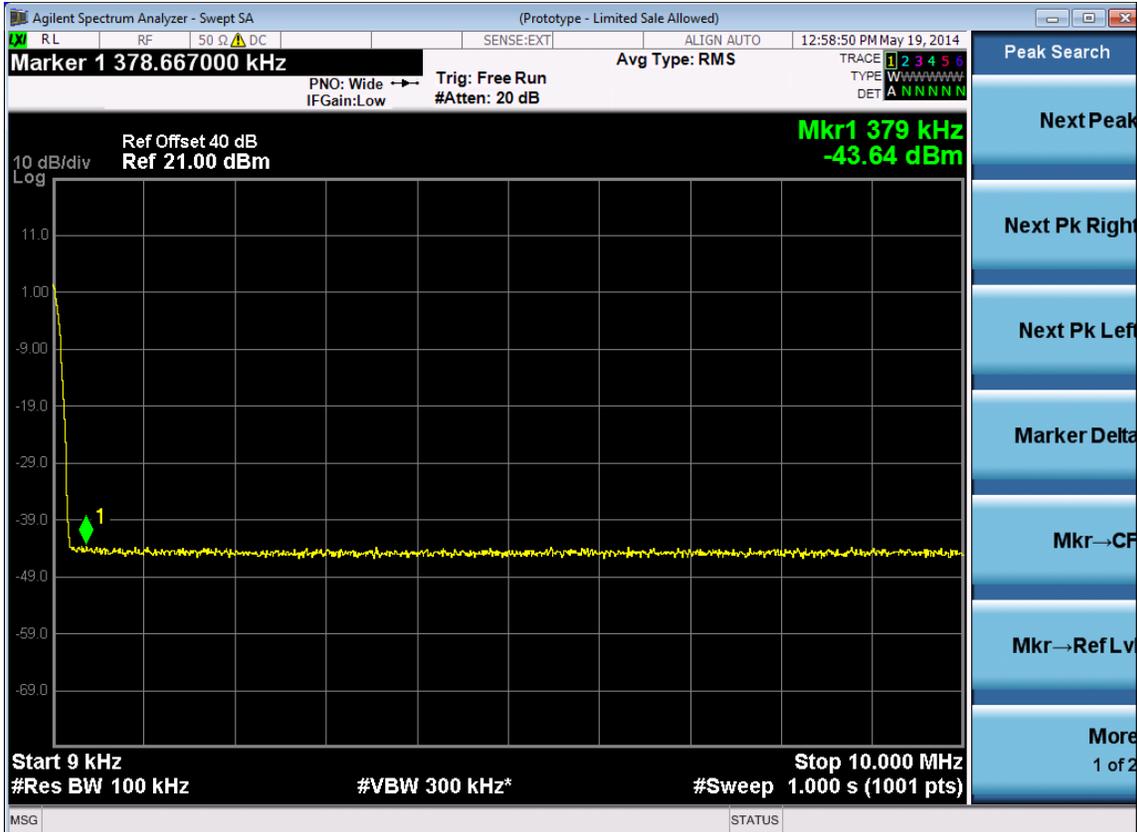

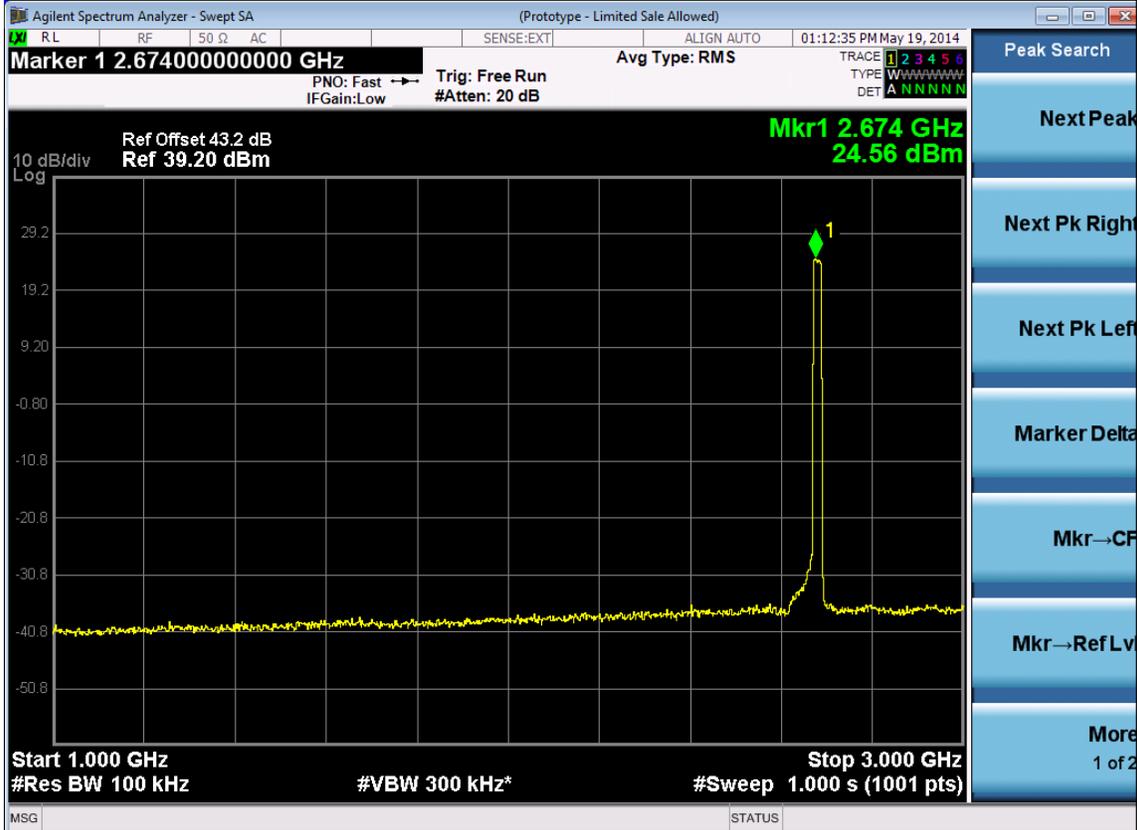


- Peak Search
- Next Peak
- Next Pk Right
- Next Pk Left
- Marker Delta
- Mkr→CF
- Mkr→Ref Lv
- More 1 of 2





- Peak Search
- Next Peak
- Next Pk Right
- Next Pk Left
- Marker Delta
- Mkr→CF
- Mkr→Ref Lv
- More 1 of 2

20M -Port 2 -2630MHz

V

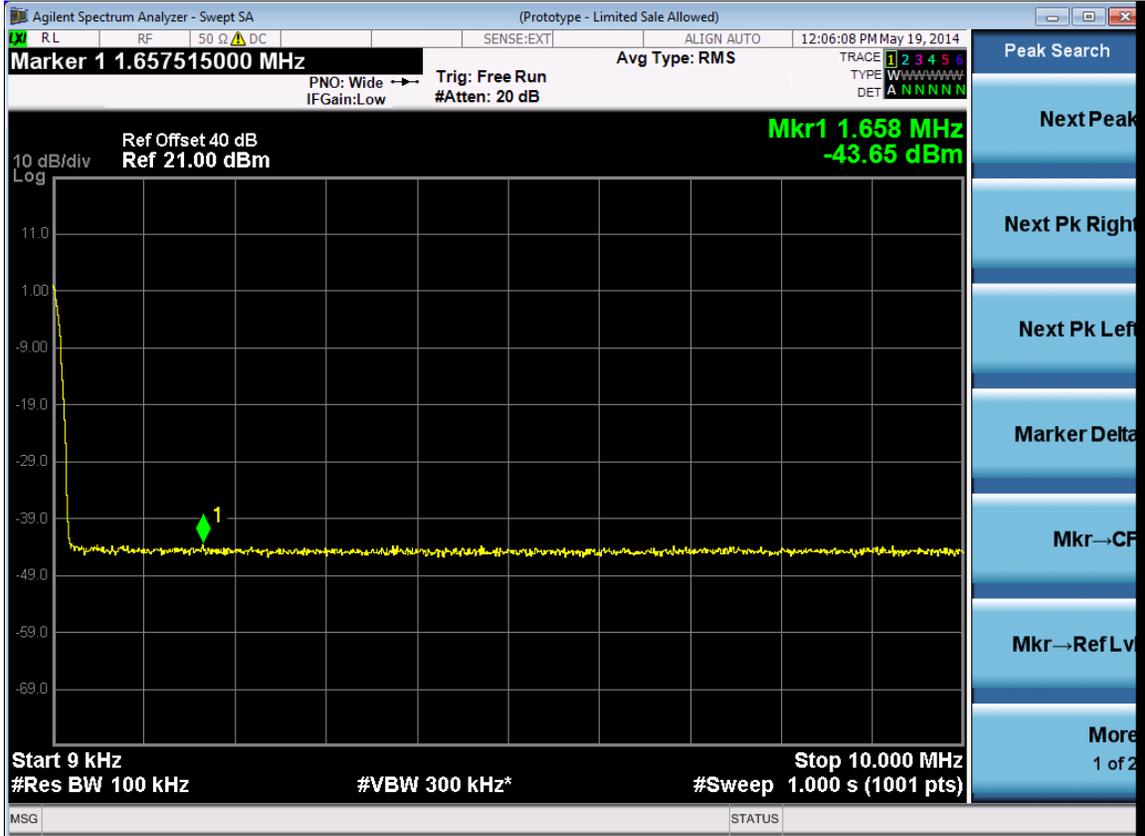

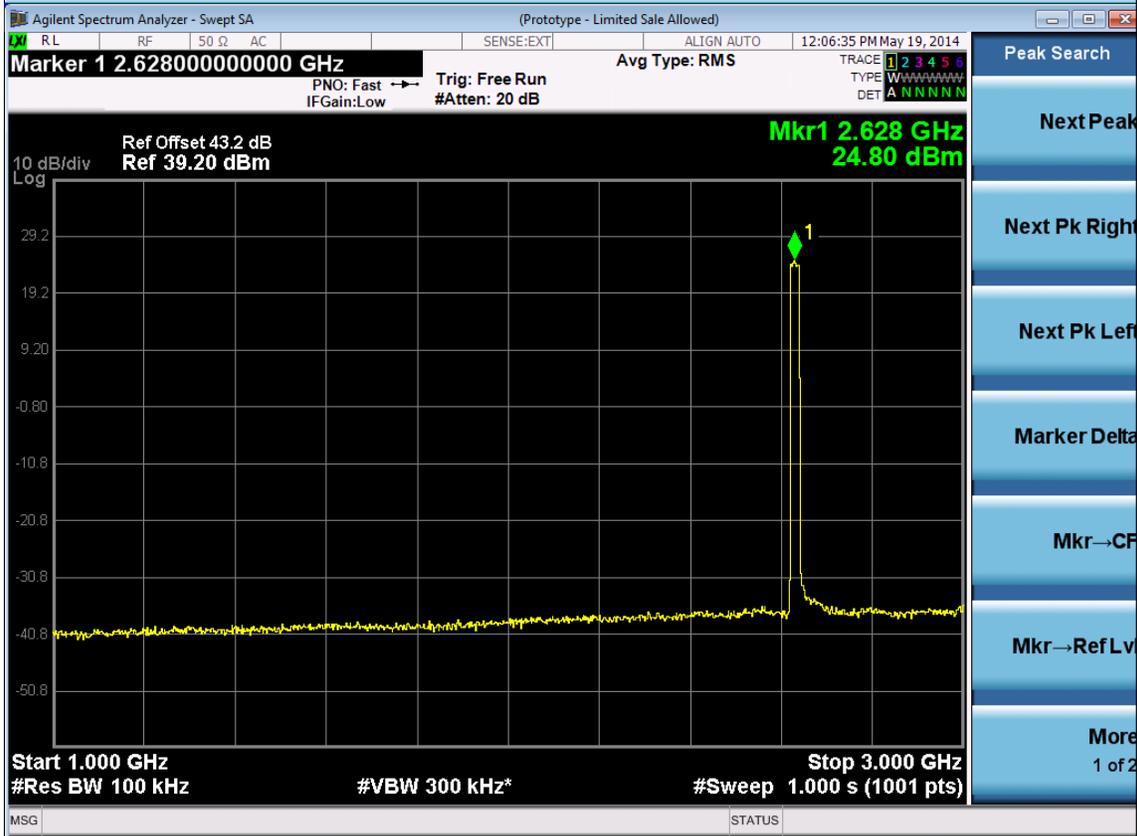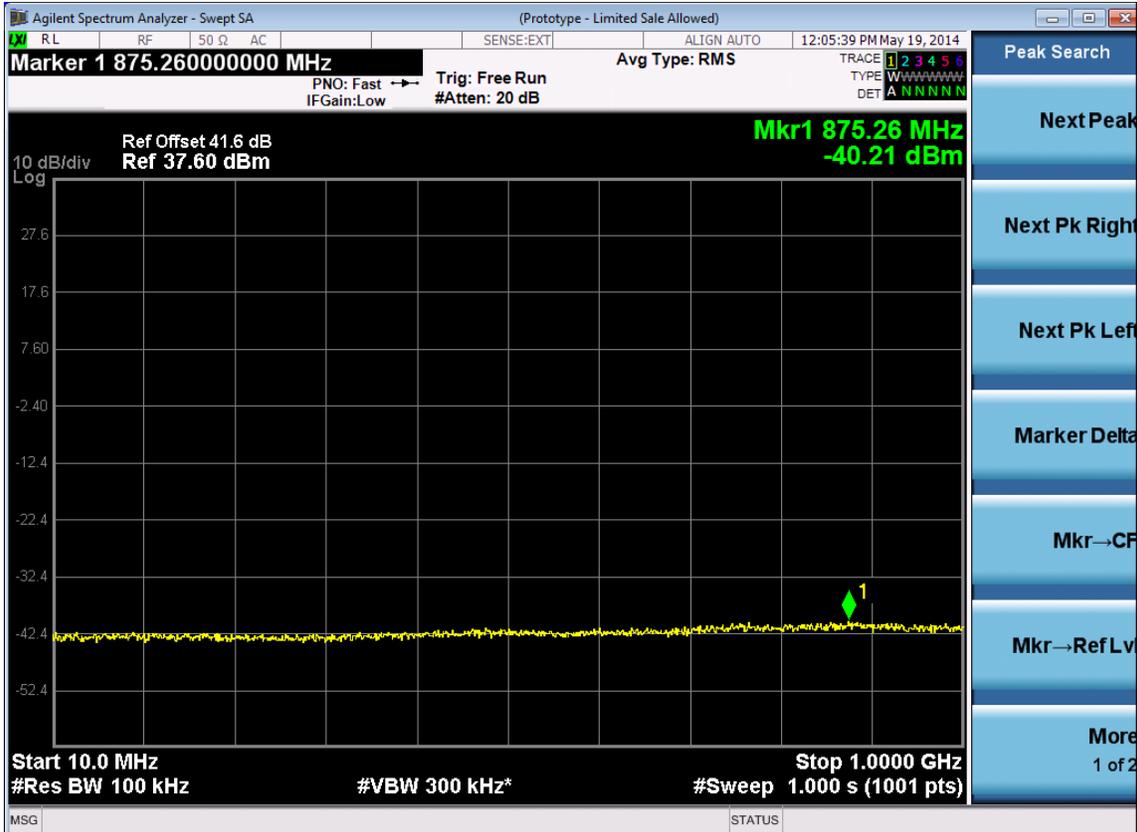



20M -Port 2 -2655MHz