







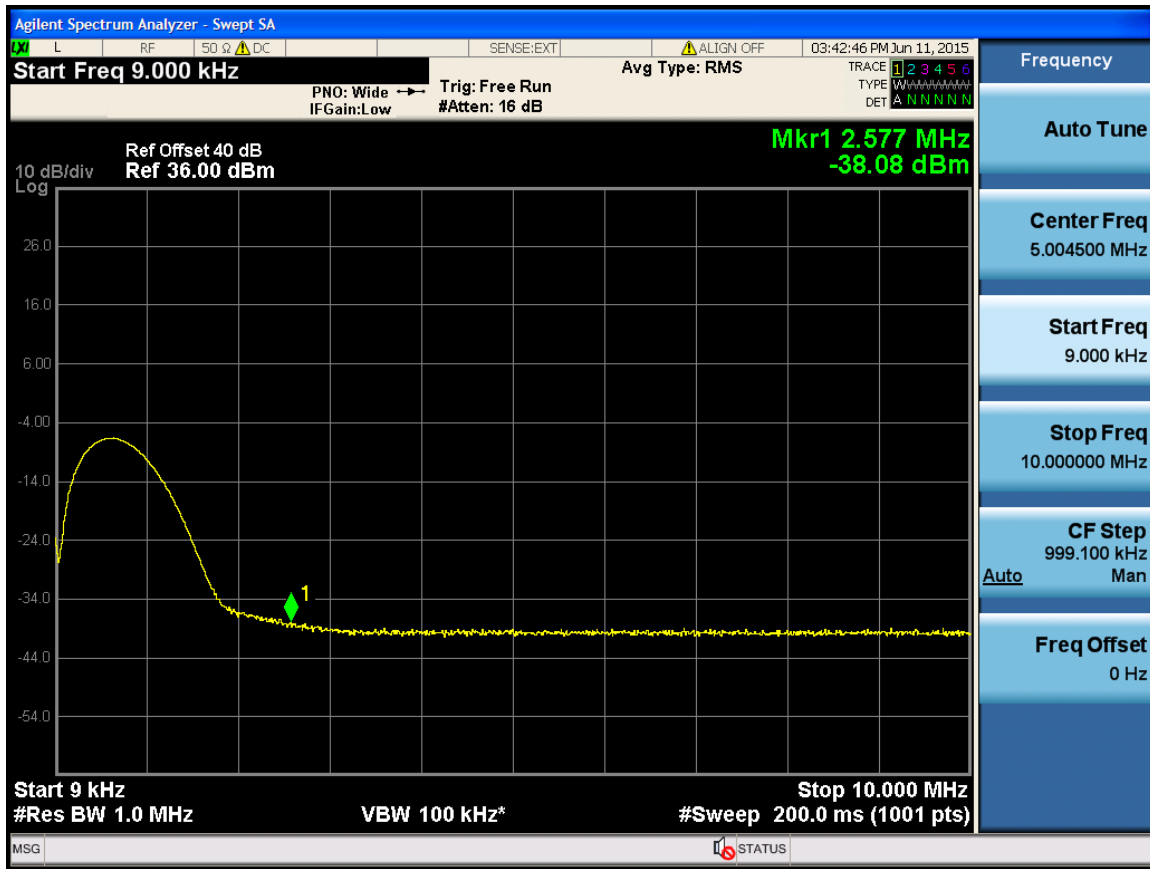

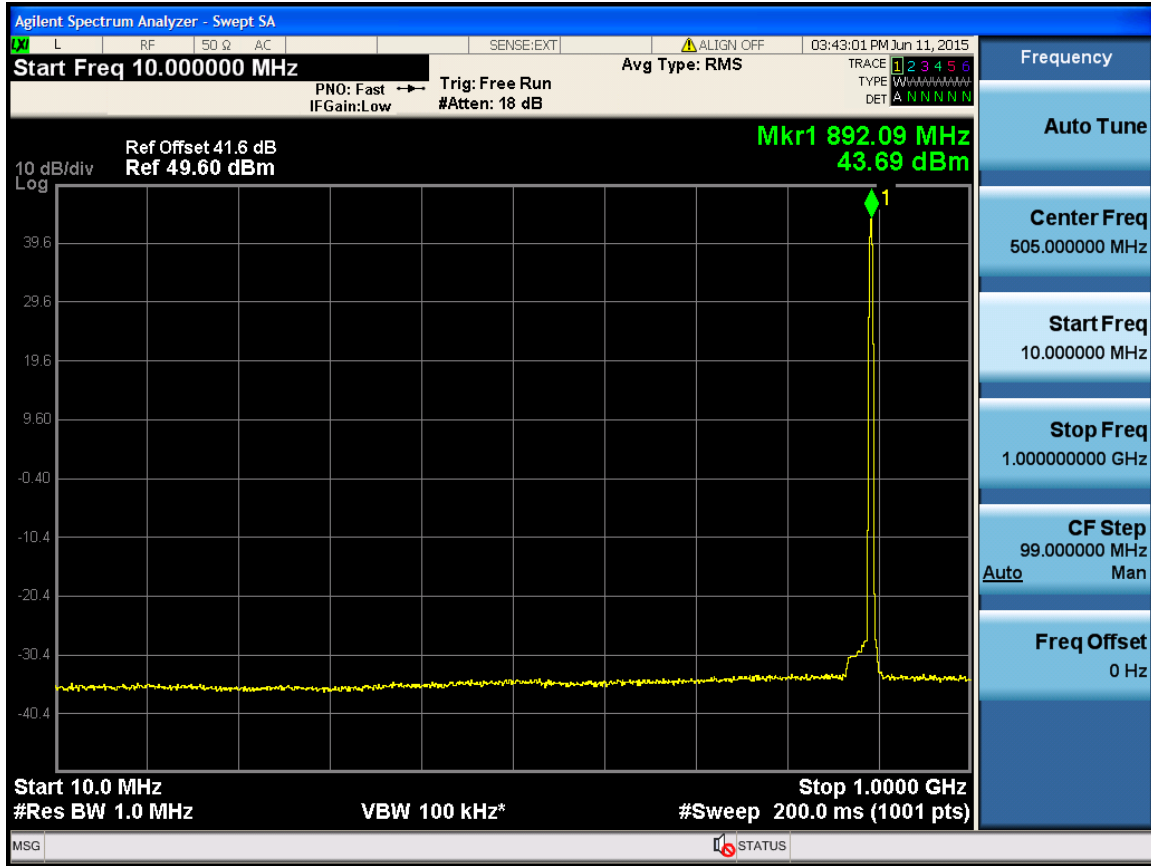


5M -Port 1 -871.5MHz

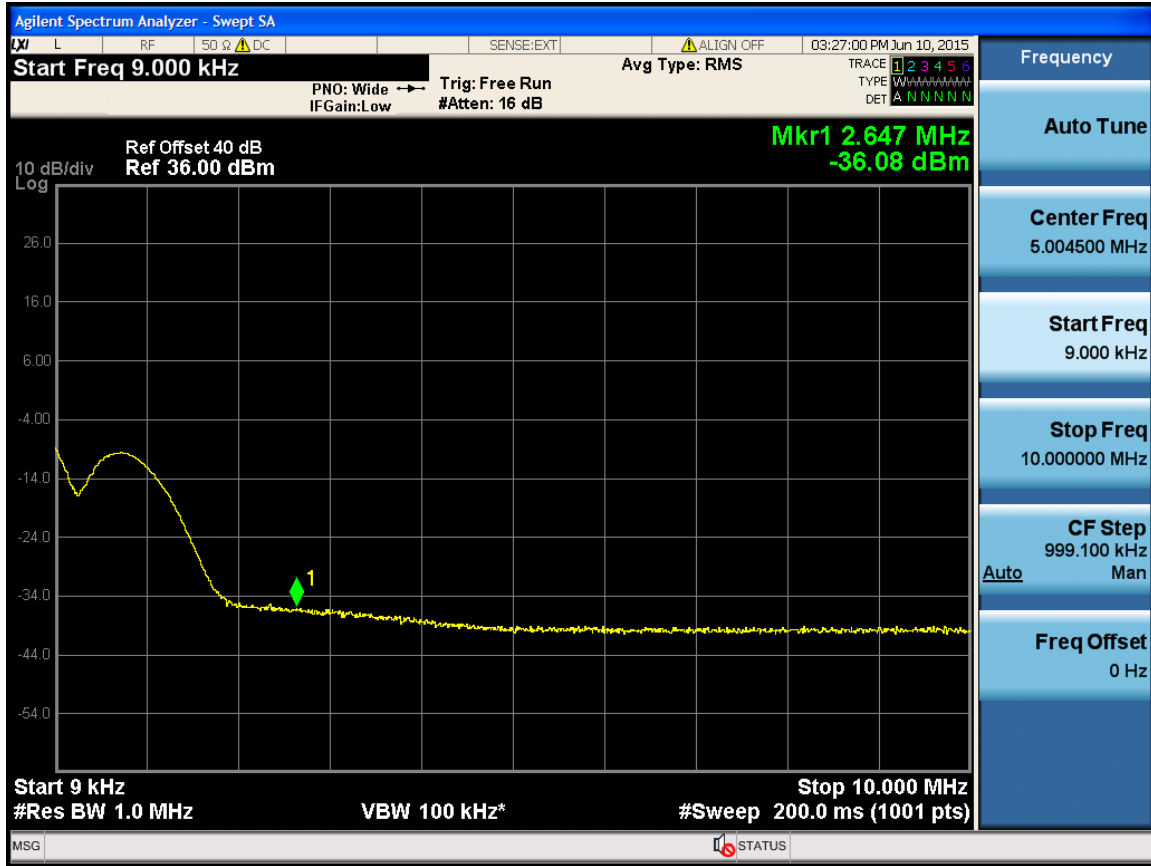


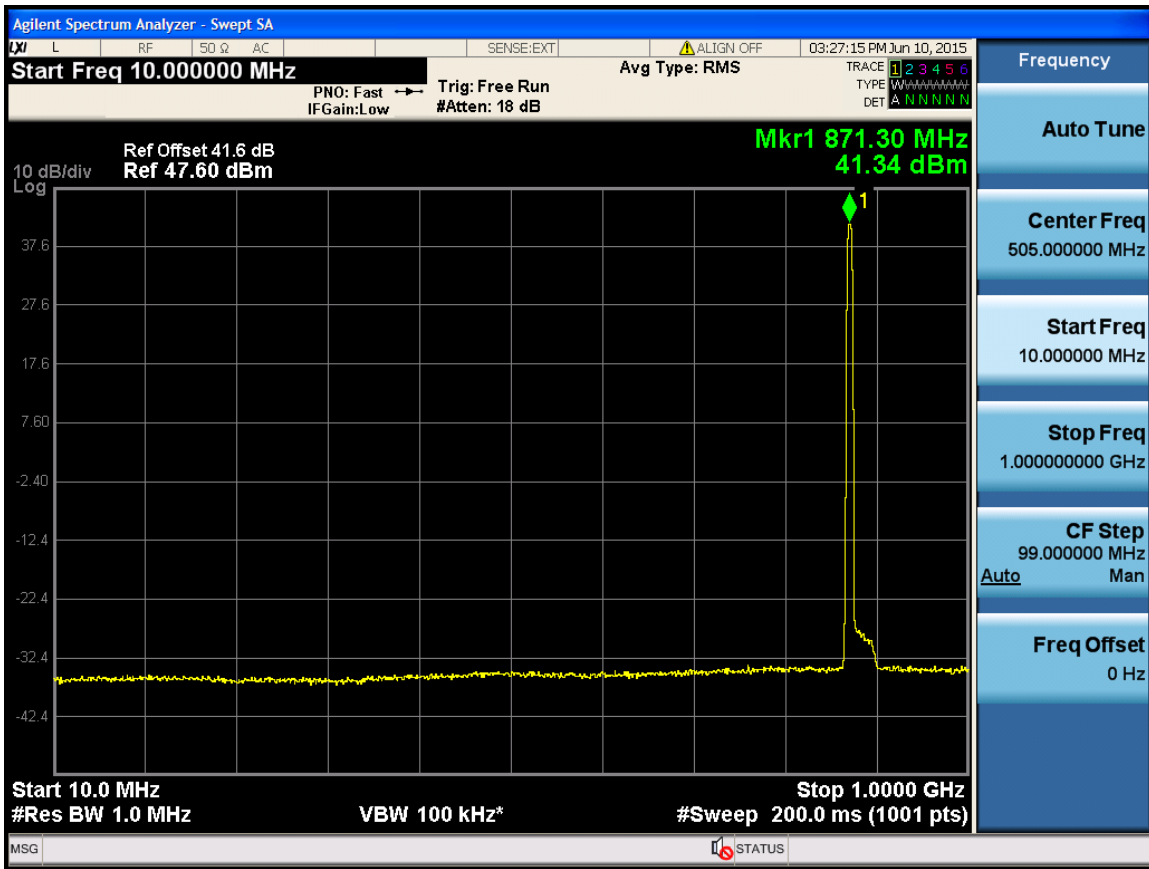




5M -Port 1 -881.5MHz

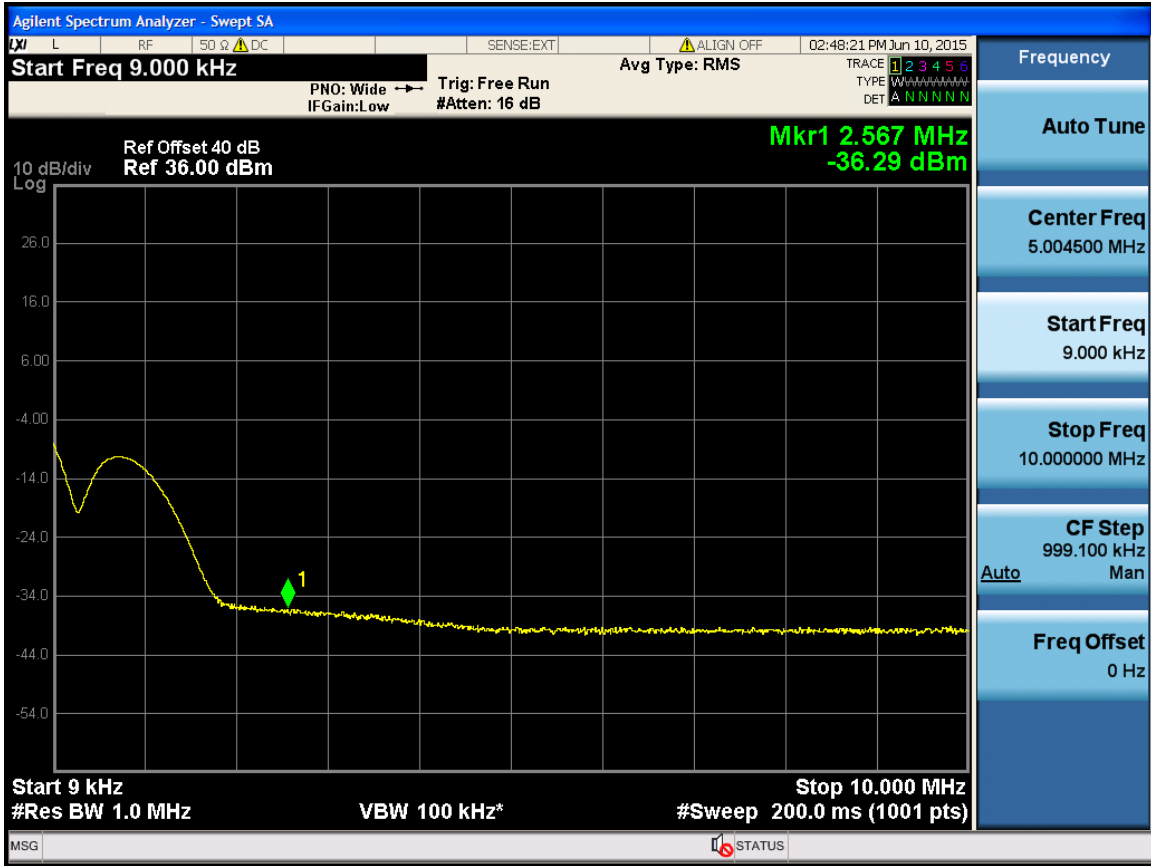


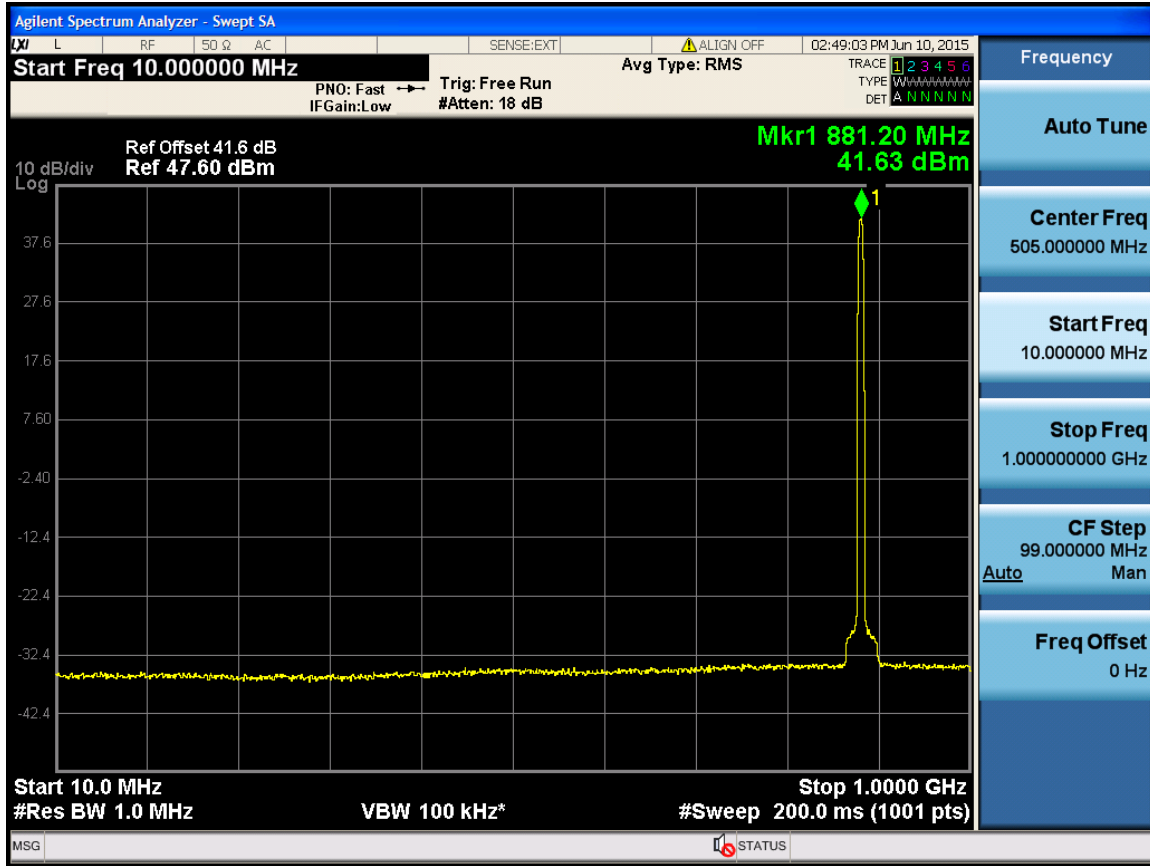




5M -Port 1 -891.5MHz

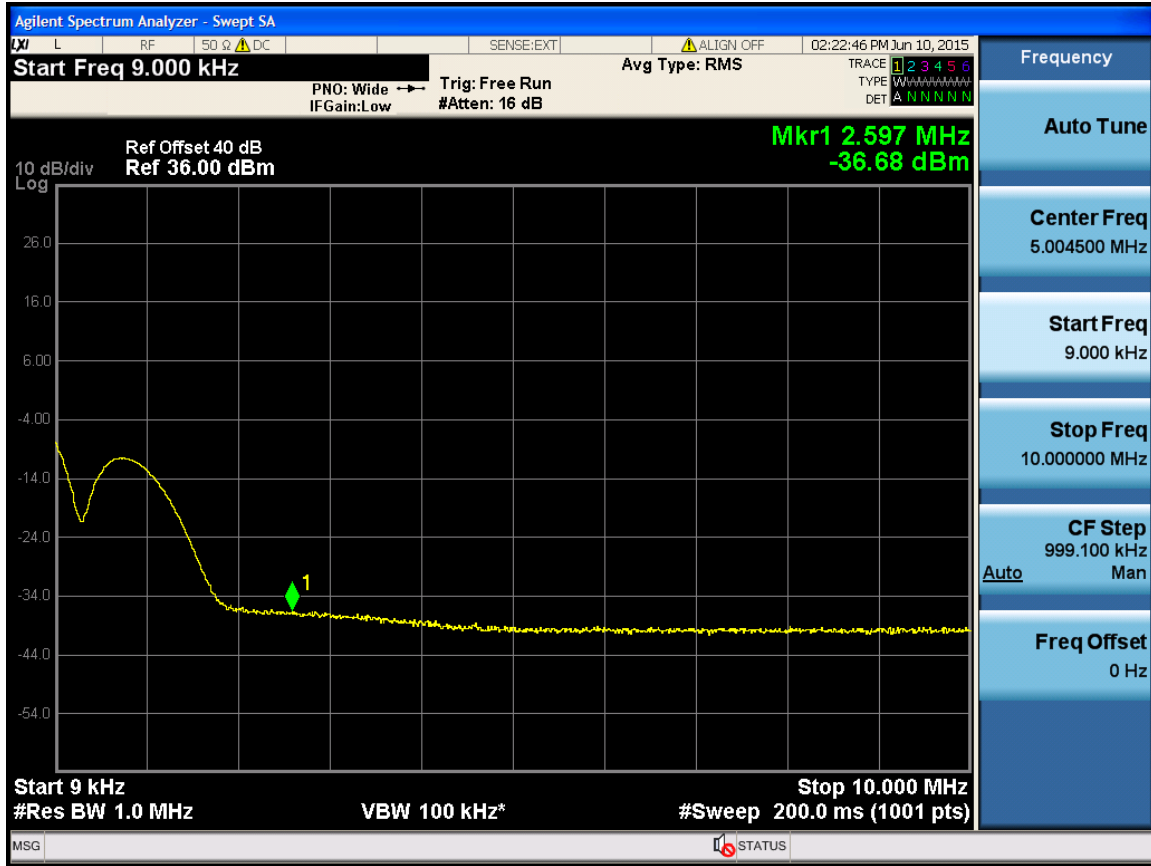


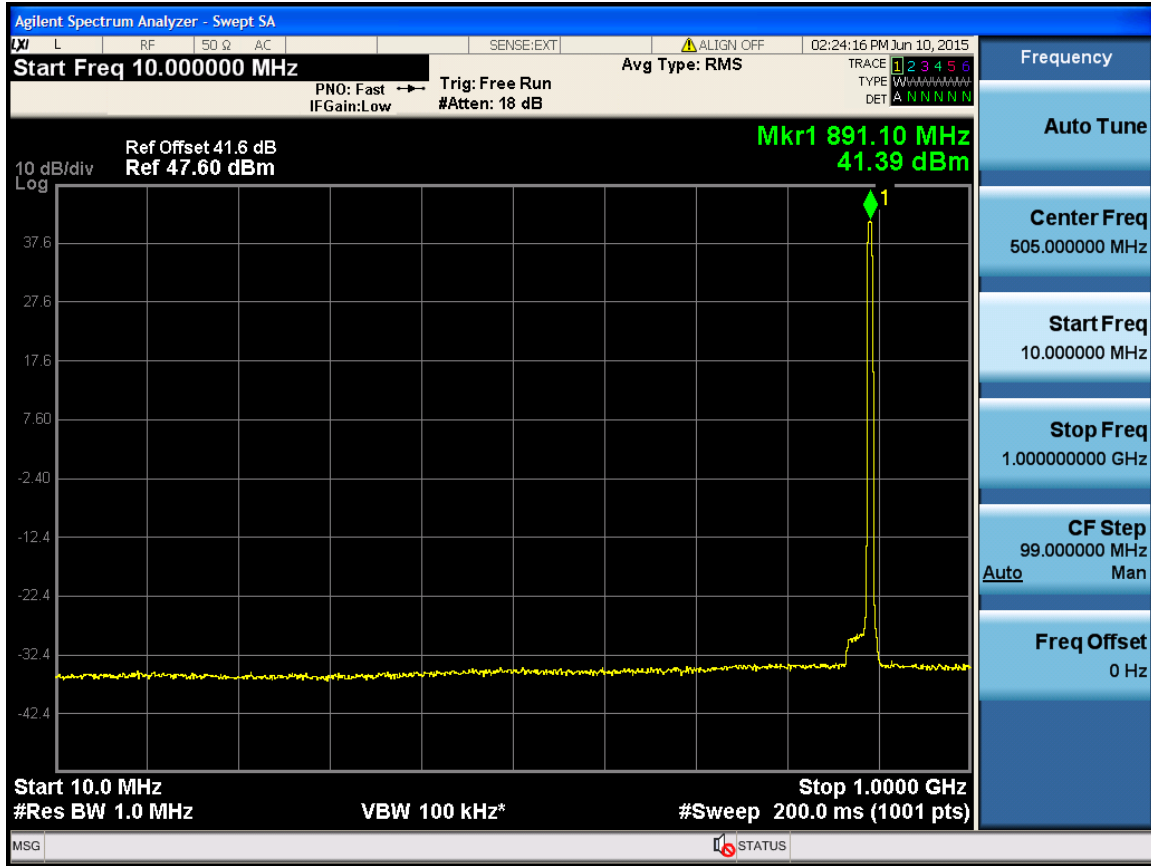




5M -Port 4 -871.5MHz

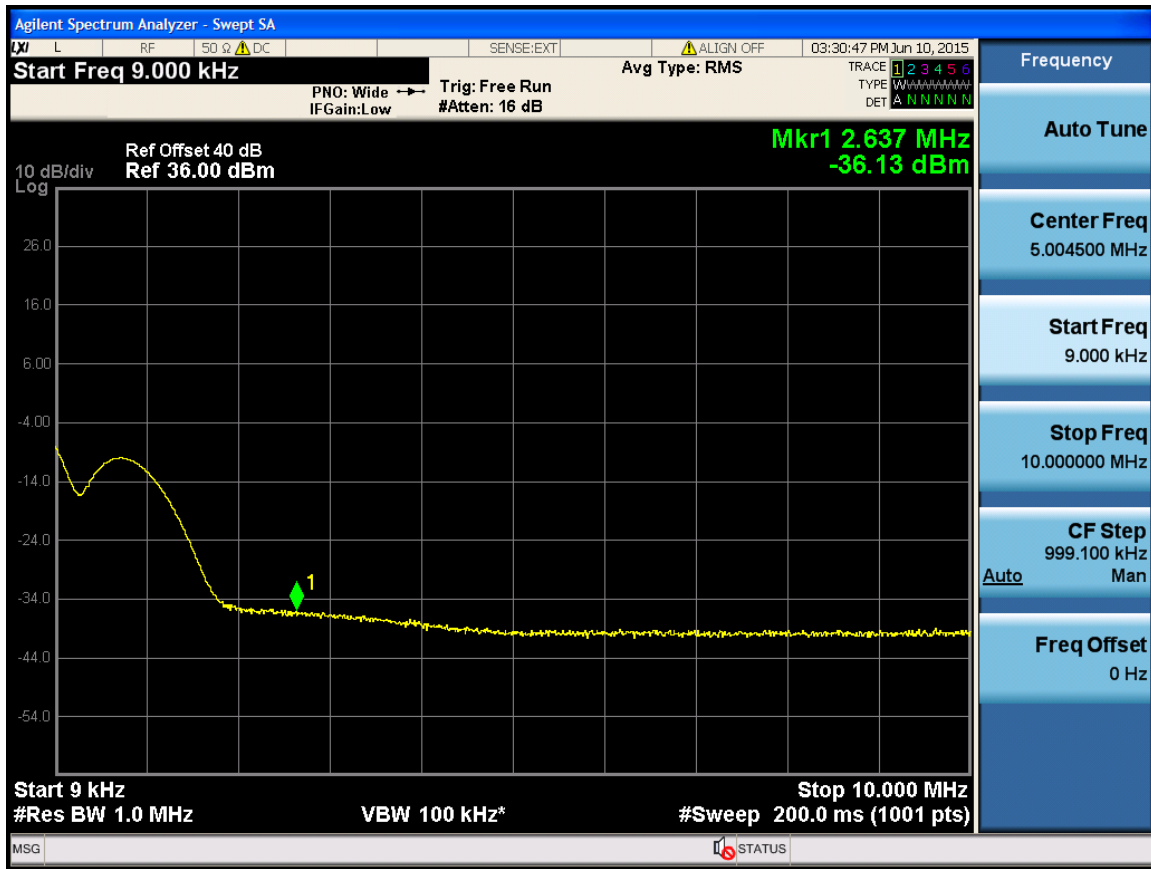


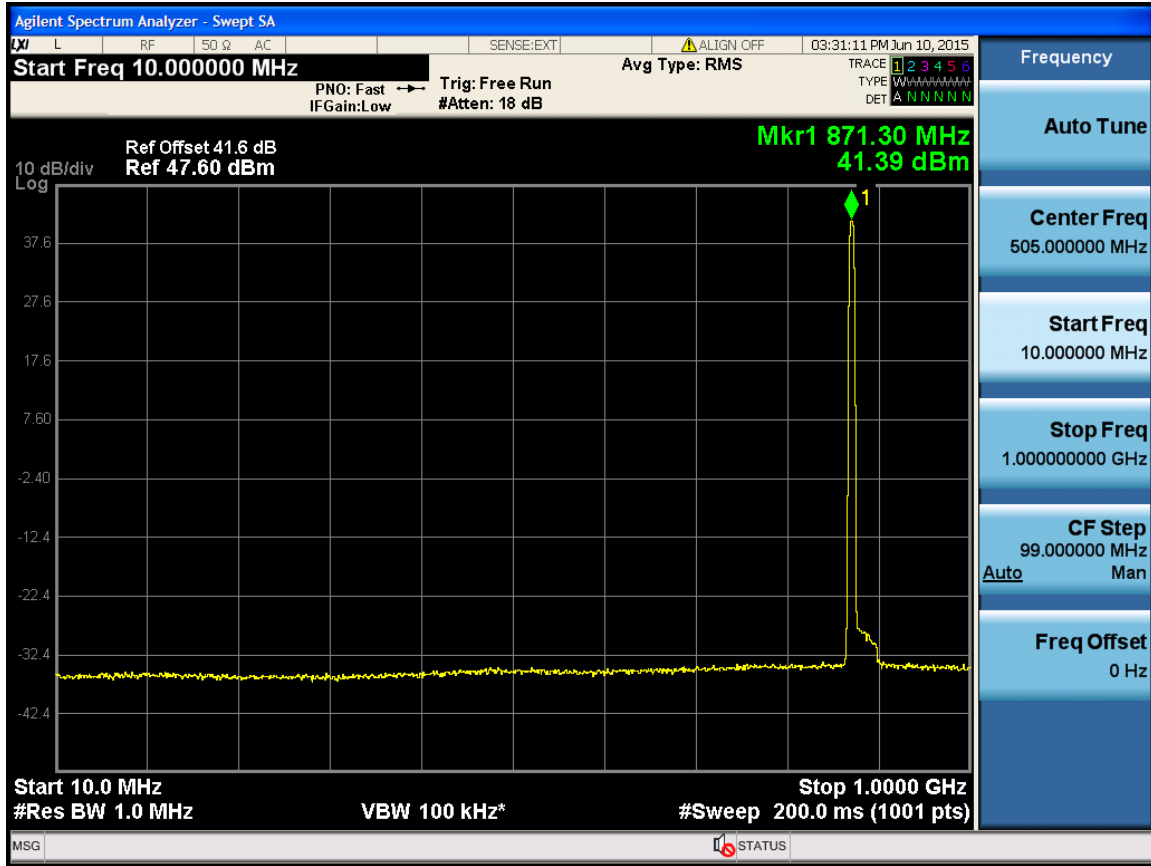




5M -Port 4 -881.5MHz

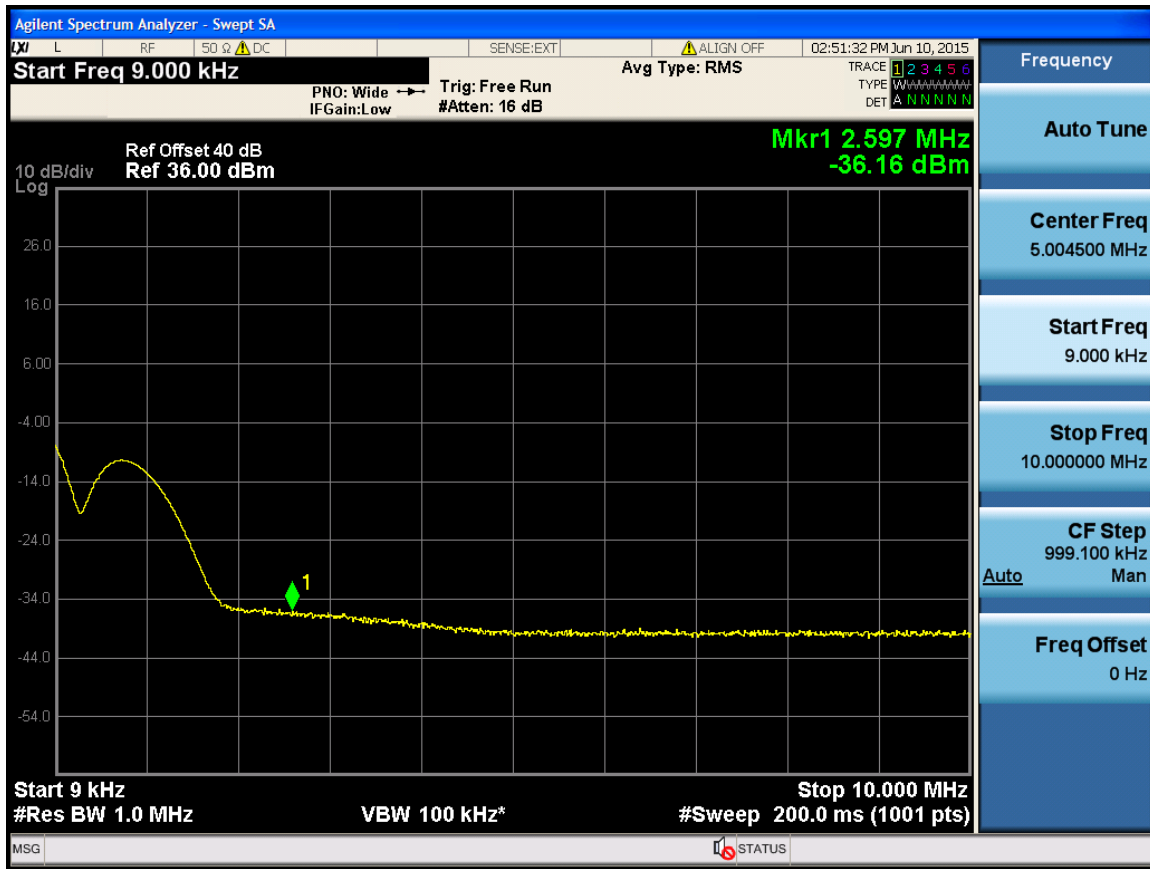


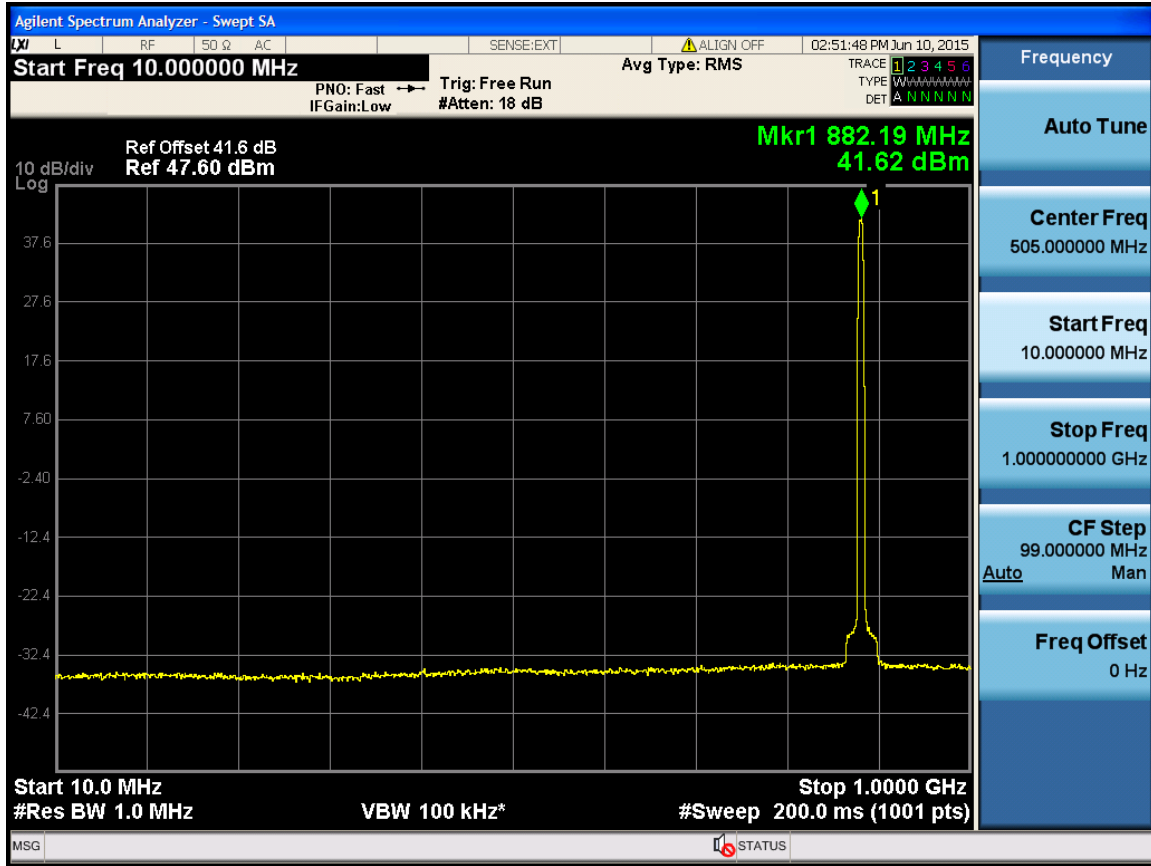




5M -Port 4 -891.5MHz

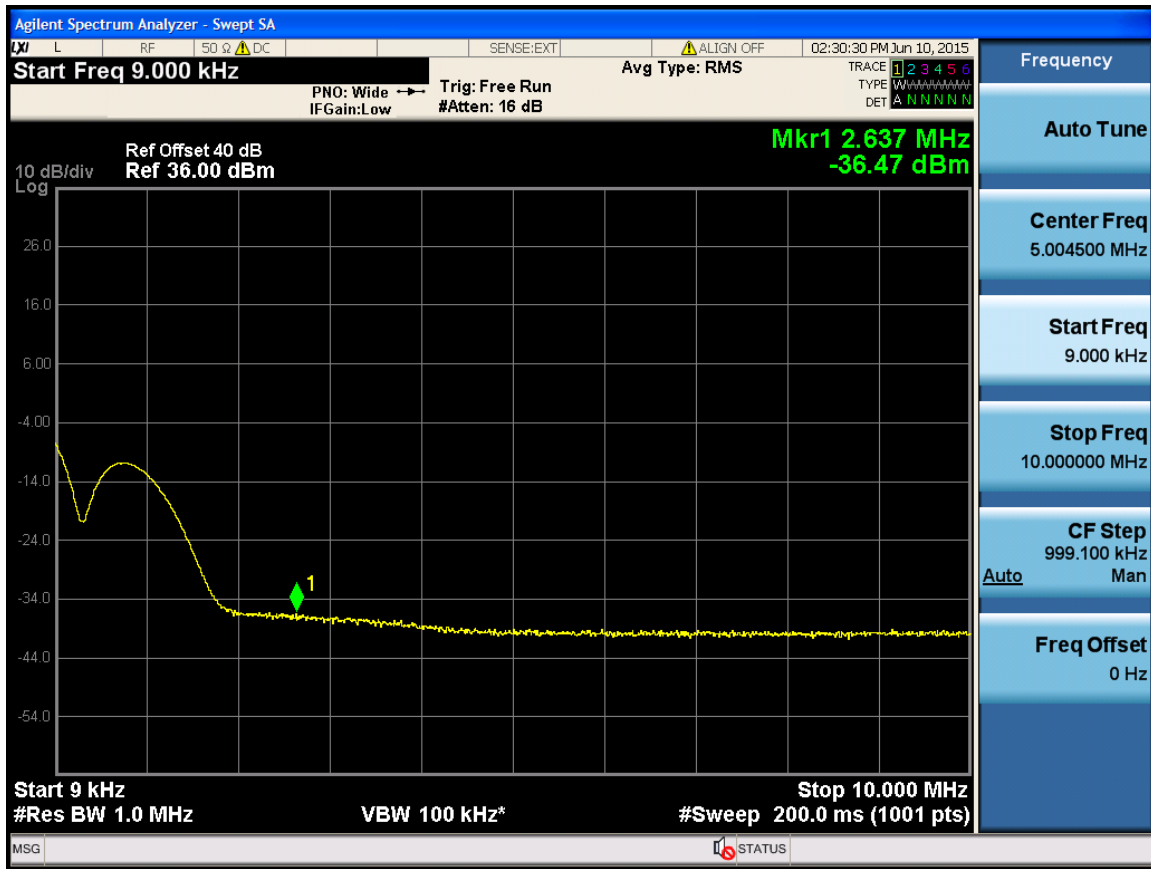


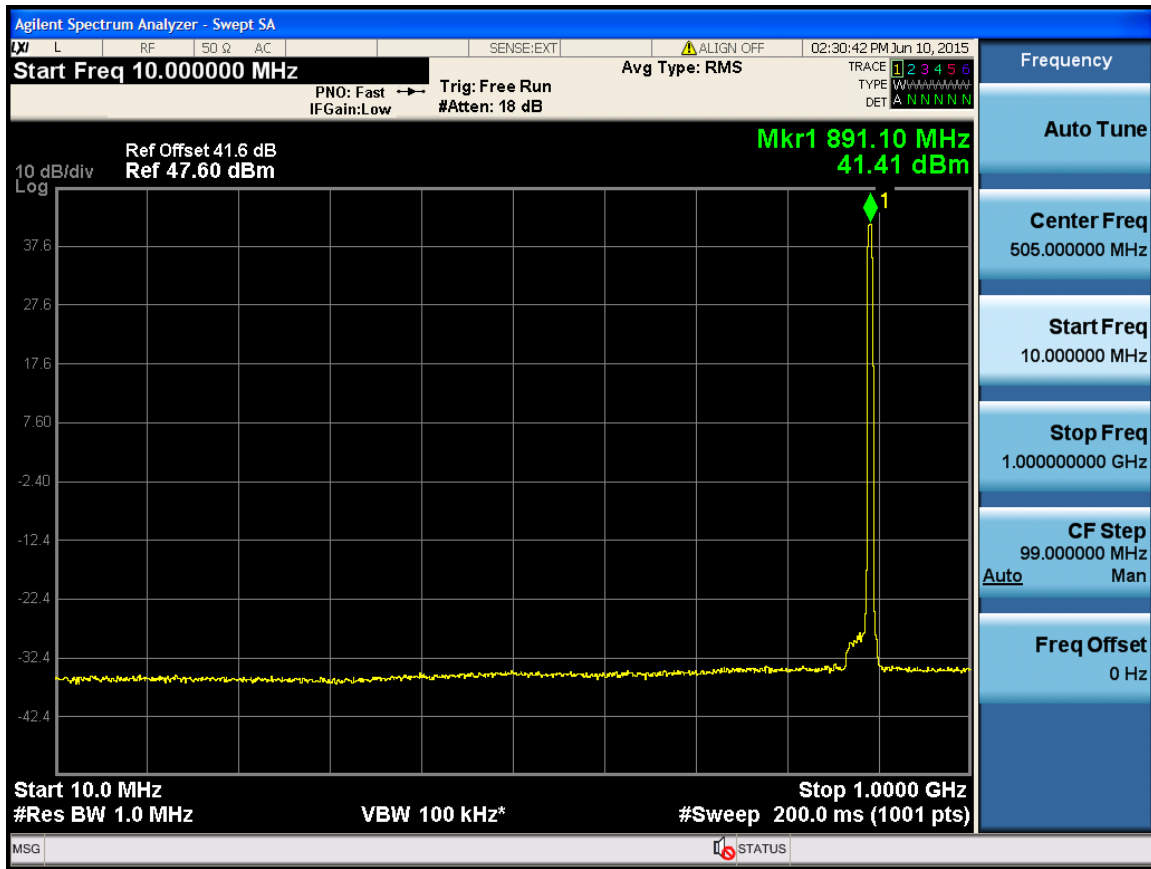




10M -Port 1 -874MHz

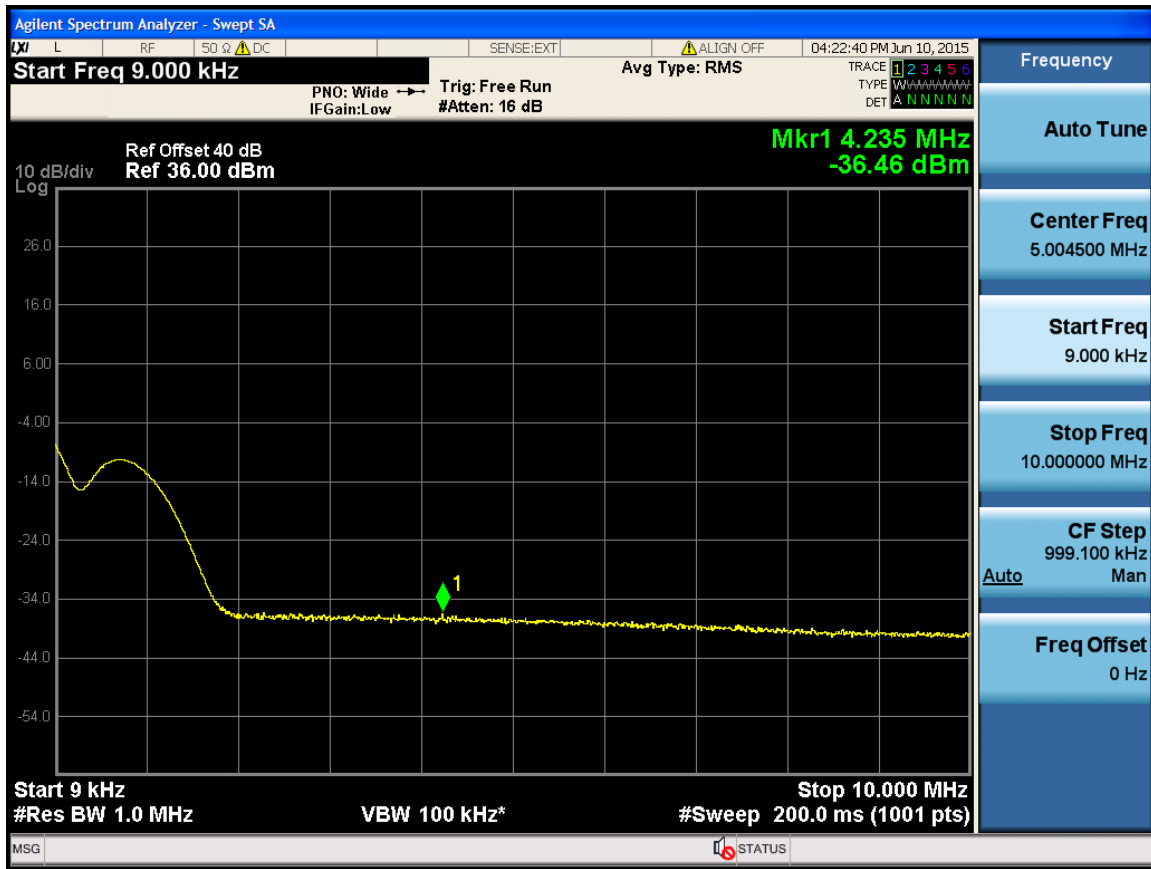


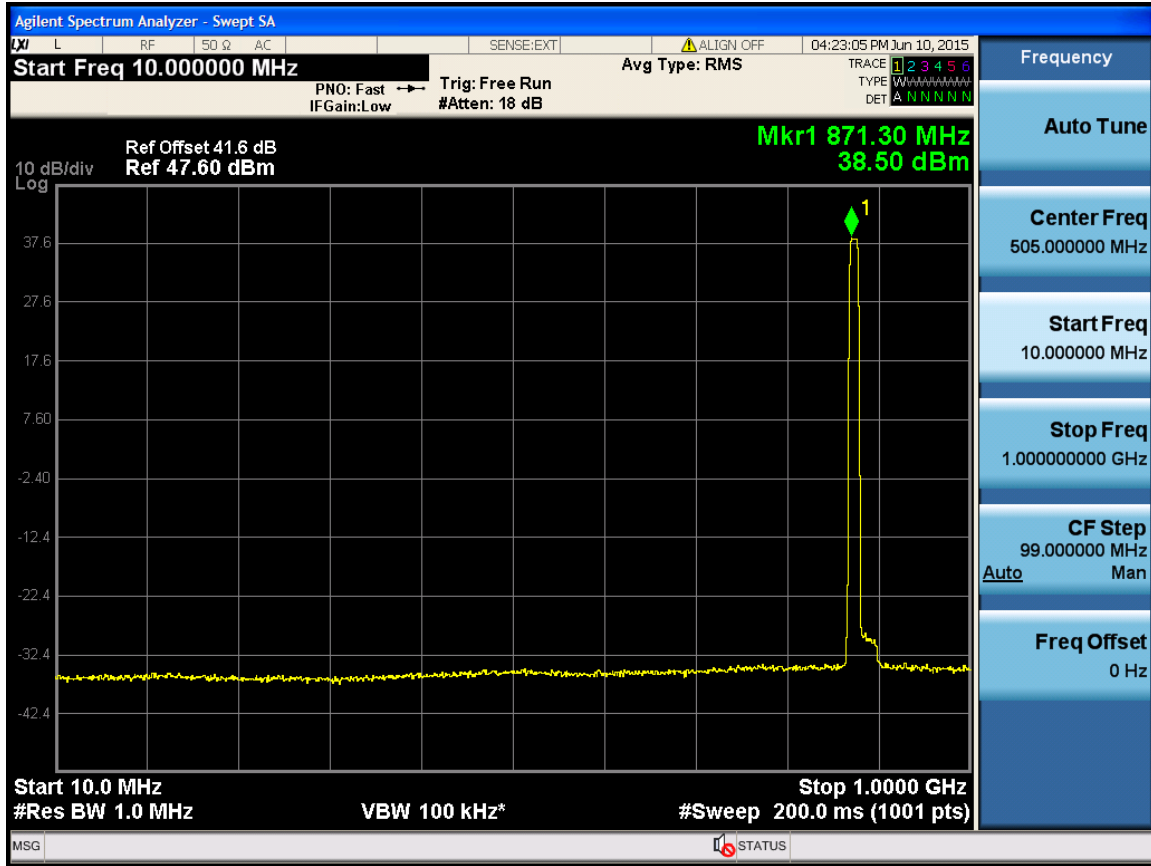




10M -Port 1 -881.5MHz

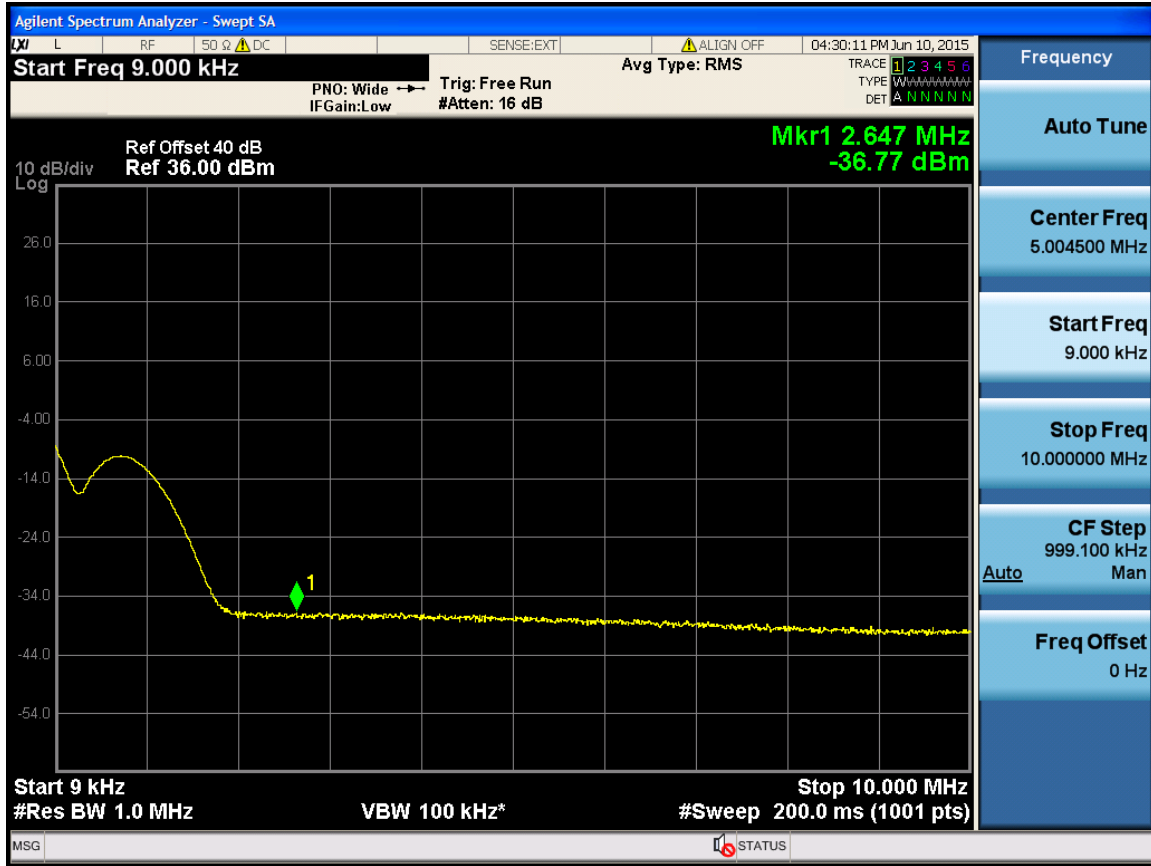


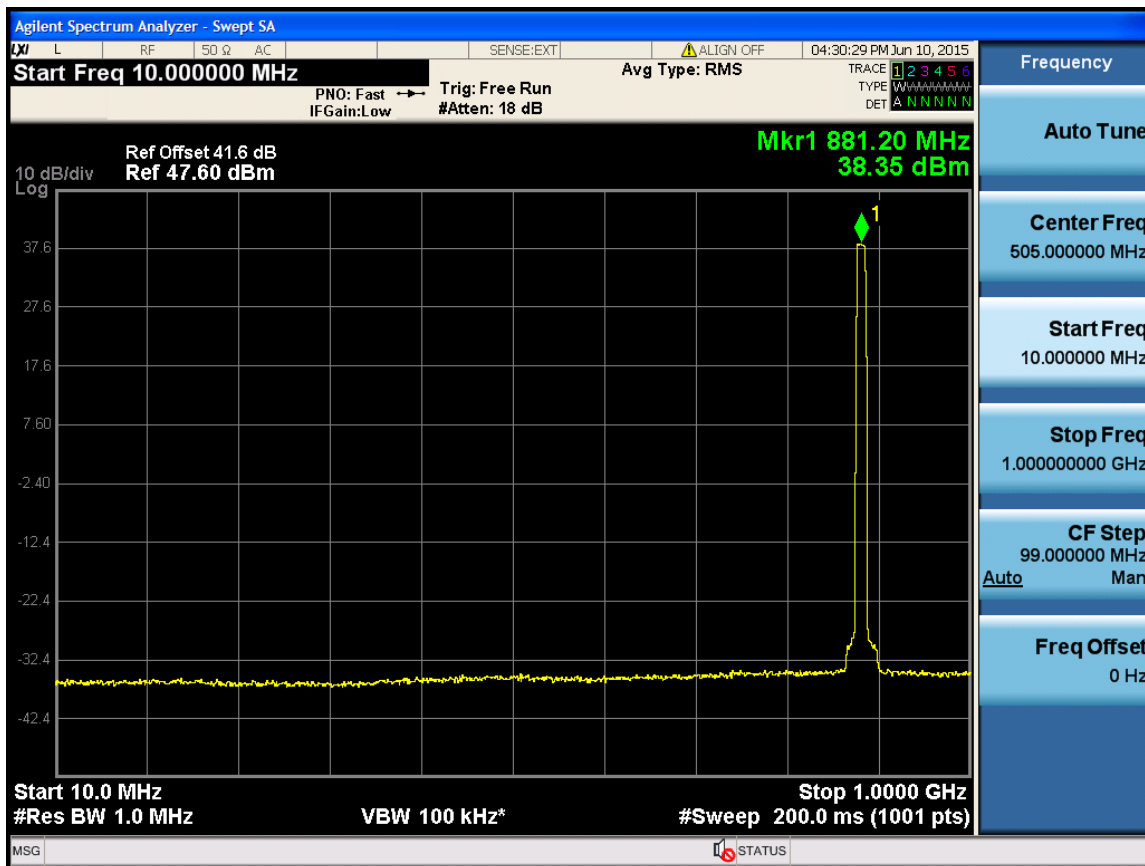




10M -Port 1 -889MHz

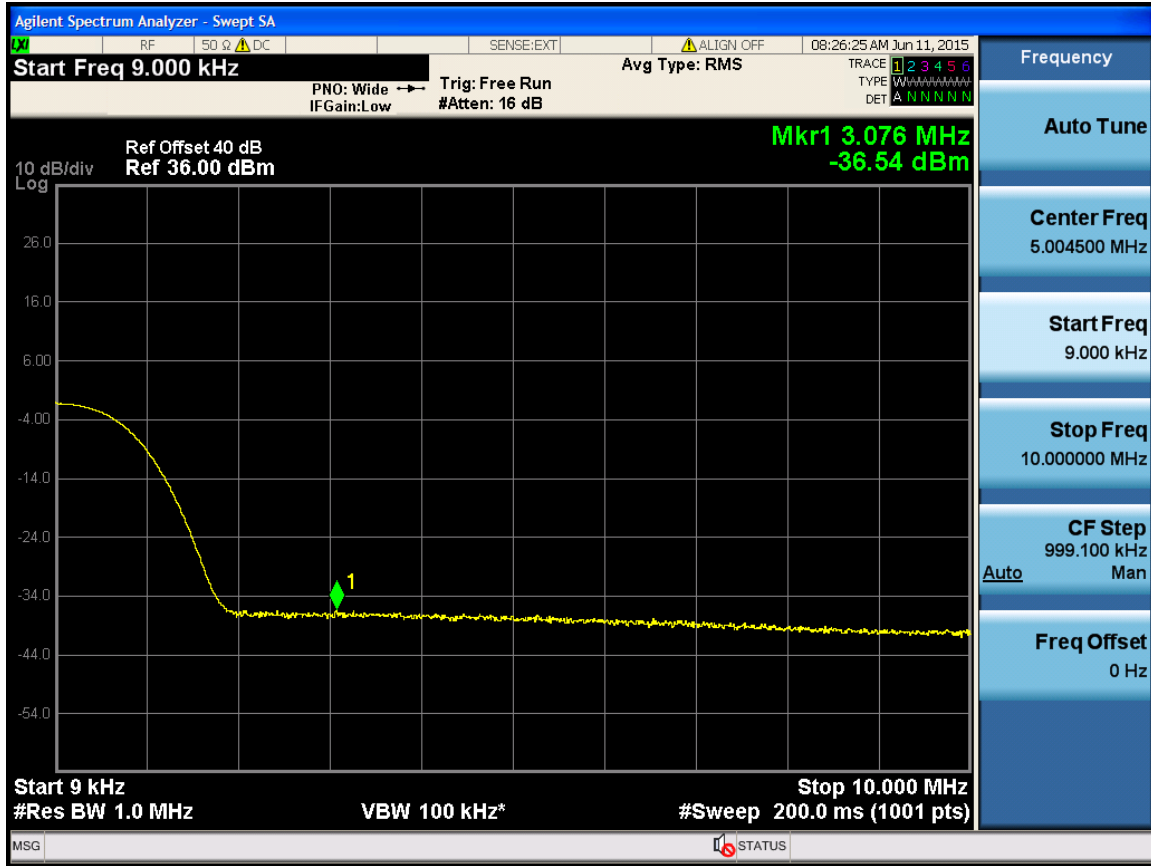


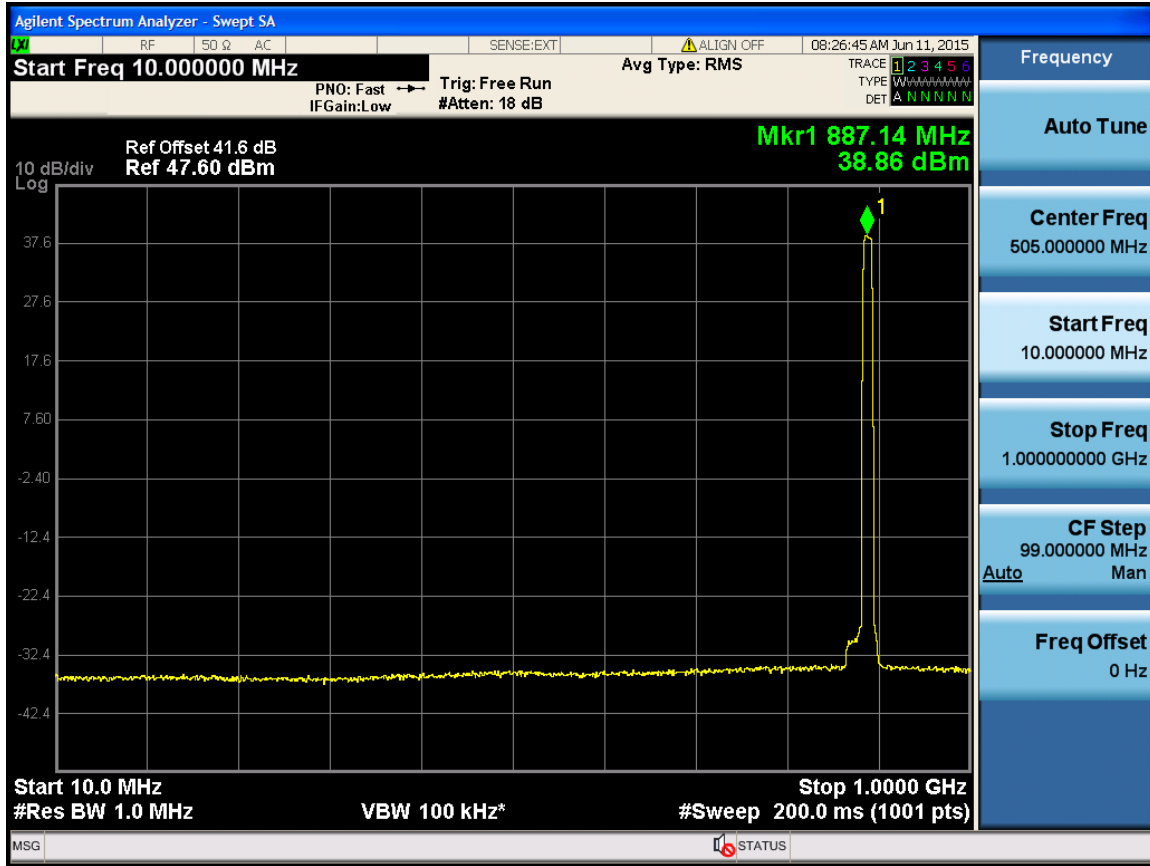




10M -Port 4 -874MHz

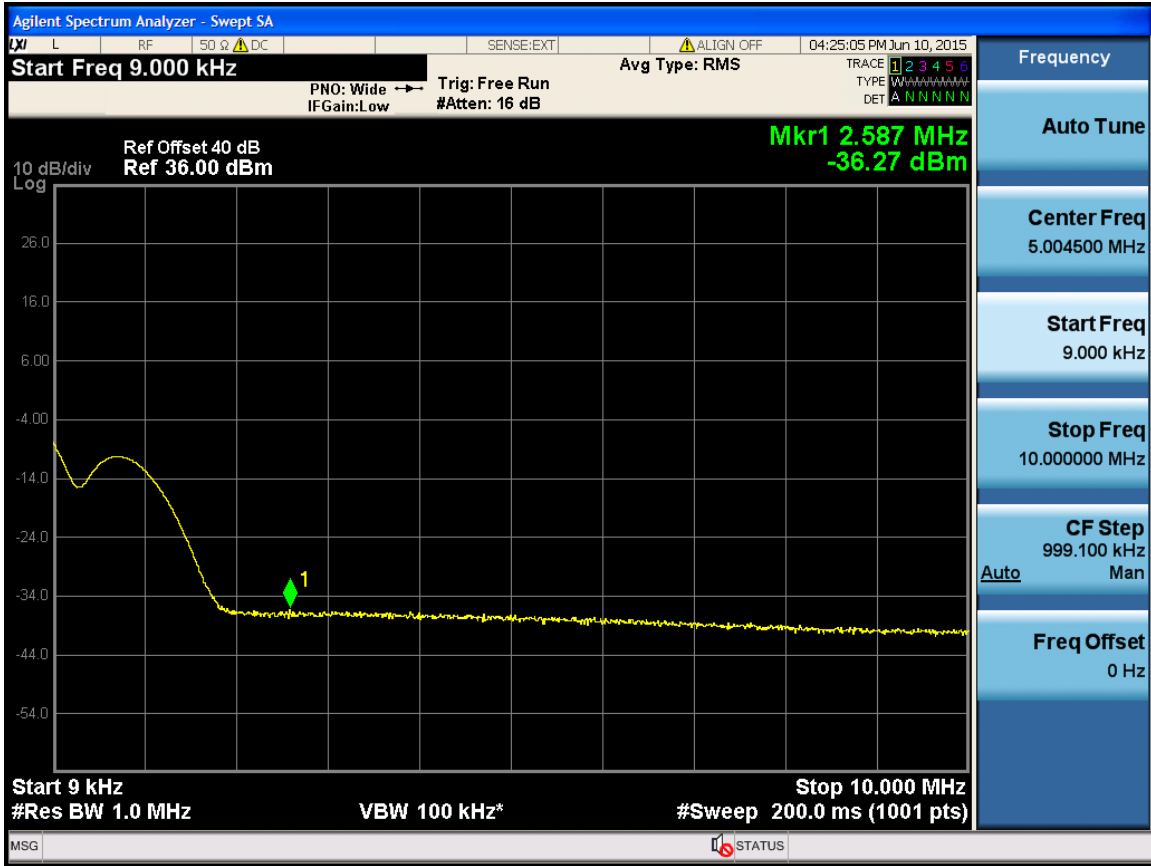


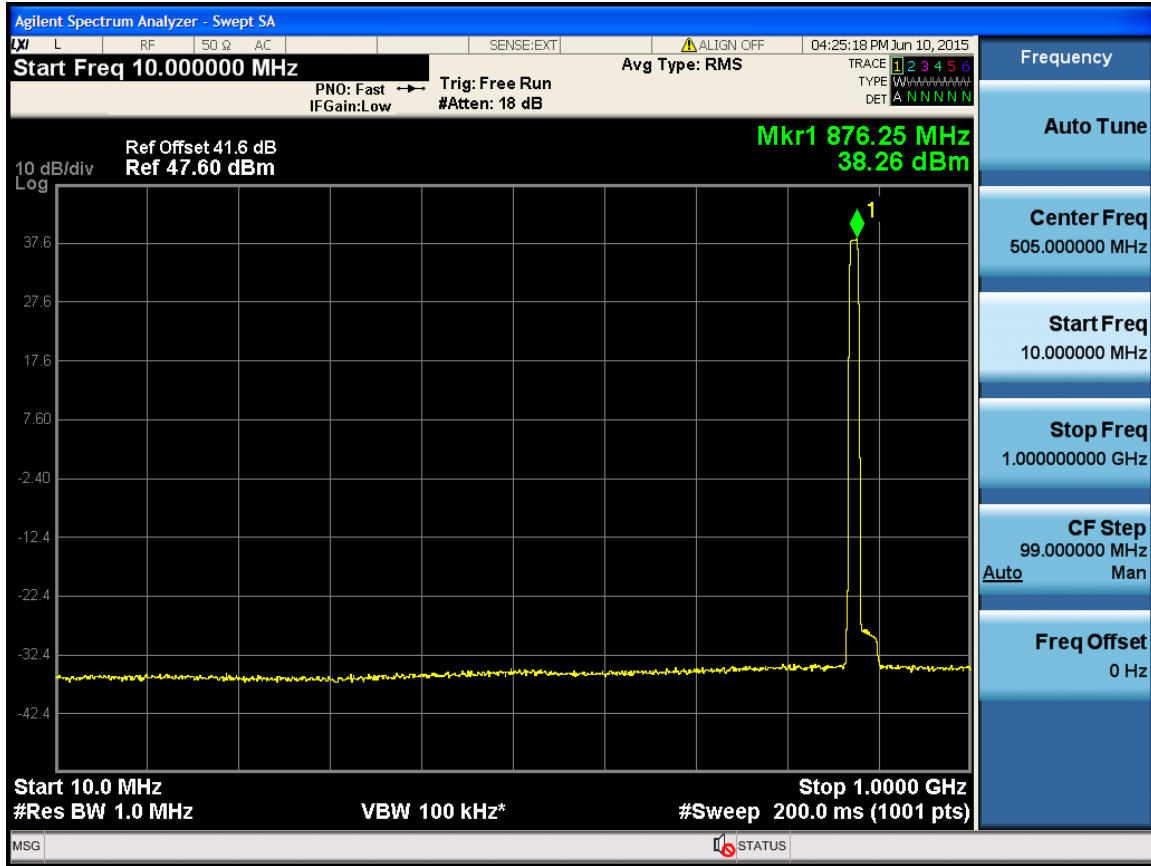




10M -Port 4 -881.5MHz

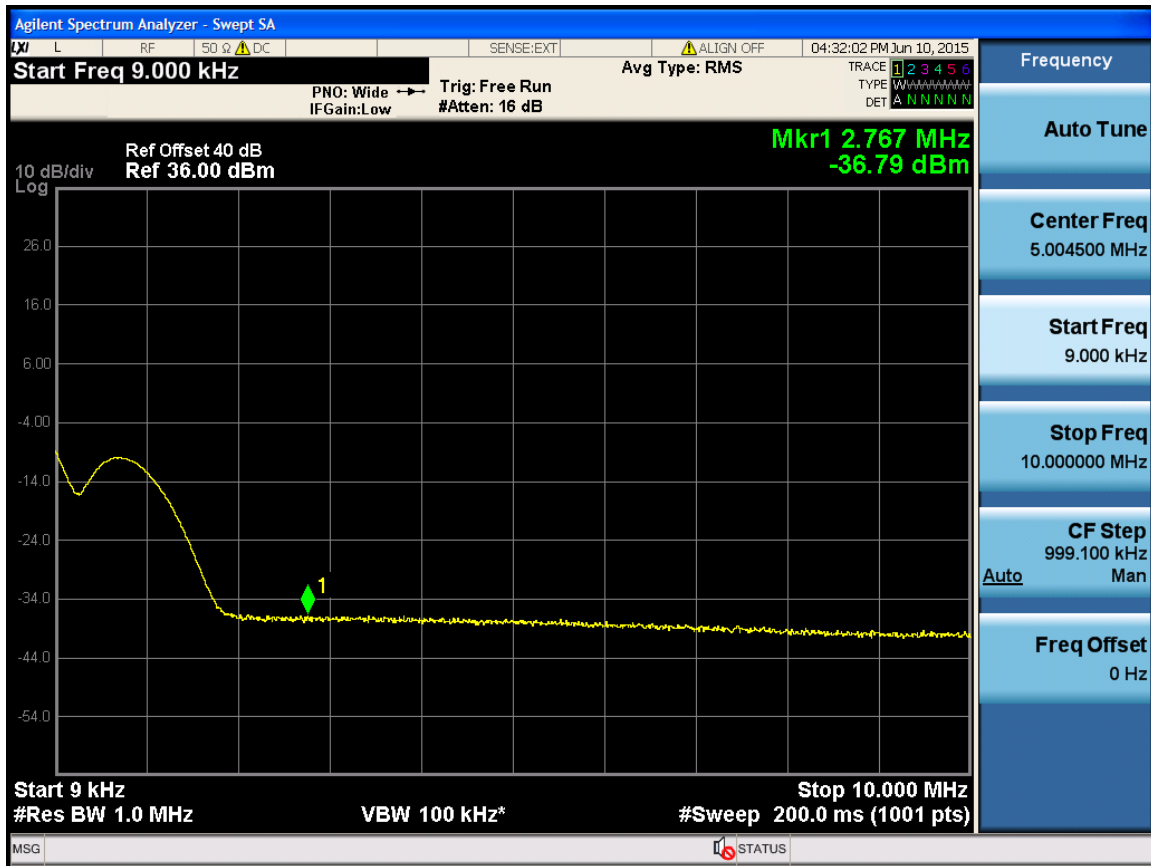


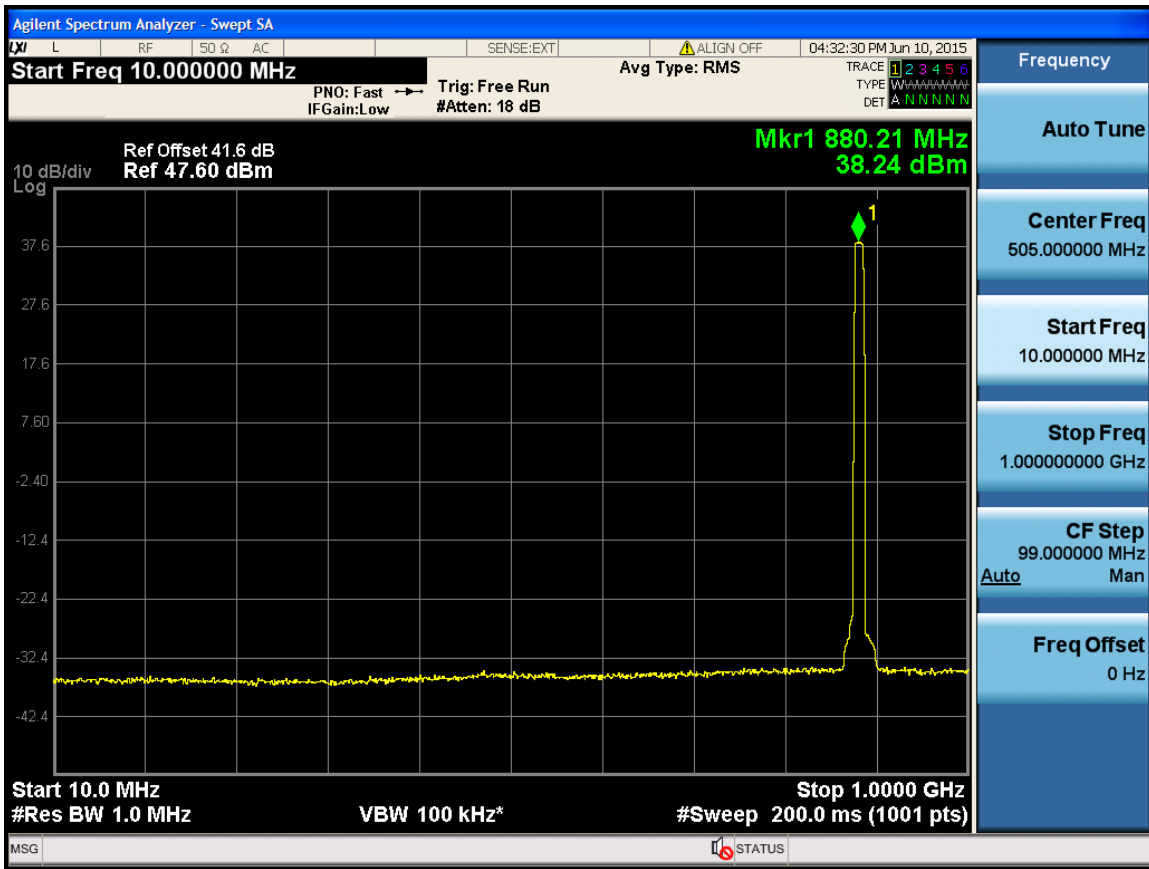



10M -Port 4 -889MHz

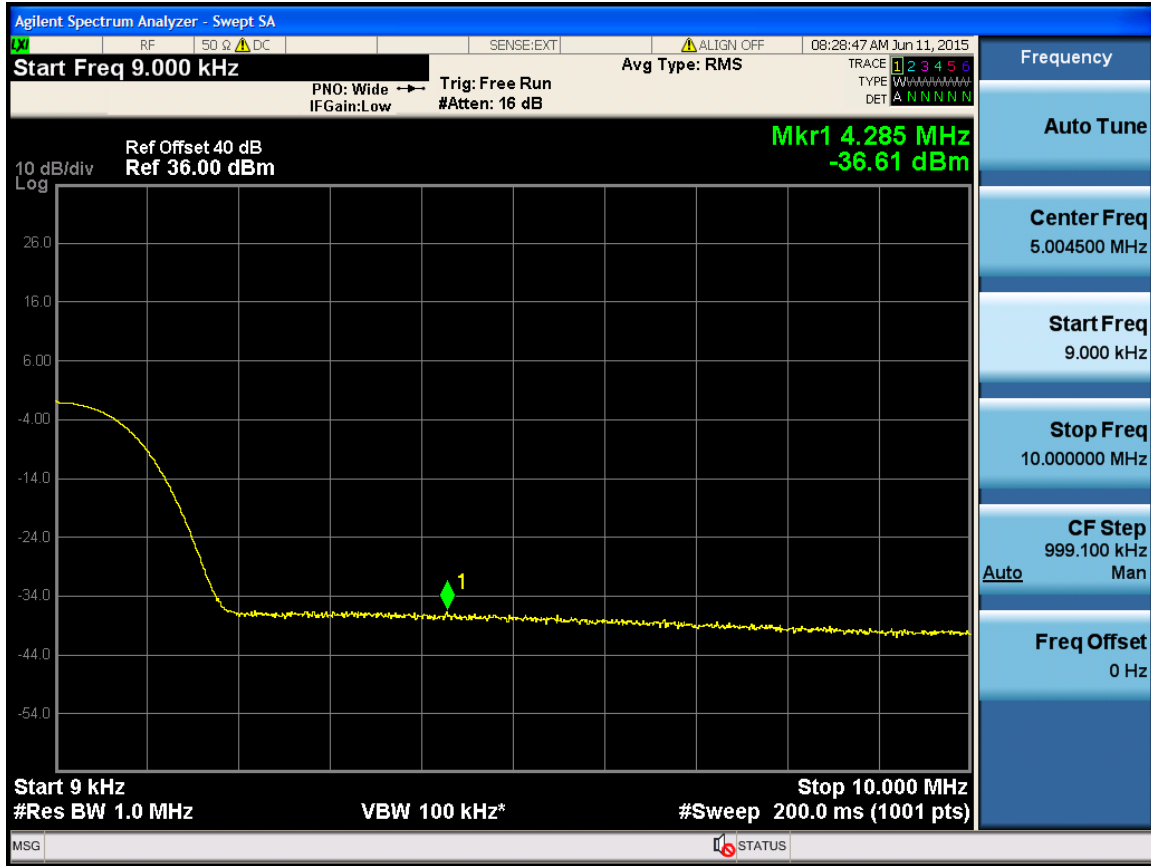

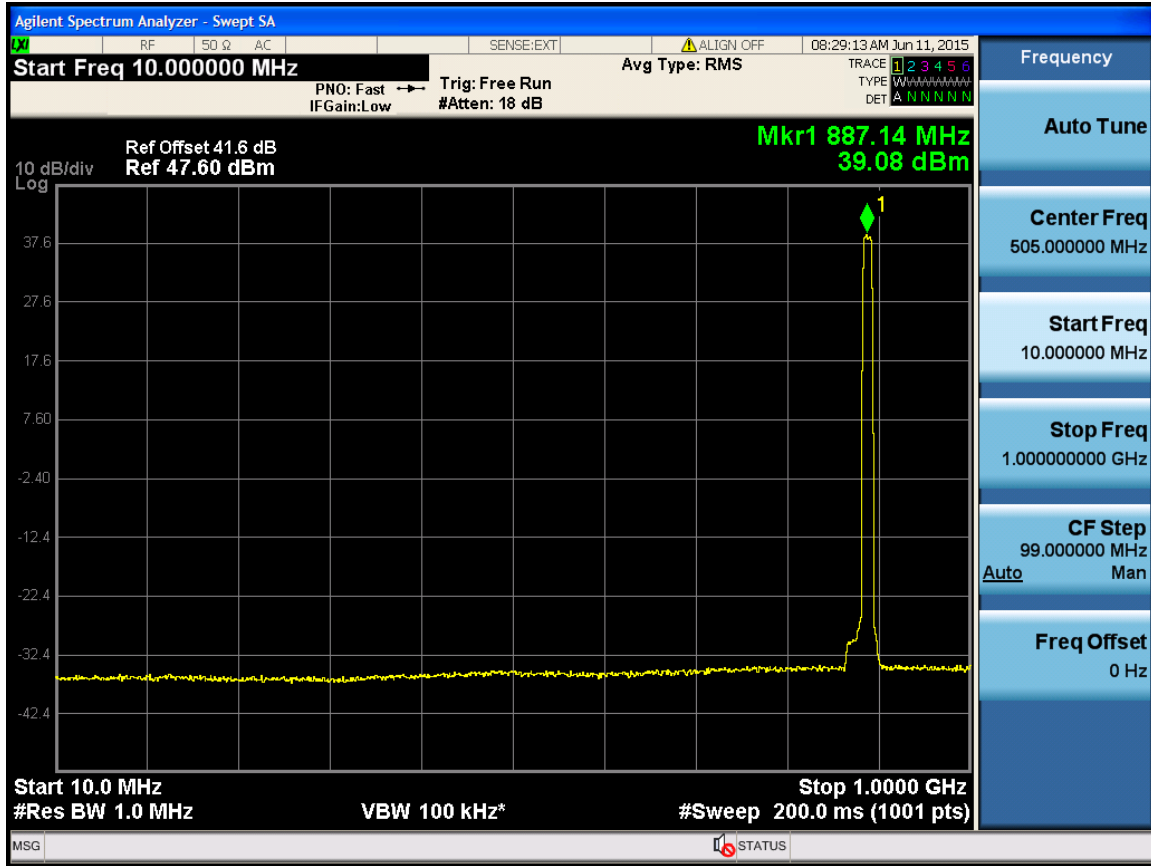



10 OCCUPIED BANDWIDTH

Applicable Standard: FCC §2.1049

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9030A	MY49431143	2015.04.17	2016.04.17
DTS	DTS 40dB Attenuator	DTS100-40-3-1	09112005	2015.04.17	2016.04.17

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all

calibration have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

The RF out of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. 99%Power bandwidth was recorded.

Environmental Conditions

Temperature:	20 ° C
Relative Humidity:	53%
ATM Pressure:	1009mbar

Test Result: Pass

Test Mode: Transmitting LTE

Test Data

Channel Bandwidth :3M			
Port	Center Freq. (MHz)	99% Power Bandwidth (MHz)	Limit (MHz)
1	870.5	2.6939	3M
	881.5	2.6918	3M
	892.5	2.6936	3M
4	870.5	2.6943	3M
	881.5	2.6930	3M
	892.5	2.6941	3M

3M -Port 1 -870.5MHz